

FCC Test Report

Report No.: RFBGSN-WTW-P20080589-6

FCC ID: NKS-PA1

Test Model: Trimble Gateway-PA1

Received Date: Aug. 29, 2020

Test Date: Sep. 09, 2020 ~ Oct. 23, 2020

Issued Date: Nov. 03, 2020

Applicant: PeopleNet Communications Corporation

Address: 4400 Baker Road, Minnetonka Minnesota 55343-8684 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and References	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	17
4.1.5 Test Set Up	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement.....	30
4.2.1 Limits of Conducted Emission Measurement	30
4.2.2 Test Instruments	30
4.2.3 Test Procedures.....	31
4.2.4 Deviation from Test Standard	31
4.2.5 Test Setup.....	31
4.2.6 EUT Operating Conditions.....	31
4.2.7 Test Results	32
4.3 6 dB Bandwidth Measurement.....	34
4.3.1 Limits of 6 dB Bandwidth Measurement.....	34
4.3.2 Test Setup.....	34
4.3.3 Test Instruments	34
4.3.4 Test Procedure	34
4.3.5 Deviation from Test Standard	34
4.3.6 EUT Operating Conditions.....	34
4.3.7 Test Results	35
4.4 Occupied Bandwidth Measurement.....	37
4.4.1 Test Setup.....	37
4.4.2 Test Instruments	37
4.4.3 Test Procedure	37
4.4.4 Deviation from Test Standard	37
4.4.5 EUT Operating Conditions.....	37
4.4.6 Test Results	38
4.5 Conducted Output Power Measurement	40
4.5.1 Limits of Conducted Output Power Measurement.....	40
4.5.2 Test Setup.....	40
4.5.3 Test Instruments	40
4.5.4 Test Procedures.....	40
4.5.5 Deviation from Test Standard	40
4.5.6 EUT Operating Conditions.....	40
4.5.7 Test Results	41

4.6 Power Spectral Density Measurement	42
4.6.1 Limits of Power Spectral Density Measurement.....	42
4.6.2 Test Setup.....	42
4.6.3 Test Instruments	42
4.6.4 Test Procedure	42
4.6.5 Deviation from Test Standard	42
4.6.6 EUT Operating Condition	42
4.6.7 Test Results	43
4.7 Conducted Out of Band Emission Measurement	45
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	45
4.7.2 Test Setup.....	45
4.7.3 Test Instruments	45
4.7.4 Test Procedure	45
4.7.5 Deviation from Test Standard	45
4.7.6 EUT Operating Condition	45
4.7.7 Test Results	46
5 Pictures of Test Arrangements.....	52
Annex A- Band Edge Measurement	53
Appendix – Information of the Testing Laboratories	59

Release Control Record

Issue No.	Description	Date Issued
RFBGSN-WTW-P20080589-6	Original Release	Nov. 03, 2020

1 Certificate of Conformity

Product: Trimble Gateway NA

Brand: Trimble

Test Model: Trimble Gateway-PA1

Sample Status: Engineering Sample

Applicant: PeopleNet Communications Corporation

Test Date: Sep. 09, 2020 ~ Oct. 23, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.



Prepared by : _____, **Date:** Nov. 03, 2020
Vera Huang / Specialist



Approved by : _____, **Date:** Nov. 03, 2020
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -17.73 dB at 0.47400 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -2.31 dB at 2390 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
	1 GHz ~ 18 GHz	2.26 dB
Radiated Emissions above 1 GHz	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Trimble Gateway NA
Brand	Trimble
Test Model	Trimble Gateway-PA1
Status of EUT	Engineering Sample
Power Supply Rating	12 Vdc (adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Output Power	216.77 mW
Antenna Type	FPC antenna with 0.75 dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. The EUT provides one completed transmitter and one receiver.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX

2. The information of module collocated in this EUT is listed as below.

Product	Brand	Model
BT/WLAN Module	msi	BM25
WWAN Module	Quectel	EC25-A
AH Module	silex	SX-NEWAH

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G:** Radiated Emission above 1 GHz **RE<1G:** Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
NOTE: “-”means no effect.

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6.0

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:


Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Huang

3.3 Duty Cycle of Test Signal

802.11b: Duty cycle = $8.595/8.705 = 0.987$, Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11g: Duty cycle = $1.426/1.533 = 0.93$, Duty factor = $10 * \log(1/0.93) = 0.32$

802.11n (HT20): Duty cycle = $1.335/1.439 = 0.928$, Duty factor = $10 * \log(1/0.928) = 0.32$

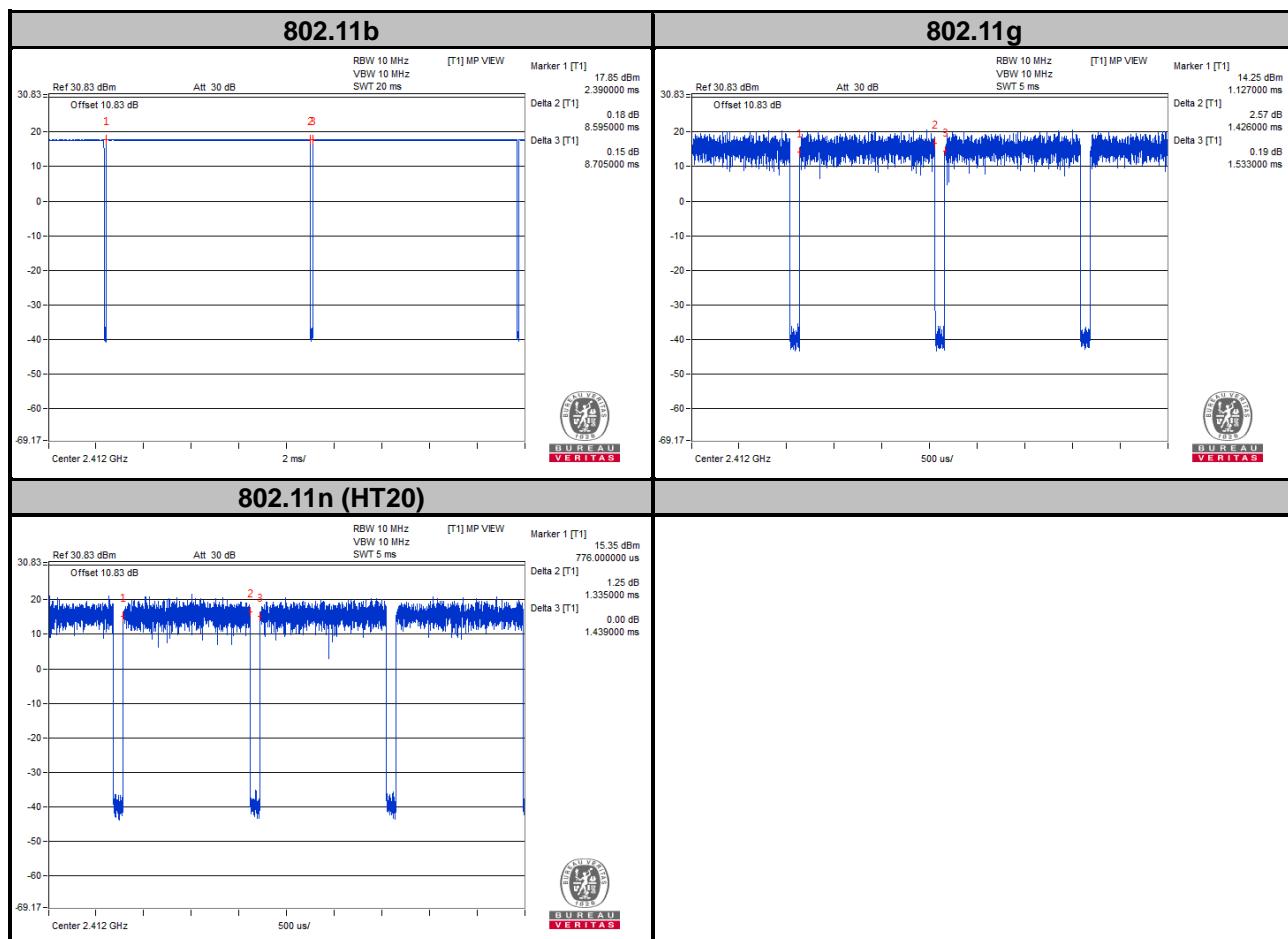

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	WWAN & GPS Antenna	TAOGLAS	MA240.LBI.001	NA	NA	Provided by client
B	AH Antenna	TAOGLAS	IS.05.B.301111	NA	NA	Provided by client
C	Adapter	TPT	PMW120300W8	NA	NA	Provided by client AC Input: 100-240V~, 50-60Hz, 1.1A MAX DC Output: 12V, 3.0A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RF Cable	3	3	N	0	-
2.	RF Cable	1	3	N	0	-

3.4.1 Configuration of System under Test



Remote site

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{UV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2020	Mar. 17, 2021
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 12, 2019	Dec. 11, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Loop Antenna	EM-6879	269	Sep. 16, 2019 Sep. 17, 2020	Sep. 15, 2020 Sep. 16, 2021
Preamplifier EMCI	EMC001340	980201	Oct. 14, 2019 Oct. 21, 2020	Oct. 13, 2020 Oct. 20, 2021
Preamplifier EMCI	EMC 012645	980115	Oct. 08, 2019 Oct. 07, 2020	Oct. 07, 2020 Oct. 06, 2021
Preamplifier EMCI	EMC 330H	980112	Oct. 08, 2019 Oct. 07, 2020	Oct. 07, 2020 Oct. 06, 2021
Power Meter Anritsu	ML2495A	1012010	Sep. 01, 2020	Aug. 31, 2021
Power Sensor Anritsu	MA2411B	1315050	Sep. 01, 2020	Aug. 31, 2021
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	180409	Jan. 18, 2020	Jan. 17, 2021
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 08, 2019 Oct. 07, 2020	Oct. 07, 2020 Oct. 06, 2021
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 08, 2019 Oct. 07, 2020	Oct. 07, 2020 Oct. 06, 2021
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle $\geq 98 \%$) for Average detection (AV) at frequency above 1 GHz.
 (11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ;
 11n (HT20): RBW = 1 MHz, VBW = 1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

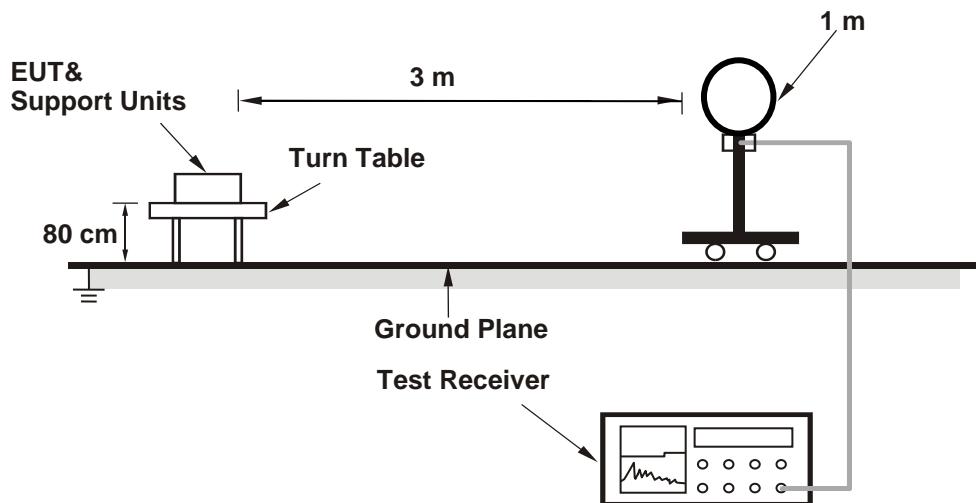

<Radiated Emission 30 MHz to 1 GHz>

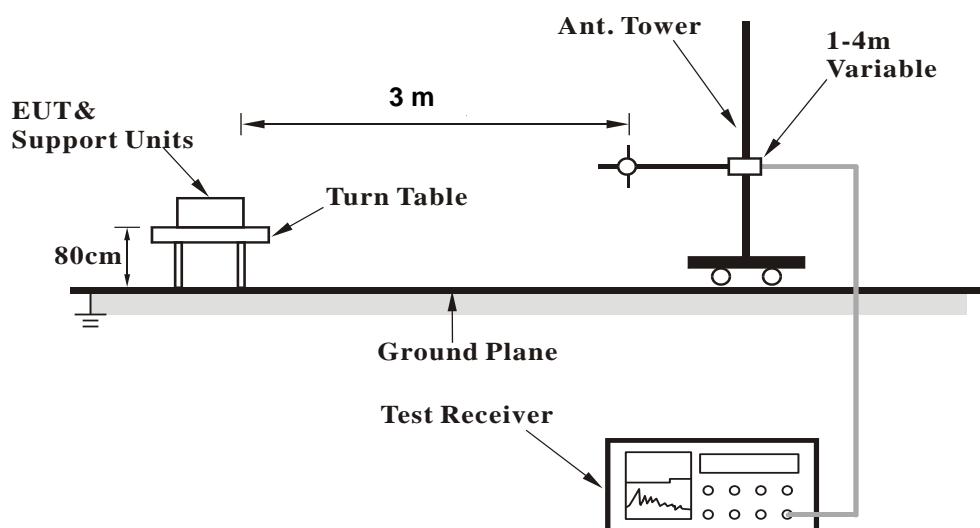

<Radiated Emission above 1 GHz>

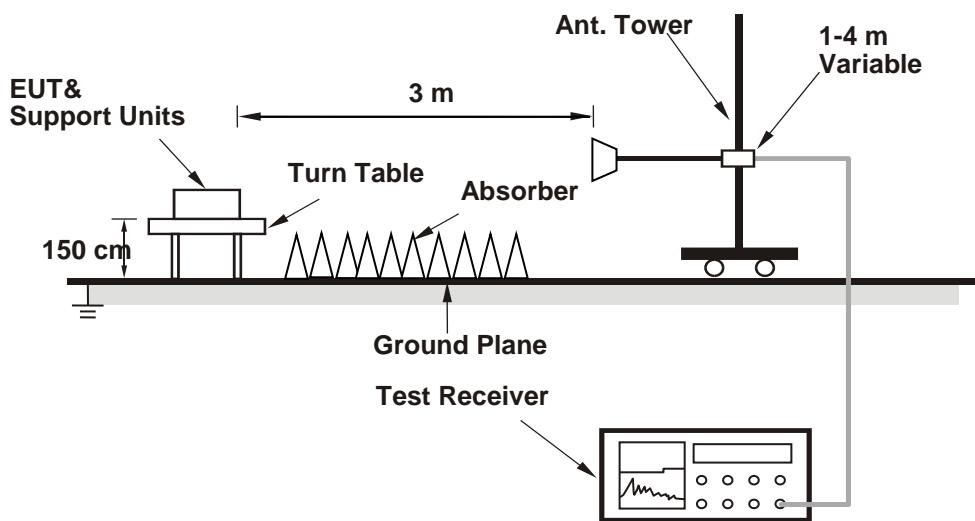

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :

802.11b

EUT Test Condition		Measurement Detail		
Channel		Frequency Range		1 GHz ~ 25 GHz
Input Power		Detector Function		Peak (PK) Average (AV)
Environmental Conditions		Tested By		Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.72	47.64	-5.92	54	-12.28	164	351	Average
2390	49.5	55.42	-5.92	74	-24.5	164	351	Peak
2412	100.65	106.6	-5.95	-----	-----	164	351	Average
2412	103.15	109.1	-5.95	-----	-----	164	351	Peak
4824	33.58	49.2	-15.62	54	-20.42	140	126	Average
4824	43.07	58.69	-15.62	74	-30.93	140	126	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	42.76	48.68	-5.92	54	-11.24	101	12	Average
2390	50.82	56.74	-5.92	74	-23.18	101	12	Peak
2412	100.73	106.68	-5.95	-----	-----	101	12	Average
2412	104.14	110.09	-5.95	-----	-----	101	12	Peak
4824	33.54	49.16	-15.62	54	-20.46	175	164	Average
4824	42.5	58.12	-15.62	74	-31.5	175	164	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Channel 6		Frequency Range
Input Power		120 Vac, 60 Hz		Detector Function
Environmental Conditions		25 deg. C, 65 % RH		Tested By
				Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2360.35	40.76	46.59	-5.83	54	-13.24	168	354	Average
2360.35	50.1	55.93	-5.83	74	-23.9	168	354	Peak
2390	38.6	44.52	-5.92	54	-15.4	168	354	Average
2390	46.35	52.27	-5.92	74	-27.65	168	354	Peak
2437	104.93	110.82	-5.89	-----	-----	168	354	Average
2437	107.11	113	-5.89	-----	-----	168	354	Peak
2483.5	38.04	43.74	-5.7	54	-15.96	168	354	Average
2483.5	48.36	54.06	-5.7	74	-25.64	168	354	Peak
4874	33.3	48.86	-15.56	54	-20.7	164	147	Average
4874	41.76	57.32	-15.56	74	-32.24	164	147	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2360.54	41.93	47.76	-5.83	54	-12.07	100	19	Average
2360.54	50.84	56.67	-5.83	74	-23.16	100	19	Peak
2390	38.6	44.52	-5.92	54	-15.4	100	19	Average
2390	47.42	53.34	-5.92	74	-26.58	100	19	Peak
2437	105.64	111.53	-5.89	-----	-----	100	19	Average
2437	108.02	113.91	-5.89	-----	-----	100	19	Peak
2483.5	39.34	45.04	-5.7	54	-14.66	100	19	Average
2483.5	48.96	54.66	-5.7	74	-25.04	100	19	Peak
4874	32.62	48.18	-15.56	54	-21.38	138	252	Average
4874	42.27	57.83	-15.56	74	-31.73	138	252	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Channel 11		Frequency Range
Input Power		120 Vac, 60 Hz		Detector Function
Environmental Conditions		25 deg. C, 65 % RH		Tested By
				Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	99.57	105.38	-5.81	-----	-----	186	358	Average
2462	101.53	107.34	-5.81	-----	-----	186	358	Peak
2483.5	39.74	45.44	-5.7	54	-14.26	186	358	Average
2483.5	49.36	55.06	-5.7	74	-24.64	186	358	Peak
4924	33.68	49.19	-15.51	54	-20.32	180	258	Average
4924	42.78	58.29	-15.51	74	-31.22	180	258	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	101.47	107.28	-5.81	-----	-----	107	18	Average
2462	103.8	109.61	-5.81	-----	-----	107	18	Peak
2483.5	40.87	46.57	-5.7	54	-13.13	107	18	Average
2483.5	49.09	54.79	-5.7	74	-24.91	107	18	Peak
4924	32.94	48.45	-15.51	54	-21.06	142	106	Average
4924	42.24	57.75	-15.51	74	-31.76	142	106	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

802.11g

EUT Test Condition		Measurement Detail		
Channel		Frequency Range		1 GHz ~ 25 GHz
Input Power		Detector Function		Peak (PK) Average (AV)
Environmental Conditions		Tested By		Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	50.62	56.54	-5.92	54	-3.38	169	356	Average
2390	66.06	71.98	-5.92	74	-7.94	169	356	Peak
2412	99	104.95	-5.95	-----	-----	169	356	Average
2412	105.97	111.92	-5.95	-----	-----	169	356	Peak
4824	33.55	49.17	-15.62	54	-20.45	173	143	Average
4824	42.61	58.23	-15.62	74	-31.39	173	143	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	51.69	57.61	-5.92	54	-2.31	101	15	Average
2390	66.25	72.17	-5.92	74	-7.75	101	15	Peak
2412	100.26	106.21	-5.95	-----	-----	101	15	Average
2412	106.81	112.76	-5.95	-----	-----	101	15	Peak
4824	33.55	49.17	-15.62	54	-20.45	173	143	Average
4824	42.61	58.23	-15.62	74	-31.39	173	143	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Frequency Range		1 GHz ~ 25 GHz
Input Power		Detector Function		Peak (PK) Average (AV)
Environmental Conditions		Tested By		Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	42.14	48.06	-5.92	54	-11.86	169	354	Average
2390	54.69	60.61	-5.92	74	-19.31	169	354	Peak
2437	101.35	107.24	-5.89	-----	-----	169	354	Average
2437	108.63	114.52	-5.89	-----	-----	169	354	Peak
2483.5	42.06	47.76	-5.7	54	-11.94	169	354	Average
2483.5	52.37	58.07	-5.7	74	-21.63	169	354	Peak
4874	32.63	48.19	-15.56	54	-21.37	170	157	Average
4874	41.99	57.55	-15.56	74	-32.01	170	157	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	42.61	48.53	-5.92	54	-11.39	100	20	Average
2390	54.16	60.08	-5.92	74	-19.84	100	20	Peak
2437	102.17	108.06	-5.89	-----	-----	100	20	Average
2437	108.85	114.74	-5.89	-----	-----	100	20	Peak
2483.5	43.27	48.97	-5.7	54	-10.73	100	20	Average
2483.5	55.34	61.04	-5.7	74	-18.66	100	20	Peak
4874	32.63	48.19	-15.56	54	-21.37	188	208	Average
4874	42.03	57.59	-15.56	74	-31.97	188	208	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Channel 11		Frequency Range
Input Power		120 Vac, 60 Hz		Detector Function
Environmental Conditions		25 deg. C, 65 % RH		Tested By
				Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	97	102.81	-5.81	-----	-----	166	355	Average
2462	103.82	109.63	-5.81	-----	-----	166	355	Peak
2483.5	46.29	51.99	-5.7	54	-7.71	166	355	Average
2483.5	61.07	66.77	-5.7	74	-12.93	166	355	Peak
4924	32.63	48.14	-15.51	54	-21.37	144	152	Average
4924	42.14	57.65	-15.51	74	-31.86	144	152	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	99	104.81	-5.81	-----	-----	109	2	Average
2462	106.28	112.09	-5.81	-----	-----	109	2	Peak
2483.5	48.97	54.67	-5.7	54	-5.03	109	2	Average
2483.5	63	68.7	-5.7	74	-11	109	2	Peak
4924	33.33	48.84	-15.51	54	-20.67	180	181	Average
4924	42.47	57.98	-15.51	74	-31.53	180	181	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

802.11n (HT20)

EUT Test Condition		Measurement Detail		
Channel		Frequency Range		1 GHz ~ 25 GHz
Input Power		Detector Function		Peak (PK) Average (AV)
Environmental Conditions		Tested By		Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	49.36	55.28	-5.92	54	-4.64	166	356	Average
2390	63.64	69.56	-5.92	74	-10.36	166	356	Peak
2412	98.91	104.86	-5.95	-----	-----	166	356	Average
2412	105.58	111.53	-5.95	-----	-----	166	356	Peak
4824	33.58	49.2	-15.62	54	-20.42	124	128	Average
4824	43.32	58.94	-15.62	74	-30.68	124	128	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	50.42	56.34	-5.92	54	-3.58	102	14	Average
2390	66.6	72.52	-5.92	74	-7.4	102	14	Peak
2412	99.88	105.83	-5.95	-----	-----	102	14	Average
2412	106.85	112.8	-5.95	-----	-----	102	14	Peak
4824	33.9	49.52	-15.62	54	-20.1	188	230	Average
4824	43.27	58.89	-15.62	74	-30.73	188	230	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Frequency Range		1 GHz ~ 25 GHz
Input Power		Detector Function		Peak (PK) Average (AV)
Environmental Conditions		Tested By		Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	42.21	48.13	-5.92	54	-11.79	170	356	Average
2390	54.11	60.03	-5.92	74	-19.89	170	356	Peak
2437	100.91	106.8	-5.89	-----	-----	170	356	Average
2437	109.05	114.94	-5.89	-----	-----	170	356	Peak
2483.5	41.23	46.93	-5.7	54	-12.77	170	356	Average
2483.5	53.85	59.55	-5.7	74	-20.15	170	356	Peak
4874	33	48.56	-15.56	54	-21	113	178	Average
4874	42.42	57.98	-15.56	74	-31.58	113	178	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.91	47.83	-5.92	54	-12.09	101	20	Average
2390	55.72	61.64	-5.92	74	-18.28	101	20	Peak
2437	101.79	107.68	-5.89	-----	-----	101	20	Average
2437	108.69	114.58	-5.89	-----	-----	101	20	Peak
2483.5	42.17	47.87	-5.7	54	-11.83	101	20	Average
2483.5	56.36	62.06	-5.7	74	-17.64	101	20	Peak
4874	32.7	48.26	-15.56	54	-21.3	183	189	Average
4874	42.34	57.9	-15.56	74	-31.66	183	189	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail		
Channel		Channel 11		Frequency Range
Input Power		120 Vac, 60 Hz		Detector Function
Environmental Conditions		25 deg. C, 65 % RH		Tested By
				Tim Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	95.93	101.74	-5.81	-----	-----	164	355	Average
2462	102.54	108.35	-5.81	-----	-----	164	355	Peak
2483.5	43.97	49.67	-5.7	54	-10.03	164	355	Average
2483.5	57.96	63.66	-5.7	74	-16.04	164	355	Peak
4924	32.73	48.24	-15.51	54	-21.27	152	208	Average
4924	42.15	57.66	-15.51	74	-31.85	152	208	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	98.25	104.06	-5.81	-----	-----	105	18	Average
2462	104.98	110.79	-5.81	-----	-----	105	18	Peak
2483.5	46	51.7	-5.7	54	-8	105	18	Average
2483.5	60.45	66.15	-5.7	74	-13.55	105	18	Peak
4924	33.64	49.15	-15.51	54	-20.36	162	150	Average
4924	42.88	58.39	-15.51	74	-31.12	162	150	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

9 kHz ~ 30 MHz Data:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim Chen

Horizontal

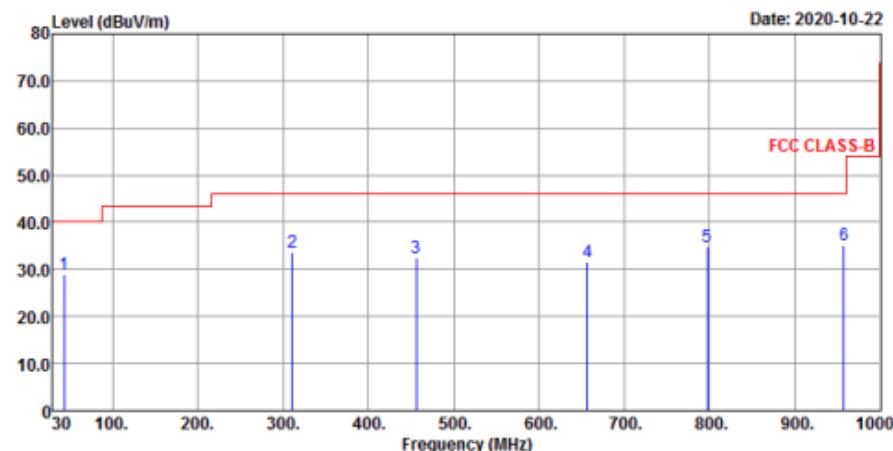

Vertical

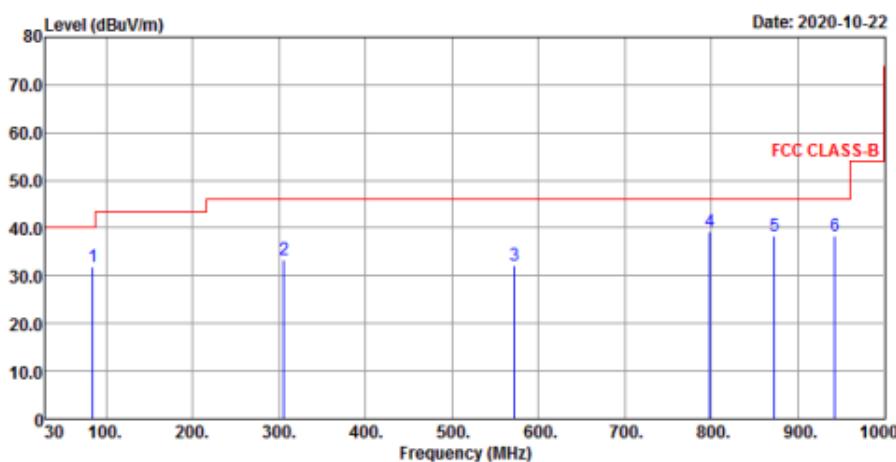

Antenna Polarity & Test Distance: Horizontal at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
43.58	28.99	40.91	-11.92	40	-11.01	124	232	QP
310.33	33.61	44.38	-10.77	46	-12.39	159	279	QP
455.83	32.61	38.9	-6.29	46	-13.39	158	212	QP
656.62	31.64	33.16	-1.52	46	-14.36	134	22	QP
797.27	34.77	33.17	1.6	46	-11.23	108	137	QP
957.32	35.24	31.53	3.71	46	-10.76	132	214	QP

Antenna Polarity & Test Distance: Vertical at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
84.32	31.8	49.09	-17.29	40	-8.2	101	183	QP
305.48	33.36	44.33	-10.97	46	-12.64	174	198	QP
572.23	32.05	35.73	-3.68	46	-13.95	103	229	QP
798.24	39.18	37.56	1.62	46	-6.82	104	187	QP
872.93	38.46	35.74	2.72	46	-7.54	135	172	QP
942.77	38.47	34.9	3.57	46	-7.53	101	30	QP

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value.
2. The emission levels of other frequencies were very low against the limit.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 17, 2020	Feb. 16, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2020	Sep. 03, 2021
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 20, 2020	Jan. 19, 2021
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 18, 2020	Aug. 17, 2021
Software ADT	BV ADT_Cond_V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2. (Conduction 2)
 3. The VCCI Site Registration No. is C-12047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

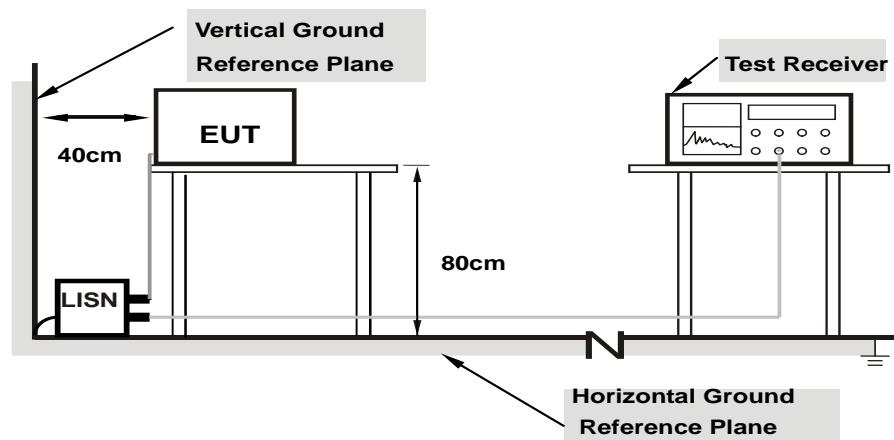

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Getaz Yang	Test Date	2020/10/23

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.09	28.99	22.52	39.08	32.61	65.78	55.78	-26.70	-23.17
2	0.21400	10.10	22.31	17.18	32.41	27.28	63.05	53.05	-30.64	-25.77
3	0.47400	10.11	21.80	18.60	31.91	28.71	56.44	46.44	-24.53	-17.73
4	1.42600	10.16	9.13	1.52	19.29	11.68	56.00	46.00	-36.71	-34.32
5	4.53800	10.24	17.45	9.57	27.69	19.81	56.00	46.00	-28.31	-26.19
6	17.17000	10.38	13.14	8.38	23.52	18.76	60.00	50.00	-36.48	-31.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

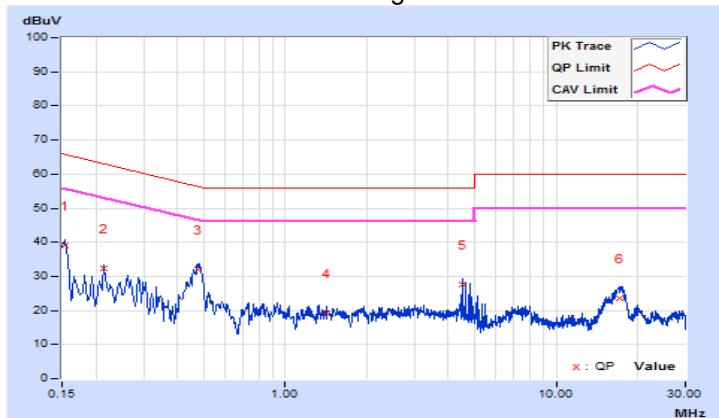


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Getaz Yang	Test Date	2020/10/23

Phase Of Power : Neutral (N)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.06	28.43	20.92	38.49	30.98	65.78	55.78	-27.29	-24.80
2	0.17800	10.06	24.13	18.42	34.19	28.48	64.58	54.58	-30.39	-26.10
3	0.47800	10.09	24.08	17.03	34.17	27.12	56.37	46.37	-22.20	-19.25
4	1.27800	10.14	11.79	1.37	21.93	11.51	56.00	46.00	-34.07	-34.49
5	5.05400	10.26	13.18	8.64	23.44	18.90	60.00	50.00	-36.56	-31.10
6	17.43400	10.56	12.43	7.69	22.99	18.25	60.00	50.00	-37.01	-31.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

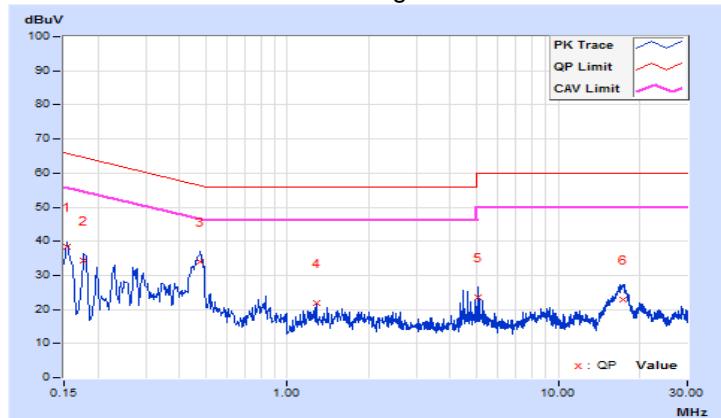


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

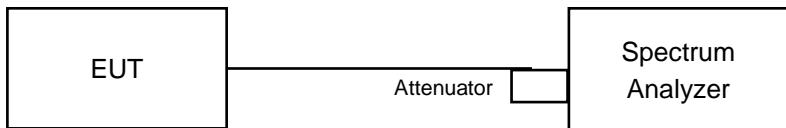

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.61	0.5	Pass
6	2437	8.14	0.5	Pass
11	2462	8.59	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.54	0.5	Pass
6	2437	16.34	0.5	Pass
11	2462	15.46	0.5	Pass


802.11n (HT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.26	0.5	Pass
6	2437	16.97	0.5	Pass
11	2462	15.22	0.5	Pass

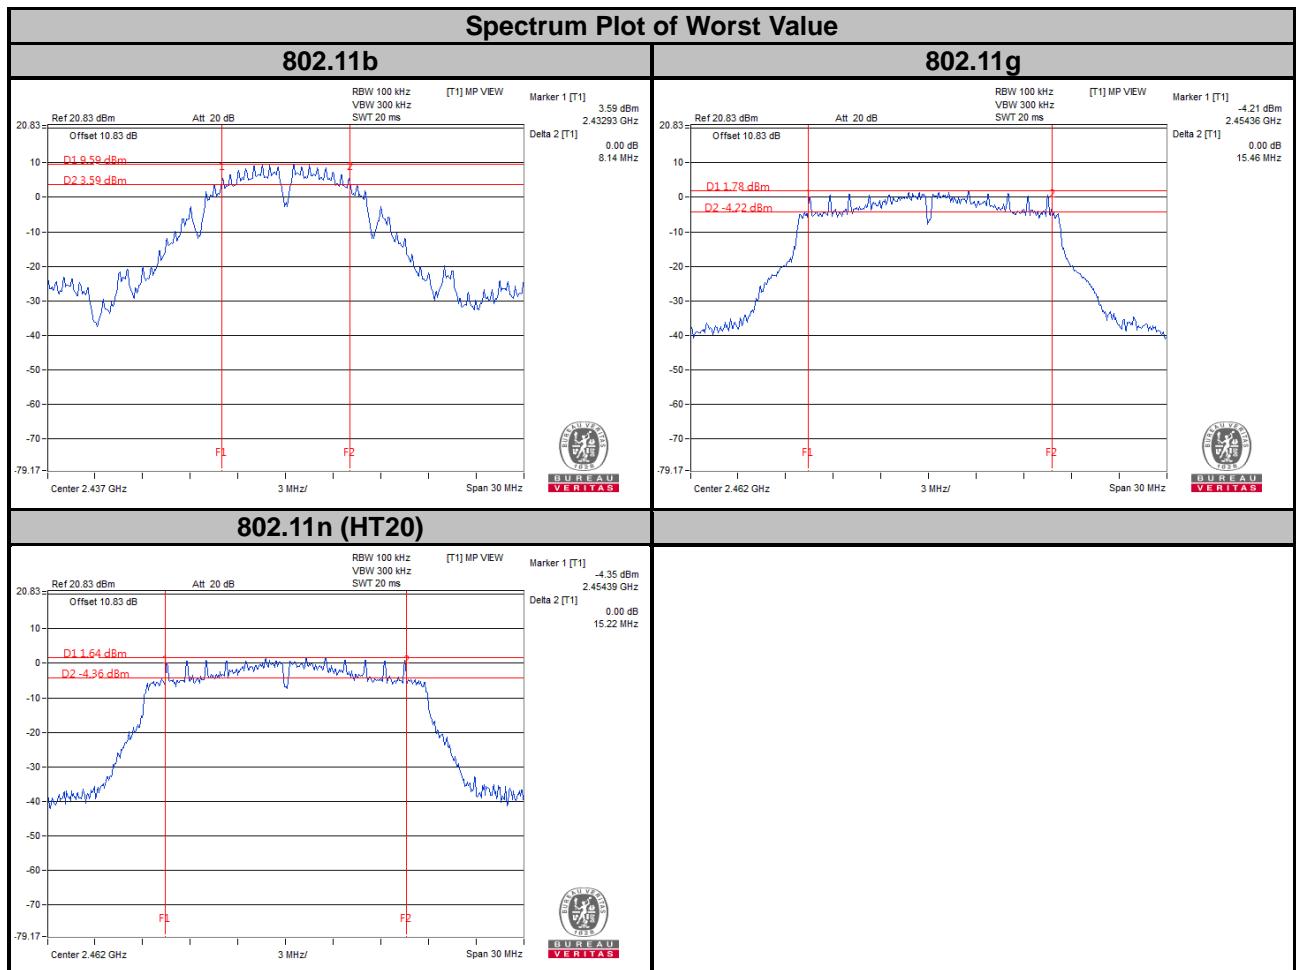

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup

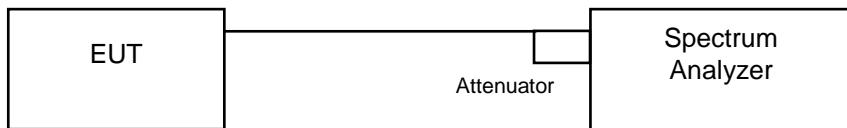

4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	12.00	Pass
6	2437	12.36	Pass
11	2462	12.00	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	16.56	Pass
6	2437	17.04	Pass
11	2462	16.56	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	17.64	Pass
6	2437	18.24	Pass
11	2462	17.76	Pass

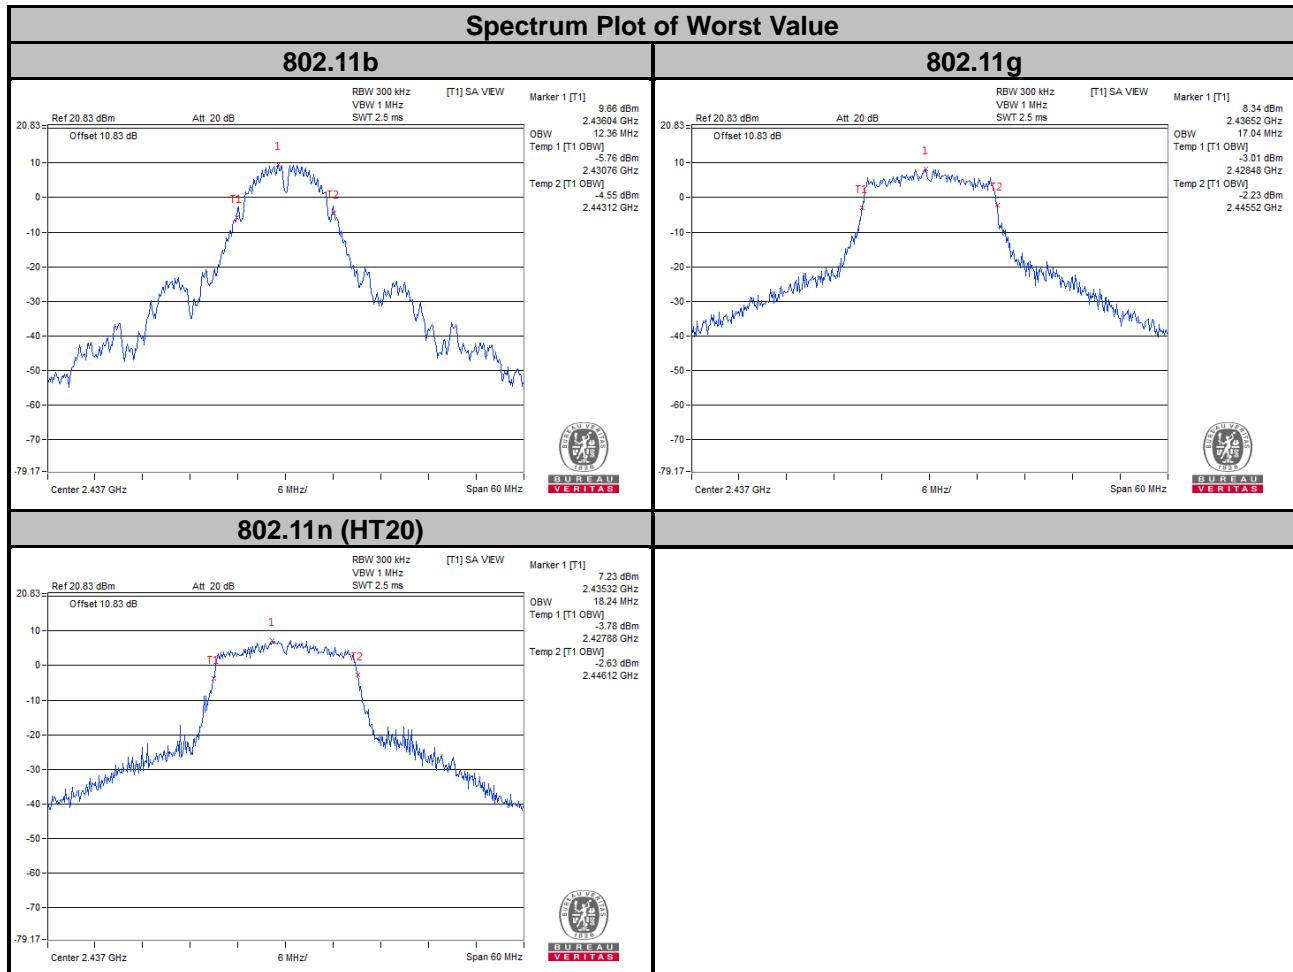


4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

4.5.2 Test Setup

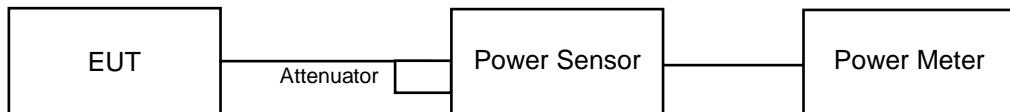

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	64.714	18.11	37.757	15.77	30	Pass
6	2437	139.959	21.46	69.984	18.45	30	Pass
11	2462	60.674	17.83	27.164	14.34	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	109.144	20.38	24.547	13.90	30	Pass
6	2437	216.77	23.36	56.754	17.54	30	Pass
11	2462	107.399	20.31	24.66	13.92	30	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	137.088	21.37	27.861	14.45	30	Pass
6	2437	194.536	22.89	52.36	17.19	30	Pass
11	2462	116.413	20.66	19.454	12.89	30	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.6.2 Test Setup

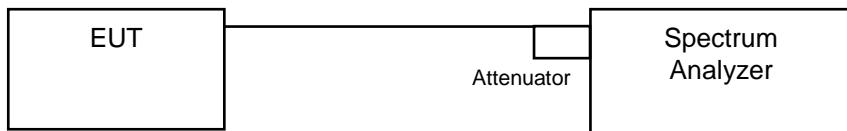

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-7.09	8	Pass
6	2437	-5.29	8	Pass
11	2462	-8.42	8	Pass

802.11g

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-10.31	8	Pass
6	2437	-6.79	8	Pass
11	2462	-10.89	8	Pass

802.11n (HT20)

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-10.01	8	Pass
6	2437	-7.75	8	Pass
11	2462	-10.81	8	Pass

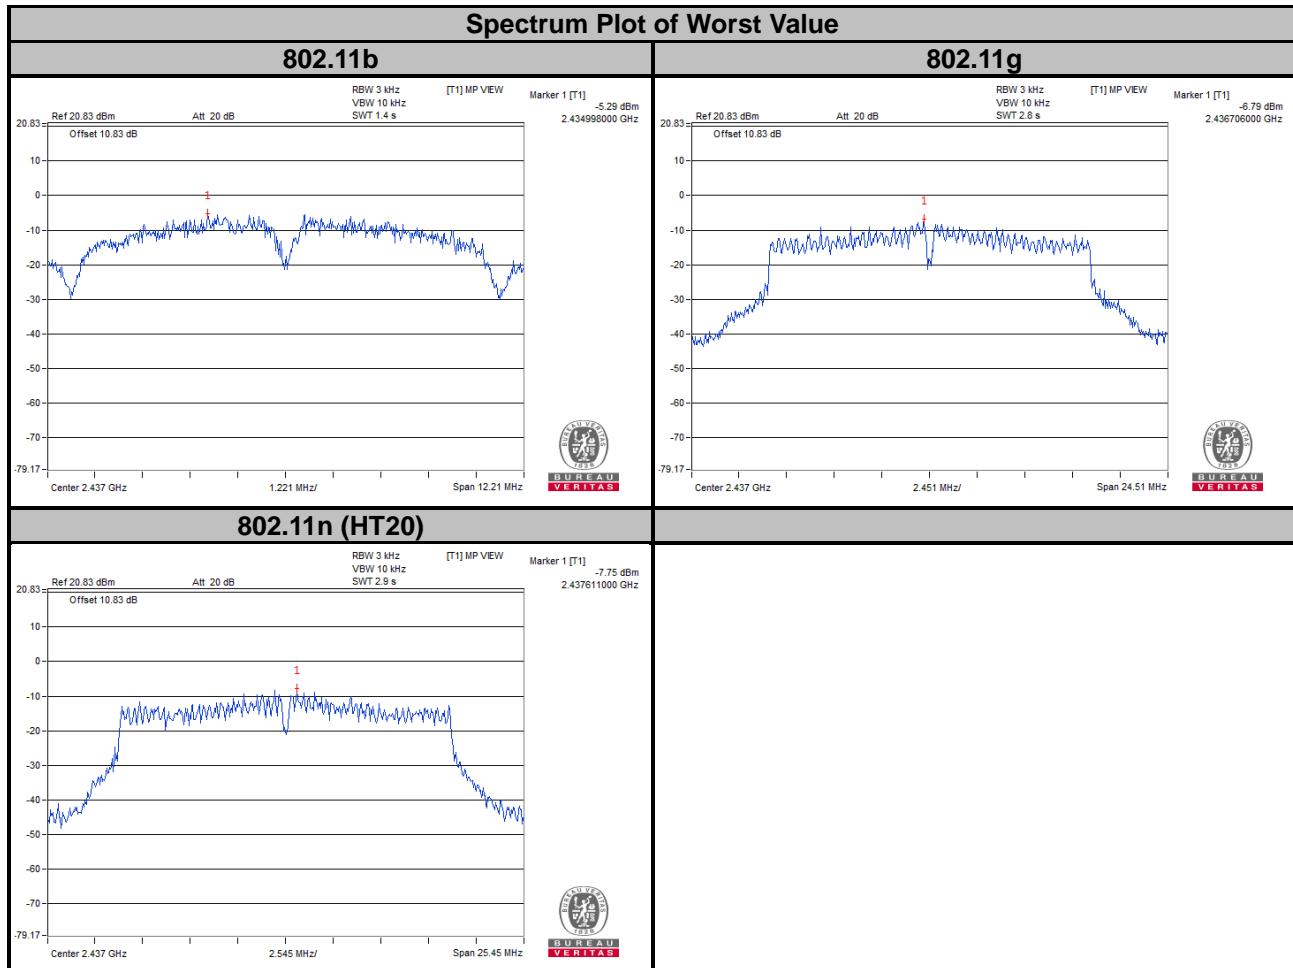

4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.


4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.


802.11b

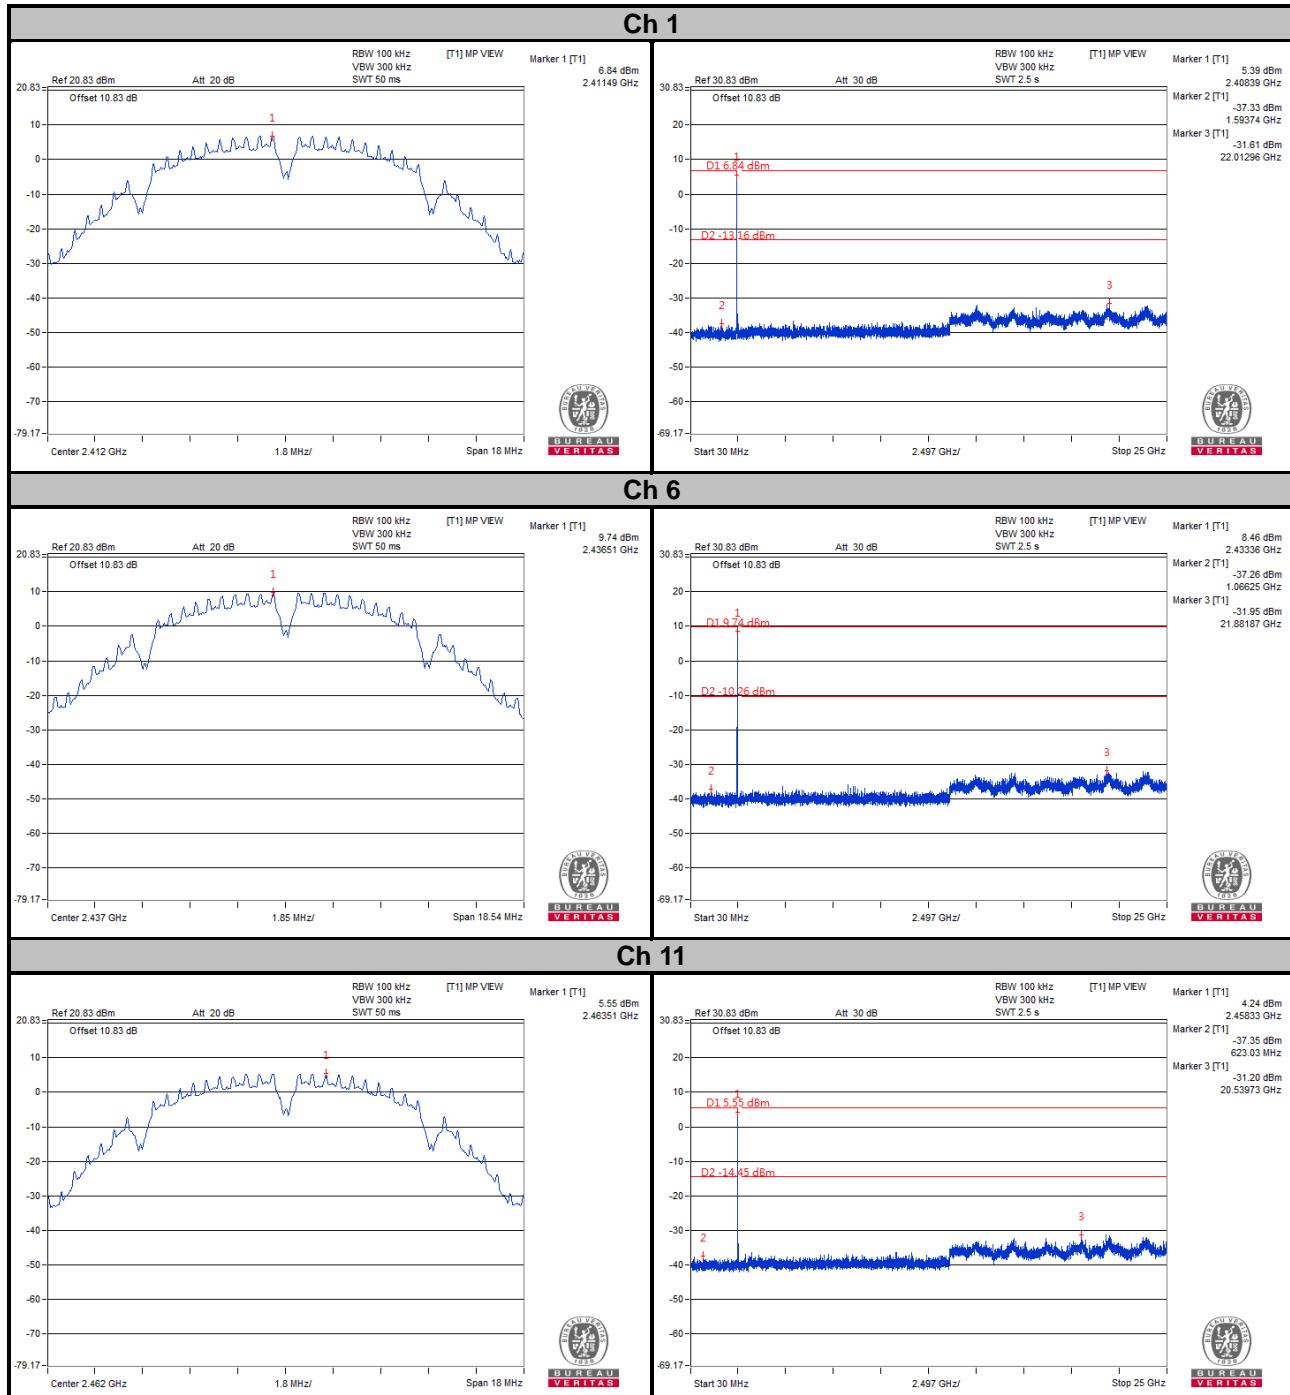

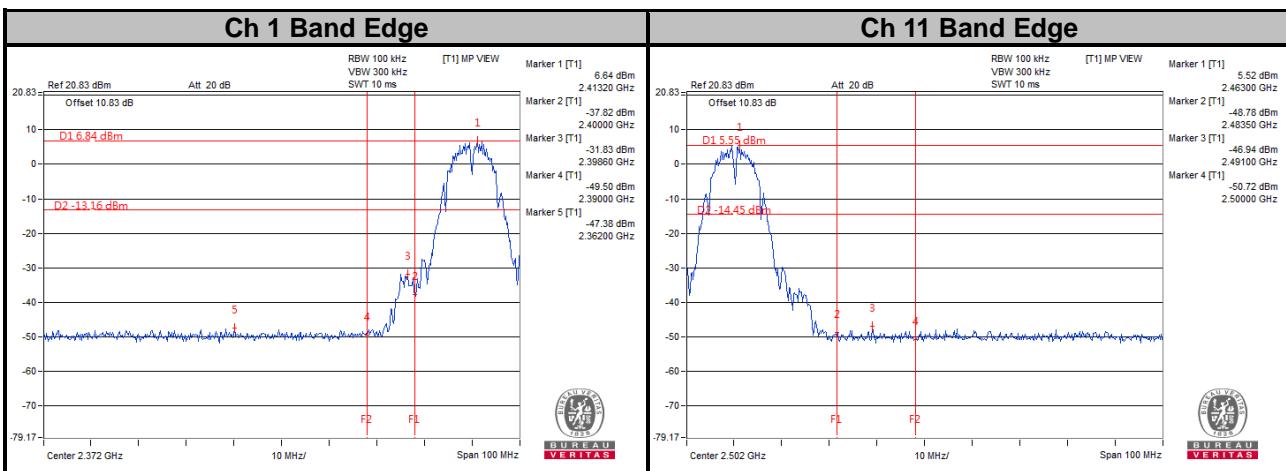


802.11g


Ch 1

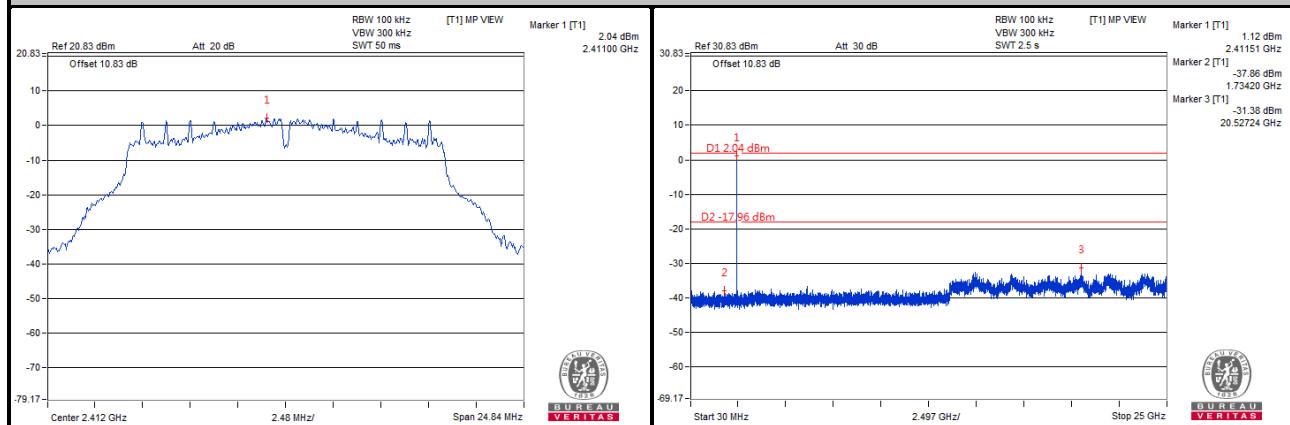


Ch 6

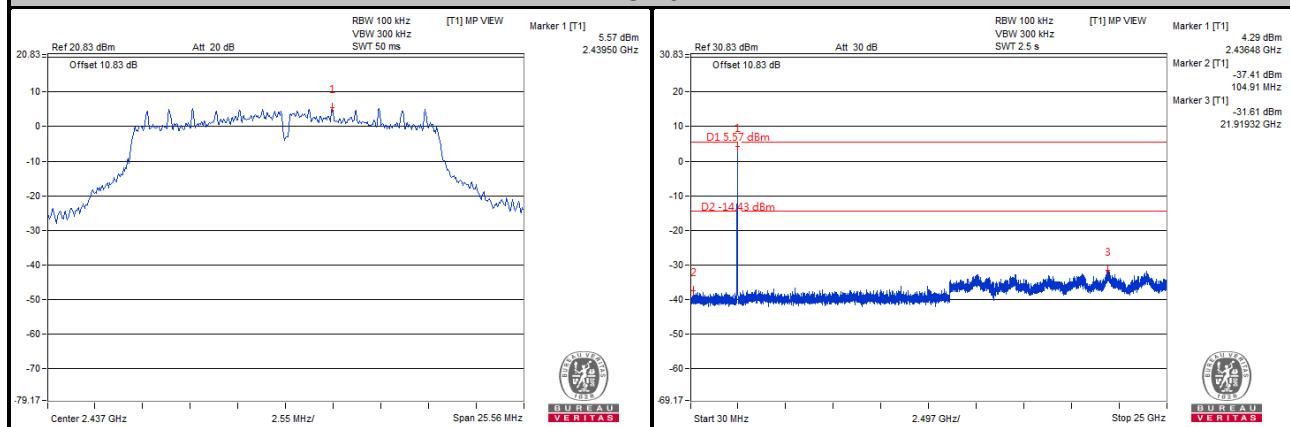


Ch 11

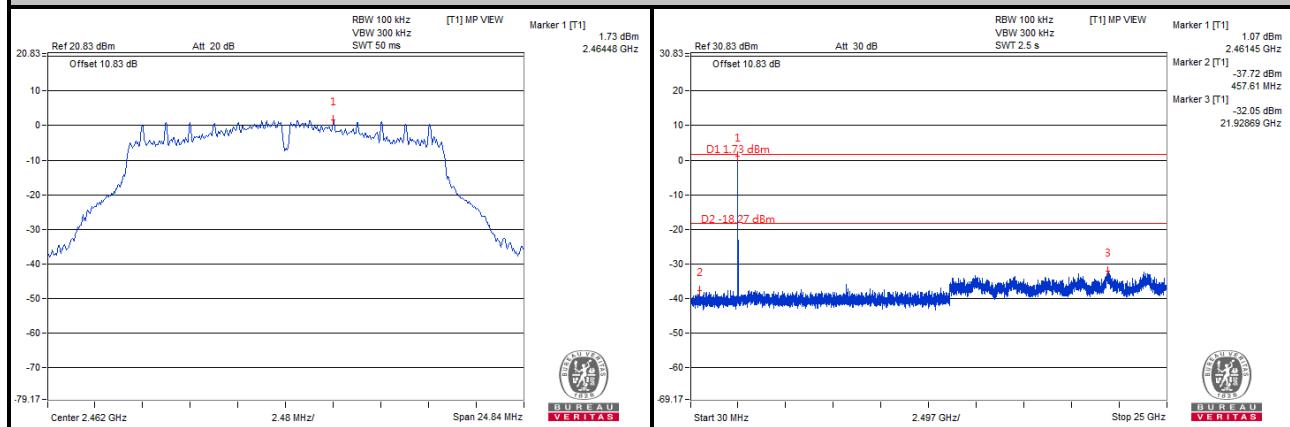

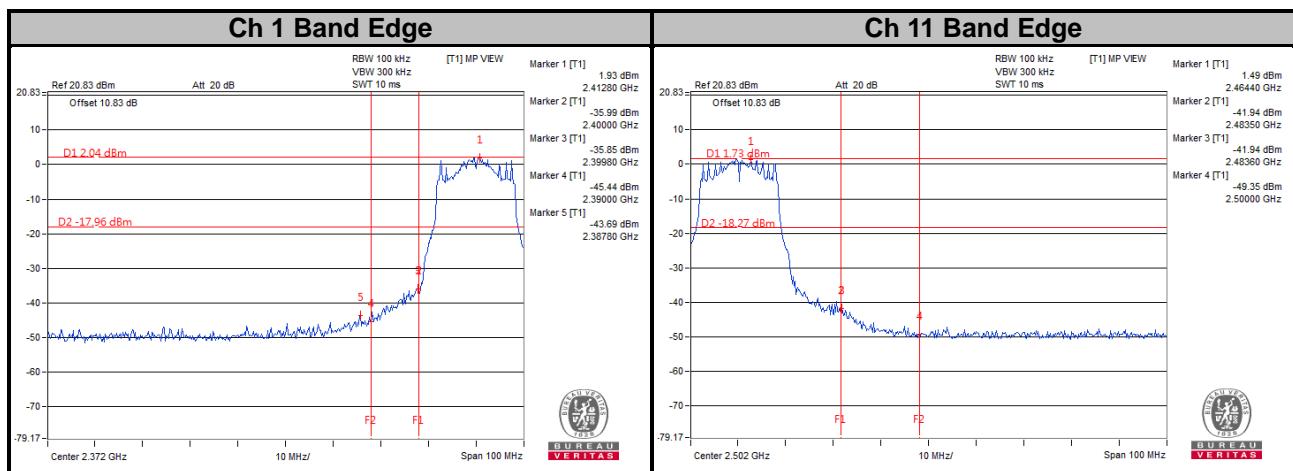


802.11n (HT20)


Ch 1

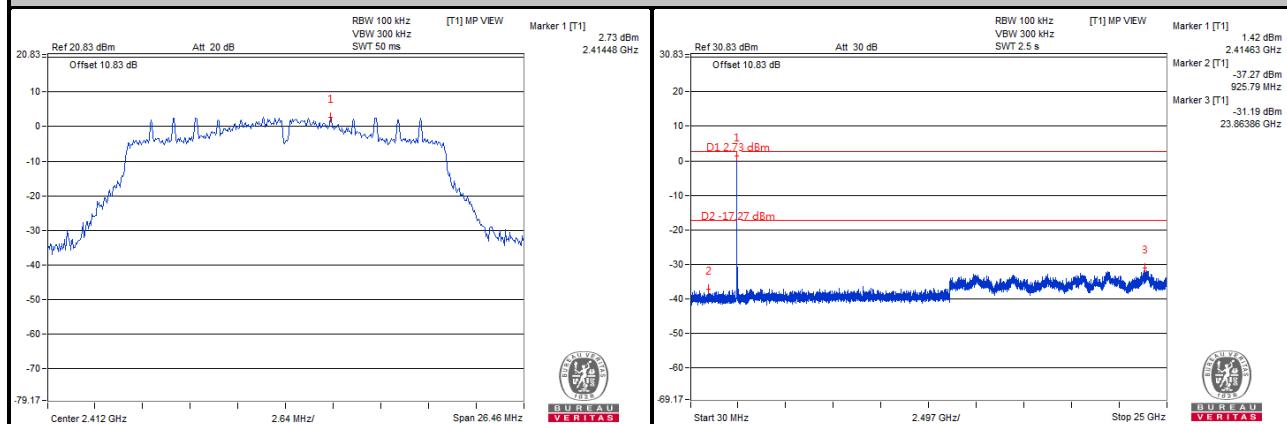


Ch 6

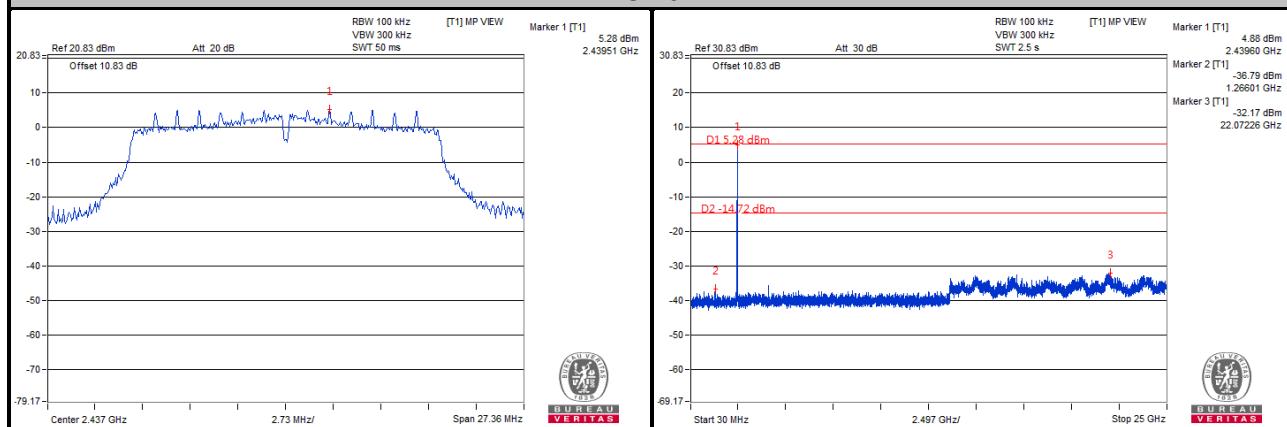

Ch 11

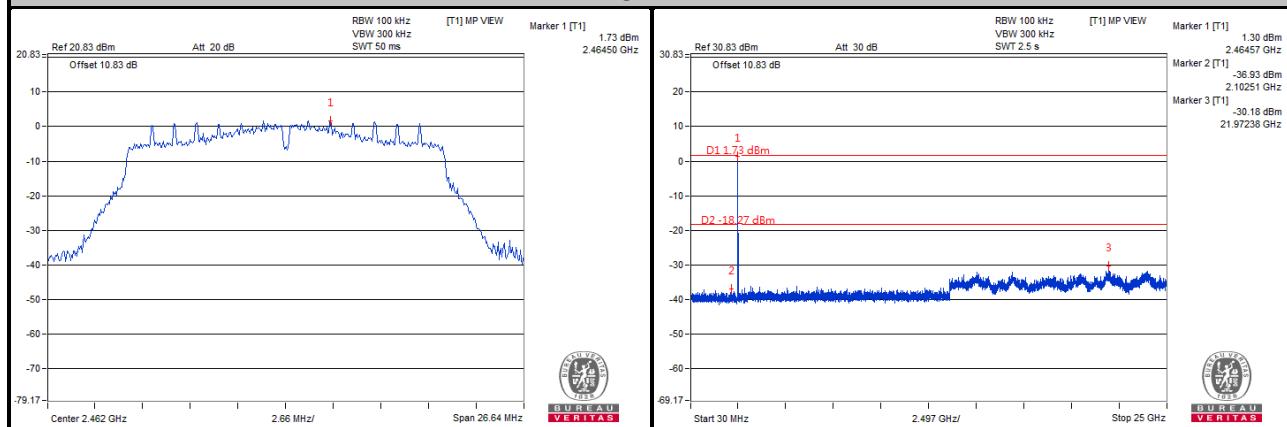

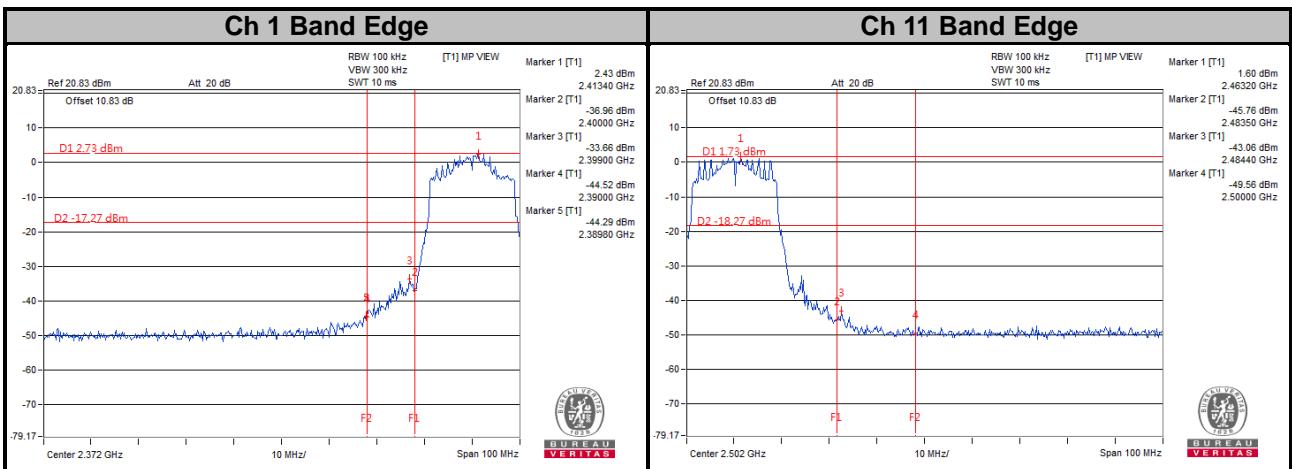



5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).


Annex A- Band Edge Measurement


802.11b

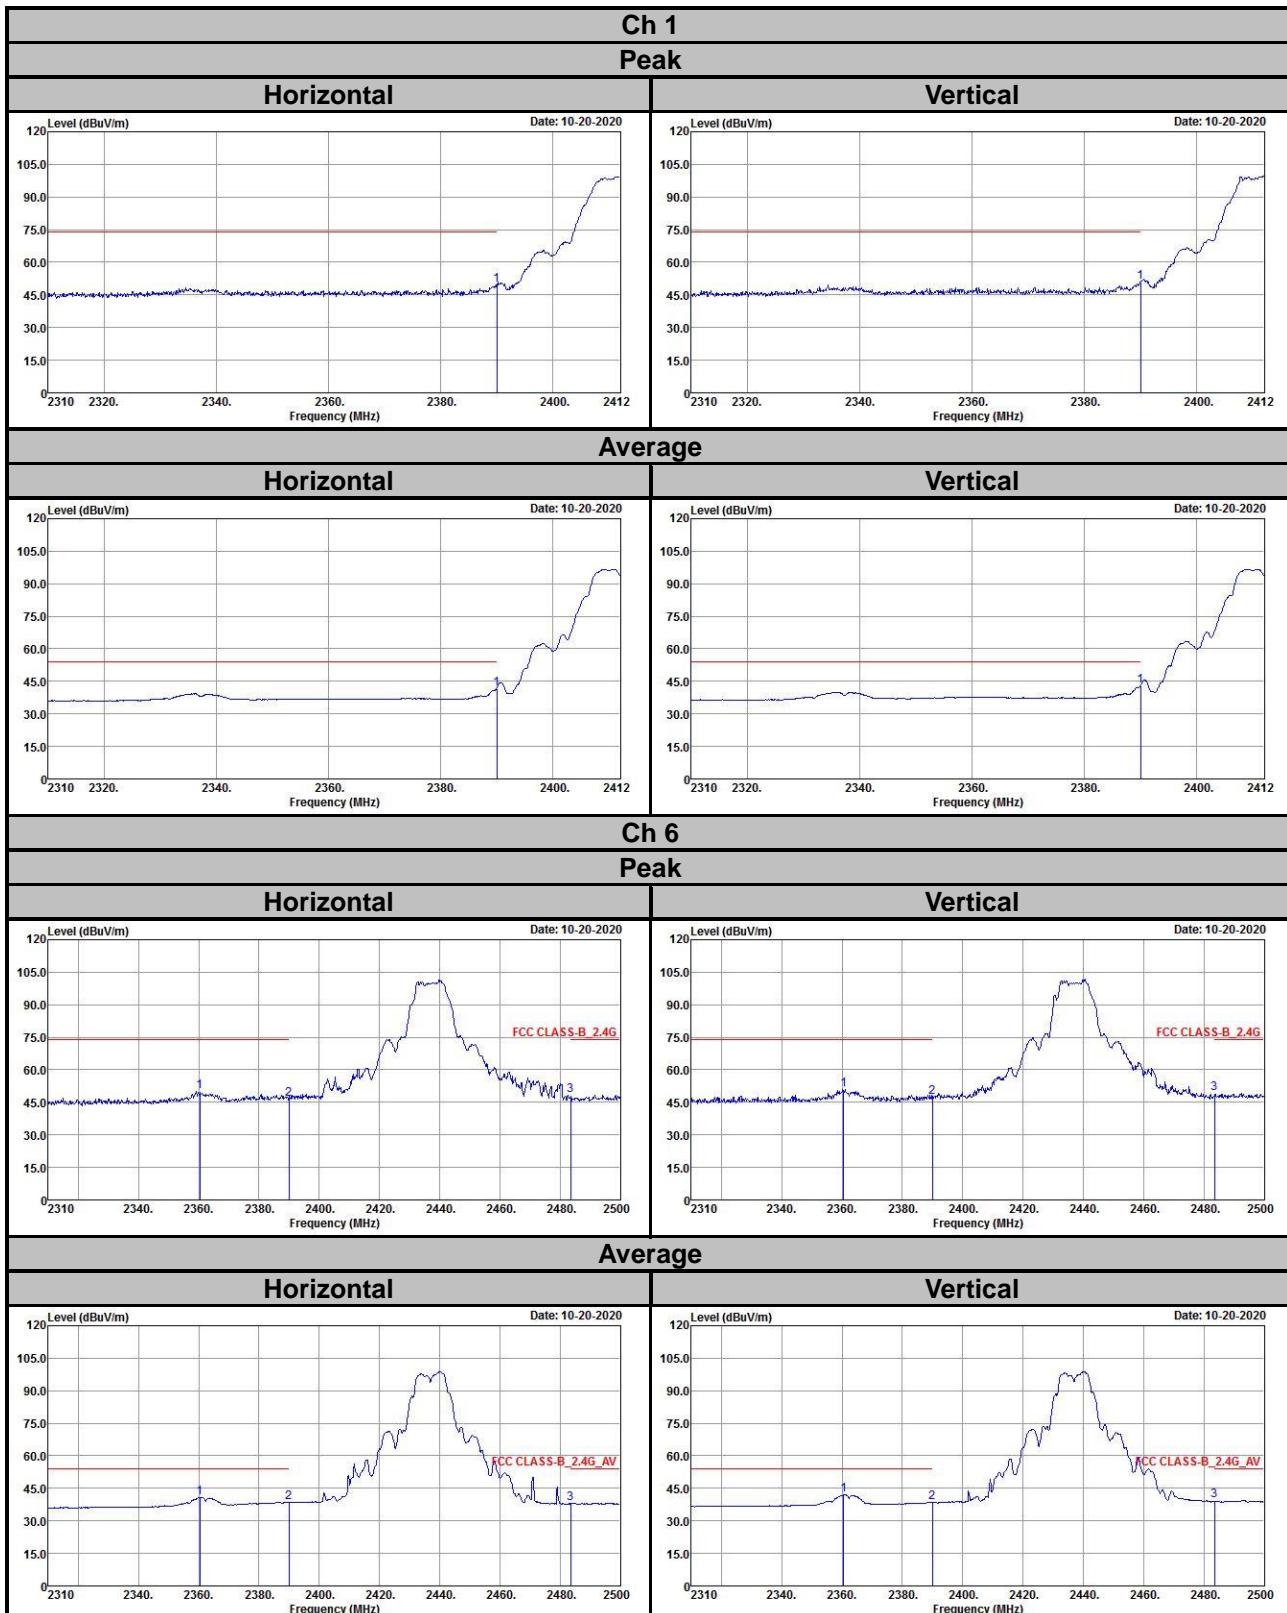


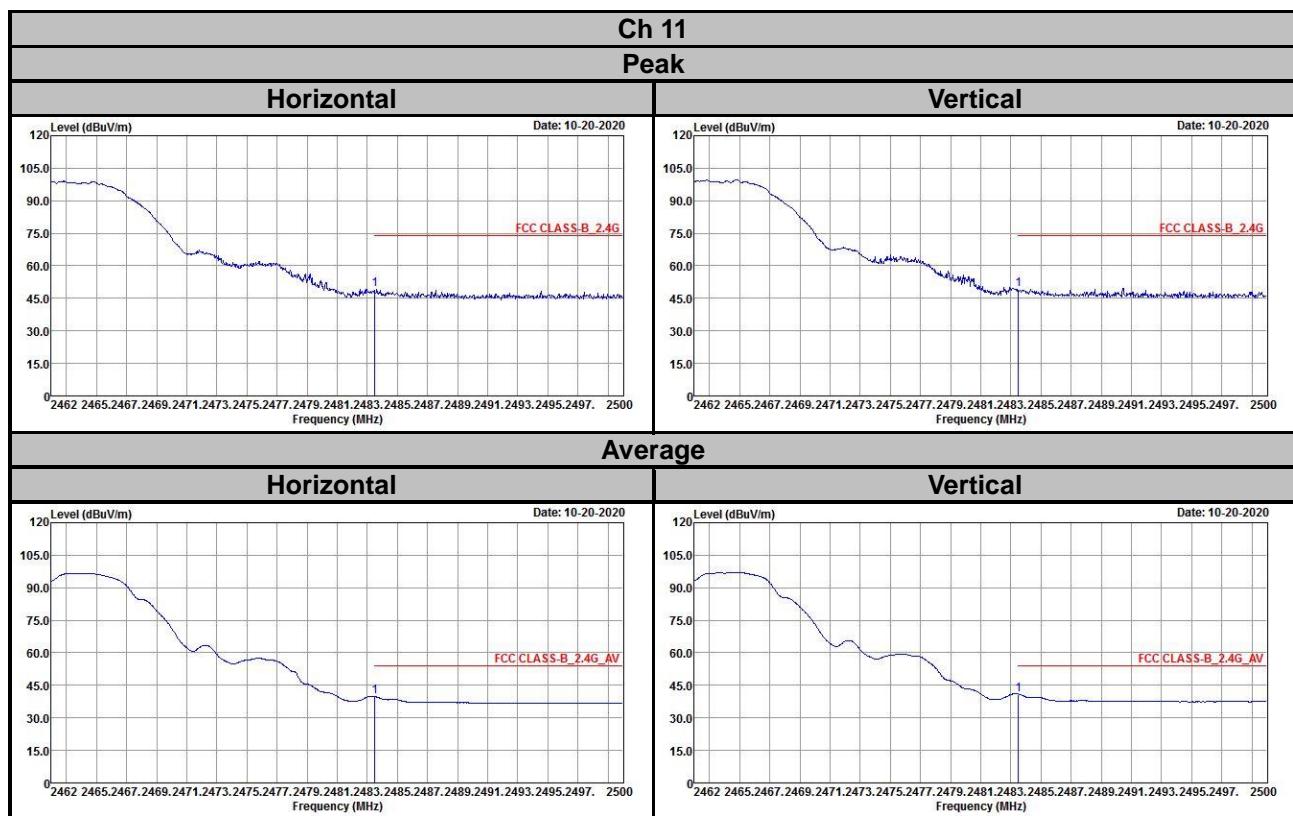

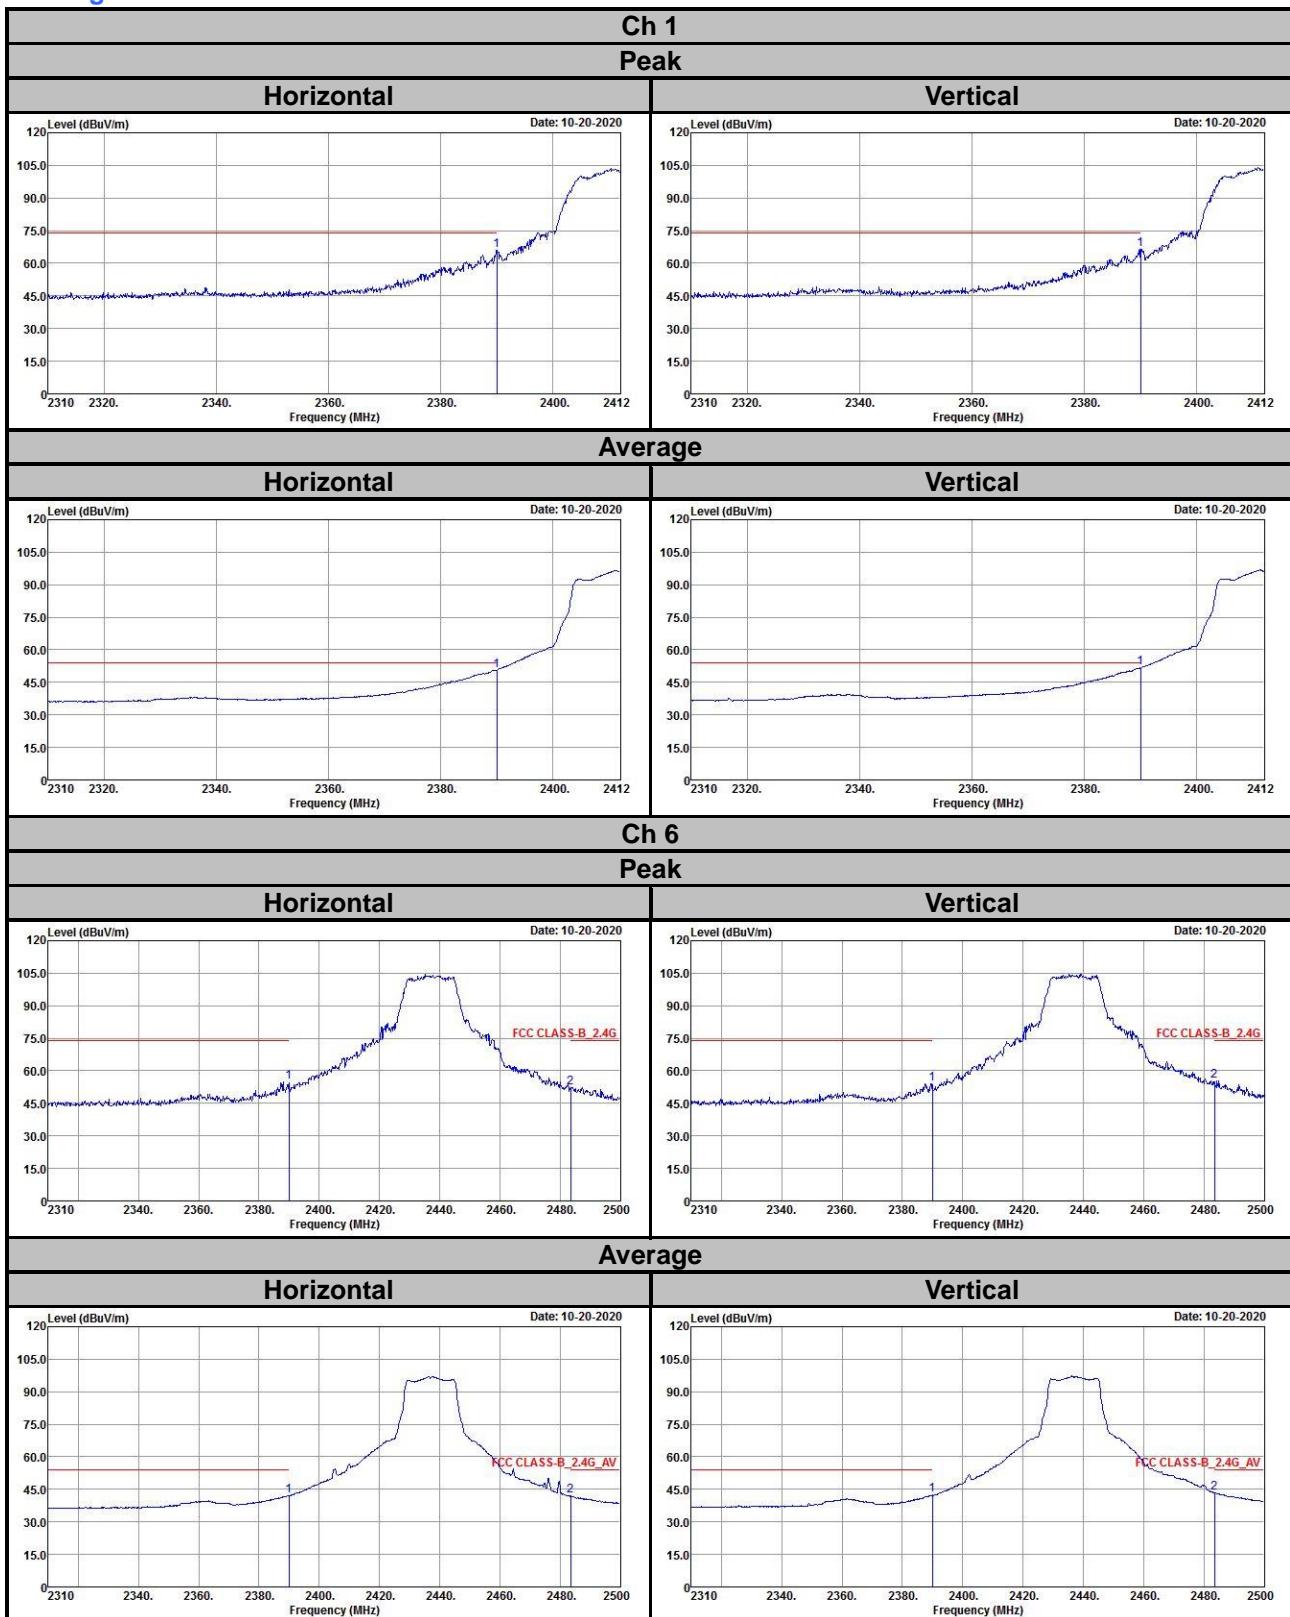802.11g

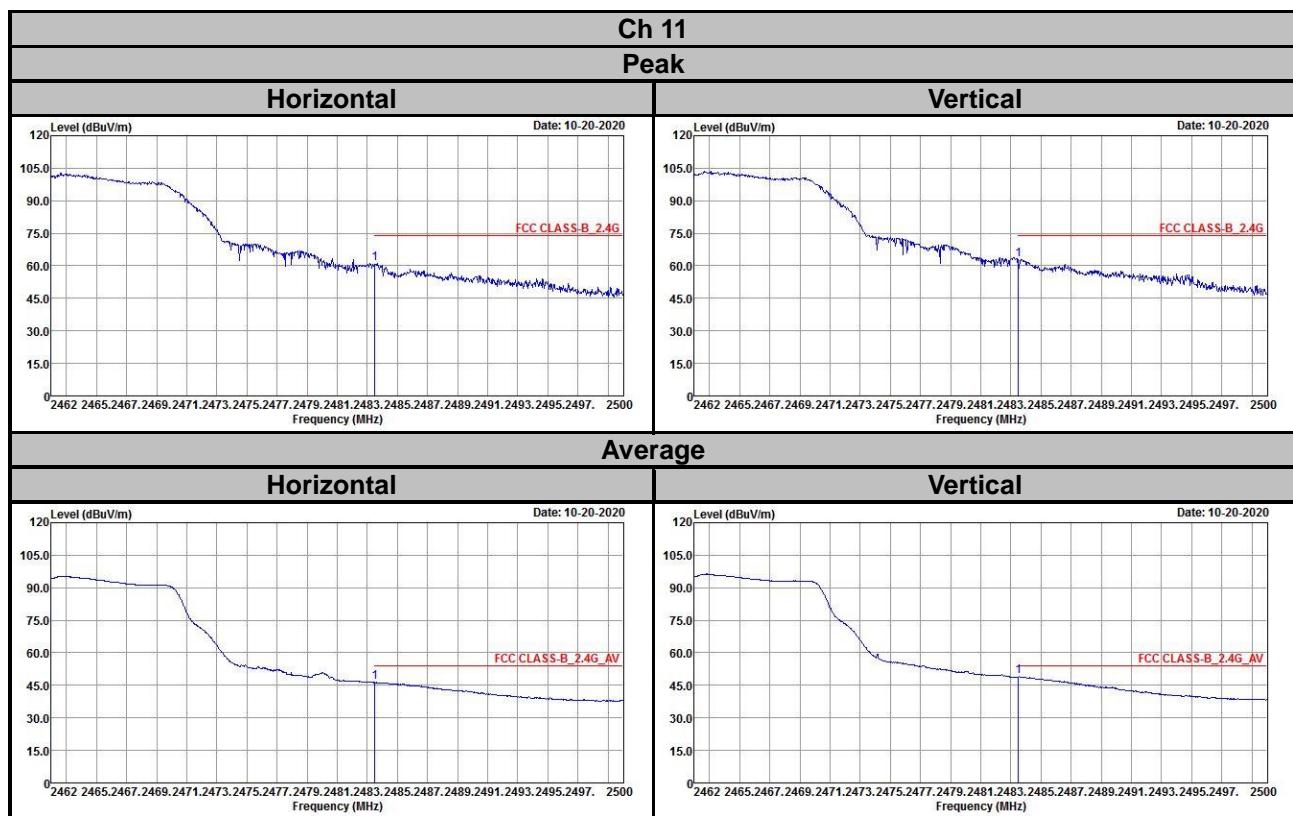

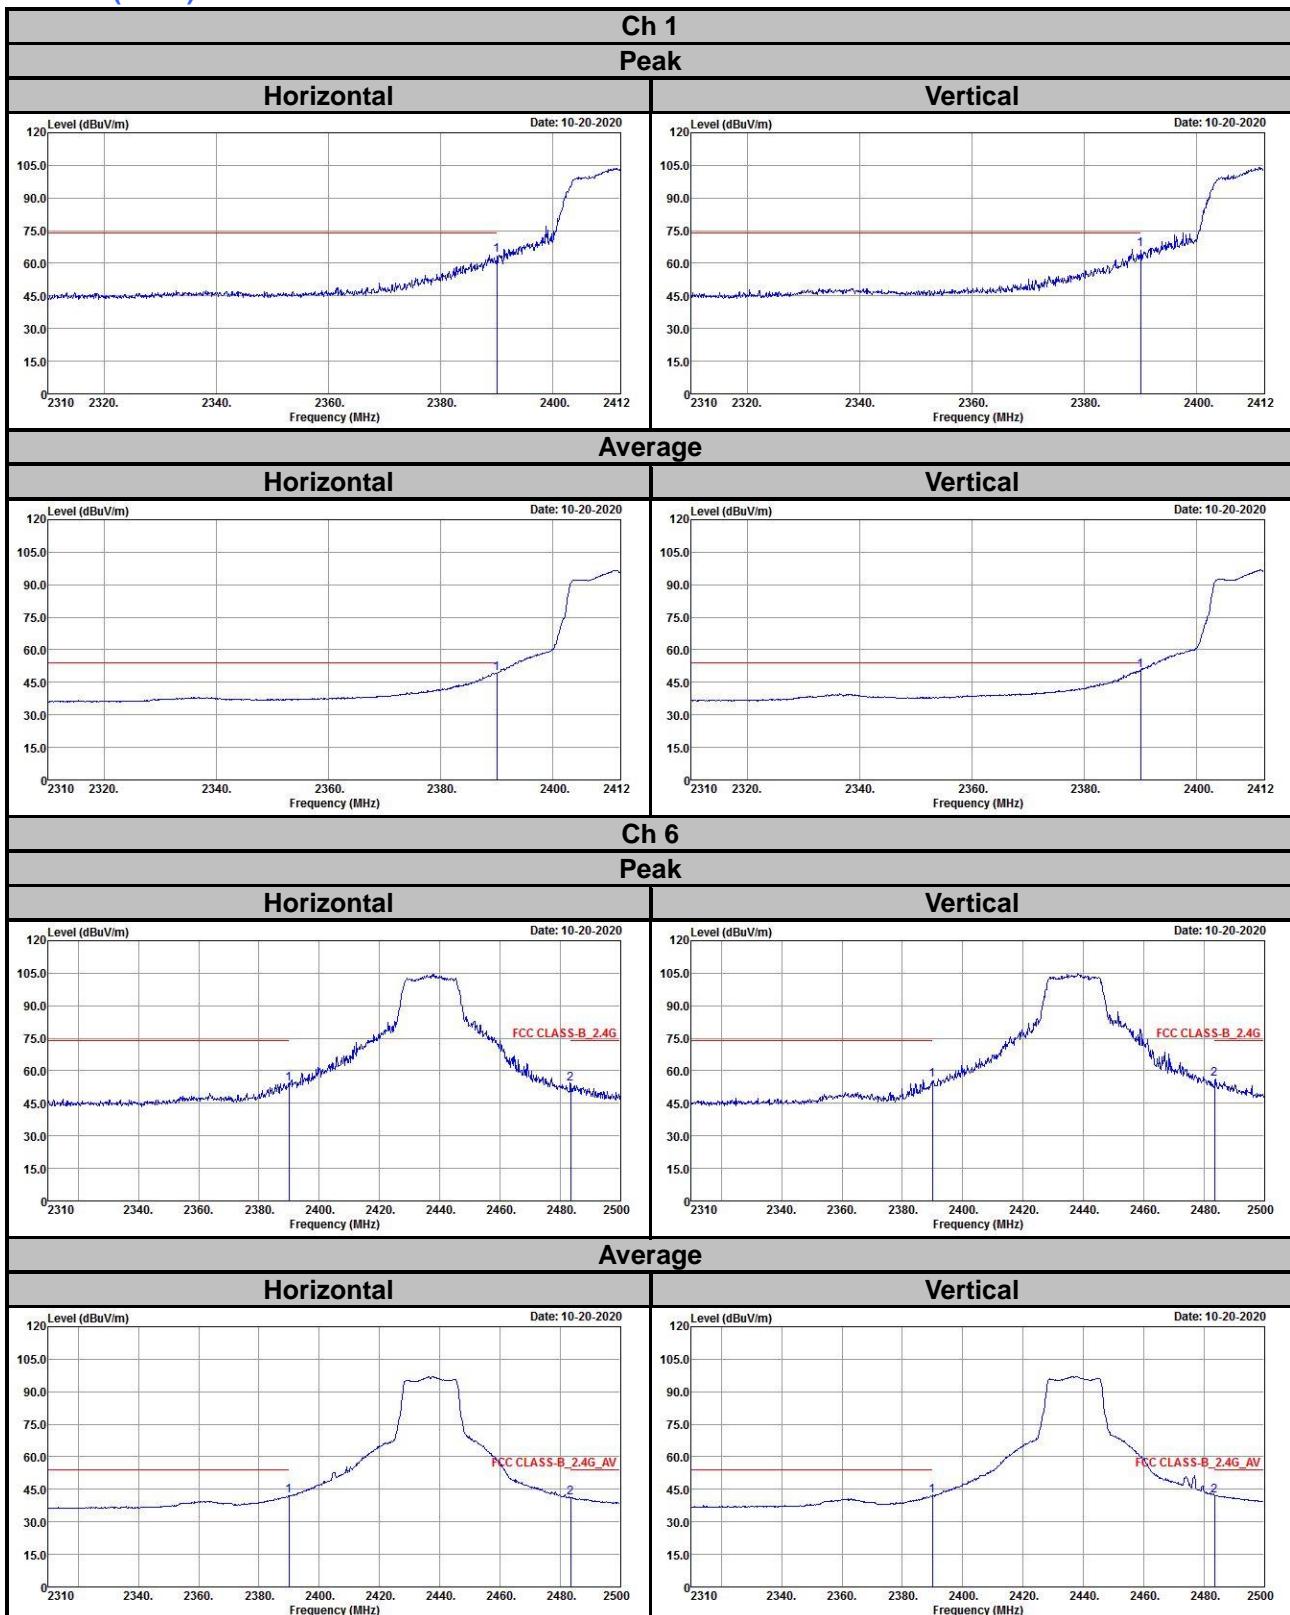
802.11n (HT20)

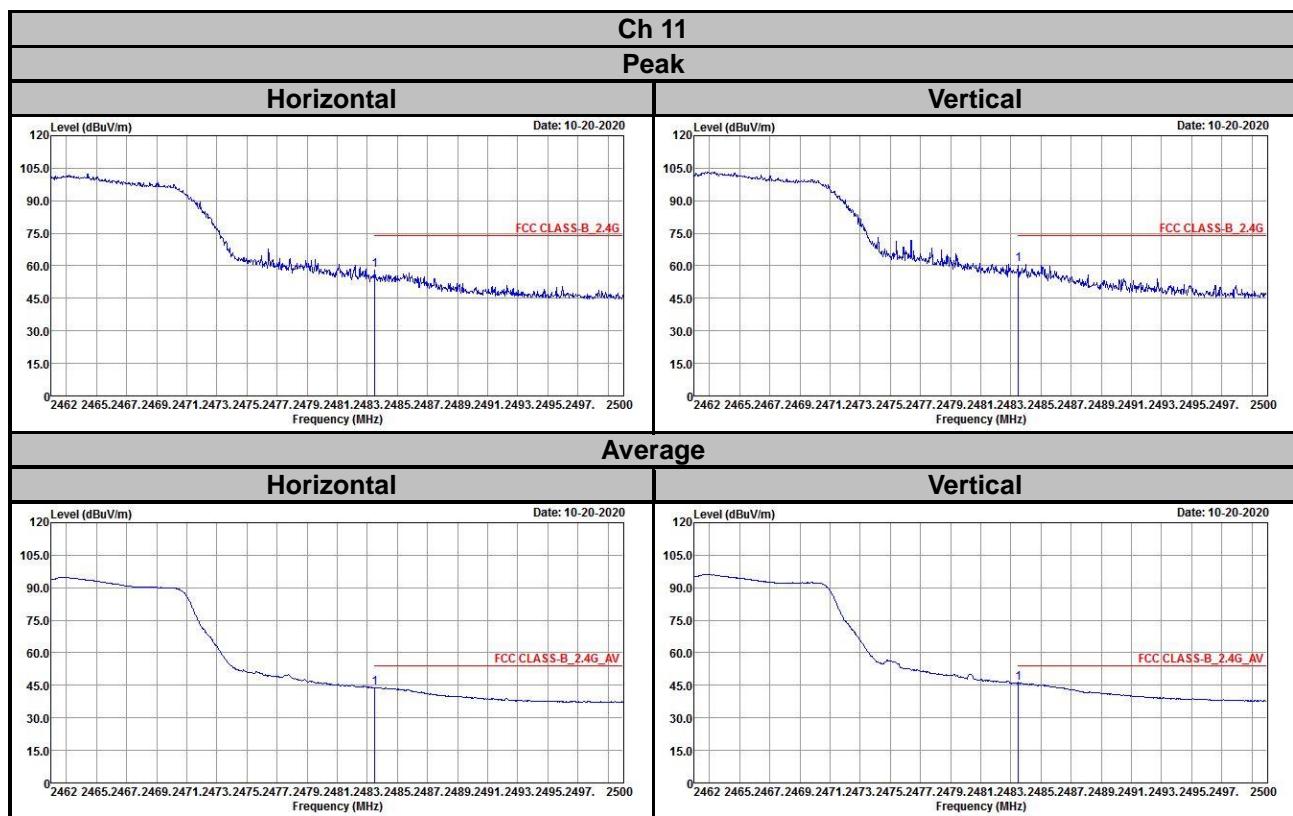


Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---