

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Product Name:	PeopleNet Connected Tablet
Brand Name:	PeopleNet
Model No.:	MS5
Model Difference:	N/A
FCC ID:	NKS-MS5N
Report No.:	E2/2015/10032-01
Issue Date:	Jan. 04, 2017
FCC Rule Part:	§15.225
Prepared for:	PEOPLENET 4400 Baker Road, Minnetonka, MN 55343, USA
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

Applicant:	PeopleNet 4400 Baker Road, Minnetonka, MN 55343, USA
Product Name:	PeopleNet Connected Tablet
Brand Name:	PeopleNet
Model No.:	MS5
Model Difference:	N/A
FCC ID:	NKS-MS5N
File Number:	E2/2015/10032-01
Date of test:	Oct. 20, 2016 ~ Oct. 27, 2016
Date of EUT Received:	Oct. 20, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Jazz	Huang	Date:	Jan. 04, 2017
Jazz Huang / J	Asst. supervisor		
Allen	Tsai	Date:	Jan. 04, 2017
Allen Tsa	i / Engineer		
Jim	Ch ang	Date:	Jan. 04, 2017
	Jazz Huang / J Allen	Jazz Huang / Asst. supervisor Allon Tsai Allen Tsai / Engineer	Jazz Huang / Asst. supervisor Allen Tsai / Engineer

Jim Chang / Asst. Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History

Report Number	Revision	Description	Issue Date	
E2/2016/10032-01	Rev.00	Initial creation of document	Jan. 04, 2017	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	11
4	Description of test modes	11
5	MEASUREMENT UNCERTAINTY	12
6	RADIATED EMISSION TEST	13
8	FREQUENCY TOLERANCE	25
9	20 dB OCCUPIED BANDWIDTH MEASUREMENT	27
10	0 ANTENNA REQUIREMENT	28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



GENERAL INFORMATION 1

1.1 **Product Description**

General:

Product Name:	PeopleNet Connected Tablet			
Brand Name:	PeopleNet			
Model No.:	MS5	MS5		
Model Difference:	N/A	N/A		
Hardware Version:	N/A			
Software Version:	N/A			
Tablet Docking Station	Model No.: MS-57602, Supplier: MSI			
Power Cable	P/N: L016-0576, Supplier: ELECTRI-CORD MFG.CO.			
7.4Vdc from LITHIUM-ION rechargeable battery or Power Supply: 12/24Vdc from DC Car battery		o ,		
	Battery: Model No.: MS5760, Supplier: Getac			

NFC:

0.	
Operating Frequency	13.56MHz
Transmit Power	61.42dBuV/m at 3m.
Number of Channels	1
Antenna Type	Loop Antenna
Modulation Type	ASK

This report complies with FCC regulatory radio rule with respect to RFID that operates on 13.56MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated and the state of the st electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Test Methodology

FCC Part 15, Supbpart C §15.225

ANSI C63.10:2013 Note: All test items have been performed and record as per the above standards...

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 735305

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m above the reference ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Limitation 2.4

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range	Limits dB (uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60 50			
Note				
1. The lower limit shall apply at the transition frequencies				
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50				
MHz.				

(2) Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b.Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

	Frequency (MHz)	Field strength μV/m	Distance (m)	Field strength at 3m dBµV/m
_	1.705-30	30	30	69.54
	30-88	100	3	40
	88-216	150	3	43.5
	216-960	200	3	46
	Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor = 40 log (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. $Ex.20^{1}\log(30)+40^{1}\log(30/3) = 69.54 dBuV/m$
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen 7.2.5 Table 3.
- 6. The general radiated emission limits in ξ 15.209 and RSS-Gen 7.2.5 Table 5 and Table 6 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

(3) Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primarv supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission




Fig. 2-2 Conducted (Antenna Port)

EUT	DC
	power

Table 2-1 Equipment Used in Tested System

lte m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test software	Tera Term	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3634A	MY53180030	N/A	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated and the state of the st electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result	
§15.225 (a)-(d)	Radiated Emission	Compliant	
§15.209	Radiated Emission Limits, general requirement		
§15.225 (e)	Frequency Stability	Compliant	
§2.1049 §15.215 (c)	99% & 20 dB OCCUPIED BANDWIDTH	Compliant	
§15.203	Antenna Requirement	Compliant	

4 DESCRIPTION OF TEST MODES

The EUT stay in continuous transmitting mode. The frequency 13.56MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case H position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 123.36 Hz
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty	9kHz - 30MHz: +/- 2.3dB
-------------------------	-------------------------

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated and the state of the st electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




RADIATED EMISSION TEST 6

6.1 **Measurement Procedure**


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

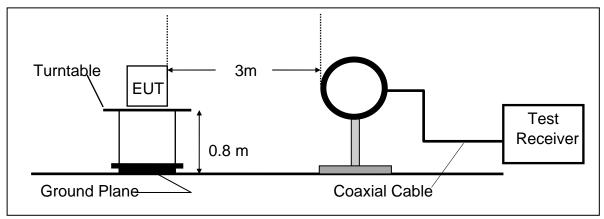

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

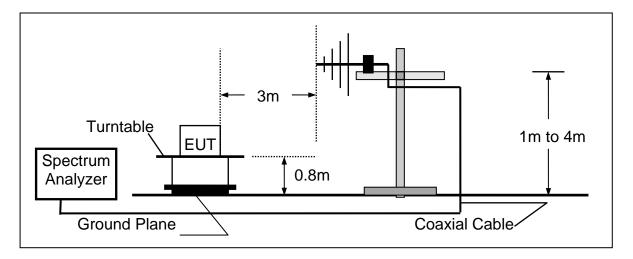

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.3 **Measurement Equipment Used:**

SGS 966 Chamber No.C										
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due					
EMI Test Receiver	R&S	ESU 40	100363	04/12/2016	04/11/2017					
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2015	12/22/2016					
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2016	11/02/2017					
Horn Antenna	ETS-Lindgren	3117	00143272	12/16/2015	12/15/2016					
Horn Antenna	Schwarzbeck	BBHA9170	185	07/24/2016	07/23/2017					
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016					
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/12/2015	12/11/2016					
Pre Amplifier	R&S	SCU-18	10204	12/12/2015	12/11/2016					
Pre Amplifier	R&S	SCU-26	100780	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2015	12/11/2016					
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2015	12/11/2016					
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016					
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017					
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017					
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2016	05/03/2017					
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.					
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.					
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.					
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	-	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

6.5 Field Strength of Fundamental Emission

6.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m


Note:

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB) "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note : "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



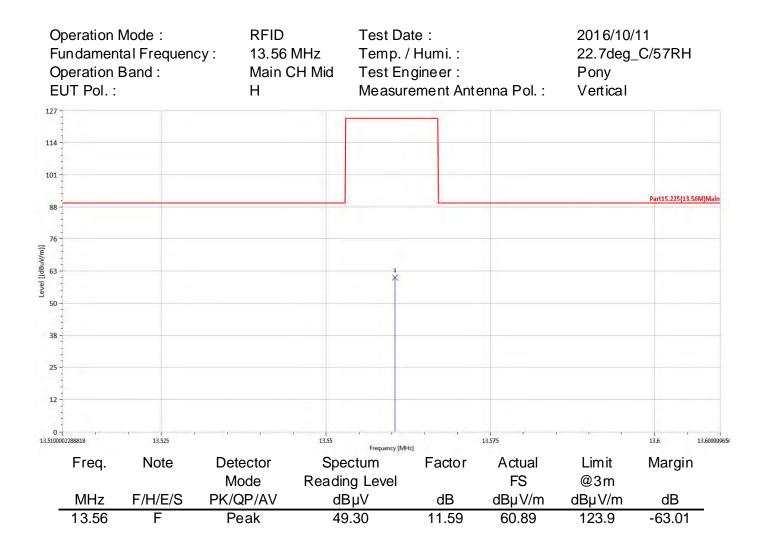

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



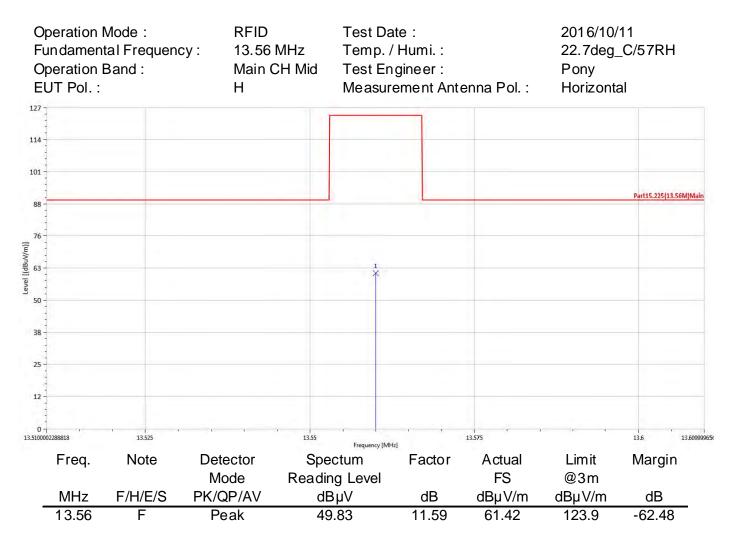

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.5.2 Radiated Mask

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.


Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



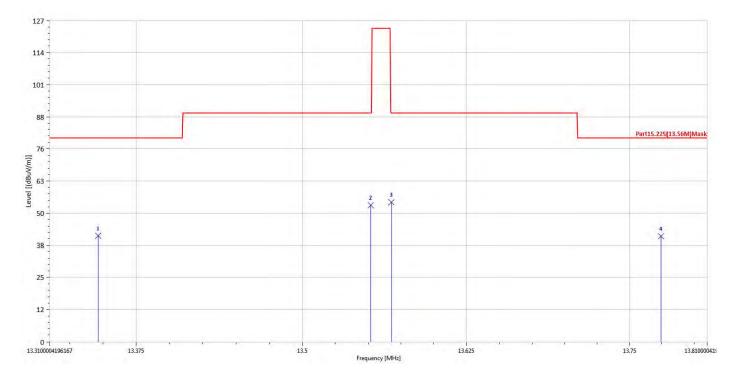


	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	13.35	S	Peak	30.23	11.60	41.82	80.5	-38.68
	13.55	S	Peak	42.42	11.59	54.02	90.47	-36.45
	13.57	S	Peak	43.62	11.59	55.21	90.47	-35.26
	13.77	S	Peak	30.06	11.58	41.64	80.5	-38.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Operation Mode : RFID Test Date : 2016/10/11 Fundamental Frequency: Temp. / Humi. : 13.56 MHz 22.7deg_C/57RH **Operation Band :** Mask CH Mid Test Engineer : Pony EUT Pol. : Measurement Antenna Pol. : Horizontal Н

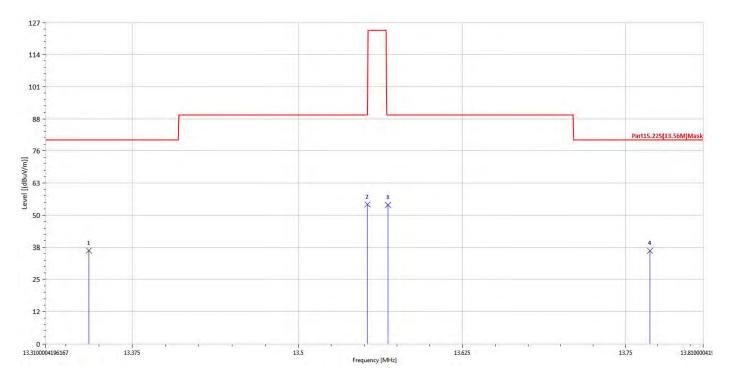

Fre	eq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
M	Hz F	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13	.34	S	Peak	25.31	11.60	36.91	80.5	-43.59
13	.55	S	Peak	43.57	11.59	55.16	90.47	-35.31
13	.57	S	Peak	43.35	11.59	54.94	90.47	-35.53
13	.77	S	Peak	25.22	11.58	36.80	80.5	-43.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.5.3 Radiated Emission -

Limit:

§15.225 (d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

The field strength of any emissions appearing outside of 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Operation Mode : Fundamental Frequen Operation Band : EUT Pol. :	RFID cy: 13.56 Tx Cł H	MHz Temp Mid Test	Date : b. / Humi. : Engineer : surement Ante	enna Pol. :	2016/10/ 22.7deg_ Pony Vertical	
127	- 11					
114 -						
101 -						
88	<u> </u>					
76						
63						
63 -						
50 -						
38 -				2 3		Part15.225(13.56M)
25		1		× ×	4 ×	6 ×
12						
0 -] 10	1 1	15 Freque	ency [MHz]	20	25	, <u>, , , , , , , , , , , , , , , , , , </u>
Freq. Note	Detector Mode	Spectum Reading Lev	Factor	Actual FS	Limit @3m	Margin
MHz F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

a) 20*log(30uV/m) + 40dB = 69.54 dBuV/m

17.08	S	Peak	18.03	11.48	29.52	69.54	-40.02
19.98	S	Peak	18.94	11.39	30.33	69.54	-39.21
22.00	S	Peak	19.71	10.90	30.62	69.54	-38.92
24.28	S	Peak	19.36	10.35	29.70	69.54	-39.84
27.12	Н	Peak	24.00	9.67	33.67	69.54	-35.87
28.82	S	Peak	18.55	9.24	27.79	69.54	-41.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Fı O	peration undame peration UT Pol.	ntal Frequer Band :	RFID ncy : 13.56 Tx Cł H	6 MHz	Test En	ate : / Humi. : Igineer : ement Ante	nna Pol. :	2016/10/1 22.7deg_ Pony Horizonta	C/57RH
.27 -			1						
14 -									
.01 -									
-									
88 -									
76 -									
63									
63 -									
50 -									
1									Part15.225(13.56M)
38 -		- 1			2	3	4 *		5 X
25 -		×			2 ×	×			6 ×
1									
12									
-0			r						
10			_	15	Frequency [N			25	
	Freq.	Note	Detector	•	ectum	Factor	Actual	Limit	Margin
	MHz	F/H/E/S	Mode PK/QP/AV		ng Level BµV	dB	FS dBµV/m	@3m dBµV/m	dB
-	12.16	S	Peak		9.03	11.64	30.67	69.54	-38.87
	17.36	S	Peak		8.50	11.47	29.97	69.54	-39.57
	19.92	S	Peak		8.75	11.39	30.13	69.54	-39.41
	21.66	S	Peak	2	3.51	10.99	34.49	69.54	-35.05
	27.12	Н	Peak		2.95	9.67	32.62	69.54	-36.92
	28.72	S	Peak	1	8.29	9.26	27.56	69.54	-41.98


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



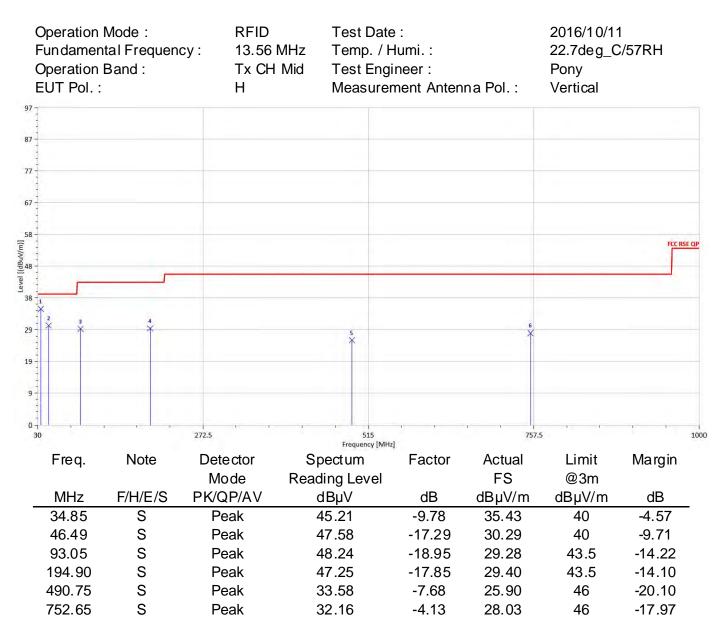

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



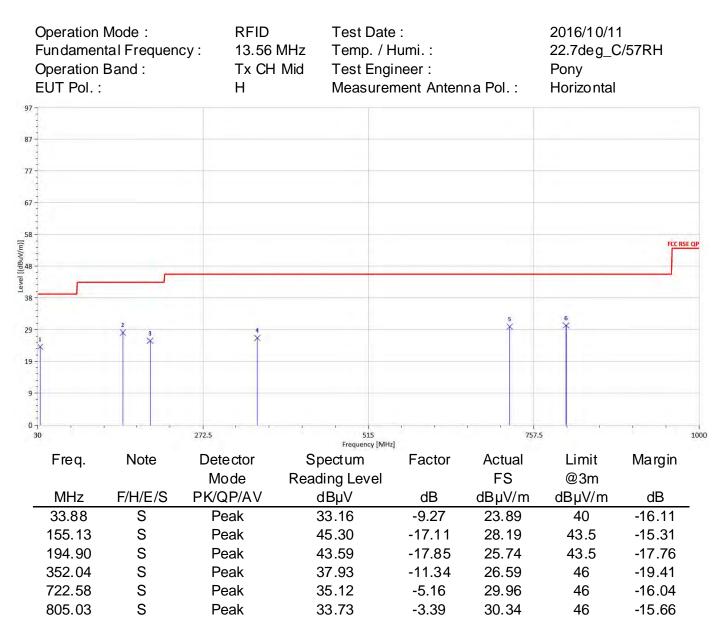

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




8 FREQUENCY TOLERANCE

8.1 **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.2 Test SET-UP (Block Diagram of Configuration)

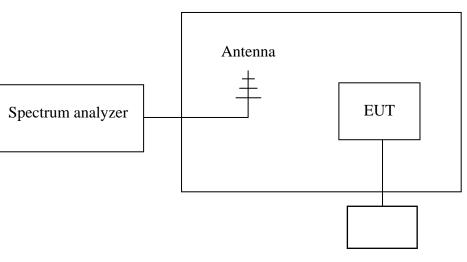

Temperature Chamber

DC Power Supply

8.3 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017				
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2015	12/22/2016				
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2016	05/03/2017				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.4 **Measurement Results**

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature	(MHz)	Delta (Hz)	Limit (KHz)
7.4	-20	13.5608	-300.00	+/- 1.356
7.4	-10	13.561	-500.00	+/- 1.356
7.4	0	13.5607	-200.00	+/- 1.356
7.4	10	13.5607	-200.00	+/- 1.356
7.4	20	13.5605	0.00	+/- 1.356
7.4	30	13.5604	100.00	+/- 1.356
7.4	40	13.5605	0.00	+/- 1.356
7.4	50	13.5605	0.00	+/- 1.356
7.4	60	13.5603	200.00	+/- 1.356
7.4	70	13.5604	100.00	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
8.51	20	13.5605	0.00	+/- 1.356
7.4	20	13.5605	0.00	+/- 1.356
6.29	20	13.5605	0.00	+/- 1.356



9 20 dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 Standard Applicable:

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure


20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

-20dB Bandwidth

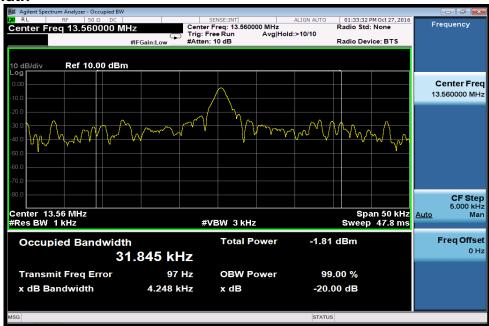

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10 ANTENNA REQUIREMENT

10.1. Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2. Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.