

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	PeopleNet Connected Tablet		
Brand Name:	PeopleNet		
Model No.:	MS5		
Model Difference:	N/A		
FCC ID:	NKS-MS5N2		
Report No.:	E2/2015/10032-03		
Issue Date:	Aug. 22, 2018		
FCC Rule Part:	§15.225		
Prepared for:	PEOPLENET 4400 Baker Road, Minnetonka, MN 55343, USA		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333		



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

Applicant:	PeopleNet 4400 Baker Road, Minnetonka, MN 55343, USA
Product Name:	PeopleNet Connected Tablet
Brand Name:	PeopleNet
Model No.:	MS5
Model Difference:	N/A
FCC ID:	NKS-MS5N2
File Number:	E2/2015/10032-03
Date of test:	Jul. 25, 2018 ~ Aug. 20, 2018
Date of EUT Received:	Jul. 25, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Vit, Pei	Date:	Aug. 22, 2018
-	Vito Pei / Engineer		
Prepared By:	Yun Tsou	Date:	Aug. 22, 2018
Approved By	Yuri Tsai / Clerk Jim Chang	Date:	Aug. 22, 2018

Jim Chang / Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/10032-01	Rev.00	Initial creation of document	Jan. 04, 2017
E2/2015/10032-02	Rev.01	Change Tablet Docking Station	Jul. 30, 2018
E2/2015/10032-03	Rev.02	Change of NFC Chip	Aug. 22, 2018



Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	. 11
4	Description of test modes	. 11
5	MEASUREMENT UNCERTAINTY	. 12
6	RADIATED EMISSION TEST	. 13
8	FREQUENCY TOLERANCE	. 25
9	20 dB OCCUPIED BANDWIDTH MEASUREMENT	. 28
10	ANTENNA REQUIREMENT	. 29



GENERAL INFORMATION 1

1.1 **Product Description**

General:

Product Name:	PeopleNet Connected Tablet			
	•			
Brand Name:	PeopleN	et		
Model No.:	MS5			
Model Difference:	N/A			
Hardware Version:	N/A			
Software Version:	N/A			
Tablet Docking Station:	Model No.: MS-57603, Supplier: MSI			
Power Cable	P/N: L016-0576, Supplier: ELECTRI-CORD MFG.CO.			
Power Supply:	7.4Vdc from LITHIUM-ION rechargeable battery or 12/24Vdc from DC Car battery			
	Battery: Model No.: MS5760 , Supplier: Getac			

NFC:

 0.		
Operating Frequency	13.56MHz	
Transmit Power	61.42dBuV/m at 3m.	
Number of Channels	1	
Antenna Type	Loop Antenna	
Modulation Type	ASK	

This report complies with FCC regulatory radio rule with respect to RFID that operates on 13.56MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Test Methodology

FCC Part 15, Supbpart C §15.225

ANSI C63.10:2013 Note: All test items have been performed and record as per the above standards...

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory

No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513) FCC Registration Numbers are: 735305 / TW0002

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m above the reference ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Limitation 2.4

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range	Limits			
Trequency range	ŭ	B (uV)		
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56 46			
5 to 30	60 50			
Note				
1. The lower limit shall apply at the transition frequencies				
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50				
MHz.				

(2) Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b.Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

Field strength μV/m	Distance (m)	Field strength at 3m dBµV/m
30	30	69.54
100	3	40
150	3	43.5
200	3	46
500	3	54
	μV/m 30 100 150 200	μV/m Distance (III) 30 30 100 3 150 3 200 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark 1. Emission level in dBuV/m=20 log (uV/m)

- Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor = 40 log (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen 7.2.5 Table 3.
- 6. The general radiated emission limits in ξ 15.209 and RSS-Gen 7.2.5 Table 5 and Table 6 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

(3) Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primarv supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission




Fig. 2-2 Conducted (Antenna Port)

EUT	DC
	power

Table 2-1 Equipment Used in Tested System

lte m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test software	Tera Term	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	99% & 20 dB OCCUPIED BANDWIDTH	Compliant
§15.203	Antenna Requirement Complia	

4 DESCRIPTION OF TEST MODES

The EUT stay in continuous transmitting mode. The frequency 13.56MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case H position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document to express the fullest extent of the law.



5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty					
AC Power Line Conducted Emission	+/- 2.586 dB					
Frequency Stability	+/- 123.36 Hz					
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz					
Temperature	+/- 0.8 °C					
Humidity	+/- 4.7 %					
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%					

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




RADIATED EMISSION TEST 6

6.1 **Measurement Procedure**


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

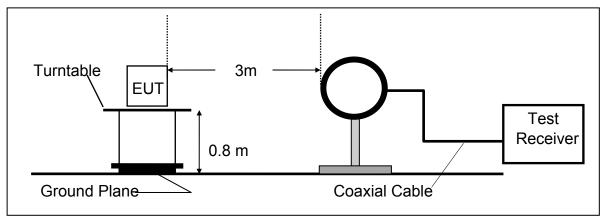

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

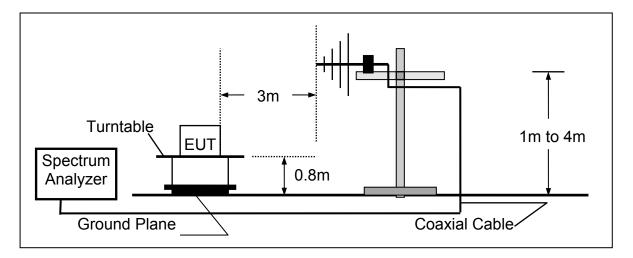

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.3 **Measurement Equipment Used:**

SGS 966 Cham	SGS 966 Chamber No.C											
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due							
Broadband Antenna	TESEQ	CBL 6112D	35243	2017/11/10	2018/11/9							
Loop Antenna	ETS.LINDGRE N	6502	148045	2017/09/26	2018/9/25							
EMI Test Receiver	R&S	ESU 40	100363	2018/04/11	2019/4/10							
Pre-Amplifier	EMC Instruments	EMC330	980096	2017/12/26	2018/12/25							
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	2017/12/26	2018/12/25							
Coaxial Cable	Huber Suhner	SUCOFLEX 104	MY17388/4	2017/12/26	2018/12/25							
Coaxial Cable	Huber Suhner	RG 214/U	W22.03	2017/12/26	2018/12/25							



6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	-	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

6.5 Field Strength of Fundamental Emission

6.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

Note:

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB) "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note : "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Test EUT	ation Mo Mode Pol Channel		:H F	C in CH M Plan 56 MHz	ID		Test Date Temp./Humi. Antenna Pol. Engineer						:2018-08-10 :25/60 :VERTICAL :Ashton
420	Level (dBuV/	m)											
130													
100													
80													
						1							
60													
40													
20													
20													
0	13.51	13	.53	13	5.55 Frequer	ncy (MHz)	13.57	l	1	3.59		13.61	
F	req.	Dete	ctor	Spectr	um	Fac	tor		Actual		Limi	t	Margin
		Мо	de l	Reading	Level				FS		@3n	n	
N	ЛНz	PK/Q	P/AV	dBµ'	V	dl	3	d	lBµV/m		dBµV/	/m	dB
1	3.56	Pe	ak	46.2	2	11.	99		58.21		124.0	00	-65.79



Test N EUT I		de	:H F	in CH M	ID		Test Date Temp./Humi. Antenna Pol. Engineer					3-08-10 0 RIZONTAL con
130	Level (dBuV/	m)										
130												
100											_	
80												
60						1					_	
40											_	
20											_	
0	13.51	13	.53	13	5.55 Freque	ncy (MHz)	13.57		13.59		13.61	
F	req.	Dete	ctor	Spectr	um	Fac	tor	Actua	al	Limit	Ма	argin
		Мо	de l	Reading	Level			FS		@3m		
N	ЛНz	PK/Q	P/AV	dBµ'	V	dE	3	dBµV/	m	dBµV/m	(dB
1:	3.56	Pe	ak	47.4	0	11.9	99	59.39	9	124.00	-6	4.61



6.5.2 Radiated Mask

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



EUT Pol :H				C sk CH M Plan 56 MHz	ID			Test Date Temp./Hu Antenna Engineer	umi. Pol.		:2018-08-10 :25/60 :VERTICAL :Ashton
420	Level (dBuV/	m)									
120											
100											
80											
60											
								-			
40			2		3		4				
20	1									6	
0	13.06048	13.26	i	13.46 Frequency (MHz			6.66	1	14.0604	48	
F	req.	Detect	or	Spectr	-	Factor	-	Actual		Limit	Margin
I	icq.	Mode		Reading		T actor		FS		@3m	Margin
Ν	ЛНz	PK/QP/		dBµ'		dB		dBµV/m		BµV/m	dB
	/11 12		/ \ V	dDp	v	<u>ub</u>		αυμν/m		σμνπ	
1	3.06	Peak	(5.81		12.02		17.83	6	69.54	-51.71
	3.35	Peak	(22.5		12.00		34.50	8	30.54	-46.04
	3.47	Peak		18.9		11.99		30.92		90.47	-59.55
	3.69	Peak		19.8		11.98		31.79		90.47	-58.68
	3.77	Peak		24.9		11.98		36.97		30.50	-43.53
	4.03	Peak		4.75		11.96		16.71		69.54	-52.83



Test M EUT F		:N :H	IFC /ask CH MID I Plan 3.56 MHz		Test Date Temp./Humi Antenna Pol Engineer	:2018-08-10 :25/60 :HORIZONTAL :Ashton	
130 ^L	.evel (dBuV/r	m)					_
130				-			
100							
80							
60							
00							
40			2 3	4	5		
20	1					6	
0 <u>-</u> 1	3.06048	13.26	13.46 Frequ	13.66 ency (MHz)	13.86	14.0604	18
Fr	eq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	cy.	Mode	Reading Level	1 40101	FS	@3m	Margin
Μ	IHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
			[···				
13	3.07	Peak	5.54	12.02	17.56	69.54	-51.98
13	3.35	Peak	24.04	12.00	36.04	80.54	-44.50
13	3.45	Peak	18.58	11.99	30.57	90.47	-59.90
13	8.69	Peak	21.51	11.98	33.49	90.47	-56.98
13	8.77	Peak	20.09	11.98	32.07	80.50	-48.43
14	1.06	Peak	8.10	11.96	20.06	69.54	-49.48



6.5.3 Radiated Emission -


Limit:

§15.225 (d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

The field strength of any emissions appearing outside of 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

a) 20*log(30uV/m) + 40dB = 69.54 dBuV/m

Operation Mode	:NFC	Test Date	:2018-08-10
Test Mode	:TX CH MID	Temp./Humi.	:25/60
EUT Pol	:H Plan	Antenna Pol.	:VERTICAL
Test Channel	:13.56 MHz	Engineer	:Ashton

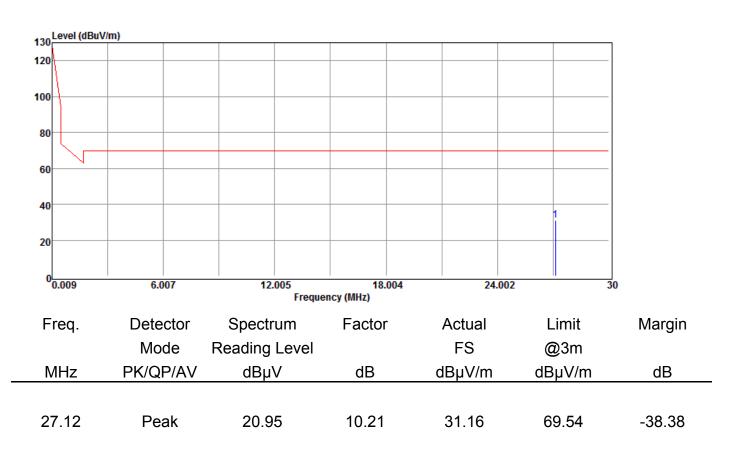

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Test N EUT I			:H	C CH MID Plan .56 MHz	Antenna Pol.						:2018-08-10 :25/60 :HORIZONTAL :Ashton
	Level (dBuV	/m)									
130 120	l										_
120											
100											_
80											_
60	X										_
40										1	_
20											_
20											
0	0.009	6.0	07	12	005	18.	.004	24	.002		
						ncy (MHz)					
F	req.	Dete	ctor	Spectr	um	Factor	r	Actual	L	_imit	Margin
		Мо	de	Reading	Level			FS	(2)3m	
Ν	/IHz	PK/QI	P/AV	dBµ	V	dB		dBµV/m	dE	3µV/m	dB
				•				•			
27	7.12	Pea	ak	25.3	0	10.21		35.51	6	9.54	-34.03



Operation Mode Test Mode EUT Pol Test Channel	:NFC :TX CH MID :H Plan :13.56 MHz		Test Date Temp./Humi. Antenna Pol Engineer		:2018-08-10 :25/60 :VERTICAL :Ashton
100 Level (dBuV/m)					_
90					
80					
70					
60					
50					
40	5			6	
30 2 3					
20					
10					
0 <mark></mark>	418.	612.	806.	100	 DO
	Freque	ncy (MHz)			
Freq. Detecto	r Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
MHz PK/QP/A	V dBµV	dB	dBµV/m	dBµV/m	dB
40.68 Peak	33.11	-9.17	23.94	40.00	-16.06
99.84 Peak	44.71	-14.81	29.90	43.50	-13.60
128.94 Peak	40.46	-11.51	28.95	43.50	-14.55
200.72 Peak	47.29	-12.92	34.37	43.50	-9.13
402.48 Peak	40.00	-5.99	34.01	46.00	-11.99
938.89 Peak	34.50	1.86	36.36	46.00	-9.64



Operation Mo Test Mode EUT Pol Test Channel	:T: :H	FC X CH MID Plan 3.56 MHz		Test Date Temp./Humi. Antenna Pol. Engineer		:2018-08-10 :25/60 :HORIZONTAL :Ashton
100 Level (dBuV/i	m)					
90						
80						
70						
60						
50						
40	3	. 5 6				
30	2	4 5				
20						
10						
0 <mark></mark> 30	224.	418. Eroquo	612. ncy (MHz)	806.	100	0
F ace of	Detector			A	1 : :4	N A a marine
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
N411-	Mode	Reading Level	٩D	FS	@3m	٩D
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.97	Peak	31.94	-4.16	27.78	40.00	-12.22
140.58	Peak	44.12	-4.10 -11.93	32.19	40.00	-12.22
200.72	Peak	44.12 49.84	-11.93	36.92	43.50	-6.58
301.60		49.84 39.20		29.37		-0.50 -16.63
	Peak		-9.83		46.00 46.00	
352.04	Peak	39.93 40.32	-7.95	31.98		-14.02
402.48	Peak	40.32	-5.99	34.33	46.00	-11.67




8 FREQUENCY TOLERANCE

8.1 **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.2 Test SET-UP (Block Diagram of Configuration)

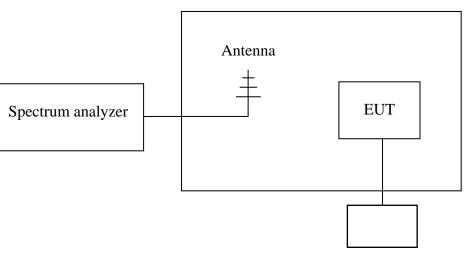

Temperature Chamber

DC Power Supply

8.3 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	2017/10/30	2018/10/29		
Temperature Chamber	TERCHY	MHK-120LK	1020582	2018/06/19	2019/06/18		
DC Block	PASTERNACK	PE8210	RF29	2017/12/08	2018/12/07		
Loop Antenna	ETS-Lindgren	6502	00143303	2017/12/04	2018/12/03		
DC Power Supply	Agilent	E3640A	MY53140006	2018/05/02	2019/05/01		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.4 Measurement Results

Startup

A. Temperature Variation

Power Supply Vdc	Environment Temperature()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
7.4	-20	13.5607	-0.91000	+/- 1.356
7.4	-10	13.55959	0.20000	+/- 1.356
7.4	0	13.56025	-0.46000	+/- 1.356
7.4	10	13.56025	-0.46000	+/- 1.356
7.4	20	13.55979	0.00000	+/- 1.356
7.4	30	13.56107	-1.28000	+/- 1.356
7.4	40	13.56056	-0.77000	+/- 1.356
7.4	50	13.5608	-1.01000	+/- 1.356

B. Supply Voltage

Variation

Power Supply Vdc	Environment Temperature ()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
8.51	20	13.56084	-0.24000	+/- 1.356
7.4	20	13.5606	0.00000	+/- 1.356
6.29	20	13.55994	0.66000	+/- 1.356

2 minutes

A. Temperature Variation

Power Supply Vdc	Environment Temperature()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
7.4	-20	13.56074	0.21000	+/- 1.356
7.4	-10	13.55993	1.02000	+/- 1.356
7.4	0	13.56066	0.29000	+/- 1.356
7.4	10	13.56088	0.07000	+/- 1.356
7.4	20	13.56095	0.00000	+/- 1.356
7.4	30	13.56054	0.41000	+/- 1.356
7.4	40	13.56023	0.72000	+/- 1.356
7.4	50	13.56143	-0.48000	+/- 1.356

B. Supply Voltage Variation

Power Supply Vdc	Environment Temperature()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
8.51	20	13.5611	470.00000	+/- 1.356
7.4	20	13.56157	0.00000	+/- 1.356
6.29	20	13.56003	1540.00000	+/- 1.356



5 minutes

A. Temperature Variation

Power Supply Vdc	Environment Temperature()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
7.4	-20	13.56007	1400.00000	+/- 1.356
7.4	-10	13.55918	2290.00000	+/- 1.356
7.4	0	13.55952	1950.00000	+/- 1.356
7.4	10	13.56092	550.00000	+/- 1.356
7.4	20	13.56147	0.00000	+/- 1.356
7.4	30	13.56009	1380.00000	+/- 1.356
7.4	40	13.56174	-270.00000	+/- 1.356
7.4	50	13.56064	830.00000	+/- 1.356

B. Supply Voltage

Variation

Power Supply Vdc	Environment Temperature ()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
8.51	20	13.56097	-1210.00000	+/- 1.356
7.4	20	13.55976	0.00000	+/- 1.356
6.29	20	13.5616	-1840.00000	+/- 1.356

10minutes

A. Temperature Variation

Power Supply Vdc	Environment Temperature()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
7.4	-20	13.55911	1190.00000	+/- 1.356
7.4	-10	13.56086	-560.00000	+/- 1.356
7.4	0	13.55922	1080.00000	+/- 1.356
7.4	10	13.56069	-390.00000	+/- 1.356
7.4	20	13.5603	0.00000	+/- 1.356
7.4	30	13.56008	220.00000	+/- 1.356
7.4	40	13.56068	-380.00000	+/- 1.356
7.4	50	13.56208	-1780.00000	+/- 1.356

B. Supply Voltage Variation

Power Supply Vdc	Environment Temperature ()	Frequency (MHz)	Delta (KHz)	Limit (KHz)
8.51	20	13.56017	1010.00000	+/- 1.356
7.4	20	13.56118	0.00000	+/- 1.356
6.29	20	13.56125	-70.00000	+/- 1.356



9 20 dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 Standard Applicable:

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure


20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

-20dB Bandwidth

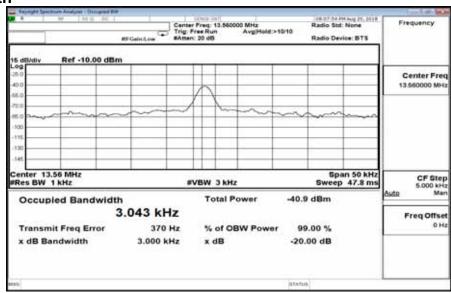

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10 ANTENNA REQUIREMENT

10.1. Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2. Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law