



# FCC 47 CFR PART 15 SUBPART C

## TEST REPORT

*For*

**Applicant:** iUi Design Limited

**Address:** 4/F, Hongkong Trade Centre, 161-167 Des Voeux Road, Central  
Hongkong

**Product Name:** Portable Bluetooth Speaker

**Model Name:** BeCool, XqBeats 3.0

**Brand Name:** iUi

**FCC ID:** NKTPF309

**Report No.:** MTE/CLY/D12050544

**Date of Issue:** May 09, 2012

**Issued by:** Most Technology Service Co., Ltd.

**Address :** No.5, Langshan 2nd Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China

**Tel :** 86-755-8617 0306

**Fax :** 86-755-8617 0310

*The report consists 41 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

**TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY.....	3
2. GENERAL INFORMATION.....	4
2.1 Product Information .....	4
2.2 Objective .....	5
2.3 Test Standards and Results.....	5
2.4 Environmental Conditions.....	5
3. TEST FACILITY .....	6
3.1 TEST FACILITY.....	6
3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
4. SETUP OF EQUIPMENT UNDER TEST.....	8
4.1 SUPPORT EQUIPMENT.....	8
4.2 TEST EQUIPMENT LIST.....	9
5. 47 CFR Part 15C 15.249 Requirements.....	10
5.1 Spurious Emission Test .....	10
5.1.1 Requirement.....	10
5.1.2 Test Description .....	11
5.1.3 Test Description .....	12
5.1.4 Test Result.....	13
5.2 Band Edge.....	27
5.2.1 Requirement.....	27
5.2.2 Test Description .....	27
5.2.3 Test Result.....	27
5.3 LINE CONDUCTED EMISSION TEST .....	30
5.3.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....	30
5.3.2. BLOCK DIAGRAM OF TEST SETUP.....	30
5.3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	31
5.3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	31
5.3.5. Test result .....	31
5.3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	31
5.4 20 dB Bandwidth .....	36
5.4.1 Definition .....	36
5.4.2 Block Diagram Of Test Setup .....	36
5.4.3 Test Result.....	36
APPENDIX 1 .....	40
PHOTOGRAPHS OF TEST SETUP.....	40

**1. VERIFICATION OF CONFORMITY**

**Equipment Under Test:** Portable Bluetooth Speaker  
**Brand Name:** iUi  
**Model Number:** BeCool, XqBeats 3.0  
**FCC ID:** NKTPF309  
**Applicant:** iUi Design Limited  
4/F, Hongkong Trade Centre, 161-167 Des Voeux Road, Central Hongkong  
**Manufacturer:** Plastoform Industries Ltd.  
Building No.16, 19, 21, 28, 29 B Zone, The 1<sup>st</sup> Industrial Zone, Gonghe  
Community, Shajing Street, Baoan District, Shenzhen City, Guangdong,  
P.R.C  
**Technical Standards:** 47 CFR Part 15 Subpart C  
**File Number:** MTE/CLY/D12050544  
**Date of test:** Apr. 28-May 06, 2012  
**Deviation:** None  
**Condition of Test Sample:** Normal  
**Test Result:** PASS

The above equipment was tested by MOST for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepare by (+ signature):



Carol Yin

May 06, 2012

Review by (+ signature):



Elva Wong

May 08, 2012

Approved by (+ signature):



Yvette Zhou

May 09, 2012



## 2. GENERAL INFORMATION

### 2.1 Product Information

<b>Product:</b>	Portable Bluetooth Speaker
<b>Trade Name:</b>	iUi
<b>Model Number:</b>	BeCool, XqBeats 3.0
<b>Series Number:</b>	N/A
<b>Description of Differences:</b>	N/A
<b>Power Supply:</b>	1、DC 5V Adapter AC 100-240V, 50/60Hz 2、DC 3.7V By Battery
<b>Frequency Range:</b>	2402MHz -2480MHz
<b>Modulation Type:</b>	GFSK, Pi/4-DOPSK, 8-DPSK
<b>Modulation Technique:</b>	FHSS
<b>Antenna Type:</b>	Internal Fixed
<b>Antenna Gain:</b>	1.0dBi
<b>Channel Spacing:</b>	1MHz
<b>Channel Number:</b>	79
<b>Temperature Range:</b>	-20°C ~ +50°C

**NOTE:**

1. For a more detailed features description about the EUT, please refer to User's Manual.

## 2.2 Objective

Perform FCC Part 15 Subpart C tests for FCC Marking.

## 2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.249(a)	Spurious Emission	PASS	2012-05-06
2	15.249(a)	Band Edge	PASS	2012-04-28
3	15.249(a)	20Db Bandwidth	PASS	2012-04-28
3	15.207	Power Line Conducted Emission Test	PASS	2012-05-06

*Note:* 1. The test result judgment is decided by the limit of measurement standard  
2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST FACILITY

#### 3.1 TEST FACILITY

Test Site: Most Technology Service Co., Ltd.

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

The **IC** Registration Number is **46405-7103**.

The **CNAS** Registration Number is **CNAS L3573**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2009, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2009.

### 3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**4. SETUP OF EQUIPMENT UNDER TEST****4.1 SUPPORT EQUIPMENT**

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
iPod	APPLE	iPod nano3	N/A		1.0m
AC Adapter	MASS	ECF0500070A1BU	N/A		1.0m
AC Adapter	Kuantech	KSAS0060500070D5U	N/A		1.0m

*Remark:*

*All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

## 4.2 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2013/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2013/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2013/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2013/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2013/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2013/03/14
7	Bilog Antenna	SCHWARZBECK	BBHA9120D	D69250	2013/03/14
8	Cable	Resenberger	N/A	NO.1	2013/03/14
9	Cable	SchwarzBeck	N/A	NO.2	2013/03/14
10	Cable	SchwarzBeck	N/A	NO.3	2013/03/14
11	DC Power Filter	DuoJi	DL2×30B	N/A	2013/03/14
12	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2013/03/14
13	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2013/03/14
14	Test Receiver	Rohde & Schwarz	ESCI	100492	2013/03/14
15	Absorbing Clamp	Luthi	MDS21	3635	2013/03/14
16	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2013/03/14
17	AC Power Source	Kikusui	AC40MA	LM003232	2013/03/14
18	Test Analyzer	Kikusui	KHA1000	LM003720	2013/03/14
19	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2013/03/14
20	ESD Tester	Kikusui	KES4021	LM003537	2013/03/14
21	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2013/03/14
22	Signal Generator	IFR	2032	203002/100	2013/03/14
23	Amplifier	A&R	150W1000	301584	2013/03/14
24	CDN	FCC	FCC-801-M2-25	47	2013/03/14
25	CDN	FCC	FCC-801-M3-25	107	2013/03/14
26	EM Injection Clamp	FCC	F-203I-23mm	403	2013/03/14
27	RF Cable	MIYAZAKI	N/A	No.1/No.2	2013/03/14
28	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2013/03/14
29	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2013/03/14
30	Telecommunication Test Equipment	R&S	CMU200	N/A	2013/03/14
31	8 Loop Antenna	ARA	PLA-1030/B	1029	2013/02/19

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.

## 5. 47 CFR Part 15C 15.249 Requirements

### 5.1 Spurious Emission Test

#### 5.1.1 Requirement

According to FCC section 15.249(a):

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


### 5.1.2 Test Description


#### Test Setup:

**From 9KHz to 30MHz:**

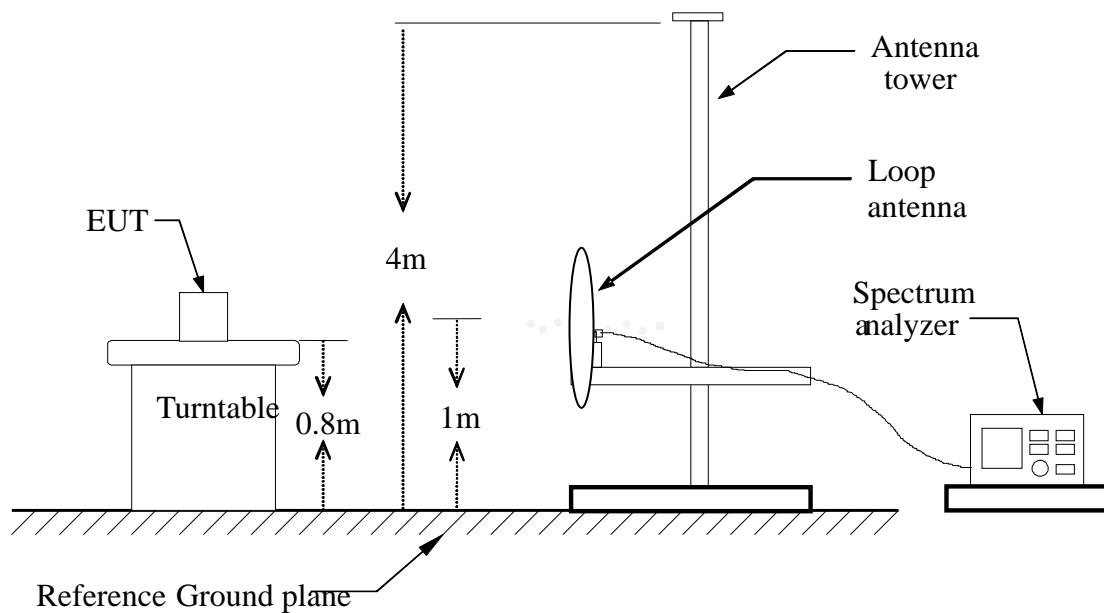

**From 30MHz to 1GHz:**

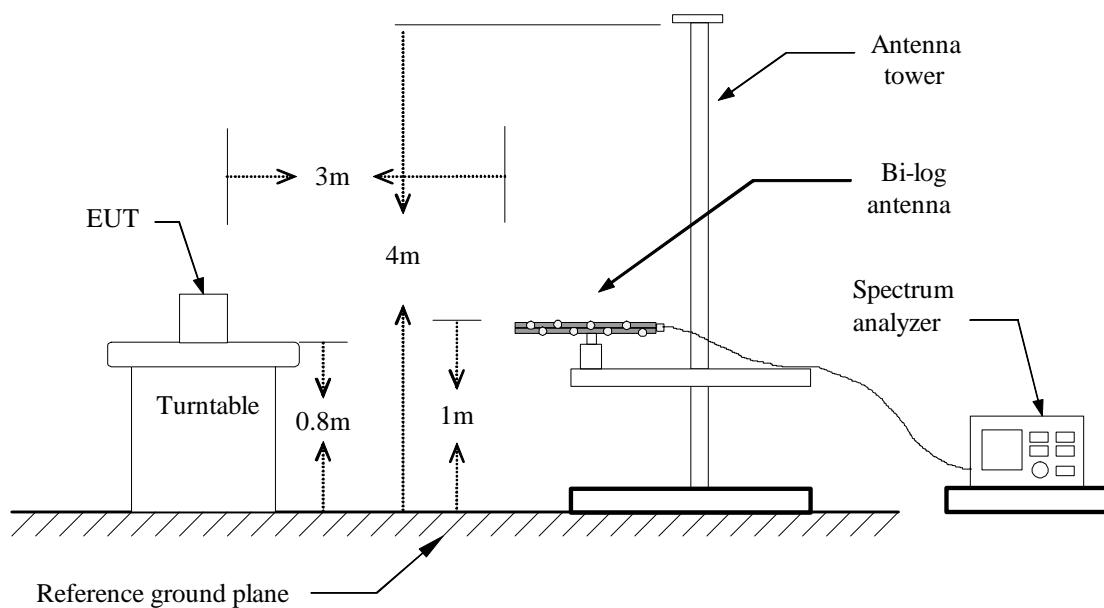

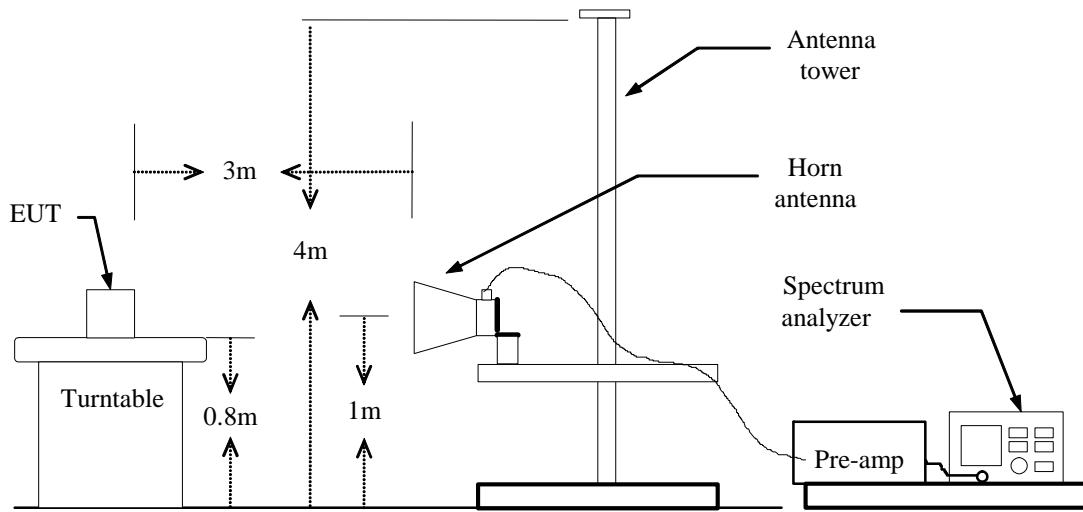**Above 1GHz:****5.1.3 Test Description**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
  - Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO
  - Above 1GHz : (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

### 5.1.4 Test Result

#### From 9 KHz to 30MHz:

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
N/A	H								>20
N/A	V								>20

-Note: No test data was detected in below 30MHz.

#### From 30MHz to 1GHz:

The following test mode(s) were scanned during the preliminary test:

Preliminary Radiated Emission Test				
Frequency Range Investigated		9KHz TO 26 GHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
Bluetooth Mode	2012-05-06	MTE/CLY/D12050544	1_(V, H)	<input checked="" type="checkbox"/>

#### Note:

The Bluetooth model was carried out for GFSK, Pi/4-DOPSK and 8-DPSK modulation types, 8-DPSK Low channel modulation type was the worst case condition, The test data was shown on the summary data page.


The test data was tested with two switching adapter, Their model names are ECF050070A1BU and KSAS006050070D5U.

## From 30MHz to 1GHz



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

## Radiated Emission Measurement

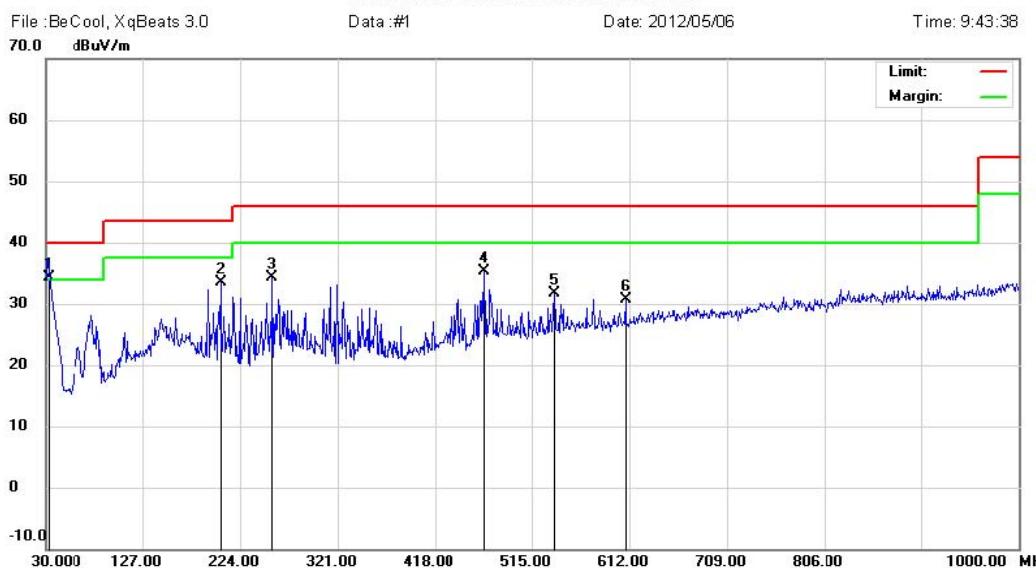

Site: site MOST 3M Polarization: **Vertical** Temperature: 26  
Limit: FCC Part15 B 3M Radiation Power: DC 5V By Adapter AC 120V/60Hz Humidity: 61 %  
EUT: Portable Bluetooth Speaker Distance:  
M/N: BeCool, XqBeats 3.0  
Mode: Bluetooth Playing  
Note: ECF050070A1BU

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	32.0240	11.00	23.24	34.24	40.00	-5.76	QP			
2		204.6000	16.27	17.17	33.44	43.50	-10.06	QP			
3		256.0100	16.95	17.44	34.39	46.00	-11.61	QP			
4		467.4700	14.20	21.07	35.27	46.00	-10.73	QP			
5		537.3099	9.43	22.22	31.65	46.00	-14.35	QP			
6		608.1200	7.47	23.20	30.67	46.00	-15.33	QP			


\*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

#### Radiated Emission Measurement

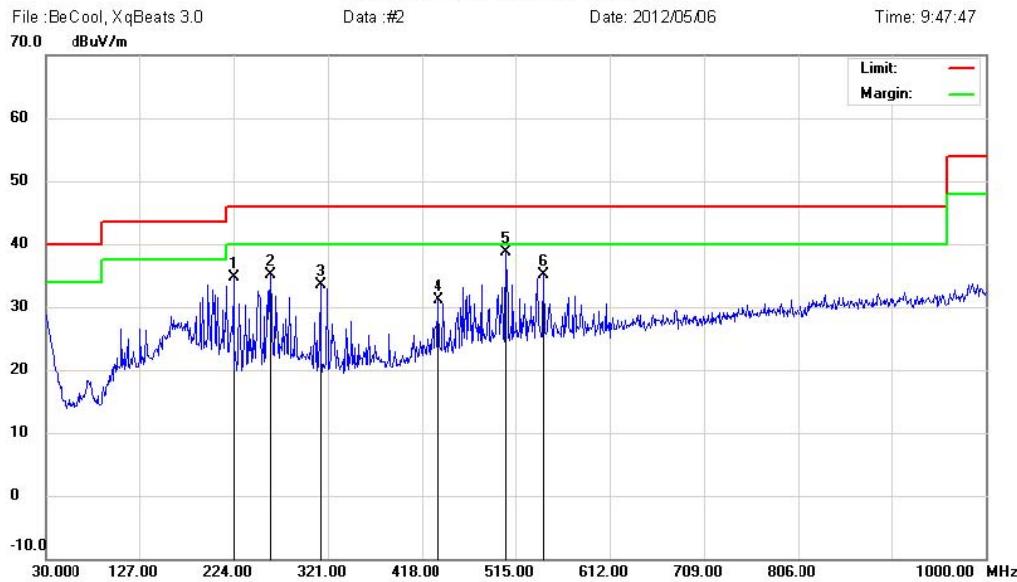

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dBuV/m	Over dB	Antenna Detector	Height cm	Table degree	Comment
			dBuV	dB	dBuV/m						
1		224.0000	18.40	16.38	34.78	46.00	-11.22	QP			
2		261.8300	17.22	17.84	35.06	46.00	-10.94	QP			
3		313.2400	16.78	16.73	33.51	46.00	-12.49	QP			
4		435.4600	10.69	20.34	31.03	46.00	-14.97	QP			
5	*	505.3000	17.29	21.41	38.70	46.00	-7.30	QP			
6		544.1000	12.80	22.28	35.08	46.00	-10.92	QP			

\*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong, China  
 Tel: 0755-86170306 Fax: 0755-86170310


### Radiated Emission Measurement

File: BeCool, XqBeats 3.0

Data: #11

Date: 2012/05/06

Time: 10:18:18

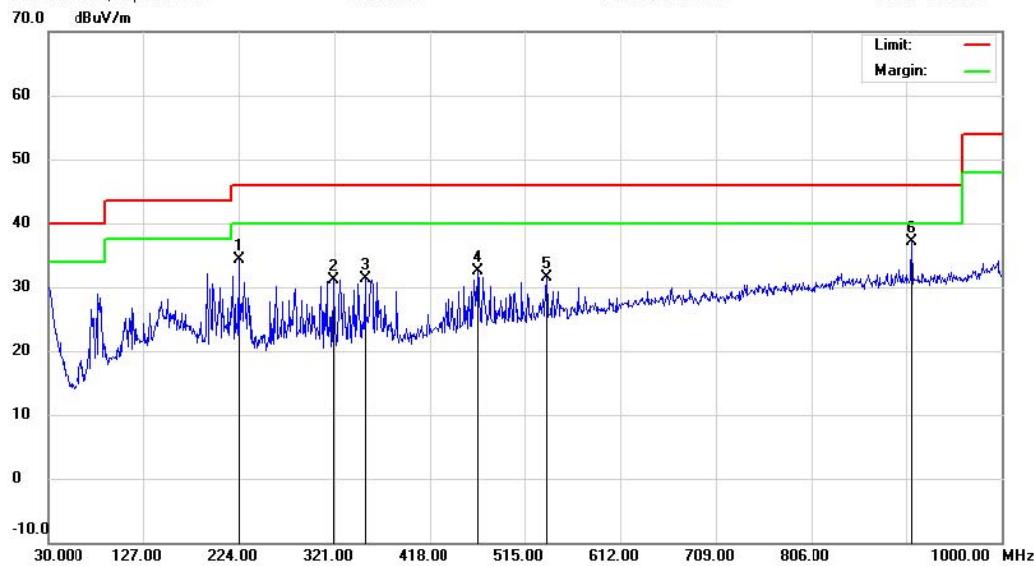

Site: site MOST 3M

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 5V By Adapter AC 120V/60Hz

Humidity: 61 %

EUT: Portable Bluetooth Speaker

Distance:

M/N: BeCool, XqBeats 3.0

Mode: Bluetooth Playing

Note: KSAS006050070D5U

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		224.0000	17.93	16.38	34.31	46.00	-11.69	QP		
2		320.0299	14.11	17.00	31.11	46.00	-14.89	QP		
3		352.0400	13.30	17.96	31.26	46.00	-14.74	QP		
4		467.4700	11.52	21.07	32.59	46.00	-13.41	QP		
5		537.3099	9.35	22.22	31.57	46.00	-14.43	QP		
6	*	908.8200	9.46	27.58	37.04	46.00	-8.96	QP		

\*:Maximum data x:Over limit !:over margin


Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong, China  
 Tel: 0755-86170306 Fax: 0755-86170310

### Radiated Emission Measurement

File: BeCool, XqBeats 3.0 Data: #12 Date: 2012/05/06 Time: 10:20:44

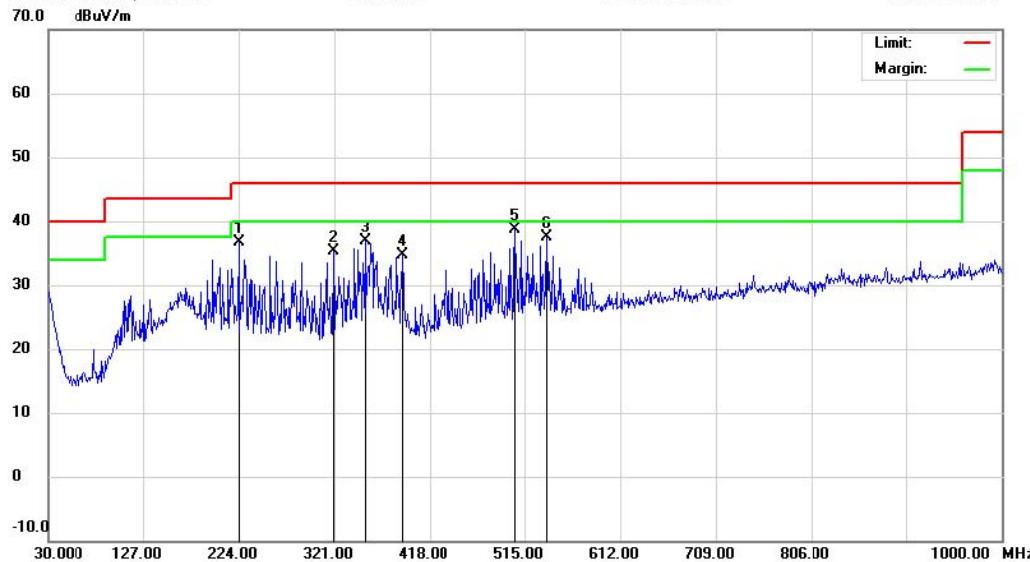

Site: site MOST 3M Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Part15 B 3M Radiation Power: DC 5V By Adapter AC 120V/60Hz Humidity: 61 %  
 EUT: Portable Bluetooth Speaker Distance:  
 M/N: BeCool, XqBeats 3.0  
 Mode: Bluetooth Playing  
 Note: KSAS006050070D5U

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		224.0000	20.42	16.38	36.80	46.00	-9.20	QP		
2		320.0299	18.36	17.00	35.36	46.00	-10.64	QP		
3		352.0400	18.96	17.96	36.92	46.00	-9.08	QP		
4		389.8700	16.33	18.30	34.63	46.00	-11.37	QP		
5	*	505.3000	17.23	21.41	38.64	46.00	-7.36	QP		
6		537.3099	15.26	22.22	37.48	46.00	-8.52	QP		

\*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky

**Above 1 GHz**

**Operation Mode:** GFSK Mode/CH Low      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2402.00	H	83.51	62.59	19.12	102.63	81.71	114.00	94.00	-12.29
<hr/>									
4804.00	H	47.52	25.18	23.51	71.03	48.69	74.00	54.00	-5.31
N/A									>20
<hr/>									
2402.00	V	82.39	63.48	19.12	101.51	82.60	114.00	94.00	-11.40
<hr/>									
4804.00	V	44.28	23.79	23.51	67.79	47.30	74.00	54.00	-6.70
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** GFSK Mode/CH Mid      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2441.00	H	84.29	63.17	19.16	103.45	82.33	114.00	94.00	-11.67
4882.00	H	43.78	22.39	24.08	68.17	46.47	74.00	54.00	-7.53
N/A									>20
2441.00	V	83.05	62.59	19.16	102.21	81.75	114.00	94.00	-12.25
4882.00	V	43.09	21.95	24.08	67.17	46.03	74.00	54.00	-7.97
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** GFSK Mode/CH High      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2480.00	H	82.05	61.52	19.26	101.31	80.78	114.00	94.00	-13.22
<hr/>									
4960.00	H	45.23	23.15	25.01	70.24	48.16	74.00	54.00	-5.84
N/A									>20
<hr/>									
2480.00	V	81.25	60.47	19.26	100.51	79.73	114.00	94.00	-14.27
<hr/>									
4960.00	V	44.15	22.63	25.01	69.16	47.64	74.00	54.00	-6.36
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** Pi/4-DQPSK Mode /CH Low      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2402.00	H	86.16	63.18	19.12	105.28	82.30	114.00	94.00	-11.70
<hr/>									
4804.00	H	47.29	26.49	23.51	70.80	50.00	74.00	54.00	-4.00
N/A									>20
<hr/>									
2402.00	V	85.48	64.18	19.12	105.60	83.30	114.00	94.00	-10.70
<hr/>									
4804.00	V	46.80	25.48	23.51	70.31	48.99	74.00	54.00	-5.01
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** Pi/4-DQPSK Mode /CH Mid      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2441.00	H	85.47	62.25	19.16	104.63	81.41	114.00	94.00	-12.59
4882.00	H	43.52	22.59	24.08	67.6	46.67	74.00	54.00	-7.33
N/A									>20
2441.00	V	84.27	63.18	19.16	103.43	82.34	114.00	94.00	-11.66
4882.00	V	42.59	21.46	24.08	66.67	45.54	74.00	54.00	-8.46
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** Pi/4-DQPSK Mode /CH High      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2480.00	H	87.46	66.18	19.26	106.72	85.44	114.00	94.00	-8.56
4960.00	H	46.82	25.48	25.01	71.73	50.49	74.00	54.00	-3.51
N/A									>20
2480.00	V	85.39	64.86	19.26	104.65	84.12	114.00	94.00	-9.88
4960.00	V	45.96	24.82	25.01	70.97	49.83	74.00	54.00	-4.17
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** 8-DPSK Mode /CH Low      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2402.00	H	88.26	67.54	19.12	107.38	87.66	114.00	94.00	-6.34
<hr/>									
4804.00	H	45.65	22.74	23.51	69.16	46.25	74.00	54.00	-7.75
N/A									>20
<hr/>									
2402.00	V	87.24	65.42	19.12	106.36	84.54	114.00	94.00	-9.46
<hr/>									
4804.00	V	46.58	24.96	23.51	70.09	48.47	74.00	54.00	-5.53
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** 8-DPSK Mode /CH Mid      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2441.00	H	88.21	58.41	19.16	107.37	77.57	114.00	94.00	-16.43
4882.00	H	47.26	21.48	24.08	71.34	45.56	74.00	54.00	-8.44
N/A									>20
2441.00	V	86.19	59.29	19.16	105.35	78.45	114.00	94.00	-15.55
4882.00	V	45.85	23.47	24.08	69.93	47.55	74.00	54.00	-6.45
N/A									>20

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** 8-DPSK Mode /CH High      **Test Date:** May 06, 2012  
**Temperature:** 20°C      **Tested by:** Sky Guo  
**Humidity:** 70 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2480.00	H	90.02	66.45	19.26	109.28	85.71	114.00	94.00	-8.29
4960.00	H	44.30	24.10	25.01	69.31	49.11	74.00	54.00	-4.89
N/A									>20
2480.00	V	90.08	64.31	19.26	109.34	84.57	114.00	94.00	-9.43
4960.00	V	43.25	22.16	25.01	68.26	47.17	74.00	54.00	-6.83
N/A									>20

**Notes:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

## 5.2 Band Edge

### 5.2.1 Requirement

According to FCC section 15.249(a), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


### 5.2.2 Test Description

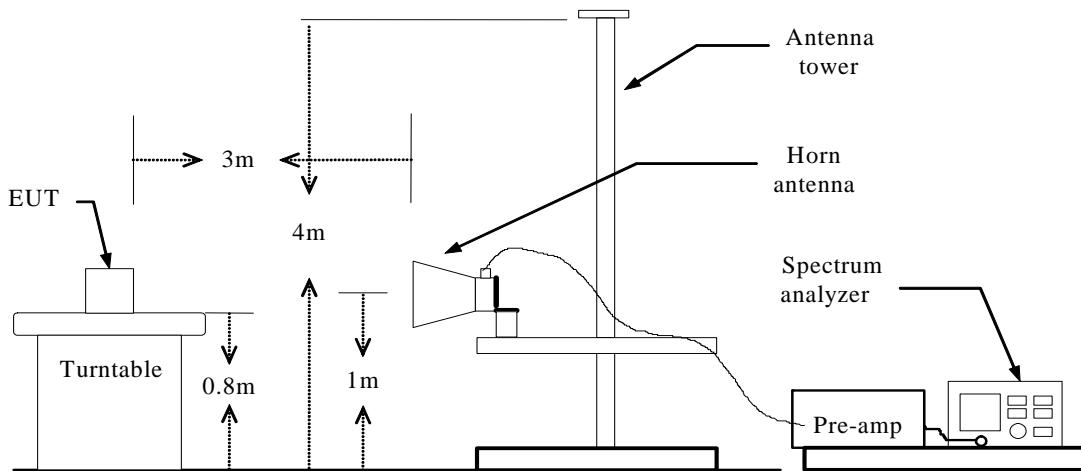


### 5.2.3 Test Result

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.


Test Mode		Channel Marked Frequency	Limit (dBuv/m)	Test Result Highest Emission (dBuv/m)			
				Vertical		Horizontal	
				Peak	Average	Peak	Average
Bluetooth	Low Channel	2390MHz	74(Peak) 54(Average)	59.25	37.81	59.79	35.47
		2400MHz		68.49	46.28	68.32	47.53
	High Channel	2483.5MHz		58.24	47.64	59.25	38.96
		2500MHz		58.58	47.52	59.55	37.45

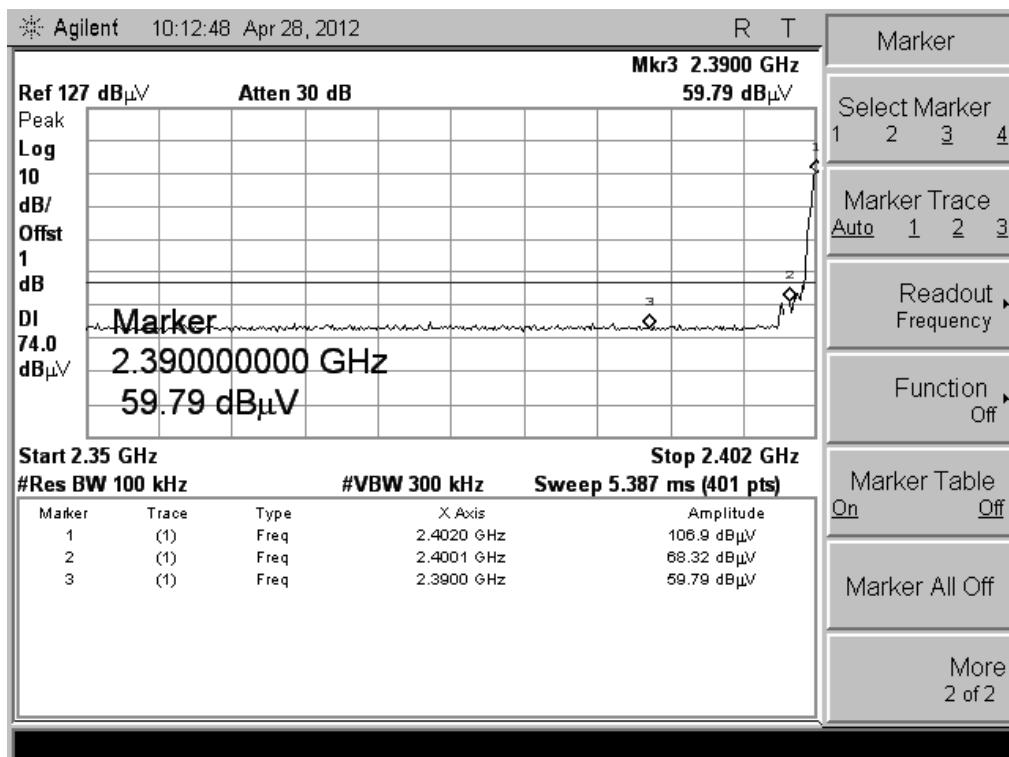**Test Plot:**


(CH Low, Horizontal, Peak)

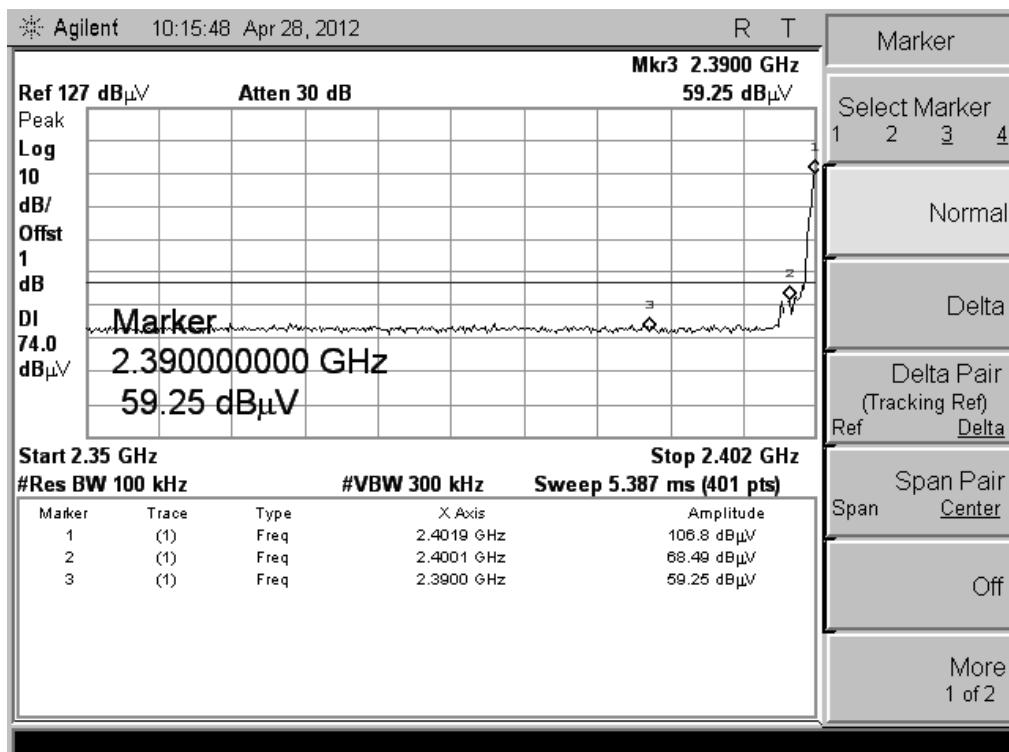

(CH Low, Vertical, Peak)

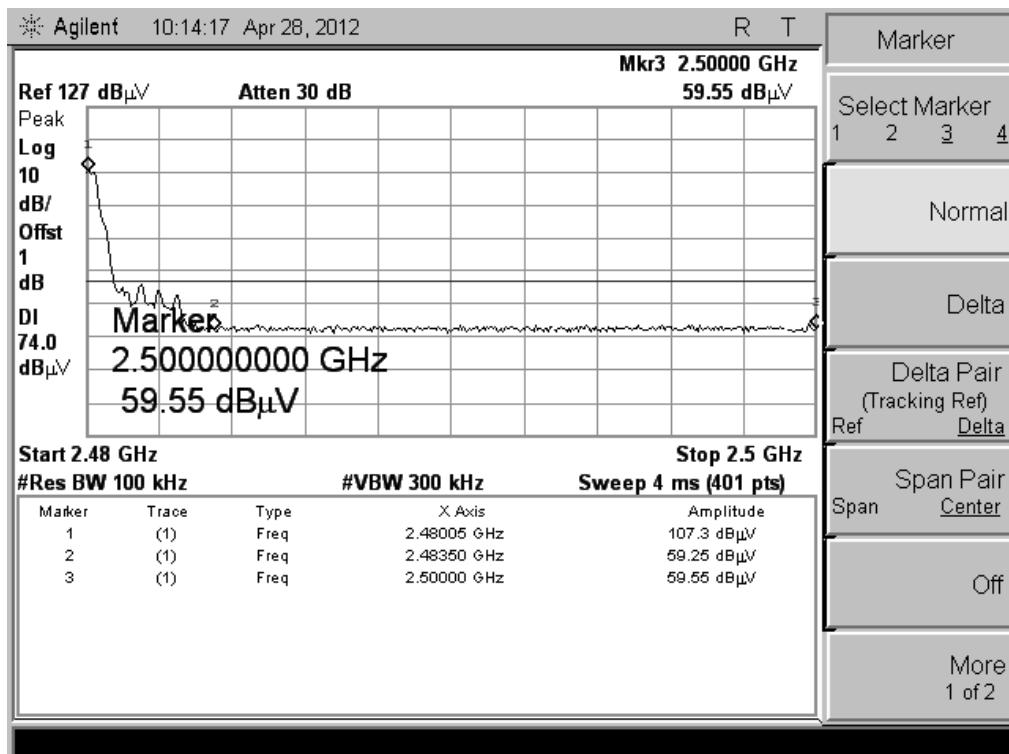

(CH High, Horizontal, Peak)

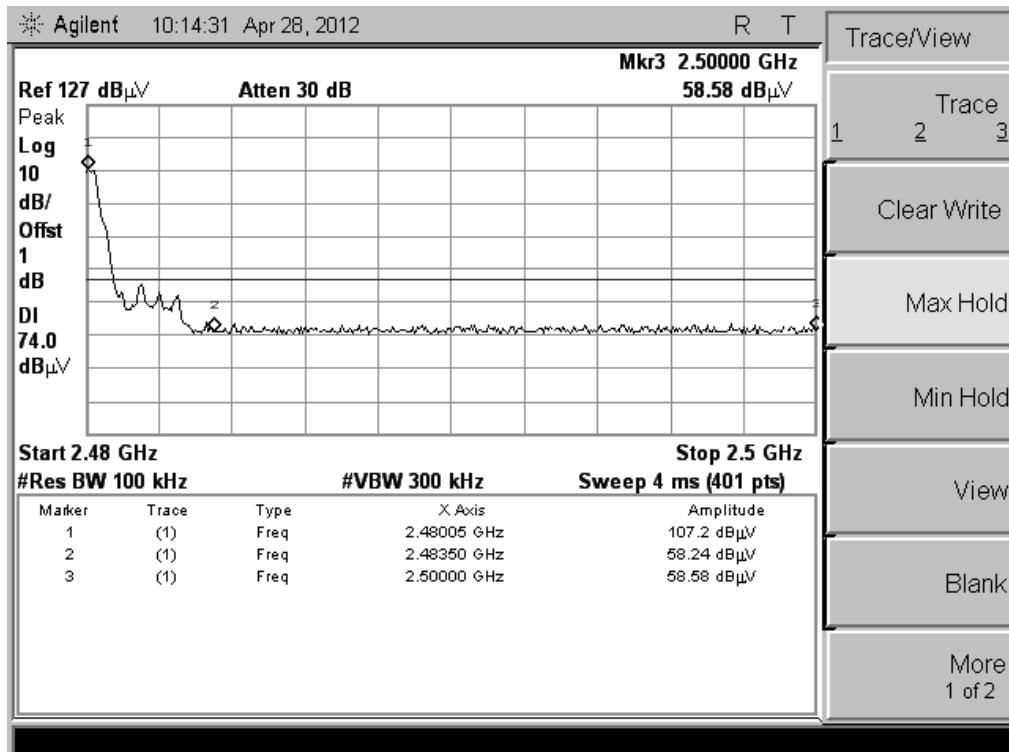

(CH High, Vertical, Peak)

## 5.3 LINE CONDUCTED EMISSION TEST


### 5.3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

**\*\*Note:** 1. the lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 5.3.2. BLOCK DIAGRAM OF TEST SETUP

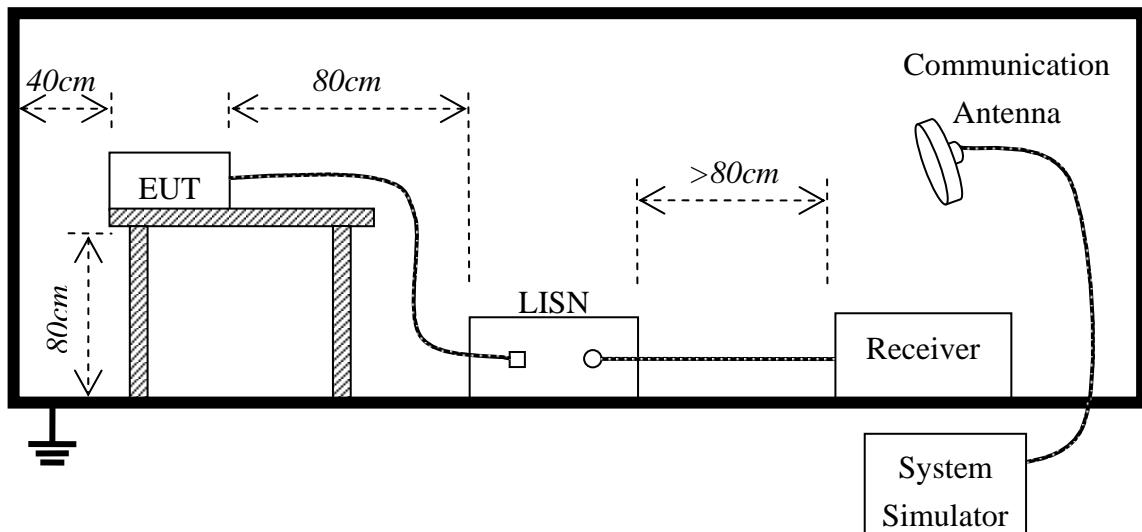

### 5.3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received DC 3.3V by Speker which received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.

### 5.3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

### 5.3.5. Test result

The following test mode(s) were scanned during the preliminary test:

Preliminary Conducted Emission Test				
Frequency Range Investigated		150KHz TO 30 MHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
Bluetooth Mode	2012-05-06	MTE/CLY/D12050544	1_(L, N)	<input checked="" type="checkbox"/>

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### Note:

The Bluetooth model was carried out for GFSK, Pi/4-DOPSK and 8-DPSK modulation types, 8-DPSK Low channel modulation type was the worst case condition, The test data was shown on the summary data page.


The test data was tested with two switching adapter, Their model names are ECF050070A1BU and KSAS006050070D5U.

### 5.3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

#### Conducted Emission Measurement

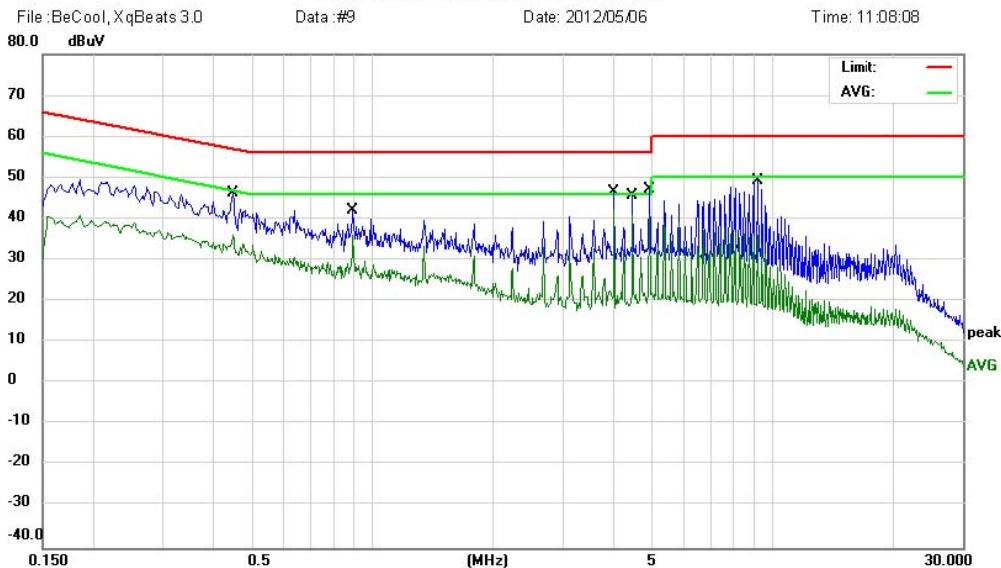

Site: site MOST 3M

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 5V By Adapter AC 120V/60Hz

Humidity: 60 %

EUT: Portable Bluetooth Speaker

M/N: BeCool, XqBeats 3.0

Mode: Bluetooth Playing

Note: ECF0500070A1BU

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4500	35.93	10.33	46.26	56.87	-10.61	QP	
2		0.4500	25.84	10.33	36.17	46.87	-10.70	AVG	
3		0.8980	32.01	10.00	42.01	56.00	-13.99	QP	
4		0.8980	26.02	10.00	36.02	46.00	-9.98	AVG	
5		4.0380	35.46	11.04	46.50	56.00	-9.50	QP	
6	*	4.0380	31.18	11.04	42.22	46.00	-3.78	AVG	
7		4.4899	34.22	11.49	45.71	56.00	-10.29	QP	
8		4.4899	29.29	11.49	40.78	46.00	-5.22	AVG	
9		4.9380	35.32	11.94	47.26	56.00	-8.74	QP	
10		4.9380	28.63	11.94	40.57	46.00	-5.43	AVG	
11		9.2018	39.79	9.48	49.27	60.00	-10.73	QP	
12		9.2018	26.65	9.48	36.13	50.00	-13.87	AVG	


\*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

#### Conducted Emission Measurement

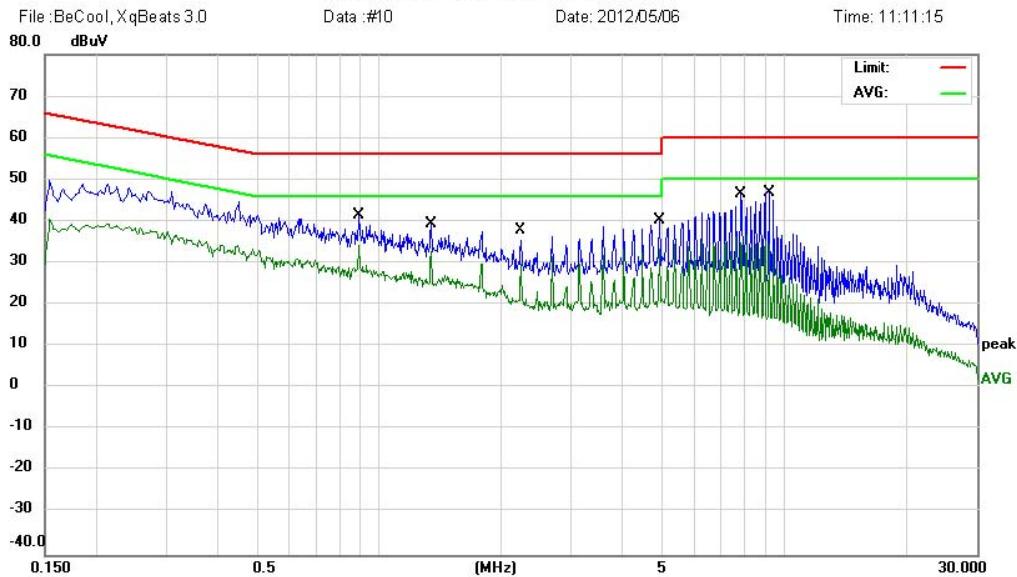

Site: site MOST 3M Phase: **L1** Temperature: 26  
 Limit: FCC Part15 B Class B QP Power: DC 5V By Adapter AC 120V/60Hz Humidity: 60 %  
 EUT: Portable Bluetooth Speaker  
 M/N: BeCool, XqBeats 3.0  
 Mode: Bluetooth Playing  
 Note: ECF0500070A1BU

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.8980	31.36	10.00	41.36	56.00	-14.64	QP	
2	*	0.8980	24.20	10.00	34.20	46.00	-11.80	AVG	
3		1.3460	29.65	9.65	39.30	56.00	-16.70	QP	
4		1.3460	23.17	9.65	32.82	46.00	-13.18	AVG	
5		2.2459	28.75	9.25	38.00	56.00	-18.00	QP	
6		2.2459	23.12	9.25	32.37	46.00	-13.63	AVG	
7		4.9340	28.23	11.93	40.16	56.00	-15.84	QP	
8		4.9340	21.30	11.93	33.23	46.00	-12.77	AVG	
9		7.8500	36.35	10.29	46.64	60.00	-13.36	QP	
10		7.8500	24.60	10.29	34.89	50.00	-15.11	AVG	
11		9.1980	37.36	9.48	46.84	60.00	-13.16	QP	
12		9.1980	25.15	9.48	34.63	50.00	-15.37	AVG	


\*:Maximum data    x:Over limit    !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

#### Conducted Emission Measurement

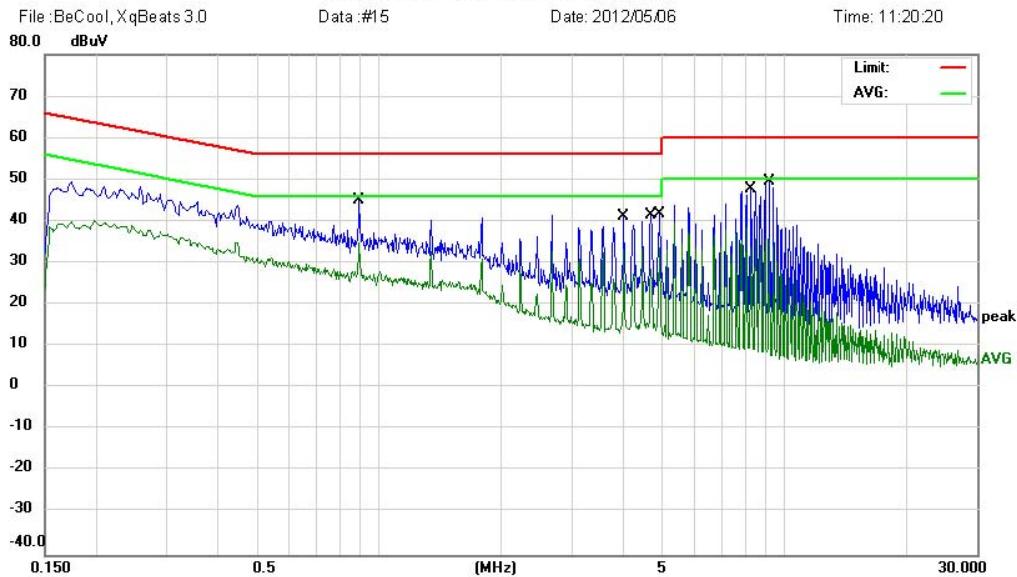

Site: site MOST 3M Phase: **N** Temperature: 26  
 Limit: FCC Part15 B Class B QP Power: DC 5V By Adapter AC 120V/60Hz Humidity: 60 %  
 EUT: Portable Bluetooth Speaker  
 M/N: BeCool, XqBeats 3.0  
 Mode: Bluetooth Playing  
 Note: KSAS006050070D5U

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.8980	35.03	10.00	45.03	56.00	-10.97	QP	
2		0.8980	24.92	10.00	34.92	46.00	-11.08	AVG	
3		4.0339	30.21	11.03	41.24	56.00	-14.76	QP	
4		4.0339	22.43	11.03	33.46	46.00	-12.54	AVG	
5		4.7139	29.86	11.71	41.57	56.00	-14.43	QP	
6		4.7139	16.70	11.71	28.41	46.00	-17.59	AVG	
7		4.9299	29.67	11.93	41.60	56.00	-14.40	QP	
8		4.9299	21.84	11.93	33.77	46.00	-12.23	AVG	
9		8.2939	37.59	10.02	47.61	60.00	-12.39	QP	
10		8.2939	23.78	10.02	33.80	50.00	-16.20	AVG	
11	*	9.1939	40.01	9.48	49.49	60.00	-10.51	QP	
12		9.1939	26.34	9.48	35.82	50.00	-14.18	AVG	


\*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

#### Conducted Emission Measurement

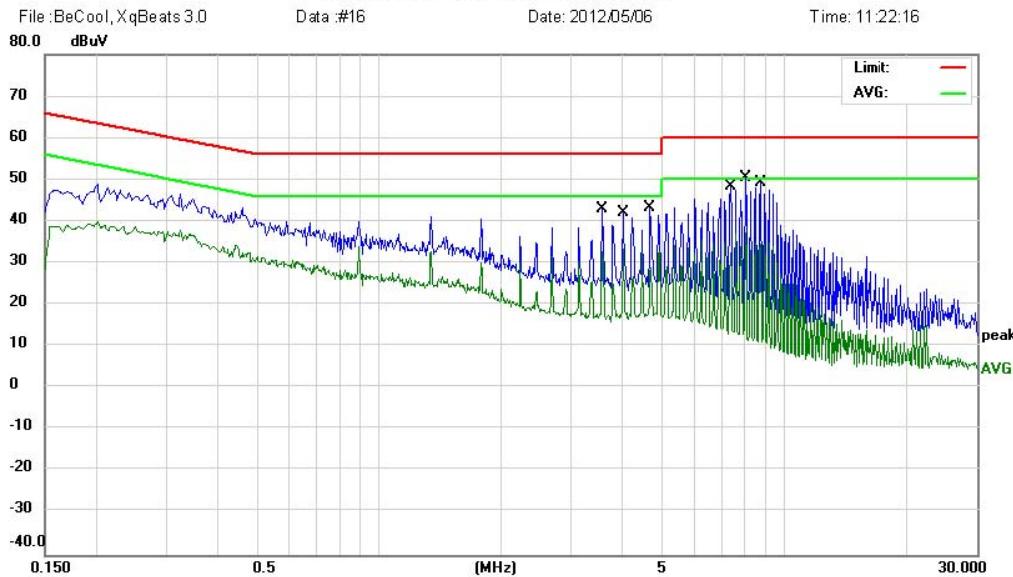

Site: site MOST 3M      Phase: **L1**      Temperature: 26  
 Limit: FCC Part15 B Class B QP      Power: DC 5V By Adapter AC 120V/60Hz      Humidity: 60 %  
 EUT: Portable Bluetooth Speaker  
 M/N: BeCool, XqBeats 3.0  
 Mode: Bluetooth Playing  
 Note: KSAS006050070D5U

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		3.5820	32.48	10.58	43.06	56.00	-12.94	QP
2		3.5820	22.06	10.58	32.64	46.00	-13.36	AVG
3		4.0300	31.15	11.03	42.18	56.00	-13.82	QP
4		4.0300	22.26	11.03	33.29	46.00	-12.71	AVG
5		4.6898	31.51	11.69	43.20	56.00	-12.80	QP
6		4.6898	17.12	11.69	28.81	46.00	-17.19	AVG
7		7.3899	37.73	10.57	48.30	60.00	-11.70	QP
8		7.3899	21.95	10.57	32.52	50.00	-17.48	AVG
9	*	8.0619	40.34	10.16	50.50	60.00	-9.50	QP
10		8.0619	26.96	10.16	37.12	50.00	-12.88	AVG
11		8.7339	39.35	9.76	49.11	60.00	-10.89	QP
12		8.7339	24.71	9.76	34.47	50.00	-15.53	AVG

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature: Sky


## 5.4 20 dB Bandwidth

### 5.4.1 Definition

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in sub-part E of this part, must be designed to ensure that the 20 dB Bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific Rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### 5.4.2 Block Diagram Of Test Setup



The EUT is powered by the Battery, is coupled to the Spectrum Analyzer (SA) through the Attenuator/DC Block. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power. The RF load attached to the EUT antenna terminal is 50Ω.

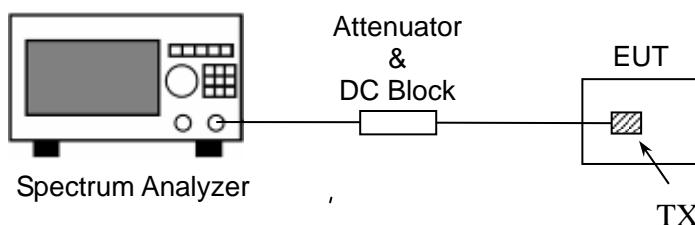

### 5.4.3 Test Result


#### GFSK Modulation test result:

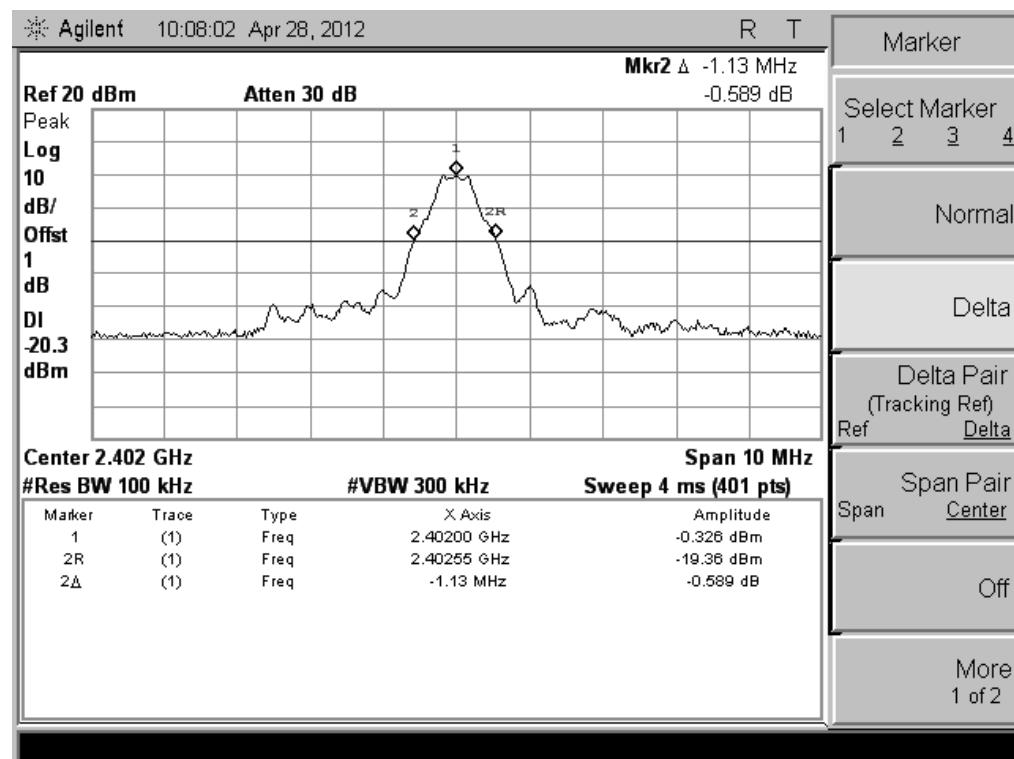

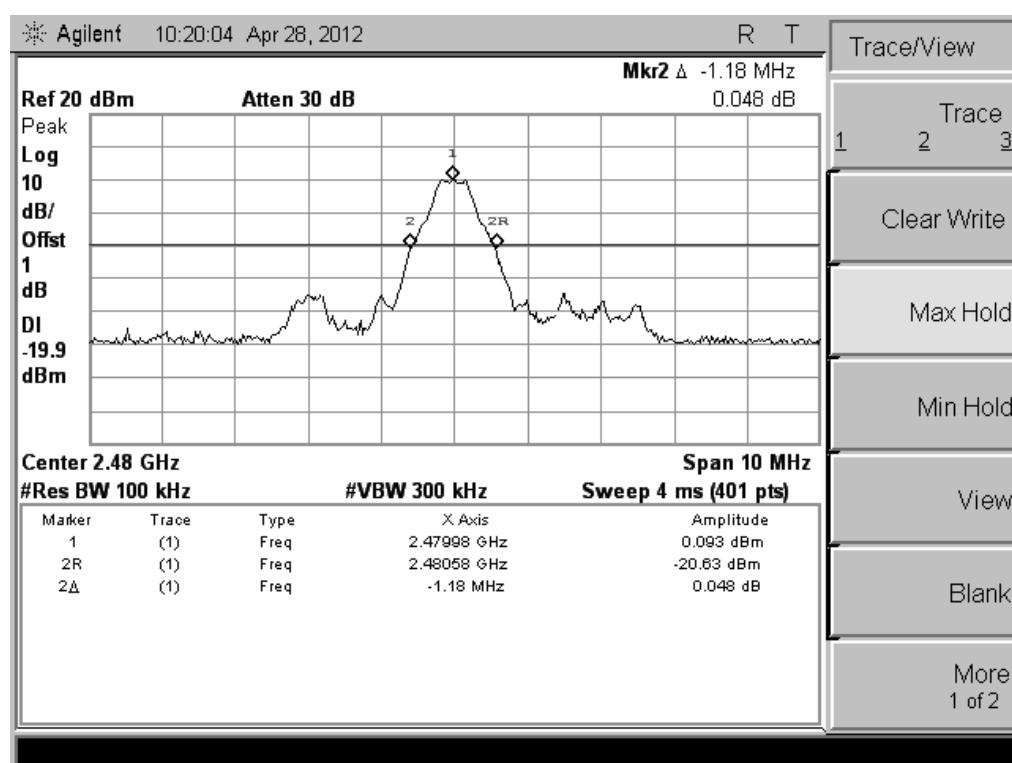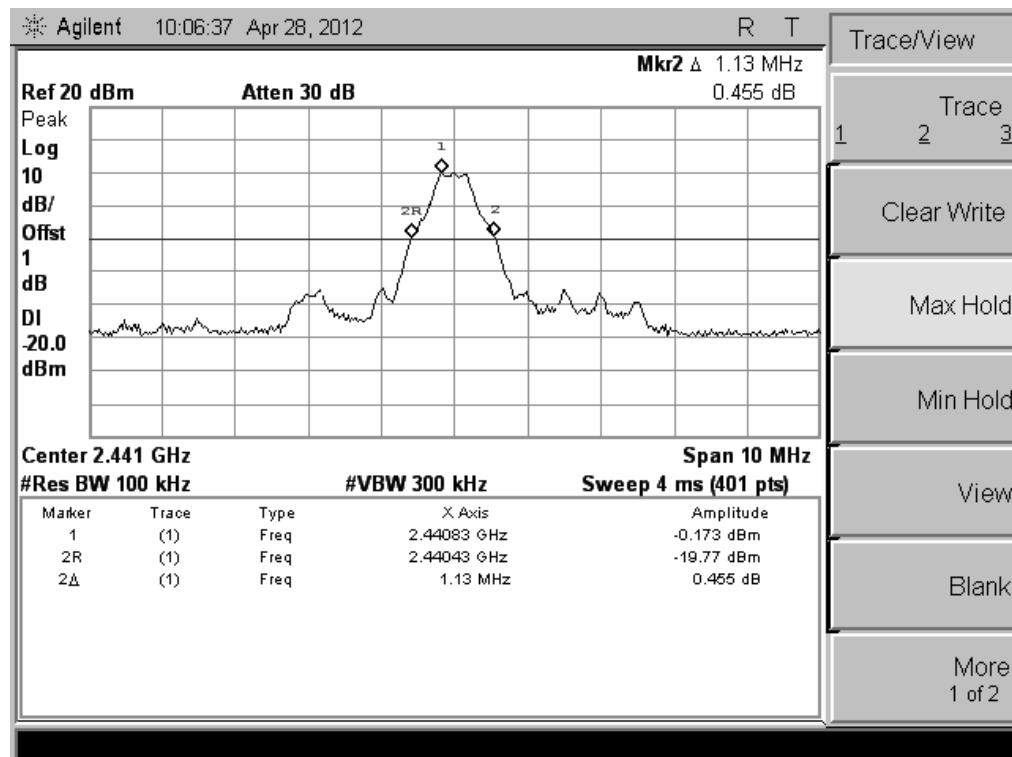


CH High


## 8-DPSK Modulation test result:

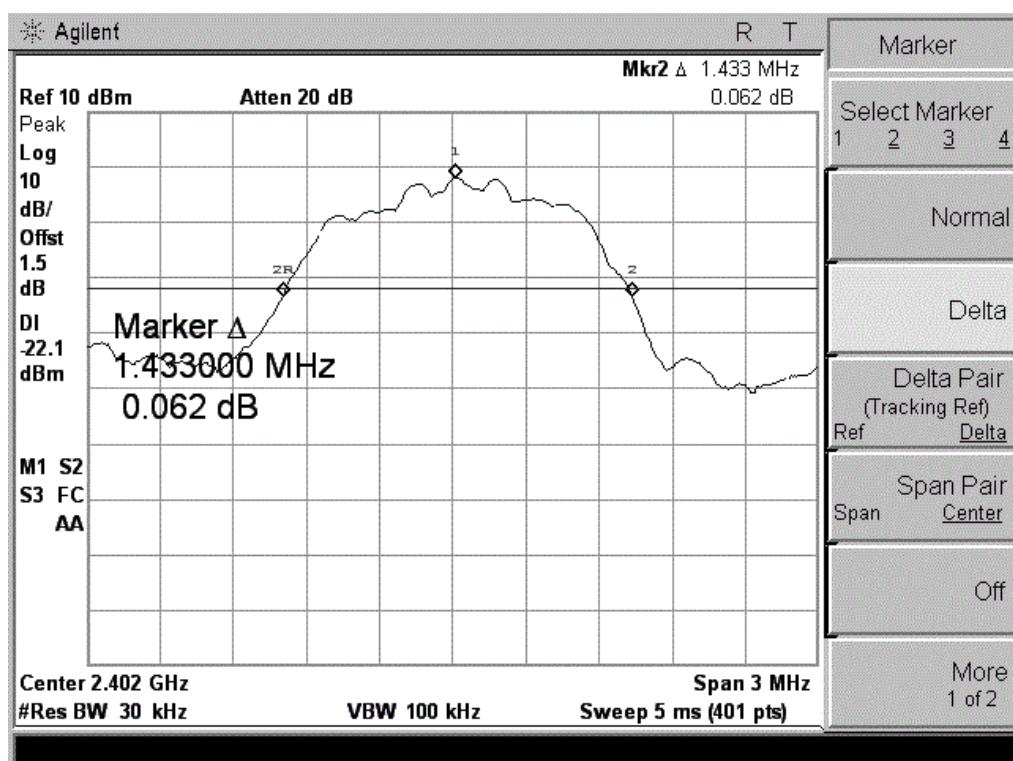

CH Low

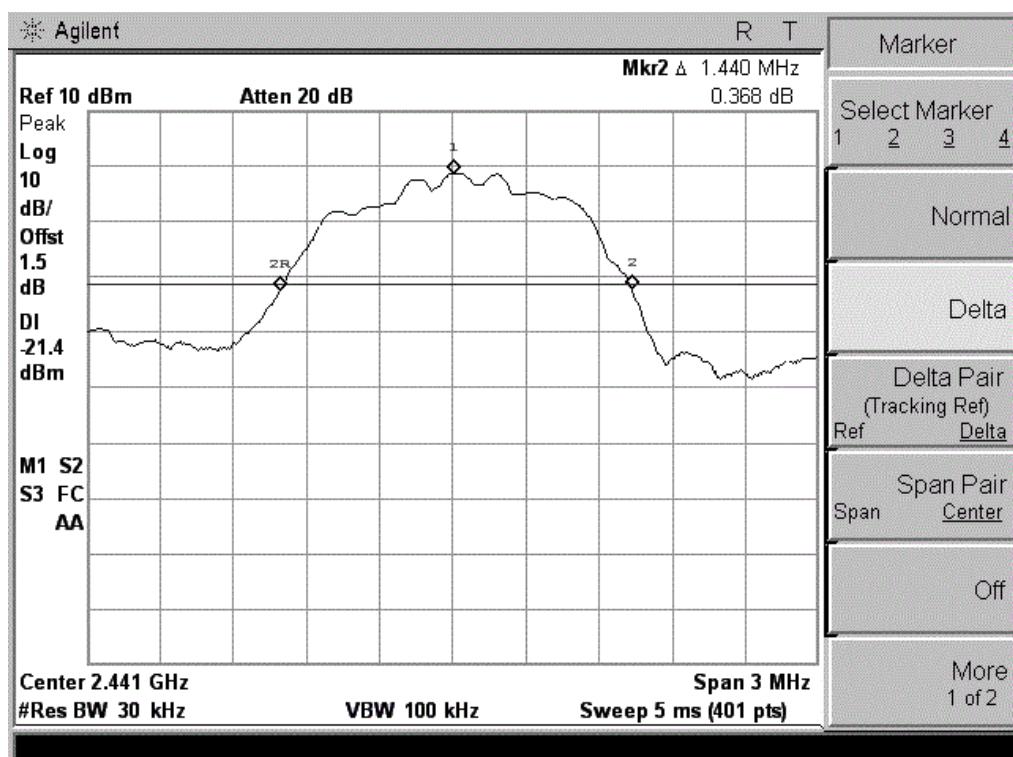

CH Mid

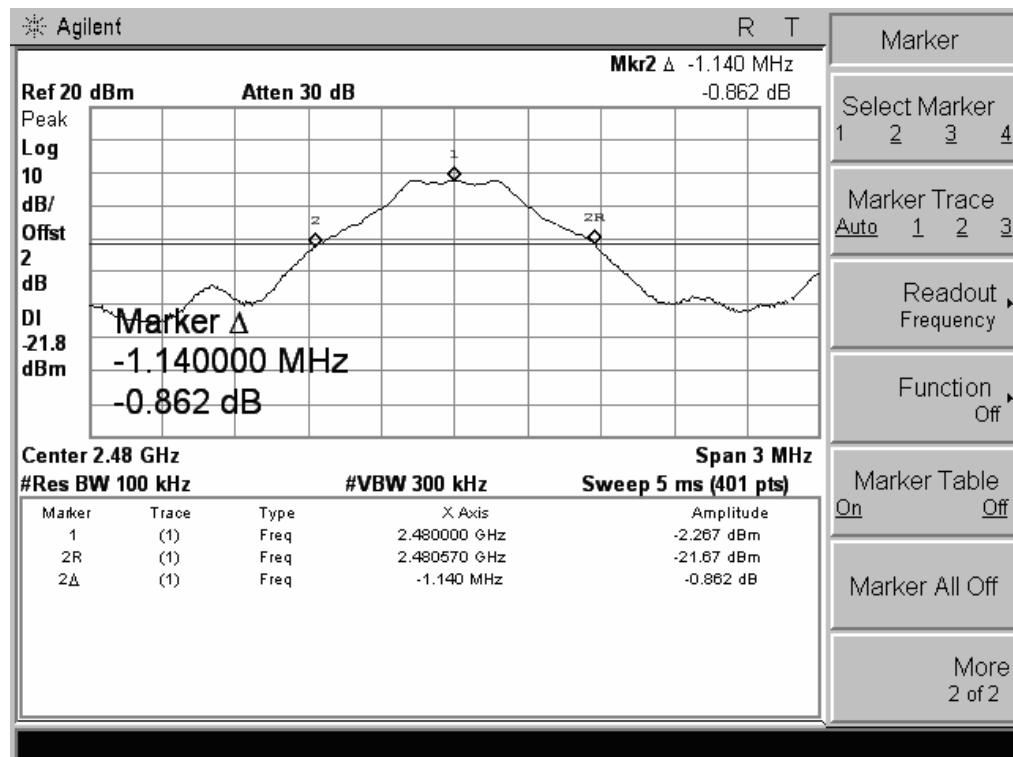

CH High

**APPENDIX 1**  
**PHOTOGRAPHS OF TEST SETUP**

CONDUCTED TEST SETUP



-----END OF REPORT-----