



849 NW STATE ROAD 45  
 NEWBERRY, FL 32669 USA  
 PH: 888.472.2424 OR 352.472.5500  
 FAX: 352.472.2030  
 EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 15.235 TEST REPORT

### LOW POWER UNLICENSED TRANSMITTER

Applicant	DICKIE-SPIELZEUG GmbH & CO KG
Address	WERKSTRASSE 1 D-90765 FUERTH D-90765 GERMANY
FCC ID	NLB49020TX
Product Description	49 MHZ REMOTE CONTROL TRANSMITTER
Date Sample Received	1/29/2008
Date Tested	2/5/2008
Tested By	JOSEPH SCOGLIO
Approved By	MARIO DE ARANZETA
Timco Report No.	237UT8TestReport.doc
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
 FCC ID: NLB49020TX  
 REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## TABLE OF CONTENTS

GENERAL REMARKS .....	4
REPORT SUMMARY .....	5
TEST ENVIRONMENT.....	5
TEST SETUP .....	5
DUT SPECIFICATION .....	6
TEST EQUIPMENT LIST .....	7
TEST PROCEDURES .....	8
RADIATION INTERFERENCE.....	9
OCCUPIED BANDWIDTH.....	10

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, Fl 32669



### Authorized Signatory Name:

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** 2/7/2008

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.235, ANSI C63.4: 2003

### Receiver

The receiver portion of this system has been tested and meets all of the FCC requirements per FCC rules Part 15.109. A report was issued and a copy of this report is available upon request.

## TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

## TEST SETUP

Test Exercise (e.g software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control.

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## DUT SPECIFICATION

Applicant	DICKIE-SPIELZEUG GmbH & CO KG		
Description	49 MHZ REMOTE CONTROL TRANSMITTER		
FCC ID	NLB49020TX		
Frequency Range	49.86-49.86 MHz		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively 3 volts		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
 FCC ID: NLB49020TX  
 REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 7/18/07	7/18/09
Analyzer Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 5/17/07	5/17/09
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 5/17/07	5/17/09
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 5/17/07	5/17/09
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 7/23/07	7/23/09
Antenna: Log- Periodic	Eaton	96005	1243	CAL 12/13/07	12/13/09

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
 FCC ID: NLB49020TX  
 REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## TEST PROCEDURES

**Spurious Emissions:** The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the following plot was generated. The vertical scale is set to 10 dB per division.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dBuV	ACF dB/m	Cable Loss dB	Field Strength dBuV/m @ 3 m
33	20	+10.36	+1.2	= 31.56

**ANSI C63.4-2003 Measurement:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\DICKIE\237UT8\237UT8TestReport.doc

## RADIATION INTERFERENCE

Rules Part No.: 15.235

### Requirements:

Frequency MHz	Limits
Fundamental Frequency	80.0 dB $\mu$ V/m measured @ 3 meters
30 – 88	40.0 dB $\mu$ V/m measured @ 3 meters
80 – 216	43.5 dB $\mu$ V/m measured @ 3 meters
216 – 960	46.0 dB $\mu$ V/m measured @ 3 meters
Above 960	54.0 dB $\mu$ V/m measured @ 3 meters

### Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
49.8	49.80	46.5	H	0.97	11.55	59.02	20.98
49.8	49.80	61.1	V	0.97	10.64	72.71	7.29
49.8	99.70	11.4	H	1.40	10.69	23.49	20.01
49.8	99.70	12.6	V	1.40	11.29	25.29	18.21
49.8	149.50	5.0	V	1.75	17.13	23.88	19.62
49.8	249.30	6.4	V	2.35	12.66	21.41	24.59
49.8	299.10	10.1	V	2.60	14.65	27.35	18.65
49.8	349.00	11.8	V	2.85	14.69	29.34	16.67
49.8	398.80	7.7	V	3.09	15.55	26.34	19.66
49.8	448.70	5.6	V	3.29	17.58	26.47	19.53

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\DICKIE\237UT8\237UT8TestReport.doc




# OCCUPIED BANDWIDTH

Rules Part No.: 15.235

**Requirements:** The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the un-modulated carrier or to the general limits of 15.209, whichever permits the higher emission levels.

**Test Data:** Please refer to the following plot.

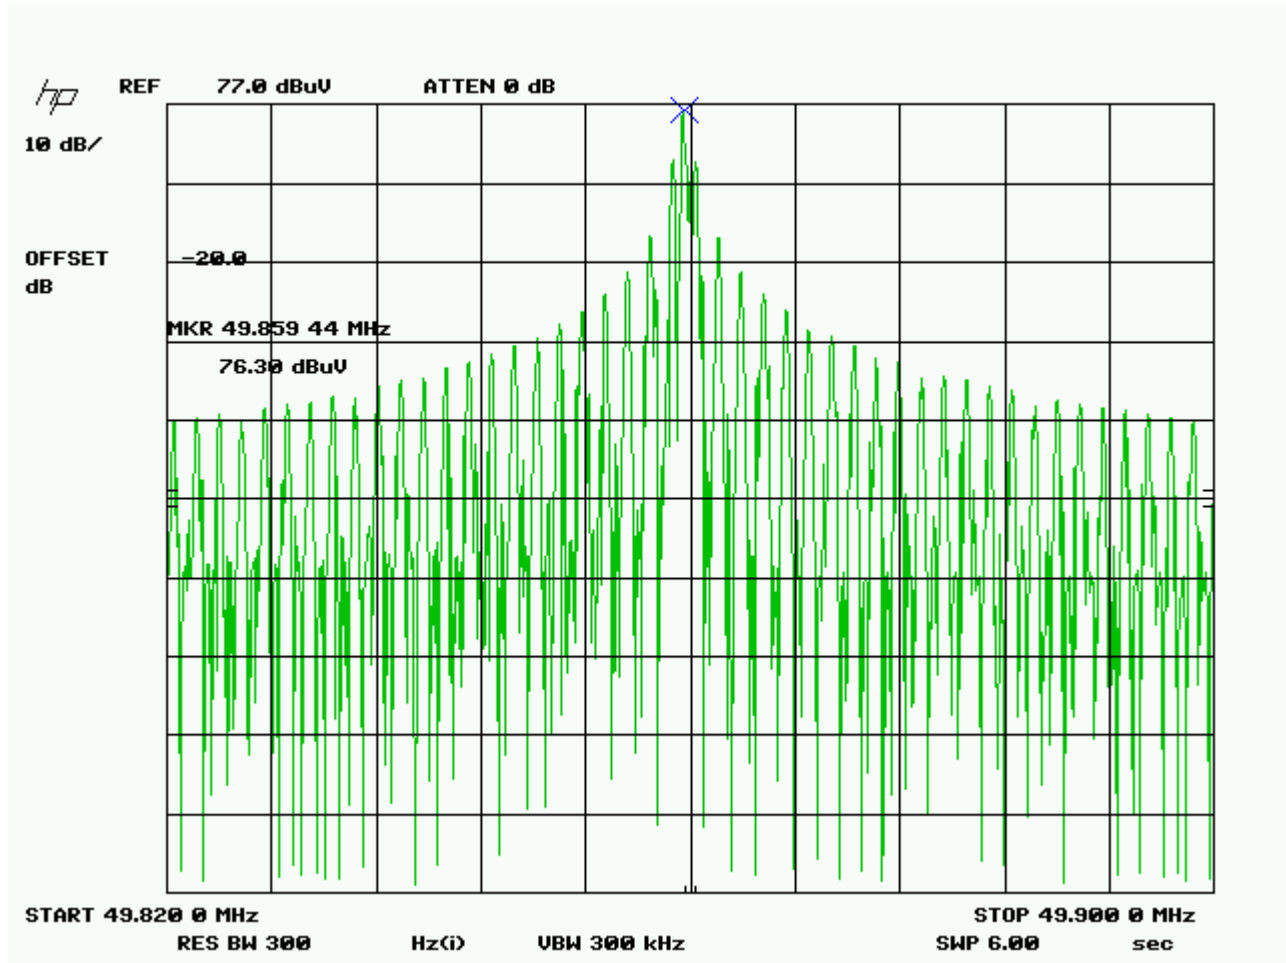

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB49020TX  
REPORT: D\ \DICKIE\237UT8\237UT8TestReport.doc