

FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : Bluetooth USB Dongle
FCC ID. : NLF-GUBTCR42
FILING TYPE : Certification
BRAND NAME : BILLIONTON
MODEL NAME : GUBTCR42, GUBTCR42A, GUBTCR42S, GUBTCR42T,
GUBTCR42U, GUBTCR42V, GUBTCR42X
APPLICANT : **BILLIONTON SYSTEMS INC.**
No. 21, Sui-Lih Rd., Hsin-Chu, 300, Taiwan
MANUFACTURER : **Same as the Applicant**

ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by NVLAP and any agency of U.S. government.

The test equipments used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.



Lab Code: 200079-0

Table of Contents

HISTORY OF THIS TEST REPORT	II
CERTIFICATE OF COMPLIANCE.....	III
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Table for Carrier Frequencies	2
1.6. Multiple List	3
2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST	5
2.1. Connection Diagram of Test System	5
2.2. The Test Mode Description	5
2.3. Description of Test Supporting Units	5
3. GENERAL INFORMATION OF TEST	6
3.1. Test Facility	6
3.2. Standards for Methods of Measurement.....	6
3.3. Frequency Range Investigated	6
3.4. Test Distance	6
3.5. Test Software.....	6
4. LIST OF MEASUREMENTS	7
4.1. Summary of the Test Results.....	7
5. TEST RESULT	8
5.1. Test of Hopping Channel Bandwidth	8
5.2. Test of Hopping Channel Separation.....	11
5.3. Test of Number of Hopping Frequency.....	14
5.4. Test of Test of Dwell Time of Each Frequency.....	16
5.5. Maximum Peak Output Power	23
5.6. Test of Band Edges Emission.....	24
5.7. Test of AC Power Line Conducted Emission	28
5.8. Test of Spurious Radiated Emission.....	32
5.9. Antenna Requirements	43
5.10. RF Exposure.....	44
6. LIST OF MEASURING EQUIPMENTS USED	46
7. COMPANY PROFILE.....	48
7.1. Certificate of Accreditation	48
7.2. Test Location	48
8. CERTIFICATE OF NVLAP ACCREDITATION.....	49
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A3



HISTORY OF THIS TEST REPORT

Received Date: Jul. 25, 2005

Test Date: Aug. 4, 2005

Original Report Issue Date: Aug. 19, 2005

Report No.: FR572513

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C

PRODUCT NAME : Bluetooth USB Dongle

BRAND NAME : BILLIONTON

MODEL NAME : GUBTCR42, GUBTCR42A, GUBTCR42S, GUBTCR42T,
GUBTCR42U, GUBTCR42V, GUBTCR42X

APPLICANT : BILLIONTON SYSTEMS INC.

No. 21, Sui-Lih Rd., Hsin-Chu, 300, Taiwan

MANUFACTURER : Same as the Applicant

I HEREBY CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4-2003 and all test are performed according to 47 CFR FCC Part 15 Subpart C. Testing was carried out on Aug. 4, 2005 at SPORTON International Inc. LAB.



Wayne Hsu / Supervisor
Sporton International Inc.

1. General Description of Equipment under Test

1.1. Applicant

BILLIONTON SYSTEMS INC.

No. 21, Sui-Lih Rd., Hsin-Chu, 300, Taiwan

1.2. Manufacturer

Same as the Applicant

1.3. Basic Description of Equipment under Test

This product is a USB Class 2 Bluetooth Dongle. The technical data has been listed on section "Features of Equipment under Test".

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	GFSK
Number of Channels	79
Frequency Band	2400 MHz ~ 2483.5 MHz
Carrier Frequency	See section 1.5 for details
Max. Conducted Peak Power	3.63 dBm
Antenna Type	Chip Antenna / 2.00dBi
Power Source	5.00V DC from host equipment
Temperature Range (Operating)	0 ~ 55 °C

1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	20	2422 MHz	40	2442 MHz	60	2462 MHz
01	2403 MHz	21	2423 MHz	41	2443 MHz	61	2463 MHz
02	2404 MHz	22	2424 MHz	42	2444 MHz	62	2464 MHz
03	2405 MHz	23	2425 MHz	43	2445 MHz	63	2465 MHz
04	2406 MHz	24	2426 MHz	44	2446 MHz	64	2466 MHz
05	2407 MHz	25	2427 MHz	45	2447 MHz	65	2467 MHz
06	2408 MHz	26	2428 MHz	46	2448 MHz	66	2468 MHz
07	2409 MHz	27	2429 MHz	47	2449 MHz	67	2469 MHz
08	2410 MHz	28	2430 MHz	48	2450 MHz	68	2470 MHz
09	2411 MHz	29	2431 MHz	49	2451 MHz	69	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

1.6. Multiple List


Company Name	Address	Model No.	Brand Name
Anubis	Am Langfeld 38 66130 Saarbrücken, Germany	GUBTCR41-N-AN	Typhoon
Medion	Am Zehnthof 77 D-45127 Essen, Germany	GUBTCR41-N-MD	Medion
SITECOM	Lichtenauerlaan 222 3062 ME Rotterdam, The Netherlands	GUBTCR41-N-SC	SITECOM
VIVANCO	Ewige Weide 15 22926 Ahrensburg, Germany	GUBTCR41-N-VV	VIVANCO
HAMA	Dresdner Strabe 9 86653 Monheim, Germany	GUBTCR41-N-HM	HAMA
CARECA	Via Borsellino 14-42010 Arceto (Reggio Emilia), Italy	GUBTCR41-N-HA	HAMLET
ANYCOM	Broichmühlenweg 42 DE-41066 Monchengladbach, Germany	GUBTCR41-N-AY	ANYCOM
2L INTERNATIONAL BV	DATABANKWEG 7-3821 AL AMERSFOORT, PO BOX 150-3800 AD AMERSFOORT, NE	GUBTCR41-N-2L2,	Conceptronic
ASBISC ENTERPRISES LIMITED	63 KOLONAKIOU STREET, CY-4013 LIMASSOL, CYPRUS 4013 CYPRUS	GUBTCR41-N-CYT,	Canyon
BANDBRIDGE EUROPE N.V.	BANDBRIDGE INT'L ASIA R602,6F EMPRES 17-19, CHATHAM RD SOUTH KOWLOON HK	GUBTCR41-N-BB,	Bandridge
DATAMATIC S.P.A.	VIA AGORDAT, 34 MILANO MI 20124 ITALY	GUBTCR41-N-DM,	Mediacom
CityCom Corp.	3F, NO. 532, SEC.2, JHONGSHAN RD., JHONGHE CITY, TAIPEI HSIEN, TAIWAN, R.O.C.	GUBTCR41-N-CTC,	Cubix
Ting Immediately Ind Co., LTD.	NO25 Lane80 Ta Hsin Rd., Tan Tzu Hsiang Taichung Hsien. Taiwan, R.O.C.	GUBTCR41-N-TL,	Tinlex
MDB TE-GROUP	EDWARD GAERTSSTRAAT 39-2180 EKEREN, BELGIUM	GUBTCR41-N-MDB,	Mr Handsfree



DSG Retail Ltd.	Dixons House, 200 The Campus Maylands Avenue, Hemel Hempstead, Hertfordshire, HP2 71G, United Kingdom	GUBTCR41 –N-DX	Dixons
CABLES DIRECT LIMITED	UNIT C HEAGE RD., INDUSTRIAL ESTATE, HEAGE RD RIPLEY,DERBYSHIRE DE5 3GH	GUBTCR41-N-CDL	Cables

2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Test System

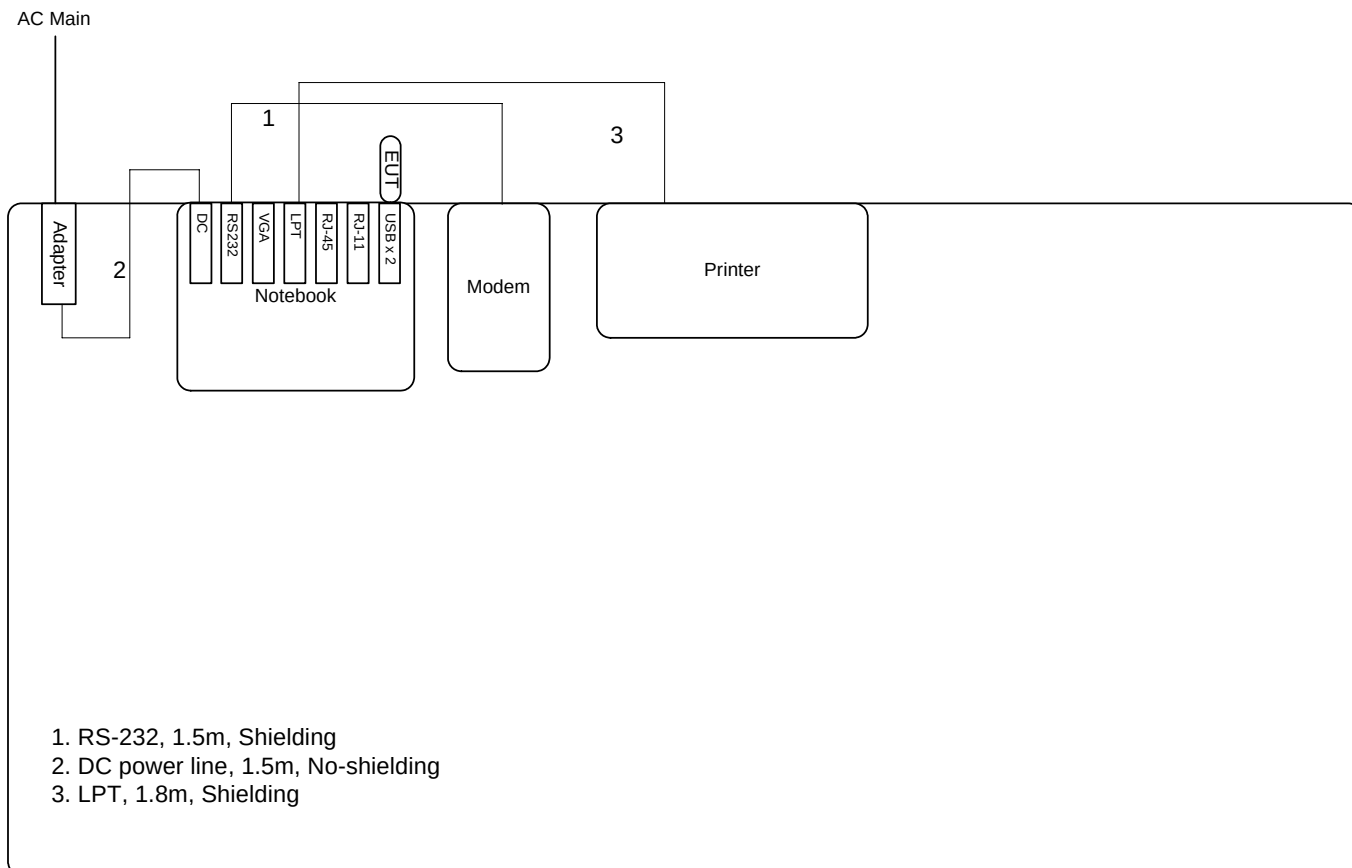

2.2. The Test Mode Description

1. For FHSS modulation, GFSK is the worst case on all test items.
2. According to ANSI C63.4-2003: Frequency range of EUT is more than 10 MHz, we have to test the lowest, middle and highest channels of EUT.
3. Spurious emission below 1GHz is independent of channel selection and there will be no effect on test results so only channel 39 with GFSK modulation was tested.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	FCC ID
Notebook	DELL	D505	DoC
Printer	EPSON	LQ-300	DoC
Modem	ACEEX	DM-1414	IFAXDM1414

3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055
Test Site No : 03CH03-HY , CO04-HY

3.2. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003

47 CFR FCC Part 15 Subpart C

3.3. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic.

3.4. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.

The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

3.5. Test Software

The following programs were executed:

Test Software Version	BLUETEST		
	Frequency	2402 MHz	2441 MHz
Parameters	100	100	100

4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Paragraph	FCC Section	Description of Test	Result
5.1	15.247(a)(1)	Hopping Channel Bandwidth	Pass
5.2	15.247(a)(1)	Hopping Channel Separation	Pass
5.3	15.247(b)(1)	Number of Hopping Frequency Used	Pass
5.4	15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
5.5	15.247(b)(1)	Maximum Peak Output Power	Pass
5.6	15.247(d)	Band Edges Emission	Pass
5.7	15.207	AC Power Line Conducted Emission	Pass
5.8	15.247(d)	Spurious Radiated Emission	Pass
5.9	15.203/15.247(b)/(c)	Antenna Requirement	Pass

5. Test Result

5.1. Test of Hopping Channel Bandwidth

5.1.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.1.2 Measuring Instruments

Item 16 of the table on section 6.


5.1.3 Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
- Span Frequency : > 20dB Bandwidth
- RB : 30 kHz
- VB : 100 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : Auto

5.1.4 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The 20dB spectrum width is the spectrum with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

5.1.5 Test Setup Layout

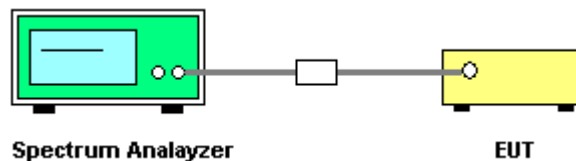

5.1.6 Test Criteria


All test results complied with the requirements of Section 15.247(a)(1). Measurement Uncertainty is 1×10^{-5} .

5.1.7 Test Result

- Temperature: 20°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Leo Hung


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Occupied BW (MHz)	Min. Limit (kHz)
GFSK	00	2402 MHz	1209.00	1.146	25
GFSK	39	2441 MHz	1209.00	1.146	25
GFSK	78	2480 MHz	1212.00	1.146	25

Modulation Type: GFSK (Channel 00) :

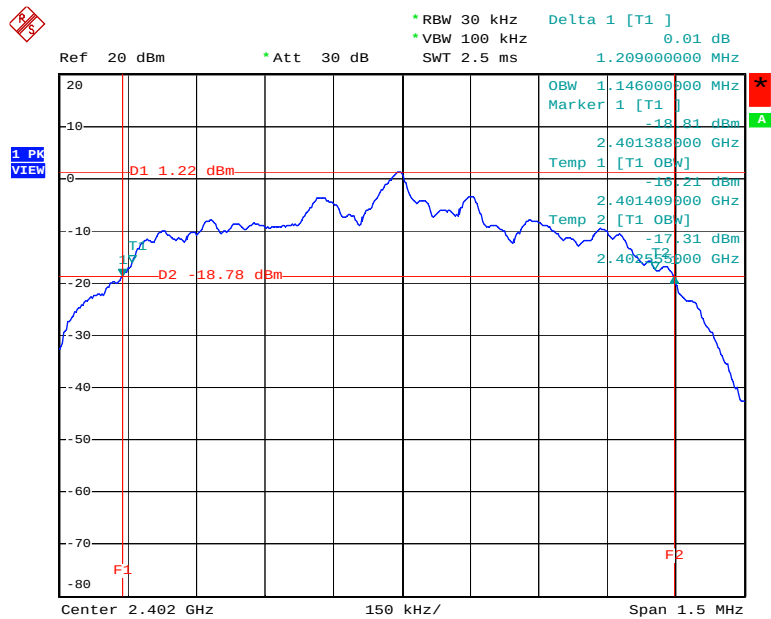


Date: 1.AUG.2005 13:45:29

Modulation Type: GFSK (Channel 39) :

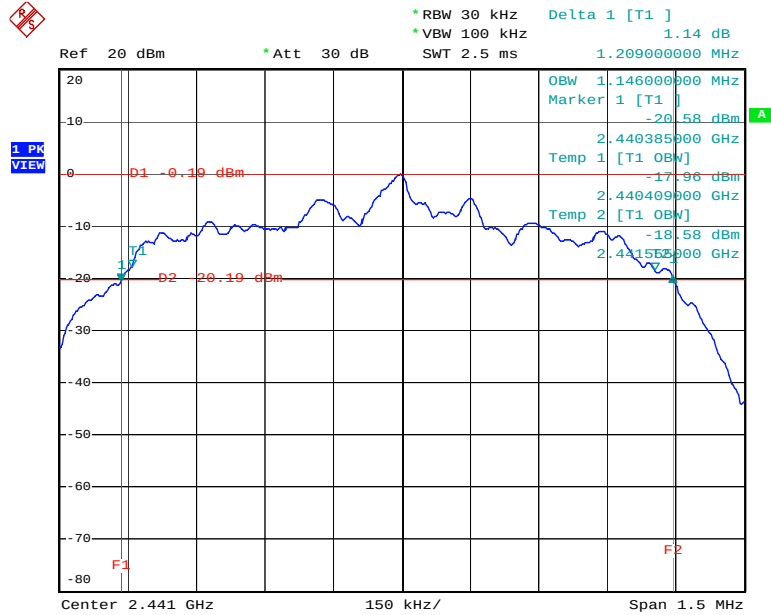

Date: 1.AUG.2005 13:43:26

Modulation Type: GFSK (Channel 78) :

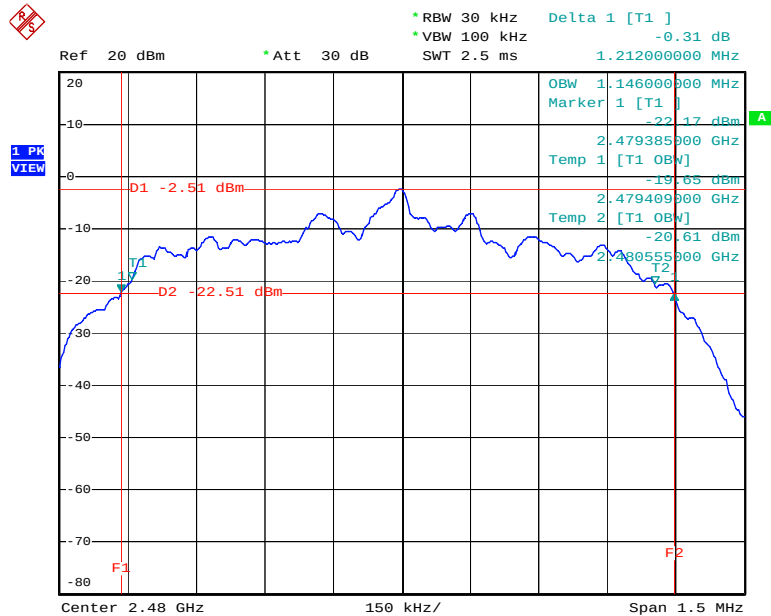

Date: 1.AUG.2005 13:48:41

5.2. Test of Hopping Channel Separation

5.2.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2 Measuring Instruments

Item 16 of the table on section 6.


5.2.3 Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
- Span Frequency : > One time channel separation
- RB : 100 kHz
- VB : 300 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : Auto

5.2.4 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

5.2.5 Test Setup Layout

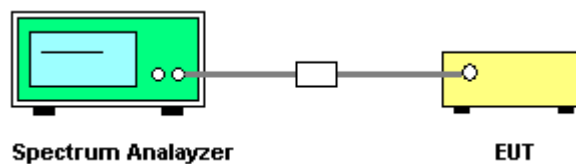

5.2.6 Test Criteria


All test results complied with the requirements of Section 15.247(a)(1). Measurement Uncertainty is 1×10^{-5} .

5.2.7 Test Result

- Temperature: 20°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Leo Hung


Modulation Type	Channel No.	Frequency (MHz)	Hopping Channel Separation (kHz)	Min. Limit (kHz)
GFSK	00	2402 MHz	1000	806
GFSK	39	2441 MHz	1000	806
GFSK	78	2480 MHz	1000	808

Modulation Type: GFSK (Channel 00) :

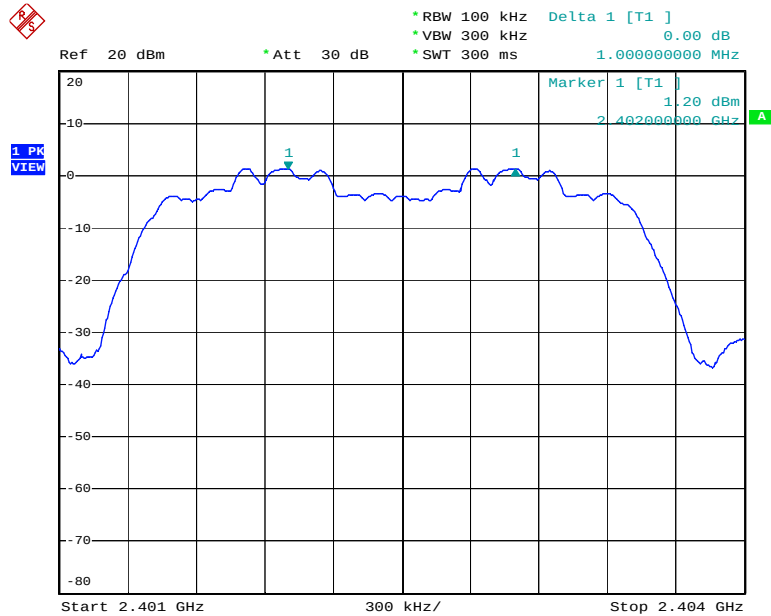


Date: 1.AUG.2005 14:18:57

Modulation Type: GFSK (Channel 39) :

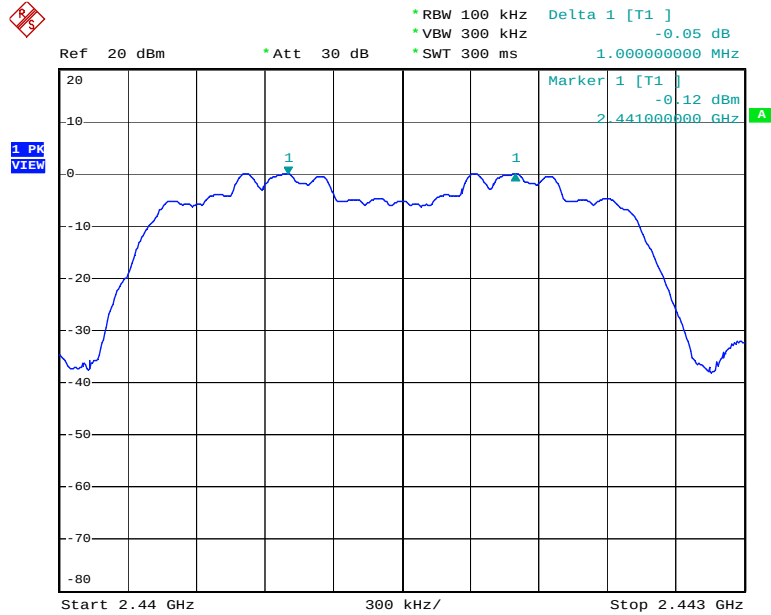

Date: 1.AUG.2005 14:20:20

Modulation Type: GFSK (Channel 78) :

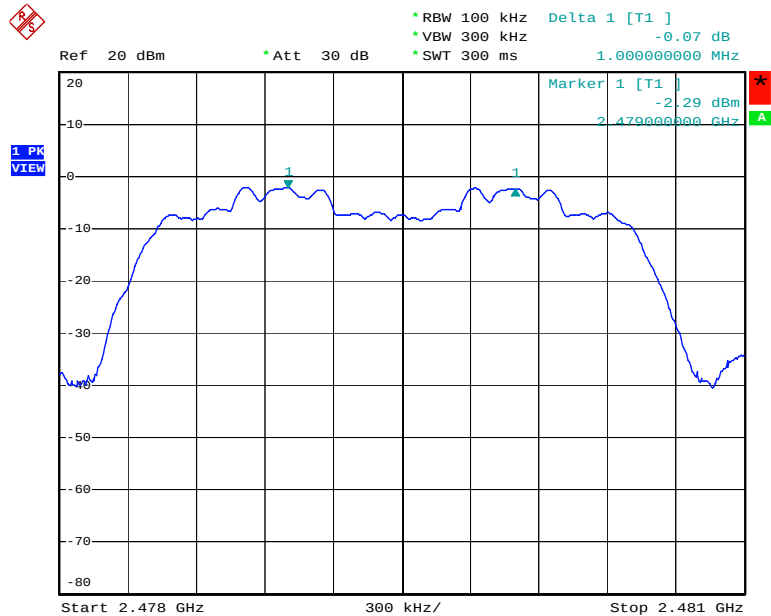

Date: 1.AUG.2005 14:22:43

5.3. Test of Number of Hopping Frequency

5.3.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

5.3.2 Measuring Instruments

Item 16 of the table on section 6.


5.3.3 Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2402 MHz ~ 2480 MHz
- Span Frequency : > Operation frequency range
- RB : 100 kHz
- VB : 100 kHz

5.3.4 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe hopping frequency in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

5.3.5 Test Setup Layout

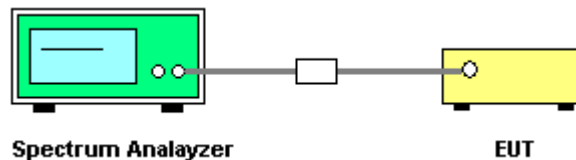

5.3.6 Test Criteria


All test results complied with the requirements of Section 15.247(b)(1). Measurement Uncertainty is 1×10^{-5} .

5.3.7 Test Result

- Temperature: 20°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Leo Hung

Modulation Type	Channel No.	Frequency (MHz)	Number of Hopping Ch. (Channels)	Min. Limit (Channels)
GFSK	00 ~ 78	2402 MHz ~ 2480 MHz	79	75

Modulation Type: GFSK (Channel 00 ~ Channel 78) :

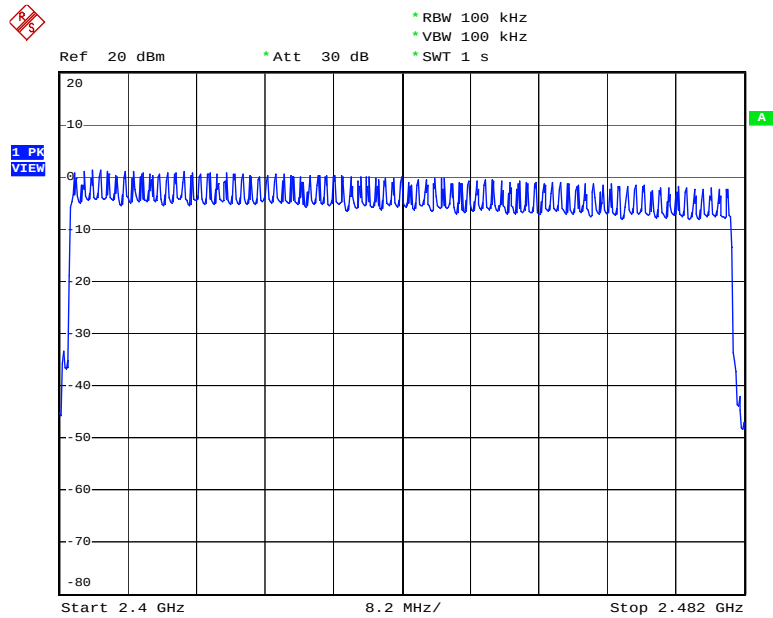

Date: 1.AUG.2005 14:26:28

5.4. Test of Test of Dwell Time of Each Frequency

5.4.1 Applicable Standard

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.4.2 Measuring Instruments

Item 16 of the table on section 6.


5.4.3 Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2402 MHz / 2441 MHz / 2480 MHz
- Span Frequency : 0MHz
- RB : 1 MHz
- VB : 1 MHz
- Detector : Peak
- Trigger : Video
- Sweep Time : > One pulse time

5.4.4 Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Set the EUT for DH5, DH3 and DH1 packet transmitting.
6. Measure the maximum time duration of one single pulse.
7. DH5 Packet permit maximum 3.37 hops per second in each channel. So, the dwell time is the time duration of the pulse times 106.6 within 31.6 seconds.
8. DH3 Packet permit maximum 5.06 hops per second in each channel. So, the dwell time is the time duration of the pulse times 160 within 31.6 seconds.
9. DH1 Packet permit maximum 10.12 hops per second in each channel. So, the dwell time is the time duration of the pulse times 320 within 31.6 seconds.

5.4.5 Test Setup Layout



5.4.6 Test Criteria


All test results complied with the requirements of Section 15.247(a)(1)(iii). Measurement Uncertainty is 1×10^{-5} .

5.4.7 Test Result

- Temperature: 20°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Leo Hung


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2402 MHz	3.0100	0.3211	0.4000
DH3	2402 MHz	1.7600	0.2816	0.4000
DH1	2402 MHz	0.4950	0.1584	0.4000
DH5	2441 MHz	3.0100	0.3211	0.4000
DH3	2441 MHz	1.7600	0.2816	0.4000
DH1	2441 MHz	0.4850	0.1552	0.4000
DH5	2480 MHz	3.0000	0.3200	0.4000
DH3	2480 MHz	1.7500	0.2800	0.4000
DH1	2480 MHz	0.4900	0.1568	0.4000

DH5 Modulation Type: GFSK (Channel 00) :

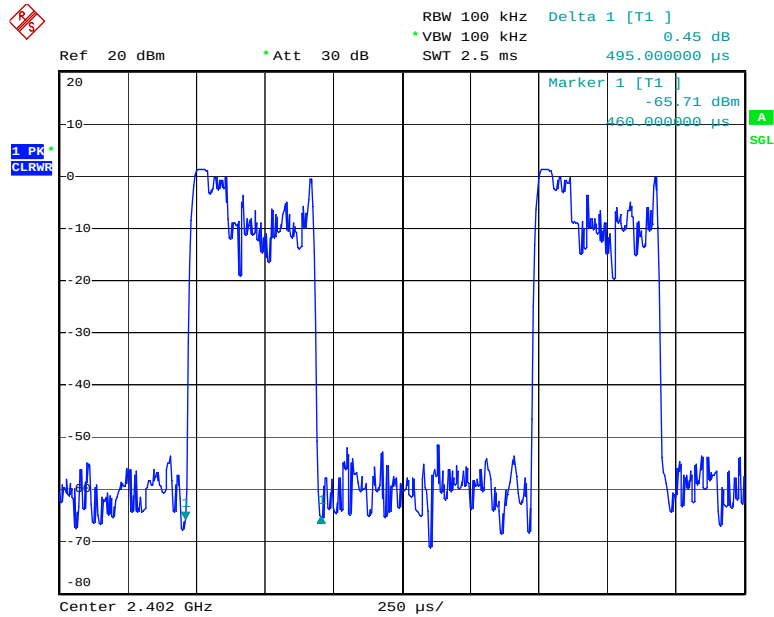


Date: 1.AUG.2005 13:59:16

DH3 Modulation Type: GFSK (Channel 00) :

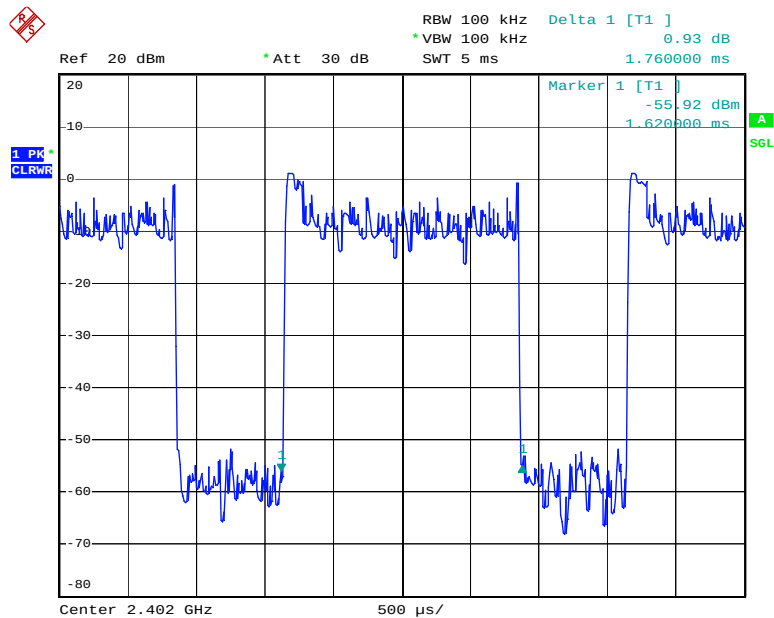


Date: 1.AUG.2005 14:07:57

DH1 Modulation Type: GFSK (Channel 00) :

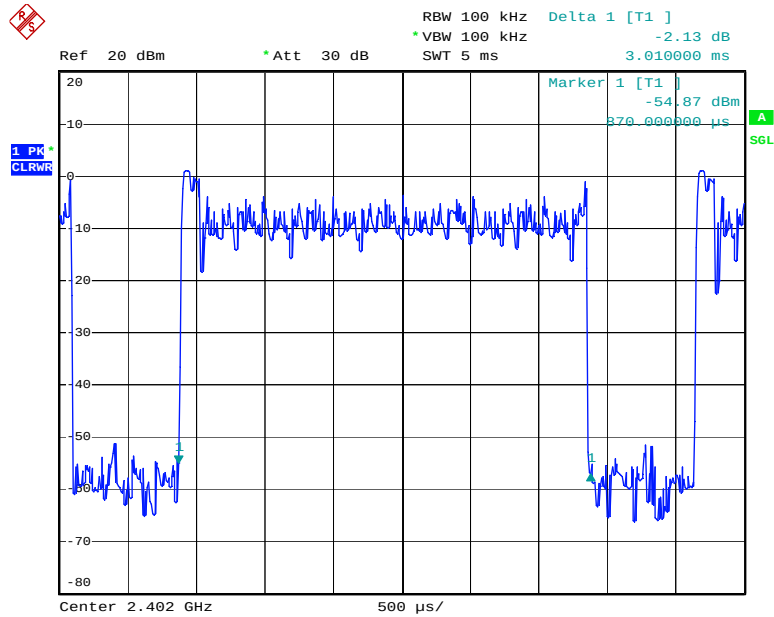


Date: 1.AUG.2005 14:08:49

DH5 Modulation Type: GFSK (Channel 39) :

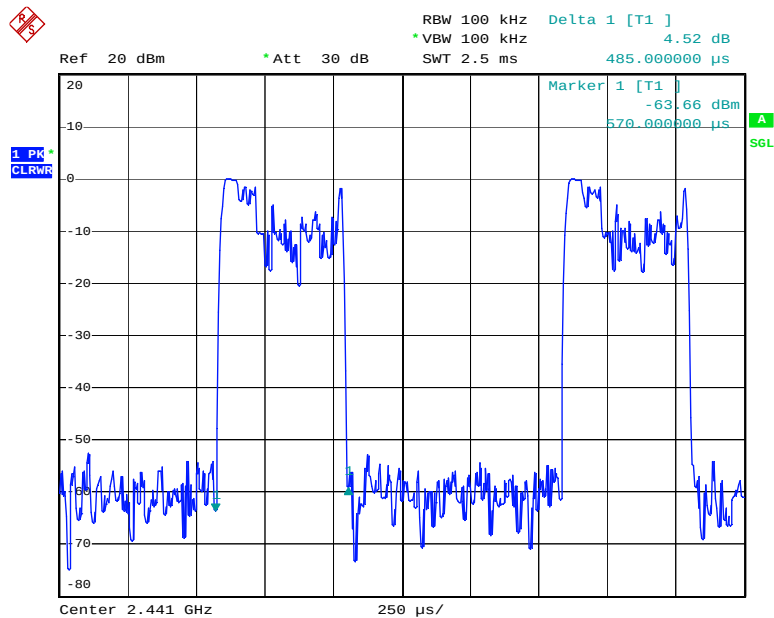


Date: 1.AUG.2005 14:00:30

DH3 Modulation Type: GFSK (Channel 39) :

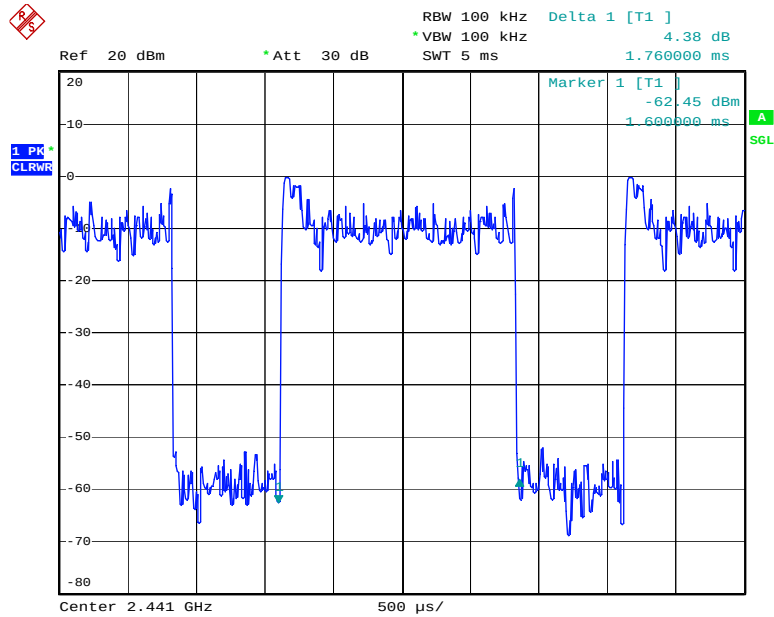


Date: 1.AUG.2005 14:07:07

DH1 Modulation Type: GFSK (Channel 39) :

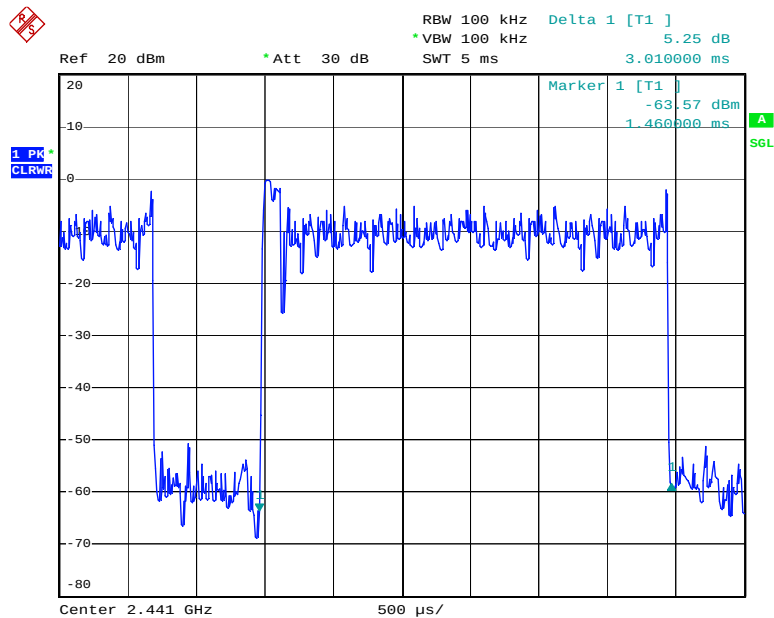


Date: 1.AUG.2005 14:09:34

DH5 Modulation Type: GFSK (Channel 78) :

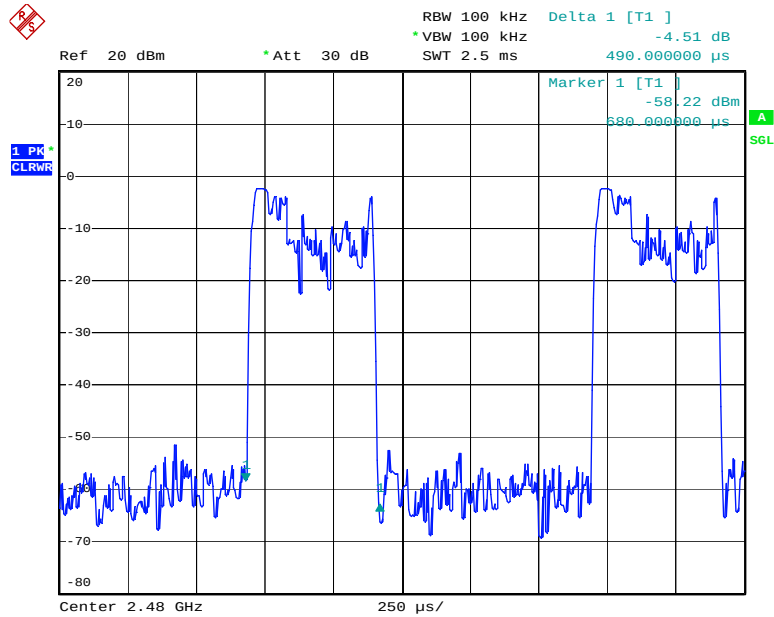


Date: 1.AUG.2005 14:01:32

DH3 Modulation Type: GFSK (Channel 78) :

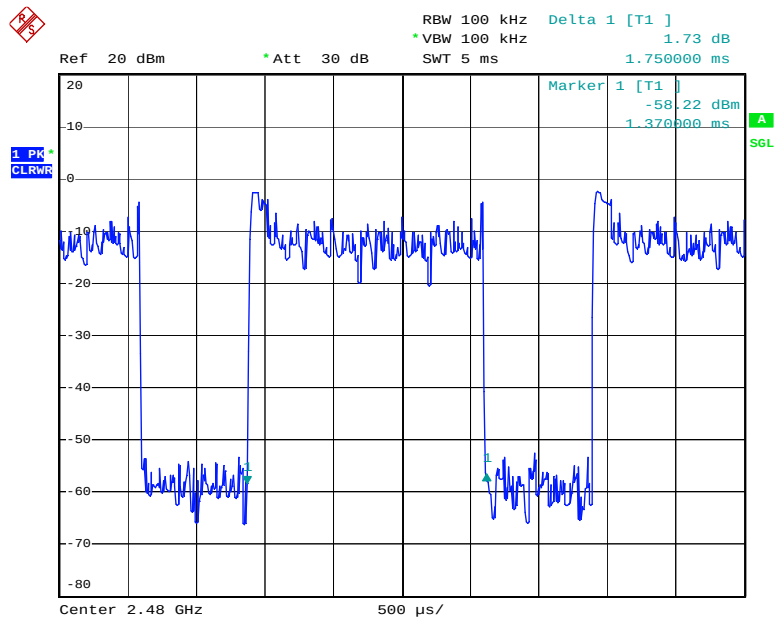

Date: 1.AUG.2005 14:04:58

DH1 Modulation Type: GFSK (Channel 78) :

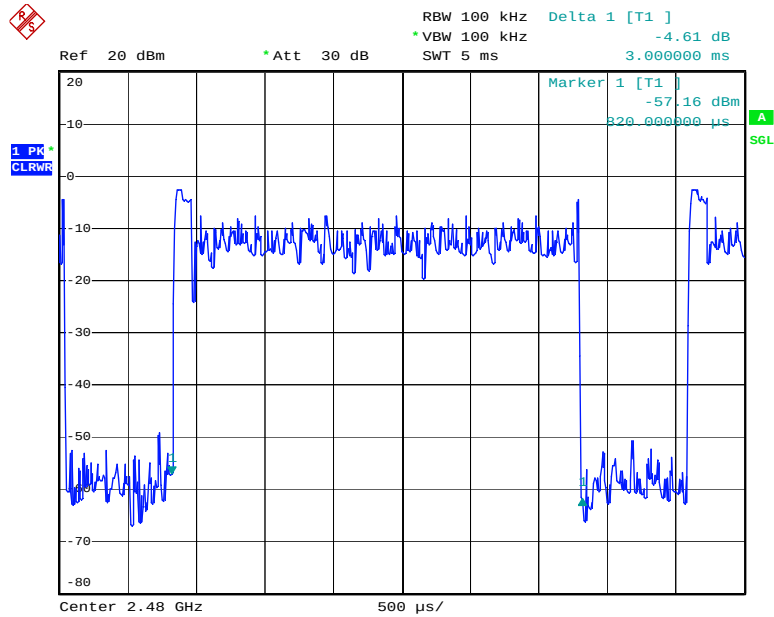

Date: 1.AUG.2005 14:10:41

5.5. Maximum Peak Output Power

5.5.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt.


5.5.2 Measuring Instruments

Item 17, 19 of the table on section 6.

5.5.3 Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Repeated point 1 for the lowest, middle and highest channel of the EUT.

5.5.4 Test Setup Layout

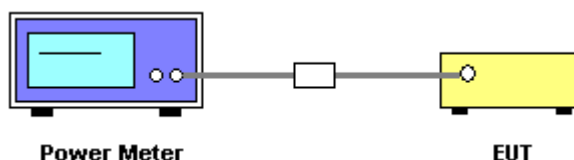

5.5.5 Test Criteria

All test results complied with the requirements of 15.247(b)(1). Measurement Uncertainty is 1.5dB.

5.5.6 Test Result of Conducted Peak Power

- Temperature: 20°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Leo Hung

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
GFSK	00	2402 MHz	3.63	30
GFSK	39	2441 MHz	2.35	30
GFSK	78	2480 MHz	0.19	30

5.6. Test of Band Edges Emission

5.6.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.6.2 Measuring Instruments

Item 1~15 of the table on section 6 for radiated measurement.

Item 16 of the table on section 6 for conducted measurement.

5.6.3 Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Conducted Measurement)
 - Attenuation : Auto
 - Center Frequency : 2402 MHz / 2480 MHz
 - Span Frequency : 100MHz
 - RB : 100 kHz
 - VB : 100 kHz
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto
- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
 - Attenuation : Auto
 - Center Frequency : 2402 MHz / 2480 MHz
 - Span Frequency : 100MHz
 - RB : 1 MHz for PK value / 1 MHz for AV value
 - VB : 1 MHz for PK value / 10 Hz for AV value
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto

5.6.4 Test Procedures

Conducted Measurement


1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement


1. Configure the EUT according to ANSI C63.4-2003.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1 MHz RBW for reading under PK.
6. The transmitter set to the highest channel and repeated 2~5.

5.6.5 Test Setup

Radiated Method

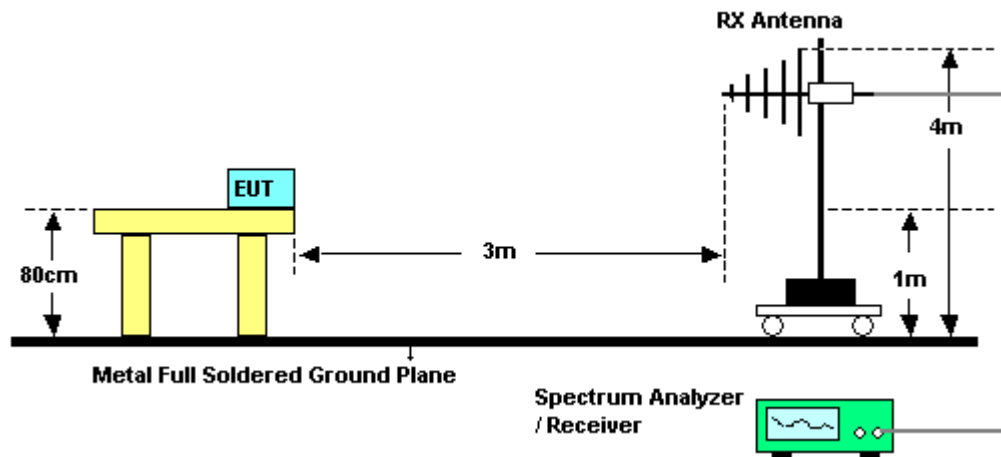

Conducted Method

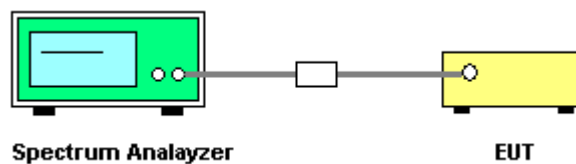


5.6.6 Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.6.7 Test Results for CH 78 / 2480 MHz

- Modulation Type: GFSK
- Temperature: 24°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 83%
- Test Engineer: Rush Kao

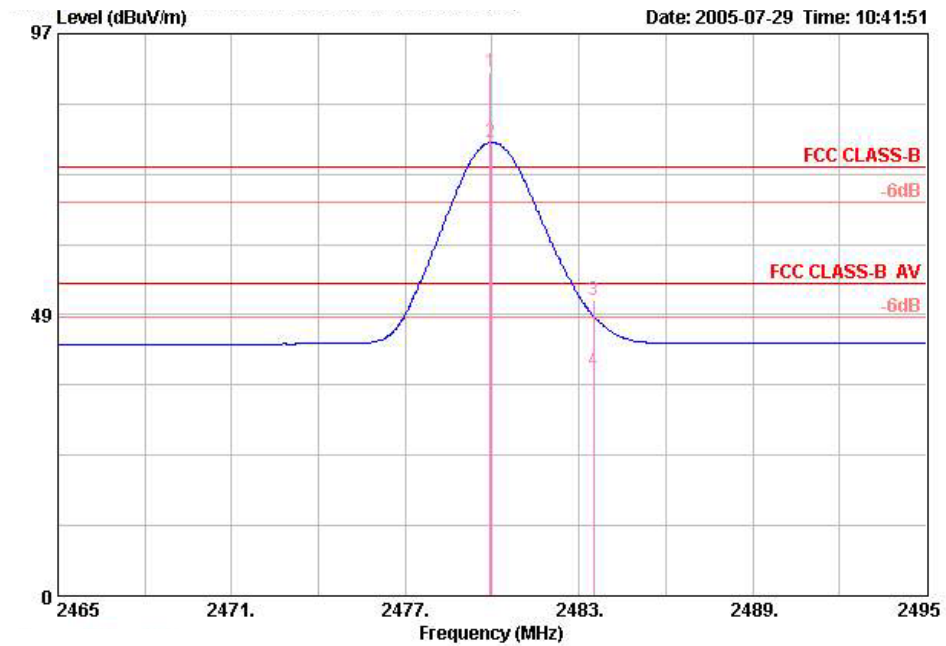


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
3	2483.500	51.07	-22.93	74.00	28.36	2.04	0.00	20.67	VERTICAL	PEAK
4	2483.500	38.76	-15.24	54.00	28.36	2.04	0.00	8.36	VERTICAL	Average

Level* : The max field strength in the restricted bands.


5.6.8 Test Result of Conducted Emission

Modulation Type: GFSK (Channel 00) :

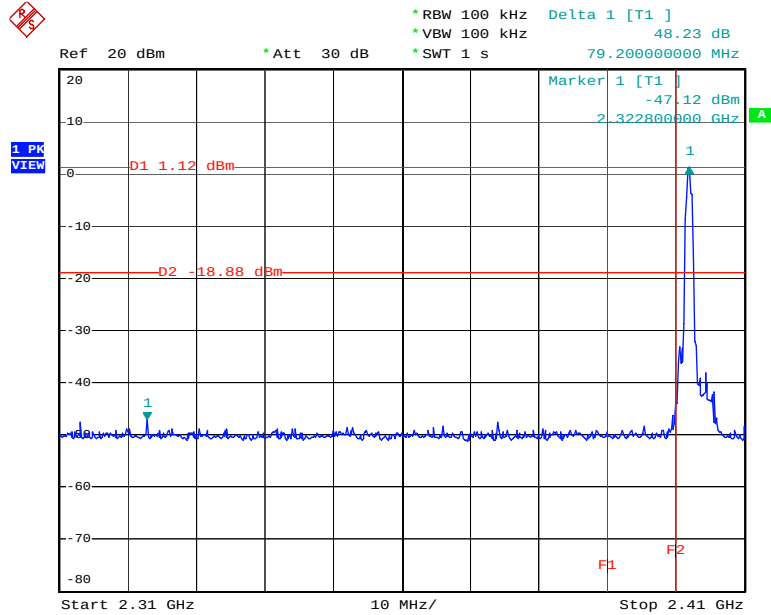

Date: 1.AUG.2005 14:30:20

Modulation Type: GFSK (Channel 78) :

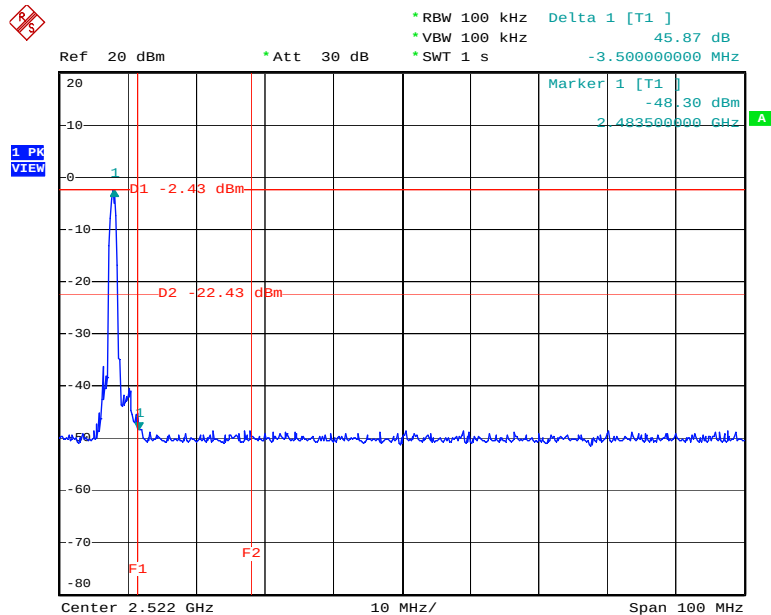

Date: 1.AUG.2005 14:32:32

5.7. Test of AC Power Line Conducted Emission

5.7.1 Measuring Instruments

Item 26~30 of the table on section 6.


5.7.2 Description of Major Test Instruments Setting

- Test Receiver : (R&S ESCS 30)
Attenuation : 10 dB
Start Frequency : 0.15 MHz
Stop Frequency : 30 MHz
IF Bandwidth : 9 KHz

5.7.3 Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/ 50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.


5.7.4 Test Setup Layout

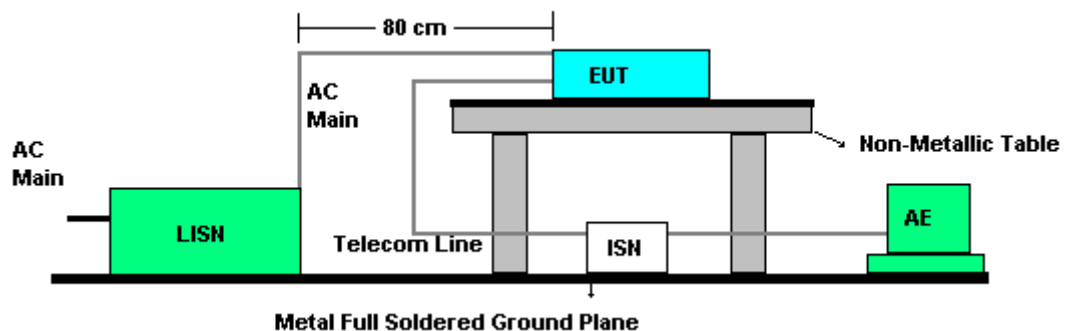

5.7.5 Test Result of Conducted Emission


- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Stan Peng

Line to Ground

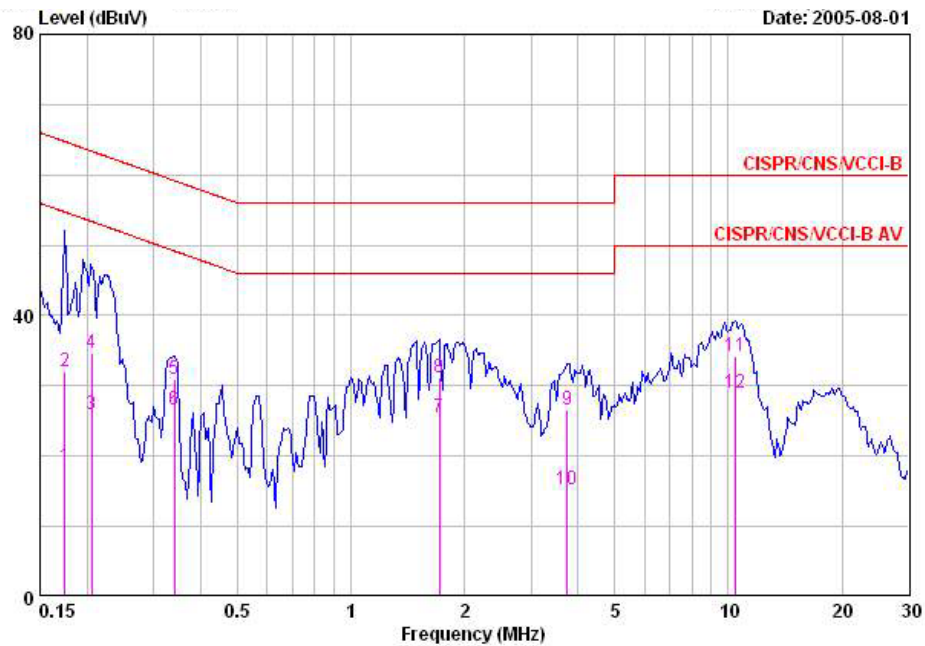

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17491	18.49	-36.23	54.72	16.49	1.80	0.20	AVERAGE
2	0.17491	31.97	-32.75	64.72	29.97	1.80	0.20	QP
3	0.20566	25.87	-27.51	53.38	24.43	1.24	0.20	AVERAGE
4	0.20566	34.75	-28.63	63.38	33.31	1.24	0.20	QP
5	0.34100	30.88	-28.30	59.18	29.98	0.70	0.20	QP
6	0.34100	26.60	-22.58	49.18	25.70	0.70	0.20	AVERAGE
7	1.716	25.53	-20.47	46.00	25.08	0.30	0.15	AVERAGE
8	1.716	31.17	-24.83	56.00	30.72	0.30	0.15	QP
9	3.740	26.60	-29.40	56.00	25.95	0.35	0.30	QP
10	3.740	15.28	-30.72	46.00	14.63	0.35	0.30	AVERAGE
11	10.452	34.25	-25.75	60.00	33.56	0.30	0.39	QP
12	10.452	28.92	-21.08	50.00	28.23	0.30	0.39	AVERAGE

Neutral to Ground

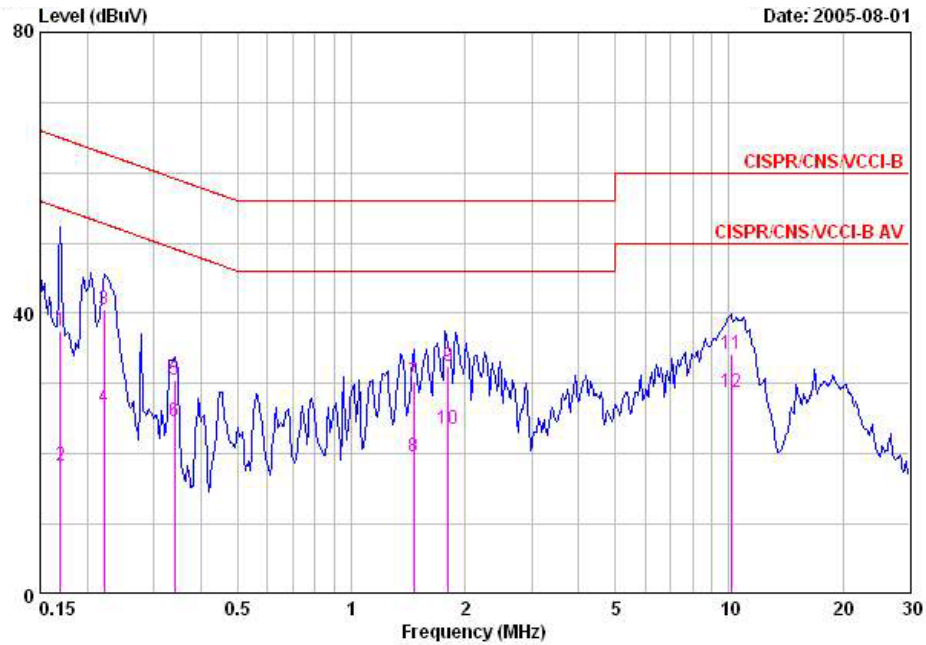


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16944	37.48	-27.51	64.99	35.56	1.72	0.20	QP
2	0.16944	18.33	-36.66	54.99	16.41	1.72	0.20	AVERAGE
3	0.22201	40.50	-22.25	62.74	39.32	0.98	0.20	QP
4	0.22201	26.54	-26.21	52.74	25.36	0.98	0.20	AVERAGE
5	0.34100	30.62	-28.56	59.18	29.82	0.60	0.20	QP
6	0.34100	24.71	-24.47	49.18	23.91	0.60	0.20	AVERAGE
7	1.464	30.30	-25.70	56.00	29.89	0.30	0.11	QP
8	1.464	19.73	-26.27	46.00	19.32	0.30	0.11	AVERAGE
9	1.807	32.48	-23.52	56.00	32.08	0.24	0.16	QP
10	1.807	23.46	-22.54	46.00	23.06	0.24	0.16	AVERAGE
11	10.125	34.23	-25.77	60.00	33.61	0.30	0.32	QP
12	10.125	28.84	-21.16	50.00	28.22	0.30	0.32	AVERAGE

5.7.6 Photographs of Conducted Emission Test Configuration

FRONT VIEW



REAR VIEW

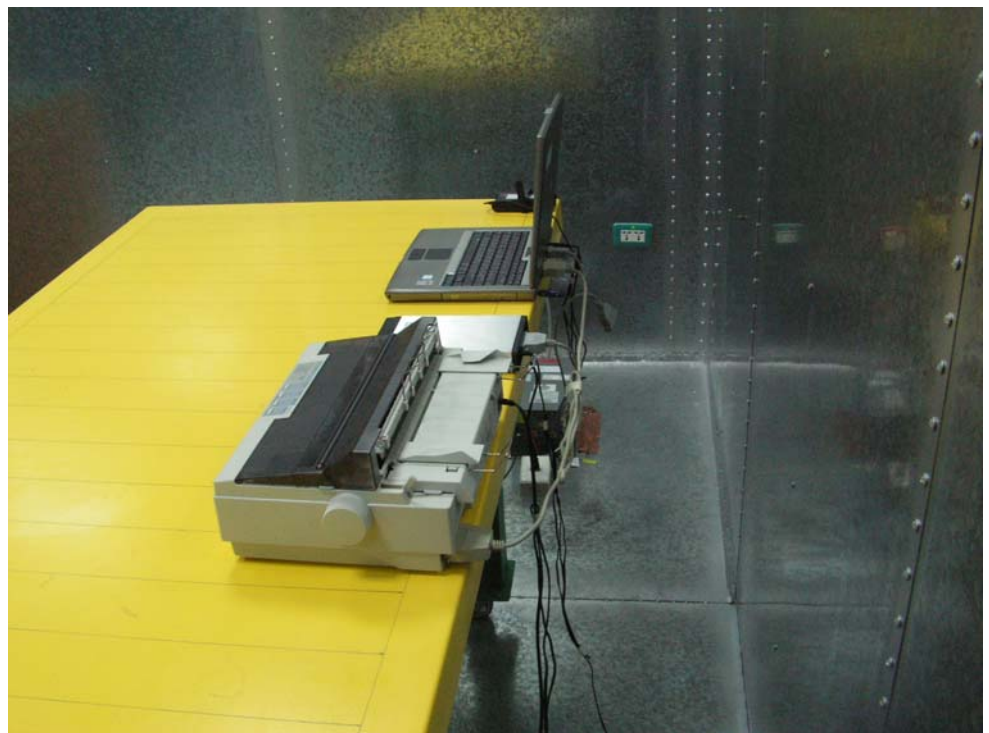

5.8. Test of Spurious Radiated Emission

5.8.1 Applicable Standard

Section 15.247(d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.8.2 Measuring Instruments

Please reference item 1~15 in chapter 6 for the instruments used for testing.

5.8.3 Description of Major Test Instruments Setting


- Spectrum Analyzer : R&S FSP40
 - Attenuation : Auto
 - Start Frequency : 1000 MHz
 - Stop Frequency : 10th carrier harmonic
 - RB / VB : 1 MHz / 1MHz for Peak
 - RB / VB : 1 MHz / 10Hz for Average
- Test Receiver : R&S ESCS 30
 - Attenuation : Auto
 - Start Frequency : 30 MHz
 - Stop Frequency : 1000 MHz
 - RB : 120 KHz for QP or PK

5.8.4 Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.

11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.8.5 Test Setup Layout

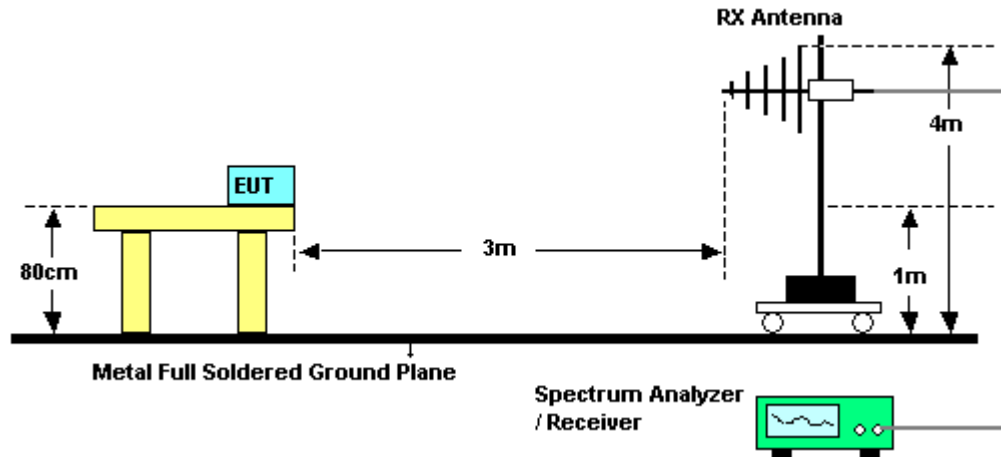


5.8.6 Test Criteria

All test results complied with the requirements of Section 15.247(d). Measurement Uncertainty is 2.26dB.

5.8.7 Test Results for CH 39 / 2441 MHz (for emission below 1GHz)


- Modulation Type: GFSK
- Temperature: 24°C
- Relative Humidity: 64%
- Test Engineer: Rush Kao

(A) Polarization: Horizontal

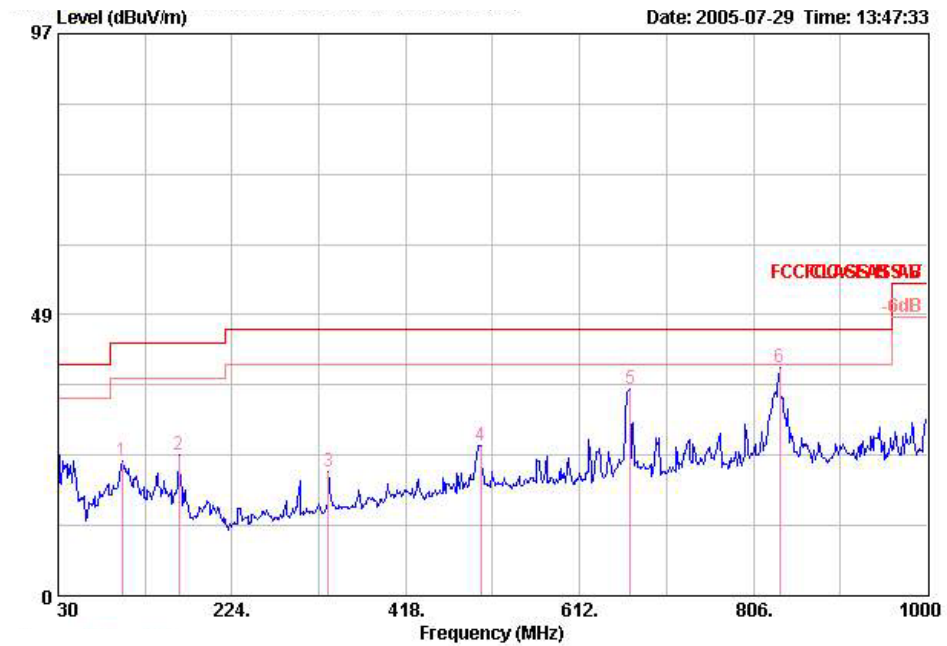

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	Limit	dB	Line	Loss	Factor	Level	Pol/Phase	Remark
					Factor			dBuV		
1	101.780	23.30	-20.20	43.50	10.76	0.81	30.09	41.82	HORIZONTAL	Peak
2	164.830	24.29	-19.21	43.50	9.35	1.02	30.19	44.11	HORIZONTAL	Peak
3	331.670	21.49	-24.51	46.00	13.90	1.44	30.51	36.67	HORIZONTAL	Peak
4	501.420	25.99	-20.01	46.00	17.42	1.77	30.52	37.33	HORIZONTAL	Peak
5	668.260	35.62	-10.38	46.00	18.91	2.06	30.36	45.00	HORIZONTAL	Peak
6 @	835.100	39.50	-6.50	46.00	20.29	2.33	30.00	46.88	HORIZONTAL	Peak

(B) Polarization: Vertical

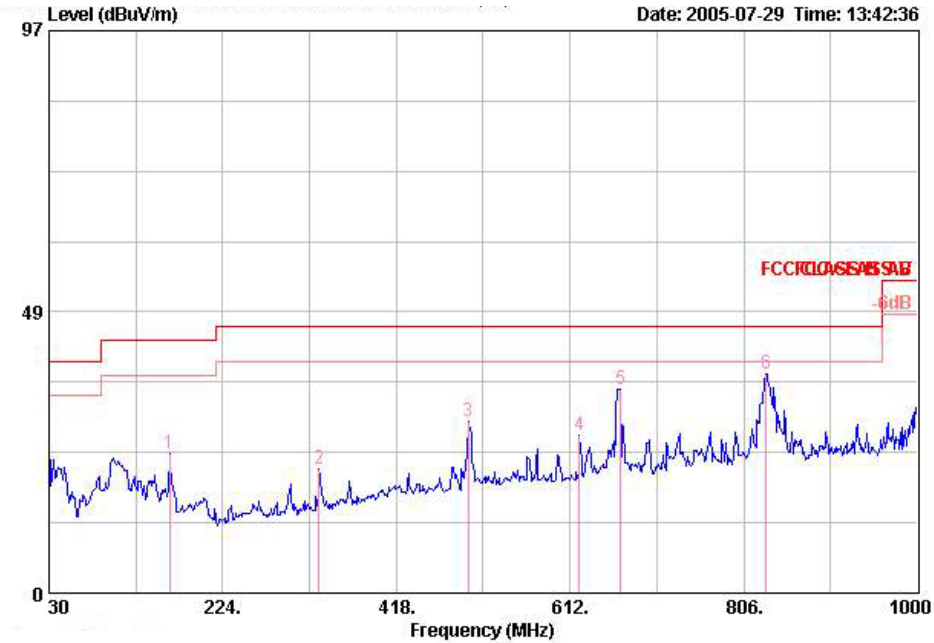

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamplifier Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	164.830	24.11	-19.39	43.50	9.35	1.02	30.19	43.92	VERTICAL	Peak
2	331.670	21.52	-24.48	46.00	13.90	1.44	30.51	36.70	VERTICAL	Peak
3	498.510	29.60	-16.40	46.00	17.36	1.77	30.53	41.01	VERTICAL	Peak
4	622.670	27.23	-18.77	46.00	18.73	1.97	30.63	37.16	VERTICAL	Peak
5	668.260	35.22	-10.78	46.00	18.91	2.06	30.36	44.60	VERTICAL	Peak
6	831.220	37.83	-8.17	46.00	20.30	2.32	30.02	45.22	VERTICAL	Peak

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamplifier Factor = Level

5.8.8 Test Results for CH 00 / 2402 MHz (for emission above 1GHz)


- Temperature: 24°C
- Relative Humidity: 64%
- Test Engineer: Rush Kao

(A) Polarization: Horizontal

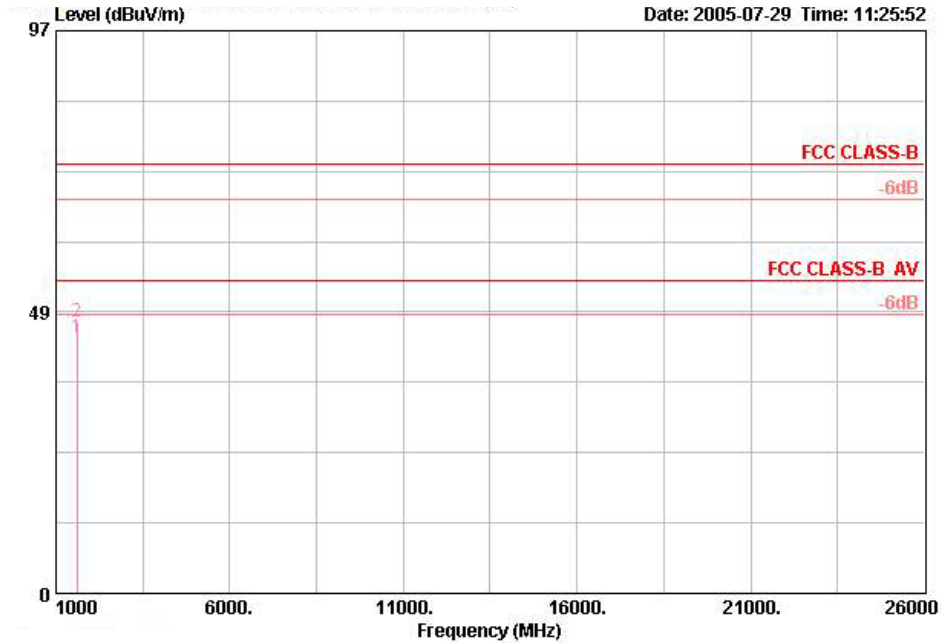

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	1601.932	44.24	-9.76	54.00	25.58	1.43	35.06	52.29	HORIZONTAL	AVERAGE
2	1601.932	46.87	-27.13	74.00	25.58	1.43	35.06	54.92	HORIZONTAL	PEAK

(B) Polarization: Vertical

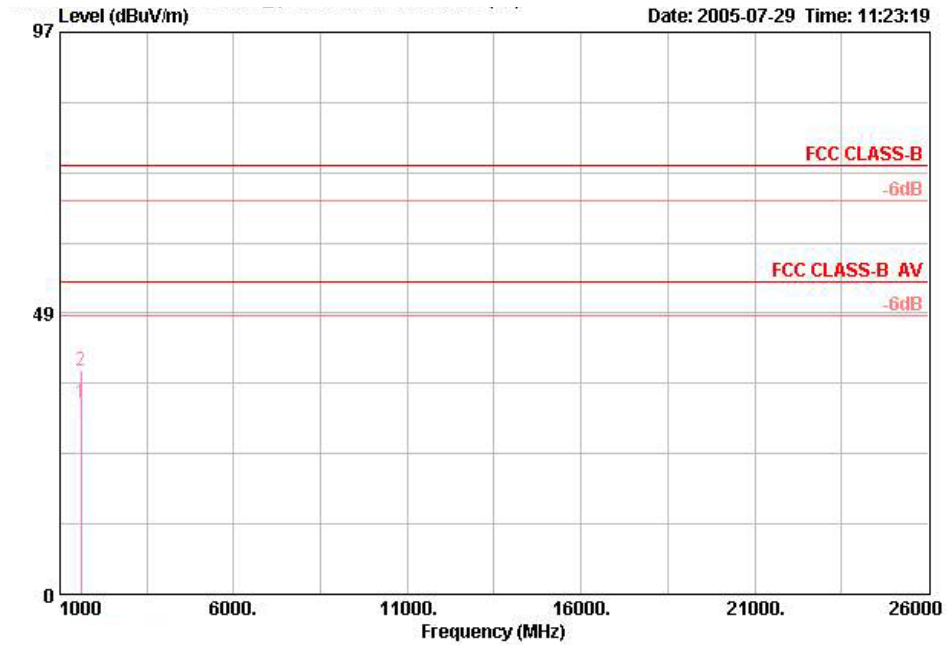

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	Limit	dB	Line	Loss	Factor	Level	Pol/Phase	Remark
					Factor	dB	dB	dBuV		
1	1601.988	33.04	-20.96	54.00	25.58	1.43	35.06	41.09	VERTICAL	AVERAGE
2	1601.988	38.60	-35.40	74.00	25.58	1.43	35.06	46.65	VERTICAL	PEAK

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.9 Test Results for CH 39 / 2441 MHz (for emission above 1GHz)


- Temperature: 24°C
- Relative Humidity: 64%
- Test Engineer: Rush Kao

(A) Polarization: Horizontal

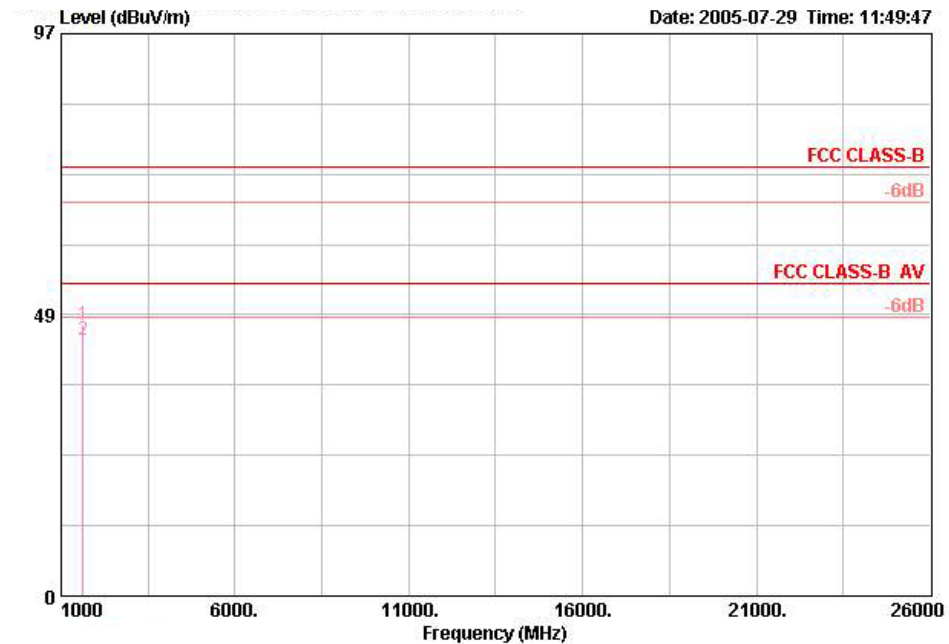

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	Limit	dB	Line	Loss	Factor	Level	Pol/Phase	Remark
					Factor	Factor		dBuV		
1	1627.980	46.91	-27.09	74.00	25.71	1.46	35.05	54.79	HORIZONTAL	Peak
2	1627.980	44.18	-9.82	54.00	25.71	1.46	35.05	52.06	HORIZONTAL	Average

(B) Polarization: Vertical

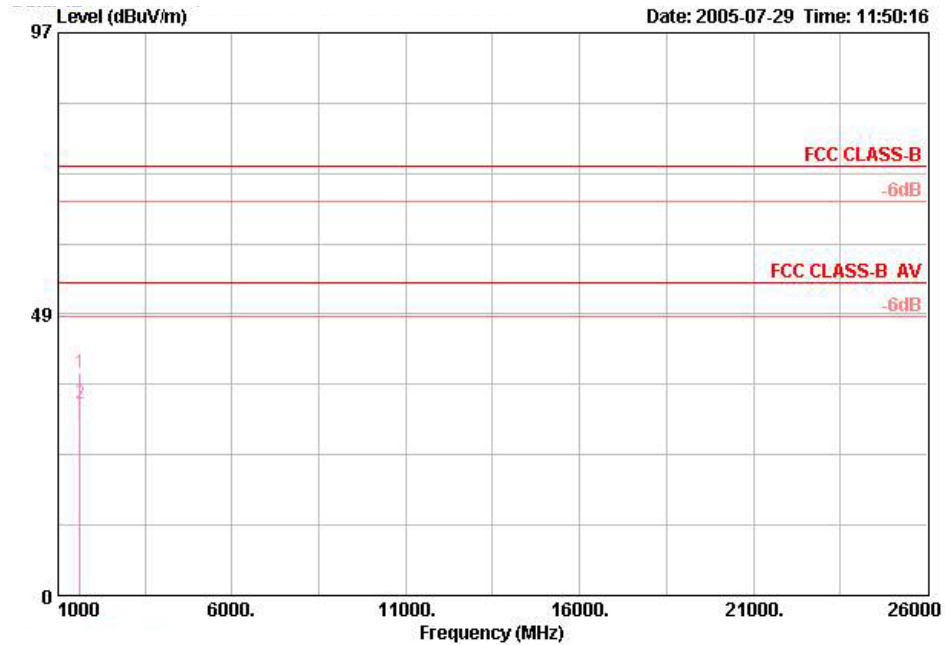

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	1627.670	38.20	-35.80	74.00	25.71	1.46	35.05	46.08	VERTICAL	Peak
2	1627.670	33.00	-21.00	54.00	25.71	1.46	35.05	40.88	VERTICAL	Average

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.10 Test Results for CH 78 / 2480 MHz (for emission above 1GHz)


- Temperature: 24°C
- Relative Humidity: 64%
- Test Engineer: Rush Kao

(A) Polarization: Horizontal

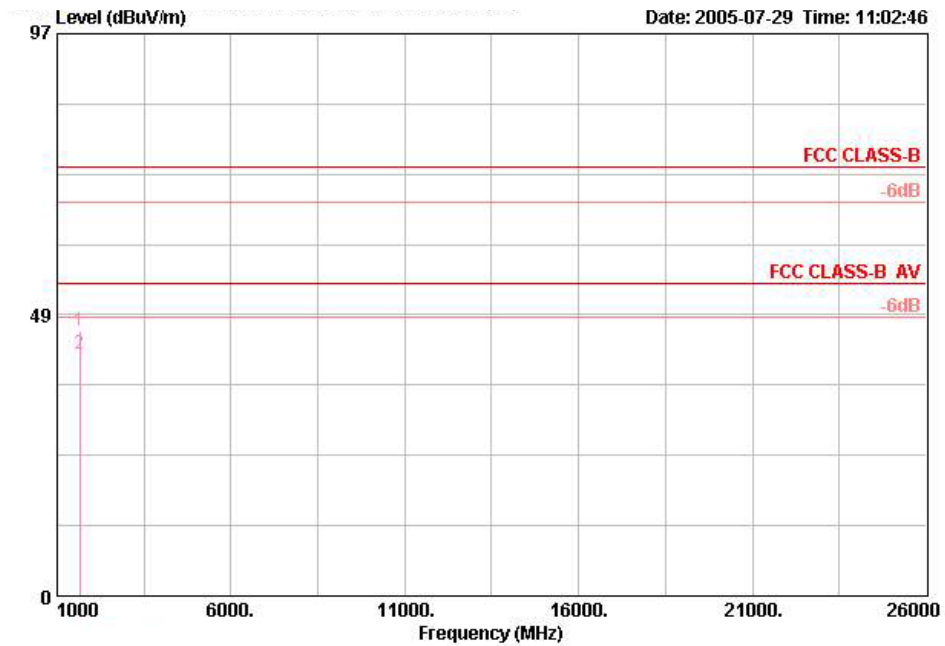

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Pol/Phase	Remark
			dB	dBuV/m	dB/m	dB	dB	dBuV		
1	1654.000	45.72	-28.28	74.00	25.77	1.50	35.04	53.49	HORIZONTAL	PEAK
2	1654.000	41.78	-12.22	54.00	25.77	1.50	35.04	49.55	HORIZONTAL	AVERAGE

(B) Polarization: Vertical

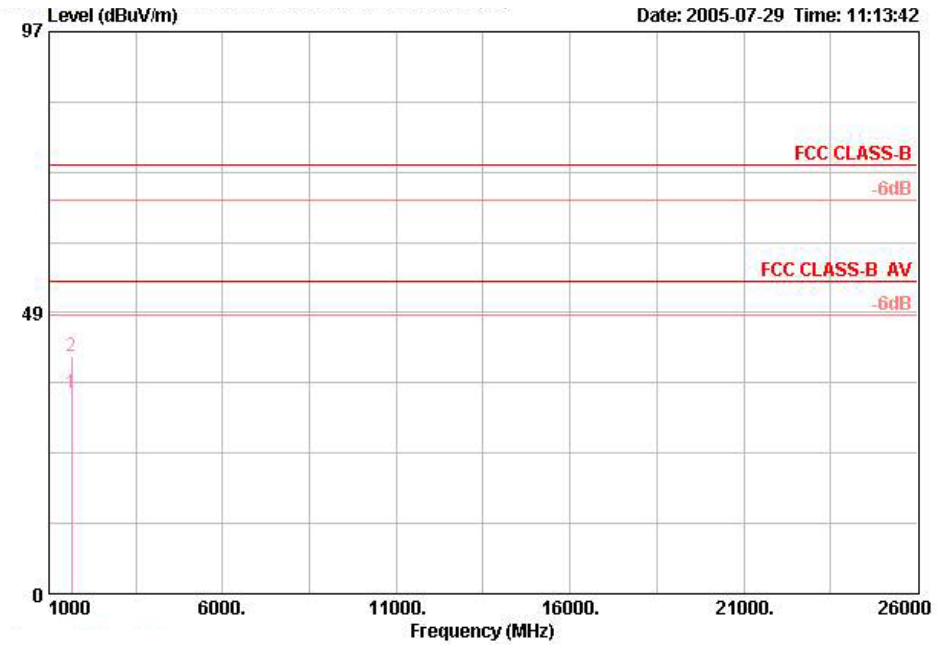

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Remark
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Pol/Phase	
			dB	dBuV/m	dB/m	dB	dB	dBuV		
1	1654.092	34.62	-19.38	54.00	25.77	1.50	35.04	42.38	VERTICAL	AVERAGE
2	1654.160	40.85	-33.15	74.00	25.77	1.50	35.04	48.61	VERTICAL	PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.11 Photographs of Radiated Emission Test Configuration

FRONT VIEW



REAR VIEW





5.9. Antenna Requirements

5.9.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.9.2 Antenna Connected Construction

There is no antenna connector for the chip antenna.

5.9.3 Antenna Gain

Antenna gain of EUT is less than 6dBi. Therefore peak conducted power limit shall not be degraded any more. Antenna report of manufacturer will have more detail antenna gain or antenna pattern.

5.9.4 Test Criteria

All test results complied with the requirements of 15.203/15.247(b)/(c).

5.10. RF Exposure

5.10.1 Limit For Maximum Permissible Exposure (MPE)

This product can be classified as mobile device, so the 20cm separation distance warning is required. In this section, the power density at 20cm location is calculated to examine if it is lower than the limit.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F = frequency in MHz

*Plane-wave equivalent power density

5.10.2 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (mW)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=20cm, as well as the gain of the used antenna, the RF power density can be obtained.

5.10.3 Calculated Result and Limit

- Modulation Type: GFSK
- Temperature: 21°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2	1.5849	3.6300	2.3067	0.000728	1

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
2	Spectrum analyzer	R&S	FSP40	100004	9KHZ ~ 40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
3	Amplifier	SCHAFFNER	CPA9231A	18667	9KHz ~ 2GHz	Jan. 10, 2005	Radiation (03CH03-HY)
4	Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	May 31, 2005	Radiation (03CH03-HY)
5	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz ~ 200MHz	Jul. 22, 2005	Radiation (03CH03-HY)
6	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz ~ 1GHz	Jul. 22, 2005	Radiation (03CH03-HY)
7	Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 22, 2005	Radiation (03CH03-HY)
9	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 22, 2005	Radiation (03CH03-HY)
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec.01, 2004	Radiation (03CH03-HY)
11	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
12	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
13	Amplifier	MITEQ	AMF-6F-260400	923364	26.5GHz ~ 40GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
14	Loop Antenna	R&S	HFH2-Z2	860004/001	9kHz ~ 30MHz	May 24, 2004*	Radiation (03CH03-HY)
15	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jun. 09, 2004*	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is two years.

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
16	Spectrum analyzer	R&S	FSP40	100004	9KHZ ~ 40GHz	Aug. 31, 2004	Conducted (TH01-HY)
17	Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
18	Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
19	Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
20	AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
21	DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 28, 2004	Conducted (TH01-HY)
22	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2004	Conducted (TH01-HY)
23	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
24	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
25	Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
26	EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Feb. 16, 2005	Conduction (CO04-HY)
27	LISN	MessTec	NNB-2/16Z	2001/004	9kHz ~ 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
28	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9kHz ~ 30MHz	May. 05, 2005	Conduction (CO04-HY)
29	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz ~ 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
30	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.


7.1. Certificate of Accreditation

Taiwan	BSMI, CNLA, DGT
USA	FCC, NVLAP, UL
EU	Nemko, TUV
Japan	VCCI
Canada	Industry Canada

7.2. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777

8. Certificate of NVLAP Accreditation

United States Department of Commerce National Institute of Standards and Technology	
	
ISO/IEC 17025:1999 ISO 9002:1994	
Certificate of Accreditation	
SPORTON INTERNATIONAL, INC. TAIPEI HSIEN 221 TAIWAN	
<i>is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:</i>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
December 31, 2005 <i>Effective through</i>	 For the National Institute of Standards and Technology NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)