


4.5.6 TEST RESULTS


Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1MHz	805.0	PASS
39	2441	1MHz	810.0	PASS
78	2480	1MHz	810.0	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.


Channel 0

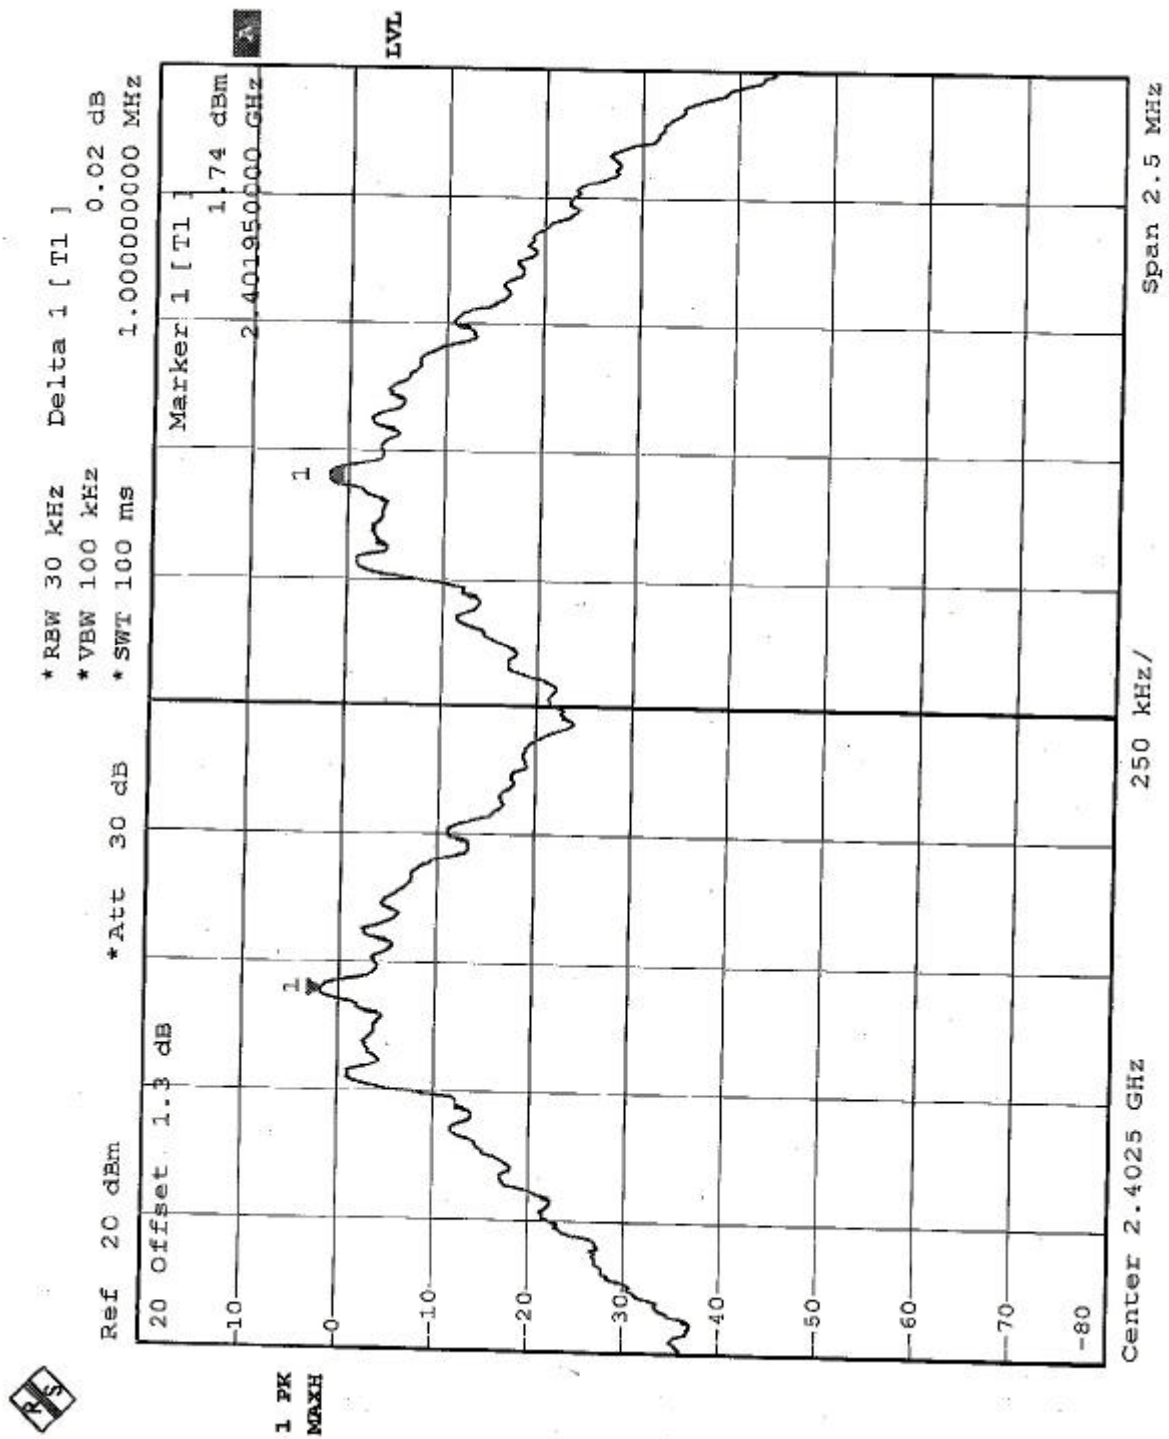

Channel 39

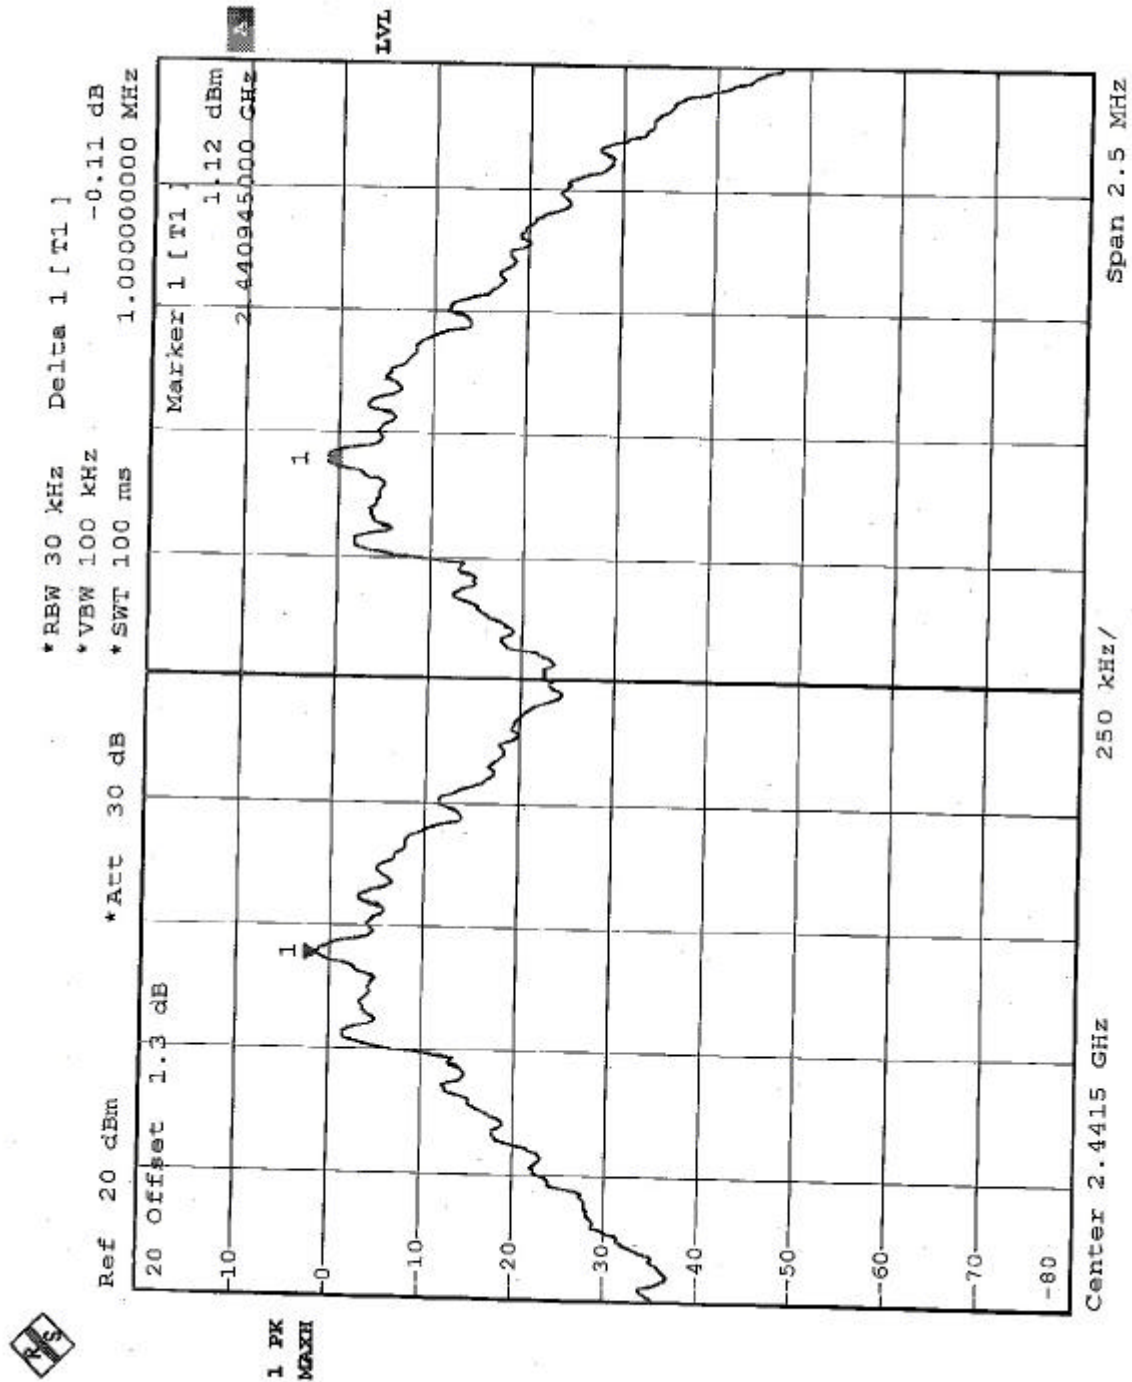

Channel 78

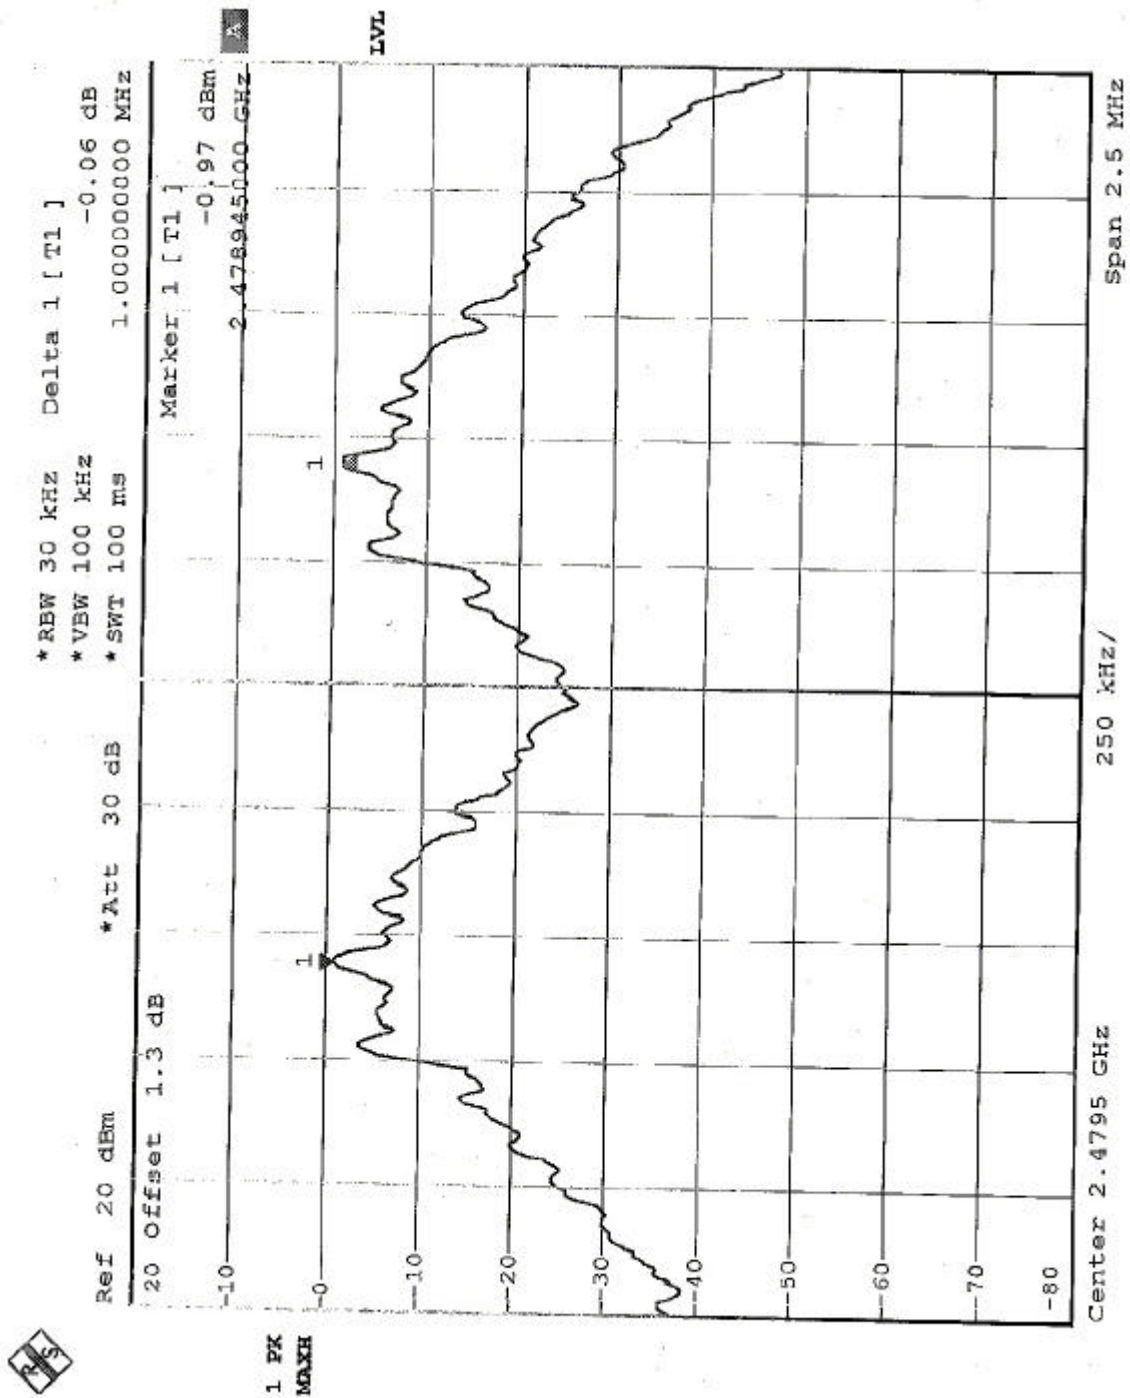

4.6 MAXIMUM PEAK OUTPUT POWER –USING SPECTRUM ANALYZER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SINGLE CHANNEL POWER METER	NRVS	100026	Mar. 06, 2004
PEAK POWER SENSOR	NRV-Z32	100013	Mar. 06, 2004

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

Output Power to Antenna:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	2.36	30	PASS
39	2441	1.88	30	PASS
78	2480	-0.28	30	PASS

Channel 0

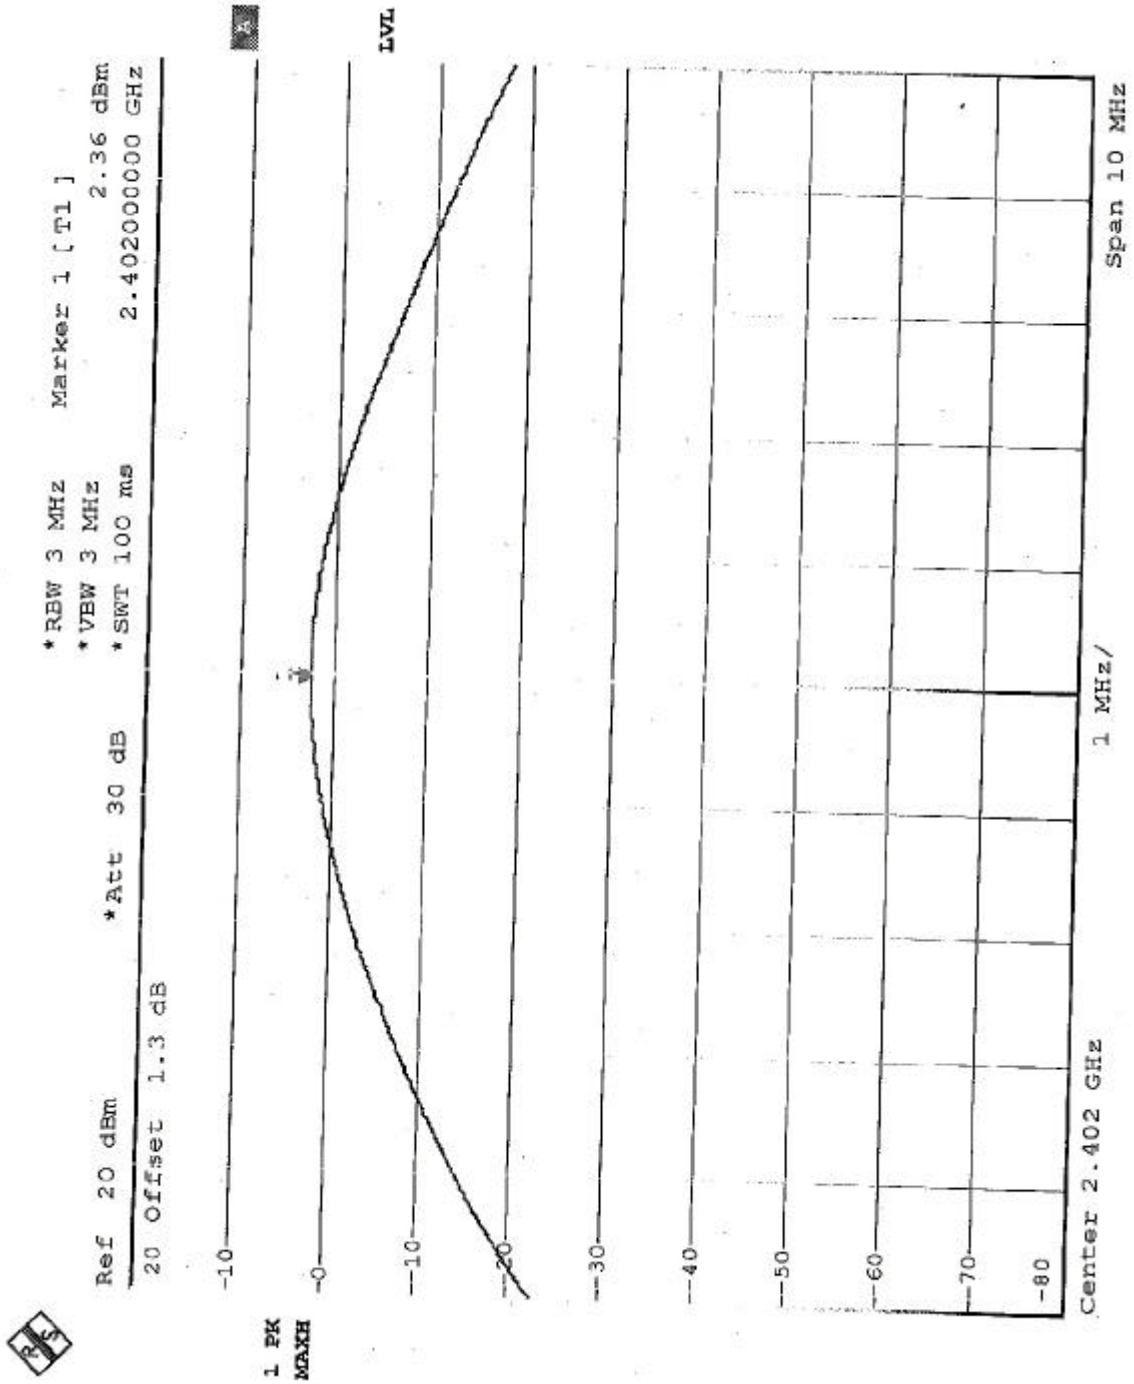




Channel 39

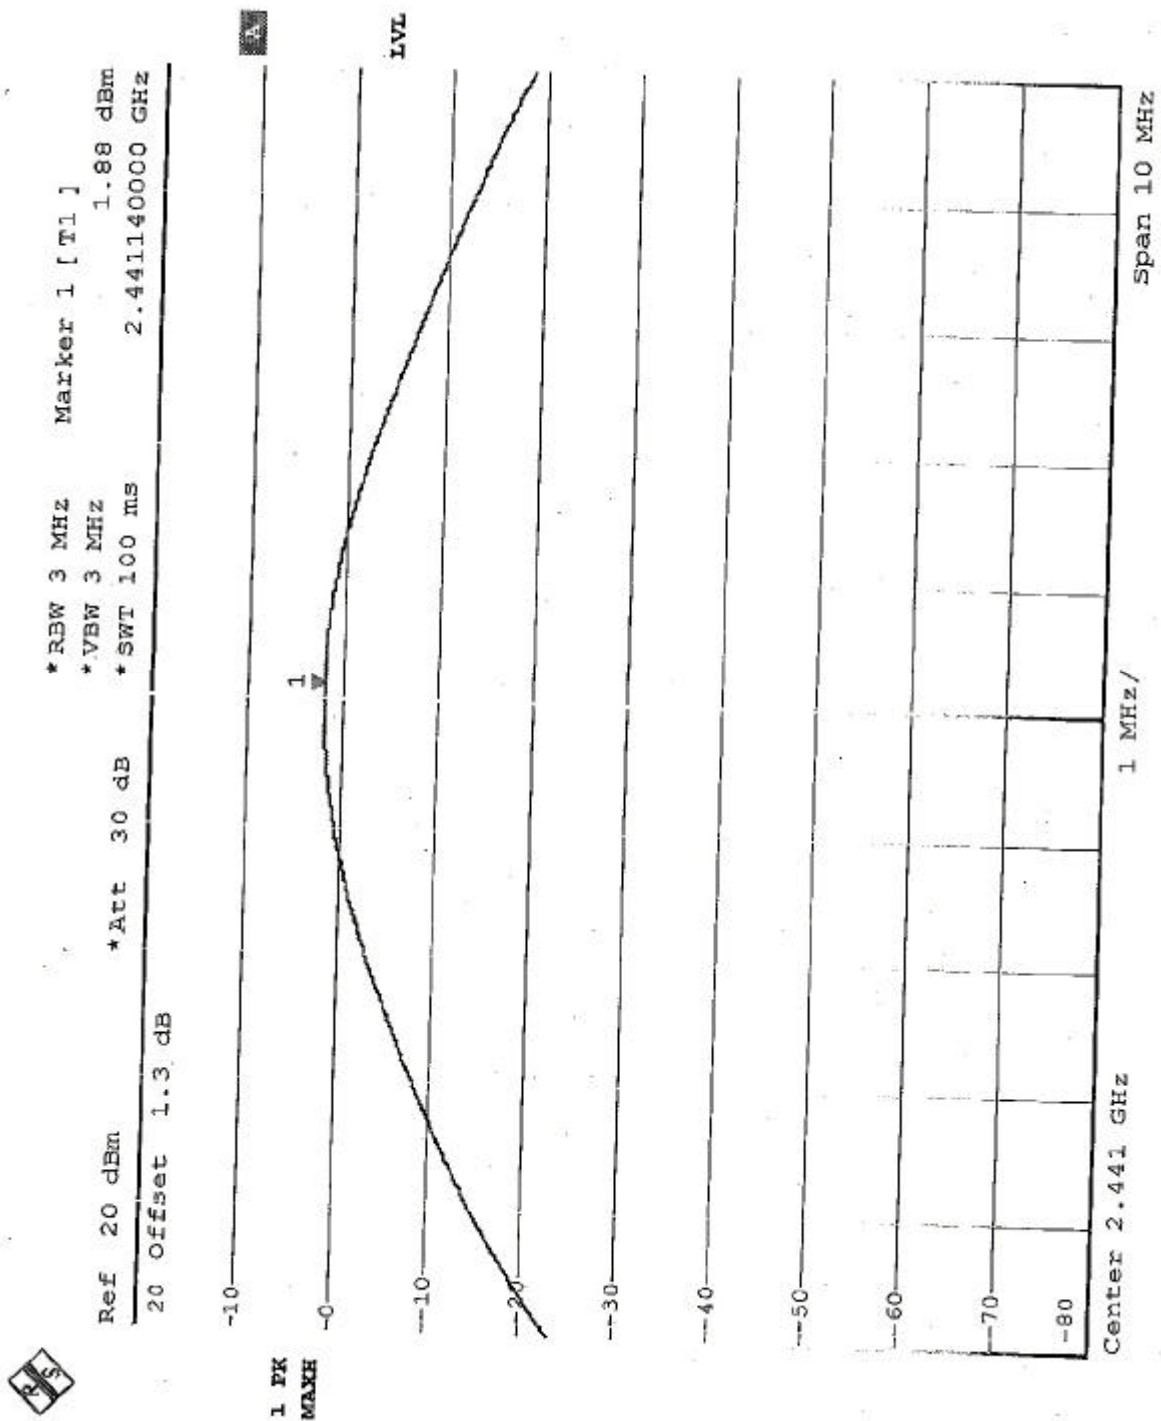

Channel 78

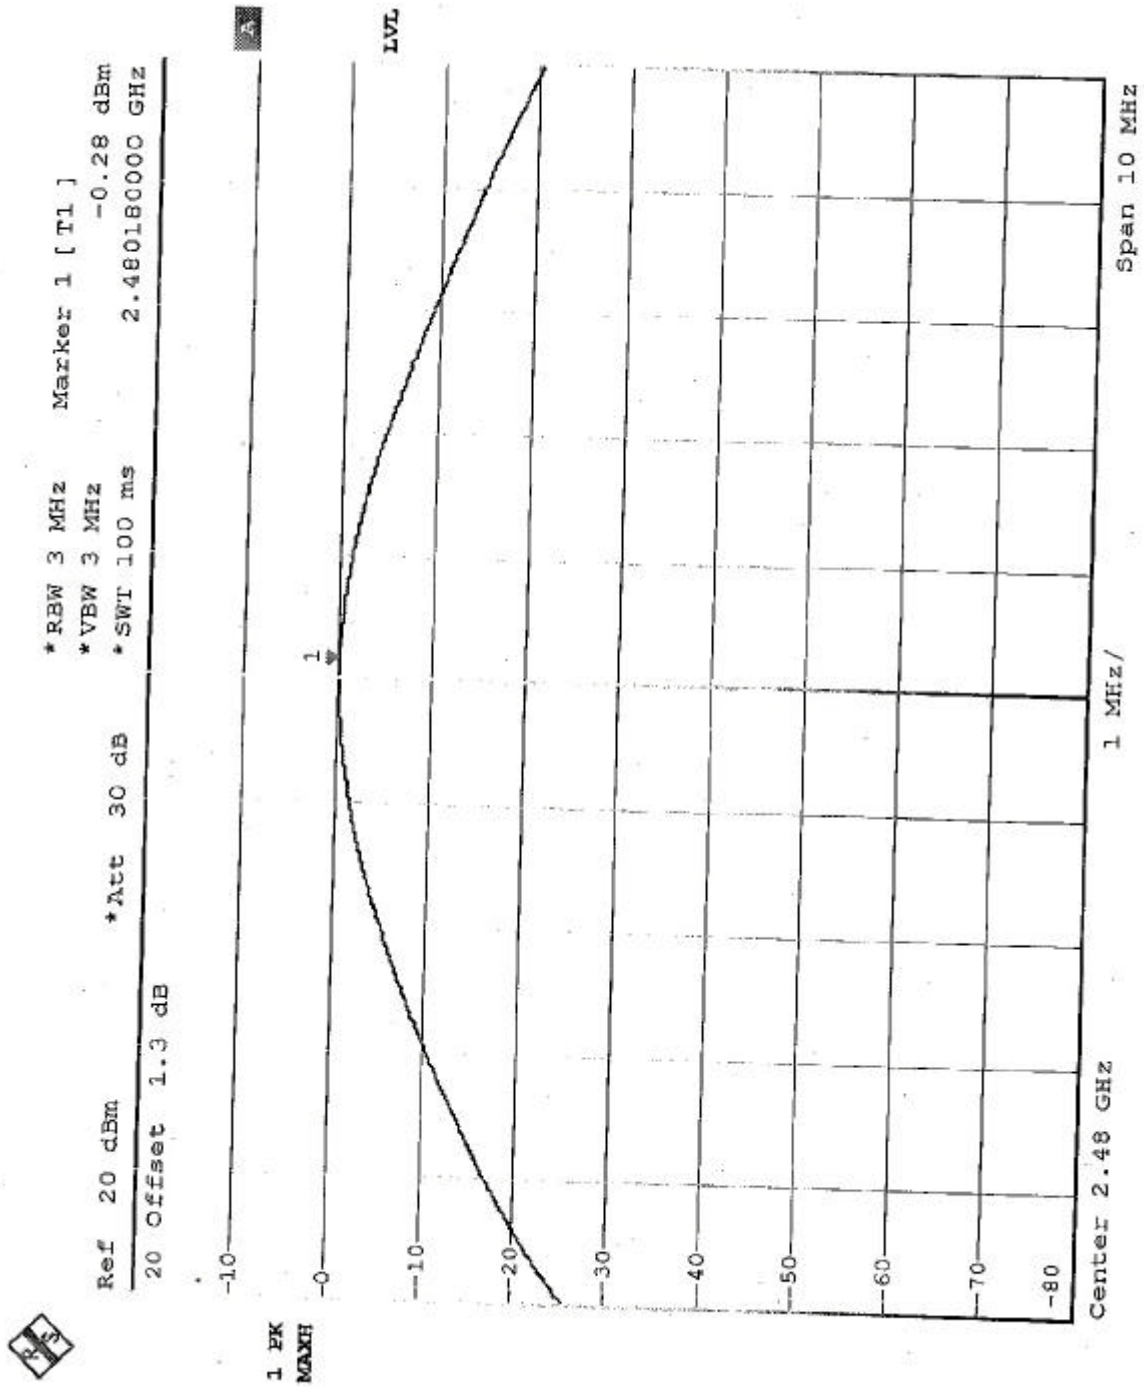

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2003
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2003
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2003
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Jul. 29, 2003
RF CABLE (Chaintek) 1GHz-20GHz	Ak 9515-D	001	Aug, 20.2003
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

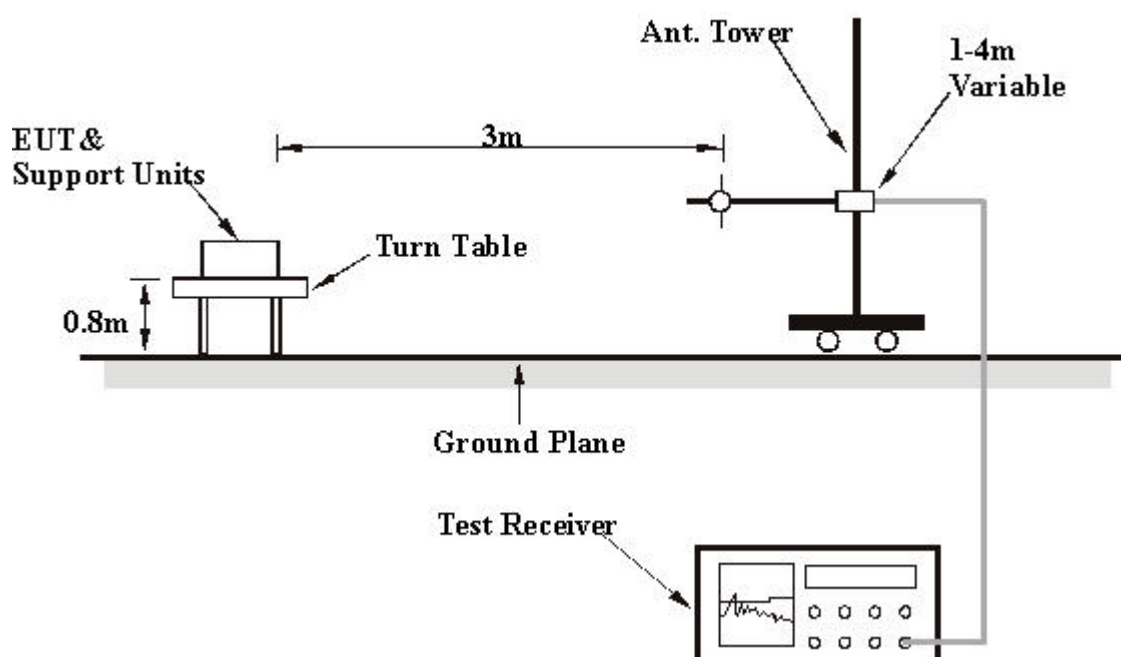

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

EUT	Bluetooth module	MODEL	MUBTC2-CLEVO
MODE	Channel 78	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 988 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	163.30	23.3 QP	43.50	-20.20	3.13 H	82	13.30	10.10
2	200.45	19.8 QP	43.50	-23.70	3.45 H	91	10.80	9.00
3	324.85	22.6 QP	46.00	-23.40	3.61 H	101	7.90	14.70
4	376.94	32.7 QP	46.00	-13.30	3.09 H	112	16.40	16.30
5	595.26	26.2 QP	46.00	-19.80	1.54 H	130	5.30	21.00
6	649.70	27.8 QP	46.00	-18.20	1.12 H	150	5.90	21.90
7	752.91	32.9 QP	46.00	-13.10	1.05 H	126	9.20	23.80
8	758.00	31.4 QP	46.00	-14.60	1.00 H	141	7.70	23.80
9	866.27	31.4 QP	46.00	-14.60	1.00 H	154	6.40	25.00
10	974.55	33.3 QP	54.00	-20.70	1.04 H	114	6.90	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.50	29.4 QP	40.00	-10.60	1.00 V	36	23.10	6.40
2	162.00	19.9 QP	43.50	-23.60	1.00 V	139	9.70	10.20
3	381.05	37.4 QP	46.00	-8.60	1.32 V	1	20.90	16.40
4	541.43	34.9 QP	46.00	-11.10	1.00 V	31	14.50	20.40
5	649.70	29.3 QP	46.00	-16.70	1.00 V	157	7.40	21.90
6	752.91	38.4 QP	46.00	-7.60	1.26 V	302	14.70	23.80
7	758.00	35.6 QP	46.00	-10.40	1.66 V	144	11.90	23.80
8	802.56	28.5 QP	46.00	-17.50	1.32 V	176	4.80	23.70
9	866.28	36.8 QP	46.00	-9.20	1.62 V	185	11.80	25.00
10	974.56	36.1 QP	54.00	-17.90	2.98 V	161	9.70	26.40

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.7.7 TEST RESULTS

EUT	Bluetooth module	MODEL	MUBTC2-CLEVO
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 988 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2369.00	42.6 PK	74.00	-31.40	1.32 H	345	12.00	30.70
2	*2402.00	90.3 PK			1.53 H	33	60.40	29.90
2	*2402.00	73.0 AV			1.53 H	33	43.20	30.70
3	4320.00	38.8 PK	74.00	-35.20	4.00 H	81	4.40	34.40
4	4804.00	39.8 PK	74.00	-34.20	1.92 H	231	3.60	36.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2369.00	39.4 PK	74.00	-34.60	2.01 V	294	8.70	30.70
2	*2402.00	84.1 PK			2.30 V	288	54.20	29.90
2	*2402.00	69.5 AV			2.30 V	288	39.60	30.70
3	4320.00	42.4 PK	74.00	-31.60	1.77 V	199	8.00	34.40
4	4804.00	39.5 PK	74.00	-34.50	2.04 V	201	3.40	36.10

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Bluetooth module	MODEL	MUBTC2-CLEVO
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 988 hPa	TESTED BY: Tony Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2345.00	34.5 PK	74.00	-39.50	1.98 H	71	4.00	30.50
2	*2441.00	87.7 PK			1.87 H	211	57.70	30.00
2	*2441.00	72.1 AV			1.87 H	211	42.10	30.50
3	2495.00	36.1 PK	74.00	-37.90	1.61 H	30	2.70	33.30
4	4320.00	38.6 PK	74.00	-35.40	2.15 H	260	4.10	34.40
5	4882.00	39.9 PK	74.00	-34.10	1.18 H	5	3.40	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2332.00	33.3 PK	74.00	-40.70	1.54 V	133	2.80	30.50
2	*2441.00	84.6 PK			2.17 V	214	54.60	30.00
2	*2441.00	69.2 AV			2.17 V	214	39.20	30.50
3	2496.00	34.9 PK	74.00	-39.10	1.27 V	103	2.10	32.80
4	4320.00	42.3 PK	74.00	-31.70	2.00 V	197	7.90	34.40
5	4882.00	40.7 PK	74.00	-33.30	1.25 V	117	4.20	36.50

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{Db}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Bluetooth module	MODEL	MUBTC2-CLEVO
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 988 hPa	TESTED BY: Tony Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2351.00	33.1 PK	74.00	-40.90	1.19 H	245	2.50	30.60
2	*2480.00	91.5 PK			1.92 H	182	61.40	30.10
2	*2480.00	73.3 AV			1.92 H	182	43.20	30.60
3	2495.00	42.1 PK	74.00	-31.90	1.14 H	180	8.80	33.30
4	4320.00	38.8 PK	74.00	-35.20	1.84 H	276	4.40	34.40
5	4960.00	39.8 PK	74.00	-34.20	1.58 H	196	2.90	36.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2352.00	34.2 PK	74.00	-39.80	2.02 V	257	3.60	30.60
2	*2480.00	87.5 PK			1.86 V	273	57.40	30.10
2	*2480.00	71.9 AV			1.86 V	273	41.80	30.60
3	2496.00	36.6 PK	74.00	-37.40	1.82 V	214	3.80	32.80
4	4320.00	40.2 PK	74.00	-33.80	1.50 V	237	5.80	34.40
5	4960.00	40.9 PK	74.00	-33.10	1.31 V	215	4.10	36.80

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following first page shows 50.03dB delta between carrier maximum power and local maximum emission in restrict band (2.386GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.7.7 is 68.1dBuV/m, so the maximum field strength in restrict band is $73 - 50.03 = 22.97$ dBuV/m which is under 54 dBuV/m limit.

NOTE: The band edge emission plot on the following second page shows 40.83dB delta between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.7 is 73.3dBuV/m, so the maximum field strength in restrict band is $73.3 - 40.83 = 32.47$ dBuV/m which is under 54 dBuV/m limit.

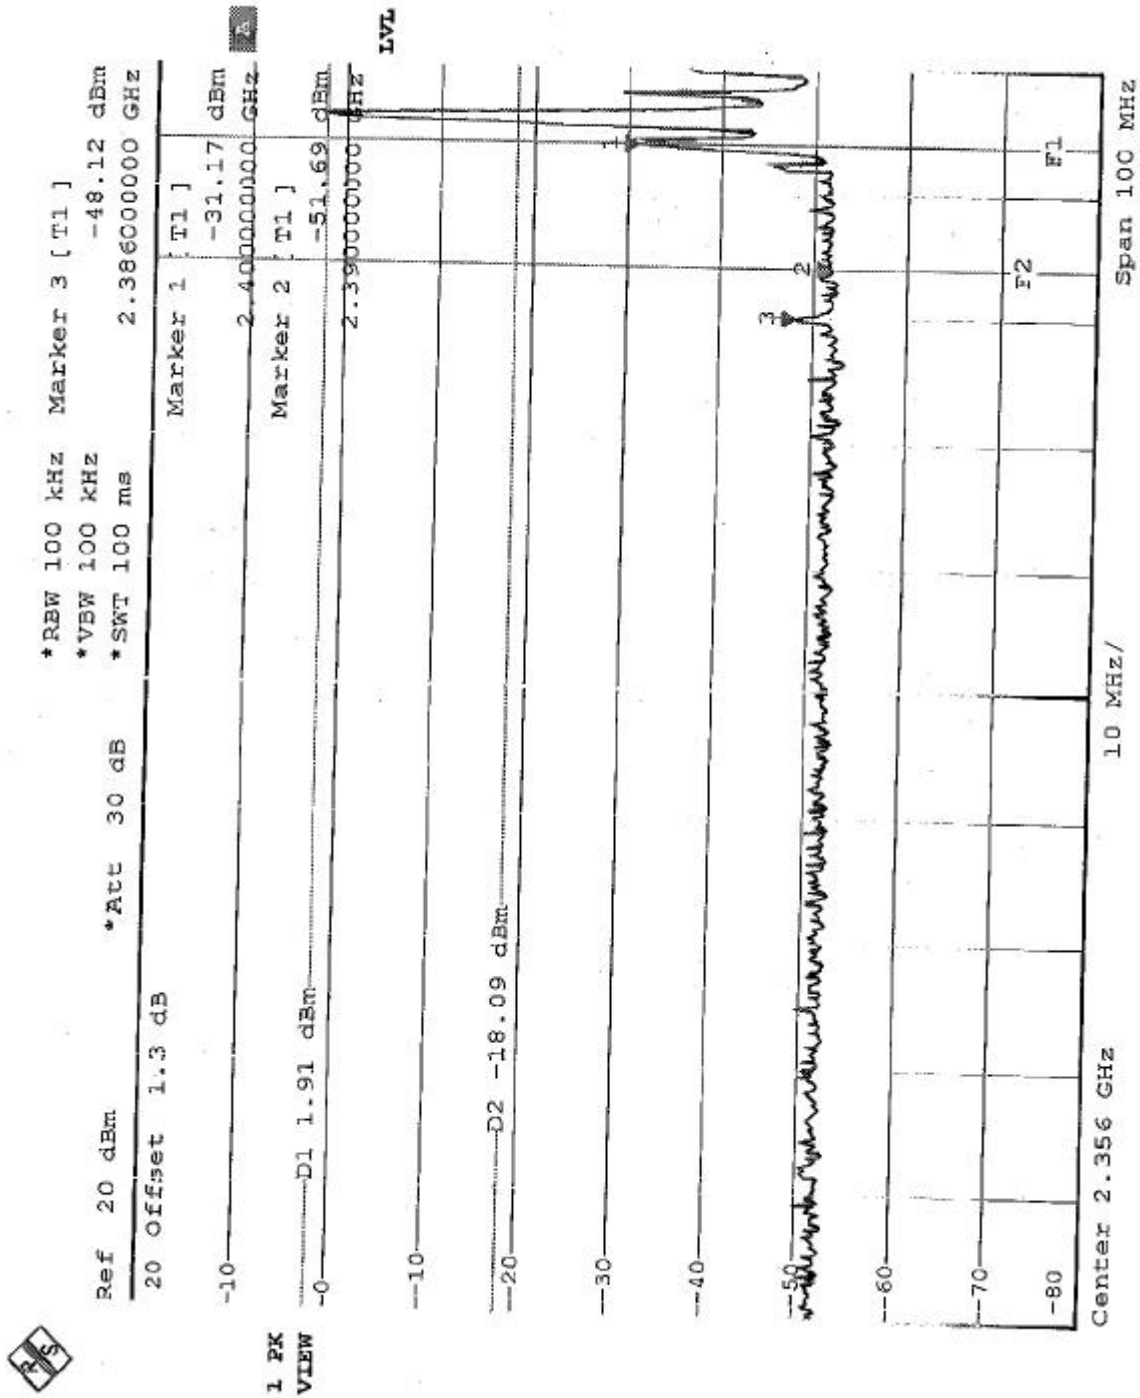

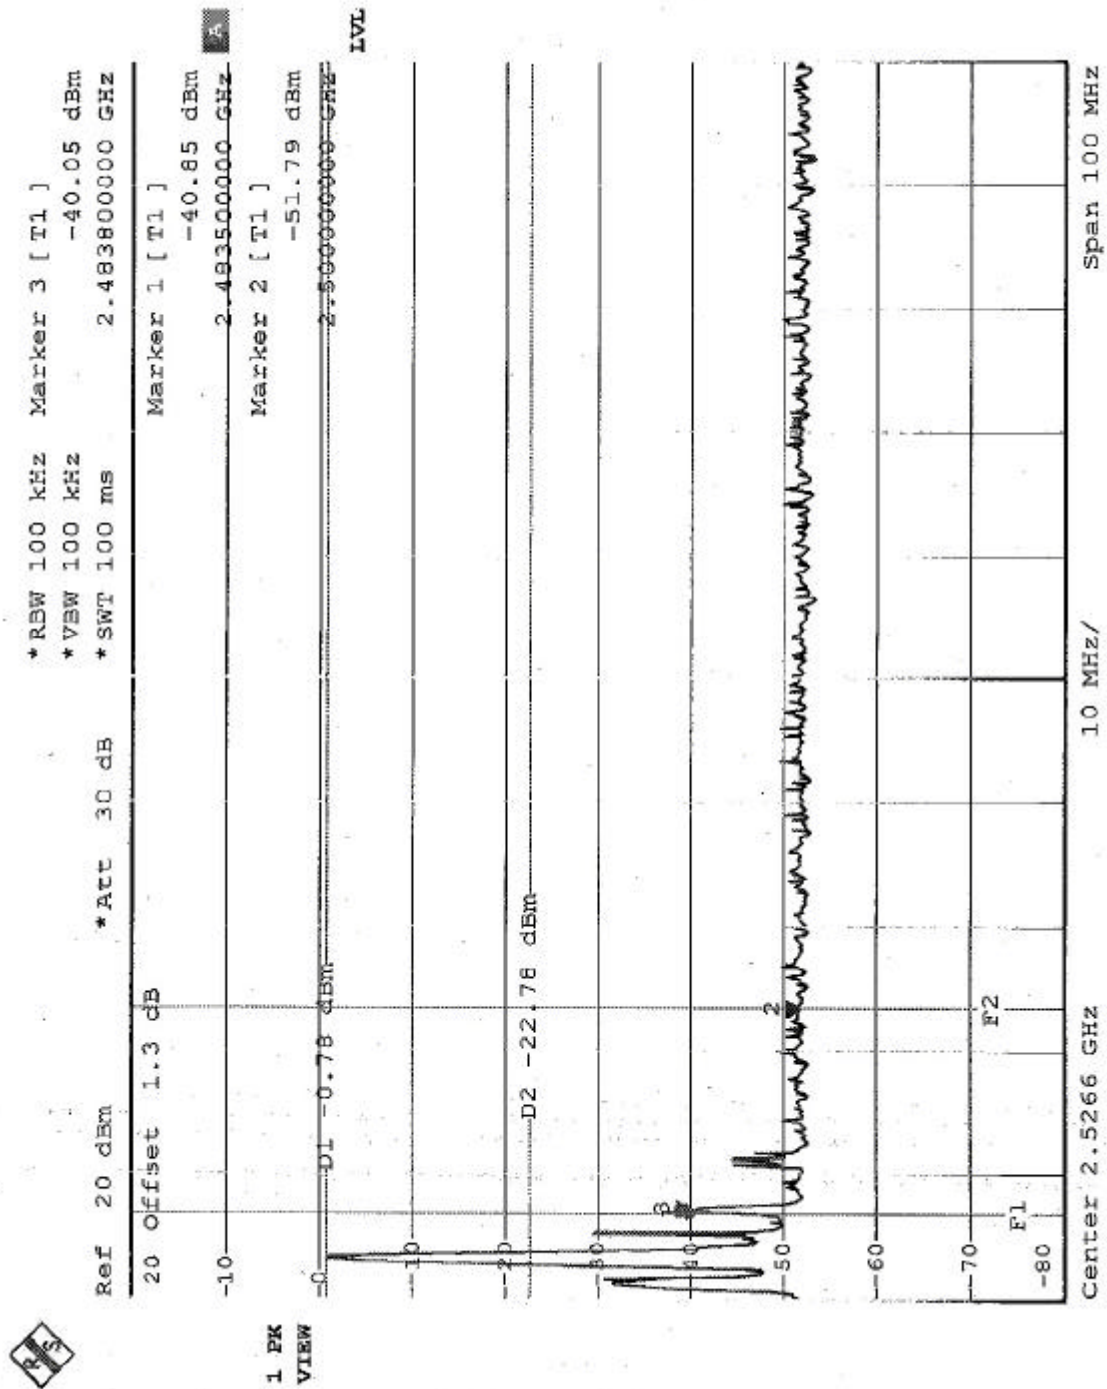



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA Antenna and used I-PEX connector. The maximum Gain of this antenna is only 2.04dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.