

TEST REPORT

Part 15 Subpart C 15.247

Equipment under test SMART HOME CAMERA

Model name SNH-V6410PN

FCC ID NLMSNHV6410PN

Applicant Hanwha Techwin Co., Ltd.

Manufacturer Tianjin Samsung Techwin Opto-Electronic Co., Ltd.

Date of test(s) 2016.02.18 ~2016.03.08

Date of issue 2016.03.08

Issued to

Hanwha Techwin Co., Ltd.

1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, South Korea

Tel: +82-70-7147-8361 / Fax: +82-31-8108-3717


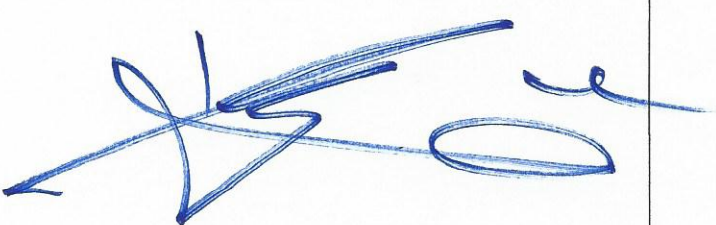
Issued by

KES Co., Ltd.

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,
Gyeonggi-do, 431-716, Korea

473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Kwang-yeol Choo Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0028-R1
Page (2) of (55)

Revision history

Revision	Date of issue	Test report No.	Description
-	2016.03.04	KES-RF-16T0028	Initial
1	2016.03.08	KES-RF-16T0028-R1	Retest a Conducted spurious emissions & band edge and a 6 dB bandwidth

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Frequency/channel operations	4
1.3	Device information	4
2.	Summary of tests	5
3.	Test results	7
3.1	Radiated spurious emissions & band edge	7
3.2	Conducted spurious emissions & band edge	19
3.3.	6 dB bandwidth	32
3.4.	Peak Output power	40
3.5.	Power spectral density	42
3.6.	AC conducted emission	50
Appendix A.	Measurement equipment	53
Appendix B.	Test setup photo	54

1. General information

Applicant: Hanwha Techwin Co., Ltd.
 Applicant address: 1204, Changwon-daero, Seongsan-gu, Changwon-si
 Gyeongsangnam-do, South Korea
 Test site: KES Co., Ltd.
 Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea
 Rule part(s): Part 15.247
 Test device serial No.: Production Pre-production Engineering
 Application purpose: Original grant Class I permissive change Class II permissive change

1.1. EUT description

Equipment under test SMART HOME CAMERA
 Frequency range 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20)
 2 422 MHz ~ 2 452 MHz (11n_HT40)
 Model: SNH-V6410PN
 Modulation technique DSSS, OFDM
 Number of channels 11
 Antenna specification PCB antenna & 1.7 dBi
 Power source AC 120V Adapter (Output : DC 5V / 2A)

1.2. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
1	2 412	11b/g/n_HT20
.	.	.
6	2 437	11b/g/n_HT20
.	.	.
11	2 462	11b/g/n_HT20

Ch.	Frequency (MHz)	Mode
3	2 422	11n_HT40
.	.	.
6	2 437	11n_HT40
.	.	.
9	2 452	11n_HT40

1.3 Device information

- The device duty cycles are as follows:
 802.11b/g/n_HT20, 40 ≥ 98 percent.



2. Summary of tests

Reference	Parameter	Test results
15.205 15.209	Radiated spurious emission and band edge	Pass
15.247(d)	Conducted spurious emission and band edge	Pass
15.247(a)(2)	6 dB bandwidth	Pass
15.247(b)(3)	Peak output power	Pass
15.247(e)	Power spectral density	Pass
15.207	AC conducted emissions	Pass

Test procedures;

The EUT was tested per the guidance of ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing, the guidance provided in KDB 558074_v03r04 were used in the measurement of the EUT.

Pre-scanned maximum output power

Preliminary tests were performed in different data rate as below table and the highest power data rates (802.11b, 802.11g, 802.11n_HT20, 802.11n_HT40) were chosen for full test in the following section to demonstrate compliance to the FCC limit line.

802.11b

channel	Detector mode	Conducted power(dB m)			
		Data rate(Mbps)			
		1	2	5.5	11
Low	Peak	15.61	11.75	15.50	15.40
Middle		17.06	13.23	17.01	16.89
High		16.95	13.00	16.93	16.85

802.11g

channel	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		6	9	12	18	24	36	48	54
Low	Peak	21.50	21.37	21.54	21.10	21.59	21.52	21.35	21.41
Middle		20.48	20.40	20.65	20.13	20.82	20.76	20.36	20.47
High		20.25	20.23	20.37	20.01	20.45	20.43	20.29	20.32

802.11n(HT20)

Test mode	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Low	Peak	20.29	19.80	20.61	19.26	19.59	20.23	21.15	19.94
Middle		20.09	19.50	20.18	19.21	19.46	19.86	20.33	19.62
High		19.97	19.82	20.08	19.63	19.80	19.98	20.25	19.83

802.11n(HT40)

channel	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Low	Peak	18.82	18.52	19.15	19.82	19.44	19.67	18.83	18.16
Middle		19.03	18.88	19.35	19.81	19.48	19.74	18.91	19.01
High		19.36	19.33	19.55	19.91	19.75	19.87	19.22	19.12


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3. Test results


3.1 Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

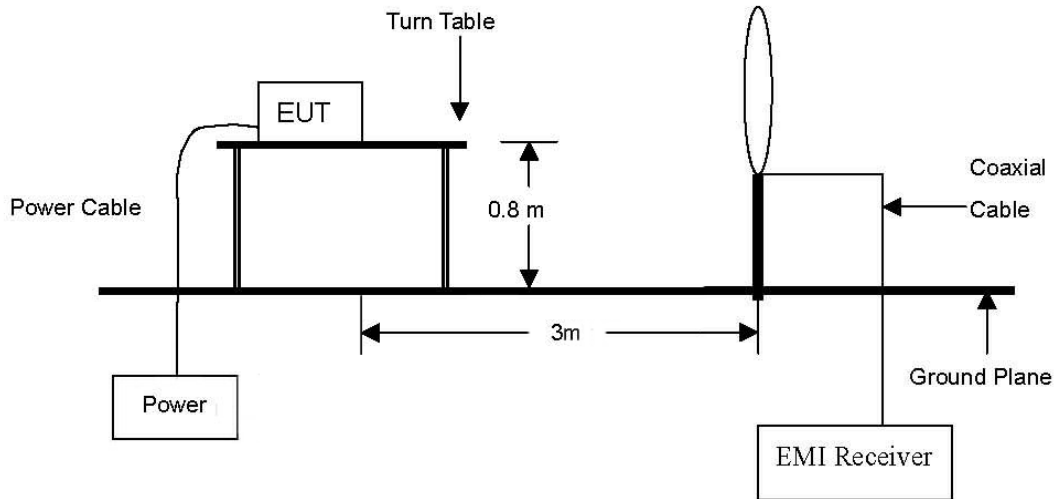

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

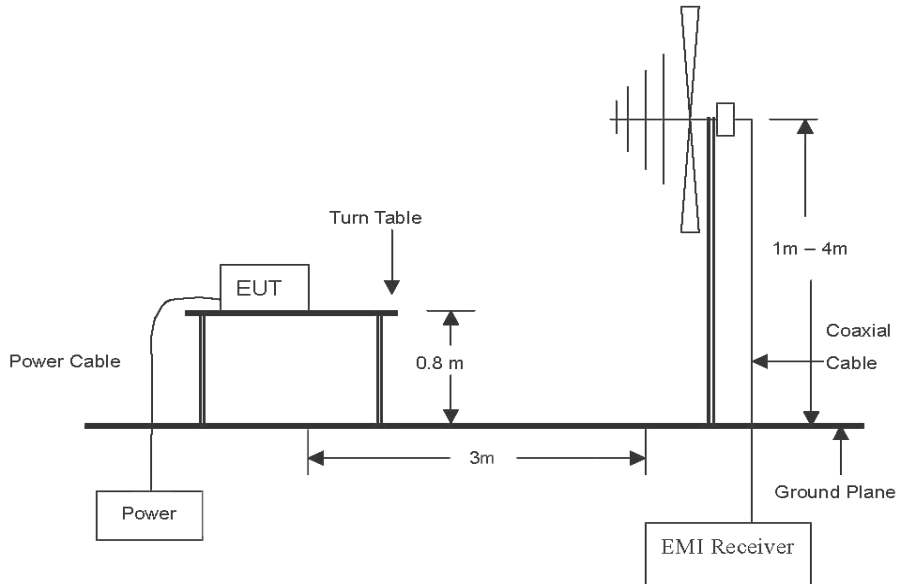

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

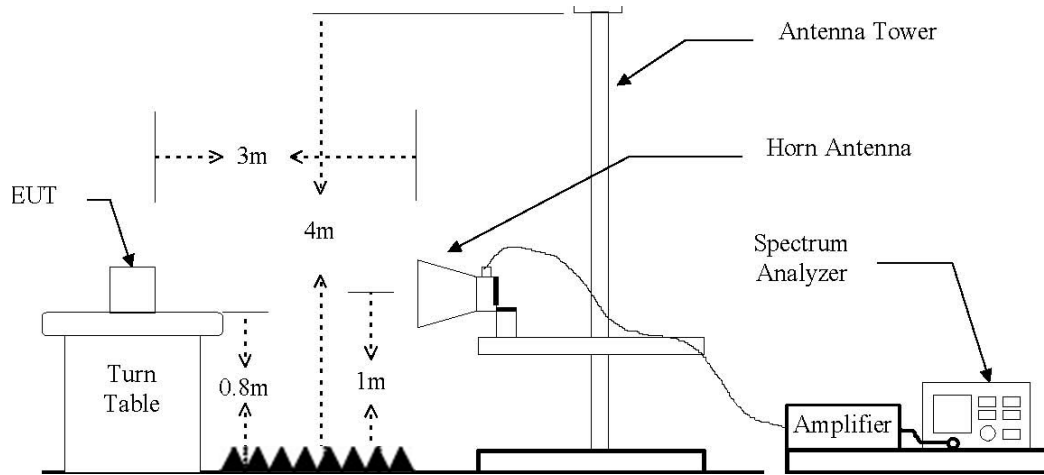

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074_v03r04 and ANSI C63.10-2009

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site or open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet

Note.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Average Field Strength Measurements per Section 12.2.5.1

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.

Set RBW = 1 MHz.

Set VBW = 3 MHz ($\geq 3 \times$ RBW).

Set detector = power average (RMS).

Set sweep time = auto.

Trace (RMS) averaging was performed over at least 100 traces.

2. Peak Field Strength Measurements per Section 12.2.4

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.

Set RBW = 1 MHz.

Set VBW = 3 MHz ($\geq 3 \times$ RBW).

Set detector = Peak.

Set sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V}/\text{m}$)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test results (Below 30 MHz)

Channel: 01 / 802.11g
 Operating frequency: 2 412 MHz (Worst case)
 Distance of measurement: 3 meter

Frequency (MHz)	Level (dB μ V)	Ant. Pol.	Correction factors (dB/m)	F _a (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No emission has been detected							

Test results (Below 1 000 MHz)

Channel: 01 / 802.11g
 Operating frequency: 2 412 MHz (Worst case)
 Distance of measurement: 3 meter

Frequency (MHz)	Level (dB μ V)	Ant. Pol.	Correction factors (dB/m)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
130.88	15.68	H	12.55	28.23	43.5	15.27
192.96	16.13	V	11.30	27.43	43.5	16.07
246.31	13.76	V	12.78	26.54	46.0	19.46
350.10	21.68	H	16.06	37.74	46.0	8.26
400.54	17.33	H	17.37	34.7	46.0	11.30
404.42	13.15	V	17.47	30.62	46.0	15.38

Note.

1. All spurious emission at channels are almost the same below 1 GHz, so that Low channel was chosen at representative in final test.
2. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + F_a(dB)
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



Test results (Above 1 000 MHz)

Mode: 802.11b
Distance of measurement: 3 meter
Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2389.36	60.51	Peak	H	29.09	-30.05	59.56	74.00	14.44
2389.36	37.64	Avg	H	29.09	-30.05	36.69	54.00	17.31
2389.84	49.39	Peak	V	29.10	-30.05	48.44	74.00	25.56
2388.05	37.12	Avg	V	29.09	-30.05	36.16	54.00	17.84
4824.19	40.41	Peak	H	33.88	-25.66	48.62	74.00	25.38
4824.23	40.03	Peak	V	33.88	-25.66	48.25	74.00	25.75

Mode: 802.11b
Distance of measurement: 3 meter
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
4833.94	40.89	Peak	H	33.93	-25.64	49.17	74.00	24.83
4833.89	40.26	Peak	V	33.93	-25.64	48.54	74.00	25.46

Mode: 802.11b
 Distance of measurement: 3 meter
 Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2490.66	60.46	Peak	H	29.41	-29.82	60.05	74.00	13.95
2483.57	40.63	Avg	H	29.39	-29.84	40.18	54.00	13.82
2483.93	51.30	Peak	V	29.39	-29.84	50.85	74.00	23.15
2483.93	37.94	Avg	V	29.39	-29.84	37.49	54.00	16.51
4943.88	40.29	Peak	H	34.45	-25.38	49.36	74.00	24.64
4943.93	39.91	Peak	V	34.45	-25.38	48.98	74.00	25.02

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + or F_d(dB)
5. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
6. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
7. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



KES Co., Ltd.

C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0028-R1
Page (13) of (55)

Mode: 802.11g
Distance of measurement: 3 meter
Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2389.84	65.03	Peak	H	29.10	-30.05	64.08	74.00	9.92
2389.84	44.13	Avg	H	29.10	-30.05	43.18	54.00	10.82
2384.43	59.95	Peak	V	29.08	-30.06	58.97	74.00	15.03
2384.43	39.62	Avg	V	29.08	-30.06	38.64	54.00	15.36
4823.73	40.38	Peak	H	33.88	-25.67	48.59	74.00	25.41
4823.66	40.11	Peak	V	33.88	-25.67	48.32	74.00	25.68

Mode: 802.11g
Distance of measurement: 3 meter
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
4883.87	41.04	Peak	H	34.16	-25.52	49.68	74.00	24.32
4883.71	40.53	Peak	V	34.16	-25.52	49.17	74.00	24.83

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



Mode: 802.11g
Distance of measurement: 3 meter
Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2483.57	71.73	Peak	H	29.39	-29.84	71.28	74.00	2.72
2483.57	43.22	Avg	H	29.39	-29.84	42.77	54.00	11.23
2483.57	71.18	Peak	V	29.39	-29.84	70.73	74.00	3.27
2483.57	39.89	Avg	V	29.39	-29.84	39.44	54.00	14.56
4944.25	40.40	Peak	H	34.45	-25.38	49.47	74.00	24.53
4944.31	40.14	Peak	V	34.45	-25.38	49.21	74.00	24.79

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + or F_d(dB)
5. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
6. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
7. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



KES Co., Ltd.

C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0028-R1
Page (15) of (55)

Mode: 802.11n_HT20
Distance of measurement: 3 meter
Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2378.06	59.51	Peak	H	29.06	-30.07	58.50	74.00	15.50
2378.06	38.78	Avg	H	29.06	-30.07	37.77	54.00	16.23
2389.84	58.64	Peak	V	29.10	-30.05	57.69	74.00	16.31
2389.84	37.92	Avg	V	29.10	-30.05	36.97	54.00	17.03
4823.69	40.60	Peak	H	33.88	-25.67	48.81	74.00	25.19
4823.71	40.34	Peak	V	33.88	-25.67	48.55	74.00	25.45

Mode: 802.11n_HT20
Distance of measurement: 3 meter
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
4884.16	40.18	Peak	H	34.17	-25.52	48.82	74.00	25.18
4884.08	39.98	Peak	V	34.17	-25.52	48.62	74.00	25.38

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

Mode: 802.11n_HT20
 Distance of measurement: 3 meter
 Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2483.57	70.57	Peak	H	29.39	-29.84	70.12	74.00	3.88
2483.57	41.23	Avg	H	29.39	-29.84	40.78	54.00	13.22
2483.57	65.22	Peak	V	29.39	-29.84	64.77	74.00	9.23
2483.57	38.63	Avg	V	29.39	-29.84	38.18	54.00	15.82
4943.63	40.41	Peak	H	34.45	-25.38	49.48	74.00	24.52
4943.72	40.25	Peak	V	34.45	-25.38	49.32	74.00	24.68

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Field strength(dBμV/m) = Level(dBμV) + Correction factors(dB/m) + Cable loss(dB) + or F_d(dB)
5. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
6. Margin(dB) = Limit(dBμV/m) - Field strength(dBμV/m)
7. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



KES Co., Ltd.

C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0028-R1
Page (17) of (55)

Mode: 802.11n_HT40
Distance of measurement: 3 meter
Operating frequency: 2 422 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2389.84	58.08	Peak	H	29.10	-30.05	57.13	74.00	16.87
2389.84	38.63	Avg	H	29.10	-30.05	37.68	54.00	16.32
2387.29	55.82	Peak	V	29.09	-30.05	54.86	74.00	19.14
2387.29	36.78	Avg	V	29.09	-30.05	35.82	54.00	18.18
4824.33	40.33	Peak	H	33.88	-25.66	48.55	74.00	25.45
4824.26	40.41	Peak	V	33.88	-25.66	48.63	74.00	25.37

Mode: 802.11n_HT40
Distance of measurement: 3 meter
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
4883.75	40.53	Peak	H	34.16	-25.52	49.17	74.00	24.83
4883.84	40.17	Peak	V	34.16	-25.52	48.81	74.00	25.19

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

Mode: 802.11n_HT40
 Distance of measurement: 3 meter
 Operating frequency: 2 452 MHz


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	Correction factors		Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				AFCL(dB)	DCF(dB)			
2484.00	59.08	Peak	H	29.39	-29.84	58.63	74.00	15.37
2484.00	39.89	Avg	H	29.39	-29.84	39.44	54.00	14.56
2483.71	58.44	Peak	V	29.39	-29.84	57.99	74.00	16.01
2483.71	37.94	Avg	V	29.39	-29.84	37.49	54.00	16.51
4944.27	40.28	Peak	H	34.45	-25.38	49.35	74.00	24.65
4944.33	39.95	Peak	V	34.45	-25.38	49.02	74.00	24.98

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + or F_d(dB)
5. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
6. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
7. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

3.2 Conducted spurious emissions & band edge

Test setup



Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074_v03r04, section 11.2&11.3,

1. Use the following spectrum analyzer setting

Center frequency: Low and high channel.

Set the span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz ($\geq 3x$ RBW).

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.



2. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))


Test results for conducted spurious emission

802.11b // Low channel

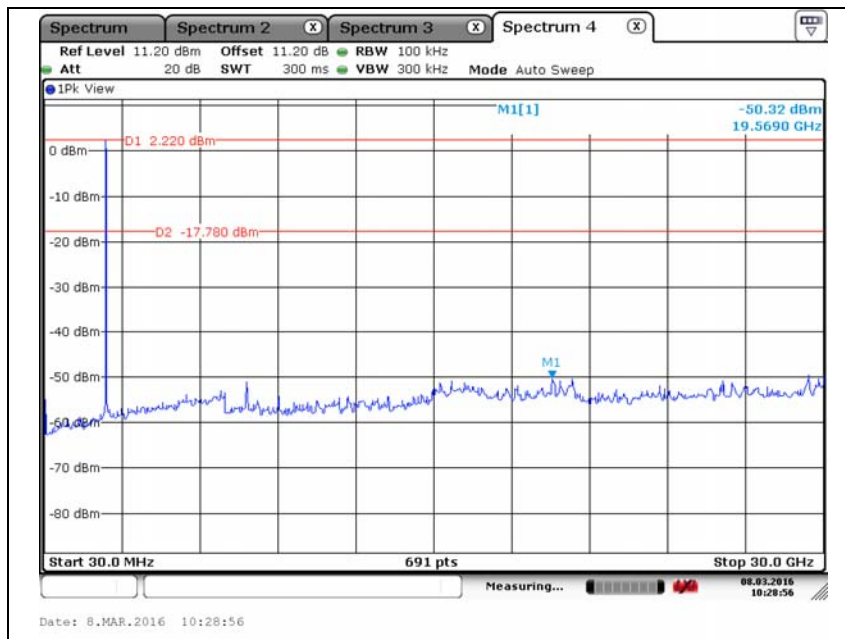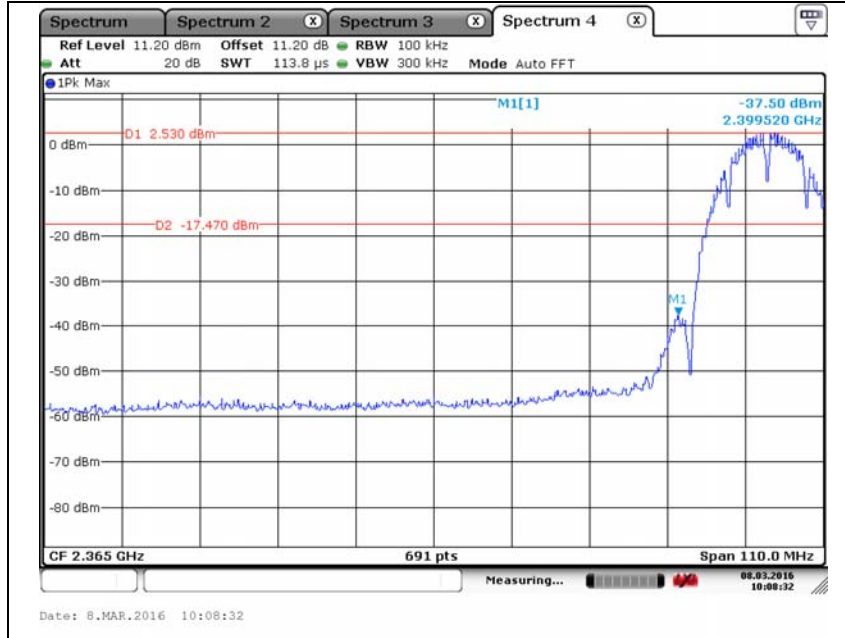



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11b // Middle channel

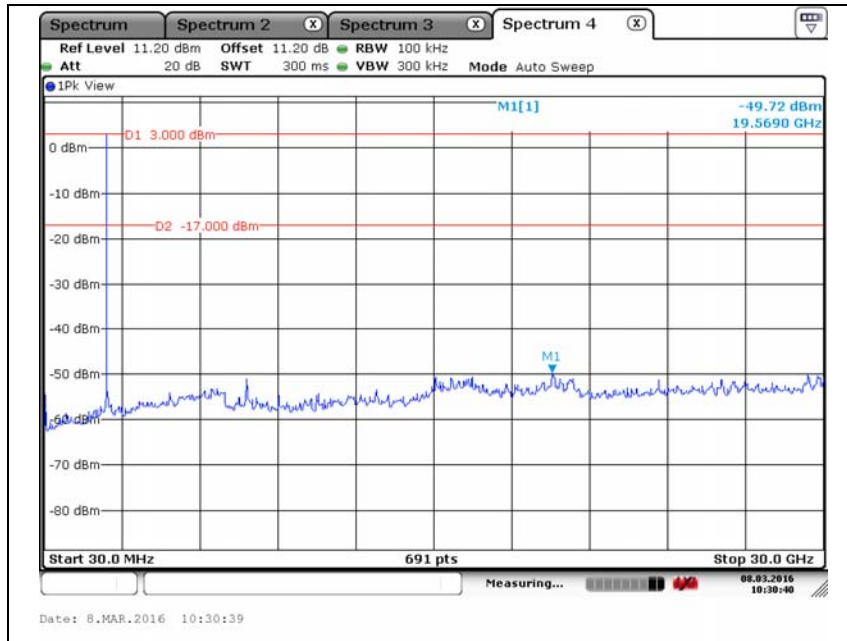



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11b // High channel

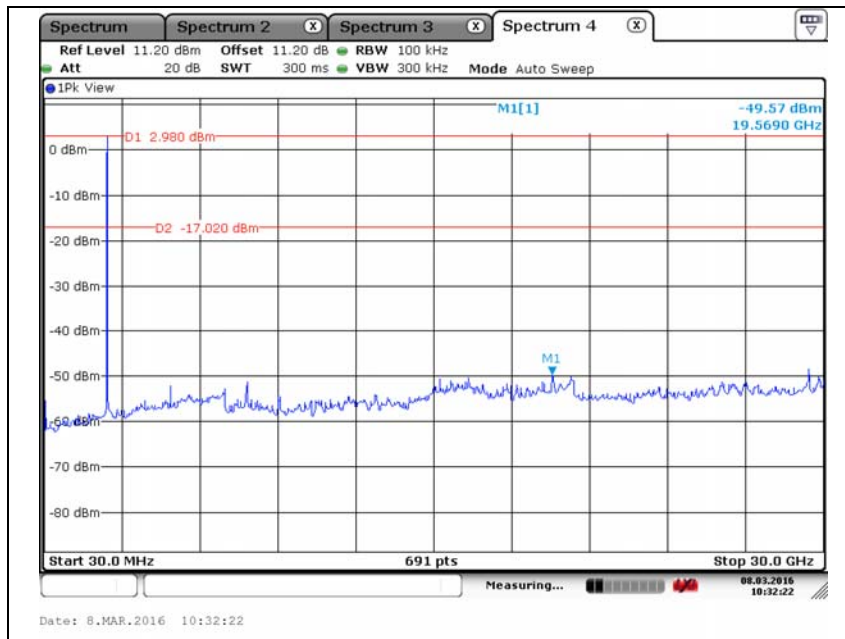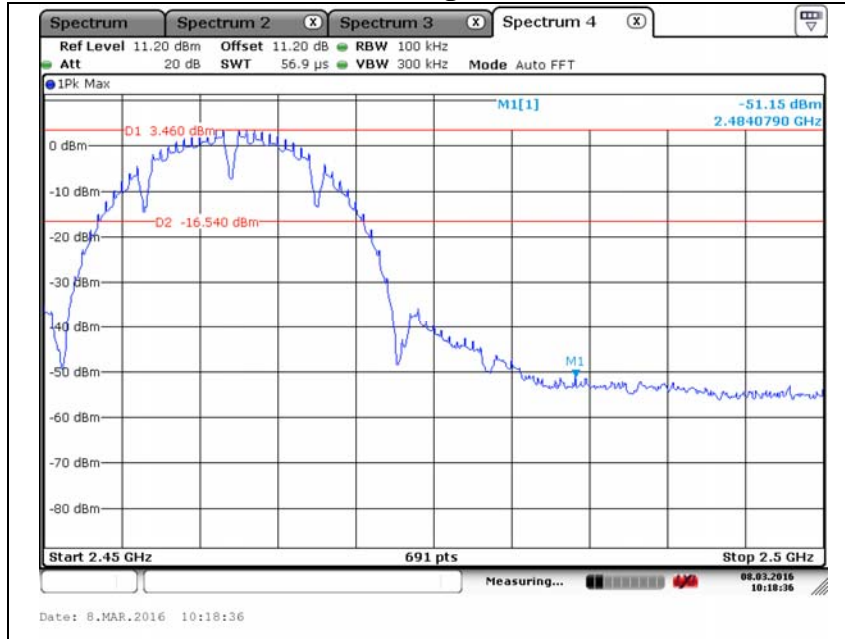


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11g // Low channel

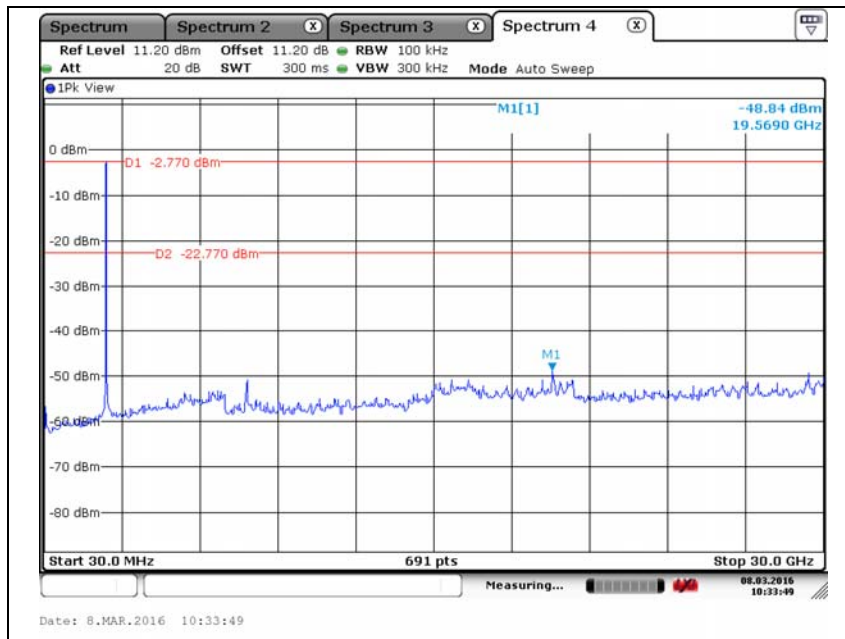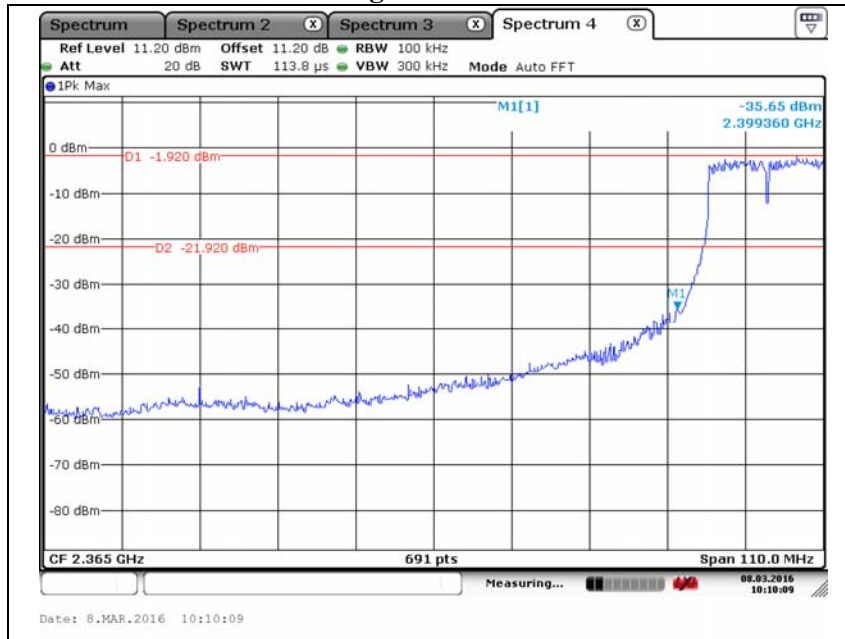



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11g // Middle channel

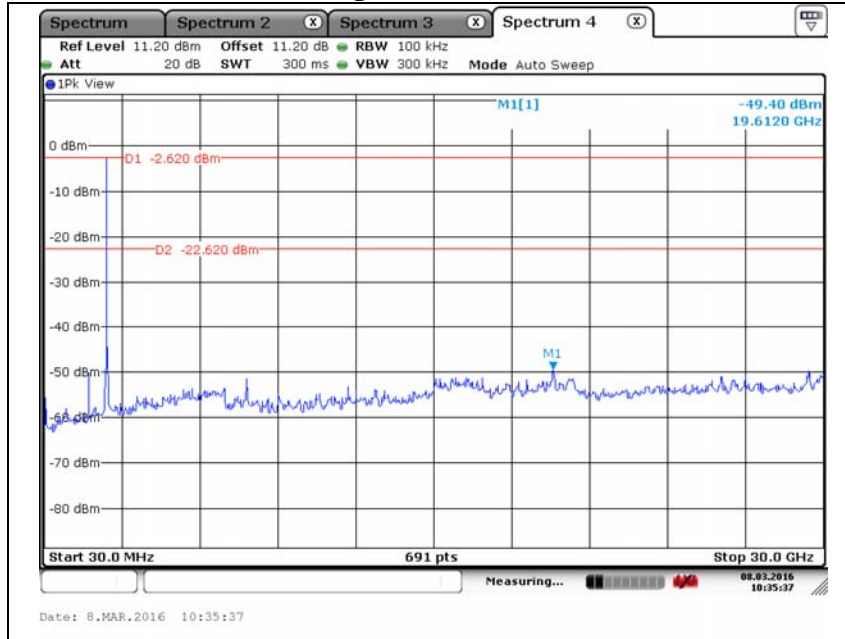



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

802.11g // High channel

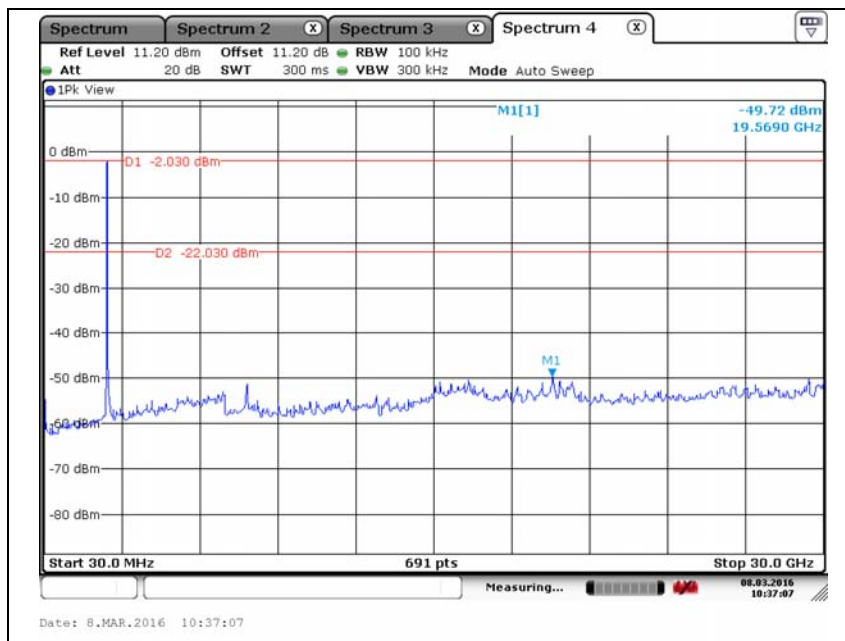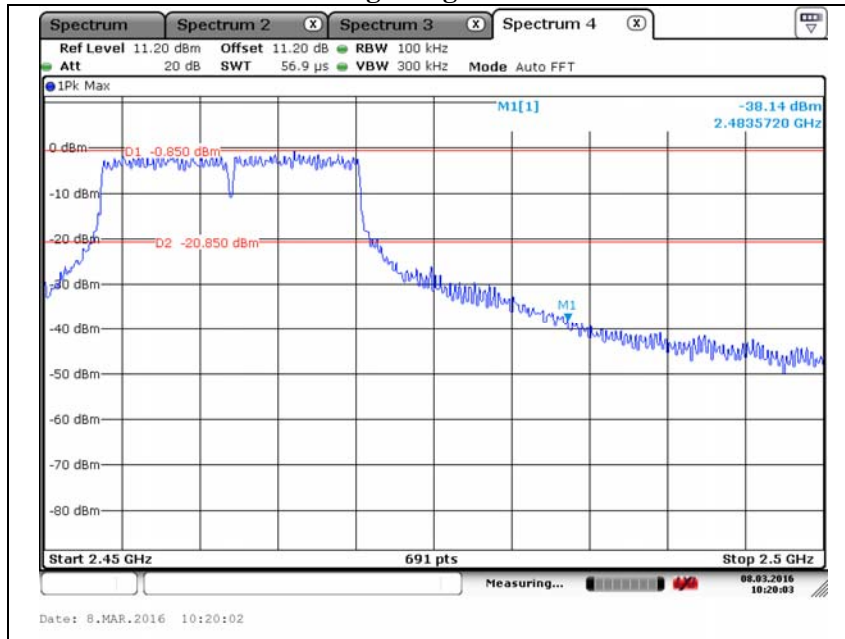


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // Low channel

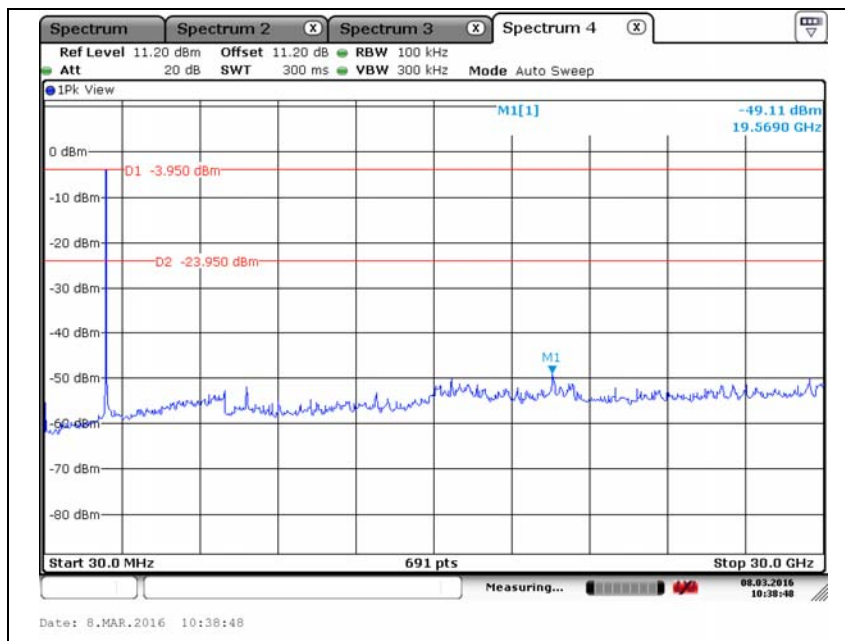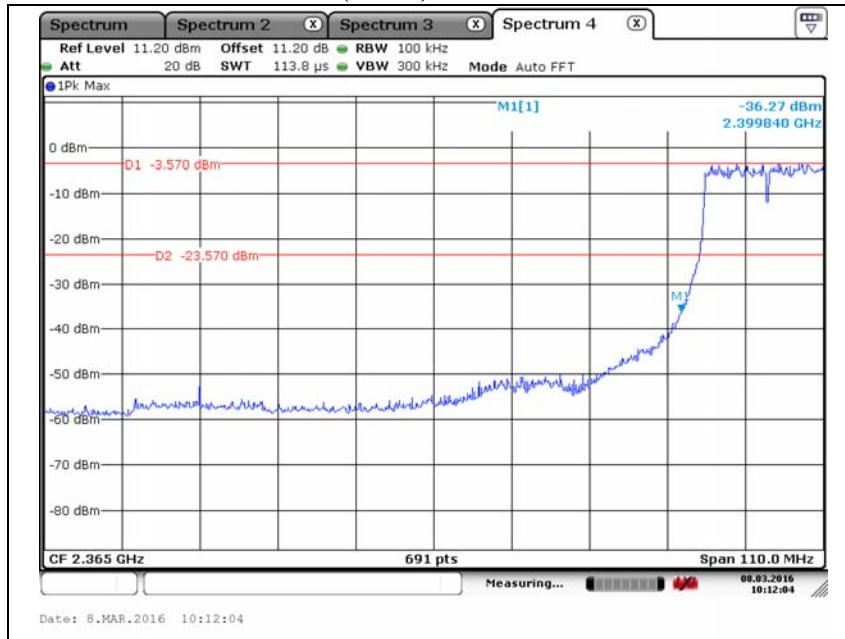



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // Middle channel

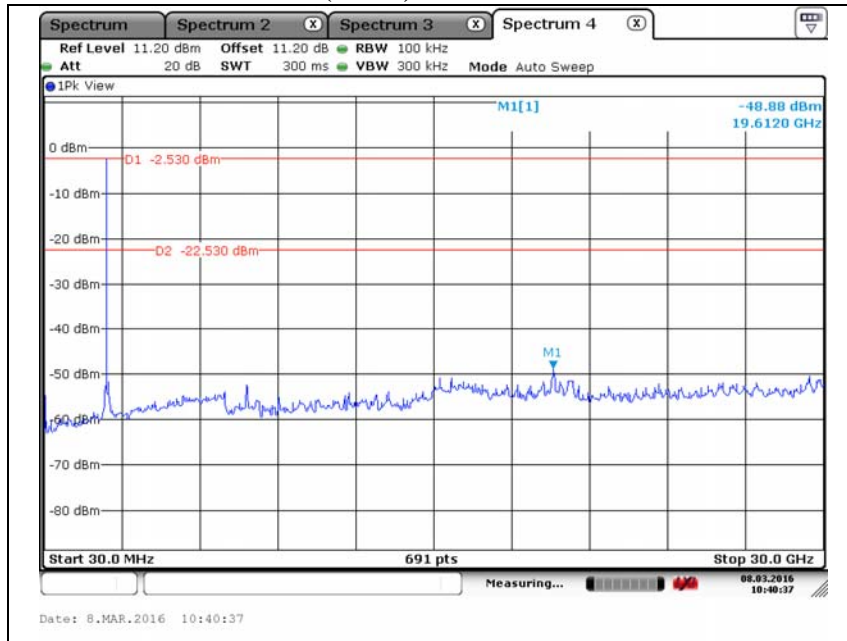



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

802.11n(HT20) // High channel

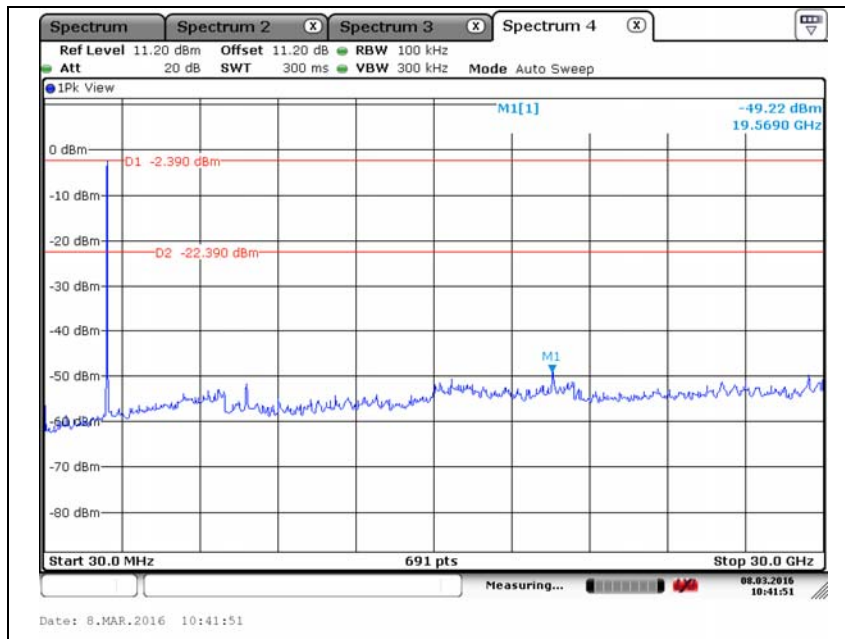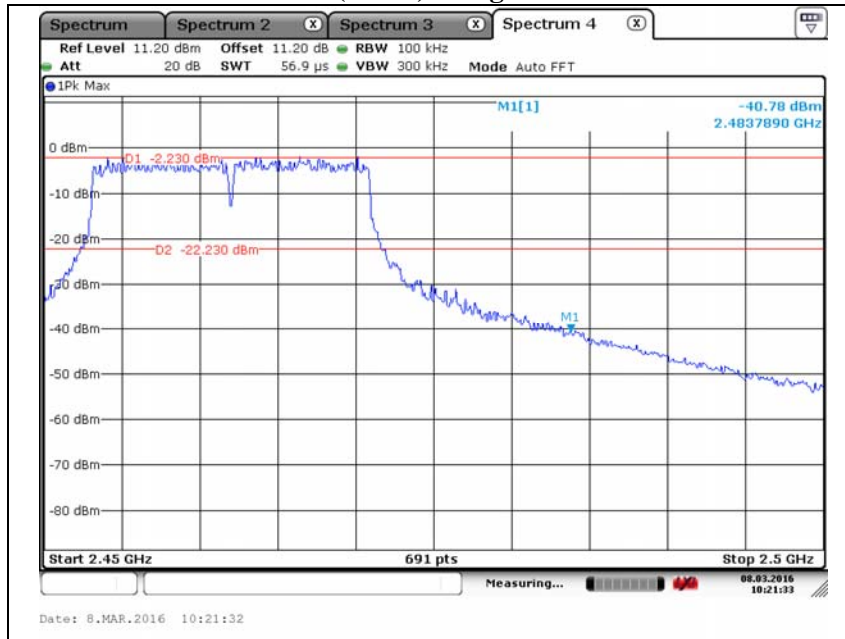


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT40) // Low channel

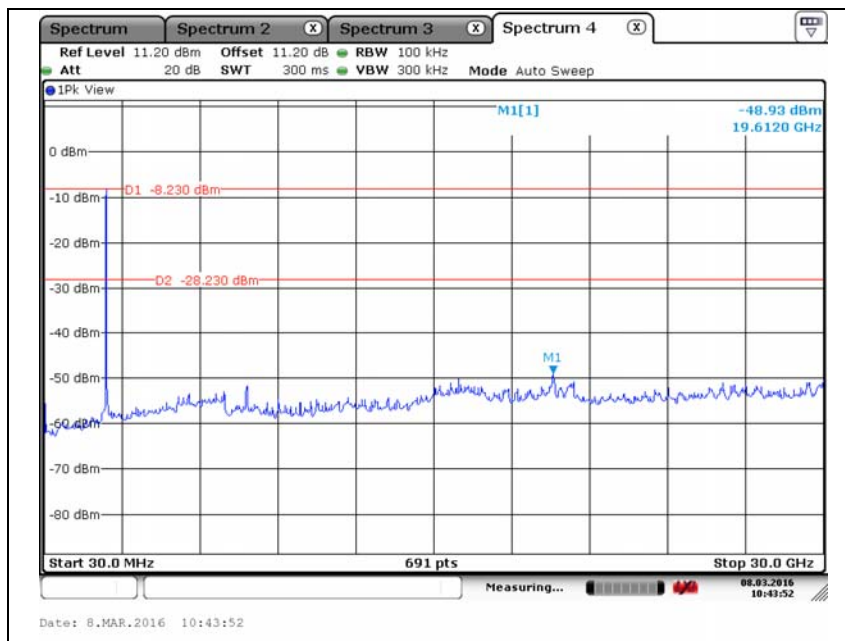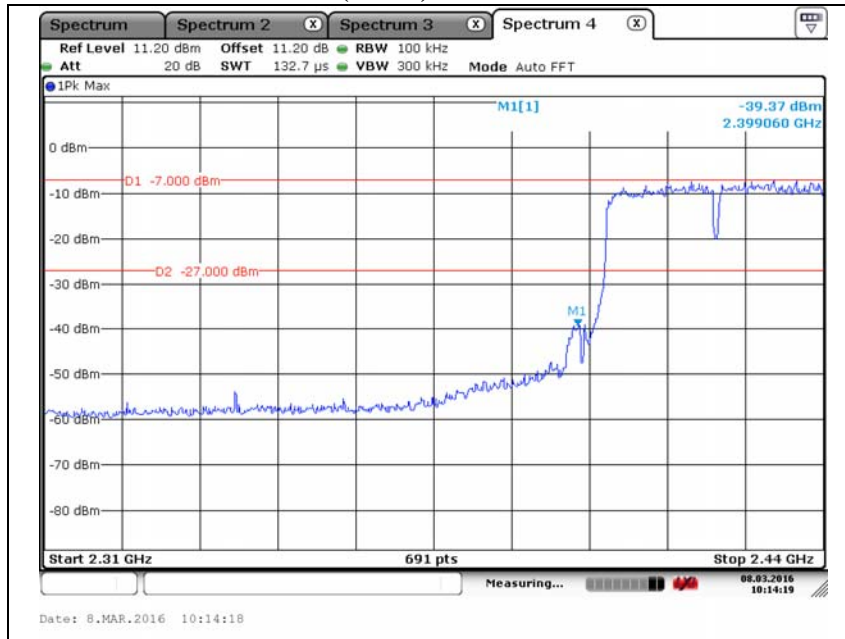



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT40) // Middle channel

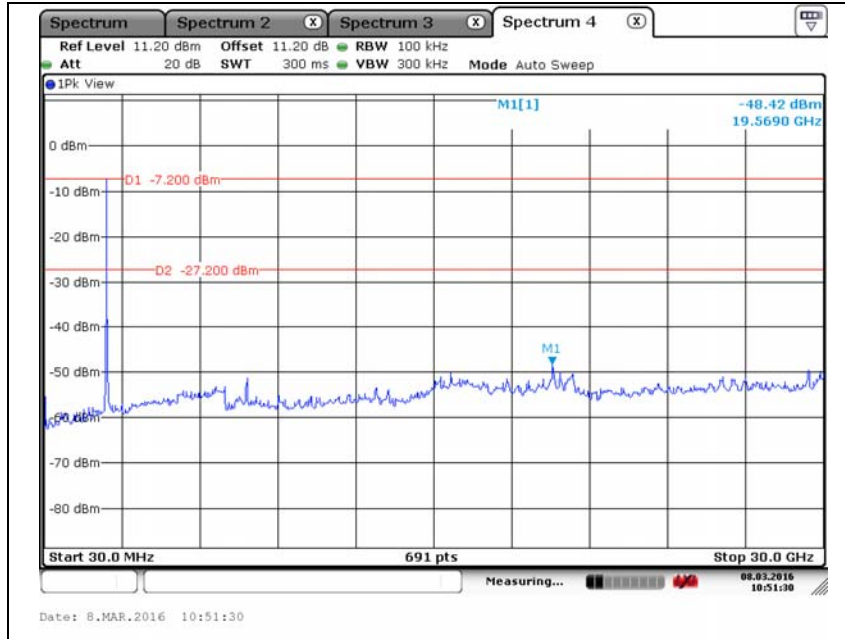

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


802.11n(HT40) // High channel

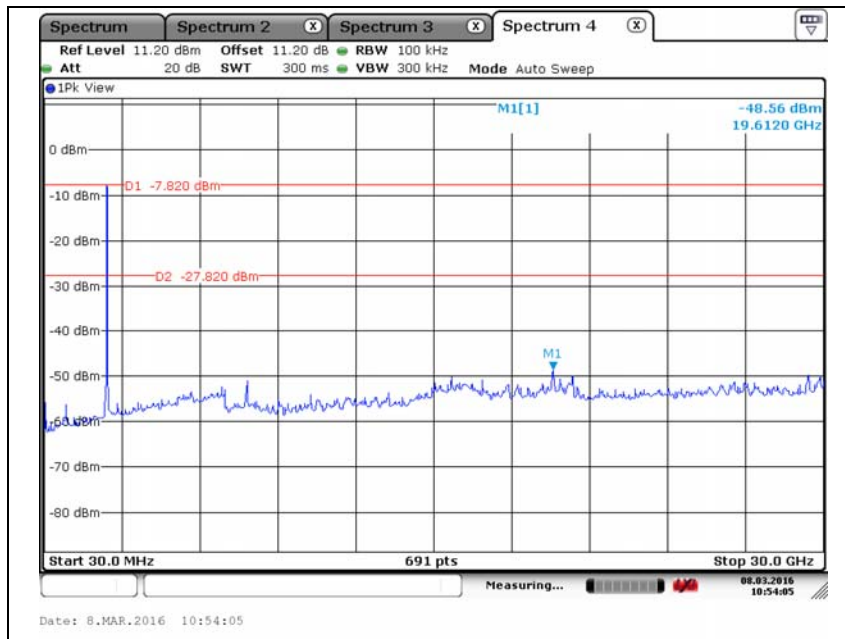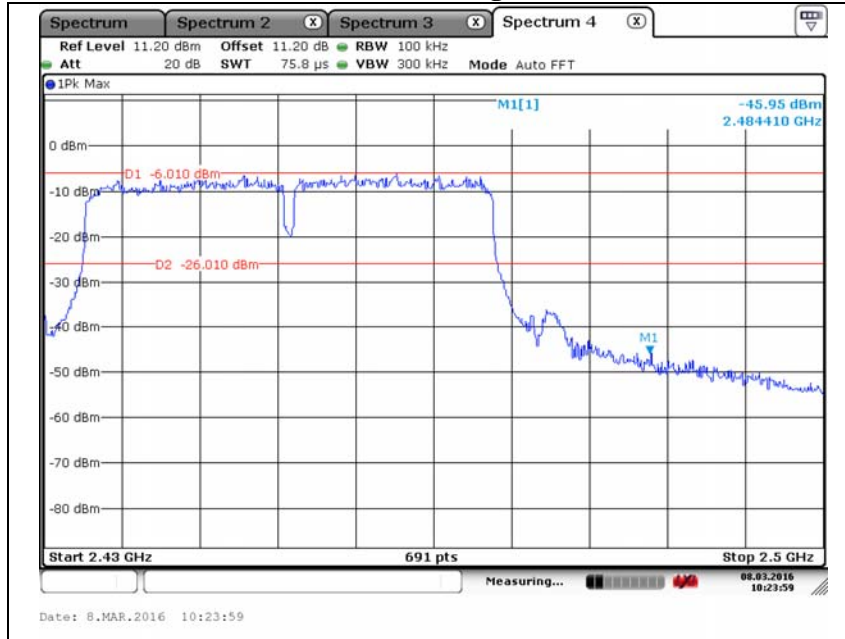

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.3. 6 dB bandwidth

Test setup



Test procedure

KDB 558074_v03r04 – section 8.1 option 1 or section 8.2 option 2.

Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth(VBW) $\geq 3 \times$ RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




Test results


Operation mode	Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
802.11b	2 412	10.07	0.5
	2 437	10.07	
	2 462	10.07	
802.11g	2 412	16.54	
	2 437	16.54	
	2 462	16.54	
802.11n (HT20)	2 412	17.76	
	2 437	17.80	
	2 462	17.80	
802.11n (HT40)	2 422	36.35	
	2 437	36.35	
	2 452	36.35	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

802.11b // Low channel

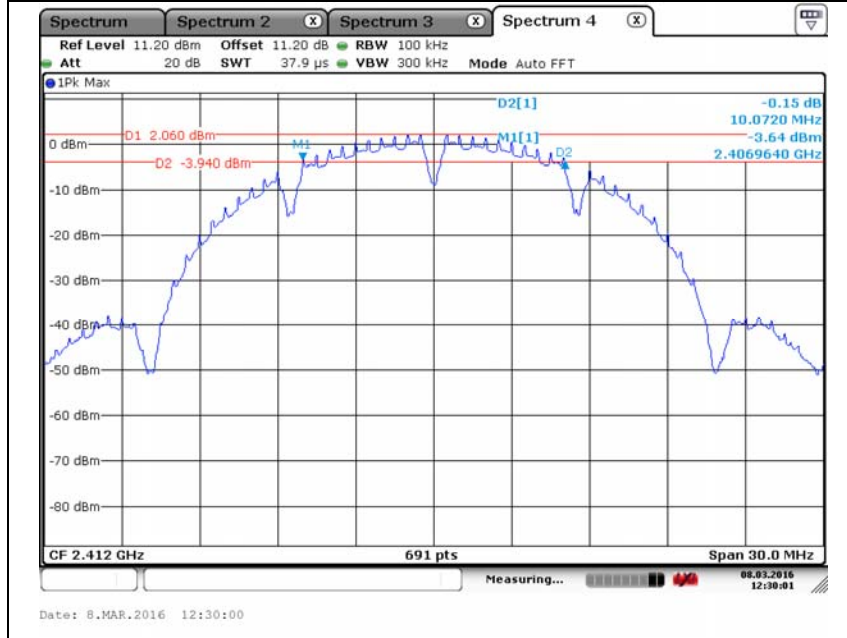


802.11b // Middle channel

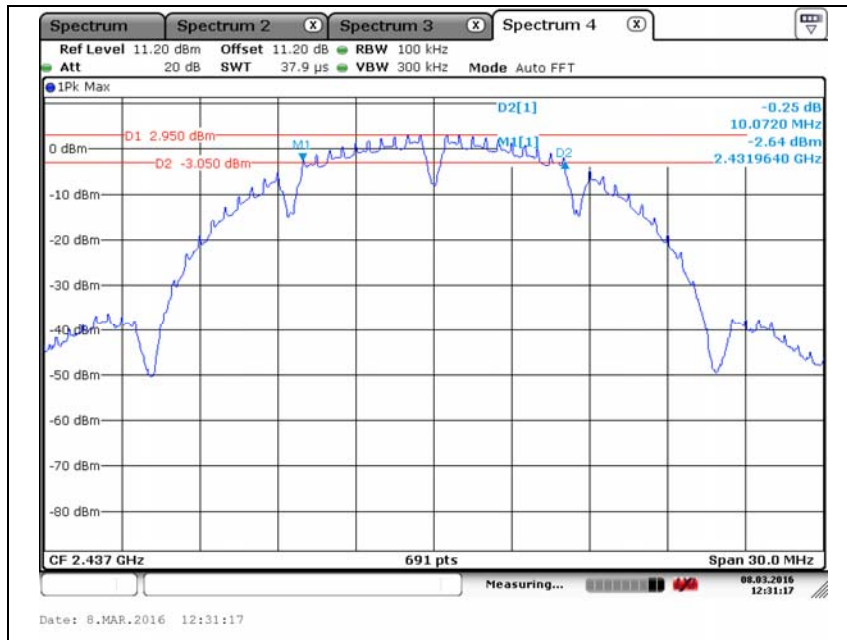


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11b // High channel

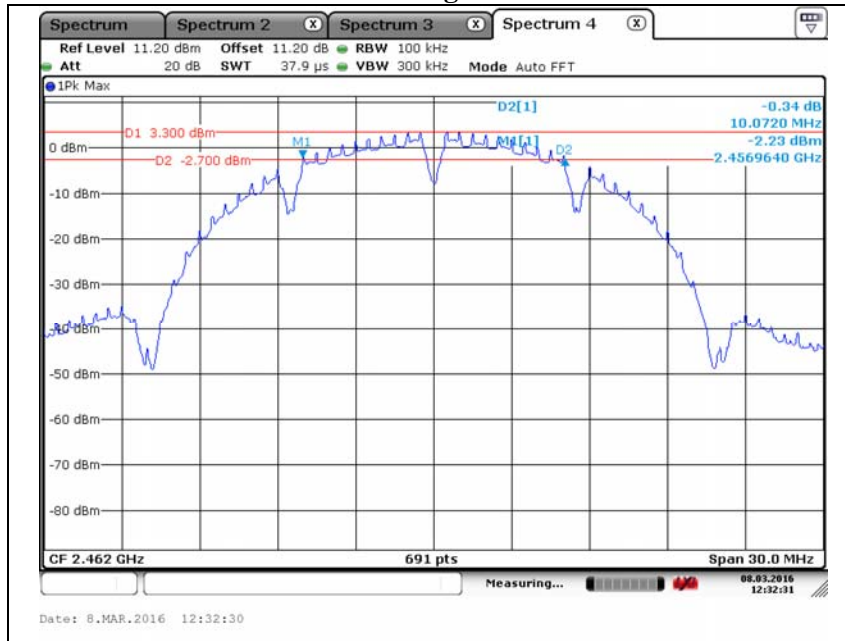


802.11g // Low channel

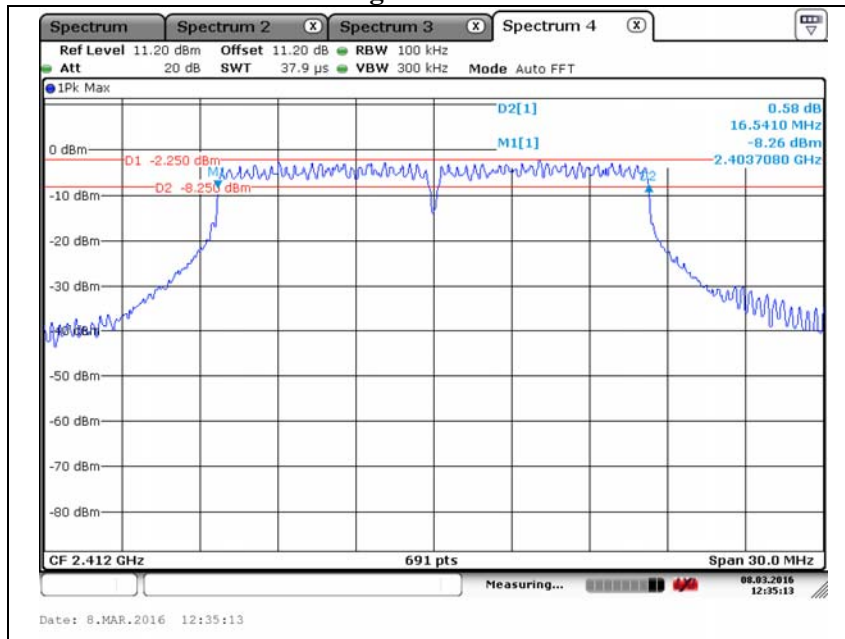


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11g // Middle channel

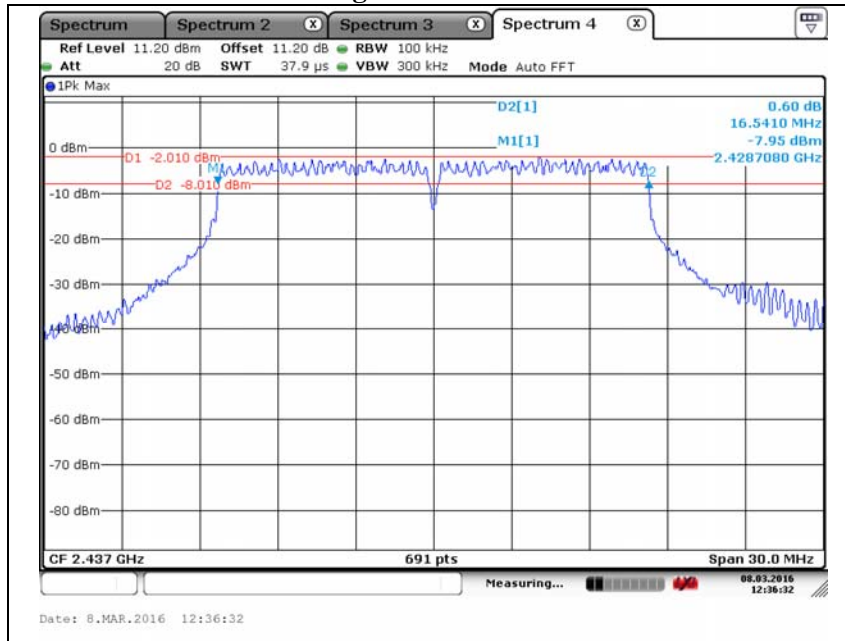


802.11g // High channel

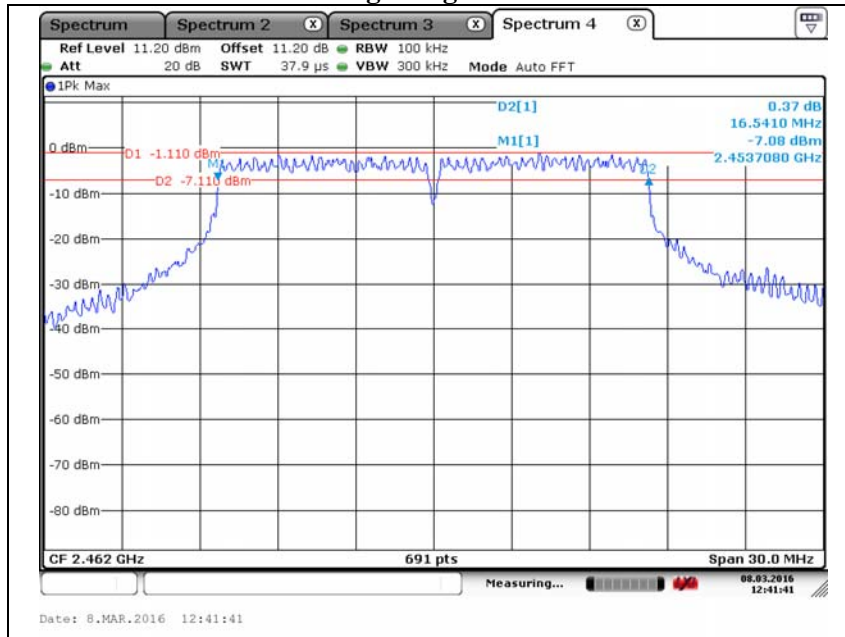


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // Low channel

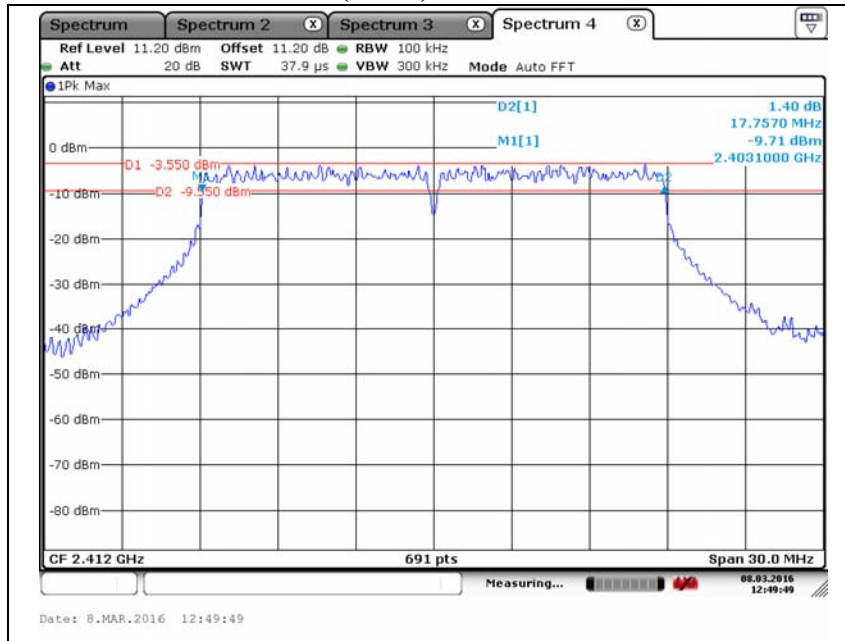


802.11n(HT20) // Middle channel

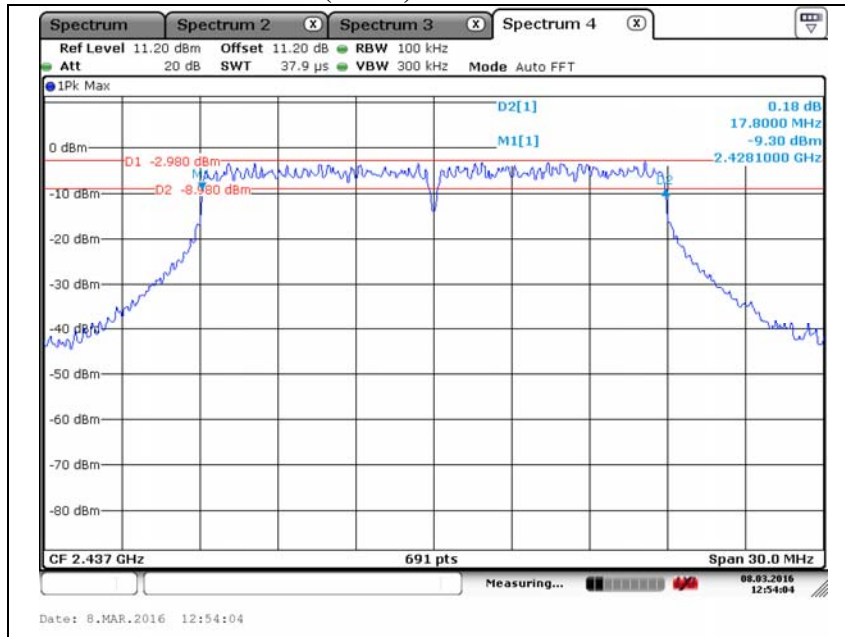


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // High channel

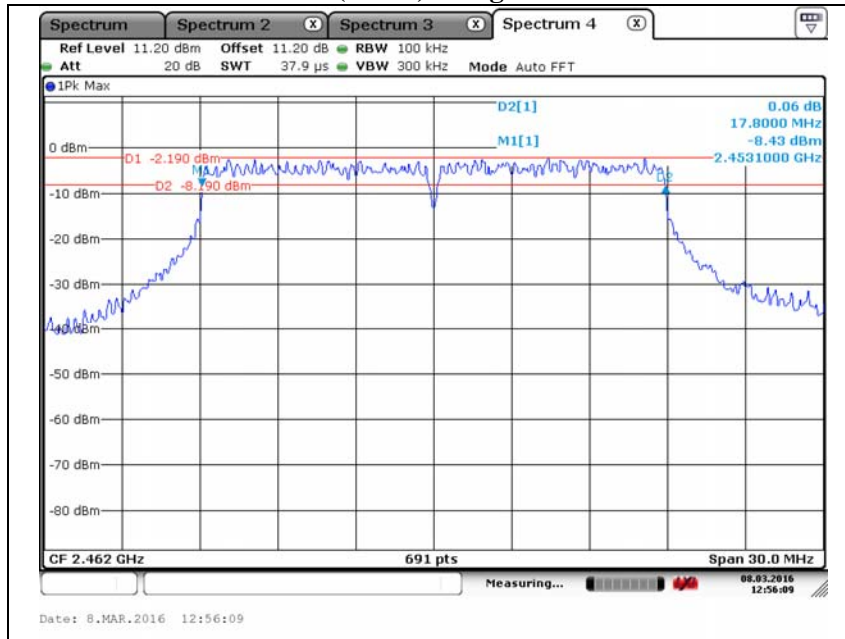


802.11n(HT40) // Low channel

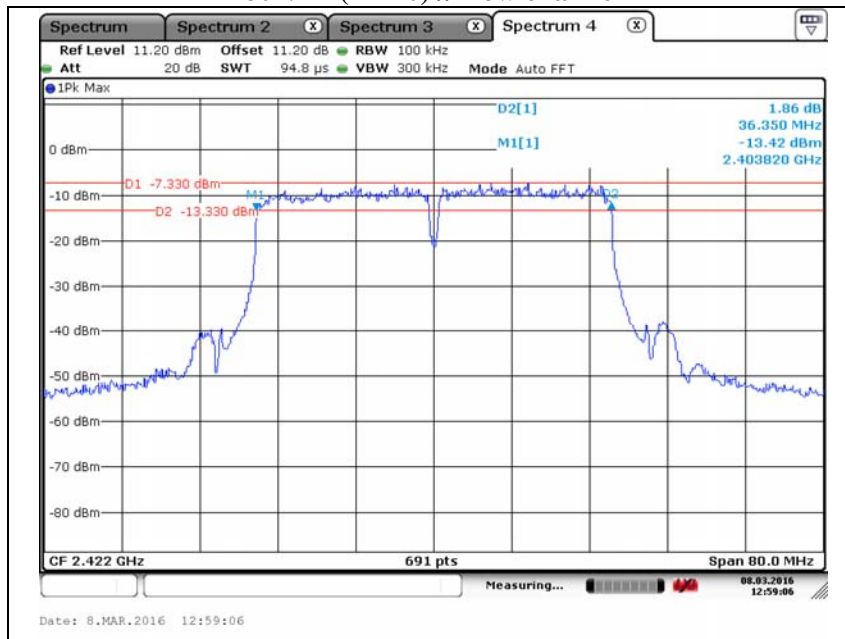


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT40) // Middle channel

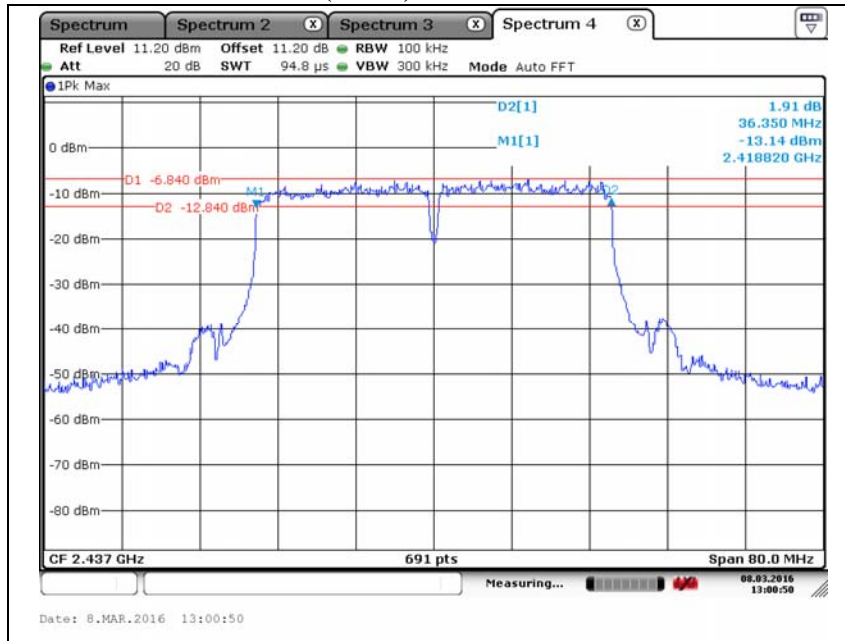


802.11n(HT40) // High channel

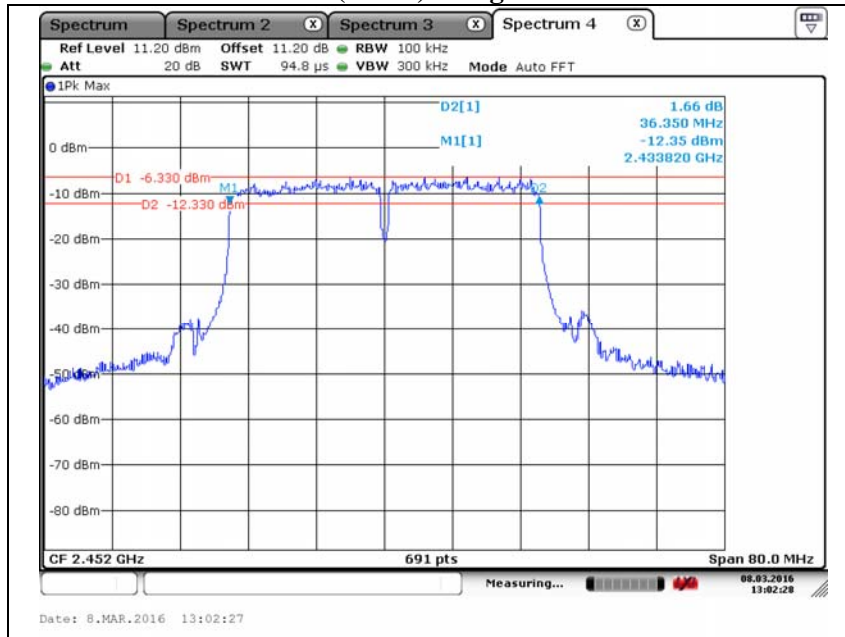

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.4. Peak Output power

Test setup



Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

KDB 558074_v03r04 – section 9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmit-ting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




Test results

Test mode	Frequency(MHz)	Results (dBm)	Limit(dBm)
802.11b	2 412	15.61	30
	2 437	17.06	
	2 462	16.95	
802.11g	2 412	21.59	
	2 437	20.82	
	2 462	20.45	
802.11n(HT20)	2 412	21.15	
	2 437	20.33	
	2 462	20.25	
802.11n(HT40)	2 422	19.82	
	2 437	19.81	
	2 452	19.91	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

3.5. Power spectral density

Test setup



Test procedure

KDB 558074_v03r04– section 10.2

Measurement procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS channel bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limit

According to §15.247€, For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.




Test results


Operation mode	Frequency(MHz)	Measured PSD(dBm)	Limit(dBm)
802.11b	2 412	-18.81	8
	2 437	-17.13	
	2 462	-16.72	
802.11g	2 412	-15.90	
	2 437	-15.52	
	2 462	-14.89	
802.11n (HT20)	2 412	-16.39	
	2 437	-15.89	
	2 462	-15.03	
802.11n (HT40)	2 422	-20.53	
	2 437	-20.05	
	2 452	-19.50	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

802.11b // Low channel

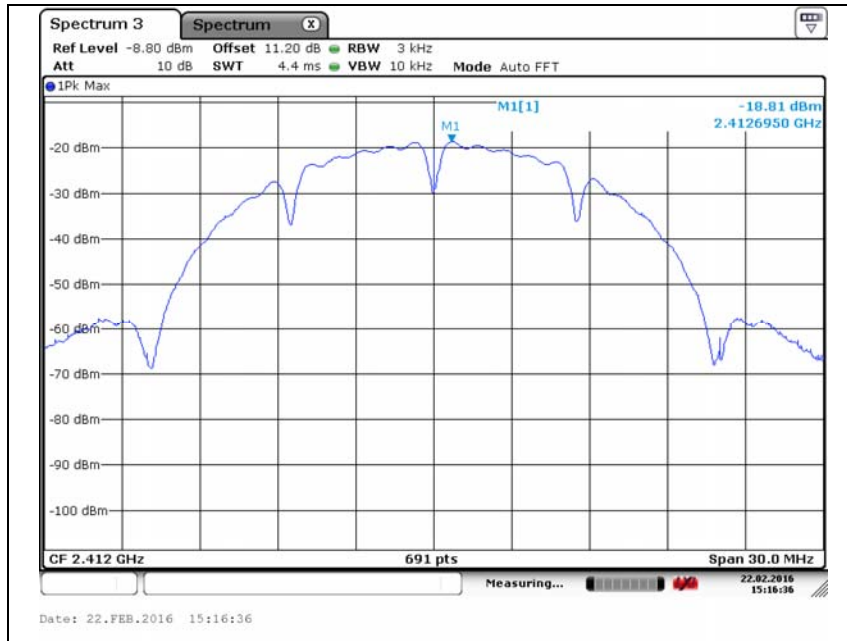


802.11b // Middle channel

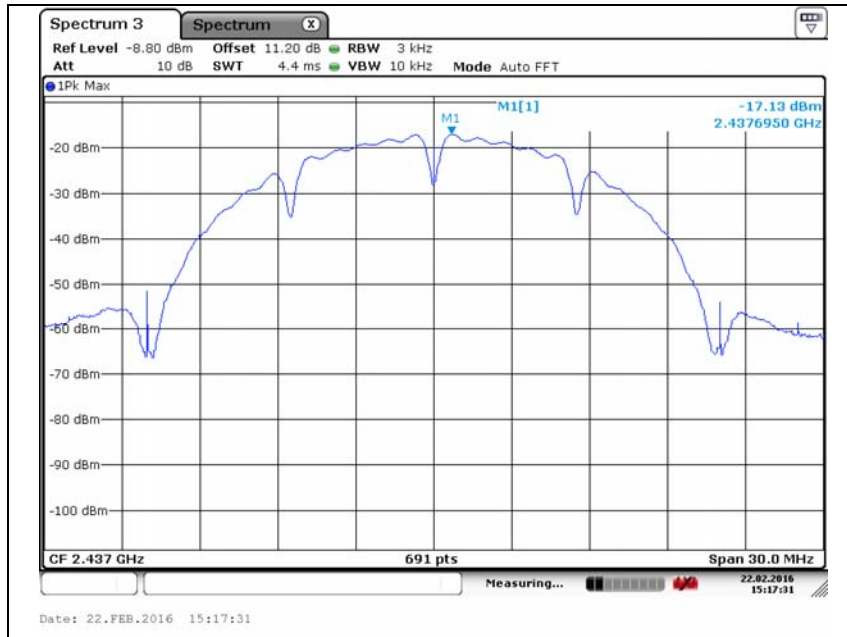


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11b // High channel

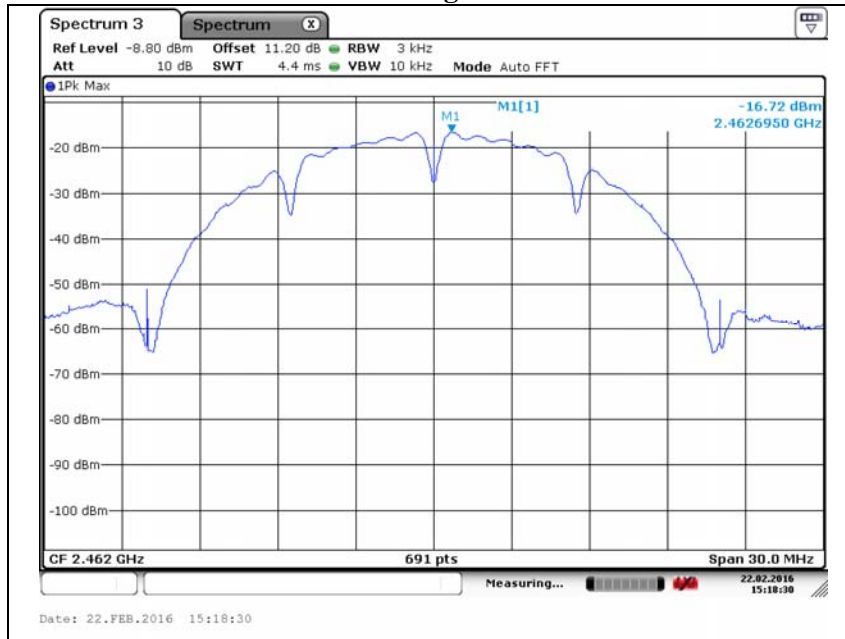


802.11g // Low channel

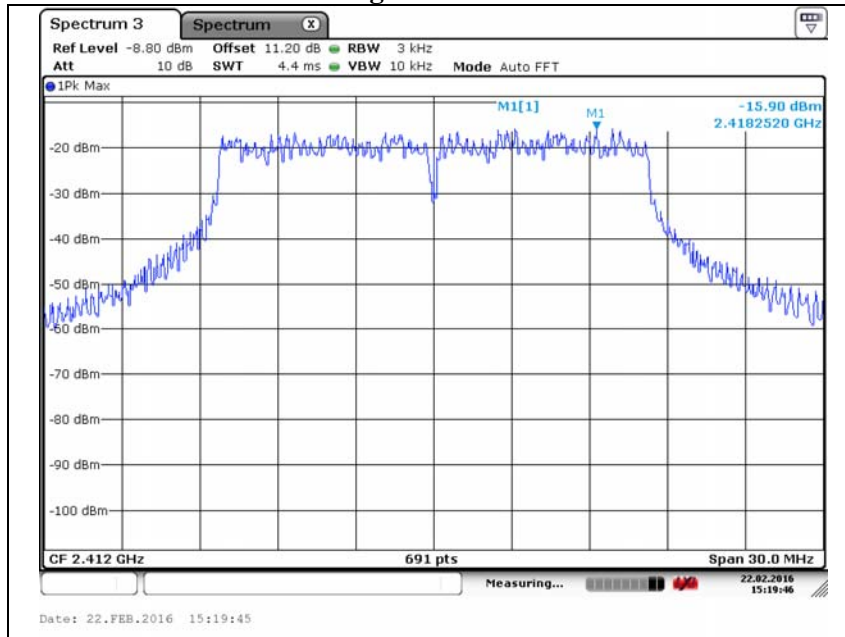


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11g // Middle channel

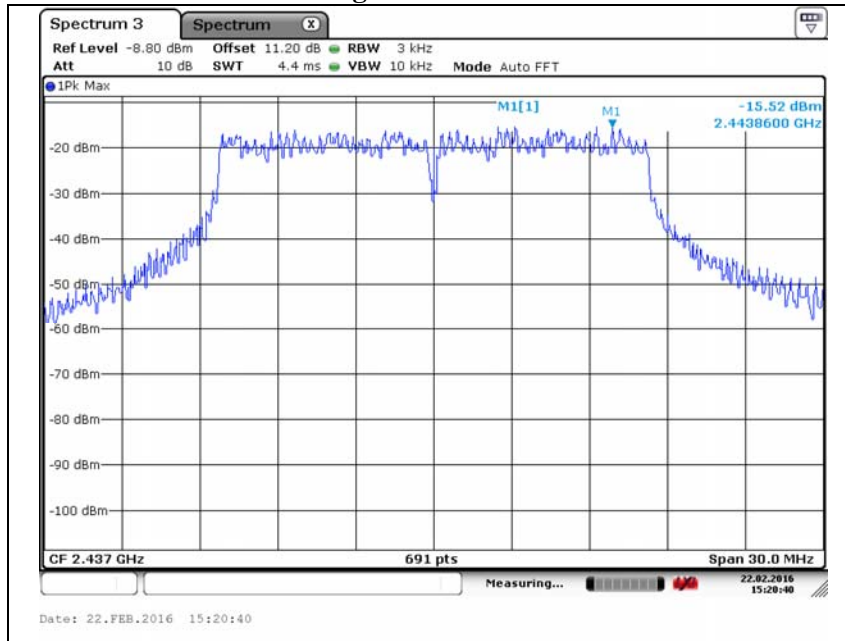


802.11g // High channel

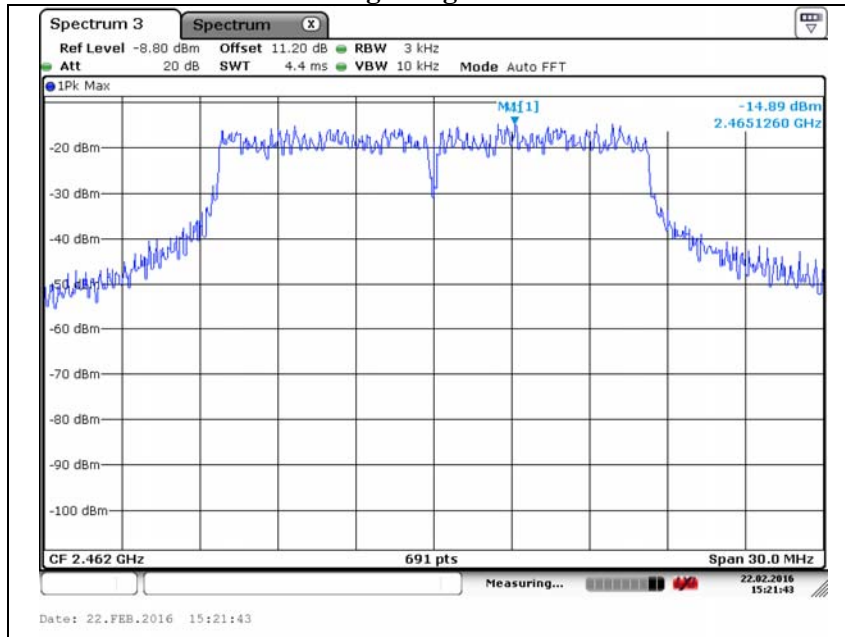


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // Low channel

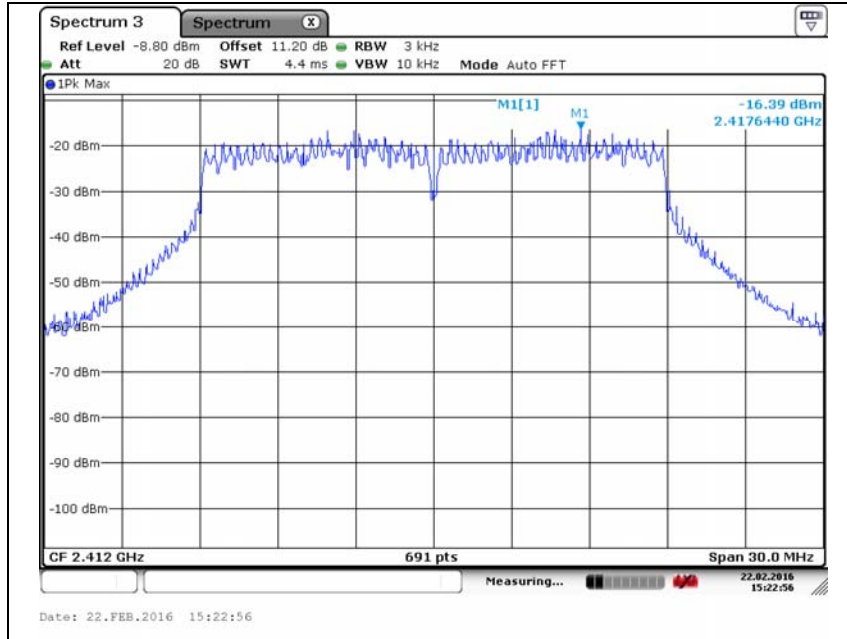


802.11n(HT20) // Middle channel

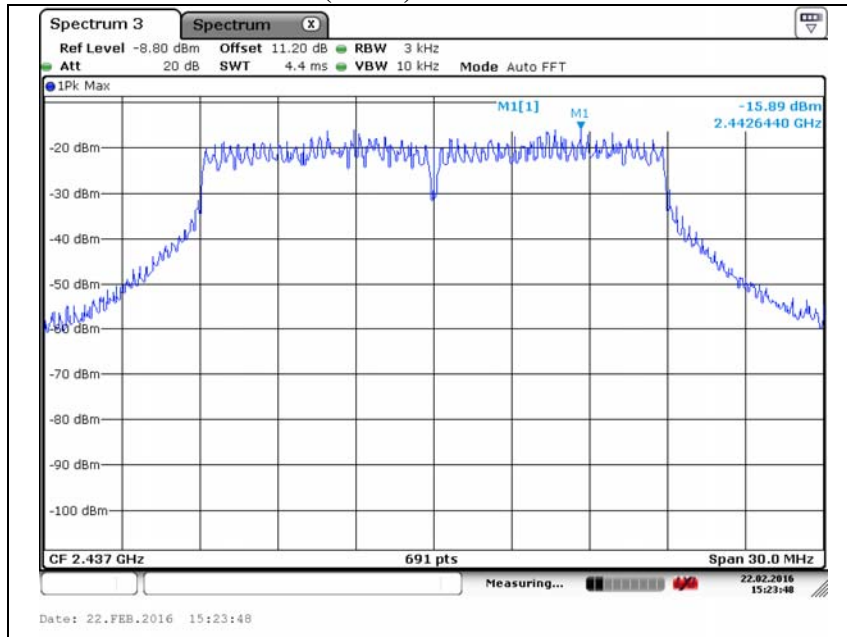


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT20) // High channel

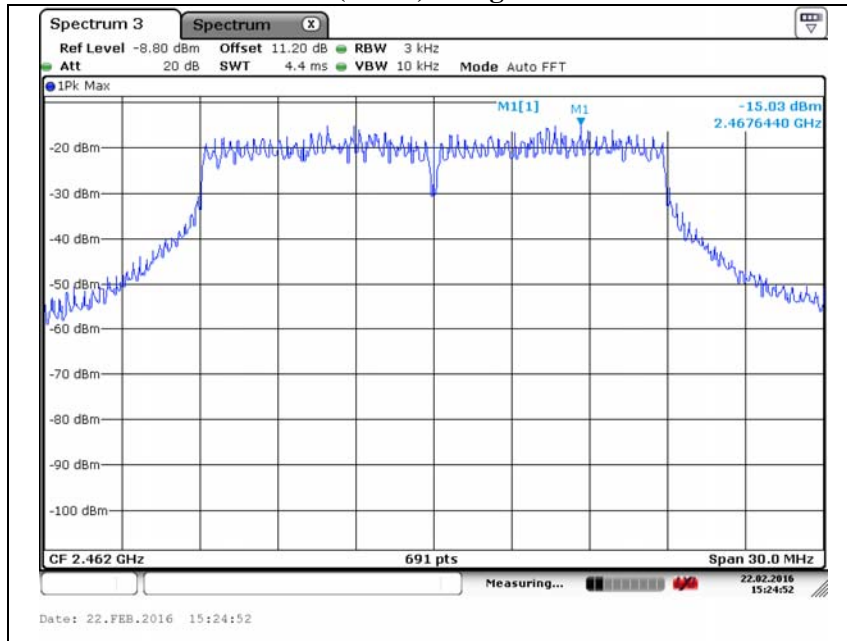


802.11n(HT40) // Low channel

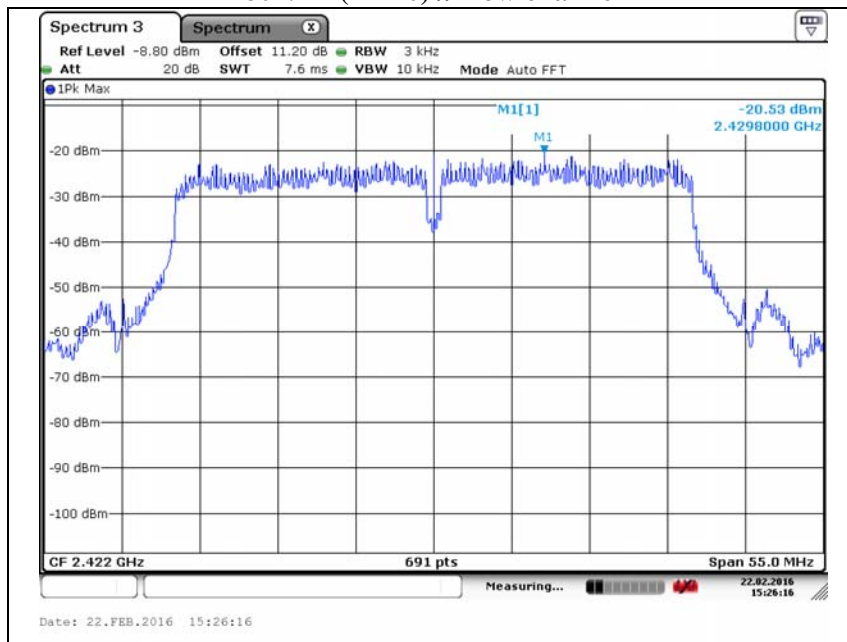


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

802.11n(HT40) // Middle channel

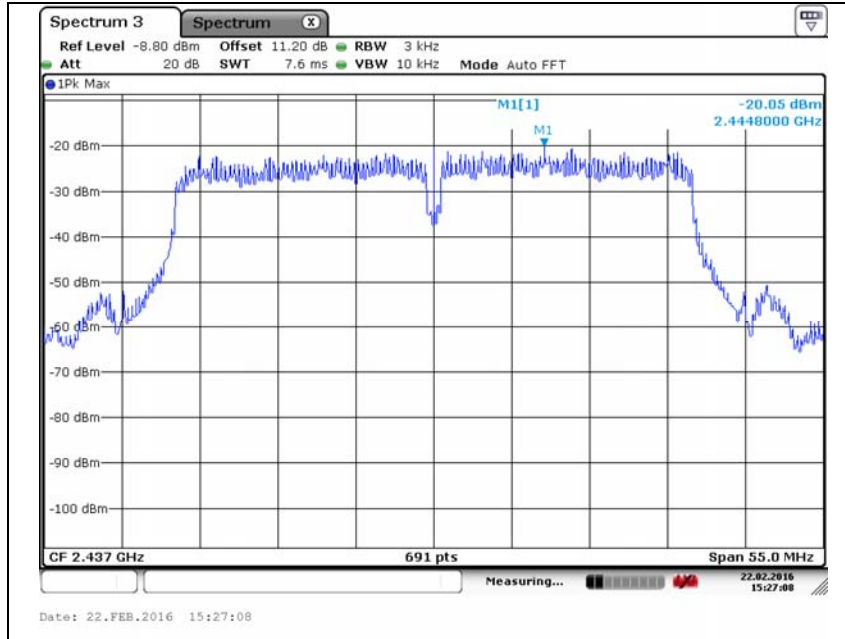

802.11n(HT40) // High channel

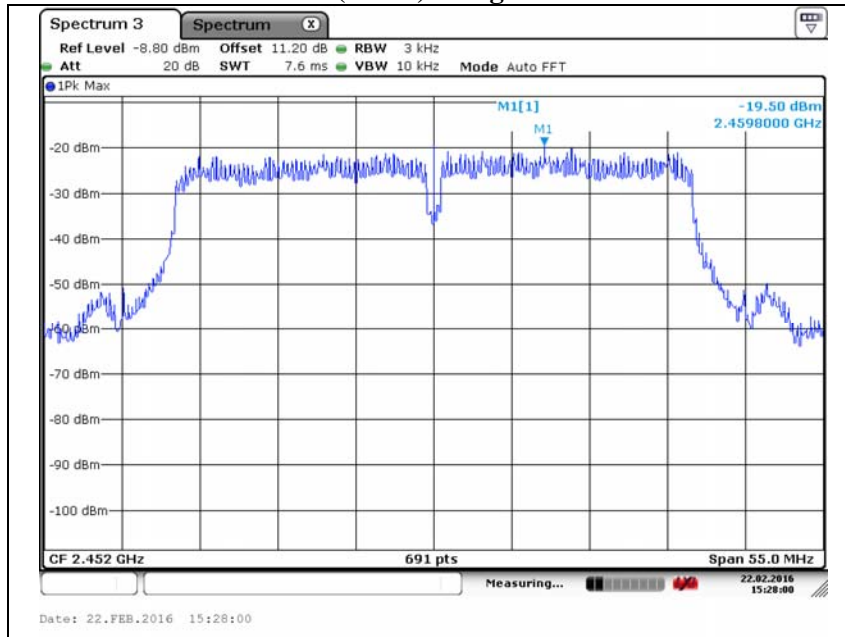

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.6. AC conducted emission

Frequency range of measurement

150 kHz to 30 MHz

Instrument settings

IF Band Width: 9 kHz

Test procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uHGHz/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Note.


- Decreases with the logarithm of the frequency.
- All AC Conducted emission at channels are almost the same, so that 802.11b High channel was chosen at representative in final test.

Test results – TX_H

Test Report

Common Information

Test Description:	Conducted Emission
Model No.:	SNH-V6410PN
Mode	TX
Operator Name:	KES

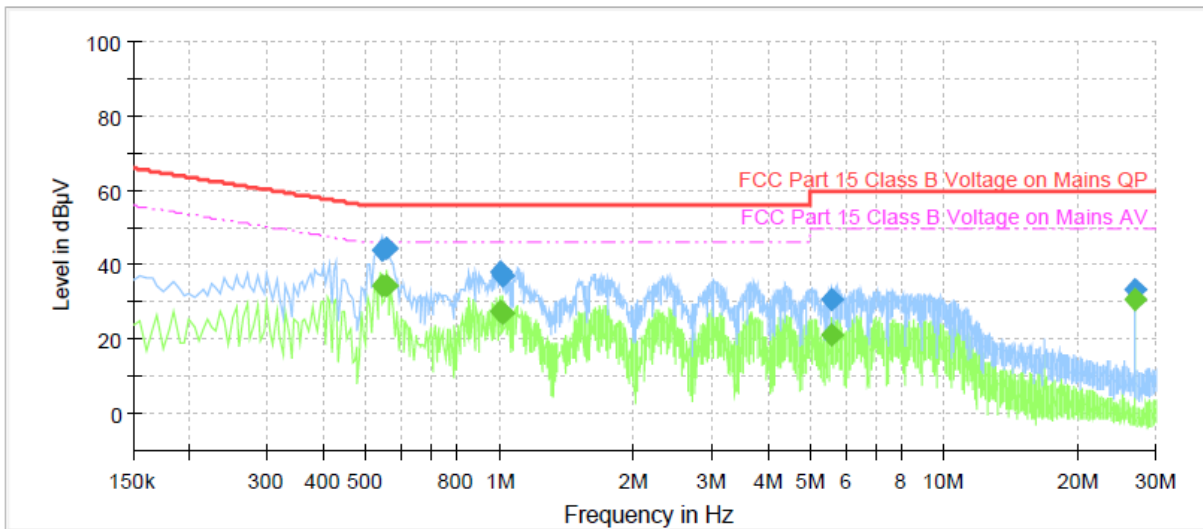

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.545000	---	34.29	46.00	11.71	1000.0	9.000	L1	9.7
0.545000	44.18	---	56.00	11.82	1000.0	9.000	L1	9.7
0.555000	---	34.28	46.00	11.72	1000.0	9.000	L1	9.7
0.555000	44.63	---	56.00	11.37	1000.0	9.000	L1	9.7
1.000000	---	27.77	46.00	18.23	1000.0	9.000	L1	9.7
1.000000	37.95	---	56.00	18.05	1000.0	9.000	L1	9.7
1.015000	---	26.96	46.00	19.04	1000.0	9.000	L1	9.7
1.015000	37.21	---	56.00	18.79	1000.0	9.000	L1	9.7
5.605000	---	21.29	50.00	28.71	1000.0	9.000	L1	9.8
5.605000	30.49	---	60.00	29.51	1000.0	9.000	L1	9.8
27.000000	---	30.71	50.00	19.29	1000.0	9.000	L1	10.3
27.000000	33.26	---	60.00	26.74	1000.0	9.000	L1	10.3


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Test results – TX_N

Test Report

Common Information

Test Description:	Conducted Emission
Model No.:	SNH-V6410PN
Mode	TX
Operator Name:	KES

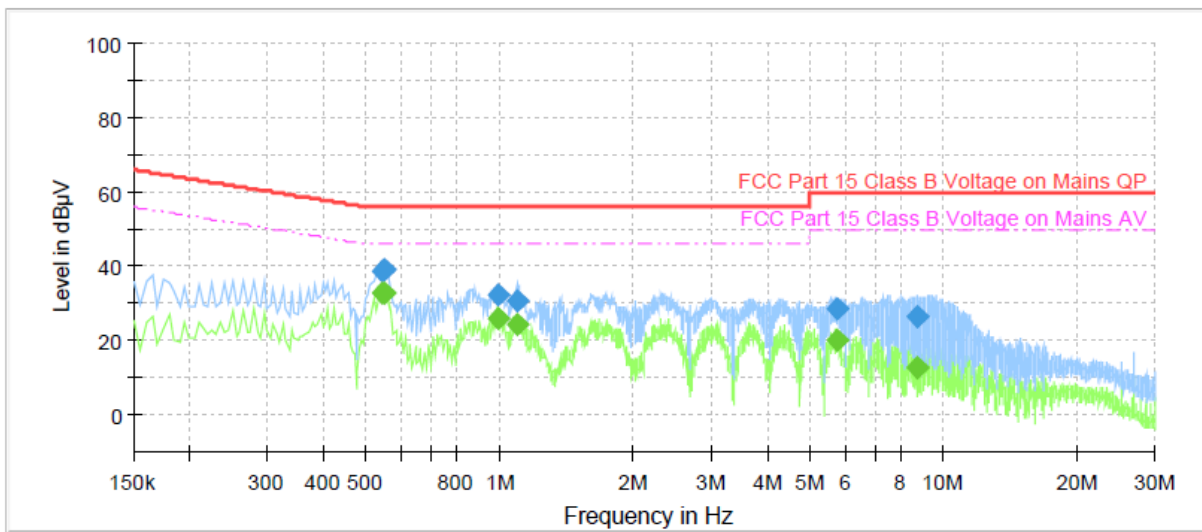

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.545000	---	32.74	46.00	13.26	1000.0	9.000	N	9.7
0.545000	38.82	---	56.00	17.18	1000.0	9.000	N	9.7
0.550000	---	32.83	46.00	13.17	1000.0	9.000	N	9.7
0.550000	38.99	---	56.00	17.01	1000.0	9.000	N	9.7
0.995000	---	25.86	46.00	20.14	1000.0	9.000	N	9.7
0.995000	32.39	---	56.00	23.61	1000.0	9.000	N	9.7
1.090000	---	24.29	46.00	21.71	1000.0	9.000	N	9.7
1.090000	30.46	---	56.00	25.54	1000.0	9.000	N	9.7
5.750000	---	20.29	50.00	29.71	1000.0	9.000	N	9.8
5.750000	28.57	---	60.00	31.43	1000.0	9.000	N	9.8
8.720000	---	12.84	50.00	37.16	1000.0	9.000	N	9.9
8.720000	26.40	---	60.00	33.60	1000.0	9.000	N	9.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	100736	1 year	2016.07.25
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2017.01.25
Attenuator	HP	8493C	51401	1 year	2016.07.24
Power Meter	Anritsu	ML2495A	1438001	1 year	2017.01.25
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2017.01.25
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	Schwarzbeck	VULB 9163	9168-713	2 years	2017.05.15
Horn antenna	A.H.	SAS-571	781	2 years	2017.05.07
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170550	2 years	2017.04.30
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2016.07.24
Low Pass Filter	WEINSHEL	WLK1.0/18G-10TT	1	1 year	2016.07.24
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2016.10.23
Broadband preamplifier	Schwarzbeck	BBV9718	9718-246	1 years	2016.10.23
Broadband Amplifier	SCHWARZBECK	BBV-9721	PS9721-003	1 year	2016.04.03
EMI Test Receiver	R&S	ESR3	101781	1 year	2016.05.06
EMI Test Receiver	R&S	ESU26	100552	1 year	2016.05.06
EMI Test Receiver	R&S	ESR3	101783	1 year	2016.05.06
LISN	R&S	ENV216	101787	1 year	2017.01.14

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics	NT-R519	ZKPA93ES900086Z