



Report No	ED0373-1
Client	YDI Wireless 20 Industrial Drive East South Deerfield, MA 01373
Phone	413-665-8551
Fax	413-665-7090
FRN	0006891675
<hr/>	
Models	EL24A-11
FCC ID	NM5-EL24A-11
Equipment Type Equipment Code	Low Power Communication Device Transmitter DXX
Results	As detailed within this report
<hr/>	
Prepared by	 Mairaj Hussain – Test Engineer
 Authorized by	Michael Buchholz – EMC Manager
Issue Date	6-3-03
Conditions of issue	This Test Report is issued subject to the conditions stated in ‘terms and conditions’ section of this

Summary 3
 Modifications 3
Test Methodology 3
EUT Configuration 4
Statement of Conformity 5
Test Data and Plots 6
 Section 15.249 (b) 6
 Section 15.249 (b) (1) 6
 Section 15.249 (b) (2) 8
 Section 15.249 (d) 9
 AC Line Conducted Emission Measurements 11
Modifications Required for Compliance 12
Terms And Conditions 17

Summary

This report is an application for certification of a transmitter operating under 47 CFR 15.249 of the FCC rules provided for operation of fixed, point-to-point operation in the frequency band of 24.05-24.25GHz. The product covered by this report is EtherLeap, which is a Digital Relay Radio System (DRRS).

The manufacture requires the following antenna to be used with EtherLeap:

- i) Andrews model #: BCP-030-245-003

A detailed description of the above-mentioned antenna can be found in the antenna exhibit.

Modifications

The product was found to be failing spurious emissions at several frequencies. Modifications were required, as given below, to pass the radiated emissions test. See modification section.

- 1) Terminated ground on DC power to the chassis. See modification exhibit.
- 2) Two pieces of ARC absorber LS-10211 added to inside cover.

Test Methodology

All testing was performed according to the procedures specified in ANSI C63.4 (2000). The product was tested with modulation on and peak readings were compared against the average limit presented in section CFR 15.249.

Frequency range investigated:	30MHz – 100GHz
--------------------------------------	----------------

Measurement Distance:		
<i>Frequency (MHz)</i>	<i>Distance (m)</i>	<i>Comments</i>
Fundamental (Three channels) 24.112GHz, 24.137GHz, 24.183GHz	3 m	Radiated
30MHz – 100GHz except 24-24.25GHz band	3, 1m, 0.1m, & 0.03 m	Radiated Spurious Measurements

The EUT was fully maximized. The EUT antenna can not be maximized separately. The product was evaluated at three channels of operation. (Channel 1, Channel 6, and Channel 13.)

The product is DC powered. The product was tested with an AC adaptor model # PSA31U-480.

All readings are peak unless otherwise noted.

EUT Configuration

EUT Configuration					
Work Order: D0373					
Company: YDI Wireless					
Company Address: 20 Industrial Drive East South Deerfield, MA 01373					
Contact: John Hutchins					
Person Present: Jason Messier					
MN		SN	FCC ID		
EUT: EL24A-11		-	-		
AC Adaptor PSA31U - 480		-	-		
DC power injector DCI-1		-	-		
EUT Description: Digital Relay Radio System					
EUT Max Frequency: 24.101-24.143 GHz					
Support Equipment:		MN	SN	FCC ID	
Laptop		333T	N1SD914313849	L4PK1100X13	
EUT Cables:		Qty	Shielded?	Length	Ferrites
Ethernet		1	No	> 1 m	None
Unpopulated EUT Ports:		Qty	Reason		
None					
Software / Operating Mode Description:					
1. Constant Packet Tx mode.					
2. Disconnected from laptop for RX.					

The product has an integrated 802.11B WLAN card (FCC ID: IMRWLPC24H). Because, this card provides the IF signal for the 24GHz RF frontend, additional exhibits documenting the WLAN card certification have been provided.

Statement of Conformity

The EtherLeap has been found to conform with the following parts of the 47 CFR as detailed below:

47 CFR Part #	47 CFR Part #	Comments
	15.15(b)	The product contains no user accessible controls that increase transmission power above allowable levels.
2.925	15.19	The label is shown in the label exhibit. The label is permanently attached.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.31(e)	The input power was varied from its nominal value (48V) to 40.8V and 55.2V. The respective radiated power was measured see table 4.
	15.203	The device utilizes antenna specific to the product.
	15.204	See attached documentation describing the antenna.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious emissions in the Restricted bands comply with the general emission limits of 15.209.
	15.207	Unit is DC powered and drives its power from an AC adaptor through the Ethernet cable. Conducted EMI on AC side of the adaptor were measured. See table 8.
15.249	15.249 (a)	The EUT's operation is classified as fixed, point-to-point and limits in this paragraph do not apply.
15.249(b)	15.249 (b)(1)	The field strength of emissions in this band shall not exceed 2500mV/m (128 dBuV/m).
	15.249 (b) (2)	The frequency tolerance of the fundamental is maintained within $\pm 0.001\%$ of the operating frequency over -20°C to 50°C at normal supply voltage, and for a variation in the primary supply voltage 85% to 115% of the rated supply voltage @ 20°C .
	15.249 (b) (3)	The antenna gain is at least 33 dBi. See antenna exhibit.
	15.249 (d)	Spurious emissions meet the general radiated emissions limits of section 15.209.
	15.249 (e)	Spurious emissions found above 1GHz meet the FCC class B limits.

Test Data and Plots

Section 15.249 (b)

Radiated Emissions Table - Band Edges										Curtis-Straus LLC		
Date: 29-May-03			Company: YDI Wireless				Table 1					
Engineer: EG/MH			EUT Desc: EL24A-11				Work Order: D0373					
Measurement Distance: 0.03 m												
Notes:										EUT Max Freq: 24.183 GHz		
Antenna Polarization (H)	Frequency (MHz)	Reading (dBµV)	Distance Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			CFR 47 FCC Part 15.249 (b)		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Noise floor	24000.0	39.2	40.0	40.4	5.0	44.6				54.0	-9.4	Pass
Noise floor	24050.0	38.8	40.0	40.4	5.0	44.2				54.0	-9.8	Pass
Noise floor	24250.0	38.1	40.0	40.4	5.0	43.5				54.0	-10.5	Pass
Test Site: "F"		Pre-Amp: none		Cable: 8 Microflex		Analyzer: Orange		Antenna: 18-26.5GHz Horn				

Note: All readings are peak unless otherwise noted.

Conclusion:	The product meets the respective limit at lower/upper restricted band bandedge.
--------------------	---

Sample calculation:

Adjusted Reading = reading + cable factor + antenna factor – distance factor

Section 15.249 (b) (1)

Data Showing fundamental at CH 1, Ch 6, and Ch 13.

Radiated Emissions Table										Curtis-Straus LLC		
Date: 29-May-03			Company: YDI Wireless				Table 2					
Engineer: EG/MH			EUT Desc: EL24A-11				Work Order: D0373					
Measurement Distance: 3 m												
Notes: All readings are peak										EUT Max Freq: 24.183 GHz		
H polarity Rec. Antenna												
CH no	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			CFR 47 FCC Part 15.249		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Ch 1	24112.0	74.0	0.0	40.4	5.0	119.4				128.0	-8.6	Pass
Ch 6	24138.0	75.2	0.0	40.4	5.0	120.6				128.0	-7.4	Pass
Ch 13	24173.0	76.0	0.0	40.4	5.0	121.4				128.0	-6.6	Pass
Table Result: Pass						by -6.6 dB		Worst Freq: 24173.0 MHz				
Test Site: "F"		Pre-Amp: none		Cable: 8 Microflex		Analyzer: Orange		Antenna: 18-26.5GHz Horn				

Sample calculation:


Adjusted reading = Reading + Antenna factor + Cable factor

Bandwidth settings for above table:

RBW	1 MHz
VBW	3 MHz

Agilent 09:50:32 May 29, 2003


R L

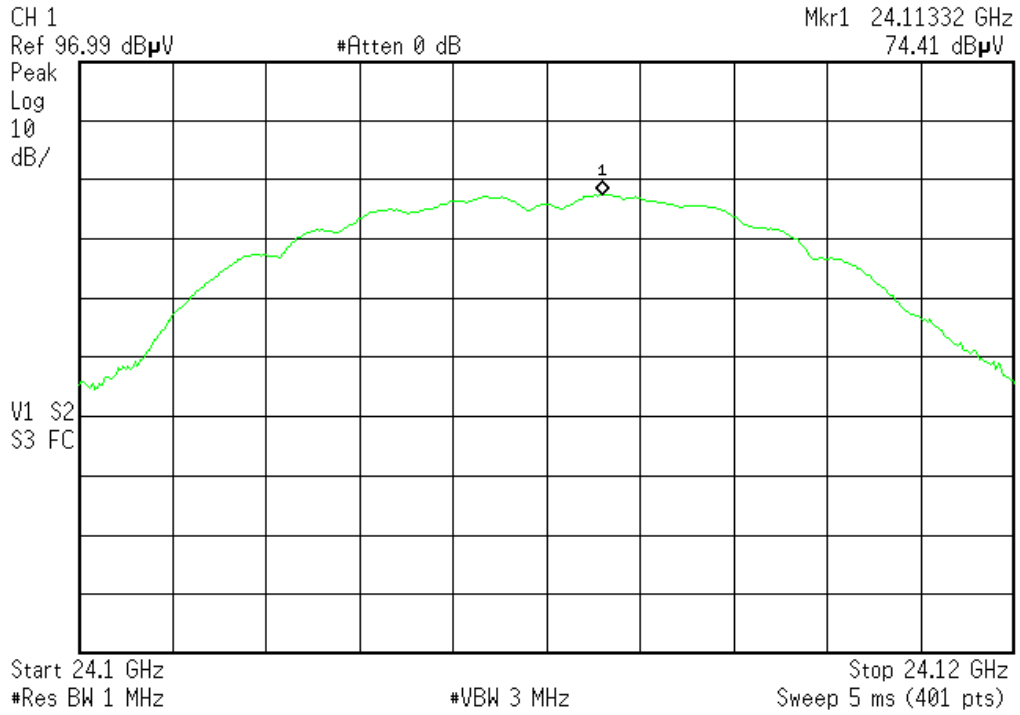

Plot showing channel 1

Agilent 09:53:46 May 29, 2003


R L

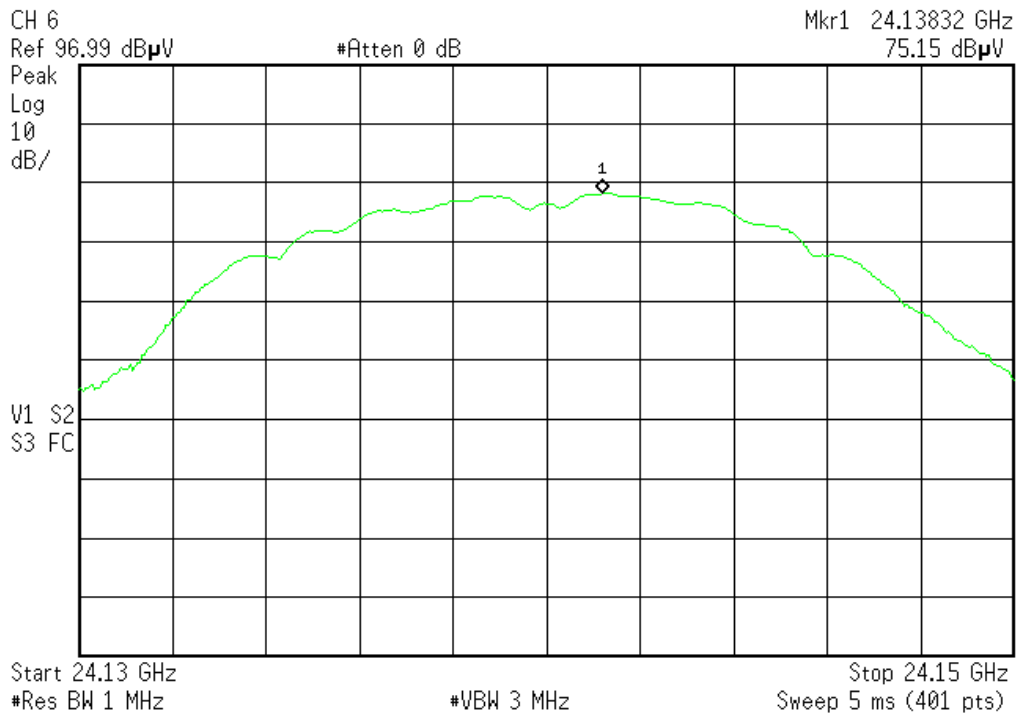

Plot showing channel 6

Agilent 09:55:03 May 29, 2003

R L

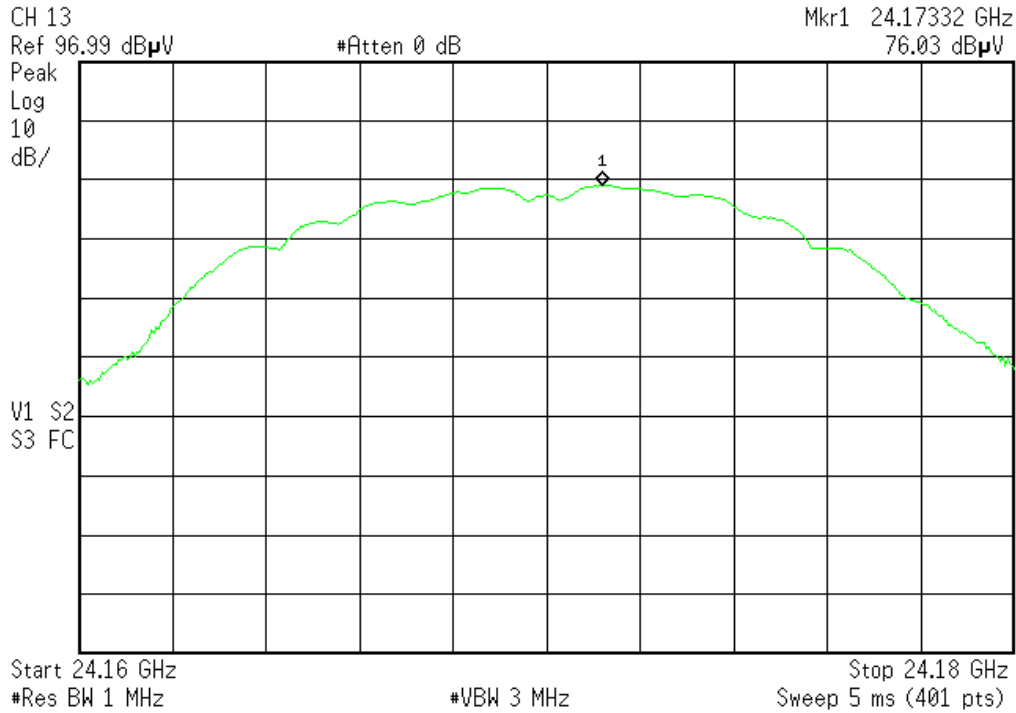

Plot showing channel 13

Section 15.249 (b) (2)

Frequency Stability FCC Part 15.249 (b) (2)				
Work Order: D0373		Table: 3		
Company: YDI Wireless				
EUT: EL24A-11				
Date: 5/30/03				
Engineer: EG				
Start Freq: 24111986000.0 Hz		Tolerance: 241119.860 Hz 0.001%		
Temp (deg C)	Freq (Hz)	Change in Freq (Hz)	Δ Freq Limit (Hz)	Result
20	24111986000	0	241119.860	Pass
30	24111990300	-4300	241119.860	Pass
40	24111975300	10700	241119.860	Pass
50	24111972800	13200	241119.860	Pass
10	24111974800	11200	241119.860	Pass
0	24111991300	-5300	241119.860	Pass
-10	24111978300	7700	241119.860	Pass
-20	24111974300	11700	241119.860	Pass

Conclusion: The product meets the frequency tolerance criteria over the temperature range of -20°C to 50°C

Voltage Variation FCC Part 15.249 (b) (2) & 15.31 (e)				
Work Order: D0373			Table: 4	
Company: YDI Wireless				
EUT: EL24A-11				
Date: 5/30/03				
Engineer: EG				
Test Equipment Used:				
Analyzer: Orange		Power source for EUT: HP power supply 6012A		
Freq (Hz)	Vol (V)	Amplitude (dBuV)	Delta	
24111986000.0	48	69.72	-	
24111985500	40.8	69.36	0.36	
24111990300	55	69.24	0.48	

Conclusion: The product meets the voltage tolerance criteria.

Section 15.249 (d)

Spurious Radiated Emissions

Bandwidth settings for spurious emissions:

	Frequency < 1GHz	
RBW		120 KHz
VBW		300 KHz
	Frequency > 1 GHz	
RBW		1 MHz
VBW		3 MHz

Radiated Emissions Table										<i>Curtis-Straus LLC</i>		
Date: 02-Jun-03		Company: YDI Wireless				Table 5						
Engineer: Mairaj Hussain		EUT Desc: EL24A-11				Work Order: D0373						
Frequency Range: 30 - 1000 MHz					Measurement Distance: 3 m							
Notes:										EUT Max Freq: 24.183 GHz		
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBuV/m)	---			FCC Class B		
							Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
V	64.0	40.6	21.6	6.6	0.6	26.2				40.0	-13.8	Pass
V	150.0	22.4	21.6	11.2	1.2	13.2				43.5	-30.3	Pass
V	192.0	26.3	21.6	10.3	1.5	16.5				43.5	-27.0	Pass
V	192.6	30.7	21.6	10.4	1.5	21.0				43.5	-22.5	Pass
H	241.0	20.4	21.6	12.6	1.7	13.1				46.0	-32.9	Pass
V	256.0	22.0	21.6	13.1	1.8	15.3				46.0	-30.7	Pass
V	264.0	26.0	21.6	13.2	1.9	19.5				46.0	-26.5	Pass
H	448.0	17.5	21.7	17.1	2.5	15.4				46.0	-30.6	Pass
Table Result: Pass by -13.8 dB							Worst Freq: 64.0 MHz					
Test Site: "F"		Pre-Amp: Red		Cable: 65 ft RG8A/U		Analyzer: White		Antenna: Grn-Wht				

Radiated Emissions Table							Curtis-Straus LLC					
Date: 02-Jun-03			Company: YDI Wireless				Table 6					
Engineer: Mairaj Hussain			EUT Desc: EL24A-11				Work Order: D0373					
Frequency Range: 1 - 18 GHz							Measurement Distance: 3 m					
Notes:							EUT Max Freq: 24.183 GHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
H	1356.0	23.0	24.0	26.3	0.9	26.2				54.0	-27.8	Pass
H	2712.3	24.0	25.1	31.1	1.1	31.1				54.0	-22.9	Pass
H	5425.0	21.0	23.0	36.2	1.9	36.1				54.0	-17.9	Pass
H	4068.6	26.5	24.1	34.3	1.4	38.1				54.0	-15.9	Pass
H (1 m)	10849.0	42.1	20.7	38.4	2.5	62.3				63.5	-1.2	Pass
Table Result: Pass by -1.2 dB							Worst Freq: 10849.0 MHz					
Test Site: "F"		Pre-Amp: Or-Blk		Cable: 8 Microflex		Analyzer: White		Antenna: Black Horn				

Radiated Emissions Table							Curtis-Straus LLC					
Date: 02-Jun-03			Company: YDI Wireless				Table 7					
Engineer: Mairaj Hussain			EUT Desc: EL24A-11				Work Order: D0373					
Frequency Range: 1 - 18 GHz							Measurement Distance: 1 m					
Notes: Rx mode							EUT Max Freq: 24.183 GHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
H(Rx)	10850.0	41.8	20.7	38.4	2.5	62.0				63.5	-1.5	Pass
Table Result: Pass by -1.5 dB							Worst Freq: 10850.0 MHz					
Test Site: "F"		Pre-Amp: Or-Blk		Cable: 8 Microflex		Analyzer: White		Antenna: Black Horn				

Sample calculation:

Adjusted reading = Reading + Antenna factor + Cable factor – Pre amp factor

Note: No emissions were found in the frequency range of 18 GHz – 100 GHz except fundamental, see table 2.

AC Line Conducted Emission Measurements

AC Mains Conducted Emissions											Curtis-Straus LLC		
Date: 30-May-03				Company: YDI				Table No: 8					
Engineer: EG				EUT Desc: EtherLeap				Work Order: D0373					
Notes:													
LISN(s): Orange													
Range: 0.15-30Mhz													
Other Equipment: ---						Spectrum Analyzer: Green							
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	FCC B Applicable until July 12, 2004		FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)	
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		Limit (dBµV)	Margin dB	qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB		
0.45	24.8	25.1	22.6	23.1	20.0	47.9	-2.8	56.9	-11.8	46.9	-3.8	Pass	
1.15	19.8	20.7	17.6	19.2	20.0	47.9	-7.2	56.0	-15.3	46.0	-6.8	Pass	
2.43	16.7	16.0			20.0	47.9	-11.2	56.0	-19.3	46.0	-9.3	Pass	
3.33	17.6	18.7			20.0	47.9	-9.2	56.0	-17.3	46.0	-7.3	Pass	
4.74	13.1	12.4			20.0	47.9	-14.8	56.0	-22.9	46.0	-12.9	Pass	
5.25	13.2	15.5			20.0	47.9	-12.4	60.0	-24.5	50.0	-14.5	Pass	
Table Result: Pass by -2.80 dB Worst Freq: 0.45 MHz													

LIMITS

Quasi-Peak: 250µV = 47.9dBµV in the range 450kHz to 30MHz
 [47 CFR 15.207(a) Revised as of October 1, 2001]

Note: On July 12, 2004, FCC adopts the conducted emissions limits of the European CISPR 22 standard as outlined below


Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


[47 CFR 15.207(a) Revised as of October 1, 2002; amended by ET Docket 98-80; FCC 02-157, published in the Federal Register Vol. 67, No. 132, on Wednesday, July 10, 2002]

Modifications Required for Compliance

- 1) Terminated ground on the DC power.

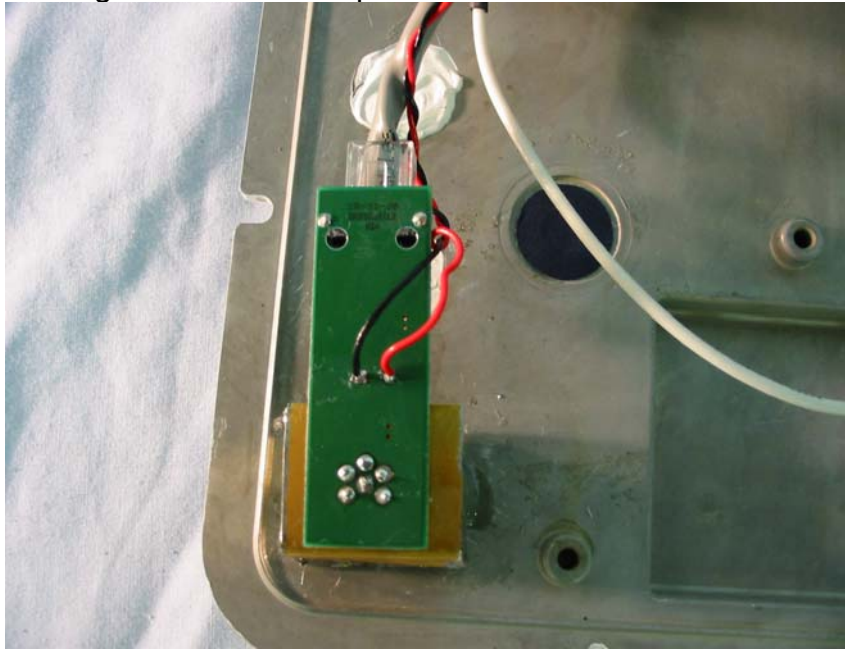

- 2) Two pieces of ARC absorber LS-10211 added to inside cover.

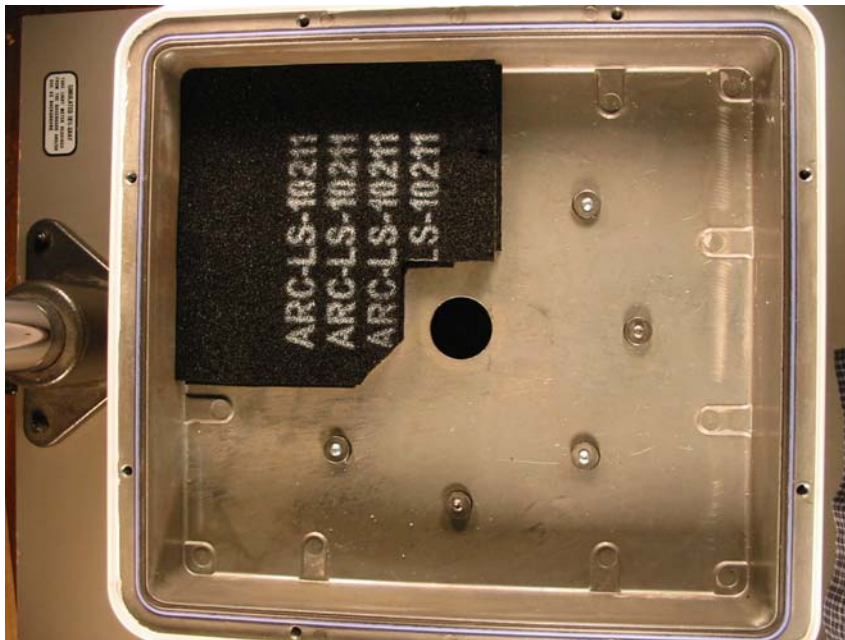

Test Equipment Used

REV. 5/27/03

SPECTRUM ANALYZERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	21-MAY-2004
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	25-FEB-2004
BLUE	9kHz-1.8GHz	8591E	HP	3223A00227	00070	04-SEP-2003
YELLOW	9kHz-2.9GHz	8594E	HP	3523A01958	00100	03-JUL-2003
GREEN	9kHz-26.5GHz	8593E	HP	3829A03618	00143	02-OCT-2003
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	08-JUL-2003
YELLOW-BLACK	20Hz-40.0MHz	3585A	HP	2504A05219	00030	25-DEC-2003
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	07-JUL-2003

LISNS/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	01-APR-2004
BLUE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956349	00752	01-APR-2004
YELLOW-BLACK	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984735	00248	01-APR-2004
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	24-OCT-2003
GOLD	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984734	00247	01-APR-2004
WHITE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972019	00678	01-APR-2004
BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972017	00675	01-APR-2004
RED-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972016	00677	01-APR-2004
BLUE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972018	00676	01-APR-2004
BLUE MONITORING PROBE	0.01-150MHz	91550-2	TEGAM	12350	00807	21-MAY-2005
YELLOW MONITORING PROBE	0.01-150MHz	91550-2	ETS	50972	00493	21-NOV-2003
GREEN CURRENT TRANSFORMER	40Hz-20MHz	150	PEARSON	10226	00793	03-APR-2004
CISPR LINE PROBE	150kHz-30MHz	N/A	C-S	01	00805	20-DEC-2004
CISPR TELCO VOLTAGE PROBE	150kHz-30MHz	CS A/C-10	C-S	CS01	00296	12-SEP-2003
CISPR 22 TELCO ISN	9kHz-30MHz	FCC-TLISN-T4	FISCHER	20115	00746	15-OCT-2003

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
SITE F	93448	IC 2762-F	R-468	04-FEB-2004
SITE T	93448	IC 2762-T	R-905	04-FEB-2004
SITE A	93448	IC 2762-A	R-903	04-FEB-2004
SITE M	93448	IC 2762-M	R-904	04-FEB-2004
BUBBLE (HP FACILITY)	N/A	N/A	R-1467	16-MAY-2005

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
EMI 1	93448	N/A	C-480	01-MAY-2006
EMI 2	93448	N/A	C-480	01-MAY-2006
EMI 3	93448	N/A	C-480	01-MAY-2006
BUBBLE (HP FACILITY)	N/A	N/A	C-1556	16-MAY-2005

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN BILOG	30MHz-2GHz	CBL6112B	CHASE	2742	00620	19-MAY-2005
GREEN-BLACK BILOG	30MHz-2GHz	CBL6112B	CHASE	2412	00127	19-MAY-2005
GREEN-WHITE BILOG	30MHz-2GHz	CBL6112B	CHASE	2574	00319	19-MAY-2005
RED BILOG	30MHz-1GHz	3143	EMCO	1270	00042	17-MAR-2005
BLUE BILOG	30MHz-1GHz	3143	EMCO	1271	00803	17-MAR-2005
GRAY BILOG	26MHz-2GHz	3141	EMCO	9703-1038	00066	19-MAY-2005
YELLOW-BLACK BILOG	20-2000MHz	CBL6140A	CHASE	1112	00126	19-MAY-2005
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	22-MAY-2005
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	12-JUN-2003
ORANGE HORN	1-18GHz	3115	EMCO	0004-6123	00390	27-MAY-2003
WHITE HORN	18-26.5GHz	3160-09	EMCO	9610-1068	00758	26-JUN-2003
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755	27-JAN-2004
LARGE LOOP	20Hz-5MHz	6511	EMCO	9704-1154	00067	05-NOV-2003
ACTIVE MONOPOLE	30Hz-30MHz	3301B	EMCO	3824	00068	08-APR-2004
INDUCTION COIL	50-60Hz	1000-4-8	C-S	N/A	00778	16-SEP-2004
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00757	26-JUN-2003
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1371	00756	26-JUN-2003
RE101 LOOP SENSOR	30Hz-100kHz	RE101-13.3CM	C-S	N/A	00818	07-JAN-2005
RS101 RADIATING LOOP	30Hz-100kHz	RS101-12CM	C-S	N/A	00819	07-JAN-2005
RS101 LOOP SENSOR	30Hz-100kHz	RS101-4CM	C-S	N/A	00820	07-JAN-2005

MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
MIXER / HORN	26.5-40 GHZ	11970A/28-442-6	HP/ATM	2332A00900/A046903-01	00369	09-JUL-2003
MIXER / HORN	40-60 GHZ	M19HW/A	OML	U30110-1	00821	03-JAN-2005
MIXER / HORN	60-90 GHZ	M12HW/A	OML	E30110-1	00822	03-JAN-2005
MIXER / HORN	90-140 GHZ	MO8HW/A	OML	F21206-1	00811	05-DEC-2004
MIXER / HORN	140-220 GHZ	MO5HW/A	OML	G21206-1	00812	05-DEC-2004
DIPLEXER		DPL.26	OML	N/A	00813	05-DEC-2004

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.10-2000MHZ	ZFL-1000-LN	C-S	N/A	00798	17-MAR-2004
BLUE	0.01-2000MHZ	ZFL-1000-LN	C-S	N/A	00759	07-AUG-2003
BLUE-BLACK	0.01-2000MHZ	ZFL-1000-LN	C-S	N/A	00800	08-APR-2004
GREEN	0.01-2000MHZ	ZFL-1000-LN	C-S	N/A	00802	17-MAR-2004
BLACK	0.01-2000MHZ	ZFL-1000-LN	C-S	N/A	00799	17-MAR-2004
ORANGE	0.01-2000MHZ	ZFL-1000-LN	C-S	N/A	00765	17-MAR-2004
WHITE	1-20GHZ	SMC-12A	C-S	426643	00760	27-AUG-2003
YELLOW-BLACK	1-20GHZ	SMC-12A	C-S	535055	00801	27-AUG-2003
ORANGE-BLACK	1-20GHZ	SMC-12A	C-S	637367	00761	04-MAR-2004
YELLOW	18-26.5GHZ	AFSA-18002650-60-8P-4	C-S	467559	00758	27-AUG-2003
HIGH PASS FILTER	1-18 GHZ	SPA-F-55204	K&L	36	00817	31-DEC-2003
LOW PASS FILTER	1-9 GHZ	11SL10-4100/X4400-O/O	K&L	4	00816	31-DEC-2003
20DB ATTENUATOR	0.03-20 GHZ	PE 7019-20	PASTERNAK	01	00791	21-MAY-2005

ABSORBING CLAMPS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
FISCHER CLAMP	30-1000MHZ	F-201-23MM	FISCHER	10	00081	04-JAN-2004

EFT	MN	MFR	SN	ASSET	CALIBRATION DUE
EFT DIRECT COUPLING CAP	N/A	C-S	01	00794	10-DEC-2003

ESD GENERATORS	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN	NSG435	SCHAFFNER	000839	00763	04-NOV-2003
RED	NSG435	SCHAFFNER	001625	00762	15-NOV-2003
YELLOW	930D	ETS	201	00673	29-MAY-2003

BEST EMC-2	MN	MFR	SN	ASSET	CALIBRATION DUE
BLUE	711-1100	SCHAFFNER	199824-002SC	00117	04-SEP-2003
RED	711-1100	SCHAFFNER	200122-074SC	00623	04-SEP-2003

CHAMBERS AND STRIPLINE	MN	MFR	SN	ASSET	CALIBRATION DUE
RFI 1 CHAMBER	3 METER COMPACT	PANASHIELD	N/A	00797	16-MAY-2004
RFI 2 CHAMBER	04' x 07' SHIELDING SYSTEM	LINDGREN	13329	00795	09-JUN-2003
RFI 3 STRIPLINE	N/A	C-S	N/A	00796	09-JUL-2003
ENVIRONMENTAL (SAFETY)	SGTH-31S	B-M-A INC.	2245	00321	03-JAN-2004

AMPLIFIERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.5-1000MHZ	10W1000B	AR	18708	00032	16-MAY-2004
BLUE	0.01-250MHZ	75A250	AR	19165	00039	16-MAY-2004
GREEN	0.5-1000MHZ	10W1000B	AR	23423	00123	11-JUN-2003
BLACK	0.01-250MHZ	75A250	AR	23411	00122	14-JAN-2004
ORANGE	0.01-250MHZ	75A250	AR	26827	00367	14-JAN-2004
HP489A	1.0-2.0GHZ	HP489A	HP	1144AU1780	00083	28-AUG-2003
HP491C	2.0-4.0GHZ	HP491C	HP	449-00638	00764	28-AUG-2003
HP493A	4.0-8.0GHZ	HP493A	HP	171402242	00085	28-AUG-2003
HP495A	7.0-12.0GHZ	HP495A	HP	904-00237	00086	28-AUG-2003

FIELD PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.01-1000MHZ	HI-4422	HOLADAY	90369	00031	14-APR-2004
GREEN	0.01-1000MHZ	HI-4422	HOLADAY	97363	00136	02-APR-2004

SIGNAL GENERATORS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
--------------------------	-------	----	-----	----	-------	-----------------

RED	0.09-2000MHZ	HP8648B	HP	3847U02192	00366	11-DEC-2003
BLUE	0.1-1000MHZ	HP8648A	HP	3426A00548	00034	11-JUL-2003
GREEN	0.09-2000MHZ	HP8648B	HP	3623A02072	00125	04-SEP-2003
ORANGE	0.1-1000MHZ	HP8648B	HP	3537A01210	00025	21-MAY-2004
BLACK	15MHZ	HP33120A	HP	US36004674	00766	23-OCT-2003
YELLOW	15MHZ	HP33120A	HP	US36014119	00249	21-MAY-2004
BLUE-WHITE	0.1HZ-13MHZ	HP3312A	HP	1432A07632	00775	27-FEB-2004
SWEPPER	0.01-20.0GHZ	HP83752A	HP	3610A01133	00087	04-APR-2004

BULK INJECTION CLAMPS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.01-100MHZ	95236-1	TEGAM	12248	00035	14-JAN-2004
GREEN	0.01-100MHZ	95236-1	EMCO	50215	00118	14-JAN-2004

CDN NETWORKS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
BLACK	0.15-100MHZ	20A M-2	C-S	04	00783	14-JAN-2004
BLUE	0.15-100MHZ	15A M-3	C-S	05	00806	14-JAN-2004
RED	0.15-100MHZ	15A M-3	C-S	06	00780	14-JAN-2004
WHITE	0.15-100MHZ	15A M-3	C-S	07	00782	14-JAN-2004
YELLOW-BLACK	0.15-100MHZ	15A M-3	C-S	08	00784	14-JAN-2004
BLUE-BLACK	0.15-100MHZ	15A M-3	C-S	09	00781	14-JAN-2004
GREEN	0.15-100MHZ	30A M-3	C-S	10	00779	14-JAN-2004
YELLOW	0.15-100MHZ	30A M-5	C-S	11	00804	14-JAN-2004
BLUE-WHITE	0.15-100MHZ	15A M-5	C-S	12	00788	14-JAN-2004
YELLOW (RES)	0.15-100MHZ	100Ω RESISTOR NWK	C-S	01	00810	10-SEP-2003
GREEN (RES)	0.15-100MHZ	100Ω RESISTOR NWK	C-S	02	00785	10-SEP-2003

HARMONIC ANALYZER	MN	MFR	SN	ASSET	CALIBRATION DUE
HFTS	HP6842A	HP	3531A-00169	00738	29-OCT-2003

FREQUENCY COUNTER	MN	MFR	SN	ASSET	CALIBRATION DUE
5340A	HP5340A	HP	1440A02320	00787	12-JUN-2003

SURGE GENERATORS	MN	MFR	SN	ASSET	CALIBRATION DUE
TRANSIENT WAVEFORM MONITOR	TWM-5	CDI	003982	00323	13-JUN-2003
UNIVERSAL SURGE GENERATOR	M5	CDI	003966	00324	10-OCT-2003
THREE PHASE COUPLING NWK	3CN	CDI	003455	00325	10-OCT-2003
HIGH VOLTAGE CAP NWK 5KVDC, 18μF	CS-HVCC	C-S	01	00772	15-OCT-2003
NEBS SURGE GENERATOR	N/A	C-S	N/A	00088	05-SEP-2003
12 PAIR SURGE RESISTOR MODULE	N/A	C-S	N/A	00768	05-SEP-2003

POWER SUPPLIES	MN	MFR	SN	ASSET	CALIBRATION DUE
100011/2 AC POWER SYSTEM	(2) 500i	CALIFORNIA INSTRUMENTS	HK53687/HK53688	00376	31-DEC-2003

RMS VOLTMETERS/CURRENT CLAMP	MN	MNFR	SN	ASSET	CALIBRATION DUE
RED RMS VOLTMETER	3400A	HP	40102044	00770	04-OCT-2003
WHITE RMS VOLTMETER	3400A	HP	1218A14427	00809	09-DEC-2003
GREEN RMS VOLTMETER (TELECOM)	3400A	HP	806-09594	00344	10-DEC-2003
TRUE-RMS VOLTMETER	79III	FLUKE	71700298	00769	03-OCT-2003
TRUE-RMS CLAMP METER (SAFETY)	36	FLUKE	68805882	00700	31-MAR-2004

POWER/NOISE METERS	MN	MFR	SN	ASSET	CALIBRATION DUE
POWER METER	435B	HP	2445A11012	00773	07-APR-2004
POWER SENSOR	8481A	HP	2702A61351	00774	07-APR-2004
TRANSMISSION LINE TESTER (DBRNC)	185T	AMREL	998658	00823	14-JAN-2004

OVERVOLTAGE CHAMBERS	MN	MFR	SN	ASSET	CALIBRATION DUE
72kW POWER FAULT SIMULATOR	OV1	C-S	N/A	00792	14-MAR-2004
POWER FAULT SIMULATOR	OV2	C-S	N/A		14-MAR-2004

DIPOLE TAPE MEASURES	MN	MFR	SN	ASSET	CALIBRATION DUE
26FT TAPE #1	2338CME	LUFKIN	C3166-1	00776	26-MAR-2005
26FT TAPE #2	2338CME	LUFKIN	C3166-2	00772	26-MAR-2005

METEOROLOGICAL METERS	MN	MFR	SN	ASSET	CALIBRATION DUE
------------------------------	----	-----	----	-------	-----------------

TEMPERATURE /HUMIDITY GAUGE	THG-912	HUGER	4000562	00789	08-NOV-2003
ATMOSPHERIC PRESSURE GAUGE	BA928	OREGON SCIENTIFIC	C3166-1	00831	03-MAR-2004
TRACEABLE CLOCKS	MN	MFR	SN	ASSET	CALIBRATION DUE
5003	5003	CONTROL COMPANY	99026940	00808	09-DEC-2003

Unless otherwise noted the calibration interval is one year. All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Terms And Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.

- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.
- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.