



Report No	EE0201-1
Client	YDI Wireless, Inc. 20 Industrial Drive East South Deerfield, MA 01373
Phone	(413) 665-8551
Fax	(413) 665-7090
FRN	0006891675
<hr/>	
Model	MB-ST-INT
FCC ID	NM5-MB-ST
Equipment Type Equipment Code	Unlicensed National Information Infrastructure Devices NII
Results	As detailed within this report
<hr/>	
Prepared by	 Evan Gould – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	5/6/04
Conditions of issue	This Test Report is issued subject to the conditions stated in 'terms and conditions' section of this report.

Table Of Contents

<i>Summary</i>	3
<i>Test Methodology</i>	3
<i>Statement of Conformity</i>	4
<i>EUT Configuration</i>	5
<i>26dB Emission Bandwidth</i>	6
<i>6dB Bandwidth</i>	7
<i>Peak Output Power</i>	8
<i>Peak Power Spectral Density</i>	10
<i>Peak Excursion</i>	11
<i>Band Edges</i>	13
<i>Antenna Gain</i>	14
<i>Radiated Spurious Emissions</i>	15
<i>AC Line Conducted Emission Measurements</i>	16
<i>Voltage Variation</i>	17
<i>Frequency Stability</i>	18
<i>Test Equipment Used</i>	19
<i>Terms And Conditions</i>	20
<i>A2LA Accreditation</i>	22



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.407. The product is the YDI Wireless Marquee Bridge (Model MB-ST-INT). It is a spread spectrum transmitter that operates in the range 5260-5320MHz.

Test Methodology

Radiated emissions testing is performed according to the procedures specified in ANSI C63.4 (2002). FCC's "*Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*" was followed for testing as well. EUT was oriented vertically just as it would be mounted in normal operation. Emissions were maximized by rotating around the vertical axis as well as varying the test antenna's height and polarity. EUT antenna can not be maximized separately.

Frequency range investigated: 0.15MHz – 60GHz

Measurement distance:	0.15 - 30MHz	Conducted
	30 - 1000MHz	10m
	1 – 26.5GHz	1m
	26.5 - 60GHz	0.1m

AC Line conducted emissions testing was performed with a 50Ω/50μH LISN.

Statement of Conformity

The Marquee Bridge has been found to conform to the following parts of 47 CFR as detailed below:

Part 2	Part 15	Comments
	15.15(b)	The controls that adjust the power level on this device are not accessible to the user. The professional installer of the device will adjust the power level at the time of installation.
2.925	15.19	The label is shown in the label exhibit.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.203	This product is professionally installed.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209.
	15.207	The unit meets the AC conducted emissions requirements of 15.207.
	15.407	The unit complies with the requirements of 15.407
	15.407(F)	See attached MPE Calculation Exhibit

EUT Configuration

EUT Configuration				
Work Order: E0179				
Company: YDI Wireless				
Company Address: 20 Industrial Drive East South Deerfield, MA 01373				
Contact: Chris Koh				
Person Present: Audra Page				
MN		SN	FCC ID	
EUT: MB-ST-INT		1	NM5-MB-ST	
EUT Max Frequency: 5320MHz				
Support Equipment:	MN	SN	FCC ID	
IBM Thinkpad	600X	78-GZKT9		
DC Power injector	304-800620-002	-	-	
CINCON AC adaptor	TR25240	25240-0009702	-	
EUT Cables:	Qty	Shielded?	Length	Ferrites
Cat.5 (plus DC)	1	No	100m	No
DC power	1	No	6ft	No
ethernet	1	No	6ft	No
Unpopulated EUT Ports:	Qty	Reason		
none				
Software / Operating Mode Description:				
Transmitting pseudorandom data at full power.				



26dB Emission Bandwidth


Measurements of the 26dB bandwidths were taken to use for the EBW value in FCC’s “Guidelines for Assessing...” referred to in the Test Methodology section above. The EBW is used in the procedure for measuring the Peak Conducted Output Power.

MEASUREMENT

26dB Emission Bandwidth			
Date: 5-Apr-04			
Company: YDI			
EUT: Marquee Bridge			
Engineer: Evan Gould			
Analyzer: Orange			
Cable: 142LL #6			
Notes: Detector: Peak RBW: 300kHz VBW: 3MHz			
Channel	Frequency (MHz)	Data Rate (Mbps)	EBW (MHz)
52	5260.0	6.0	24.7
56	5280.0	6.0	24.1
64	5320.0	6.0	24.9
52	5260.0	54.0	23.9
56	5280.0	54.0	23.5
64	5320.0	54.0	22.5

SAMPLE ANALYZER PLOT

Agilent 09:02:26 Apr 5, 2004

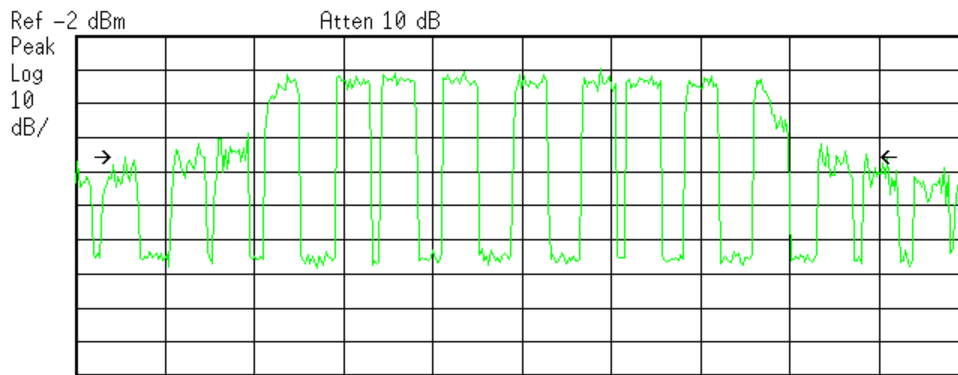

Center 5.32 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 3 MHz Sweep 4 ms (401 pts)

Emission Bandwidth Results (idle)	
Emission Bandwidth	Emiss BW X dB -26.0 dB
24.93 MHz	



6dB Bandwidth

Measurements of the 6dB bandwidths were taken to use for the Peak Excursion test.


MEASUREMENT

6dB Emission Bandwidth			
Date: 12-Apr-04			
Company: YDI			
EUT: Marquee Bridge			
Engineer: Evan Gould			
Analyzer: Orange			
Cable: 142LL #6			
Channel	Frequency (MHz)	Data Rate (Mbps)	6dB BW (MHz)
52	5260.0	6.0	16.3
56	5280.0	6.0	16.3
64	5320.0	6.0	16.3
52	5260.0	54.0	16.5
56	5280.0	54.0	16.5
64	5320.0	54.0	16.5

SAMPLE ANALYZER PLOT

Agilent 08:55:00 Apr 12, 2004

R L

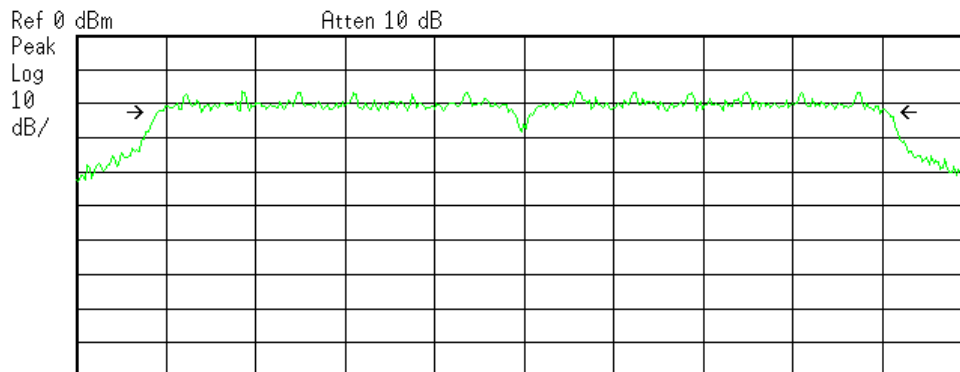

Center 5.26 GHz Span 20 MHz
 #Res BW 100 kHz #VBW 1 MHz Sweep 4.348 ms (401 pts)

Emission Bandwidth Results (paused)	
Emission Bandwidth	Emiss BW X dB -6.0 dB
16.32 MHz	



Peak Output Power

LIMIT

“...the peak transmit power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log (EBW)...If transmitting antennas of directional gain greater than 6 dBi are used,...the peak transmit power...shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.” [15.407 (a)(2)]

10*log(250mW) = **23.98dBm**
 11dBm + 10*log(22.5[MHz]) = 24.52dBm

Antenna Gain = 23dBi

Limit = 23.98dBm – (23dBi – 6dBi)
 Limit = 6.98dBm

METHOD

Method #3 from FCC’s “Guidelines...” document was used to measure the peak transmit power. The power was manually integrated across the 26dB bandwidth. A sample calculation follows:

Average Power Per 1MHz (dBm)	Average Power Per 1MHz (mW)	Sum of Powers (mW)	Integrated Power (dBm)	Cable Factor (dB)	Adjusted Integrated Power (dBm)
-26.251	0.002370828	2.297614303	3.61277126	3	6.612771261
-20.049	0.009887807				
-11.728	0.067173813				
-9.849	0.103538054				
-8.554	0.139508285				
-8.072	0.155883447				
-7.382	0.182725854				
-8.324	0.147095708				
-8.794	0.132007924				
-7.94	0.160694125				
-8.777	0.132525667				
-9.588	0.109951207				
-8.824	0.131099187				
-8.216	0.150799534				
-9.13	0.122179966				
-9.383	0.115265676				
-9.404	0.114709662				
-9.292	0.117706379				
-9.778	0.105244643				
-10.733	0.084469515				
-19.873	0.010296746				
-26.055	0.002480276				

Average Power Per 1MHz [mW] = 10 ^ (Power[dBm]/10)
 Sum of Powers = Sum of values in previous column
 Integrated Power = 10 log (Sum of Powers[mW])



MEASUREMENTS

Peak Output Power				Curtis-Straus LLC			
Date: 8-Apr-04		Company: YDI		Work Order: E0201			
Engineer: Evan Gould		EUT: Marquee Bridge		Cable: 142LL#6			
Analyzer: Orange							
Ch. / Data Rate (Mbps)	Center Frequency (GHz)	Measured Peak Output Power (dBm)	Cable Factor (dB)	Adjusted Peak Output Power (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
52 / 6	5.26	1.64	3.0	4.64	7.00	-2.36	Pass
56 / 6	5.28	2.76	3.0	5.76	7.00	-1.24	Pass
64 / 6	5.32	3.1	3.0	6.10	7.00	-0.90	Pass
52 / 54	5.26	2.09	3.0	5.09	7.00	-1.91	Pass
56 / 54	5.28	2.91	3.0	5.91	7.00	-1.09	Pass
64 / 54	5.32	3.61	3.0	6.61	7.00	-0.39	Pass



Peak Power Spectral Density

LIMIT

“...the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band...If transmitting antennas of directional gain greater than 6 dBi are used,...the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi...” [15.407(a)(2)]

Limit = 11dBm – (23dBi – 6dBi)


Limit = -6dBm

Method #1 from the FCC “Guidelines...” document was implemented below.

MEASUREMENTS

Peak Power Spectral Density				Curtis-Straus LLC			
Date: 8-Apr-04		Company: YDI		Resolution BW: 1MHz		Work Order: E0201	
Engineer: Evan Gould		EUT: Marquee Bridge		Video BW: 3MHz			
Analyzer: Orange		Cable: 142LL#6					
Ch. / Data Rate (Mbps)	Center Frequency (GHz)	Measured Peak Power Spectral Density(dBm)	Cable Factor (dB)	Adjusted Peak Power Spectral Density (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
52 / 6	5.26	-18.8	3.0	-15.80	-6.00	-9.80	Pass
56 / 6	5.28	-17.2	3.0	-14.20	-6.00	-8.20	Pass
64 / 6	5.32	-16.6	3.0	-13.60	-6.00	-7.60	Pass
52 / 54	5.26	-20.4	3.0	-17.40	-6.00	-11.40	Pass
56 / 54	5.28	-19.8	3.0	-16.80	-6.00	-10.80	Pass
64 / 54	5.32	-19.7	3.0	-16.70	-6.00	-10.70	Pass

SAMPLE ANALYZER PLOT

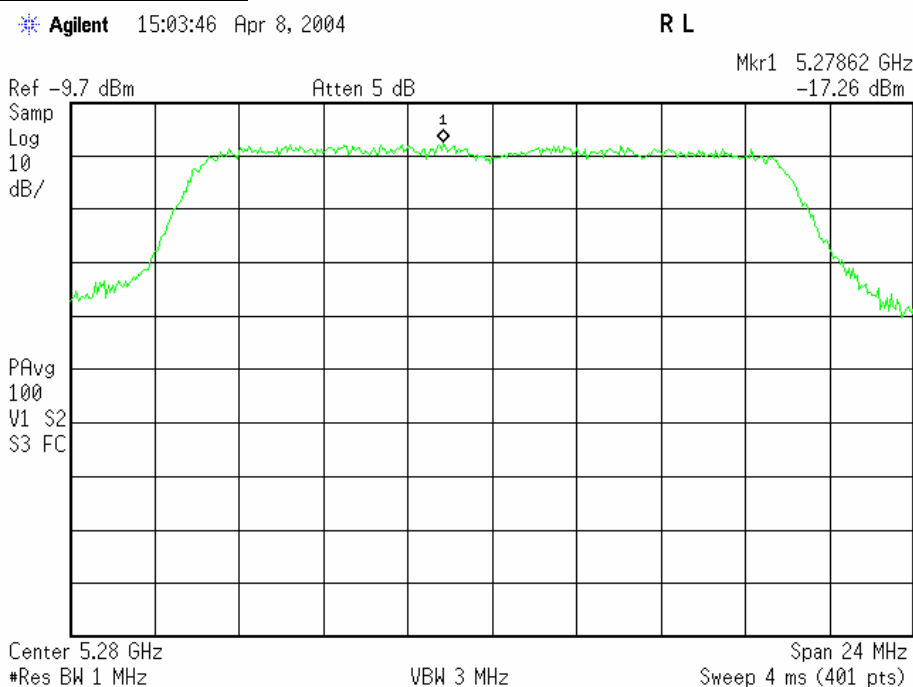

Peak Excursion

LIMIT

“The ratio of the peak excursion of the modulation envelope...to the peak transmit power...shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.” [

METHOD

Data consisting of 401 points across the 6dB bandwidth was taken for each max hold trace and copied into a spreadsheet. The difference in amplitude was calculated for each frequency, and the largest delta was recorded for each channel and data rate.

MEASUREMENTS


Peak Excursion					
Date: 12-Apr-04			Engineer: Evan Gould		
Company: YDI			EUT: Marquee Bridge		
Analyzer: Orange			Cable: 142LL #6		
Notes:					
Channel	Data Rate (Mbps)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result (Pass/Fail)
52	6	5.30	13.00	-7.70	Pass
56	6	5.05	13.00	-7.95	Pass
64	6	5.05	13.00	-7.95	Pass
52	54	5.64	13.00	-7.36	Pass
56	54	6.27	13.00	-6.73	Pass
64	54	6.42	13.00	-6.58	Pass



SAMPLE ANALYZER PLOT

Agilent 09:12:55 Apr 12, 2004

R L

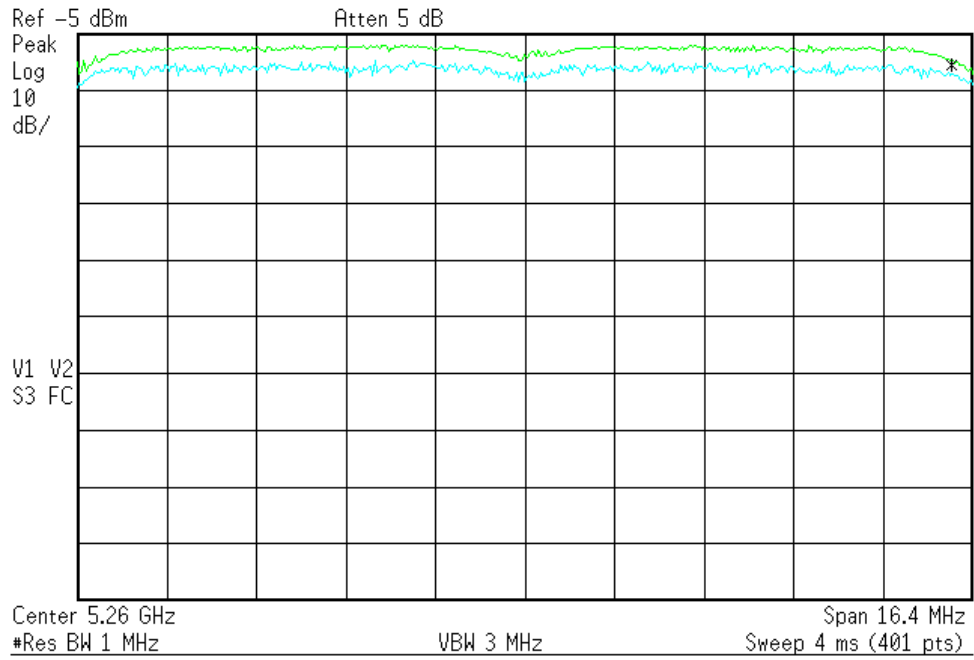

Band Edges

LIMITS

“The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.” [15.407(7)]

MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC		
Date: 13-Apr-04			Company: YDI			Work Order: E0201			
Engineer: Evan Gould			EUT Desc: Marquee Bridge			Measurement Distance: 1 m			
Notes:									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Ch.64 6Mbps Vav	5350.0	33.0	17.5	34.8	3.0	53.3	63.5	-10.2	Pass
Ch.52 6Mbps Vav	5150.0	29.3	17.6	34.4	2.9	49.0	63.5	-14.5	Pass
Table Result:		Pass		by		-10.2 dB		Worst Freq: 5350.0 MHz	
Test Site: "F"		Pre-Amp: White		Cable: 6 RG142LL		Analyzer: Orange		Antenna: Yellow Horn	



Antenna Gain

REQUIREMENT

This purpose of this section is to demonstrate the measured directional gain of the antenna.

MEASUREMENTS

Antenna Gain		
Date: 4-Mar-04		
Company: YDI		
EUT: Marquee Bridge		
Engineer: Evan Gould		
Antenna: Yellow Horn		
Analyzer: Orange		
Cable: 142LL #6		
Notes:		
Antenna Model	Specified Gain (dBi)	Measured Gain (dBi)
MT-485002	23.0	27.3



Radiated Spurious Emissions

LIMITS

“Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.” [15.407(b)(6)]

MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC		
Date: 13-Apr-04		Company: YDI			Work Order: E0201				
Engineer: Evan Gould		EUT Desc: Marquee Bridge							
Frequency Range: 30-1000MHz				Measurement Distance: 10 m					
Notes:				EUT Max Freq:					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
V	120.0	42.5	24.7	5.9	1.4	25.1	33.0	-7.9	Pass
V	132.1	47.3	24.7	7.3	1.5	31.4	33.0	-1.6	Pass
V	161.0	29.2	24.6	8.6	1.7	14.9	33.0	-18.1	Pass
H	200.0	38.8	24.5	9.5	1.9	25.7	33.0	-7.3	Pass
H	240.0	34.2	24.4	10.8	2.1	22.7	35.5	-12.8	Pass
H	264.2	28.2	24.3	11.8	2.3	18.0	35.5	-17.5	Pass
Table Result:		Pass		by		-1.6 dB		Worst Freq: 132.1 MHz	
Test Site: "F"		Pre-Amp: Orange		Cable: 65 ft RG8A/U		Analyzer: Green		Antenna: Blue	

No spurious emissions detected in the range 1-60GHz



AC Line Conducted Emission Measurements
LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS

AC Mains Conducted Emissions										Curtis-Straus LLC
Date: 13-Apr-04		Company: YDI				Work Order: E0201				
Engineer: Evan Gould		EUT Desc: Marquee Bridge				Test Site: EMI 1				
Notes:										
LISN(s): Red Orange										
Range: 0.15-30Mhz										
Other Equipment:					Spectrum Analyzer: Red					
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB	
0.17	35.0	31.2	26.7	22.5	20.0	65.0	-10.0	55.0	-8.3	Pass
1.10	23.8	22.8	20.5	20.6	20.0	56.0	-12.2	46.0	-5.4	Pass
3.70	20.1	14.5			20.0	56.0	-15.9	46.0	-5.9	Pass
5.90	17.1	17.8			20.0	60.0	-22.2	50.0	-12.2	Pass
8.70	10.3	11.4			20.0	60.0	-28.6	50.0	-18.6	Pass
22.50	12.1	10.6			20.0	60.0	-27.9	50.0	-17.9	Pass
Table Result: Pass by -5.40 dB Worst Freq: 1.10 MHz										



Voltage Variation

REQUIREMENT

“For intentional radiators, measurements of the variation of the...radiated signal level of the fundamental frequency component of the emission...shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.”
 [15.31(e)]

MEASUREMENTS

Voltage Variation		
Date: 12-Apr-04 Company: YDI EUT: Marquee Bridge		
Engineer: Evan Gould Analyzer: Orange Cable: 142LL #6		
Notes:		
Supply Voltage	Frequency (MHz)	Reading (dBm)
(85%) 27.6VDC	5260.0	-6.3
(nominal) 24VDC	5260.0	-5.8
(115%) 20.4VDC	5260.0	-6.1

Frequency Stability

REQUIREMENT

“Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.” [15.407(g)]

FCC Part 15.407 (g)								
Voltage Variation, Temperature and Frequency Stability								
Company: YDI					Work Order: E0201			
EUT: Marquee Bridge Intergrated Antenna					Date: 4/21/2004			
Engineer: Jia-Lin Fu								
Test Equipment Used:								
Spectrum Analyzer: Black, Green								
Test Site: Environmental Chamber								
RBW: 1MHz								
Nominal Input Voltage: 24V								
Requirement: Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of 5.15-5.35 GHz under all conditions of normal operation as specified in the users manual.								
Input Voltage	Temperature	Frequency Low Channel	Frequency (delta)	Frequency High Channel	Frequency (delta)	Amplitude High Channel	Amplitude (delta)	Result
(V)	(°C)	(GHz)	(kHz)	(GHz)	(kHz)	(dBuV)	(dBuV)	
24	-30	5.2493	-1000	5.3313	-500	--	--	Pass
20.4	20	5.2470	1300	5.3310	-200	89.10	-0.10	Pass
24	20	5.2483	--	5.3308	--	89.00	--	--
27.6	20	5.2478	500	5.3310	-200	89.20	0.20	Pass
24	50	5.2485	200	5.3310	-200	--	--	Pass



Test Equipment Used

REV. 4/22/04

SPECTRUM ANALYZERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	21-MAY-2004
GREEN	9kHz-26.5GHz	8593E	HP	3829A03618	00143	10-OCT-2004
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	15-JUL-2004
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	27-JUN-2004

LISNs/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	02-APR-2005
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	02-APR-2005

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
SITE F	93448	IC 2762-F	R-1688	25-MAR-2005

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
EMI 1	93448	N/A	C-1801	01-MAY-2006

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
BLUE BILOG	30MHz-1GHz	3143	EMCO	1271	00803	17-MAR-2005
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	22-MAY-2005
HF (WHITE) HORN	18-26.5GHz	801-WLM	WAVELINE	00758	00758	15-JUL-2005

MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
MIXER / HORN	26.5-40 GHz	11970A/28-442-6	HP/ATM	2332A00900/A046903-01	00369	09-JUL-2004
MIXER / HORN	40-60 GHz	M19HW/A	OML	U30110-1	00821	03-JAN-2005

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
ORANGE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00765	27-FEB-2005
WHITE	1-20GHz	SMC-12A	C-S	426643	00760	29-JUL-2004
HF (YELLOW)	18-26.5GHz	AFS4-18002650-60-8P-4	C-S	467559	00758	15-JUL-2004

CHAMBERS AND STRIPLINE	MN	MFR	SN	ASSET	CALIBRATION DUE
ENVIRONMENTAL (SAFETY)	SGTH-31S	B-M-A INC.	2245	00321	31-DEC-2004

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Terms And Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.

- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

A2LA Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999			
<p>CURTIS-STRAUS¹ 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880</p> <p>ELECTRICAL</p>		<p>EN 55011 1991, 1998 characteristics of SABS CISPR 11: 1997</p> <p>Canada ICES-001 1998 CNS13803 AS/NZS 2064: 1997</p> <p>CSA C108.8 – M1983</p> <p>CISPR 13:1996, 1998, 2001</p> <p>EN 55013: 1990, 2001</p> <p>EN 55013 Amend 12 1994</p> <p>SABS CISPR 13: 1996</p> <p>CNS 13439 AS/NZS 1053: 1999</p> <p>CISPR 14 1993 (except discontinuous disturbances)</p> <p>EN 55014 1993, 1997 discontinuous disturbances)</p> <p>AS/NZS 1044: 1995 discontinuous disturbances)</p> <p>Immunity CNS13783-1 SABS CISPR 14-1 1993</p> <p>SABS CISPR 14-2 1997 + A1:2001</p>	<p>Limits and methods of measurement of radio disturbance industrial, scientific and medical (ISM) radio-frequency equipment – Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics Limits and methods of measurement</p> <p>Industrial, scientific and medical radio frequency generators</p> <p>Industrial, Scientific and Medical Instrument</p> <p>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</p> <p>Electromagnetic Emission from Data Processing Equipment and Electronic Office Machines</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus.</p> <p>Limits and methods of measurement of radio disturbance (except characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus.</p> <p>Household Electrical Appliances</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity - Product family standard</p>
Valid until: July 31, 2005	Certificate Number: 1627-01		
<p>In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:</u></p>			
<p>Electromagnetic Compatibility (EMC) Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements</p>			
EMC Standards	Title		
Emissions			
CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.		
CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.		
EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.		
SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement		
Canada ICES-003 1997	Digital apparatus		
AS/NZS 3548 1995	Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment		
CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.		
<p>¹ Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p>			
(A2LA Cert. No. 1627-01) 10/31/03	Page 1 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 2 of 11
CISPR 14-2 1996, 1997 + A1:2001	Immunity requirements for household appliances, tools and similar apparatus.	EN 61000-6-1: 1997, 2001	Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 1: Immunity for residential, commercial and light-industrial environments
CISPR 20: 1995, 2002 with amendment 3 (associated group only)	Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment.	EN 61000-6-2: 1998, 2001	Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 2: Immunity for industrial environments
EN 55020: 1995, 2002 (associated group only)	Electromagnetic immunity of broadcast receivers and Associated equipment.	EN 50091-2 1996	Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements
CISPR 24	Information technology equipment – Immunity characteristics – Limits and methods of measurement	EN 55024 1998	Information technology equipment – Immunity Characteristics – Limits and methods of measurement.
SABS CISPR 24 1997	Information technology equipment – Immunity characteristics – Limits and methods of measurement	EN 55103-1 1997	Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission
AS/NZS 3200.1.2: 1995	Approval and test specification – Medical electrical Equipment – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests.	EN 55103-2 1997 (excluding Annex A3)	Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity
European Union Basic EMC Standards		EN 61326 1998	Electrical equipment for measurement, control and laboratory use – EMC requirements
EN 61000-4-2: 1995, 1999, 2001	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication	EN 61547 1996	Equipment for general lighting purposes – EMC immunity requirements
EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test	EN 50130-4 1996	Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems.
EN 61000-4-4 1995	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication	EN 55104 1995	Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard.
EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 5: Surge immunity test.	EN 50083-2 1995	Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment.
EN 61000-4-8 1994	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induce by radio-frequency fields.	EN 60601-1-2: 1993, 2002	Medical electrical equipment Part 1: general requirements for safety Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests
EN 61000-4-11 1994	Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic field immunity test.	IEC 1800-3 1995	Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods.
ENV 61000-2-2 1993	(EMC) Part 4: Testing and measurement techniques. Section 11: Voltage dips, short interruptions and voltage Variations immunity tests.	EN 60555 Part 2 1987	Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics
EU Product Family Standards		EN 60555 Part 3 1987	Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations.
EN 50081-1 1992	Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.)	EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999	Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions
EN 50081-2 1993	Electromagnetic compatibility – Generic emission standard. Part 2: Industrial environment	ETS 300 386-1 1994	Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems.
EN 50082-1 1992, 1998	Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry		Equipment Engineering (EE); Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels
EN 50082-2 1995	Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment		
(A2LA Cert. No. 1627-01) 10/31/03	Page 3 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 4 of 11



<p>ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1</p> <p>ETS 300 132-1 1996</p> <p>ETS 300 132-2 1996</p> <p>ETR 283 1997</p> <p><i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999</p> <p>EN 300 330 v1.2.1: 1998, 1999</p> <p>ETS 300 328 1996</p> <p>ETS EN 300 440 v1.2.1 1999</p> <p>EN 301 893:2002 v1.2.1</p> <p>ETS 300 836-1:1998</p> <p>EN301 489-17:2002 v1.2.1</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 5 of 11</p>	<p>Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard.</p> <p>Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources</p> <p>Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)</p> <p>Equipment Engineering (EE): Transient voltages at Interface A on telecommunications direct current (DC) power distributions.</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS)</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz</p> <p>Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 Ghz to 40 Ghz frequency range</p> <p>Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive</p> <p>Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2.4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment</p> <p>EN 300 328-2:2001 v1.2.1</p> <p>EN 301 489-1:2002</p> <p>EN 60669-2-1:2002</p> <p><i>Canada Radio Standards</i> Canadian GL-36 1995</p> <p>Canadian RSS-119 1999, 2000 Issue 6</p> <p>Canadian RSS-134 1996 & 2000, Issue 1</p> <p>Canadian RSS-210 2000 Issue 3,</p> <p>RFS29 1998 Specification for Restricted Radiation Radio Apparatus (New Zealand)</p> <p><i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices.</p> <p>47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices.</p> <p>47 CFR FCC Unlicensed Personal Communications System (PCS) devices</p> <p>47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques.</p> <p>47 CFR FCC Personal mobile Radio Services in the following FCC Rule Parts 22, 24, 25, 27.</p> <p>47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97.</p> <p>47 CFR FCC Maritime and Aviation Scope RadioServices in 47 CFR Parts 80 and 87</p> <p>47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101.</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements</p> <p>Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches</p> <p>Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band.</p> <p>Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz</p> <p>Industry Canada -- 900 MHz narrowband personal communications services</p> <p>Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices</p> <p>Scope A1</p> <p>Scope A2</p> <p>Scope A3</p> <p>Scope A4</p> <p>B1</p> <p>B2</p> <p>B3</p> <p>B4</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 6 of 11</p>
<p>FCC/OST MP-5 1986</p> <p>GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3</p> <p><i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001</p> <p>ANSI C63.5 1988</p> <p><i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991</p> <p><i>Swedish EMC Standards</i> BAKOM 3336.3 1995</p> <p><i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996</p> <p><i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999</p> <p>Telecommunications Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (<i>excluding volume control</i>); Protocol analysis and Jitter testing.</p> <p>Telecom Standards</p> <p>FCC 47 CFR Part 68 Telephone</p> <p>CS-03 Issue 8 1996 through amendment 5</p> <p>TIA/EIA TSB31-B 1998</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 7 of 11</p>	<p>FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment.</p> <p>Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment.</p> <p>American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz.</p> <p>American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas.</p> <p>IEEE recommended practice on surge voltages in low-voltage AC power circuits</p> <p>Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements.</p> <p>South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment.</p> <p>Technical Requirements</p> <p>Instruction for Test Conditions for Requirement under Test</p> <p>TIA/EIA-IS-968</p> <p>TIA/EIA-IS-883</p> <p>TIA-968-A</p> <p>T1.TRQ.6-2001</p> <p>Canada VDSL Issue 1 January 2003</p> <p>AS/ACIF S002-2001</p> <p>AS/ACIF S016-2001</p> <p>AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001</p> <p>ITU-T G.703 HKTA 2028</p> <p>HKTA 2029</p> <p>TBR 1 : 1995</p> <p>TBR 2 : 1997</p> <p>Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network</p> <p>Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network</p> <p>Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network</p> <p>Technical Requirements for SHDSL, HDLSL2, HDLSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry</p> <p>Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment</p> <p>Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network</p> <p>Requirements for Customer Equipment for connection to hierarchical digital interfaces</p> <p>Requirements for ISDN Basic Access Interface</p> <p>Requirements for ISDN Primary Rate Access Interface</p> <p>Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network --</p> <p>Part 1: General</p> <p>Part 2: Broadband</p> <p>Part 3: DC, Low Frequency AC and Voiceband</p> <p>Physical/electrical characteristics of hierarchical Digital interfaces</p> <p>Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s</p> <p>Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s</p> <p>Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s</p> <p>Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit</p> <p>(A2LA Cert. No. 1627-01)</p> <p style="text-align: right;">10/31/03 Page 8 of 11</p>



<p>TBR 3 : 1995 + Amdt : 1997</p> <p>TBR 4 : 1995 + Amdt : 1997</p> <p>TBR 012 : 1993 + Amdt : 1996</p> <p>TBR 013 : 1996</p> <p>TBR 21 : 1998</p> <p>TBR 24 : 1997</p> <p><i>Australia</i> TS 002 : 1997</p> <p>TS 016 : 1997</p> <p>TS 031 : 1997</p> <p>TS 038 : 1997</p> <p>AS/ACIF S043.2:2001</p> <p>Product Safety General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (excluding x-ray tests).</p> <p><u>Product Safety Standards</u></p> <p>Specific Product Safety Standards IEC 950 1991</p> <p>UL 1950 1998</p> <p>CSA C22.2 No.950-95 UL 60950 2000</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access</p> <p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access</p> <p>Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment</p> <p>Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface</p> <p>Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling</p> <p>Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface</p> <p>Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network</p> <p>General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces</p> <p>Requirements for ISDN Basic Access Interface</p> <p>Requirements for ISDN Primary Rate Access Interface</p> <p>Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband</p> <p>Title</p> <p>Safety of information technology equipment including Amendments 1, 2, 3, and 4 electrical business equipment.</p> <p>Safety of information technology equipment, including electrical business equipment.</p> <p>Safety of Information Technology Equipment (UL 1950)</p> <p>Safety of information technology equipment</p>	<p>IEC 60950 2000</p> <p>EN 60950 1997, 1998, 2000</p> <p>IEC 60950-1 2001</p> <p>UL 60950-1 2003</p> <p>CSA C22.2 No. 60950-00</p> <p>CSA C22.2 No. 60950-1 03</p> <p>AS/NZS 3260 1993</p> <p>AS/NZS 3260 Supp 1 1996</p> <p>ACA TS 001 1997</p> <p>UL 1459 1995</p> <p>IEC 1010-1 1990</p> <p>IEC 61010-1 1993</p> <p>EN 61010-1 1993, 2001</p> <p>IEC 61010-1 2001</p> <p>UL 61010B-1 2003</p> <p>UL 3101-1 1993</p> <p>CAN/CSA 1010-1 1999 (Including AM 2)</p> <p>UL 3111-1 1996</p> <p>UL 3121-1 1995</p> <p>IEC 60601-1 1995</p> <p>EN 60601-1 1995 (Including AM 2)</p> <p>UL 2601-1 1997</p> <p>IEC 60065 1998, 2000</p> <p>ANSI/UL 6500: 1998</p> <p>CAN/CSA 60065-00</p> <p>AS/NZS 3250 1995</p> <p>AS/NZS 60065 2000</p> <p>Canadian C22.2 No. 1-94 (1-98)</p> <p>1998</p> <p>EN 60065 1994</p> <p>IEC 60825 1990</p> <p>EN 60825-1 1994</p> <p>IEC 60825-1 2001</p> <p>IEC 60825-2 2000-5 systems</p> <p>IEC 60825-4 1997-11</p> <p>IEC 60335-1 1995</p> <p>(Including AM2 – 1997 & AM 12 – 1997)</p> <p>EN 60335-1 2001</p> <p>UL 60335-1 1998</p> <p>CAN/CSA E335-1 1994</p>	<p>Safety of information technology equipment including electrical business equipment.</p> <p>Safety of information technology equipment, including Electrical business equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business Equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993)</p> <p>Australian Communications Authority – Safety requirements for customer equipment.</p> <p>Telephone Equipment</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Electrical equipment for laboratory use Part 1: General requirements.</p> <p>Electrical measuring and test equipment. Part 1: General requirements.</p> <p>Medical electrical equipment. Part 1: General requirements for safety.</p> <p>Medical electrical equipment. Part 1: General Requirements for safety.</p> <p>Audio, video and similar electronic apparatus – Safety requirements</p> <p>Audio/video and musical instrument apparatus for Household, commercial and similar general use</p> <p>Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use</p> <p>Audio, video and similar electronic equipment. Consumer and 1994, commercial products</p> <p>Safety requirements for main operated electronic and related apparatus for household and similar general use.</p> <p>Radiation safety of laser products, equipment Classification, requirements and user’s guide</p> <p>Safety of laser products Part 1: equipment Classification, requirements and user’s guide.</p> <p>Safety of laser products – Part 2: Safety of optical communication</p> <p>Safety of laser products – Part 4: Laser guards</p> <p>Safety of household and similar electrical appliances</p> <p>Part 1: General requirements</p>
<p>UL 61010A-1 : 2002</p> <p>EN 61010-1 : 2001</p> <p>AS/NZS 60950 : 2000</p> <p>Environmental²</p> <p><u>Environmental Standards</u></p> <p>GR-63-CORE</p> <p>ETS 300 019</p> <p>(vibration up to 1000Hz)</p>	<p>Electrical equipment for laboratory use; part 1: General requirements</p> <p>Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements</p> <p>Safety information technology equipment</p> <p>Title</p> <p>NEBS Requirements: Physical Protection</p> <p>Environmental conditions and environmental tests For telecommunications equipment</p>	<p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p>Page 9 of 11</p>	<p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p>Page 10 of 11</p>
<p>² Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Page 11 of 11</p>		

