

FCC SAR Test Report

Report No. : SA130801C15
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.
Product : Smartphone
FCC ID : NM80P3P700
Brand : HTC
Model No. : 0P3P700
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)
KDB 248227 D01 v01r02 / KDB 447498 D01 v05r01 / KDB 648474 D04 v01r01
KDB 941225 D01 v02 / KDB 941225 D05 v02r02 / KDB 941225 D06 v01r01
Date of Testing : Aug. 17, 2013 ~ Aug. 27, 2013

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :

Evonne Liu
Evonne Liu / Specialist

Approved By :

Roy Wu
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

FCC SAR Test Report

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR)	6
3.2 SPEAG DASY System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	14
3.4 SAR Measurement Procedure	15
3.4.1 Area & Zoom Scan Procedure	15
3.4.2 Volume Scan Procedure.....	15
3.4.3 Power Drift Monitoring.....	16
3.4.4 Spatial Peak SAR Evaluation	16
3.4.5 SAR Averaged Methods	16
4. SAR Measurement Evaluation	17
4.1 EUT Configuration and Setting.....	17
4.2 EUT Testing Position	19
4.2.1 Head Exposure Conditions.....	19
4.2.2 Body-Worn Accessory Exposure Conditions	21
4.2.3 Hotspot Mode Exposure conditions.....	22
4.2.4 Extremity Exposure conditions	23
4.2.5 SAR Test Exclusions	23
4.3 Tissue Verification	24
4.4 System Validation.....	25
4.5 System Verification.....	26
4.6 Maximum Output Power.....	27
4.6.1 Maximum Conducted Power	27
4.6.2 Measured Conducted Power Result.....	27
4.7 SAR Testing Results	34
4.7.1 SAR Results for Head	34
4.7.2 SAR Results for Body-Worn (Separation Distance is 1.0 cm Gap)	36
4.7.3 SAR Results for Hotspot (Separation Distance is 1.0 cm Gap).....	38
4.7.4 SAR Results for Extremity (Separation Distance is 0 cm Gap)	41
4.7.5 SAR Measurement Variability.....	41
4.7.6 Simultaneous Multi-band Transmission Evaluation	42
5. Calibration of Test Equipment.....	55
6. Measurement Uncertainty	56
7. Information on the Testing Laboratories.....	58

Appendix A. SAR Plots of System Verification

Appendix B. SAR Plots of SAR Measurement

Appendix C. Calibration Certificate for Probe and Dipole

Appendix D. Photographs of EUT and Setup



Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Initial release	Sep. 03, 2013

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Head SAR _{1g} (W/kg)	Highest Reported Body-Worn SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Extremity SAR _{10g} (0 cm Gap) (W/kg)
PCE	CDMA BC0	0.38	0.50	0.50	N/A
	CDMA BC1	0.50	0.42	0.42	N/A
	CDMA BC10	0.32	0.33	0.33	N/A
	LTE 25	0.38	0.66	0.66	N/A
	LTE 26	0.19	0.32	0.32	N/A
	LTE 41	0.13	0.14	0.14	N/A
DTS	2.4G WLAN	0.42	0.05	0.05	N/A
	5.8G WLAN	0.02	0.00	N/A	0.01
NII	5.2G WLAN	0.09	0.03	N/A	0.02
	5.3G WLAN	0.04	0.00	N/A	0.03
	5.6G WLAN	0.01	0.00	N/A	0.04
DSS	Bluetooth	N/A	N/A	N/A	N/A
DXX	NFC	N/A	N/A	N/A	N/A
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-Worn (W/kg)	Hotspot (W/kg)	Extremity (W/kg)
PCE+DTS		0.73	0.69	0.69	0.01
PCE+NII		0.54	0.67	N/A	0.04
PCE+DSS		N/A	0.74	N/A	0.10

Note:

- The SAR limit (Head & Body: SAR_{1g} 1.6 W/kg, Extremity: SAR_{10g} 4.0 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

2. Description of Equipment Under Test

EUT Type	Smartphone
FCC ID	NM80P3P700
Brand Name	HTC
Model Name	0P3P700
Tx Frequency Bands (Unit: MHz)	CDMA BC0 : 824.7 ~ 848.31 CDMA BC1 : 1851.25 ~ 1908.75 CDMA BC10 : 817.9 ~ 823.1 LTE Band 25 : 1850.7 ~ 1914.3 LTE Band 26 : 814.7 ~ 848.3 LTE Band 41 : 2498.5 ~ 2687.5 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5805 Bluetooth : 2402 ~ 2480 NFC : 13.56
Uplink Modulations	CDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK NFC : ASK
Maximum Tune-up Conducted Power (Unit: dBm)	CDMA BC0 : 25.0 CDMA BC1 : 24.5 CDMA BC10 : 24.5 LTE Band 25 : 23.8 LTE Band 26 : 23.2 LTE Band 41 : 22.2 WLAN 2.4G : 18.2 WLAN 5.2G : 16.5 WLAN 5.3G : 16.5 WLAN 5.6G : 16.5 WLAN 5.8G : 16.5 Bluetooth : 6.0
Antenna Type	Fixed Internal Antenna
EUT Stage	Identical Prototype

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

FCC SAR Test Report



Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY4





Fig-3.3 DASY5

FCC SAR Test Report


3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	


3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report


3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	


FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	


Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

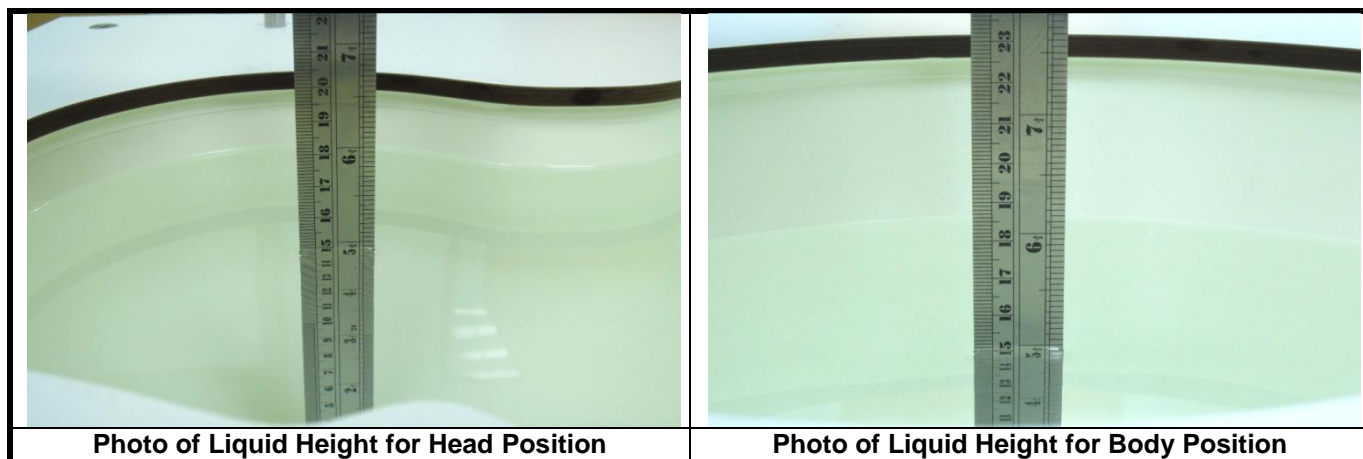

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

The following table gives the recipes for tissue simulating liquids.


Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

FCC SAR Test Report

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

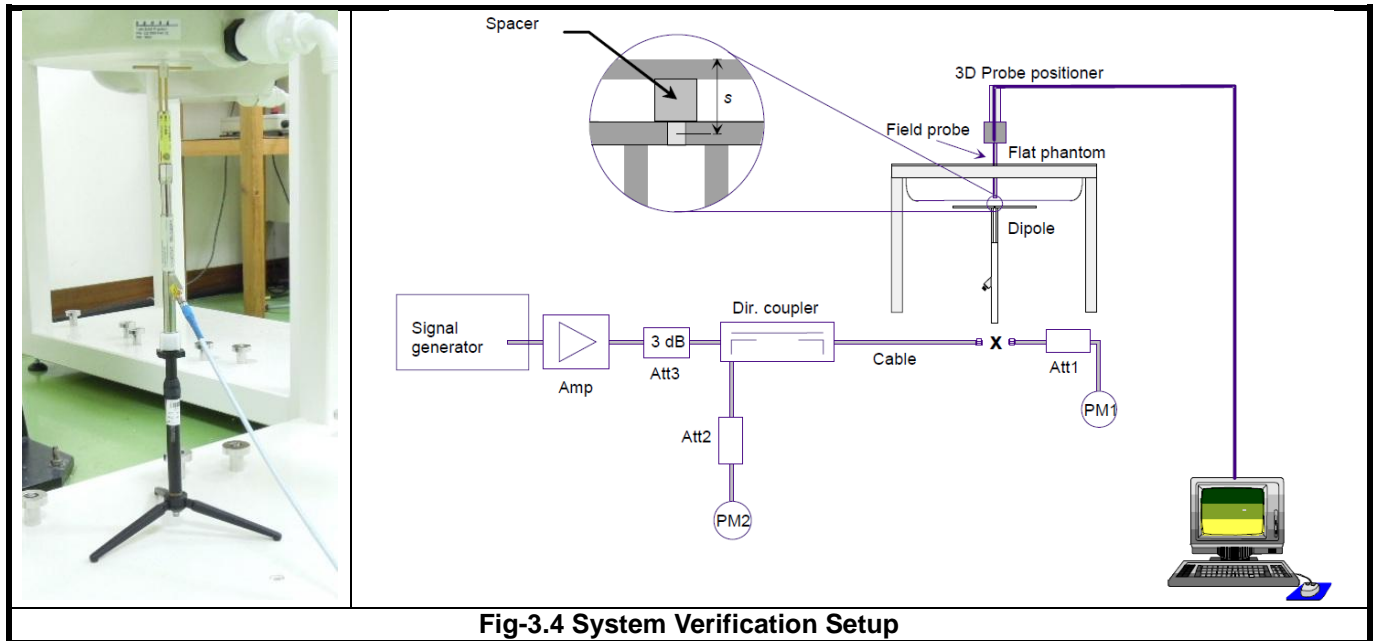

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

FCC SAR Test Report

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01 v01r01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

FCC SAR Test Report

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

The EUT is a voice/data transmitter device that contains one WWAN transmitter (CDMA2000 / LTE), and two WWAN antennas for transmit diversity. Confirming the LTE transmitter follows 3GPP standards, is category 3, FDD-LTE band 25 (BW 1.4/3/5/10/15/20 MHz), FDD-LTE band 26 (BW 1.4/3/5/10 MHz), TDD-LTE band 41 (BW 5/10/15/20 MHz), supports QPSK / 16QAM modulations, and supports data transmission only. Tested per 3GPP 36.521 maximum transmit procedures for both QPSK / 16QAM.

LTE Maximum Power Reduction in accordance with 3GPP 36.101: Power Reduction in accordance to 3GPP is active all times during LTE operation.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with A-MPR requirements defined in 36.101 section 6.2.4 that may be required to meet 3GPP Adjacent Channel Leakage Ratio ("ACLR") requirements. A-MPR was disabled for all FCC compliance testing.

The simultaneous transmission possibilities are listed as below.

Simultaneous TX Combination	Configuration	Head (Voice / VoIP)	Body Worn (Voice / VoIP)	Hotspot (Data)
1	CDMA2000 BC0 (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
2	CDMA2000 BC1 (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
3	CDMA2000 BC10 (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
4	LTE 25 (Data) + WLAN (Data)	Yes	Yes	Yes
5	LTE 26 (Data) + WLAN (Data)	Yes	Yes	Yes
6	LTE 41 (Data) + WLAN (Data)	Yes	Yes	Yes
7	CDMA2000 BC0 (Voice / Data) + BT (Data)	No	Yes	No
8	CDMA2000 BC1 (Voice / Data) + BT (Data)	No	Yes	No
9	CDMA2000 BC10 (Voice / Data) + BT (Data)	No	Yes	No
10	LTE 25 (Data) + BT (Data)	No	Yes	No
11	LTE 26 (Data) + BT (Data)	No	Yes	No
12	LTE 41 (Data) + BT (Data)	No	Yes	No

Note :

1. The WWAN transmitter can only use either CDMA or LTE at a time.
2. The WLAN and BT cannot transmit simultaneously, so there is no co-location test requirement for WLAN and BT.

FCC SAR Test Report

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for CDMA2000, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For CDMA, head SAR is tested under 1xRTT mode using RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum power is less than 1/4 dB higher than RC3. SAR for multiple code channels (FCH+SCH_n) is not required when the maximum power is less than 1/4 dB higher than that measured with FCH only. SAR for EVDO Rev.0 is not required when the maximum power is less than 1/4 dB higher than RC3 (1xRTT). SAR for EVDO Rev.A is not required when the maximum power is less than Rev.0 or less than 1/4 dB higher than RC3. The steps for system simulator (Agilent E5515C) setup are as below.

1. Set the System ID and Network ID
2. Set the Cell Band and connecting Channel
3. Set the power control to All Up Bits
4. Press "Originate Call" button

Hotspot SAR is tested under EVDO Rev.0 mode using Reverse Data Channel rate of 153.6 kbps in subtype 0/1 Physical Layer Configurations, and the power control set "All Up Bits". SAR for EVDO Rev.A is not required since its power is less than EVDO Rev.0. SAR for 1xRTT is not required since its power is less than 1/4 dB higher than EVDO Rev.0. The steps for system simulator (Agilent E5515C) setup are as below.

1. Set the Sector ID
2. Set the Protocol Release
3. Set the Cell Band and connecting Channel
4. Set the RTAP Rate
5. Set the power control
6. Press "Start Data Connection" button

For LTE, set the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB in base station simulator. When the EUT has registered and communicated to base station simulator, set the simulator to make EUT transmitting the maximum radiated power. The steps for system simulator (Anritsu MT8820C) setup are as below.

1. Press the "Std" button to select "LTE 22.20S" function
2. Choose the "Screen Select" item to "Fundamental Measurement"
3. Enter the "Common" item
4. Set the Operating Band
5. Set the Channel Bandwidth
6. Set the UL Channel & Frequency
7. Set the Modulation
8. Set the RB number and RB shift
9. Press "Start Call" button when EUT register to the system simulator
10. Set the TX-1 Max. Power to make the EUT transmit maximum output power

In addition, the TDD-LTE for this device supports Uplink-Downlink configuration 1 only. Therefore, SAR is tested with fixed periodic duty at the highest duty factor using Uplink-Downlink configuration 1 with special sub-frame configuration 5 per KDB 941225 D05 and 3GPP TS 36.211.

FCC SAR Test Report

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. According to KDB 248227 D01, WLAN SAR should be tested at the lowest data rate, and testing at higher data rate is not required when the maximum average output power is less than 1/4 dB higher than those measured at the lowest data rate. Since the WLAN power at lowest data rate has highest output power, WLAN SAR for this device was performed at the lowest data rate as set in 1 Mbps for 802.11b, and 6 Mbps for 802.11a. This RF signal utilized in SAR measurement has almost 100% duty cycle for 802.11b, and 89% duty cycle for 802.11a. Therefore the duty factor is set to 1 for 802.11b, and 1.12 for 802.11a during WLAN SAR testing.

4.2 EUT Testing Position

According to KDB 648474 D04, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2003 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
 - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
 - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
 - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

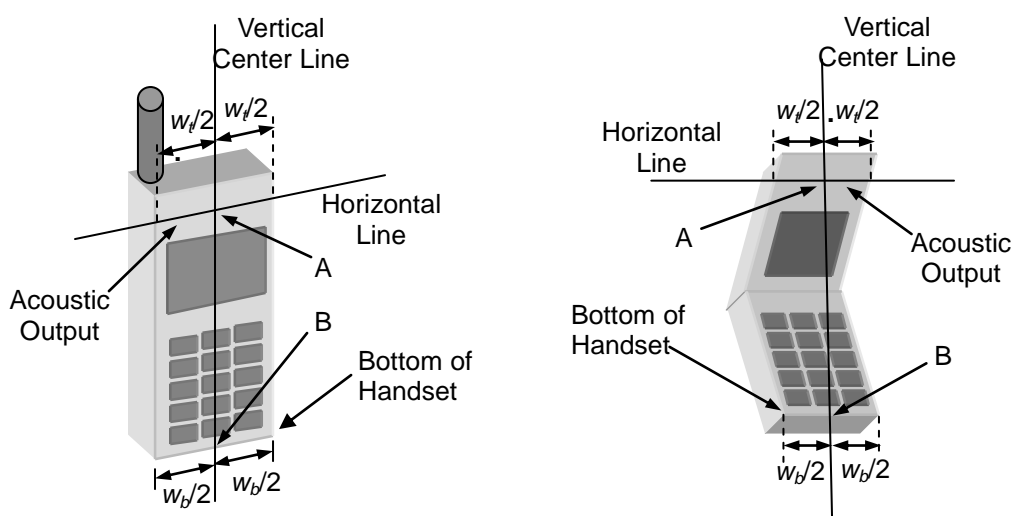


Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

FCC SAR Test Report

2. Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

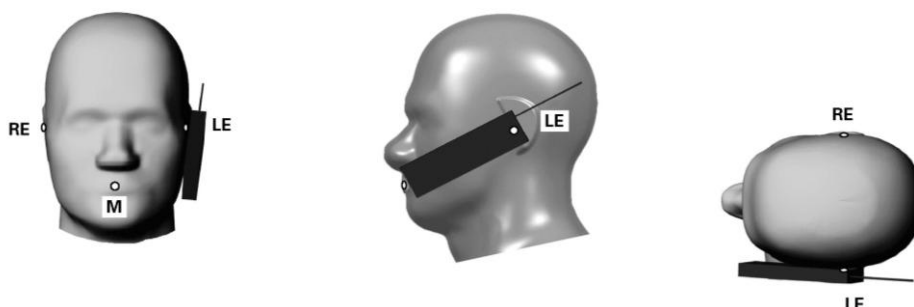


Fig-4.2 Illustration for Cheek Position

3. Tilted Position

- To position the device in the "cheek" position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

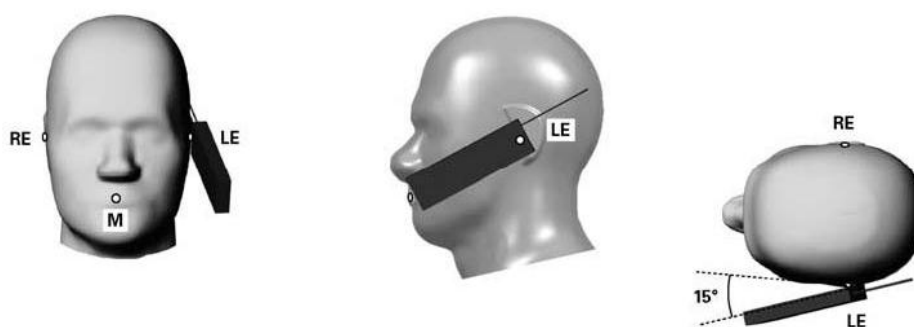


Fig-4.3 Illustration for Tilted Position

FCC SAR Test Report

4.2.2 Body-Worn Accessory Exposure Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 D01 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.

A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance $\leq 5 \text{ mm}$ to support compliance.


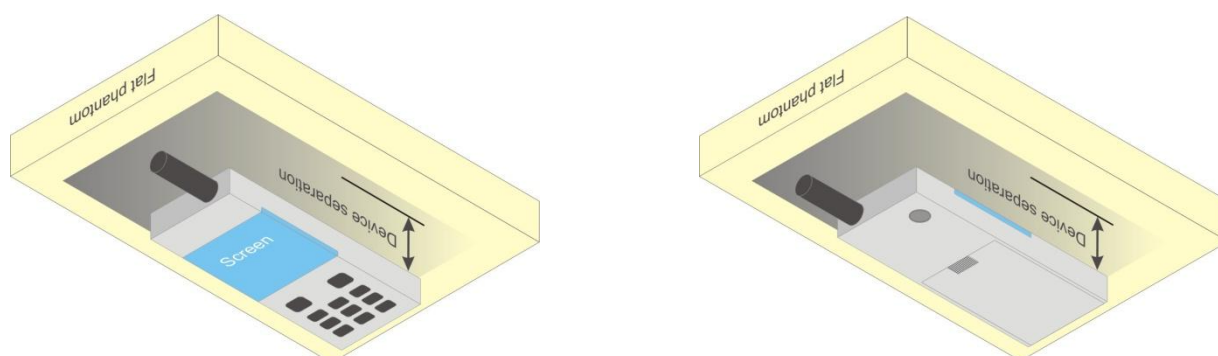


Fig-4.4 Illustration for Body Worn Position

4.2.3 Hotspot Mode Exposure conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

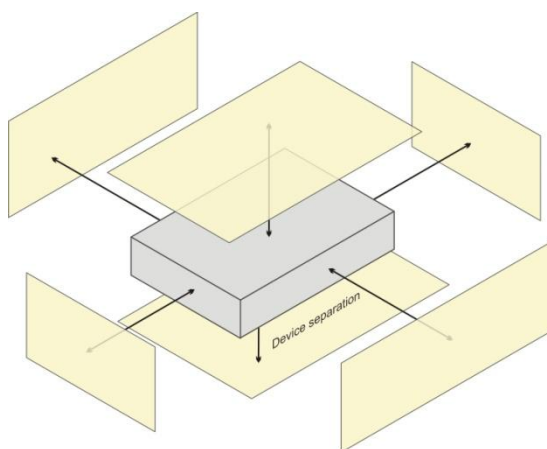

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Top Side	Bottom Side	Left Side	Right Side
WWAN Ant-0	V	V		V	V	V
WWAN Ant-1	V	V	V		V	
WLAN / BT	V	V	V			V

FCC SAR Test Report

4.2.4 Extremity Exposure conditions

For smart phones with a display diagonal dimension > 15 cm or an overall diagonal dimension > 16 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg. The normal tablet procedures in KDB 616217 are required when the over diagonal dimension of the device is > 20 cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Extremity 10-g SAR is also not required for the front (top) surface of large form factor full size tablets. The more conservative tablet SAR results can be used to support the 10-g extremity SAR for phablet mode.
3. The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions.

4.2.5 SAR Test Exclusions

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

$$\frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \sqrt{f_{(\text{GHz})}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Body-Worn			Extremity		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
BT (2.48 GHz)	6.0	4	10	0.6	No	0	1.3	No

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Aug. 17, 2013	Head	835	20.5	0.90	42.273	0.90	41.5	0.00	1.86
Aug. 27, 2013	Head	835	20.5	0.891	42.108	0.90	41.5	-1.00	1.47
Aug. 20, 2013	Head	1900	20.5	1.40	39.426	1.40	40.0	0.00	-1.44
Aug. 24, 2013	Head	1900	20.5	1.406	39.596	1.40	40.0	0.43	-1.01
Aug. 23, 2013	Head	2450	20.5	1.887	37.74	1.80	39.2	4.83	-3.72
Aug. 23, 2013	Head	2600	20.5	2.056	37.575	1.96	39.0	4.90	-3.65
Aug. 17, 2013	Head	5200	20.5	4.766	35.016	4.66	36.0	2.27	-2.73
Aug. 18, 2013	Head	5300	20.5	4.792	34.745	4.76	35.9	0.67	-3.22
Aug. 18, 2013	Head	5600	20.5	5.12	34.235	5.07	35.5	0.99	-3.56
Aug. 21, 2013	Head	5800	20.5	5.50	34.297	5.27	35.3	4.36	-2.84
Aug. 20, 2013	Body	835	20.5	0.975	55.293	0.97	55.2	0.52	0.17
Aug. 27, 2013	Body	835	20.5	0.973	54.159	0.97	55.2	0.31	-1.89
Aug. 21, 2013	Body	1900	20.5	1.571	52.398	1.52	53.3	3.36	-1.69
Aug. 23, 2013	Body	2450	20.5	1.98	52.453	1.95	52.7	1.54	-0.47
Aug. 21, 2013	Body	2600	20.5	2.193	52.153	2.16	52.5	1.53	-0.66
Aug. 20, 2013	Body	5200	20.5	5.351	47.485	5.30	49.0	0.96	-3.09
Aug. 23, 2013	Body	5300	20.5	5.523	47.744	5.42	48.9	1.90	-2.36
Aug. 23, 2013	Body	5600	20.5	5.961	47.19	5.77	48.5	3.31	-2.70
Aug. 23, 2013	Body	5800	20.5	6.254	46.801	6.00	48.2	4.23	-2.90

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01 v01r01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point		Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Aug. 17, 2013	3650	Head	835	0.90	42.273	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 27, 2013	3801	Head	835	0.891	42.108	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 20, 2013	3650	Head	1900	1.40	39.426	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 24, 2013	3650	Head	1900	1.406	39.596	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 23, 2013	3650	Head	2450	1.887	37.74	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 23, 2013	3650	Head	2600	2.056	37.575	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 17, 2013	3650	Head	5200	4.766	35.016	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 18, 2013	3650	Head	5300	4.792	34.745	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 18, 2013	3650	Head	5600	5.12	34.235	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 21, 2013	3650	Head	5800	5.50	34.297	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 20, 2013	3650	Body	835	0.975	55.293	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 27, 2013	3801	Body	835	0.973	54.159	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 21, 2013	3650	Body	1900	1.571	52.398	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 23, 2013	3650	Body	2450	1.98	52.453	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 21, 2013	3650	Body	2600	2.193	52.153	Pass	Pass	Pass	N/A	N/A	N/A
Aug. 20, 2013	3590	Body	5200	5.351	47.485	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 23, 2013	3650	Body	5300	5.523	47.744	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 23, 2013	3650	Body	5600	5.961	47.19	Pass	Pass	Pass	OFDM	N/A	Pass
Aug. 23, 2013	3650	Body	5800	6.254	46.801	Pass	Pass	Pass	OFDM	N/A	Pass

4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Aug. 17, 2013	Head	835	9.68	2.29	9.16	-5.37	4d121	3650	1277
Aug. 27, 2013	Head	835	9.68	2.31	9.24	-4.55	4d121	3801	861
Aug. 20, 2013	Head	1900	40.60	10.2	40.80	0.49	5d036	3650	1277
Aug. 24, 2013	Head	1900	40.60	10.7	42.80	5.42	5d036	3650	1277
Aug. 23, 2013	Head	2450	52.50	13.0	52.00	-0.95	737	3650	1277
Aug. 23, 2013	Head	2600	57.80	13.9	55.60	-3.81	1020	3650	1277
Aug. 17, 2013	Head	5200	79.00	8.20	82.00	3.80	1019	3650	1277
Aug. 18, 2013	Head	5300	82.20	8.31	83.10	1.09	1019	3650	1277
Aug. 18, 2013	Head	5600	83.80	8.11	81.10	-3.22	1019	3650	1277
Aug. 21, 2013	Head	5800	78.90	8.09	80.90	2.53	1019	3650	1277
Aug. 20, 2013	Body	835	9.69	2.50	10.00	3.20	4d121	3650	1277
Aug. 27, 2013	Body	835	9.69	2.30	9.20	-5.06	4d121	3801	861
Aug. 21, 2013	Body	1900	41.00	9.79	39.16	-4.49	5d036	3650	1277
Aug. 23, 2013	Body	2450	49.60	12.0	48.00	-3.23	737	3650	1277
Aug. 21, 2013	Body	2600	55.80	13.7	54.80	-1.79	1020	3650	1277
Aug. 20, 2013	Body	5200	73.00	7.07	70.70	-3.15	1019	3590	360
Aug. 23, 2013	Body	5300	74.60	7.26	72.60	-2.68	1019	3650	1277
Aug. 23, 2013	Body	5600	79.90	7.59	75.90	-5.01	1019	3650	1277
Aug. 23, 2013	Body	5800	73.40	6.77	67.70	-7.77	1019	3650	1277

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

4.6 Maximum Output Power

4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	CDMA BC0	CDMA BC1	CDMA BC10
1xRTT	25.0	24.5	24.5
1xEVDO Rev.0	24.5	24.5	24.5
1xEVDO Rev.A	24.5	24.5	24.5

Mode	LTE 25	LTE 26	LTE 41
QPSK / 16QAM	23.8	23.2	22.2

Mode	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
802.11b	18.2	N/A	N/A	N/A	N/A
802.11g	16.0	N/A	N/A	N/A	N/A
802.11a	N/A	16.5	16.5	16.5	16.5
802.11n HT20	16.1	16.5	16.5	16.5	16.3
802.11n HT40	N/A	13.0	13.5	13.5	13.5
802.11ac VHT80	N/A	13.8	13.6	13.6	13.5

Mode	Bluetooth
All	6.0

4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

Band	CDMA BC0			CDMA BC1		
Channel	1013	384	777	25	600	1175
Frequency (MHz)	824.70	836.52	848.31	1851.25	1880.00	1908.75
1xRTT RC1+SO55	24.19	24.16	24.47	24.22	24.47	24.35
1xRTT RC3+SO55	24.28	24.25	24.56	24.23	24.48	24.36
1xRTT RC3+SO32 (FCH)	24.17	24.14	24.45	24.19	24.44	24.32
1xRTT RC3+SO32 (SCH)	24.20	24.17	24.48	24.20	24.45	24.33
1xEVDO Rev.0 RTAP 153.6	24.14	24.11	24.47	24.14	24.47	24.27
1xEVDO Rev.A RETAP 4096	24.18	24.15	24.46	24.21	24.46	24.34

Band	CDMA BC10		
Channel	476	580	684
Frequency (MHz)	817.9	820.5	823.1
1xRTT RC1+SO55	24.23	24.21	24.33
1xRTT RC3+SO55	24.26	24.24	24.36
1xRTT RC3+SO32 (FCH)	24.24	24.22	24.34
1xRTT RC3+SO32 (SCH)	24.25	24.23	24.35
1xEVDO Rev.0 RTAP 153.6	24.20	24.18	24.30
1xEVDO Rev.A RETAP 4096	24.19	24.17	24.29

FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683	3PGG MPR (dB)
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz	
25 / 1.4M	QPSK	1	0	23.02	22.99	23.25	0
		1	2	23.00	23.02	23.21	0
		1	5	22.97	23.04	23.09	0
		3	0	22.93	22.85	23.05	0
		3	1	22.81	22.90	22.97	0
		3	3	22.85	22.99	22.96	0
		6	0	21.99	21.99	22.04	1
	16QAM	1	0	21.98	21.95	22.21	1
		1	2	21.96	21.98	22.17	1
		1	5	21.93	22.00	22.05	1
		3	0	21.89	21.84	22.01	1
		3	1	21.84	21.86	21.93	1
		3	3	21.85	21.95	21.92	1
		6	0	20.95	20.95	21.00	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675	3PGG MPR (dB)
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz	
25 / 3M	QPSK	1	0	23.04	23.01	23.27	0
		1	7	23.02	23.04	23.23	0
		1	14	22.99	23.06	23.11	0
		8	0	21.95	21.87	22.07	1
		8	3	21.83	21.92	21.99	1
		8	7	21.87	22.01	21.98	1
		15	0	22.01	22.01	22.06	1
	16QAM	1	0	22.00	21.97	22.23	1
		1	7	21.98	22.00	22.19	1
		1	14	21.95	22.02	22.07	1
		8	0	20.91	20.86	21.03	2
		8	3	20.86	20.88	20.95	2
		8	7	20.87	20.97	20.94	2
		15	0	20.97	20.97	21.02	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665	3PGG MPR (dB)
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz	
25 / 5M	QPSK	1	0	23.09	23.06	23.32	0
		1	12	23.07	23.09	23.28	0
		1	24	23.04	23.11	23.16	0
		12	0	22.00	21.92	22.12	1
		12	6	21.88	21.97	22.04	1
		12	13	21.92	22.06	22.03	1
		25	0	22.06	22.06	22.11	1
	16QAM	1	0	22.01	21.98	22.24	1
		1	12	21.99	22.01	22.20	1
		1	24	21.96	22.03	22.08	1
		12	0	20.92	20.87	21.04	2
		12	6	20.87	20.89	20.96	2
		12	13	20.88	20.98	20.95	2
		25	0	20.98	20.98	21.03	2

FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640	3PGG MPR (dB)
				Frequency 1855.0 MHz	Frequency 1882.5 MHz	Frequency 1910.0 MHz	
25 / 10M	QPSK	1	0	23.17	23.14	23.40	0
		1	24	23.15	23.17	23.36	0
		1	49	23.12	23.19	23.24	0
		25	0	22.08	22.00	22.20	1
		25	12	21.96	22.05	22.12	1
		25	25	22.00	22.14	22.11	1
		50	0	22.14	22.14	22.19	1
	16QAM	1	0	22.02	21.99	22.25	1
		1	24	22.00	22.02	22.21	1
		1	49	21.97	22.04	22.09	1
		25	0	20.93	20.85	21.05	2
		25	12	20.81	20.90	20.97	2
		25	25	20.85	20.99	20.96	2
		50	0	20.99	20.99	21.04	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615	3PGG MPR (dB)
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz	
25 / 15M	QPSK	1	0	23.29	23.26	23.52	0
		1	37	23.27	23.29	23.48	0
		1	74	23.24	23.31	23.36	0
		36	0	22.20	22.12	22.32	1
		36	19	22.08	22.17	22.24	1
		36	39	22.12	22.26	22.23	1
		75	0	22.26	22.26	22.31	1
	16QAM	1	0	22.16	22.13	22.39	1
		1	37	22.14	22.16	22.35	1
		1	74	22.11	22.18	22.23	1
		36	0	21.07	20.99	21.19	2
		36	19	20.95	21.04	21.11	2
		36	39	20.99	21.13	21.10	2
		75	0	21.13	21.13	21.18	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590	3PGG MPR (dB)
				Frequency 1860.0 MHz	Frequency 1882.5 MHz	Frequency 1905.0 MHz	
25 / 20M	QPSK	1	0	23.55	23.52	23.78	0
		1	50	23.53	23.55	23.74	0
		1	99	23.50	23.57	23.62	0
		50	0	22.46	22.38	22.58	1
		50	25	22.34	22.43	22.50	1
		50	50	22.38	22.52	22.49	1
		100	0	22.52	22.52	22.57	1
	16QAM	1	0	22.50	22.47	22.73	1
		1	50	22.48	22.50	22.69	1
		1	99	22.45	22.52	22.57	1
		50	0	21.41	21.33	21.53	2
		50	25	21.29	21.38	21.45	2
		50	50	21.33	21.47	21.44	2
		100	0	21.47	21.47	21.52	2

FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 26697	Mid CH 26865	High CH 27033	3PGG MPR (dB)
				Frequency 814.7 MHz	Frequency 831.0 MHz	Frequency 848.3 MHz	
26 / 1.4M	QPSK	1	0	22.74	22.92	23.00	0
		1	2	22.81	22.90	23.02	0
		1	5	22.75	22.87	23.03	0
		3	0	22.79	22.86	22.59	0
		3	1	22.37	22.50	22.57	0
		3	3	22.45	22.52	22.55	0
		6	0	21.66	21.71	21.82	1
	16QAM	1	0	21.81	21.89	21.93	1
		1	2	21.74	21.87	21.92	1
		1	5	21.72	21.84	21.92	1
		3	0	21.66	21.73	21.82	1
		3	1	21.54	21.67	21.75	1
		3	3	21.69	21.82	21.90	1
		6	0	20.53	20.68	20.72	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26705	Mid CH 26865	High CH 27025	3PGG MPR (dB)
				Frequency 815.5 MHz	Frequency 831.0 MHz	Frequency 847.5 MHz	
26 / 3M	QPSK	1	0	22.76	22.84	23.01	0
		1	7	22.75	22.92	23.03	0
		1	14	22.79	22.84	23.04	0
		8	0	21.71	21.88	21.93	1
		8	3	21.69	21.82	21.91	1
		8	7	21.64	21.77	21.90	1
		15	0	21.68	21.73	21.83	1
	16QAM	1	0	21.69	21.77	21.91	1
		1	7	21.73	21.85	21.93	1
		1	14	21.70	21.82	21.94	1
		8	0	20.64	20.71	20.83	2
		8	3	20.62	20.75	20.81	2
		8	7	20.57	20.68	20.80	2
		15	0	20.51	20.66	20.73	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26715	Mid CH 26865	High CH 27015	3PGG MPR (dB)
				Frequency 816.5 MHz	Frequency 831.0 MHz	Frequency 846.5 MHz	
26 / 5M	QPSK	1	0	22.72	22.85	23.03	0
		1	12	22.76	22.94	23.05	0
		1	24	22.76	22.91	23.06	0
		12	0	21.75	21.82	21.95	1
		12	6	21.73	21.86	21.93	1
		12	13	21.68	21.81	21.92	1
		25	0	21.62	21.77	21.85	1
	16QAM	1	0	21.71	21.89	21.93	1
		1	12	21.75	21.87	21.95	1
		1	24	21.82	21.64	21.96	1
		12	0	20.66	20.73	20.85	2
		12	6	20.64	20.77	20.83	2
		12	13	20.69	20.72	20.82	2
		25	0	20.63	20.78	20.75	2

FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 26740	Mid CH 26865	High CH 26990	3PGG MPR (dB)
				Frequency 819.0 MHz	Frequency 831.0 MHz	Frequency 844.0 MHz	
26 / 10M	QPSK	1	0	23.01	23.09	23.15	0
		1	24	23.07	23.13	23.17	0
		1	49	23.01	23.14	23.18	0
		25	0	21.96	22.03	22.07	1
		25	12	21.94	21.97	22.05	1
		25	25	21.85	21.94	22.04	1
		50	0	21.78	21.90	21.97	1
	16QAM	1	0	21.97	22.00	22.05	1
		1	24	21.99	22.03	22.07	1
		1	49	21.93	22.02	22.08	1
		25	0	20.82	20.89	20.97	2
		25	12	20.82	20.91	20.95	2
		25	25	20.83	20.98	20.94	2
		50	0	20.66	20.81	20.87	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 39675	Mid CH 40148	Mid CH 40620	Mid CH 41093	High CH 41565	3PGG MPR (dB)
				Frequency 2498.5 MHz	Frequency 2545.8 MHz	Frequency 2593.0 MHz	Frequency 2640.3 MHz	Frequency 2687.5 MHz	
41 / 5M	QPSK	1	0	21.85	21.92	21.97	21.94	21.89	0
		1	12	21.88	22.03	22.13	22.02	21.95	0
		1	24	21.47	21.71	21.98	21.90	21.77	0
		12	0	20.82	20.98	21.09	20.09	20.91	1
		12	6	20.84	20.91	21.03	20.97	20.94	1
		12	13	20.75	20.90	20.99	20.95	20.88	1
		25	0	20.75	20.85	21.02	20.95	20.92	1
	16QAM	1	0	20.75	20.80	20.87	20.82	20.79	1
		1	12	20.78	20.90	21.03	20.95	20.85	1
		1	24	20.37	20.64	20.88	20.73	20.67	1
		12	0	19.72	19.89	19.99	19.89	19.81	2
		12	6	19.74	19.88	19.93	19.88	19.84	2
		12	13	19.65	19.75	19.89	19.85	19.78	2
		25	0	19.65	19.76	19.92	19.87	19.82	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 39700	Mid CH 40160	Mid CH 40620	Mid CH 41080	High CH 41540	3PGG MPR (dB)
				Frequency 2501.0 MHz	Frequency 2547.0 MHz	Frequency 2593.0 MHz	Frequency 2639.0 MHz	Frequency 2685.0 MHz	
41 / 10M	QPSK	1	0	21.87	21.95	21.99	21.95	21.91	0
		1	24	21.90	22.05	22.15	22.07	21.97	0
		1	49	21.49	21.72	22.00	21.90	21.79	0
		25	0	20.84	20.97	21.11	21.00	20.93	1
		25	12	20.86	20.96	21.05	21.01	20.96	1
		25	25	20.77	20.88	21.01	20.98	20.90	1
		50	0	20.77	20.92	21.04	20.98	20.94	1
	16QAM	1	0	20.77	20.84	20.89	20.84	20.81	1
		1	24	20.80	20.94	21.05	20.94	20.87	1
		1	49	20.39	20.62	20.90	20.81	20.69	1
		25	0	19.74	19.86	20.01	19.92	19.83	2
		25	12	19.76	19.87	19.95	19.92	19.86	2
		25	25	19.67	19.78	19.91	19.82	19.80	2
		50	0	19.67	19.85	19.94	19.89	19.84	2

FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 39725	Mid CH 40173	Mid CH 40620	Mid CH 41068	High CH 41515	3PGG MPR (dB)
				Frequency 2503.5 MHz	Frequency 2548.3 MHz	Frequency 2593.0 MHz	Frequency 2637.8 MHz	Frequency 2682.5 MHz	
41 / 15M	QPSK	1	0	21.90	21.96	22.02	21.96	21.94	0
		1	37	21.93	22.05	22.18	22.08	22.00	0
		1	74	21.52	21.78	22.03	21.95	21.82	0
		36	0	20.87	21.05	21.14	21.06	20.96	1
		36	19	20.89	20.97	21.08	21.04	20.99	1
		36	39	20.80	20.95	21.04	20.97	20.93	1
		75	0	20.80	20.94	21.07	21.04	20.97	1
	16QAM	1	0	20.80	20.87	20.92	20.88	20.84	1
		1	37	20.83	20.95	21.08	20.98	20.90	1
		1	74	20.42	20.68	20.93	20.85	20.72	1
		36	0	19.77	19.90	20.04	19.96	19.86	2
		36	19	19.79	19.89	19.98	19.95	19.89	2
		36	39	19.70	19.85	19.94	19.89	19.83	2
		75	0	19.70	19.81	19.97	19.94	19.87	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 39750	Mid CH 40185	Mid CH 40620	Mid CH 41055	High CH 41490	3PGG MPR (dB)
				Frequency 2506.0 MHz	Frequency 2549.5 MHz	Frequency 2593.0 MHz	Frequency 2636.5 MHz	Frequency 2680.0 MHz	
41 / 20M	QPSK	1	0	21.92	21.97	22.04	22.01	21.96	0
		1	50	21.95	22.06	22.20	22.15	22.02	0
		1	99	21.54	21.83	22.05	21.91	21.84	0
		50	0	20.89	21.04	21.16	21.02	20.98	1
		50	25	20.91	21.06	21.10	21.01	21.01	1
		50	50	20.82	20.95	21.06	21.02	20.95	1
		100	0	20.82	20.96	21.09	21.06	20.99	1
	16QAM	1	0	20.82	20.87	20.94	20.91	20.86	1
		1	50	20.85	20.95	21.10	21.00	20.92	1
		1	99	20.44	20.71	20.95	20.82	20.74	1
		50	0	19.79	19.92	20.06	19.95	19.88	2
		50	25	19.81	19.92	20.00	19.96	19.91	2
		50	50	19.72	19.87	19.96	19.92	19.85	2
		100	0	19.72	19.82	19.99	19.94	19.89	2

<WLAN 2.4G>

Mode		802.11b		
Channel / Frequency (MHz)		1 (2412)	6 (2437)	11 (2462)
Average Power		17.56	17.69	18.11
Mode		802.11g		
Channel / Frequency (MHz)		1 (2412)	6 (2437)	11 (2462)
Average Power		15.99	15.89	15.62
Mode		802.11n (HT20)		
Channel / Frequency (MHz)		1 (2412)	6 (2437)	11 (2462)
Average Power		16.06	15.88	15.67

<WLAN 5.2G>

Mode	802.11a			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	15.85	16.28	15.93	16.13
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	15.95	16.19	16.29	16.21
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	38 (5190)		46 (5230)	
Average Power	12.67		12.84	
Mode	802.11ac (VHT80)			
Channel / Frequency (MHz)	42 (5210)			
Average Power	13.74			

<WLAN 5.3G>

Mode	802.11a			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	16.18	16.31	16.39	16.47
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	16.29	16.15	16.42	16.46
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	54 (5270)		62 (5310)	
Average Power	13.12		13.46	
Mode	802.11ac (VHT80)			
Channel / Frequency (MHz)	58 (5290)			
Average Power	13.53			

<WLAN 5.6G>

Mode	802.11a							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	16.48	16.27	16.25	16.36	16.37	16.31	16.22	16.08
Mode	802.11n (HT20)							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	16.37	16.21	16.27	16.24	16.19	16.16	16.29	16.12
Mode	802.11n (HT40)							
Channel / Frequency (MHz)	102 (5510)				134 (5670)			
Average Power	13.23				13.12			
Mode	802.11ac (VHT80)							
Channel / Frequency (MHz)	106 (5530)							
Average Power	13.58							

FCC SAR Test Report

A D T

<WLAN 5.8G>

Mode	802.11a			
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)
Average Power	16.15	16.08	16.13	16.30
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)
Average Power	16.01	16.02	16.21	16.19
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	151 (5755)		159 (5795)	
Average Power	13.33		12.74	
Mode	802.11ac (VHT80)			
Channel / Frequency (MHz)	155 (5775)			
Average Power	13.44			

4.7 SAR Testing Results

4.7.1 SAR Results for Head

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
01	CDMA BC0	RC3+SO55	Right Cheek	777	0	25.0	24.56	1.11	0.17	0.111	0.12
	CDMA BC0	RC3+SO55	Right Tilted	777	0	25.0	24.56	1.11	0.17	0.098	0.11
	CDMA BC0	RC3+SO55	Left Cheek	777	0	25.0	24.56	1.11	0.12	0.139	0.15
	CDMA BC0	RC3+SO55	Left Tilted	777	0	25.0	24.56	1.11	-0.14	0.077	0.09
	CDMA BC0	RC3+SO55	Right Cheek	777	1	25.0	24.56	1.11	0.09	0.345	0.38
	CDMA BC0	RC3+SO55	Right Tilted	777	1	25.0	24.56	1.11	0.13	0.206	0.23
	CDMA BC0	RC3+SO55	Left Cheek	777	1	25.0	24.56	1.11	0.01	0.237	0.26
	CDMA BC0	RC3+SO55	Left Tilted	777	1	25.0	24.56	1.11	0.10	0.162	0.18
02	CDMA BC1	RC3+SO55	Right Cheek	600	0	24.5	24.48	1.00	-0.06	0.230	0.23
	CDMA BC1	RC3+SO55	Right Tilted	600	0	24.5	24.48	1.00	-0.01	0.122	0.12
	CDMA BC1	RC3+SO55	Left Cheek	600	0	24.5	24.48	1.00	0.01	0.282	0.28
	CDMA BC1	RC3+SO55	Left Tilted	600	0	24.5	24.48	1.00	0.09	0.163	0.16
	CDMA BC1	RC3+SO55	Right Cheek	600	1	24.5	24.48	1.00	-0.09	0.496	0.50
	CDMA BC1	RC3+SO55	Right Tilted	600	1	24.5	24.48	1.00	-0.10	0.237	0.24
	CDMA BC1	RC3+SO55	Left Cheek	600	1	24.5	24.48	1.00	-0.05	0.252	0.25
	CDMA BC1	RC3+SO55	Left Tilted	600	1	24.5	24.48	1.00	0.05	0.162	0.16
03	CDMA BC10	RC3+SO55	Right Cheek	684	0	24.5	24.36	1.03	0.08	0.063	0.07
	CDMA BC10	RC3+SO55	Right Tilted	684	0	24.5	24.36	1.03	0.06	0.051	0.05
	CDMA BC10	RC3+SO55	Left Cheek	684	0	24.5	24.36	1.03	-0.08	0.088	0.09
	CDMA BC10	RC3+SO55	Left Tilted	684	0	24.5	24.36	1.03	0.05	0.055	0.06
	CDMA BC10	RC3+SO55	Right Cheek	684	1	24.5	24.36	1.03	0.03	0.314	0.32
	CDMA BC10	RC3+SO55	Right Tilted	684	1	24.5	24.36	1.03	0.06	0.142	0.15
	CDMA BC10	RC3+SO55	Left Cheek	684	1	24.5	24.36	1.03	-0.01	0.199	0.21
	CDMA BC10	RC3+SO55	Left Tilted	684	1	24.5	24.36	1.03	-0.06	0.118	0.12

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is <= 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

A D T

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 25	QPSK,20M	Right Cheek	26590	0	1	0	23.8	23.78	1.00	-0.18	0.204	0.21
	LTE 25	QPSK,20M	Right Tilted	26590	0	1	0	23.8	23.78	1.00	0.00	0.105	0.11
	LTE 25	QPSK,20M	Left Cheek	26590	0	1	0	23.8	23.78	1.00	-0.01	0.305	0.31
	LTE 25	QPSK,20M	Left Tilted	26590	0	1	0	23.8	23.78	1.00	0.15	0.133	0.13
	LTE 25	QPSK,20M	Right Cheek	26590	0	50	0	22.8	22.58	1.05	-0.02	0.189	0.20
	LTE 25	QPSK,20M	Right Tilted	26590	0	50	0	22.8	22.58	1.05	-0.17	0.095	0.10
	LTE 25	QPSK,20M	Left Cheek	26590	0	50	0	22.8	22.58	1.05	0.11	0.242	0.25
	LTE 25	QPSK,20M	Left Tilted	26590	0	50	0	22.8	22.58	1.05	0.09	0.11	0.12
04	LTE 25	QPSK,20M	Right Cheek	26590	1	1	0	23.8	23.78	1.00	0.10	0.38	0.38
	LTE 25	QPSK,20M	Right Tilted	26590	1	1	0	23.8	23.78	1.00	0.13	0.184	0.19
	LTE 25	QPSK,20M	Left Cheek	26590	1	1	0	23.8	23.78	1.00	-0.07	0.281	0.28
	LTE 25	QPSK,20M	Left Tilted	26590	1	1	0	23.8	23.78	1.00	-0.11	0.124	0.12
	LTE 25	QPSK,20M	Right Cheek	26590	1	50	0	22.8	22.58	1.05	-0.02	0.283	0.30
	LTE 25	QPSK,20M	Right Tilted	26590	1	50	0	22.8	22.58	1.05	0.12	0.132	0.14
	LTE 25	QPSK,20M	Left Cheek	26590	1	50	0	22.8	22.58	1.05	0.13	0.212	0.22
	LTE 25	QPSK,20M	Left Tilted	26590	1	50	0	22.8	22.58	1.05	0.14	0.091	0.10
	LTE 26	QPSK,10M	Right Cheek	26990	0	1	49	23.2	23.18	1.00	-0.05	0.084	0.08
	LTE 26	QPSK,10M	Right Tilted	26990	0	1	49	23.2	23.18	1.00	0.01	0.057	0.06
	LTE 26	QPSK,10M	Left Cheek	26990	0	1	49	23.2	23.18	1.00	-0.03	0.141	0.14
	LTE 26	QPSK,10M	Left Tilted	26990	0	1	49	23.2	23.18	1.00	-0.06	0.067	0.07
	LTE 26	QPSK,10M	Right Cheek	26990	0	25	0	22.2	22.07	1.03	-0.10	0.052	0.05
	LTE 26	QPSK,10M	Right Tilted	26990	0	25	0	22.2	22.07	1.03	0.00	0.04	0.04
	LTE 26	QPSK,10M	Left Cheek	26990	0	25	0	22.2	22.07	1.03	-0.04	0.088	0.09
	LTE 26	QPSK,10M	Left Tilted	26990	0	25	0	22.2	22.07	1.03	-0.08	0.047	0.05
05	LTE 26	QPSK,10M	Right Cheek	26990	1	1	49	23.2	23.18	1.00	-0.01	0.193	0.19
	LTE 26	QPSK,10M	Right Tilted	26990	1	1	49	23.2	23.18	1.00	-0.08	0.08	0.08
	LTE 26	QPSK,10M	Left Cheek	26990	1	1	49	23.2	23.18	1.00	-0.02	0.09	0.09
	LTE 26	QPSK,10M	Left Tilted	26990	1	1	49	23.2	23.18	1.00	0.04	0.052	0.05
	LTE 26	QPSK,10M	Right Cheek	26990	1	25	0	22.2	22.07	1.03	0.10	0.136	0.14
	LTE 26	QPSK,10M	Right Tilted	26990	1	25	0	22.2	22.07	1.03	-0.11	0.059	0.06
	LTE 26	QPSK,10M	Left Cheek	26990	1	25	0	22.2	22.07	1.03	0.00	0.06	0.06
	LTE 26	QPSK,10M	Left Tilted	26990	1	25	0	22.2	22.07	1.03	-0.03	0.035	0.04
	LTE 41	QPSK,20M	Right Cheek	40620	0	1	50	22.2	22.20	1.00	0.04	0.073	0.07
	LTE 41	QPSK,20M	Right Tilted	40620	0	1	50	22.2	22.20	1.00	-0.12	0.086	0.09
	LTE 41	QPSK,20M	Left Cheek	40620	0	1	50	22.2	22.20	1.00	0.08	0.102	0.10
	LTE 41	QPSK,20M	Left Tilted	40620	0	1	50	22.2	22.20	1.00	0.05	0.059	0.06
	LTE 41	QPSK,20M	Right Cheek	40620	0	50	0	21.2	21.16	1.01	0.04	0.048	0.05
	LTE 41	QPSK,20M	Right Tilted	40620	0	50	0	21.2	21.16	1.01	0.08	0.056	0.06
	LTE 41	QPSK,20M	Left Cheek	40620	0	50	0	21.2	21.16	1.01	0.06	0.074	0.07
	LTE 41	QPSK,20M	Left Tilted	40620	0	50	0	21.2	21.16	1.01	0.17	0.043	0.04
06	LTE 41	QPSK,20M	Right Cheek	40620	1	1	50	22.2	22.20	1.00	-0.01	0.126	0.13
	LTE 41	QPSK,20M	Right Tilted	40620	1	1	50	22.2	22.20	1.00	0.15	0.056	0.06
	LTE 41	QPSK,20M	Left Cheek	40620	1	1	50	22.2	22.20	1.00	0.16	0.066	0.07
	LTE 41	QPSK,20M	Left Tilted	40620	1	1	50	22.2	22.20	1.00	0.03	0.049	0.05
	LTE 41	QPSK,20M	Right Cheek	40620	1	50	0	21.2	21.16	1.01	0.13	0.099	0.10
	LTE 41	QPSK,20M	Right Tilted	40620	1	50	0	21.2	21.16	1.01	0.13	0.06	0.06
	LTE 41	QPSK,20M	Left Cheek	40620	1	50	0	21.2	21.16	1.01	0.01	0.075	0.08
	LTE 41	QPSK,20M	Left Tilted	40620	1	50	0	21.2	21.16	1.01	0.10	0.043	0.04

Note:

1. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
2. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
3. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.

FCC SAR Test Report

A D T

5. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	802.11b	Right Cheek	11	18.2	18.11	1.02	0.05	0.127	0.13
	802.11b	Right Tilted	11	18.2	18.11	1.02	-0.01	0.095	0.10
07	802.11b	Left Cheek	11	18.2	18.11	1.02	0.02	0.414	0.42
	802.11b	Left Tilted	11	18.2	18.11	1.02	-0.09	0.256	0.26
	802.11a	Right Cheek	40	16.5	16.28	1.05	0.03	0.021	0.02
	802.11a	Right Tilted	40	16.5	16.28	1.05	0.06	0.018	0.02
08	802.11a	Left Cheek	40	16.5	16.28	1.05	-0.08	0.086	0.09
	802.11a	Left Tilted	40	16.5	16.28	1.05	-0.04	0.042	0.04
09	802.11a	Right Cheek	64	16.5	16.47	1.01	0.08	0.041	0.04
	802.11a	Right Tilted	64	16.5	16.47	1.01	0.07	0.036	0.04
	802.11a	Left Cheek	64	16.5	16.47	1.01	N/A	N/A	N/A
	802.11a	Left Tilted	64	16.5	16.47	1.01	N/A	N/A	N/A
	802.11a	Right Cheek	100	16.5	16.48	1.00	N/A	N/A	N/A
10	802.11a	Right Tilted	100	16.5	16.48	1.00	0.00	0.00000963	0.01
	802.11a	Left Cheek	100	16.5	16.48	1.00	N/A	N/A	N/A
	802.11a	Left Tilted	100	16.5	16.48	1.00	N/A	N/A	N/A
	802.11a	Right Cheek	161	16.5	16.30	1.05	N/A	N/A	N/A
	802.11a	Right Tilted	161	16.5	16.30	1.05	-0.11	0.00846	0.01
	802.11a	Left Cheek	161	16.5	16.30	1.05	N/A	N/A	N/A
11	802.11a	Left Tilted	161	16.5	16.30	1.05	0.11	0.019	0.02

Note:

- According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
- SAR testing for 802.11g/n is not required when its maximum power is less than 1/4 dB higher than 802.11b.
- SAR testing for 802.11n/ac is not required when its maximum power is less than 1/4 dB higher than 802.11a.
- The "N/A" means there is no SAR value or the SAR is too low to be measured.

4.7.2 SAR Results for Body-Worn (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
12	CDMA BC0	RTAP 153.6	Front Face	777	0	24.5	24.47	1.01	0.14	0.498	0.50
	CDMA BC0	RTAP 153.6	Rear Face	777	0	24.5	24.47	1.01	-0.15	0.405	0.41
	CDMA BC0	RTAP 153.6	Front Face	777	1	24.5	24.47	1.01	0.16	0.052	0.05
	CDMA BC0	RTAP 153.6	Rear Face	777	1	24.5	24.47	1.01	-0.18	0.036	0.04
	CDMA BC1	RTAP 153.6	Front Face	600	0	24.5	24.47	1.01	-0.13	0.262	0.26
13	CDMA BC1	RTAP 153.6	Rear Face	600	0	24.5	24.47	1.01	-0.11	0.42	0.42
	CDMA BC1	RTAP 153.6	Front Face	600	1	24.5	24.47	1.01	0.12	0.053	0.05
	CDMA BC1	RTAP 153.6	Rear Face	600	1	24.5	24.47	1.01	0.16	0.019	0.02
14	CDMA BC10	RTAP 153.6	Front Face	684	0	24.5	24.30	1.05	0.11	0.314	0.33
	CDMA BC10	RTAP 153.6	Rear Face	684	0	24.5	24.30	1.05	-0.03	0.279	0.29
	CDMA BC10	RTAP 153.6	Front Face	684	1	24.5	24.30	1.05	0.03	0.047	0.05
	CDMA BC10	RTAP 153.6	Rear Face	684	1	24.5	24.30	1.05	0.02	0.032	0.03

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is ≤ 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

A D T

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
15	LTE 25	QPSK,20M	Front Face	26590	0	1	0	23.8	23.78	1.00	0.14	0.307	0.31
	LTE 25	QPSK,20M	Rear Face	26590	0	1	0	23.8	23.78	1.00	0.13	0.661	0.66
	LTE 25	QPSK,20M	Front Face	26590	0	50	0	22.8	22.58	1.05	0.05	0.273	0.29
	LTE 25	QPSK,20M	Rear Face	26590	0	50	0	22.8	22.58	1.05	-0.17	0.405	0.43
	LTE 25	QPSK,20M	Front Face	26590	1	1	0	23.8	23.78	1.00	-0.13	0.044	0.04
	LTE 25	QPSK,20M	Rear Face	26590	1	1	0	23.8	23.78	1.00	-0.14	0.019	0.02
	LTE 25	QPSK,20M	Front Face	26590	1	50	0	22.8	22.58	1.05	-0.12	0.031	0.03
	LTE 25	QPSK,20M	Rear Face	26590	1	50	0	22.8	22.58	1.05	0.07	0.014	0.01
16	LTE 26	QPSK,10M	Front Face	26990	0	1	49	23.2	23.18	1.00	0.13	0.313	0.31
	LTE 26	QPSK,10M	Rear Face	26990	0	1	49	23.2	23.18	1.00	0.00	0.316	0.32
	LTE 26	QPSK,10M	Front Face	26990	0	25	0	22.2	22.07	1.03	0.14	0.216	0.22
	LTE 26	QPSK,10M	Rear Face	26990	0	25	0	22.2	22.07	1.03	-0.04	0.196	0.20
	LTE 26	QPSK,10M	Front Face	26990	1	1	49	23.2	23.18	1.00	-0.03	0.026	0.03
	LTE 26	QPSK,10M	Rear Face	26990	1	1	49	23.2	23.18	1.00	0.03	0.028	0.03
	LTE 26	QPSK,10M	Front Face	26990	1	25	0	22.2	22.07	1.03	0.05	0.013	0.01
	LTE 26	QPSK,10M	Rear Face	26990	1	25	0	22.2	22.07	1.03	-0.05	0.018	0.02
17	LTE 41	QPSK,20M	Front Face	40620	0	1	50	22.2	22.20	1.00	0.06	0.14	0.14
	LTE 41	QPSK,20M	Rear Face	40620	0	1	50	22.2	22.20	1.00	-0.08	0.129	0.13
	LTE 41	QPSK,20M	Front Face	40620	0	50	0	21.2	21.16	1.01	0.04	0.11	0.11
	LTE 41	QPSK,20M	Rear Face	40620	0	50	0	21.2	21.16	1.01	0.05	0.097	0.10
	LTE 41	QPSK,20M	Front Face	40620	1	1	50	22.2	22.20	1.00	0.04	0.015	0.02
	LTE 41	QPSK,20M	Rear Face	40620	1	1	50	22.2	22.20	1.00	0.01	0.002	0.01
	LTE 41	QPSK,20M	Front Face	40620	1	50	0	21.2	21.16	1.01	0.03	0.013	0.01
	LTE 41	QPSK,20M	Rear Face	40620	1	50	0	21.2	21.16	1.01	0.00	0.001	0.01

Note:

1. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
2. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
3. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
5. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.

FCC SAR Test Report

A D T

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
18	802.11b	Front Face	11	18.2	18.11	1.02	0.03	0.05	0.05
	802.11b	Rear Face	11	18.2	18.11	1.02	0.02	0.025	0.03
19	802.11a	Front Face	40	16.5	16.28	1.05	-0.02	0.025	0.03
	802.11a	Rear Face	40	16.5	16.28	1.05	0.09	0.00541	0.01
	802.11a	Front Face	64	16.5	16.47	1.00	N/A	N/A	N/A
	802.11a	Rear Face	64	16.5	16.47	1.00	N/A	N/A	N/A
	802.11a	Front Face	100	16.5	16.48	1.00	N/A	N/A	N/A
	802.11a	Rear Face	100	16.5	16.48	1.00	N/A	N/A	N/A
	802.11a	Front Face	161	16.5	16.30	1.05	N/A	N/A	N/A
	802.11a	Rear Face	161	16.5	16.30	1.05	N/A	N/A	N/A

Note:

- According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
- SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
- SAR testing for 802.11n/ac is not required when its maximum power is less than 1/4 dB higher than 802.11a.
- The "N/A" means there is no SAR value or the SAR is too low to be measured.

4.7.3 SAR Results for Hotspot (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
12	CDMA BC0	RTAP 153.6	Front Face	777	0	24.5	24.47	1.01	0.14	0.498	0.50
	CDMA BC0	RTAP 153.6	Rear Face	777	0	24.5	24.47	1.01	-0.15	0.405	0.41
	CDMA BC0	RTAP 153.6	Left Side	777	0	24.5	24.47	1.01	0.19	0.17	0.17
	CDMA BC0	RTAP 153.6	Right Side	777	0	24.5	24.47	1.01	0.11	0.034	0.03
	CDMA BC0	RTAP 153.6	Bottom Side	777	0	24.5	24.47	1.01	0.18	0.191	0.19
	CDMA BC0	RTAP 153.6	Front Face	777	1	24.5	24.47	1.01	0.16	0.052	0.05
	CDMA BC0	RTAP 153.6	Rear Face	777	1	24.5	24.47	1.01	-0.18	0.036	0.04
	CDMA BC0	RTAP 153.6	Left Side	777	1	24.5	24.47	1.01	0.16	0.017	0.02
	CDMA BC0	RTAP 153.6	Top Side	777	1	24.5	24.47	1.01	0.15	0.024	0.02
	CDMA BC1	RTAP 153.6	Front Face	600	0	24.5	24.47	1.01	-0.13	0.262	0.26
13	CDMA BC1	RTAP 153.6	Rear Face	600	0	24.5	24.47	1.01	-0.11	0.42	0.42
	CDMA BC1	RTAP 153.6	Left Side	600	0	24.5	24.47	1.01	0.10	0.319	0.32
	CDMA BC1	RTAP 153.6	Right Side	600	0	24.5	24.47	1.01	0.15	0.038	0.04
	CDMA BC1	RTAP 153.6	Bottom Side	600	0	24.5	24.47	1.01	0.16	0.351	0.35
	CDMA BC1	RTAP 153.6	Front Face	600	1	24.5	24.47	1.01	0.12	0.053	0.05
	CDMA BC1	RTAP 153.6	Rear Face	600	1	24.5	24.47	1.01	0.16	0.019	0.02
	CDMA BC1	RTAP 153.6	Left Side	600	1	24.5	24.47	1.01	-0.16	0.037	0.04
	CDMA BC1	RTAP 153.6	Top Side	600	1	24.5	24.47	1.01	0.06	0.027	0.03
14	CDMA BC10	RTAP 153.6	Front Face	684	0	24.5	24.30	1.05	0.11	0.314	0.33
	CDMA BC10	RTAP 153.6	Rear Face	684	0	24.5	24.30	1.05	-0.03	0.279	0.29
	CDMA BC10	RTAP 153.6	Left Side	684	0	24.5	24.30	1.05	0.16	0.103	0.11
	CDMA BC10	RTAP 153.6	Right Side	684	0	24.5	24.30	1.05	0.02	0.024	0.03
	CDMA BC10	RTAP 153.6	Bottom Side	684	0	24.5	24.30	1.05	0.03	0.109	0.11
	CDMA BC10	RTAP 153.6	Front Face	684	1	24.5	24.30	1.05	0.03	0.047	0.05
	CDMA BC10	RTAP 153.6	Rear Face	684	1	24.5	24.30	1.05	0.02	0.032	0.03
	CDMA BC10	RTAP 153.6	Left Side	684	1	24.5	24.30	1.05	0.01	0.017	0.02
	CDMA BC10	RTAP 153.6	Top Side	684	1	24.5	24.30	1.05	0.01	0.018	0.02

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is ≤ 0.8 W/kg, SAR testing for optional channel is not required.

FCC SAR Test Report

A D T

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
15	LTE 25	QPSK,20M	Front Face	26590	0	1	0	23.8	23.78	1.00	0.14	0.307	0.31
	LTE 25	QPSK,20M	Rear Face	26590	0	1	0	23.8	23.78	1.00	0.13	0.661	0.66
	LTE 25	QPSK,20M	Left Side	26590	0	1	0	23.8	23.78	1.00	0.15	0.494	0.50
	LTE 25	QPSK,20M	Right Side	26590	0	1	0	23.8	23.78	1.00	0.05	0.040	0.04
	LTE 25	QPSK,20M	Bottom Side	26590	0	1	0	23.8	23.78	1.00	0.07	0.407	0.41
	LTE 25	QPSK,20M	Front Face	26590	0	50	0	22.8	22.58	1.05	0.05	0.273	0.29
	LTE 25	QPSK,20M	Rear Face	26590	0	50	0	22.8	22.58	1.05	-0.17	0.405	0.43
	LTE 25	QPSK,20M	Left Side	26590	0	50	0	22.8	22.58	1.05	0.09	0.376	0.40
	LTE 25	QPSK,20M	Right Side	26590	0	50	0	22.8	22.58	1.05	0.14	0.033	0.03
	LTE 25	QPSK,20M	Bottom Side	26590	0	50	0	22.8	22.58	1.05	0.18	0.276	0.29
	LTE 25	QPSK,20M	Front Face	26590	1	1	0	23.8	23.78	1.00	-0.13	0.044	0.04
	LTE 25	QPSK,20M	Rear Face	26590	1	1	0	23.8	23.78	1.00	-0.14	0.019	0.02
	LTE 25	QPSK,20M	Left Side	26590	1	1	0	23.8	23.78	1.00	0.07	0.025	0.03
	LTE 25	QPSK,20M	Top Side	26590	1	1	0	23.8	23.78	1.00	0.03	0.017	0.02
	LTE 25	QPSK,20M	Front Face	26590	1	50	0	22.8	22.58	1.05	-0.12	0.031	0.03
	LTE 25	QPSK,20M	Rear Face	26590	1	50	0	22.8	22.58	1.05	0.07	0.014	0.01
16	LTE 25	QPSK,20M	Left Side	26590	1	50	0	22.8	22.58	1.05	0.05	0.018	0.02
	LTE 25	QPSK,20M	Top Side	26590	1	50	0	22.8	22.58	1.05	0.05	0.014	0.01
	LTE 26	QPSK,10M	Front Face	26990	0	1	49	23.2	23.18	1.00	0.13	0.313	0.31
	LTE 26	QPSK,10M	Rear Face	26990	0	1	49	23.2	23.18	1.00	0.00	0.316	0.32
	LTE 26	QPSK,10M	Left Side	26990	0	1	49	23.2	23.18	1.00	0.01	0.098	0.10
	LTE 26	QPSK,10M	Right Side	26990	0	1	49	23.2	23.18	1.00	0.14	0.022	0.02
	LTE 26	QPSK,10M	Bottom Side	26990	0	1	49	23.2	23.18	1.00	0.10	0.137	0.14
	LTE 26	QPSK,10M	Front Face	26990	0	25	0	22.2	22.07	1.03	0.14	0.216	0.22
	LTE 26	QPSK,10M	Rear Face	26990	0	25	0	22.2	22.07	1.03	-0.04	0.196	0.20
	LTE 26	QPSK,10M	Left Side	26990	0	25	0	22.2	22.07	1.03	-0.01	0.050	0.05
	LTE 26	QPSK,10M	Right Side	26990	0	25	0	22.2	22.07	1.03	0.10	0.015	0.02
	LTE 26	QPSK,10M	Bottom Side	26990	0	25	0	22.2	22.07	1.03	0.10	0.083	0.09
	LTE 26	QPSK,10M	Front Face	26990	1	1	49	23.2	23.18	1.00	-0.03	0.026	0.03
	LTE 26	QPSK,10M	Rear Face	26990	1	1	49	23.2	23.18	1.00	0.03	0.028	0.03
	LTE 26	QPSK,10M	Left Side	26990	1	1	49	23.2	23.18	1.00	-0.08	0.008	0.01
	LTE 26	QPSK,10M	Top Side	26990	1	1	49	23.2	23.18	1.00	-0.05	0.014	0.01
	LTE 26	QPSK,10M	Front Face	26990	1	25	0	22.2	22.07	1.03	0.05	0.013	0.01
	LTE 26	QPSK,10M	Rear Face	26990	1	25	0	22.2	22.07	1.03	-0.05	0.018	0.02
	LTE 26	QPSK,10M	Left Side	26990	1	25	0	22.2	22.07	1.03	0.14	0.006	0.01
	LTE 26	QPSK,10M	Top Side	26990	1	25	0	22.2	22.07	1.03	0.05	0.009	0.01

FCC SAR Test Report

A D T

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
17	LTE 41	QPSK,20M	Front Face	40620	0	1	50	22.2	22.20	1.00	0.06	0.14	0.14
	LTE 41	QPSK,20M	Rear Face	40620	0	1	50	22.2	22.20	1.00	-0.08	0.129	0.13
	LTE 41	QPSK,20M	Left Side	40620	0	1	50	22.2	22.20	1.00	-0.04	0.138	0.14
	LTE 41	QPSK,20M	Right Side	40620	0	1	50	22.2	22.20	1.00	0.02	0.001	0.01
	LTE 41	QPSK,20M	Bottom Side	40620	0	1	50	22.2	22.20	1.00	0.03	0.063	0.06
	LTE 41	QPSK,20M	Front Face	40620	0	50	0	21.2	21.16	1.01	0.04	0.11	0.11
	LTE 41	QPSK,20M	Rear Face	40620	0	50	0	21.2	21.16	1.01	0.05	0.097	0.10
	LTE 41	QPSK,20M	Left Side	40620	0	50	0	21.2	21.16	1.01	-0.04	0.100	0.10
	LTE 41	QPSK,20M	Right Side	40620	0	50	0	21.2	21.16	1.01	0.00	0.000	0.01
	LTE 41	QPSK,20M	Bottom Side	40620	0	50	0	21.2	21.16	1.01	0.08	0.053	0.05
	LTE 41	QPSK,20M	Front Face	40620	1	1	50	22.2	22.20	1.00	0.04	0.015	0.02
	LTE 41	QPSK,20M	Rear Face	40620	1	1	50	22.2	22.20	1.00	0.01	0.002	0.01
	LTE 41	QPSK,20M	Left Side	40620	1	1	50	22.2	22.20	1.00	0.04	0.002	0.01
	LTE 41	QPSK,20M	Top Side	40620	1	1	50	22.2	22.20	1.00	-0.17	0.001	0.01
	LTE 41	QPSK,20M	Front Face	40620	1	50	0	21.2	21.16	1.01	0.03	0.013	0.01
	LTE 41	QPSK,20M	Rear Face	40620	1	50	0	21.2	21.16	1.01	0.00	0.001	0.01
	LTE 41	QPSK,20M	Left Side	40620	1	50	0	21.2	21.16	1.01	N/A	N/A	N/A
	LTE 41	QPSK,20M	Top Side	40620	1	50	0	21.2	21.16	1.01	-0.01	0.005	0.01

Note:

1. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
2. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
3. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
5. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
18	802.11b	Front Face	11	18.2	18.11	1.02	0.03	0.05	0.05
	802.11b	Rear Face	11	18.2	18.11	1.02	0.02	0.025	0.03
	802.11b	Right Side	11	18.2	18.11	1.02	0.05	0.027	0.03
	802.11b	Top Side	11	18.2	18.11	1.02	0.01	0.014	0.01

Note:

1. WLAN 5G does not support wireless hotspot mode.
2. According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
3. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
4. SAR testing for 802.11n/ac is not required when its maximum power is less than 1/4 dB higher than 802.11a.
5. The "N/A" means there is no SAR value or the SAR is too low to be measured.

4.7.4 SAR Results for Extremity (Separation Distance is 0 cm Gap)

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
20	802.11a	Front Face	40	16.5	16.28	1.05	0.01	0.019	0.02
	802.11a	Rear Face	40	16.5	16.28	1.05	0.10	0.00973	0.01
	802.11a	Right Side	40	16.5	16.28	1.05	0.07	0.00000492	0.01
	802.11a	Top Side	40	16.5	16.28	1.05	0.13	0.01	0.01
	802.11a	Front Face	64	16.5	16.47	1.01	0.00	0.000148	0.01
21	802.11a	Rear Face	64	16.5	16.47	1.01	0.01	0.034	0.03
	802.11a	Right Side	64	16.5	16.47	1.01	0.01	0.00864	0.01
	802.11a	Top Side	64	16.5	16.47	1.01	0.03	0.00551	0.01
	802.11a	Front Face	100	16.5	16.48	1.00	N/A	N/A	N/A
22	802.11a	Rear Face	100	16.5	16.48	1.00	0.00	0.041	0.04
	802.11a	Right Side	100	16.5	16.48	1.00	0.00	0.00204	0.01
	802.11a	Top Side	100	16.5	16.48	1.00	0.12	0.00738	0.01
	802.11a	Front Face	161	16.5	16.30	1.05	N/A	N/A	N/A
23	802.11a	Rear Face	161	16.5	16.30	1.05	0.00	0.00689	0.01
	802.11a	Right Side	161	16.5	16.30	1.05	N/A	N/A	N/A
	802.11a	Top Side	161	16.5	16.30	1.05	N/A	N/A	N/A

Note:

1. Since the 10g averaged SAR is ≤ 2.0 W/kg, WLAN SAR testing for other channels is not required.
2. SAR testing for 802.11g/n is not required when its maximum power is less than 1/4 dB higher than 802.11b.
3. SAR testing for 802.11n/ac is not required when its maximum power is less than 1/4 dB higher than 802.11a.
4. The "N/A" means there is no SAR value or the SAR is too low to be measured.

4.7.5 SAR Measurement Variability

According to KDB 865664 D01 v01r01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

Since all the measured SAR are less than 0.8 W/kg, the repeated measurement is not required.

4.7.6 Simultaneous Multi-band Transmission Evaluation

<Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
BT (DSS)	2.48	6.0	Body-worn	10	0.08
BT (DSS)	2.48	6.0	Extremity	0	0.10

Note:

1. The separation distance is determined from the outer housing of the EUT to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

FCC SAR Test Report

A D T

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg / SAR_{10g} 4.0 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR is greater than the SAR limit, SAR test exclusion is determined by the SPLSR.

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
1	CDMA BC0 + WLAN (DTS)	Head	Right Cheek	0.38	0.13	0.51	$\Sigma SAR < 1.6$, Not required
			Right Tilted	0.23	0.10	0.33	$\Sigma SAR < 1.6$, Not required
			Left Cheek	0.26	0.42	0.68	$\Sigma SAR < 1.6$, Not required
			Left Tilted	0.18	0.26	0.44	$\Sigma SAR < 1.6$, Not required
		Body-Worn	Front Face	0.50	0.05	0.55	$\Sigma SAR < 1.6$, Not required
			Rear Face	0.41	0.03	0.44	$\Sigma SAR < 1.6$, Not required
		Hotspot	Front Face	0.50	0.05	0.55	$\Sigma SAR < 1.6$, Not required
			Rear Face	0.41	0.03	0.44	$\Sigma SAR < 1.6$, Not required
			Left Side	0.17	-	0.17	$\Sigma SAR < 1.6$, Not required
			Right Side	0.03	0.03	0.06	$\Sigma SAR < 1.6$, Not required
			Top Side	0.02	0.01	0.03	$\Sigma SAR < 1.6$, Not required
			Bottom Side	0.19	-	0.19	$\Sigma SAR < 1.6$, Not required
		Extremity	Front Face	-	0.00	0.00	$\Sigma SAR < 4.0$, Not required
			Rear Face	-	0.01	0.01	$\Sigma SAR < 4.0$, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	$\Sigma SAR < 4.0$, Not required
			Top Side	-	0.00	0.00	$\Sigma SAR < 4.0$, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
2	CDMA BC0 + WLAN (NII)	Head	Right Cheek	0.38	0.04	0.42	Σ SAR < 1.6, Not required
			Right Tilted	0.23	0.04	0.27	Σ SAR < 1.6, Not required
			Left Cheek	0.26	0.09	0.35	Σ SAR < 1.6, Not required
			Left Tilted	0.18	0.04	0.22	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.50	0.03	0.53	Σ SAR < 1.6, Not required
			Rear Face	0.41	0.01	0.42	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
3	CDMA BC0 + BT (DSS)	Body-Worn	Front Face	0.50	0.08	0.58	Σ SAR < 1.6, Not required
			Rear Face	0.41	0.08	0.49	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
4	CDMA BC1 + WLAN (DTS)	Head	Right Cheek	0.50	0.13	0.63	Σ SAR < 1.6, Not required
			Right Tilted	0.24	0.10	0.34	Σ SAR < 1.6, Not required
			Left Cheek	0.28	0.42	0.70	Σ SAR < 1.6, Not required
			Left Tilted	0.16	0.26	0.42	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.26	0.05	0.31	Σ SAR < 1.6, Not required
			Rear Face	0.42	0.03	0.45	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.26	0.05	0.31	Σ SAR < 1.6, Not required
			Rear Face	0.42	0.03	0.45	Σ SAR < 1.6, Not required
			Left Side	0.32	-	0.32	Σ SAR < 1.6, Not required
			Right Side	0.04	0.03	0.07	Σ SAR < 1.6, Not required
			Top Side	0.03	0.01	0.04	Σ SAR < 1.6, Not required
			Bottom Side	0.35	-	0.35	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.00	0.00	Σ SAR < 4.0, Not required
			Rear Face	-	0.01	0.01	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Top Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
5	CDMA BC1 + WLAN (NII)	Head	Right Cheek	0.50	0.04	0.54	Σ SAR < 1.6, Not required
			Right Tilted	0.24	0.04	0.28	Σ SAR < 1.6, Not required
			Left Cheek	0.28	0.09	0.37	Σ SAR < 1.6, Not required
			Left Tilted	0.16	0.04	0.20	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.26	0.03	0.29	Σ SAR < 1.6, Not required
			Rear Face	0.42	0.01	0.43	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
6	CDMA BC1 + BT (DSS)	Body-Worn	Front Face	0.26	0.08	0.34	Σ SAR < 1.6, Not required
			Rear Face	0.42	0.08	0.50	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
7	CDMA BC10 + WLAN (DTS)	Head	Right Cheek	0.32	0.13	0.45	Σ SAR < 1.6, Not required
			Right Tilted	0.15	0.10	0.25	Σ SAR < 1.6, Not required
			Left Cheek	0.21	0.42	0.63	Σ SAR < 1.6, Not required
			Left Tilted	0.12	0.26	0.38	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.33	0.05	0.38	Σ SAR < 1.6, Not required
			Rear Face	0.29	0.03	0.32	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.33	0.05	0.38	Σ SAR < 1.6, Not required
			Rear Face	0.29	0.03	0.32	Σ SAR < 1.6, Not required
			Left Side	0.11	-	0.11	Σ SAR < 1.6, Not required
			Right Side	0.03	0.03	0.06	Σ SAR < 1.6, Not required
			Top Side	0.02	0.01	0.03	Σ SAR < 1.6, Not required
			Bottom Side	0.11	-	0.11	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.00	0.00	Σ SAR < 4.0, Not required
			Rear Face	-	0.01	0.01	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Top Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
8	CDMA BC10 + WLAN (NII)	Head	Right Cheek	0.32	0.04	0.36	Σ SAR < 1.6, Not required
			Right Tilted	0.15	0.04	0.19	Σ SAR < 1.6, Not required
			Left Cheek	0.21	0.09	0.30	Σ SAR < 1.6, Not required
			Left Tilted	0.12	0.04	0.16	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.33	0.03	0.36	Σ SAR < 1.6, Not required
			Rear Face	0.29	0.01	0.30	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
9	CDMA BC10 + BT (DSS)	Body-Worn	Front Face	0.33	0.08	0.41	Σ SAR < 1.6, Not required
			Rear Face	0.29	0.08	0.37	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
10	LTE 25 + WLAN (DTS)	Head	Right Cheek	0.38	0.13	0.51	Σ SAR < 1.6, Not required
			Right Tilted	0.19	0.10	0.29	Σ SAR < 1.6, Not required
			Left Cheek	0.31	0.42	0.73	Σ SAR < 1.6, Not required
			Left Tilted	0.13	0.26	0.39	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.31	0.05	0.36	Σ SAR < 1.6, Not required
			Rear Face	0.66	0.03	0.69	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.31	0.05	0.36	Σ SAR < 1.6, Not required
			Rear Face	0.66	0.03	0.69	Σ SAR < 1.6, Not required
			Left Side	0.50	-	0.50	Σ SAR < 1.6, Not required
			Right Side	0.04	0.03	0.07	Σ SAR < 1.6, Not required
			Top Side	0.02	0.01	0.03	Σ SAR < 1.6, Not required
			Bottom Side	0.41	-	0.41	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.00	0.00	Σ SAR < 4.0, Not required
			Rear Face	-	0.01	0.01	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Top Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
11	LTE 25 + WLAN (NII)	Head	Right Cheek	0.38	0.04	0.42	Σ SAR < 1.6, Not required
			Right Tilted	0.19	0.04	0.23	Σ SAR < 1.6, Not required
			Left Cheek	0.31	0.09	0.40	Σ SAR < 1.6, Not required
			Left Tilted	0.13	0.04	0.17	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.31	0.03	0.34	Σ SAR < 1.6, Not required
			Rear Face	0.66	0.01	0.67	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
12	LTE 25 + BT (DSS)	Body-Worn	Front Face	0.31	0.08	0.39	Σ SAR < 1.6, Not required
			Rear Face	0.66	0.08	0.74	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
13	LTE 26 + WLAN (DTS)	Head	Right Cheek	0.19	0.13	0.32	Σ SAR < 1.6, Not required
			Right Tilted	0.08	0.10	0.18	Σ SAR < 1.6, Not required
			Left Cheek	0.14	0.42	0.56	Σ SAR < 1.6, Not required
			Left Tilted	0.07	0.26	0.33	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.31	0.05	0.36	Σ SAR < 1.6, Not required
			Rear Face	0.32	0.03	0.35	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.31	0.05	0.36	Σ SAR < 1.6, Not required
			Rear Face	0.32	0.03	0.35	Σ SAR < 1.6, Not required
			Left Side	0.10	-	0.10	Σ SAR < 1.6, Not required
			Right Side	0.02	0.03	0.05	Σ SAR < 1.6, Not required
			Top Side	0.01	0.01	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.14	-	0.14	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.00	0.00	Σ SAR < 4.0, Not required
			Rear Face	-	0.01	0.01	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Top Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
14	LTE 26 + WLAN (NII)	Head	Right Cheek	0.19	0.04	0.23	Σ SAR < 1.6, Not required
			Right Tilted	0.08	0.04	0.12	Σ SAR < 1.6, Not required
			Left Cheek	0.14	0.09	0.23	Σ SAR < 1.6, Not required
			Left Tilted	0.07	0.04	0.11	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.31	0.03	0.34	Σ SAR < 1.6, Not required
			Rear Face	0.32	0.01	0.33	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
15	LTE 26 + BT (DSS)	Body-Worn	Front Face	0.31	0.08	0.39	Σ SAR < 1.6, Not required
			Rear Face	0.32	0.08	0.40	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
16	LTE 41 + WLAN (DTS)	Head	Right Cheek	0.13	0.13	0.26	Σ SAR < 1.6, Not required
			Right Tilted	0.09	0.10	0.19	Σ SAR < 1.6, Not required
			Left Cheek	0.10	0.42	0.52	Σ SAR < 1.6, Not required
			Left Tilted	0.06	0.26	0.32	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.14	0.05	0.19	Σ SAR < 1.6, Not required
			Rear Face	0.13	0.03	0.16	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.14	0.05	0.19	Σ SAR < 1.6, Not required
			Rear Face	0.13	0.03	0.16	Σ SAR < 1.6, Not required
			Left Side	0.14	-	0.14	Σ SAR < 1.6, Not required
			Right Side	0.01	0.03	0.04	Σ SAR < 1.6, Not required
			Top Side	0.01	0.01	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.06	-	0.06	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.00	0.00	Σ SAR < 4.0, Not required
			Rear Face	-	0.01	0.01	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Top Side	-	0.00	0.00	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-

FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
17	LTE 41 + WLAN (NII)	Head	Right Cheek	0.13	0.04	0.17	Σ SAR < 1.6, Not required
			Right Tilted	0.09	0.04	0.13	Σ SAR < 1.6, Not required
			Left Cheek	0.10	0.09	0.19	Σ SAR < 1.6, Not required
			Left Tilted	0.06	0.04	0.10	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.14	0.03	0.17	Σ SAR < 1.6, Not required
			Rear Face	0.13	0.01	0.14	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.02	0.02	Σ SAR < 4.0, Not required
			Rear Face	-	0.04	0.04	Σ SAR < 4.0, Not required
			Left Side	-	-	-	-
			Right Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Top Side	-	0.01	0.01	Σ SAR < 4.0, Not required
			Bottom Side	-	-	-	-
18	LTE 41 + BT (DSS)	Body-Worn	Front Face	0.14	0.08	0.22	Σ SAR < 1.6, Not required
			Rear Face	0.13	0.08	0.21	Σ SAR < 1.6, Not required
		Extremity	Front Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Rear Face	-	0.10	0.10	Σ SAR < 4.0, Not required
			Left Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Right Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Top Side	-	0.10	0.10	Σ SAR < 4.0, Not required
			Bottom Side	-	0.10	0.10	Σ SAR < 4.0, Not required

Test Engineer : Mars Chang, and Morrison Huang

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Kit	SPEAG	D835V2	4d121	Apr. 25, 2013	Annual
System Validation Kit	SPEAG	D1900V2	5d036	Jan. 21, 2013	Annual
System Validation Kit	SPEAG	D2450V2	737	Jan. 21, 2013	Annual
System Validation Kit	SPEAG	D2600V2	1020	Jan. 18, 2013	Annual
System Validation Kit	SPEAG	D5GHzV2	1019	Nov. 16, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3590	Feb. 20, 2013	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Apr. 30, 2013	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3801	Jun. 20, 2013	Annual
Data Acquisition Electronics	SPEAG	DAE3	360	Jan. 30, 2013	Annual
Data Acquisition Electronics	SPEAG	DAE4	861	Mar. 19, 2013	Annual
Data Acquisition Electronics	SPEAG	DAE4	1277	Jul. 26, 2013	Annual
SAM Phantom	SPEAG	QD000P40CD	TP-1127	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1202	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1653	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1654	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50266628	Nov. 22, 2012	Biennial
Radio Communication Analyzer	Anritsu	MT8820C	6201240432	Jul. 05, 2013	Biennial
ENA Series Network Analyzer	Agilent	E5071C	MY46214281	Jun. 10, 2013	Annual
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	Jun. 06, 2013	Annual
Power Meter	Anritsu	ML2495A	1218009	Jun. 11, 2013	Annual
Power Sensor	Anritsu	MA2411B	1207252	Jun. 11, 2013	Annual
EXA Spectrum Analyzer	Agilent	N9010A	MY52100136	Jun. 26, 2013	Annual
Dielectric Probe Kit	Agilent	85070D	E2-020018	May 13, 2013	Annual
Thermometer	YFE	YF-160A	110600361	Feb. 20, 2013	Annual
Directional Coupler	Woken	0110A05602O-10	11122702	Apr. 18, 2013	Annual
Power Amplifier	AR	5S1G4	0339656	Apr. 18, 2013	Annual
Power Amplifier	Mini-Circuit	ZVE-8G	001000422	Apr. 18, 2013	Annual
Attenuator	Woken	00800A1G01L-03	N/A	Apr. 18, 2013	Annual

6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.0	Normal	1	1	± 6.0 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.6	Normal	1	1	± 0.6 %	∞
Response Time	0.0	Rectangular	√3	1	± 0.0 %	∞
Integration Time	1.7	Rectangular	√3	1	± 1.0 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.5	Rectangular	√3	1	± 0.3 %	∞
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %	∞
Max. SAR Eval.	2.3	Rectangular	√3	1	± 1.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	29
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	29
Combined Standard Uncertainty					± 11.7 %	
Expanded Uncertainty (K=2)					± 23.4 %	

Uncertainty budget for frequency range 300 MHz to 3 GHz

FCC SAR Test Report

A D T

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.55	Normal	1	1	± 6.55 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	2.0	Rectangular	√3	1	± 1.2 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.3	Normal	1	1	± 0.3 %	∞
Response Time	0.8	Rectangular	√3	1	± 0.5 %	∞
Integration Time	2.6	Rectangular	√3	1	± 1.5 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.8	Rectangular	√3	1	± 0.5 %	∞
Probe Positioning	9.9	Rectangular	√3	1	± 5.7 %	∞
Max. SAR Eval.	4.0	Rectangular	√3	1	± 2.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	30
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	30
Combined Standard Uncertainty					± 13.4 %	
Expanded Uncertainty (K=2)					± 26.8 %	

Uncertainty budget for frequency range 3 GHz to 6 GHz

FCC SAR Test Report

7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---