

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF				
Product Name:	Smartphone				
Brand Name:	НТС				
Marketing Name:	Desire 310				
Model No.:	0PA2210				
Model Difference:	N/A				
FCC ID:	NM80PA2210				
Report No.:	ER/2014/10056				
Issue Date:	Feb. 20, 2014				
FCC Rule Part:	§15.247, Cat: DTS				
	HTC Corporation				
Prepared for:	1F, 6-3 Baoqiang Road, Xindian District, New Taipei City , Taiwan				
	SGS Taiwan Ltd.				
Duanawad hay	Electronics & Communication Laboratory				
Prepared by:	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803				
TAF Tac-MRA Testing Laboratory	<b>Note:</b> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This docu- ment may be altered or revised by SGS Taiwan Ltd. person- nel only, and shall be noted in the revision section of the				
The Andrew 0513	document.				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited attern of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# VERIFICATION OF COMPLIANCE

Applicant:	HTC Corporation 1F, 6-3 Baoqiang Road, Xindian District, New Taipei City , Taiwan
Product Name:	Smartphone
Brand Name:	HTC
Marketing Name:	Desire 310
Model No.:	0PA2210
Model Difference:	N/A
File Number:	ER/2014/10056
FCC ID:	NM80PA2210
Date of test:	Jan. 22, 2014 ~ Feb. 13, 2014
Date of EUT Received:	Jan. 22, 2014

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus	Tseng	Date	Feb. 20, 2014	
Prepared By:	Marcus Tseng Judy	/Engineer Hfn	Date	Feb. 20, 2014	
Approved By:	Judy Hsu Tim (	/Clerk In ang	Date	Feb. 20, 2014	

Jim Chang / Supervisor

.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Version

Version No.	Date	Description
00 Feb. 20, 2014		Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



## FCC ID: NM80PA2210

## **Table of Contents**

1	GEN	ERAL INFORMATION	6
	1.1	Product description	6
	1.2	Related Submittal(s) / Grant (s)	9
	1.3	Test Methodology	9
	1.4	Test Facility	9
	1.5	Special Accessories	9
	1.6	Equipment Modifications	9
2	SYST	FEM TEST CONFIGURATION	10
	2.1	EUT Configuration	10
	2.2	EUT Exercise	10
	2.3	Test Procedure	10
	2.4	Configuration of Tested System	11
3	SUM	IMARY OF TEST RESULTS	12
4	DES	CRIPTION OF TEST MODES	13
5	MEA	SUREMENT UNCERTAINTY	14
6	CON	DUCTED EMISSION TEST	15
	6.1	Standard Applicable:	15
	6.2	Measurement Equipment Used:	15
	6.3	EUT Setup:	15
	6.4	Test SET-UP (Block Diagram of Configuration)	16
	6.5	Measurement Procedure:	16
	6.6	Measurement Result:	16
7	PEA	K OUTPUT POWER MEASUREMENT	21
	7.1	Standard Applicable:	21
	7.2	Measurement Equipment Used:	21
	7.3	Test Set-up:	22
	7.4	Measurement Procedure:	22
	7.5	Measurement Result:	26
8	<b>6dB</b>	BANDWIDTH	
	8.1	Standard Applicable:	28
	8.2	Measurement Equipment Used:	28
	8.3	Test Set-up:	28
	8.4	Measurement Procedure:	29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



## FCC ID: NM80PA2210

	8.5	Measurement Result:	30
9	BANI	DEDGES MEASUREMENT	36
	9.1	Standard Applicable:	36
	9.2	Measurement Equipment Used:	36
	9.3	Test SET-UP:	37
	9.4	Measurement Procedure:	38
	9.5	Field Strength Calculation:	39
	9.6	Measurement Result:	39
10	SPUR	IOUS EMISSION TEST	49
	10.1	Standard Applicable	
	10.2	Measurement Equipment Used:	49
	10.3	Test SET-UP:	49
	10.4	Measurement Procedure:	50
	10.5	Field Strength Calculation	51
	10.6	Measurement Result:	51
11	PEAK	X POWER SPECTRAL DENSITY	79
	11.1	Standard Applicable:	
	11.2	Measurement Equipment Used:	
	11.3	Test Set-up:	79
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	79
	11.5	Measurement Result:	80
12	ANTE	ENNA REQUIREMENT	86
-	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### **GENERAL INFORMATION** 1

#### **Product description** 1.1

### General:

Product Name:	Smartphone				
Brand Name:	НТС				
Marketing Name:	Desire 310				
Model No.:	0PA2210				
Model difference:	N/A				
Hardware Version:	DVT				
Software Version:	0.84.161.2				
Data Cable:	Model No.: PCE	3042100307-4; Supplier: JESS-LINK PRODUCTS CO. LTD			
Simple Hands-Free:		S250, Supplier: Merry Electronics Co., Ltd. JAH4012AEOCB, Supplier: KINGSTATE			
	3.8Vdc Recharg	eable Li- Ion Battery or 5Vdc from AC/DC Adapter			
Power Supply:	Battery: Model No.: B0PA2100, Supplier: SUNWODA				
	Adapter:1. Model No.: TC U250, Supplier: Phihong 2. Model No.: TC U250, Supplier: Salcomp				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-participant discussed the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power (Peak)	Modulation Technology				
11b/g	2412-2462	11	b: 19.81dBm g: 22.00dBm	DSSS OFDM				
11n (2.4GHz)	HT20 2412-2462	11	n: 21.95dBm	OFDM				
Antenna	Designation:		FPC Antenna, 0.67dBi					
Modulation type			CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM					
Transition Rate:			802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps					

This report applies for WLAN, and complies with FCC rule part 15C.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### IEEE 802.11n Spec:

MCS Index				NBPSC	NG			Datarate(Mbps)				
	Nss	Modulation	R		NCBPS		NDBPS		800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation					
NSS	Number of spatial streams					
R	Code rate					
NBPSC	Number of coded bite per single carrier					
NCBPS	Number of coded bite per symbol					
NDBPS	Number of data bite per symbol					
GI	Guard interval					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **1.2** Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>NM80PA2210</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B under the DoC procedure.

### **1.3 Test Methodology**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Apr 2013 KDB558074 D01 V03 for compliance to FCC 47CFR 15.247 requirements.

## **1.4 Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

### **1.5** Special Accessories

There are no special accessories used while test was conducted.

### **1.6 Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **2** SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

### 2.3 Test Procedure

### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to \$15.107

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 2.4 **Configuration of Tested System**

## Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



## Fig. 2-2 AC Power Line Conducted Emission



**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### SUMMARY OF TEST RESULTS 3

FCC	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



## **4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz)  $\cdot$  mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz)  $\cdot$  mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n\_20MHz mode: Channel low (2412MHz)  $\cdot$  mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

The worst case is determined by the output power that generates the highest emission. As examined in the section of output power measurement, the section 7.5, the lowest data rate at  $b/g/n_HT20$  resulted the highest level of fundamental emission, and therefore, the lowest data rate is chosen as the worst-case to conduct the remaining of other mandatory test cases.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was tested as resulted in pre-scanned measurement with respect to 2.4GHz.

Model no 0PA2110 and Model no 0PA2210 share the equivalently identical enclosure, material of coating, I/O function, PCB board, display, and power source. In addition, 0PA2110, and Model no 0PA2210 implement the same WLAN chipset/module with the same antenna that operates with the same transmitted power level. Hence, this given test report contains the identical test results that inherent from 0PA2110.

The change between 0PA2110, and 0PA2210 is additional slot of SIM.

Worst case re-verification on radiated spurious emission and transmitter power was done to ensure the RF characteristics remains un-change due to implementation of modification as described above. The records entailing the re-verification of worst case is on page 71-72, and 26-27.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### 5 **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/- 2.586 dB		
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)		
6dB Bandwidth	+/- 123.36 Hz		
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB		
Peak Power Density	+/- 1.55 dB		
Temperature	+/- 0.8 °C		
Humidity	+/- 4.7 %		
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%		

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : <b>Vertical</b> )	0.417GHz-1GHz: +/- 3.19dB
(i ofarization . vertical)	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
Measurement uncertainty (Polarization : <b>Horizontal</b> )	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



#### 6 **CONDUCTED EMISSION TEST**

#### 6.1 **Standard Applicable:**

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)							
MHz	Quasi-peak	Average						
0.15 to 0.50	66 to 56	56 to 46						
0.50 to 5	56	46						
5 to 30	60	50						
Note								
1. The lower limit shall apply at the transition frequencies								

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 6.2 **Measurement Equipment Used:**

Conducted Emission Test Site											
EQUIPMENT MFR		MODEL SERIAL		LAST	CAL DUE.						
ТҮРЕ		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESCI7	100760	05/27/2013	05/26/2014						
LISN	Rolf-Heine	NNB-2/16Z	99012	03/23/2013	03/22/2014						
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/23/2013	03/22/2014						
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014						

#### 6.3 **EUT Setup:**


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



## 6.4 Test SET-UP (Block Diagram of Configuration)

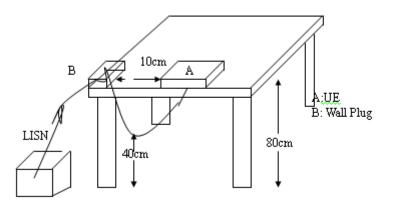

#### 6.5 **Measurement Procedure:**

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### **Measurement Result:** 6.6


Note: Refer to next page for measurement data and plots. Note2: The \* reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



## AC POWER LINE CONDUCTED EMISSION TEST DATA

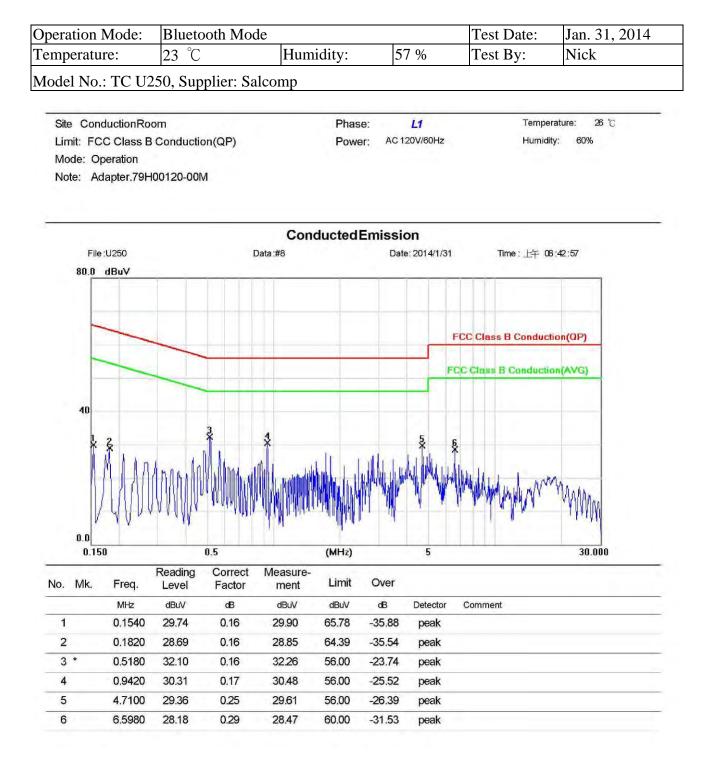

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



\* 4

5

6

0.9420

2.8260

4.7140

24.48

23.91

23.47

0.21

0.25

0.30

### FCC ID: NM80PA2210

Phase: 26 °C Site ConductionRoom Temperature: N Limit: FCC Class B Conduction(QP) AC 120V/60Hz Humidity: Power: 60% Mode: Operation Note: Adapter.79H00120-00M **ConductedEmission** File:U250 Date: 2014/1/31 Data :#9 Time: 上午 08:44:22 80.0 dBuV FCC Class B Conduction(QP) FCC Class B Conduction(AVG) 40 0.0 0.150 0.5 (MHz) 5 30.000 Reading Correct Measure-Limit Over No. Mk. Freq. Level Factor ment dBuV dBuV dBuV dB Comment MHz dB Detector 1 0.1740 31.66 0.18 31.84 64.77 -32.93 peak 2 0.1940 27.09 -36.58 0.19 27.28 63.86 peak 3 0.2300 25.46 0.19 25.65 62.45 -36.80 peak

24.69

24.16

23.77

56.00

56.00

56.00

-31.31

-31.84

-32.23

peak

peak


peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



## AC POWER LINE CONDUCTED EMISSION TEST DATA

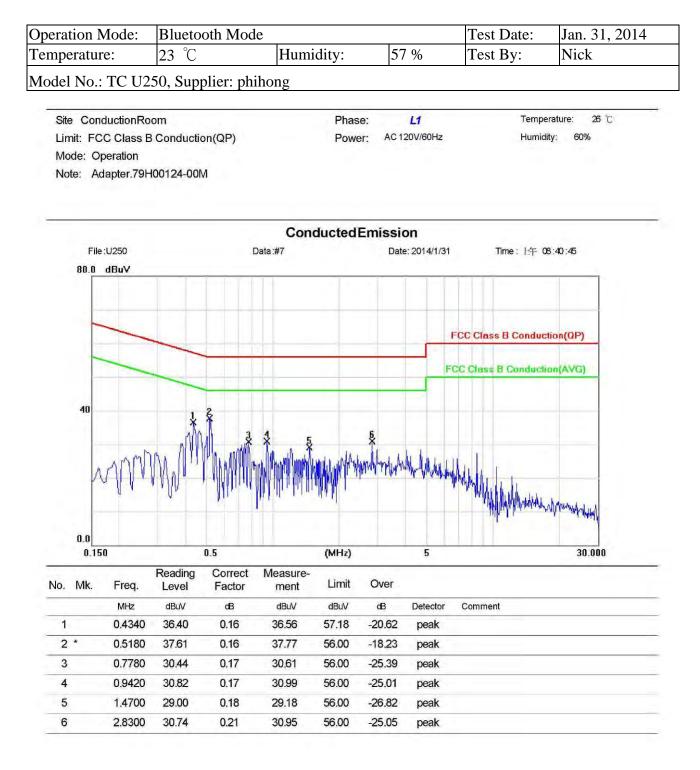

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


時非另有説明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90.tr。本報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



### FCC ID: NM80PA2210

Site ConductionRoom N Temperature: 26 °C Phase: Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60% Mode: Operation Note: Adapter.79H00124-00M Conducted Emission File:U250 Data:#6 Date: 2014/1/31 Time: 上下 08:38:58 80.0 dBuV FCC Class B Conduction(QP)

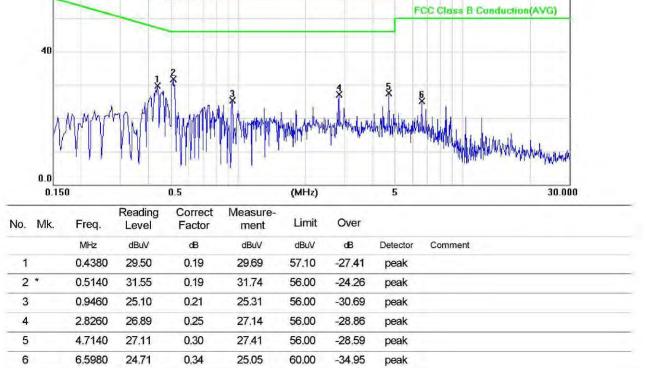

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方方机则,此我告惑本性對測風之体前具實、回時起体過度体過少し、今天服存未經本公司音運計了, 个可能力技衰。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

## 7 PEAK OUTPUT POWER MEASUREMENT

## 7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

	Conducted Emission Test Site											
EQUIPMENT	MFR MODEL		SERIAL	LAST	CAL DUE.							
ТҮРЕ		NUMBER	NUMBER	CAL.								
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015							
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015							
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/30/2013	05/29/2014							
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/15/2013	03/14/2014							
DC Block	Mini-Circuits	BLK-18-S+	1	02/28/2013	02/27/2014							
Low Loss Cable	Low Loss Cable HUBER+SUHNER		N/A	01/03/2014	01/02/2015							
Attenuator	Mini-Circuit	BW-S10W2+	002	02/28/2013	02/27/2014							
Splitter	Agilent	11636B	N/A	02/28/2013	02/27/2014							

## 7.2 Measurement Equipment Used:

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 7.3 Test Set-up:

Spectrum:

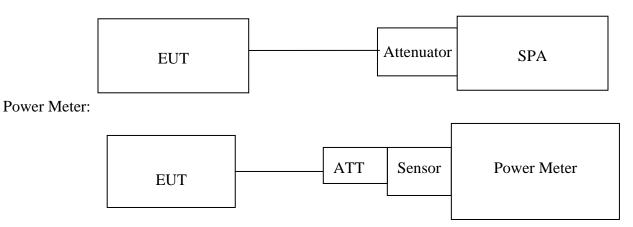

## 7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

- 3. Record the max. Reading as observed from Spectrum or Power Meter.
- 4. Repeat above procedures until all frequency of interest measured was complete.

## Formula:

*Duty Cycle* = *Ton* / (*Ton*+*Toff*)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **Test Procedure:**

Set span = 0, RBW = 1MHz, VBW = 3MHz, Detector = PeakDuty Cycle:

	Duty Cycle	Duty Factor (dBm)
802.11b	1.000	0.000
802.11g	0.891	1.007
802.11n_20 (2.4G)	0.871	1.201


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




## **Duty Factor:**



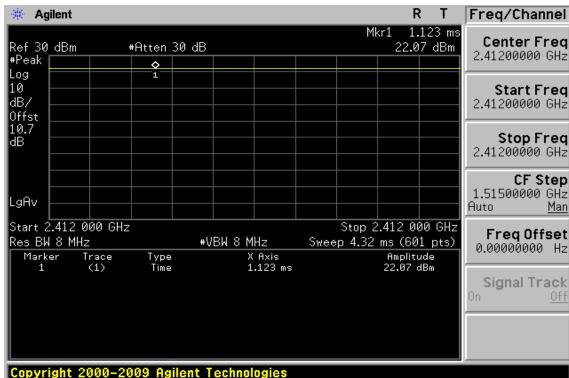

### 802.11 g

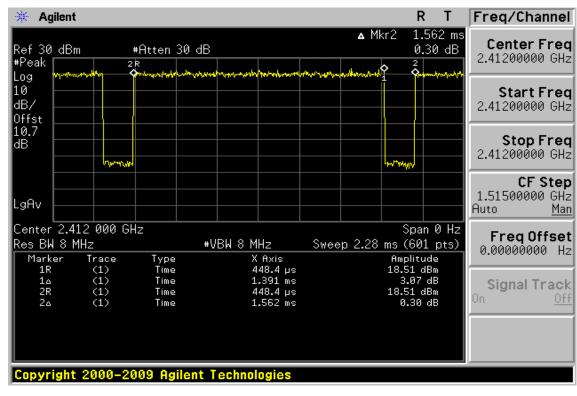


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 S Taiwan Ltd.



### 802.11 n 20 MHz

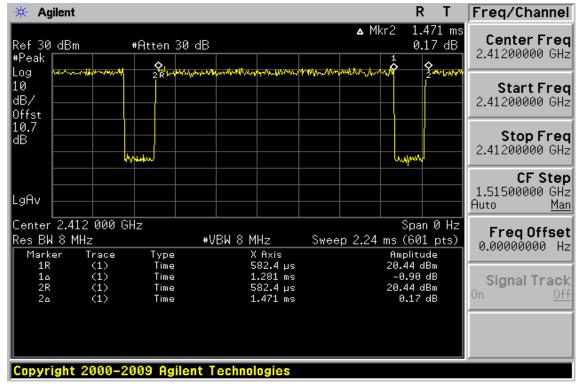

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



#### 7.5 **Measurement Result:**

### 802.11b

		Peak Power Output (dBm)										
CII	Frequency		Data Rate									
СН	(MHz)	1	2	5.5	11	Required Limit						
1	2412	18.84	18.79	18.68	18.58	1 Watt = 30 dBm						
6	2437	18.87	18.86	18.78	18.71	1 Watt = 30 dBm						
11	2462	19.81	19.72	19.66	19.65	1 Watt = 30 dBm						

		Average Power Output (dBm)									
CII	Frequency (MHz)		Dequined Limit								
СН		1	2	5.5	11	Required Limit					
1	2412	16.09	16.01	15.97	15.83	1 Watt = 30 dBm					
6	2437	15.86	15.83	15.71	15.58	1 Watt = 30 dBm					
11	2462	16.73	16.64	16.60	16.57	1 Watt = 30 dBm					

802.11g

			Peak Power Output(dBm)										
СП	Frequency			De andre d I insite									
СН	(MHz)	6	9	12	18	24	36	48	54	<b>Required Limit</b>			
1	2412	21.20	21.18	21.16	21.13	21.09	21.03	21.02	21.00	1 Watt = 30 dBm			
6	2437	21.51	21.44	21.42	21.30	21.17	21.09	20.99	20.94	1 Watt = 30 dBm			
11	2462	22.00	21.94	21.92	21.90	21.88	21.83	21.72	21.70	1 Watt = 30 dBm			

СП	Frequency		_	Dequined Limit						
СН	(MHz)	6	9	12	18	24	36	48	54	<b>Required Limit</b>
1	2412	10.92	10.79	10.69	10.60	10.56	10.43	10.39	10.33	1 Watt = 30 dBm
6	2437	10.66	10.62	10.57	10.52	10.49	10.48	10.38	10.30	1 Watt = 30 dBm
11	2462	11.17	11.03	11.02	10.98	10.89	10.86	10.74	10.68	1 Watt = 30 dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



802.11n 20M

			Peak Power Output(dBm)										
СП	Frequency	requency Data Rate											
CH (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit				
1	2412	21.33	21.31	21.21	21.07	21.04	20.98	20.97	20.86	1 Watt = 30 dBm			
6	2437	21.71	21.69	21.68	21.66	21.58	21.50	21.48	21.41	1 Watt = 30 dBm			
11	2462	21.95	21.92	21.89	21.93	21.90	21.89	21.86	21.78	1 Watt = 30 dBm			

			Average Power Output(dBm)							
СП	Frequency (MHz)	Data Rate						Required		
СН		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit
1	2412	10.93	10.91	10.88	10.86	10.78	10.75	10.67	10.55	1 Watt = 30 dBm
6	2437	10.76	10.69	10.63	10.51	10.50	10.45	10.43	10.41	1 Watt = 30 dBm
11	2462	11.22	11.14	11.02	10.99	10.95	10.90	10.85	10.74	1 Watt = 30 dBm

\* Note: The duty cycle factor is compensated back to obtain the maximum value of the measurement in average.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fullet at test of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 8 **6dB BANDWIDTH**

#### 8.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

## 8.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015		
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/30/2013	05/29/2014		
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/15/2013	03/14/2014		
DC Block	Mini-Circuits	BLK-18-S+	1	02/28/2013	02/27/2014		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015		
Attenuator	Mini-Circuit	BW-S10W2+	002	02/28/2013	02/27/2014		
Splitter	Agilent	11636B	N/A	02/28/2013	02/27/2014		

#### 8.3 **Test Set-up:**

EUT	Atten	uator SPA

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



#### 8.4 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



#### 8.5 **Measurement Result:**

### 802.11b

Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
2412	10065	> 500	PASS
2437	9584	> 500	PASS
2462	9105	> 500	PASS

### 802.11g

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2412	16314	> 500	PASS
2437	15710	> 500	PASS
2462	15491	> 500	PASS

### 802.11n 20M

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2412	15422	> 500	PASS
2437	13915	> 500	PASS
2462	17325	> 500	PASS

\* Note: Offset 11dB for 2.4G 802.11b/g, 802.11n\_20

\* Note: The diamond reveals X decibel level

\*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited attern of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 802.11b 6dB Band Width Test Data CH-Low



## 6dB Band Width Test Data CH-Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




## 6dB Band Width Test Data CH-High

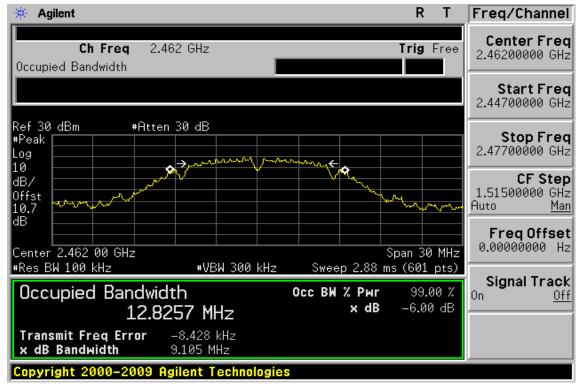

## 802.11g

## 6dB Band Width Test Data CH-Low

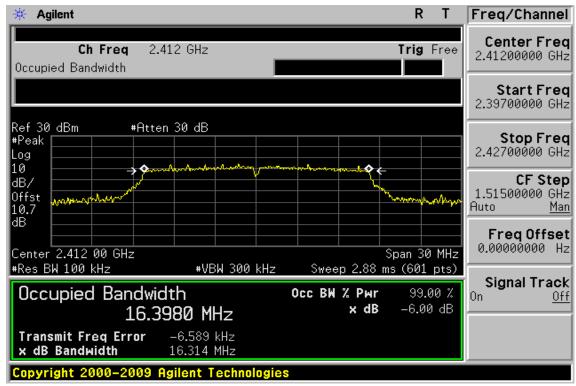


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 6dB Band Width Test Data CH-Mid

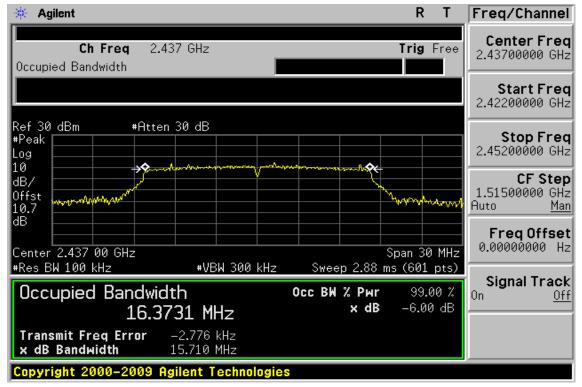

## 6dB Band Width Test Data CH-High

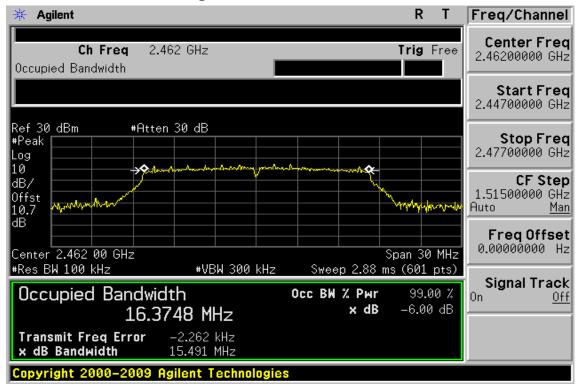


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Chiles Solite was stated are located and the and a state of the form of the state tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms/e-document.htm">www.sgs.com/terms/e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 802.11n 20M 6dB Band Width Test Data CH-Low

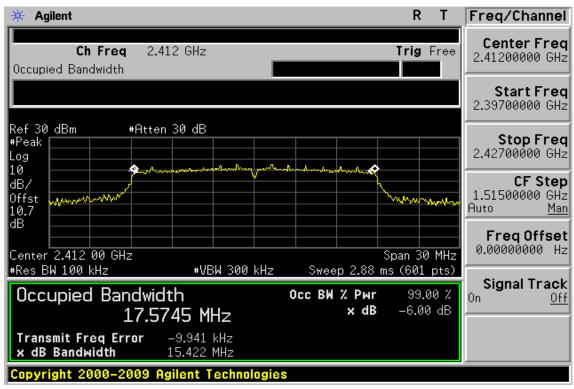

## 6dB Band Width Test Data CH-Mid

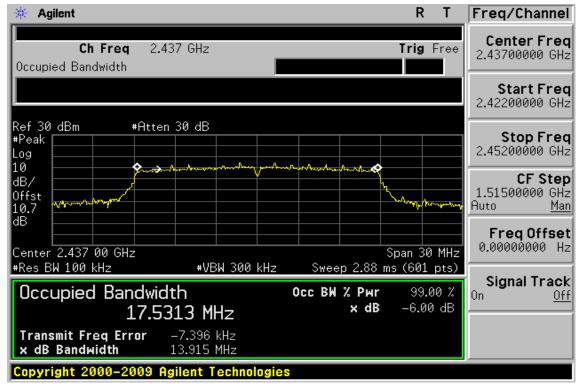


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



## 6dB Band Width Test Data CH-High

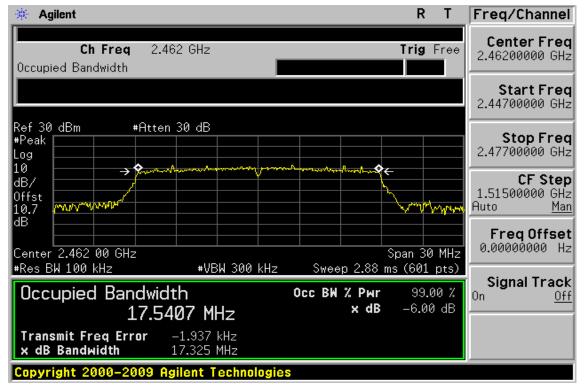

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



#### 9 **BAND EDGES MEASUREMENT**

#### 9.1 **Standard Applicable:**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

#### 9.2 **Measurement Equipment Used:**

### 9.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

#### **Radiated emission:** 9.2.2

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI7	100760	05/27/2013	05/26/2014		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/30/2013	05/29/2014		
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015		
Spectrum Analyzer	R&S	FSV-30	101398	10/22/2013	10/21/2014		
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/02/2015		
Horn antenna	ETS.LINDGREN	3117	123995	05/31/2013	05/30/2014		
Horn Antenna	Schwarzbeck	BBHA9170	184	01/23/2014	01/22/2015		
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015		
Pre-Amplifier	Agilent	8449B	3008A00578	01/03/2014	01/02/2015		
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/24/2014	01/23/2015		
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/28/2013	02/28/2014		
Attenuator	Mini-Circuit	BW-S10W2+	004	02/28/2013	02/27/2014		
Turn Table	HD	DT420	N/A	N.C.R	N.C.R		
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R		
Controller	HD	HD100	N/A	N.C.R	N.C.R		
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015		
3m Site NSA	SGS	966 chamber	N/A	07/15/2013	07/14/2014		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiles Solite was stated are located and the and a state of the form of the state tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms/e-document.htm">www.sgs.com/terms/e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




#### 9.3 **Test SET-UP:**

#### 9.3.1 **Conducted Emission at antenna port:**




### 9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

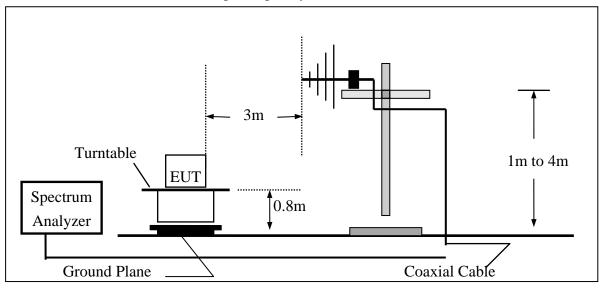

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

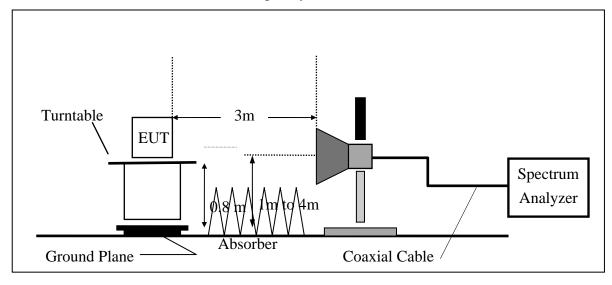



# 9.4 Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074 D01

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### **Field Strength Calculation:** 9.5

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:


# FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### **Measurement Result:** 9.6


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.



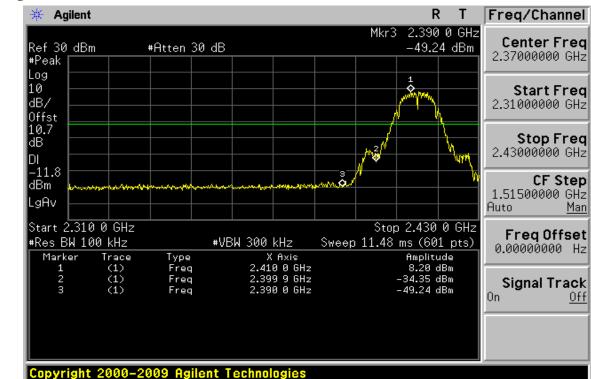





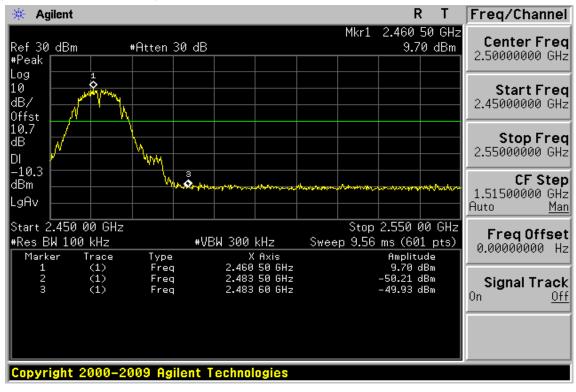

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 41 of 86

#### **Radiated Emission:**

(Unwanted Emissions into Restricted Frequency Bands): 802.11 b mode

:802.11 b	Test Date	:2014-01-24
:2412 MHz	Temp./Humi.	:22deg_C/52 RH
:Bandedge LOW	Engineer	:Curry
:E2 Plan	Measurement Antenna Pol.	:VERTICAL
	:2412 MHz :Bandedge LOW	:2412 MHz Temp./Humi. :Bandedge LOW Engineer

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	38.40	2.42	40.82	54.00	-13.18
2390.00	E	Peak	48.38	2.42	50.80	74.00	-23.20

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	42.77	2.42	45.19	54.00	-8.81
2390.00	Е	Peak	52.11	2.42	54.53	74.00	-19.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of the Solution Solution Solution (Solution Solution) (Fine S tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms/e-document.htm">www.sgs.com/terms/e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 42 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	36.68	2.74	39.42	54.00	-14.58
2483.50	E	Peak	50.35	2.74	53.09	74.00	-20.91

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.


The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	38.52	2.74	41.26	54.00	-12.74
2483.50	E	Peak	51.61	2.74	54.35	74.00	-19.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



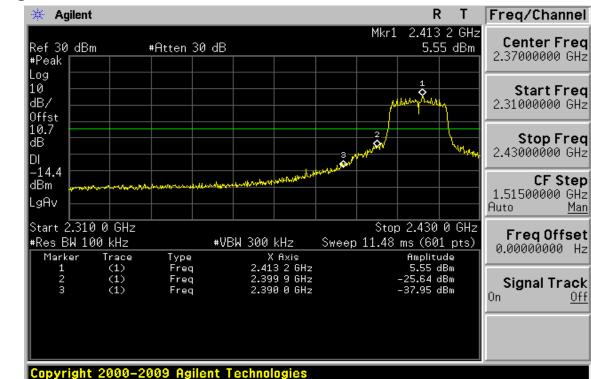





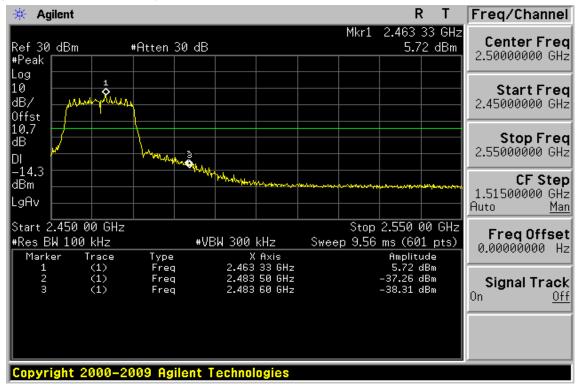

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 44 of 86

# **Radiated Emission:**

(Unwanted Emissions into Restricted Frequency Bands): 802.11 g mode

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	63.30	2.42	65.72	74.00	-8.28
2390.00	E	Average	42.58	2.42	45.00	54.00	-9.00

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	67.60	2.42	70.02	74.00	-3.98
2390.00	E	Average	44.82	2.42	47.24	54.00	-6.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Fine Solution in the Solution in the Solution in the Solution of the Solution Solution Solution (Solution Solution) (Fine S tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 45 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Average	41.22	2.74	43.96	54.00	-10.04
2483.50	E	Peak	68.66	2.74	71.40	74.00	-2.60

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.


The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	42.87	2.74	45.61	54.00	-8.39
2483.50	E	Peak	70.03	2.74	72.77	74.00	-1.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law











Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 47 of 86

#### **Radiated Emission:**

(Unwanted Emissions into Restricted Frequency Bands): 802.11 n\_20M mode

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	66.88	2.42	69.30	74.00	-4.70
2390.00	E	Average	42.21	2.42	44.63	54.00	-9.37

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	68.78	2.42	71.20	74.00	-2.80
2390.00	E	Average	45.44	2.42	47.86	54.00	-6.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of the Solution Solution Solution (Solution Solution) (Fine S tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 48 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Average	41.69	2.74	44.43	54.00	-9.57
2483.50	E	Peak	67.45	2.74	70.19	74.00	-3.81

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Average	44.06	2.74	46.80	54.00	-7.20
2483.50	Е	Peak	70.75	2.74	73.49	74.00	-0.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# **10 SPURIOUS EMISSION TEST 10.1 Standard Applicable**

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **Radiated Spurious Emission**

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

# **10.2 Measurement Equipment Used:**

#### 10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

#### 10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

#### 10.3 Test SET-UP:

#### **10.3.1** Conducted Emission at antenna port:

Refer to section 7.3 for details.

#### 10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# **10.4 Measurement Procedure:**

## **Radiated Emission:**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

# **Conducted Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- 4. Via Software, combine 5 spans of frequency range into one plot
- 5. Repeat above procedures until all default test channel measured were complete.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **10.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

# FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### **10.6 Measurement Result:**


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz

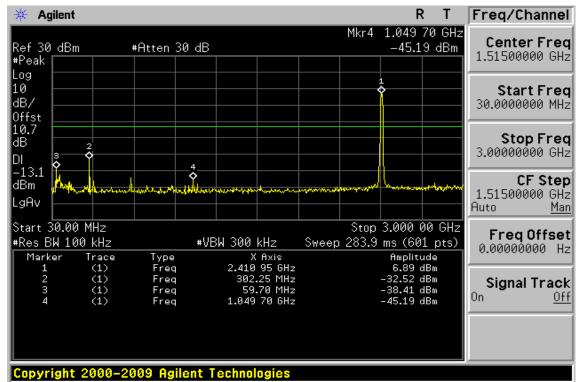



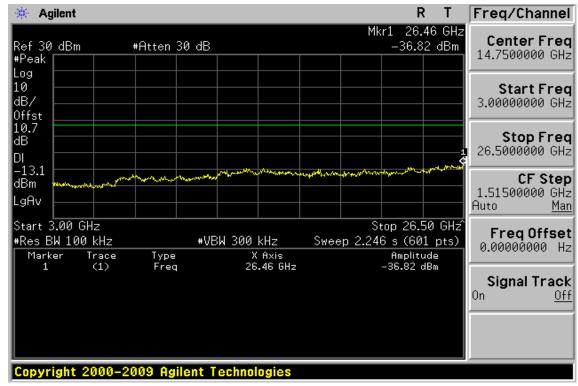

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



#### Ch Mid 30MHz – 3GHz

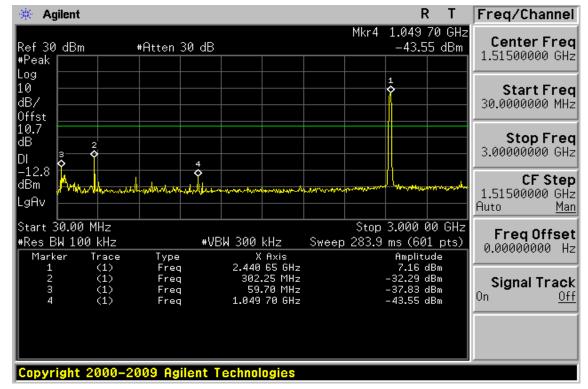

# Ch Mid 3GHz – 26.5GHz

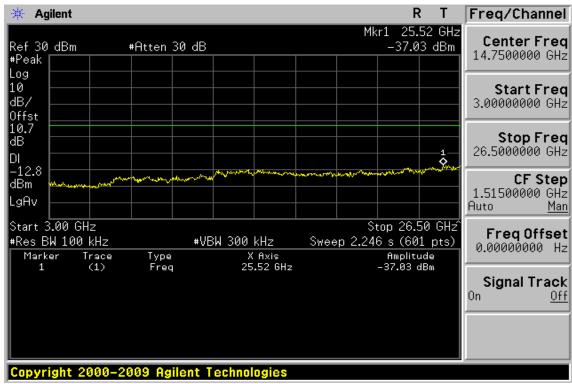


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Ch High 30MHz – 3GHz

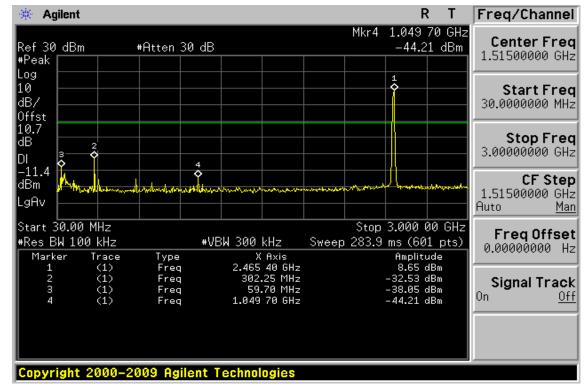

# Ch High 3GHz – 26.5GHz

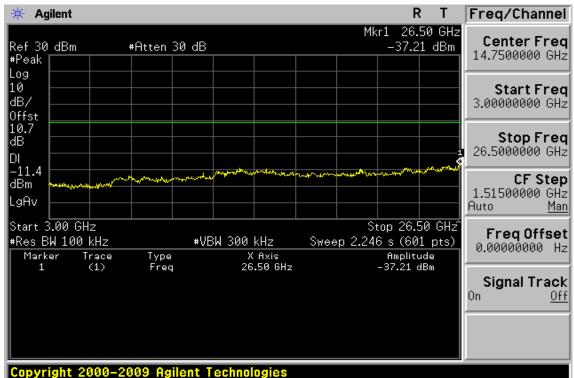


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Conducted Spurious Emission Measurement Result (802.11g)** Ch Low 30MHz – 3GHz

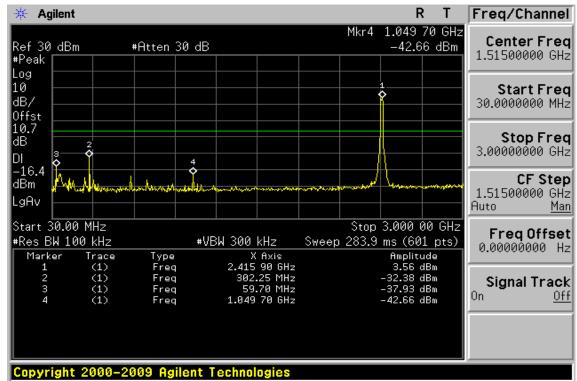



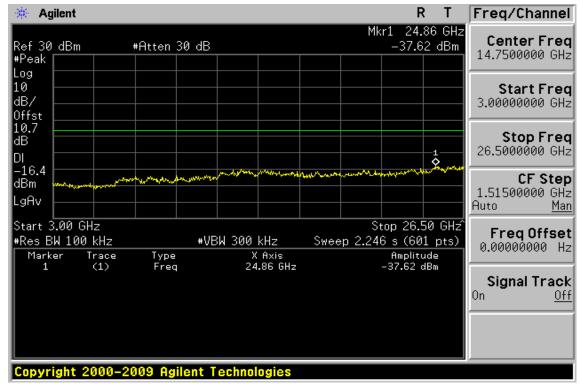

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



### Ch Mid 30MHz – 3GHz

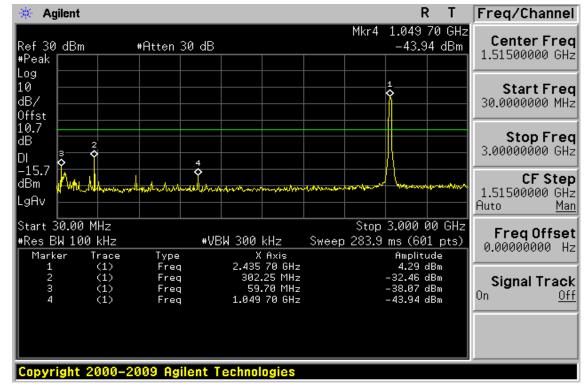

# Ch Mid 3GHz – 26.5GHz

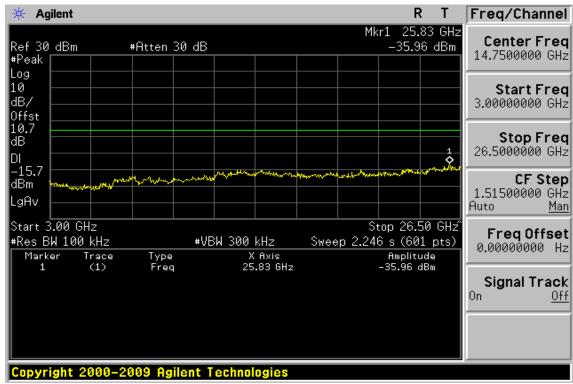


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Ch High 30MHz – 3GHz

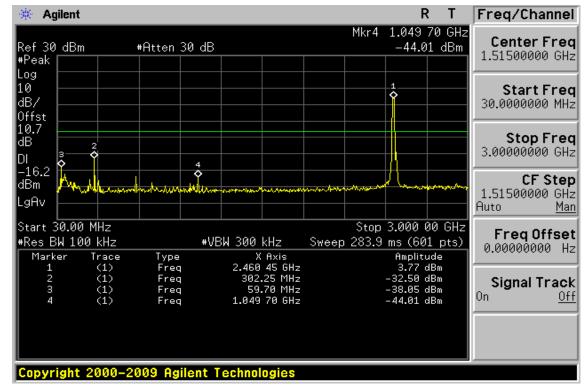

# Ch High 3GHz – 26.5GHz

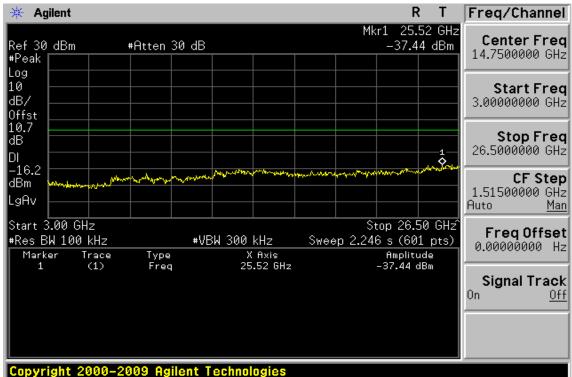


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Conducted Spurious Emission Measurement Result (802.11n\_20M) Ch Low 30MHz – 3GHz

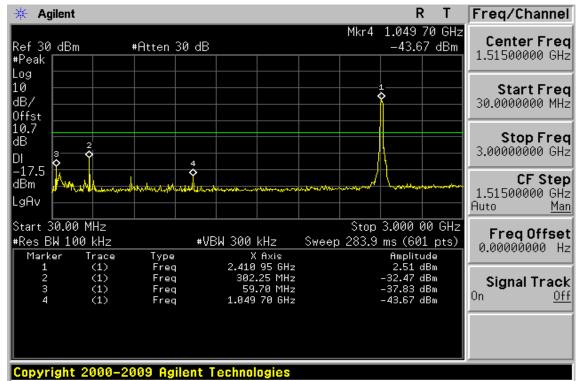



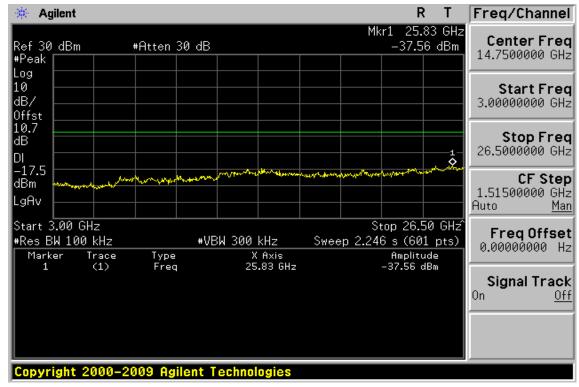


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### Ch Mid 30MHz – 3GHz

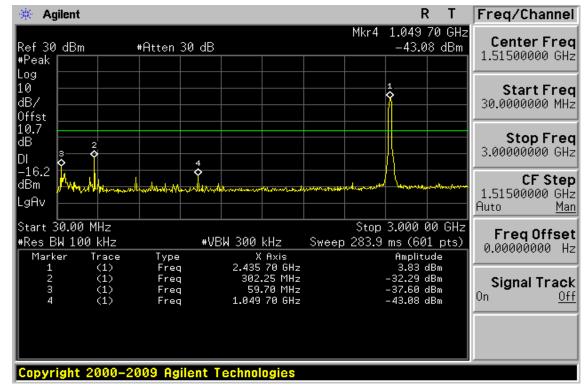

# Ch Mid 3GHz – 26.5GHz

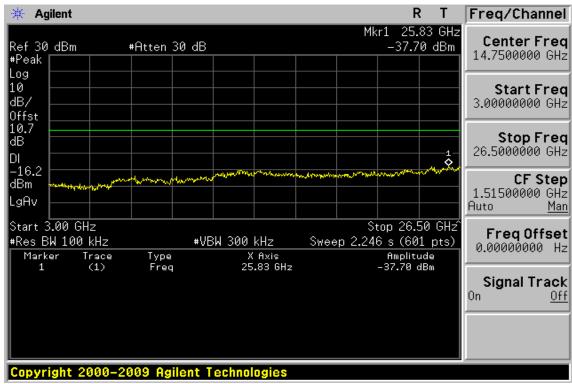


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Ch High 30MHz – 3GHz

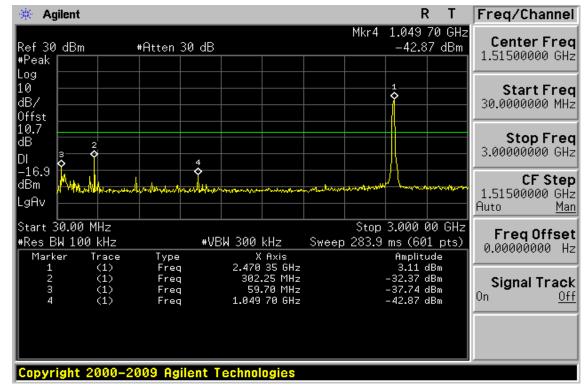

# Ch High 3GHz – 26.5GHz

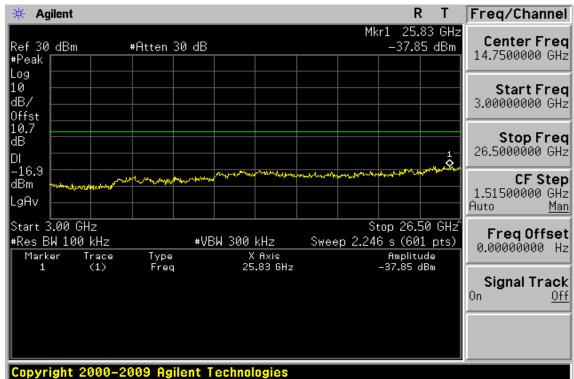

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested and social after feature in the results shown in this test report refer only to the sample(s) tested after social after feature in the results and social social after feature in the results and social socia Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **Radiated Spurious Emission Measurement Result (802.11b)**

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

24120.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	50.34	-13.45	36.89	40.00	-3.11
90.14	S	Peak	39.66	-18.98	20.68	43.50	-22.82
219.15	S	Peak	34.15	-14.58	19.57	46.00	-26.43
250.19	S	Peak	33.95	-12.96	20.99	46.00	-25.01
302.57	S	Peak	31.67	-11.18	20.49	46.00	-25.51
583.87	S	Peak	29.72	-5.19	24.53	46.00	-21.47
4824.00	Н	Average	27.26	6.89	34.15	54.00	-19.85
4824.00	Н	Peak	35.73	6.89	42.62	74.00	-31.38
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 62 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24120.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	38.08	-13.39	24.69	40.00	-15.31
89.17	S	Peak	40.12	-18.86	21.26	43.50	-22.24
132.82	S	Peak	32.58	-13.87	18.71	43.50	-24.79
205.57	S	Peak	41.57	-15.12	26.45	43.50	-17.05
275.41	S	Peak	33.31	-11.72	21.59	46.00	-24.41
589.69	S	Peak	29.61	-5.12	24.49	46.00	-21.51
4824.00	Н	Average	25.17	6.89	32.06	54.00	-21.94
4824.00	Н	Peak	36.33	6.89	43.22	74.00	-30.78
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 63 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	49.77	-13.45	36.32	40.00	-3.68
91.11	S	Peak	42.09	-18.87	23.22	43.50	-20.28
211.39	S	Peak	33.53	-14.96	18.57	43.50	-24.93
248.25	S	Peak	34.56	-13.01	21.55	46.00	-24.45
300.63	S	Peak	30.77	-11.22	19.55	46.00	-26.45
408.30	S	Peak	29.74	-8.95	20.79	46.00	-25.21
4874.00	Н	Average	25.21	6.96	32.17	54.00	-21.83
4874.00	Н	Peak	35.54	6.96	42.50	74.00	-31.50
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 64 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	38.81	-13.45	25.36	40.00	-14.64
91.11	S	Peak	39.84	-18.87	20.97	43.50	-22.53
134.76	S	Peak	33.15	-13.67	19.48	43.50	-24.02
216.24	S	Peak	40.53	-14.72	25.81	46.00	-20.19
266.68	S	Peak	34.28	-12.14	22.14	46.00	-23.86
602.30	S	Peak	29.30	-5.60	23.70	46.00	-22.30
4874.00	Н	Average	25.78	6.96	32.74	54.00	-21.26
4874.00	Н	Peak	35.99	6.96	42.95	74.00	-31.05
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 65 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
S	Peak	50.34	-13.45	36.89	40.00	-3.11
S	Peak	33.75	-15.06	18.69	43.50	-24.81
S	Peak	37.33	-12.99	24.34	46.00	-21.66
S	Peak	31.90	-11.56	20.34	46.00	-25.66
S	Peak	28.86	-5.13	23.73	46.00	-22.27
S	Peak	29.32	-2.20	27.12	46.00	-18.88
Н	Average	26.15	7.01	33.16	54.00	-20.84
Н	Peak	35.67	7.01	42.68	74.00	-31.32
Н						
Н						
Н						
Н						
Н						
Н						
Н						
	F/H/E/S S S S S S H H H H H H H H H H H H H	Mode   F/H/E/S Mode   F/H/E/S PK/QP/AV   S Peak   I Peak <th< td=""><td>Mode   Reading Level     F/H/E/S   PK/QP/AV   dBµV     S   Peak   50.34     S   Peak   33.75     S   Peak   37.33     S   Peak   31.90     S   Peak   28.86     S   Peak   29.32     H   Average   26.15     H   Peak   35.67     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +</td><td>Mode   Reading Level     F/H/E/S   PK/QP/AV   dBμV   dB     S   Peak   50.34   -13.45     S   Peak   33.75   -15.06     S   Peak   37.33   -12.99     S   Peak   31.90   -11.56     S   Peak   28.86   -5.13     S   Peak   29.32   -2.20     H   Average   26.15   7.01     H   Peak   35.67   7.01     H    H      H        H        H        H        H        H        H        H        H    </td><td>Mode   Reading Level   FS     F/H/E/S   PK/QP/AV   dBμV   dB   dBμV/m     S   Peak   50.34   -13.45   36.89     S   Peak   33.75   -15.06   18.69     S   Peak   37.33   -12.99   24.34     S   Peak   31.90   -11.56   20.34     S   Peak   31.90   -11.56   20.34     S   Peak   28.86   -5.13   23.73     S   Peak   29.32   -2.20   27.12     H   Average   26.15   7.01   33.16     H   Peak   35.67   7.01   42.68     H    H    H      H                        <td>ModeReading LevelFS@3m<math>F/H/E/S</math><math>PK/QP/AV</math><math>dB\mu V</math><math>dB</math><math>dB\mu V/m</math><math>dB\mu V/m</math>SPeak<math>50.34</math><math>-13.45</math><math>36.89</math><math>40.00</math>SPeak<math>33.75</math><math>-15.06</math><math>18.69</math><math>43.50</math>SPeak<math>37.33</math><math>-12.99</math><math>24.34</math><math>46.00</math>SPeak<math>31.90</math><math>-11.56</math><math>20.34</math><math>46.00</math>SPeak<math>28.86</math><math>-5.13</math><math>23.73</math><math>46.00</math>SPeak<math>29.32</math><math>-2.20</math><math>27.12</math><math>46.00</math>GPeak<math>25.67</math><math>7.01</math><math>33.16</math><math>54.00</math>HPeak<math>35.67</math><math>7.01</math><math>42.68</math><math>74.00</math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math></td></td></th<>	Mode   Reading Level     F/H/E/S   PK/QP/AV   dBµV     S   Peak   50.34     S   Peak   33.75     S   Peak   37.33     S   Peak   31.90     S   Peak   28.86     S   Peak   29.32     H   Average   26.15     H   Peak   35.67     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +     H    +	Mode   Reading Level     F/H/E/S   PK/QP/AV   dBμV   dB     S   Peak   50.34   -13.45     S   Peak   33.75   -15.06     S   Peak   37.33   -12.99     S   Peak   31.90   -11.56     S   Peak   28.86   -5.13     S   Peak   29.32   -2.20     H   Average   26.15   7.01     H   Peak   35.67   7.01     H    H      H        H        H        H        H        H        H        H        H	Mode   Reading Level   FS     F/H/E/S   PK/QP/AV   dBμV   dB   dBμV/m     S   Peak   50.34   -13.45   36.89     S   Peak   33.75   -15.06   18.69     S   Peak   37.33   -12.99   24.34     S   Peak   31.90   -11.56   20.34     S   Peak   31.90   -11.56   20.34     S   Peak   28.86   -5.13   23.73     S   Peak   29.32   -2.20   27.12     H   Average   26.15   7.01   33.16     H   Peak   35.67   7.01   42.68     H    H    H      H <td>ModeReading LevelFS@3m<math>F/H/E/S</math><math>PK/QP/AV</math><math>dB\mu V</math><math>dB</math><math>dB\mu V/m</math><math>dB\mu V/m</math>SPeak<math>50.34</math><math>-13.45</math><math>36.89</math><math>40.00</math>SPeak<math>33.75</math><math>-15.06</math><math>18.69</math><math>43.50</math>SPeak<math>37.33</math><math>-12.99</math><math>24.34</math><math>46.00</math>SPeak<math>31.90</math><math>-11.56</math><math>20.34</math><math>46.00</math>SPeak<math>28.86</math><math>-5.13</math><math>23.73</math><math>46.00</math>SPeak<math>29.32</math><math>-2.20</math><math>27.12</math><math>46.00</math>GPeak<math>25.67</math><math>7.01</math><math>33.16</math><math>54.00</math>HPeak<math>35.67</math><math>7.01</math><math>42.68</math><math>74.00</math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math>H<math></math><math></math><math></math><math></math></td>	ModeReading LevelFS@3m $F/H/E/S$ $PK/QP/AV$ $dB\mu V$ $dB$ $dB\mu V/m$ $dB\mu V/m$ SPeak $50.34$ $-13.45$ $36.89$ $40.00$ SPeak $33.75$ $-15.06$ $18.69$ $43.50$ SPeak $37.33$ $-12.99$ $24.34$ $46.00$ SPeak $31.90$ $-11.56$ $20.34$ $46.00$ SPeak $28.86$ $-5.13$ $23.73$ $46.00$ SPeak $29.32$ $-2.20$ $27.12$ $46.00$ GPeak $25.67$ $7.01$ $33.16$ $54.00$ HPeak $35.67$ $7.01$ $42.68$ $74.00$ H $$ $$ $$ $$ $$ H $$ $$ $$ $$ $$ H $$ $$ $$ $$ $$ H $$ $$ $$ $$ H $$ $$ $$ $$ H $$ $$ $$ $$



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 66 of 86

Operation Band	:802.11 b	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	38.33	-13.45	24.88	40.00	-15.12
90.14	S	Peak	40.17	-18.98	21.19	43.50	-22.31
131.85	S	Peak	33.37	-13.98	19.39	43.50	-24.11
208.48	S	Peak	40.00	-15.06	24.94	43.50	-18.56
251.16	S	Peak	33.77	-12.91	20.86	46.00	-25.14
755.56	S	Peak	29.25	-2.69	26.56	46.00	-19.44
4924.00	Н	Average	24.78	7.01	31.79	54.00	-22.21
4924.00	Н	Peak	34.90	7.01	41.91	74.00	-32.09
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						



#### **Radiated Spurious Emission Measurement Result (802.11g)**

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency.; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24120.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	49.75	-13.45	36.30	40.00	-3.70
93.05	S	Peak	40.99	-18.63	22.36	43.50	-21.14
205.57	S	Peak	32.83	-15.12	17.71	43.50	-25.79
252.13	S	Peak	36.27	-12.88	23.39	46.00	-22.61
280.26	S	Peak	31.33	-11.52	19.81	46.00	-26.19
674.08	S	Peak	27.85	-3.87	23.98	46.00	-22.02
4824.00	Н	Average	23.78	6.89	30.67	54.00	-23.33
4824.00	Н	Peak	35.81	6.89	42.70	74.00	-31.30
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 68 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24120.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	37.44	-13.45	23.99	40.00	-16.01
90.14	S	Peak	40.61	-18.98	21.63	43.50	-21.87
133.79	S	Peak	33.89	-13.77	20.12	43.50	-23.38
206.54	S	Peak	41.02	-15.09	25.93	43.50	-17.57
254.07	S	Peak	34.30	-12.80	21.50	46.00	-24.50
343.31	S	Peak	29.34	-10.43	18.91	46.00	-27.09
4824.00	Н	Average	24.10	6.89	30.99	54.00	-23.01
4824.00	Н	Peak	35.45	6.89	42.34	74.00	-31.66
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 69 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	49.90	-13.45	36.45	40.00	-3.55
206.54	S	Peak	32.35	-15.09	17.26	43.50	-26.24
252.13	S	Peak	35.84	-12.88	22.96	46.00	-23.04
471.35	S	Peak	29.12	-7.85	21.27	46.00	-24.73
526.64	S	Peak	29.36	-7.50	21.86	46.00	-24.14
676.02	S	Peak	28.88	-3.81	25.07	46.00	-20.93
4874.00	Н	Average	24.11	6.96	31.07	54.00	-22.93
4874.00	Н	Peak	35.38	6.96	42.34	74.00	-31.66
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 70 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
37.76	S	Peak	36.38	-13.58	22.80	40.00	-17.20
95.96	S	Peak	37.75	-18.29	19.46	43.50	-24.04
136.70	S	Peak	32.59	-13.48	19.11	43.50	-24.39
205.57	S	Peak	39.74	-15.12	24.62	43.50	-18.88
256.98	S	Peak	33.15	-12.67	20.48	46.00	-25.52
474.26	S	Peak	29.25	-7.82	21.43	46.00	-24.57
4874.00	Н	Average	24.30	6.96	31.26	54.00	-22.74
4874.00	Н	Peak	35.46	6.96	42.42	74.00	-31.58
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 71 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	48.90	-13.39	35.51	40.00	-4.49
94.99	S	Peak	37.99	-18.40	19.59	43.50	-23.91
252.13	S	Peak	35.00	-12.88	22.12	46.00	-23.88
290.93	S	Peak	29.58	-11.41	18.17	46.00	-27.83
471.35	S	Peak	28.28	-7.85	20.43	46.00	-25.57
592.60	S	Peak	28.50	-5.21	23.29	46.00	-22.71
4924.00	Н	Average	24.86	7.01	31.87	54.00	-22.13
4924.00	Н	Peak	36.25	7.01	43.26	74.00	-30.74
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 72 of 86

Operation Band	:802.11 g	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
44.55	S	Peak	33.43	-13.11	20.32	40.00	-19.68
92.08	S	Peak	37.09	-18.75	18.34	43.50	-25.16
138.64	S	Peak	29.40	-13.29	16.11	43.50	-27.39
210.42	S	Peak	37.75	-15.01	22.74	43.50	-20.76
273.47	S	Peak	31.42	-11.81	19.61	46.00	-26.39
393.75	S	Peak	29.13	-9.30	19.83	46.00	-26.17
4924.00	Н	Average	25.11	7.01	32.12	54.00	-21.88
4924.00	Н	Peak	35.32	7.01	42.33	74.00	-31.67
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						



#### Radiated Spurious Emission Measurement Result (802.11n\_20M)

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency.; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	50.23	-13.45	36.78	40.00	-3.22
97.90	S	Peak	39.82	-18.06	21.76	43.50	-21.74
205.57	S	Peak	32.44	-15.12	17.32	43.50	-26.18
250.19	S	Peak	36.24	-12.96	23.28	46.00	-22.72
382.11	S	Peak	29.64	-9.53	20.11	46.00	-25.89
513.06	S	Peak	29.67	-7.44	22.23	46.00	-23.77
2372.00	Н	Average	31.32	2.33	33.65	54.00	-20.35
2372.00	Н	Peak	48.88	2.33	51.21	74.00	-22.79
4824.00	Н	Average	23.80	6.89	30.69	54.00	-23.31
4824.00	Н	Peak	35.77	6.89	42.66	74.00	-31.34
7236.00	Н						
9648.00	Н						
12060.00	н						

12060.00	Н	
14472.00	Н	
16884.00	Н	
19296.00	Н	
21708.00	Н	
24120.00	Н	



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 74 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2412 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

16884.00

19296.00

21708.00

24120.00

Η

Η

Η

Η

	. denotes 1 (0)	be 1 1001.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	35.21	-13.39	21.82	40.00	-18.18
88.20	S	Peak	37.24	-18.68	18.56	43.50	-24.94
137.67	S	Peak	30.66	-13.39	17.27	43.50	-26.23
209.45	S	Peak	37.69	-15.04	22.65	43.50	-20.85
255.04	S	Peak	33.81	-12.76	21.05	46.00	-24.95
586.78	S	Peak	28.29	-5.15	23.14	46.00	-22.86
2372.00	Н	Average	33.80	2.33	36.13	54.00	-17.87
2372.00	Н	Peak	48.59	2.33	50.92	74.00	-23.08
4824.00	Н	Average	23.83	6.89	30.72	54.00	-23.28
4824.00	Н	Peak	35.78	6.89	42.67	74.00	-31.33
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						

\_\_\_

---



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 75 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	49.63	-13.45	36.18	40.00	-3.82
93.05	S	Peak	39.68	-18.63	21.05	43.50	-22.45
214.30	S	Peak	31.49	-14.82	16.67	43.50	-26.83
251.16	S	Peak	35.57	-12.91	22.66	46.00	-23.34
286.08	S	Peak	30.81	-11.47	19.34	46.00	-26.66
591.63	S	Peak	29.06	-5.16	23.90	46.00	-22.10
4874.00	Н	Average	23.88	6.96	30.84	54.00	-23.16
4874.00	Н	Peak	36.53	6.96	43.49	74.00	-30.51
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 76 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2437 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	35.10	-13.39	21.71	40.00	-18.29
95.96	S	Peak	37.00	-18.29	18.71	43.50	-24.79
133.79	S	Peak	31.83	-13.77	18.06	43.50	-25.44
212.36	S	Peak	38.19	-14.91	23.28	43.50	-20.22
252.13	S	Peak	33.95	-12.88	21.07	46.00	-24.93
312.27	S	Peak	29.29	-10.99	18.30	46.00	-27.70
4874.00	Н	Average	24.07	6.96	31.03	54.00	-22.97
4874.00	Н	Peak	35.78	6.96	42.74	74.00	-31.26
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 77 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	48.01	-13.45	34.56	40.00	-5.44
92.08	S	Peak	39.78	-18.75	21.03	43.50	-22.47
204.60	S	Peak	30.94	-15.13	15.81	43.50	-27.69
250.19	S	Peak	35.96	-12.96	23.00	46.00	-23.00
298.69	S	Peak	29.32	-11.26	18.06	46.00	-27.94
584.84	S	Peak	28.79	-5.17	23.62	46.00	-22.38
4924.00	Н	Average	24.39	7.01	31.40	54.00	-22.60
4924.00	Н	Peak	36.15	7.01	43.16	74.00	-30.84
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						



Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 78 of 86

Operation Band	:802.11 n20M	Test Date	:2014-01-24
Fundamental Frequency	:2462 MHz	Temp./Humi.	:22deg_C/52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Η

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	34.67	-13.45	21.22	40.00	-18.78
90.14	S	Peak	37.24	-18.98	18.26	43.50	-25.24
136.70	S	Peak	30.76	-13.48	17.28	43.50	-26.22
210.42	S	Peak	38.76	-15.01	23.75	43.50	-19.75
255.04	S	Peak	34.32	-12.76	21.56	46.00	-24.44
343.31	S	Peak	30.00	-10.43	19.57	46.00	-26.43
4924.00	Н	Average	24.51	7.01	31.52	54.00	-22.48
4924.00	Н	Peak	35.02	7.01	42.03	74.00	-31.97
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						

# **11 PEAK POWER SPECTRAL DENSITY**

## **11.1 Standard Applicable:**

According to \$15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **11.2 Measurement Equipment Used:**

Refer to section 7.2 for details.

### 11.3 Test Set-up:

Refer to section 7.3 for details. (Spectrum Option)

### 11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW  $\geq$  3 kHz.
- 4. Set the VBW  $\geq$  3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



### **11.5 Measurement Result:**

#### 802.11b

Frequency	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-6.14	8
2437	-6.32	8
2462	-5.28	8

#### 802.11g

Frequency	<b>RF Power Density</b>	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-10.15	8
2437	-9.76	8
2462	-10.46	8

#### 802.11n 20M

Frequency	<b>RF Power Density</b>	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-10.15	8
2437	-8.77	8
2462	-9.91	8


\* Note: Offset 10.7dB for 2.4G 802.11b/g; 2.4G 802.11n\_20

\*Refer to next page for plots




## 802.11b

### **Power Spectral Density Test Plot (CH-Low)**

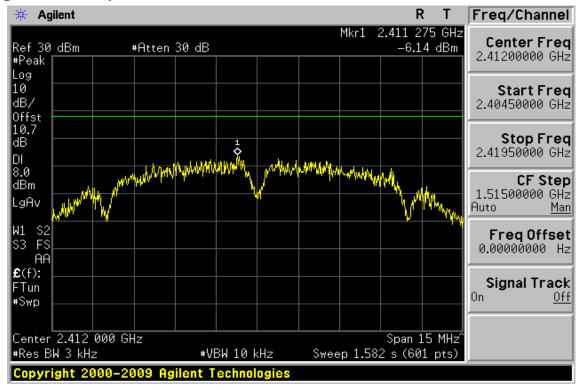


**Power Spectral Density Test Plot (CH-Mid)** 

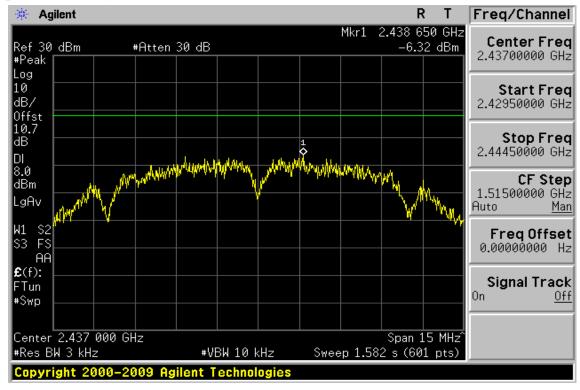

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




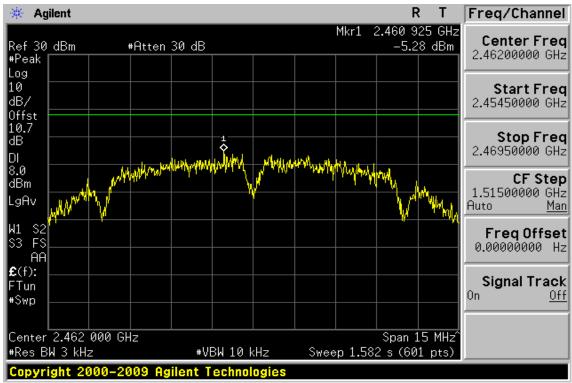


# **Power Spectral Density Test Plot (CH-High)**

## 802.11g

### **Power Spectral Density Test Plot (CH-Low)**

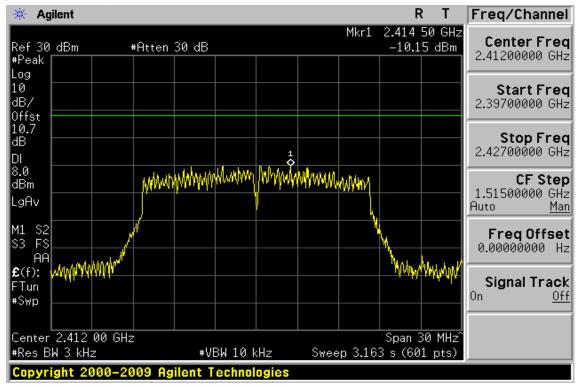


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

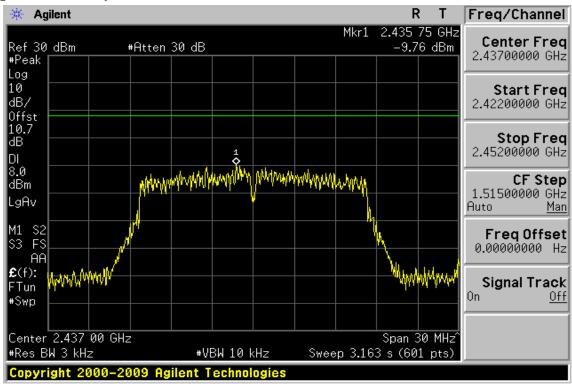

## **Power Spectral Density Test Plot (CH-Mid)**

## **Power Spectral Density Test Plot (CH-High)**

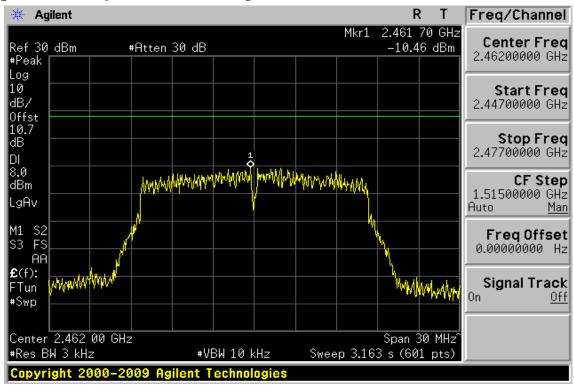


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2014/10056 Issue Date: Feb. 20, 2014 Page: 84 of 86

## 802.11n 20M **Power Spectral Density Test Plot (CH-Low)**

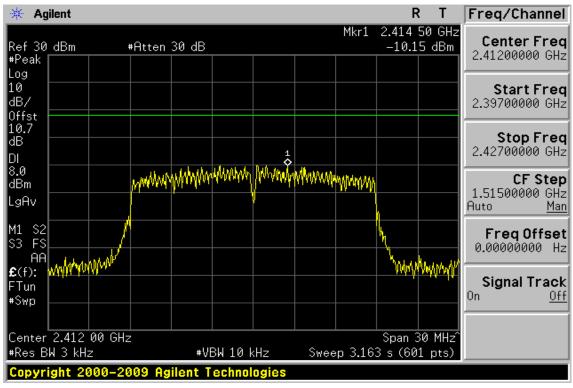


**Power Spectral Density Test Plot (CH-Mid)** 

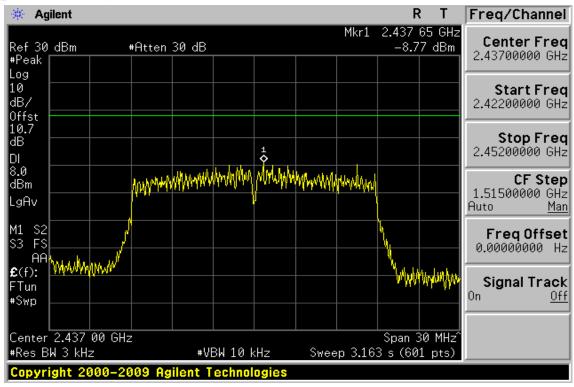

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



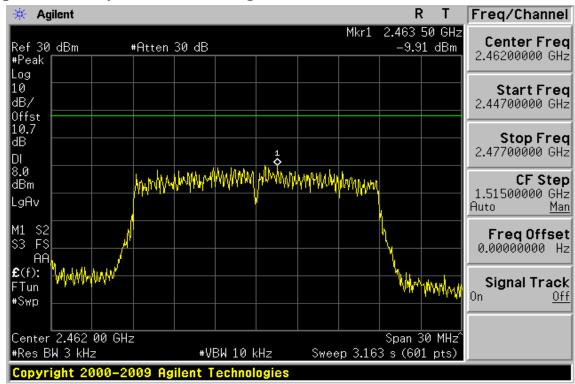

# Power Spectral Density Test Plot (CH-High)



# **12 ANTENNA REQUIREMENT**

## 12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

### **12.2 Antenna Connected Construction:**

The directional gains of antenna used for transmitting is 0.67dBi for 2.4GHz. In addition, the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.