



FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smartphone
MODEL NAME : 0PFH100
FCC ID : NM80PFH100
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 29, 2014 and completely tested on Oct. 02, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....4
SUMMARY OF TEST RESULT5
1 GENERAL DESCRIPTION.....7
1.1 Applicant.....7
1.2 Manufacturer.....7
1.3 Product Feature of Equipment Under Test.....7
1.4 Product Specification subjective to this standard8
1.5 Modification of EUT8
1.6 Emission Designator.....9
1.7 Testing Location10
1.8 Applicable Standards.....11
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....12
2.1 Test Mode.....12
2.2 Connection Diagram of Test System.....14
2.3 Support Unit used in test configuration and system.....15
2.4 Measurement Results Explanation Example.....15
3 CONDUCTED TEST ITEMS16
3.1 Measuring Instruments16
3.2 Test Setup16
3.3 Test Result of Conducted Test.....16
3.4 Conducted Output Power17
3.5 Peak-to-Average Ratio18
3.6 Occupied Bandwidth.....19
3.7 Conducted Band Edge20
3.8 Conducted Spurious Emission22
3.9 Frequency Stability23
4 RADIATED TEST ITEMS24
4.1 Measuring Instruments24
4.2 Test Setup24
4.3 Test Result of Radiated Test.....24
4.4 Radiated Spurious Emission25
4.5 Effective Radiated Power and Effective Isotropic Radiated Power.....26
5 LIST OF MEASURING EQUIPMENT27
6 UNCERTAINTY OF EVALUATION28

APPENDIX A. TEST RESULTS OF CONDUCTED TEST



APPENDIX B. TEST RESULTS OF RADIATED TEST



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.4	§2.1046	RSS-Gen(4.8) RSS-130(4.4) RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4) RSS-199 (4.4)	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	RSS-130(4.4) RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(h)(3) §27.53(m)(6)	RSS-GEN(4.6.1) RSS-132 (3.1) RSS-133 (3.1) RSS-139 (3.1) RSS-199 (4.2)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(f) §27.53(g) §27.53(m)(4)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5.1) RSS-130(4.6) RSS-139 (6.5) RSS-199 (4.5)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 17)(Band 7)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1053 §22.917(a) §24.238(a) §27.53(f) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5.1) RSS-130(4.6) RSS-139 (6.5)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	
	§2.1053 §27.53(m)(4)	RSS-GEN(4.9) RSS-199 (4.5)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		



Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.9	§2.1055 §22.355 §24.235 §27.54	RSS-GEN(4.7) RSS-132(5.3) RSS-133(6.3) RSS-130(4.3) RSS-139 (6.3) RSS-199 (4.3)	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(f) §27.53(g) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5.1) RSS-130(4.6) RSS-139 (6.5)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 4.80 dB at 12504.000 MHz
	§2.1053 §27.53(m)(4)	RSS-GEN(4.9) RSS-199 (4.5)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		
4.5	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	
	§27.50(c)(10)	N/A	Effective Radiated Power (Band 17)	ERP < 3 Watt		
	N/A	RSS-130(4.4)	Equivalent Isotropic Radiated Power (Band 17)	EIRP < 5 Watt		
	§24.232(c) §27.50(h)(2)	RSS-133 (6.4) SRSP-510(5.1.2) RSS-199 (4.4)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt		
	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		



1 General Description

1.1 Applicant

HTC Corporation

No.23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

1.2 Manufacturer

HTC Corporation

No.23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Model Name	OPFH100
FCC ID	NM80PFH100
Sample 1	EUT with Main Camera 1, Speaker(top) 1, Speaker(bottom) 1, Microphone 1, RAM 1, and RF PA 1
Sample 2	EUT with Main Camera 1, Speaker(top) 2, Speaker(bottom) 2, Microphone 2, RAM 2, and RF PA 1
Sample 3	EUT with Main Camera 2, Speaker(top) 2, Speaker(bottom) 2, Microphone 2, RAM 2, and RF PA 2
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 2.4GHz 802.11b/g/n (HT20) WLAN 5GHz 802.11a/n (HT20/HT40) Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 17 : 5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.48 dBm LTE Band 4 : 22.47 dBm LTE Band 5 : 22.48 dBm LTE Band 7 : 22.13 dBm LTE Band 17 : 22.60 dBm
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Emission Designator

LTE Band 2		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
1.4	1M10G7D	-	0.128	1M10W7D	-	0.097	
3	2M72G7D	-	0.127	2M72W7D	-	0.097	
5	4M50G7D	-	0.125	4M51W7D	-	0.095	
10	9M08G7D	0.0101	0.122	9M04W7D	-	0.095	
15	13M5G7D	-	0.122	13M5W7D	-	0.094	
20	18M5G7D	-	0.128	18M6W7D	-	0.096	
LTE Band 4		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
1.4	1M10G7D	-	0.165	1M10W7D	-	0.128	
3	2M74G7D	-	0.167	2M72W7D	-	0.129	
5	4M50G7D	-	0.169	4M50W7D	-	0.129	
10	10M1G7D	0.0102	0.169	10M1W7D	-	0.131	
15	13M5G7D	-	0.162	13M5W7D	-	0.128	
20	18M5G7D	-	0.164	18M5W7D	-	0.124	
LTE Band 5		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
1.4	1M10G7D	-	0.055	1M10W7D	-	0.045	
3	2M72G7D	-	0.056	2M72W7D	-	0.046	
5	4M50G7D	-	0.056	4M51W7D	-	0.044	
10	9M12G7D	0.0132	0.054	9M08W7D	-	0.041	



LTE Band 7		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
5	4M50G7D	-	0.159	4M50W7D	-	0.124	
10	9M08G7D	0.0098	0.159	9M04W7D	-	0.123	
15	13M5G7D	-	0.158	13M5W7D	-	0.125	
20	18M4G7D	-	0.160	18M4W7D	-	0.121	
LTE Band 17		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
5	4M51G7D	-	0.104	4M51W7D	-	0.080	
10	9M10G7D	0.0031	0.091	9M08W7D	-	0.078	

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		IC Registration No.
	TH02-HY	03CH07-HY	4086B-1



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	4	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y	Y	Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	17	-	-	Y	Y	-	-	Y	Y	Y	Y	Y	Y	Y	Y
Peak-to-Average Ratio	2						Y		Y	Y		Y	Y	Y	Y
	4						Y		Y	Y		Y	Y	Y	Y
	5				Y	-	-		Y	Y		Y	Y	Y	Y
	7	-	-				Y		Y	Y		Y	Y	Y	Y
	17	-	-		Y	-	-		Y	Y		Y	Y	Y	Y
26dB and 99% Bandwidth	2	Y	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	4	Y	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y			Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	17	-	-	Y	Y	-	-	Y	Y			Y	Y	Y	Y
Conducted Band Edge	2	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	4	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y		Y	Y		Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	17	-	-	Y	Y	-	-	Y	Y	Y		Y	Y		Y




Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	17	-	-	✓	✓	-	-	✓	✓	✓			✓	✓	✓
Frequency Stability	2	✓			✓			✓				✓		✓	
	4	✓			✓			✓				✓		✓	
	5	✓			✓	-	-	✓				✓		✓	
	7	-	-	✓	✓			✓				✓		✓	
	17	-	-	✓	✓	-	-	✓				✓		✓	
E.R.P/ E.I.R.P.	2	✓					✓	✓	✓	✓			✓	✓	✓
	4	✓					✓	✓	✓	✓			✓	✓	✓
	5	✓			✓	-	-	✓	✓	✓			✓	✓	✓
	7	-	-	✓			✓	✓	✓	✓			✓	✓	✓
	17	-	-	✓	✓	-	-	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓		✓			✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓		✓			✓	✓	✓
	17	-	-	✓	✓	-	-	✓		✓			✓	✓	✓
Note	<ol style="list-style-type: none"> The mark “✓” means that this configuration is chosen for testing The mark “-” means that this bandwidth is not supported. For E.R.P/E.I.R.P. measurement, the widest bandwidth of each band is chosen for testing due to highest conducted power. Besides, the lowest bandwidth of each band is also measured for reporting only. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 														

2.2 Connection Diagram of Test System

<for LTE band 2, 4, 7, 17>

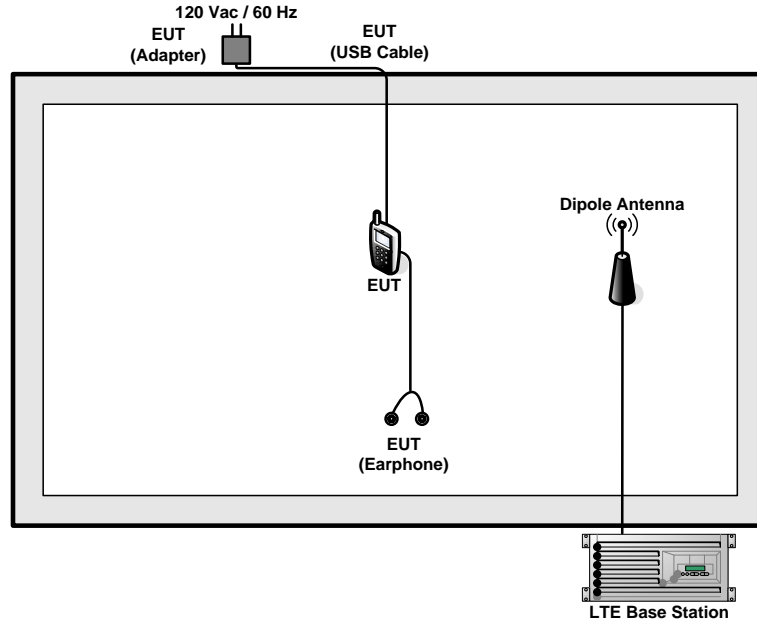

<for LTE band 5>

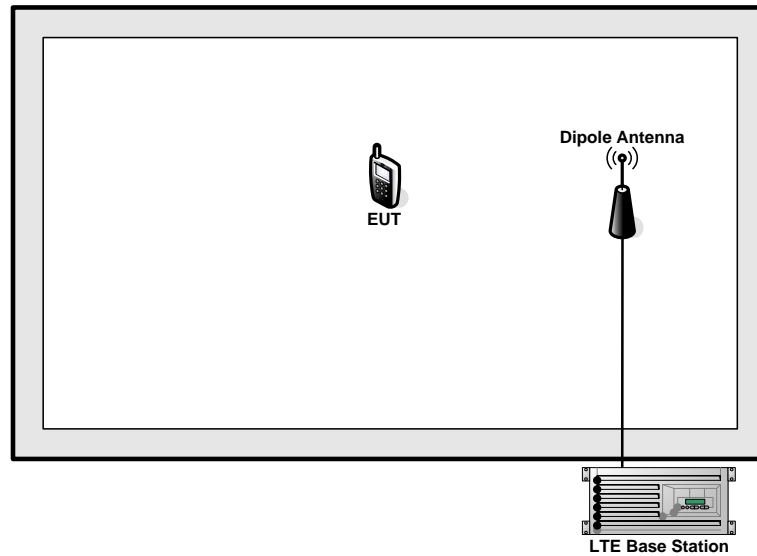



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

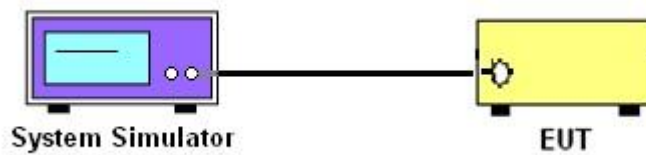

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

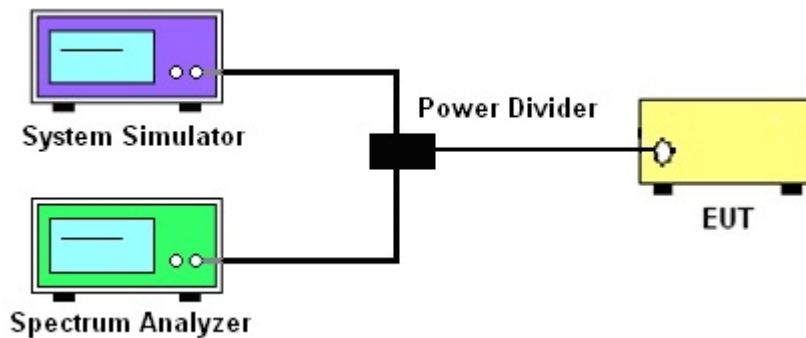

3.2.3 Frequency Stability

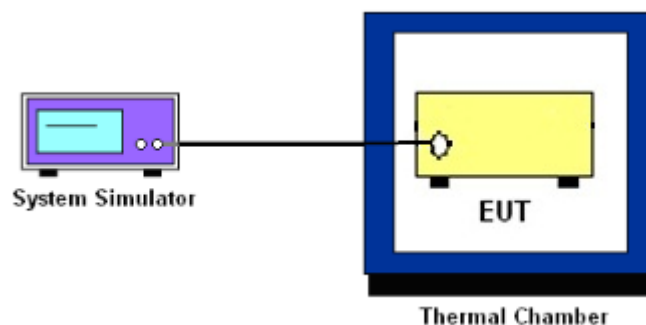

3.3 Test Result of Conducted Test

Please refer to Appendix B.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a) and RSS – 132 For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a) and RSS – 133

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g) and RSS – 130

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h) and RSS – 139

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



27.53 (m)(4) and RSS – 199

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199:

The emissions be operated in the 2496-2690 MHz band, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $55 + 10 \log (P)$ dB at 5.5 megahertz from the channel edges.

3.7.2 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
8. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

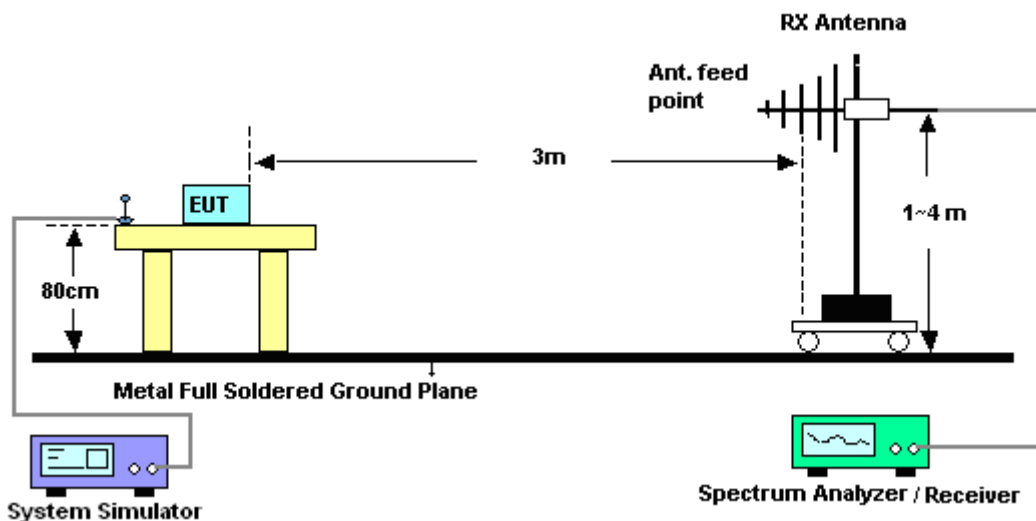

4.2.2 For radiated test above 1GHz

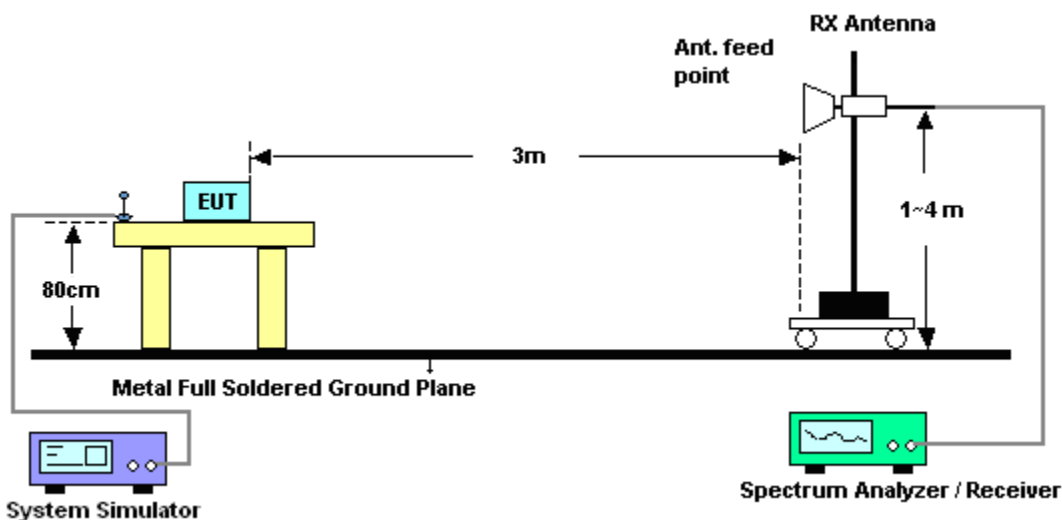

4.3 Test Result of Radiated Test

Please refer to Appendix C.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 12,13,17

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.

For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
12. ERP (dBm) = EIRP - 2.15



4.5 Effective Radiated Power and Effective Isotropic Radiated Power

4.5.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5 and 3 watts with LTE band 17.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 7 and 1 watt with LTE band 4.

4.5.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Aug. 02, 2014~ Aug. 13, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 17, 2014	Aug. 02, 2014~ Aug. 13, 2014	Jul. 16, 2015	Conducted (TH02-HY)
LTE Base Station	Anritsu	MT8820C	6201026480	30MHz~2.7GHz SISO	Jan. 07, 2014	Aug. 02, 2014~ Aug. 13, 2014	Jan. 06, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Aug. 10, 2014~ Aug. 26, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Aug. 10, 2014~ Aug. 26, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Aug. 10, 2014~ Aug. 21, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Aug. 22, 2014~ Aug. 26, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Aug. 10, 2014~ Aug. 26, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Aug. 10, 2014~ Aug. 26, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Aug. 10, 2014~ Aug. 26, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	Aug. 10, 2014~ Aug. 26, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 03, 2013	Aug. 10, 2014~ Aug. 26, 2014	Oct. 02, 2014	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.36	22.32	22.34
1.4	1	2		22.05	22.15	22.12
1.4	1	5		22.11	22.04	22.17
1.4	3	0		21.77	21.66	21.72
1.4	3	1		21.67	21.70	21.71
1.4	3	2		21.68	21.63	21.74
1.4	6	0		21.80	21.67	21.71
1.4	1	0	16-QAM	21.83	21.95	21.94
1.4	1	2		21.74	21.70	21.82
1.4	1	5		21.77	21.72	21.93
1.4	3	0		20.70	20.65	20.71
1.4	3	1		20.69	20.63	20.71
1.4	3	2		20.69	20.70	20.64
1.4	6	0		20.68	20.63	20.69
3	1	0	QPSK	22.35	22.32	22.39
3	1	7		22.14	22.21	22.10
3	1	14		22.19	22.07	22.22
3	8	0		21.83	21.62	21.62
3	8	4		21.76	21.67	21.64
3	8	7		21.76	21.62	21.62
3	15	0		21.81	21.69	21.69
3	1	0	16-QAM	21.83	21.96	21.92
3	1	7		21.70	21.77	21.78
3	1	14		21.80	21.75	21.91
3	8	0		20.73	20.61	20.68
3	8	4		20.72	20.65	20.67
3	8	7		20.73	20.70	20.69
3	15	0		20.69	20.58	20.71



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.30	22.31	22.41
5	1	12		22.13	22.20	22.31
5	1	24		22.18	22.16	22.31
5	12	0		21.72	21.59	21.71
5	12	6		21.67	21.62	21.79
5	12	11		21.71	21.56	21.70
5	25	0		21.72	21.67	21.73
5	1	0	16-QAM	21.93	21.38	21.58
5	1	12		21.76	21.35	21.39
5	1	24		21.90	21.27	21.55
5	12	0		20.66	20.66	20.76
5	12	6		20.61	20.70	20.84
5	12	11		20.66	20.76	20.78
5	25	0		20.60	20.75	20.81
10	1	0	QPSK	22.35	22.26	22.38
10	1	24		22.12	22.03	22.18
10	1	49		22.06	21.99	22.20
10	25	0		21.69	21.63	21.73
10	25	12		21.64	21.60	21.76
10	25	24		21.74	21.59	21.79
10	50	0		21.74	21.63	21.70
10	1	0	16-QAM	21.65	21.56	21.95
10	1	24		21.52	21.49	21.93
10	1	49		21.62	21.53	21.84
10	25	0		20.68	20.69	20.79
10	25	12		20.74	20.71	20.82
10	25	24		20.69	20.69	20.73
10	50	0		20.78	20.67	20.68



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.36	22.36	22.41
15	1	37		22.22	22.18	22.20
15	1	74		22.16	22.10	22.25
15	36	0		21.73	21.59	21.62
15	36	18		21.71	21.68	21.80
15	36	37		21.70	21.65	21.66
15	75	0		21.74	21.66	21.74
15	1	0	16-QAM	21.63	21.58	21.82
15	1	37		21.62	21.44	21.80
15	1	74		21.58	21.57	21.81
15	36	0		20.67	20.62	20.63
15	36	18		20.69	20.60	20.64
15	36	37		20.59	20.59	20.62
15	75	0		20.78	20.78	20.74
20	1	0	QPSK	22.42	22.40	22.48
20	1	49		22.15	22.18	22.21
20	1	99		22.19	22.08	22.25
20	50	0		21.83	21.71	21.72
20	50	24		21.76	21.72	21.71
20	50	49		21.78	21.71	21.69
20	100	0		21.83	21.69	21.74
20	1	0	16-QAM	21.86	21.96	21.98
20	1	49		21.74	21.77	21.83
20	1	99		21.80	21.75	21.95
20	50	0		20.78	20.71	20.73
20	50	24		20.72	20.73	20.73
20	50	49		20.77	20.71	20.73
20	100	0		20.73	20.65	20.71



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.34	22.43	22.39
1.4	1	2		22.32	22.39	22.37
1.4	1	5		22.30	22.37	22.38
1.4	3	0		22.33	22.41	22.35
1.4	3	1		22.32	22.40	22.36
1.4	3	2		22.33	22.39	22.36
1.4	6	0		21.32	21.54	21.54
1.4	1	0	16-QAM	21.37	21.52	21.47
1.4	1	2		21.24	21.16	21.00
1.4	1	5		21.18	21.05	21.17
1.4	3	0		21.32	21.44	21.45
1.4	3	1		21.31	21.48	21.43
1.4	3	2		21.34	21.43	21.43
1.4	6	0		20.30	20.29	20.24
3	1	0	QPSK	22.11	22.28	22.30
3	1	7		22.08	22.22	22.16
3	1	14		22.06	22.12	22.11
3	8	0		21.67	21.79	21.84
3	8	4		21.62	21.72	21.68
3	8	7		21.72	21.71	21.66
3	15	0		21.83	21.78	21.72
3	1	0	16-QAM	21.55	21.84	21.98
3	1	7		21.40	21.83	21.75
3	1	14		21.54	21.73	21.77
3	8	0		20.68	20.75	20.79
3	8	4		20.66	20.68	20.75
3	8	7		20.66	20.75	20.68
3	15	0		20.76	20.74	20.68



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.00	22.02	22.10
5	1	12		21.98	21.86	21.96
5	1	24		21.95	21.98	22.06
5	12	0		21.36	21.48	21.47
5	12	6		21.45	21.46	21.43
5	12	11		21.45	21.51	21.40
5	25	0		21.45	21.48	21.43
5	1	0	16-QAM	21.17	21.01	21.12
5	1	12		21.16	21.00	20.93
5	1	24		21.12	20.92	21.10
5	12	0		20.44	20.62	20.54
5	12	6		20.64	20.61	20.50
5	12	11		20.54	20.45	20.54
5	25	0		20.48	20.48	20.48
10	1	0	QPSK	21.89	21.97	21.85
10	1	24		21.86	21.94	21.84
10	1	49		21.88	21.95	21.71
10	25	0		21.48	21.50	21.46
10	25	12		21.45	21.50	21.48
10	25	24		21.37	21.51	21.46
10	50	0		21.46	21.48	21.46
10	1	0	16-QAM	21.26	21.43	21.40
10	1	24		21.18	21.33	21.38
10	1	49		21.24	21.41	21.26
10	25	0		20.61	20.60	20.55
10	25	12		20.55	20.62	20.52
10	25	24		20.54	20.59	20.51
10	50	0		20.54	20.49	20.50



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.13	22.15	22.24
15	1	37		21.96	22.04	21.96
15	1	74		21.94	21.90	22.00
15	36	0		21.43	21.55	21.46
15	36	18		21.41	21.50	21.41
15	36	37		21.32	21.52	21.47
15	75	0		21.44	21.56	21.54
15	1	0	16-QAM	21.60	21.57	21.48
15	1	37		21.40	21.53	21.47
15	1	74		21.58	21.51	21.37
15	36	0		20.55	20.52	20.56
15	36	18		20.41	20.48	20.42
15	36	37		20.38	20.50	20.40
15	75	0		20.47	20.54	20.54
20	1	0	QPSK	22.26	22.44	22.47
20	1	49		22.21	22.38	22.32
20	1	99		22.20	22.32	22.22
20	50	0		21.13	21.99	21.22
20	50	24		21.25	21.92	21.20
20	50	49		21.26	21.91	21.26
20	100	0		21.32	21.98	21.24
20	1	0	16-QAM	21.41	22.00	21.20
20	1	49		21.35	21.98	21.18
20	1	99		21.38	21.93	21.16
20	50	0		20.24	20.95	20.39
20	50	24		20.37	20.88	20.40
20	50	49		20.36	20.95	20.43
20	100	0		20.23	20.94	20.37



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.47	22.42	22.41
1.4	1	2		22.35	22.36	22.40
1.4	1	5		22.44	22.22	22.35
1.4	3	0		21.82	21.75	21.75
1.4	3	1		21.80	21.74	21.74
1.4	3	2		21.78	21.73	21.73
1.4	6	0		21.37	21.46	21.45
1.4	1	0	16-QAM	21.50	21.36	21.48
1.4	1	2		21.43	21.35	21.42
1.4	1	5		21.42	21.21	21.43
1.4	3	0		20.80	20.72	20.72
1.4	3	1		20.77	20.75	20.71
1.4	3	2		20.77	20.73	20.73
1.4	6	0		20.40	20.30	20.39
3	1	0	QPSK	22.43	22.39	22.42
3	1	7		22.30	22.29	22.41
3	1	14		22.40	22.30	22.31
3	8	0		21.48	21.36	21.36
3	8	4		21.53	21.38	21.39
3	8	7		21.46	21.39	21.54
3	15	0		21.45	21.49	21.50
3	1	0	16-QAM	21.51	21.33	21.45
3	1	7		21.49	21.32	21.44
3	1	14		21.50	21.18	21.40
3	8	0		20.43	20.78	20.73
3	8	4		20.48	20.72	20.76
3	8	7		20.43	20.72	20.78
3	15	0		20.45	20.30	20.44



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.46	22.41	22.45
5	1	12		22.31	22.33	22.37
5	1	24		22.40	22.32	22.29
5	12	0		21.47	21.44	21.38
5	12	6		21.50	21.47	21.44
5	12	11		21.36	21.42	21.49
5	25	0		21.44	21.44	21.46
5	1	0	16-QAM	21.43	21.37	21.42
5	1	12		21.47	21.31	21.38
5	1	24		21.49	21.25	21.41
5	12	0		20.41	20.78	20.77
5	12	6		20.52	20.77	20.75
5	12	11		20.43	20.76	20.75
5	25	0		20.43	20.24	20.36
10	1	0	QPSK	22.48	22.43	22.47
10	1	24		22.37	22.37	22.46
10	1	49		22.46	22.32	22.36
10	25	0		21.51	21.45	21.46
10	25	12		21.53	21.47	21.47
10	25	24		21.46	21.44	21.55
10	50	0		21.47	21.53	21.50
10	1	0	16-QAM	21.53	21.38	21.48
10	1	24		21.50	21.37	21.46
10	1	49		21.52	21.26	21.47
10	25	0		20.46	20.73	20.77
10	25	12		20.52	20.73	20.77
10	25	24		20.43	20.74	20.78
10	50	0		20.46	20.33	20.46



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.61	21.86	21.76
5	1	12		21.55	21.79	21.60
5	1	24		21.58	21.79	21.59
5	12	0		20.30	20.77	20.54
5	12	6		20.45	20.63	20.54
5	12	11		20.55	20.71	20.57
5	25	0		20.48	20.71	20.52
5	1	0	16-QAM	20.79	21.03	20.82
5	1	12		20.73	21.02	20.72
5	1	24		20.77	20.99	20.81
5	12	0		19.35	19.65	19.60
5	12	6		19.49	19.68	19.53
5	12	11		19.61	19.76	19.67
5	25	0		19.59	19.83	19.68
10	1	0	QPSK	21.78	21.95	21.64
10	1	24		21.62	21.88	21.49
10	1	49		21.76	21.69	21.62
10	25	0		20.48	20.78	20.55
10	25	12		20.55	20.72	20.61
10	25	24		20.62	20.85	20.55
10	50	0		20.65	20.80	20.52
10	1	0	16-QAM	20.93	21.07	20.74
10	1	24		20.74	20.96	20.70
10	1	49		20.92	20.67	20.72
10	25	0		19.67	19.87	19.67
10	25	12		19.71	19.91	19.74
10	25	24		19.71	19.97	19.69
10	50	0		19.54	19.89	19.65



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.97	21.87	21.66
15	1	37		21.69	21.80	21.55
15	1	74		21.93	21.71	21.65
15	36	0		20.61	20.85	20.55
15	36	18		20.62	20.80	20.58
15	36	37		20.85	20.76	20.58
15	75	0		20.67	20.83	20.57
15	1	0	16-QAM	21.12	20.98	20.84
15	1	37		20.70	20.60	20.70
15	1	74		21.11	20.73	20.83
15	36	0		19.54	19.77	19.58
15	36	18		19.68	19.83	19.54
15	36	37		19.82	19.79	19.58
15	75	0		19.64	19.86	19.54
20	1	0	QPSK	22.13	21.88	21.67
20	1	49		21.73	21.79	21.61
20	1	99		21.78	21.70	21.65
20	50	0		20.61	20.87	20.58
20	50	24		20.89	20.85	20.54
20	50	49		20.92	20.90	20.57
20	100	0		20.75	20.81	20.63
20	1	0	16-QAM	20.69	20.76	20.42
20	1	49		20.48	20.50	20.35
20	1	99		20.63	20.57	20.41
20	50	0		19.60	19.99	19.58
20	50	24		19.88	19.88	19.59
20	50	49		19.93	19.75	19.62
20	100	0		19.76	19.84	19.68



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.53	22.53	22.38
5	1	12		22.24	22.38	22.31
5	1	24		22.42	22.06	22.34
5	12	0		21.33	21.39	21.32
5	12	6		21.38	21.35	21.57
5	12	11		21.43	21.34	21.56
5	25	0		21.37	21.35	21.26
5	1	0	16-QAM	21.26	21.25	21.34
5	1	12		21.10	21.06	21.07
5	1	24		21.13	21.18	21.09
5	12	0		20.41	20.33	20.44
5	12	6		20.45	20.45	20.39
5	12	11		20.59	20.51	20.38
5	25	0		20.47	20.48	20.40
10	1	0	QPSK	22.50	22.36	22.60
10	1	24		22.36	22.31	22.19
10	1	49		22.41	22.19	22.33
10	25	0		21.34	21.53	21.38
10	25	12		21.41	21.35	21.35
10	25	24		21.41	21.39	21.31
10	50	0		21.41	21.44	21.40
10	1	0	16-QAM	21.56	21.61	21.49
10	1	24		21.33	21.19	21.44
10	1	49		21.41	21.39	21.36
10	25	0		20.36	20.39	20.28
10	25	12		20.29	20.45	20.38
10	25	24		20.45	20.45	20.37
10	50	0		20.57	20.46	20.40




Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	4.94	5.99	PASS
Middle CH	5.29	6.35	
Highest CH	5.83	6.22	
Mode	LTE Band 4 / 20MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	5.38	6.03	PASS
Middle CH	5.83	6.31	
Highest CH	5.99	6.06	
Mode	LTE Band 5 / 10MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	5.83	6.57	PASS
Middle CH	6.76	6.15	
Highest CH	5.22	6.41	
Mode	LTE Band 7 / 20MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	6.25	6.15	PASS
Middle CH	6.09	6.28	
Highest CH	5.77	6.06	
Mode	LTE Band 17 / 10MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	5.22	5.96	PASS
Middle CH	5.32	5.99	
Highest CH	5.32	6.03	



LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB

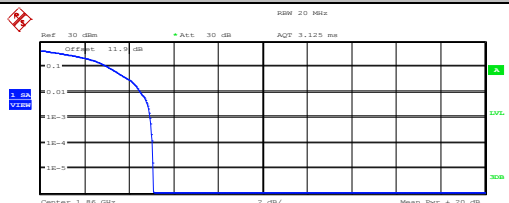


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.47 dBm
Peak 26.54 dBm
Crest 5.06 dB
10 % 3.01 dB
1 % 4.49 dB
.1 % 4.94 dB
.01 % 5.03 dB

Date: 2.AUG.2014 12:33:25

Lowest Channel / Full RB

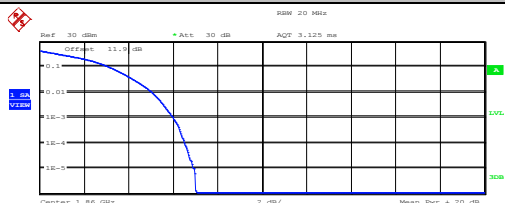


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.14 dBm
Peak 28.16 dBm
Crest 7.02 dB
10 % 3.11 dB
1 % 5.03 dB
.1 % 5.99 dB
.01 % 6.51 dB

Date: 2.AUG.2014 12:33:51

Middle Channel / 1RB

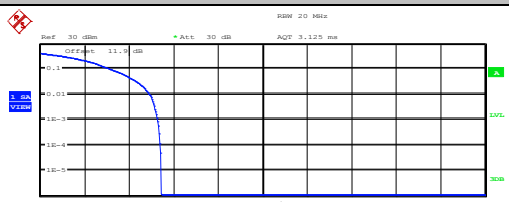


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.53 dBm
Peak 26.96 dBm
Crest 5.43 dB
10 % 3.14 dB
1 % 4.90 dB
.1 % 5.29 dB
.01 % 5.38 dB

Date: 2.AUG.2014 12:34:25

Middle Channel / Full RB

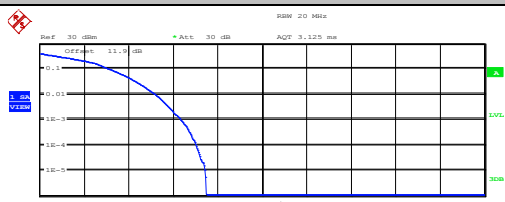


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.02 dBm
Peak 28.51 dBm
Crest 7.49 dB
10 % 3.14 dB
1 % 5.16 dB
.1 % 6.35 dB
.01 % 7.02 dB

Date: 2.AUG.2014 12:34:46

Highest Channel / 1RB

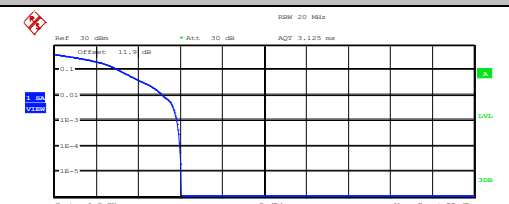


Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.41 dBm
Peak 27.44 dBm
Crest 6.03 dB
10 % 3.08 dB
1 % 5.13 dB
.1 % 5.83 dB
.01 % 5.96 dB

Date: 2.AUG.2014 12:35:14

Highest Channel / Full RB

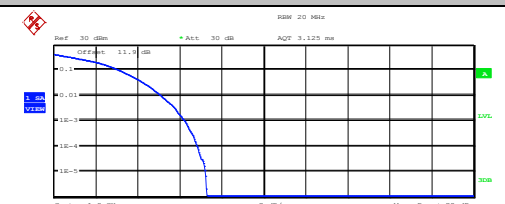

Complementary Cumulative Distribution Function
NOF samples: 100000, Usable BW: 23.7MHz


Trace 1
Mean 21.01 dBm
Peak 28.28 dBm
Crest 7.28 dB
10 % 3.11 dB
1 % 5.06 dB
.1 % 6.22 dB
.01 % 6.83 dB

Date: 2.AUG.2014 12:35:36



LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

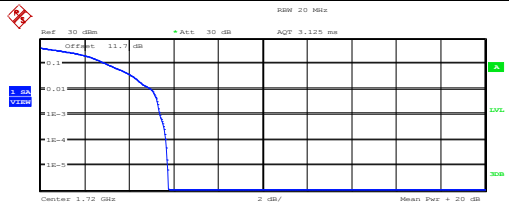

Center: 1.732 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.96 dBm
Peak 26.71 dBm
Crest 5.75 dB
10 % 2.95 dB
1 % 4.97 dB
.1 % 5.38 dB
.01 % 5.64 dB

Date: 2.AUG.2014 14:09:23

Lowest Channel / Full RB

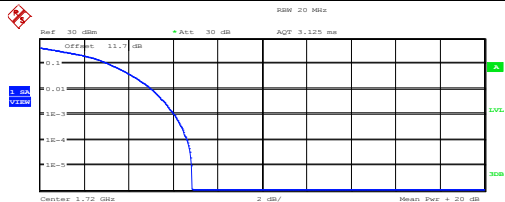

Center: 1.732 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.49 dBm
Peak 27.34 dBm
Crest 6.85 dB
10 % 3.08 dB
1 % 5.00 dB
.1 % 6.03 dB
.01 % 6.60 dB

Date: 2.AUG.2014 14:09:42

Middle Channel / 1RB

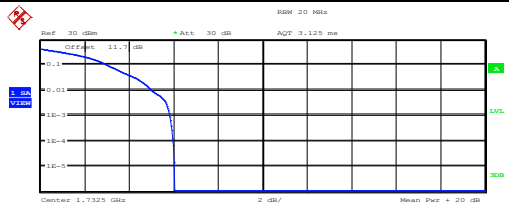

Center: 1.7325 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.63 dBm
Peak 26.66 dBm
Crest 6.02 dB
10 % 3.01 dB
1 % 5.00 dB
.1 % 5.83 dB
.01 % 5.96 dB

Date: 2.AUG.2014 14:10:05

Middle Channel / Full RB

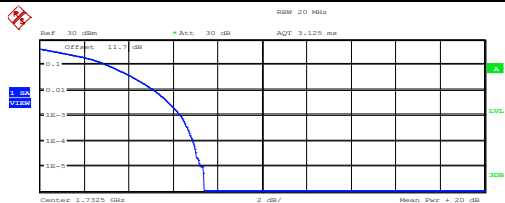

Center: 1.7325 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.53 dBm
Peak 27.93 dBm
Crest 7.40 dB
10 % 3.01 dB
1 % 5.13 dB
.1 % 6.31 dB
.01 % 6.89 dB

Date: 2.AUG.2014 14:10:48

Highest Channel / 1RB

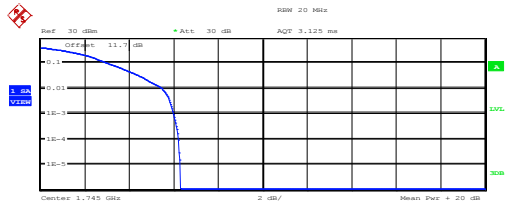

Center: 1.745 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.25 dBm
Peak 27.56 dBm
Crest 6.31 dB
10 % 3.04 dB
1 % 5.45 dB
.1 % 5.99 dB
.01 % 6.22 dB

Date: 2.AUG.2014 14:11:10

Highest Channel / Full RB

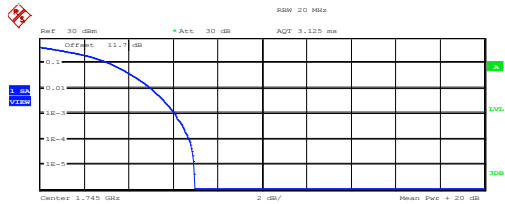

Center: 1.745 GHz 2 dB/ Mean Pwr: +20 dB

Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz


Trace 1
Mean 20.46 dBm
Peak 27.41 dBm
Crest 6.96 dB
10 % 3.11 dB
1 % 4.97 dB
.1 % 6.06 dB
.01 % 6.70 dB

Date: 2.AUG.2014 14:11:21



LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

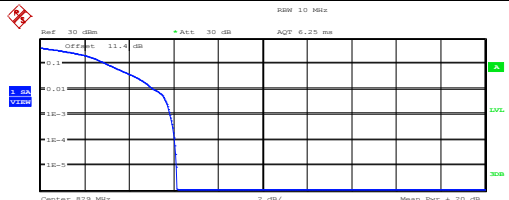


Center: 829 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 21.46 dBm Peak: 27.58 dBm Crest: 6.13 dB

10%: 2.98 dB, 1%: 5.06 dB, .1%: 5.83 dB, .01%: 6.03 dB

Date: 2.AUG.2014 15:39:52

Lowest Channel / Full RB

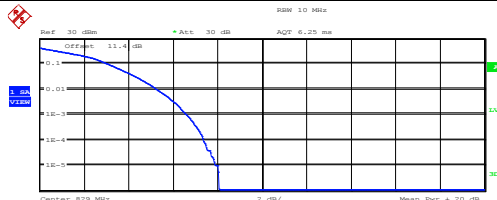


Center: 829 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 20.78 dBm Peak: 28.85 dBm Crest: 8.07 dB

10%: 3.04 dB, 1%: 5.26 dB, .1%: 6.57 dB, .01%: 7.34 dB

Date: 2.AUG.2014 15:40:13

Middle Channel / 1RB

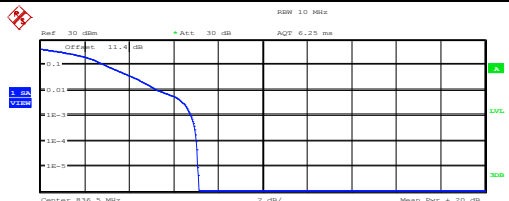


Center: 836.5 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 21.61 dBm Peak: 28.74 dBm Crest: 7.13 dB

10%: 2.88 dB, 1%: 5.29 dB, .1%: 6.76 dB, .01%: 7.02 dB

Date: 2.AUG.2014 15:40:40

Middle Channel / Full RB

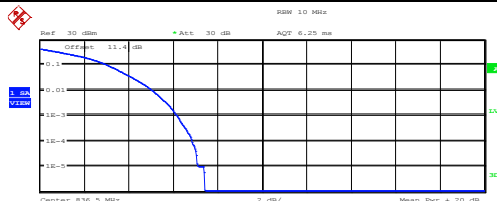


Center: 836.5 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 20.74 dBm Peak: 28.17 dBm Crest: 7.43 dB

10%: 3.01 dB, 1%: 5.03 dB, .1%: 6.15 dB, .01%: 6.83 dB

Date: 2.AUG.2014 15:40:58

Highest Channel / 1RB

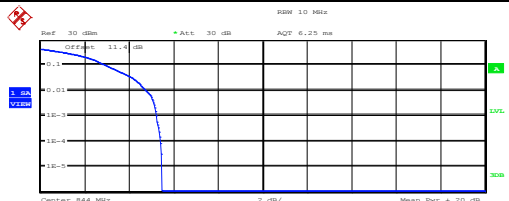


Center: 844 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 21.41 dBm Peak: 26.87 dBm Crest: 5.46 dB

10%: 2.92 dB, 1%: 4.74 dB, .1%: 5.22 dB, .01%: 5.42 dB

Date: 2.AUG.2014 15:41:16

Highest Channel / Full RB

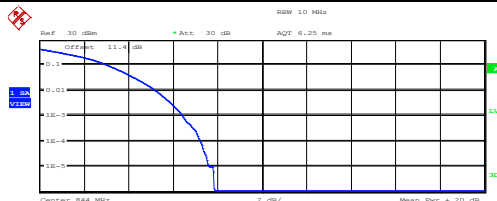

Center: 844 MHz 2 dB/ Mean: Pwr + 20 dB

Trace 1 Mean: 20.85 dBm Peak: 28.70 dBm Crest: 7.85 dB


10%: 3.04 dB, 1%: 5.19 dB, .1%: 6.41 dB, .01%: 7.21 dB

Date: 2.AUG.2014 15:41:25



LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB

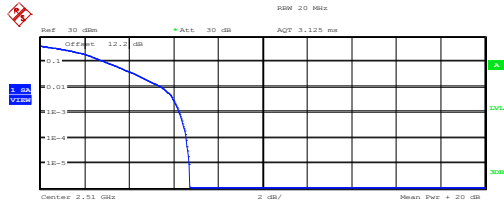

Center: 2.53 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.82 dBm
Peak 27.54 dBm
Crest 6.72 dB
10 % 2.92 dB
1 % 5.45 dB
.1 % 6.25 dB
.01 % 6.57 dB

Date: 2.AUG.2014 16:48:26

Lowest Channel / Full RB

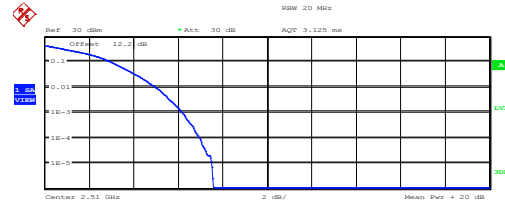

Center: 2.53 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.18 dBm
Peak 27.75 dBm
Crest 7.57 dB
10 % 2.95 dB
1 % 4.97 dB
.1 % 6.15 dB
.01 % 6.96 dB

Date: 2.AUG.2014 16:49:13

Middle Channel / 1RB

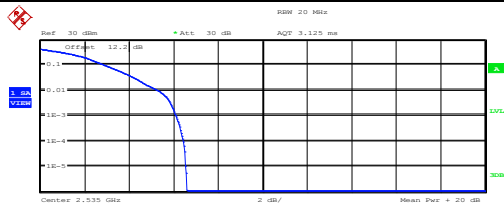

Center: 2.535 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 21.27 dBm
Peak 27.87 dBm
Crest 6.60 dB
10 % 2.88 dB
1 % 5.26 dB
.1 % 6.09 dB
.01 % 6.44 dB

Date: 2.AUG.2014 16:49:49

Middle Channel / Full RB

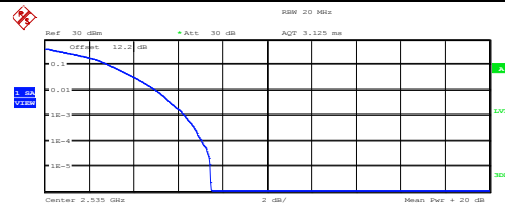

Center: 2.535 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.19 dBm
Peak 27.66 dBm
Crest 7.46 dB
10 % 2.88 dB
1 % 4.97 dB
.1 % 6.28 dB
.01 % 7.05 dB

Date: 2.AUG.2014 16:50:17

Highest Channel / 1RB

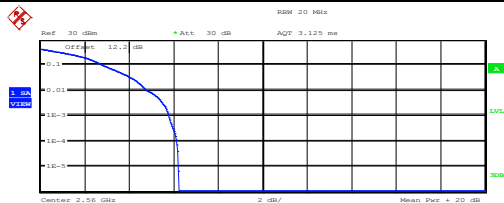

Center: 2.56 GHz 2 dB/ Mean Pwr: +20 dB


Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz

Trace 1
Mean 20.89 dBm
Peak 27.11 dBm
Crest 6.21 dB
10 % 2.82 dB
1 % 4.81 dB
.1 % 5.77 dB
.01 % 6.12 dB

Date: 2.AUG.2014 16:50:44

Highest Channel / Full RB

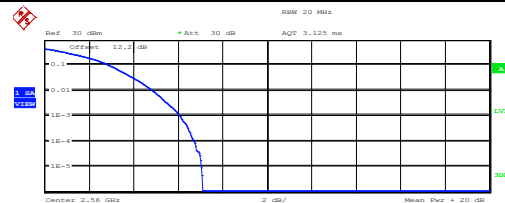

Center: 2.56 GHz 2 dB/ Mean Pwr: +20 dB

Complementary Cumulative Distribution Function

NOF samples: 100000, Usable BW: 23.7MHz


Trace 1
Mean 20.07 dBm
Peak 27.18 dBm
Crest 7.10 dB
10 % 2.88 dB
1 % 4.84 dB
.1 % 6.06 dB
.01 % 6.70 dB

Date: 2.AUG.2014 16:51:07




LTE Band 17 / 10MHz / 16QAM

Lowest Channel / 1RB

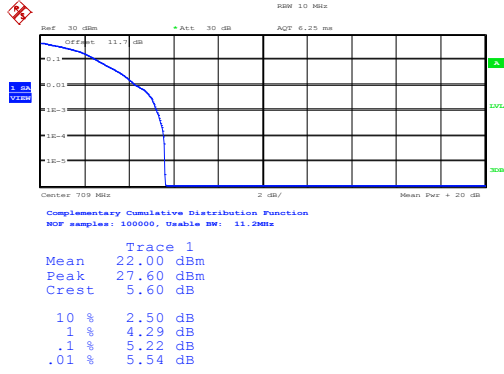


Date: 2.AUG.2014 10:51:02

Lowest Channel / Full RB

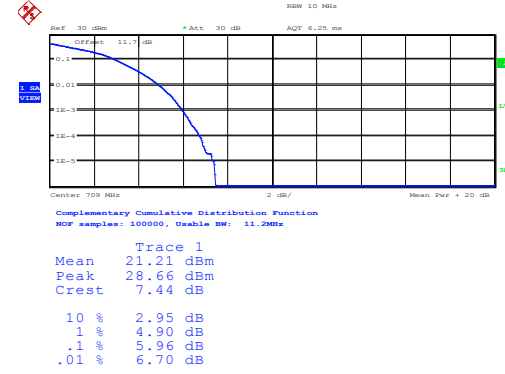


Date: 2.AUG.2014 10:51:22

Middle Channel / 1RB

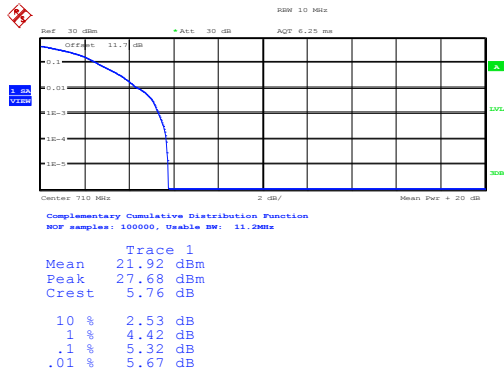


Date: 2.AUG.2014 10:52:01

Middle Channel / Full RB

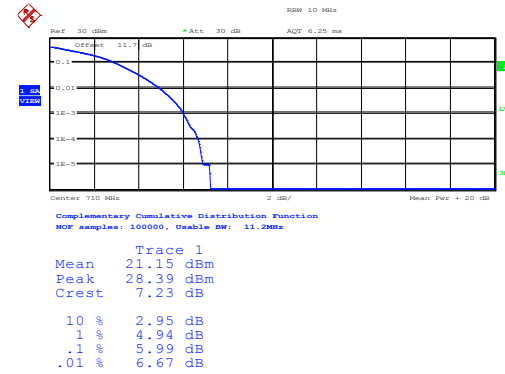


Date: 2.AUG.2014 10:52:28

Highest Channel / 1RB

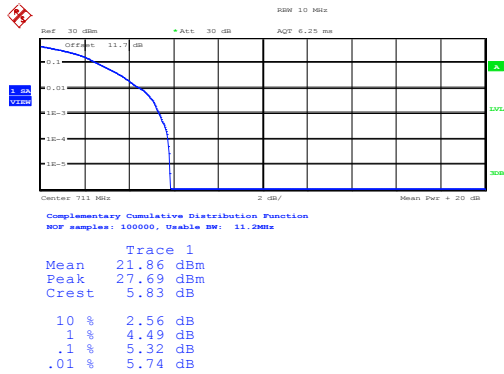

Date: 2.AUG.2014 10:52:47

Highest Channel / Full RB

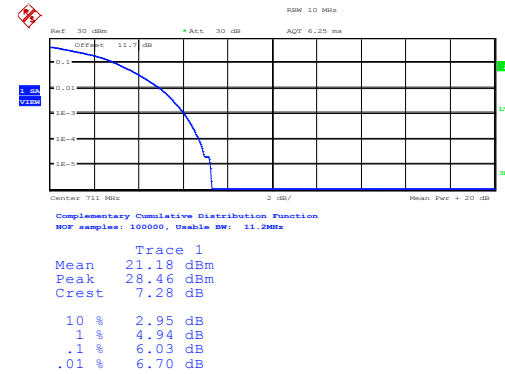

Date: 2.AUG.2014 10:53:09




26dB Bandwidth

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.27	3.02	3.03	4.95	4.96	9.94	10.08	14.76	14.76	20.96	20.88
Middle CH	1.29	1.29	3.01	3.03	4.99	4.98	10.06	10.02	14.67	14.79	21	20.92
Highest CH	1.29	1.28	3.03	3.04	4.96	4.9	9.98	10	14.73	14.7	20.88	20.88
Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.25	1.27	3.05	3.01	4.94	4.93	10.1	10.02	14.58	14.7	20.84	20.8
Middle CH	1.27	1.28	3.01	3.02	5	4.98	10.02	10.06	14.73	14.67	20.92	20.88
Highest CH	1.28	1.29	3.03	3.05	4.93	4.97	10.04	10	14.58	14.64	20.68	20.6
Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.29	1.29	3.03	3.04	4.96	4.97	10.12	10.1	-	-	-	-
Middle CH	1.28	1.28	3	3.03	4.9	4.87	9.98	9.98	-	-	-	-
Highest CH	1.29	1.28	3.04	3.02	4.98	4.9	9.94	10	-	-	-	-
Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.97	4.92	10	10.02	14.7	14.76	20.88	20.84
Middle CH	-	-	-	-	4.94	4.94	10.02	9.98	14.64	14.82	20.96	20.84
Highest CH	-	-	-	-	4.98	4.93	10.04	10.08	14.73	14.64	20.76	20.72
Mode	LTE Band 17 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.95	4.92	10	10	-	-	-	-
Middle CH	-	-	-	-	4.98	4.97	10.06	10.04	-	-	-	-
Highest CH	-	-	-	-	4.96	5	10.16	10.1	-	-	-	-




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

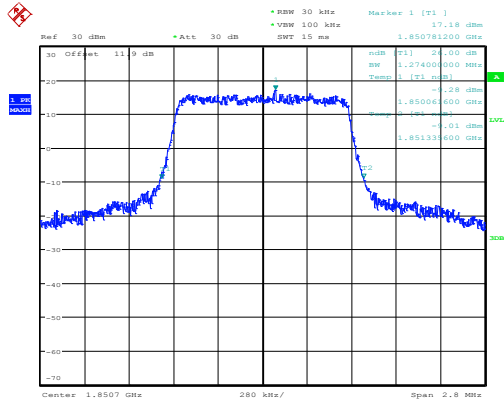


Date: 2.AUG.2014 11:03:23

Lowest Channel / 1.4MHz / 16QAM

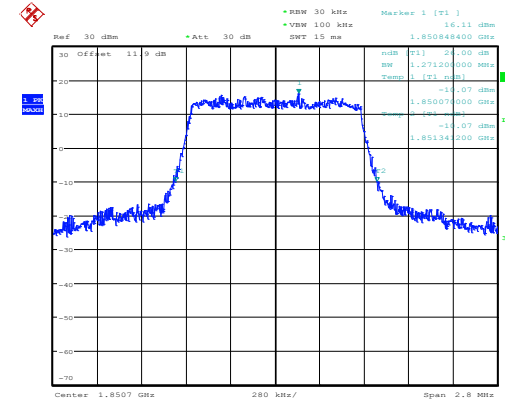


Date: 2.AUG.2014 11:03:39

Middle Channel / 1.4MHz / QPSK

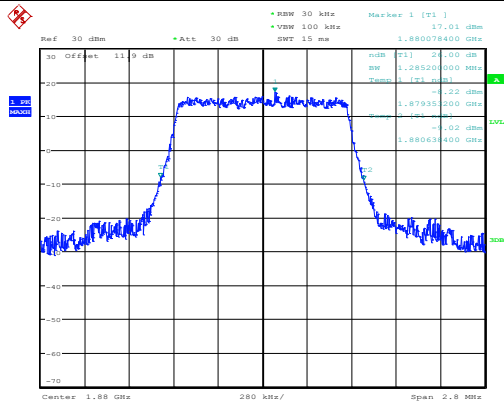


Date: 2.AUG.2014 11:09:19

Middle Channel / 1.4MHz / 16QAM

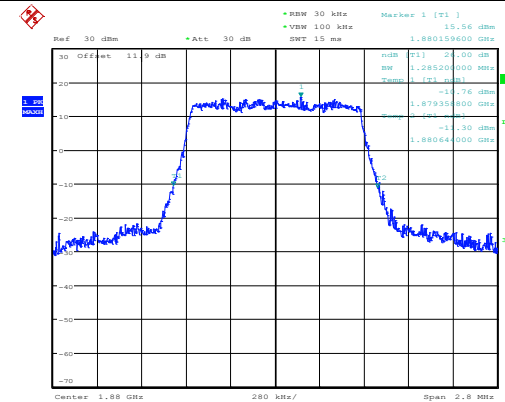


Date: 2.AUG.2014 11:09:35

Highest Channel / 1.4MHz / QPSK

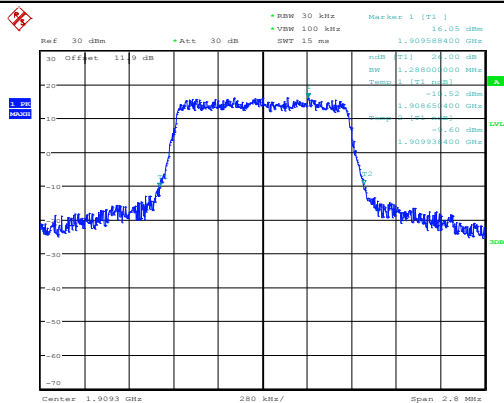

Date: 2.AUG.2014 11:12:15

Highest Channel / 1.4MHz / 16QAM

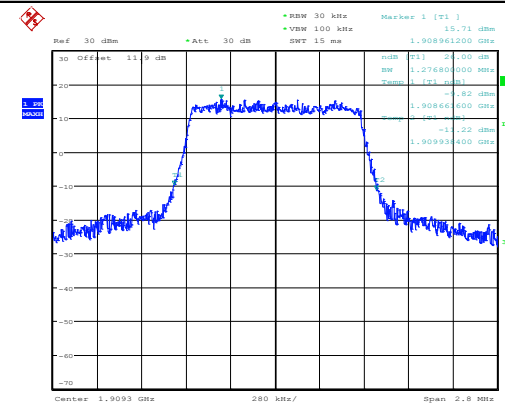


Date: 2.AUG.2014 11:12:31




LTE Band 2

Lowest Channel / 3MHz / QPSK

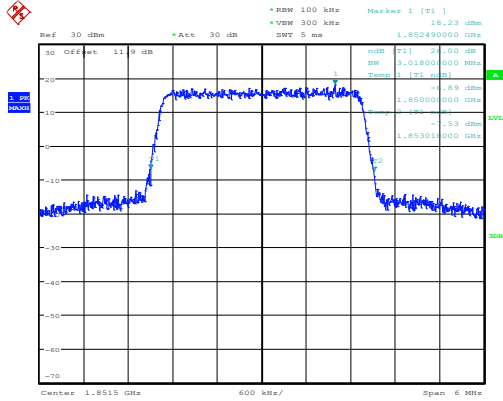


Date: 2.AUG.2014 11:19:13

Lowest Channel / 3MHz / 16QAM

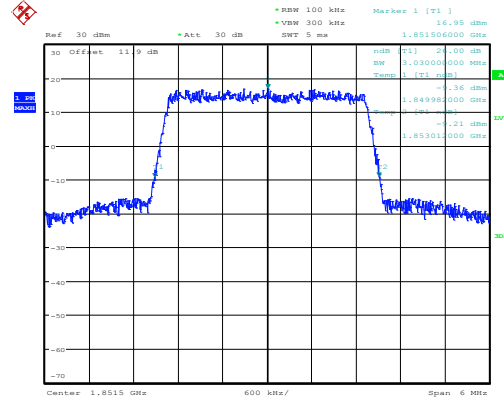


Date: 2.AUG.2014 11:19:29

Middle Channel / 3MHz / QPSK

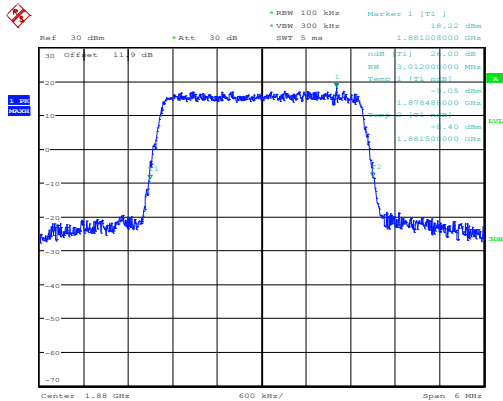


Date: 2.AUG.2014 11:25:10

Middle Channel / 3MHz / 16QAM

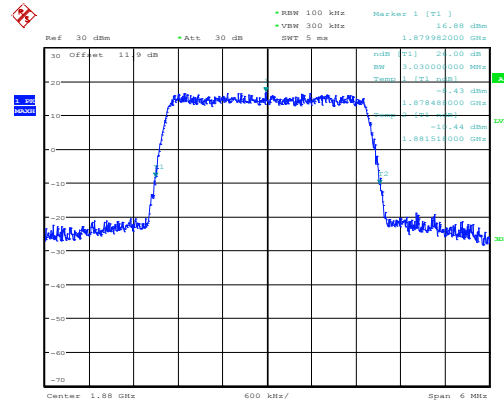


Date: 2.AUG.2014 11:25:26

Highest Channel / 3MHz / QPSK

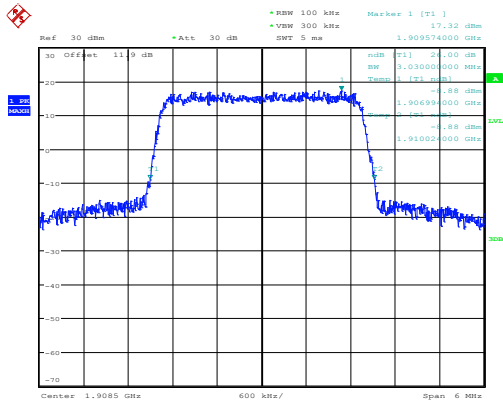

Date: 2.AUG.2014 11:28:07

Highest Channel / 3MHz / 16QAM

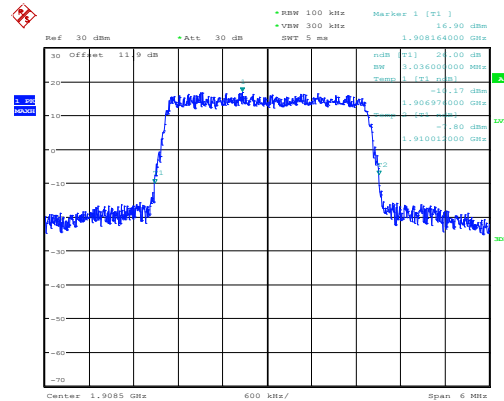

Date: 2.AUG.2014 11:28:23