

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

~~

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

0F
HTC Corporation
1F, 6-3 Baoqiang Road, Xindian District, New Taipei City 231,
Taiwan
Vive headset
VIVE
2Q29100
N/A
NM82Q29100
ER/2017/A0078
§15.247, Cat: DSS
Nov. 16, 2017
Oct. 13, 2017~ Nov. 09, 2017
Oct. 13, 2017

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Prepared By:

fanle

Stefanie Yu / Clerk

Approved By:

Jim Chang / Asst. Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms_endocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
ER/2017/A0078	Rev.00	Initial creation of document	Nov. 16, 2017



Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	Radiated Emission Test	17
8	20 dB Bandwidth Measurement	
9	Antenna Requirement	42



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Vive headset			
Brand Name:	VIVE			
Model No.:	2Q29100			
Model Difference:	N/A			
Product HW version:	DVT			
Product SW version:	N/A			
All in 1 Cable	Model No.: N/A, Supplier: HTC			
DP Cable	Model No.: MG 1M-DP-C, Supplier: HTC			
USB Cable	Model No.: MG 1M-U3-C, Supplier: HTC			
Base Station	Model No.: 1004, Supplier: VALVE CORPORATION			
	12Vdc by AC/DC Power Adapter			
Power Supply:	Adapter:1. Model No.: TC NE30W-EU, Supplier: HTCAdapter:2. Model No.: TC NE30W-UK, Supplier: HTC3. Model No.: TC NE30W-US, Supplier: HTC			
Antenna Designation:	PIFA Antenna, Ant 1 – Peak Gain: 2.66dBi Ant 2 – Peak Gain: -0.48dBi			

2.4GHz

Transmit Power	95.07dBuV/m (Peak)
Operation Frequency:	2402~2480MHz
Channel number:	79 channels
Channel space:	1MHz
Modulation Type:	FSK



1.2 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.249

ANSI C63.10:2013

Note:

1. All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Number and Designation are: 509634 / TW0001

1.4 Special Accessories

There are no special accessories used while test was conducted.

Equipment Modifications 1.5

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trains accument is solved by the Company's subject to its General conductors of electronic Documents at <u>www.sgs.com/tems</u> - document.htm. At tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.5 Limitation

(1) Conducted Emission

Conducted Emission Limits is as following.

Frequency	Conducted	Limit (dBuV)		
(MHz)	Quasi-Peak Average			
0.15 – 0.5	66 - 56	56 - 46		
0.5 – 5	56	46		
5 - 30	60	50		

(2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
. ,			
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 - 2483.5	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



(3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency	Field strength	Distance (m)	Field strength at
(MHz)	μV/m		3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Re-Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT mark: distance of meters.
 - 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen § 8.10
 - 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of £15.205 and RSS-Gen § 8.10, then the general radiated emission limits in ξ 15.209 and RSS-Gen § 8.9 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可都份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trains accument is solved by the Company's subject to its General conductors of electronic Documents at <u>www.sgs.com/tems</u> - document.htm. At tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.6 Configuration of Tested System






Fig. 2-2 Conducted (Antenna Port) Configuration



Fig. 2-3 AC Power Line Conducted Emission




Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	2.4GHz Wireless Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L430	R9-YYG88	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.249(a)(d)(e)	Radiated Emission	Compliant
§15.215(c)	20dB bandwidth Measurement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2402 ~ 2480MHz Band

79 channels are provided.

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1		21	2421MHz	41	2441MHz	61	2461MHz
2	2402MHz	22	2422MHz	42	2442MHz	62	2462MHz
3	2403MHz	23	2423MHz	43	2443MHz	63	2463MHz
4	2404MHz	24	2424MHz	44	2444MHz	64	2464MHz
5	2405MHz	25	2425MHz	45	2445MHz	65	2465MHz
6	2406MHz	26	2426MHz	46	2446MHz	66	2466MHz
7	2407MHz	27	2427MHz	47	2447MHz	67	2467MHz
8	2408MHz	28	2428MHz	48	2448MHz	68	2468MHz
9	2409MHz	29	2429MHz	49	2449MHz	69	2469MHz
10	2410MHz	30	2430MHz	50	2450MHz	70	2470MHz
11	2411MHz	31	2431MHz	51	2451MHz	71	2471MHz
12	2412MHz	32	2432MHz	52	2452MHz	72	2472MHz
13	2413MHz	33	2433MHz	53	2453MHz	73	2473MHz
14	2414MHz	34	2434MHz	54	2454MHz	74	2474MHz
15	2415MHz	35	2435MHz	55	2455MHz	75	2475MHz
16	2416MHz	36	2436MHz	56	2456MHz	76	2476MHz
17	2417MHz	37	2437MHz	57	2457MHz	77	2477MHz
18	2418MHz	38	2438MHz	58	2458MHz	78	2478MHz
19	2419MHz	39	2439MHz	59	2459MHz	79	2479MHz
20	2420MHz	40	2440MHz	60	2460MHz	80	2480MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
2.4G	2 to 80	2,40,80	FSK	2	MAIN	
	RADIATED	EMISSION TES	ST (ABOVE 1 GH	z)		
MODE	DATA RATE (Mbps)	ANTENNA PORT				
2.4G	2 to 80	2,40,80	FSK	2	MAIN	

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT			
2.4G	2 to 80	2,40,80	FSK	2	MAIN			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless the wee stated the solids from in this test report leading only to the statistic and such sample(s) test and such sample(s) are retained to so days only. First SA days only 小 熱音 結果 (筆) 副誌 2 様 品 負 , 同時 山核 品 僅 保留 00 氏 o 本 報告 未遅本 公 司 書 面許 可 , 不可 部 介 載 ? This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervance of this document is unaverted to the fuller unit of the long. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
20dB & 99% Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless the wee stated the solids from in this test report leading only to the statistic and such sample(s) test and such sample(s) are retained to so days only. First SA days only 小 熱音 結果 (筆) 副誌 2 様 品 負 , 同時 山核 品 僅 保留 00 氏 o 本 報告 未遅本 公 司 書 面許 可 , 不可 部 介 載 ? This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervance of this document is unaverted to the fuller unit of the long. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)				
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Note

1. The lower limit shall apply at the transition frequencies

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018			
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/22/2017	05/21/2018			
LISN	MESS TEC	FCC-LISN-50/2 50-25-2-01	4034	03/19/2017	03/18/2018			
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017			


6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

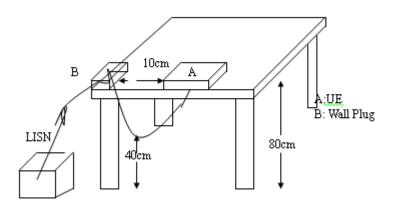

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trans documents issued by the company subject to is defined conductors of electronic Documents at <u>www.sgs.com/tems</u> edocument.m. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Site Conduction Room	Phase:	L1	Temperature: 20 °C
Limit: FCC Class B Conduction(QP)	Power:	AC 120V/60Hz	Humidity: 58 %
Mode: Operation			
Note: Adapter:TC NE18W-US			

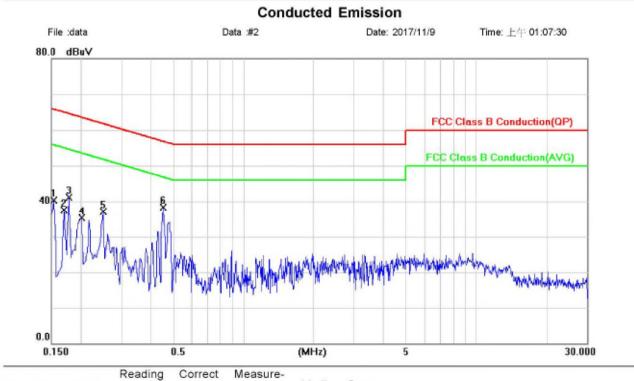

No.	Mk.	Freq.	Level	Factor	ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.1540	40.29	0.00	40.29	65.78	-25.49	peak		
2		0.1700	37.55	0.00	37.55	64.96	-27.41	peak		
3		0.1780	41.20	0.00	41.20	64.58	-23.38	peak		
4		0.2020	35.33	0.00	35.33	63.53	-28.20	peak		
5		0.2500	37.07	0.00	37.07	61.76	-24.69	peak		
6	*	0.4540	38.29	0.00	38.29	56.80	-18.51	peak		



Site Conduction Room	Phase: N	Temperature: 20 °C
Limit: FCC Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 58 %
Mode: Operation		
Note: Adapter:TC NE18W-US		

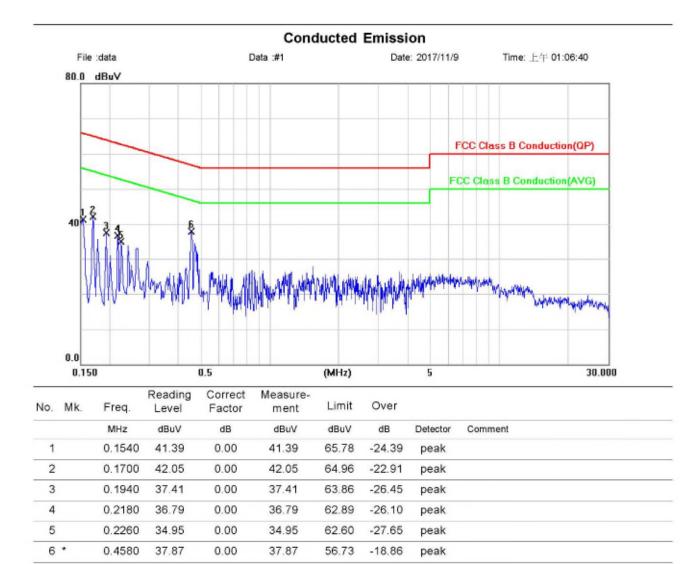

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Emission Test 7

7.1. Measurement Procedure

- 1. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

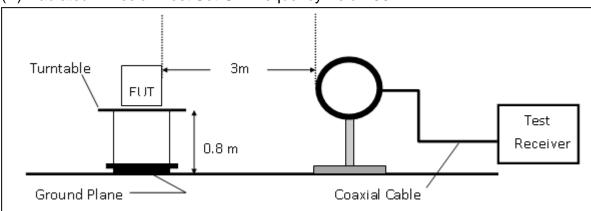

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trans documents issued by the company subject to is defined conductors of electronic Documents at <u>www.sgs.com/tems</u> edocument.m. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

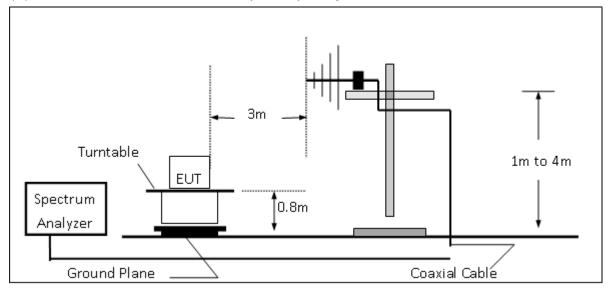

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

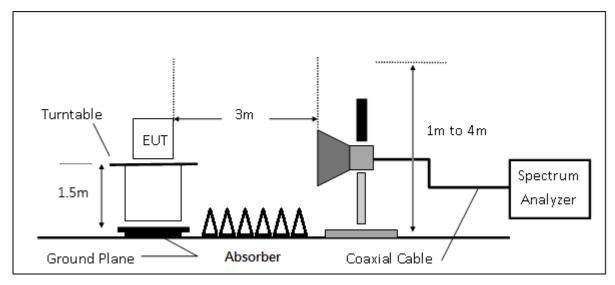

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.3. Measurement Equipment Used:

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018		
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/25/2017	04/24/2018		
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2017	09/19/2018		
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/19/2016	12/18/2017		
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/04/2017	08/03/2018		
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2017	01/02/2018		
Pre-Amplifier	EMC Instruments	EMC0126530	980038	01/03/2017	01/02/2018		
Ге-Апріпеі	Corp.	EMC0120350					
Turn Table	HD	DT420	N/A	N.C.R	N.C.R		
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R		
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R		
Low Loss Cable	Huber Suhner	966_RX	9	01/05/2017	01/04/2018		
3m Site NSA	SGS	966 chamber	N/A	07/01/2017	06/30/2018		
Low Loss Cable	Huber Suhner	966 TX	1	01/05/2017	01/04/2018		
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2016	12/11/2017		
Pre-Amplifier	EMC Instruments	EMC184045	980135	01/05/2017	01/04/2018		
	Corp.		300135	01/03/2017	01/04/2010		

Note: N.C.R refers to Not Calibrated Required



7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB) "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note : "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

7.5. Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

7.6. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Note: There is a comparison data of both open-field test site and semi-Anechoic, and test result came out very similar.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可都份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trains accument is solved by the Company's subject to its General conductors of electronic Documents at <u>www.sgs.com/tems</u> - document.htm. At tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Spurious Emission Measurement Result (MAIN)

Operation Band	:2.4G	Test Date	:2017-11-08
Fundamental Frequency	:2402 MHz	Temp./Humi.	:22 deg_C / 61 RH
Operation Mode	:Main CH LOW	Engineer	:Kane
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

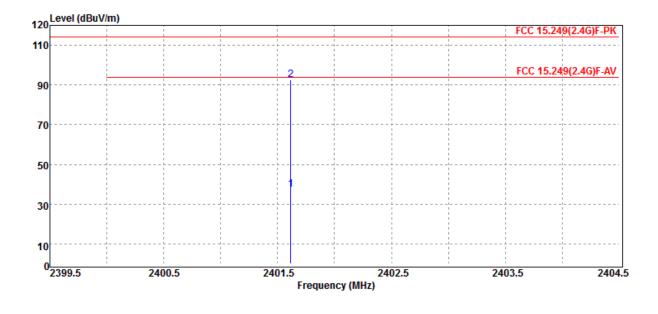

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
		Mode	Reading Level		FS	@3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
2401.62	F	Average	39.19	-1.77	37.42	94.00	-56.58	
2401.62	F	Peak	94.24	-1.77	92.47	114.00	-21.53	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2017/A0078 Page: 22 of 42

RH


Operation Mode :Main CH LOW Engineer :Kane	Operation Mode	:Main CH LOW	Engineer	:2017-11-08 :22 deg_C / 6 :Kane :HORIZONTA
--	----------------	--------------	----------	---

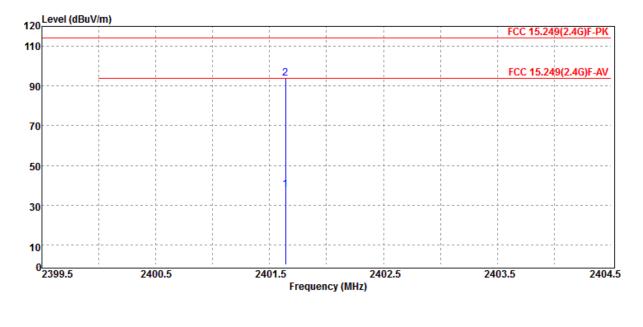

Actual Limit Sale	
FS @3m Margin	
3μV/m dBμV/m dB	
37.76 94.00 -56.24	
93.91 114.00 -20.09	
	<u>3μV/m dBμV/m dB</u> 37.76 94.00 -56.24



Report No.: ER/2017/A0078 Page: 23 of 42

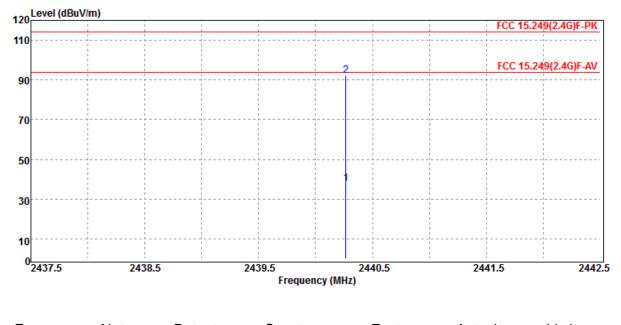


Limit Safe
@3m Margin
n dBµV/m dB
94.00 -56.33
114.00 -21.75
r



Report No.: ER/2017/A0078 Page: 24 of 42

Fundamental Frequency Operation Mode	:2.4G :2440 MHz :Main CH MID :E2 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.	:2017-11-08 :22 deg_C / 61 RH :Kane :HORIZONTAL
---	---	--	--

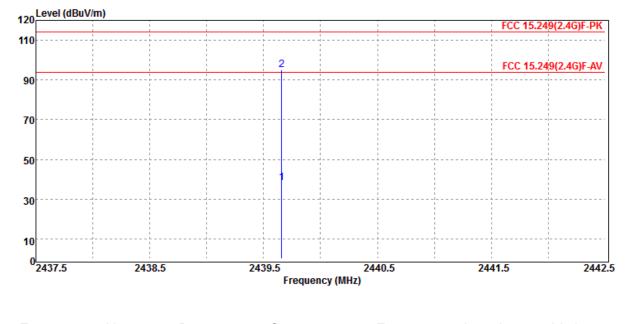


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
		Mode	Reading Level		FS	@3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2439.66	F	Average	39.87	-1.67	38.20	94.00	-55.80	
2439.66	F	Peak	96.74	-1.67	95.07	114.00	-18.93	



Report No.: ER/2017/A0078 Page: 25 of 42

Operation Band	:2.4G	Test Date	:2017-11-08
Fundamental Frequency	:2480 MHz	Temp./Humi.	:22 deg_C / 61 RH
Operation Mode	:Main CH HIGH	Engineer	:Kane
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

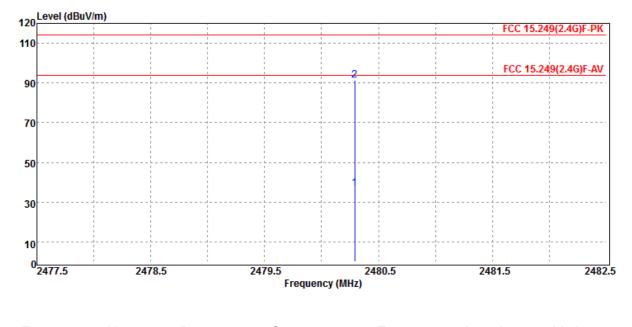


Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
	Mode	Reading Level		FS	@3m	Margin	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
F	Average	38.76	-1.61	37.15	94.00	-56.85	
F	Peak	93.01	-1.61	91.40	114.00	-22.60	
	F/H/E/S F	Mode F/H/E/S PK/QP/AV F Average	ModeReading LevelF/H/E/SPK/QP/AVdBµVFAverage38.76	ModeReading LevelF/H/E/SPK/QP/AVdBµVdBFAverage38.76-1.61	ModeReading LevelFSF/H/E/SPK/QP/AVdBµVdBFAverage38.76-1.6137.15	ModeReading LevelFS@3mF/H/E/SPK/QP/AVdBµVdBdBµV/mdBµV/mFAverage38.76-1.6137.1594.00	ModeReading LevelFS@3mMarginF/H/E/SPK/QP/AVdBµVdBdBµV/mdBµV/mdBµV/mFAverage38.76-1.6137.1594.00-56.85



Report No.: ER/2017/A0078 Page: 26 of 42

Operation Band	:2.4G
Fundamental Frequency	:2480 MHz
Operation Mode	:Main CH HIGH
EUT Pol.	:E2 Plane

Test Date :2017-11-08 Temp./Humi. :22 deg_C / 61 RH Engineer :Kane :HORIZONTAL Measurement Antenna Pol.

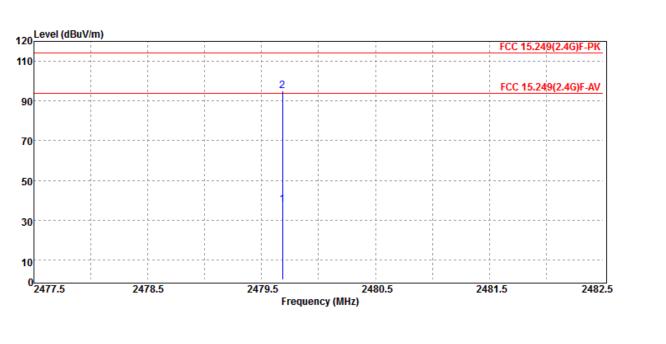


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
		Mode	Reading Level		FS	@3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
2479.69	F	Average	39.50	-1.62	37.88	94.00	-56.12	
2479.69	F	Peak	96.54	-1.62	94.92	114.00	-19.08	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result

Operation Band	:2.4G	Test Date	:2017-11-08
Fundamental Frequency	:2402 MHz	Temp./Humi.	:21 deg_C / 51 RH
Operation Mode	:TX CH LOW	Engineer	:Kane
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

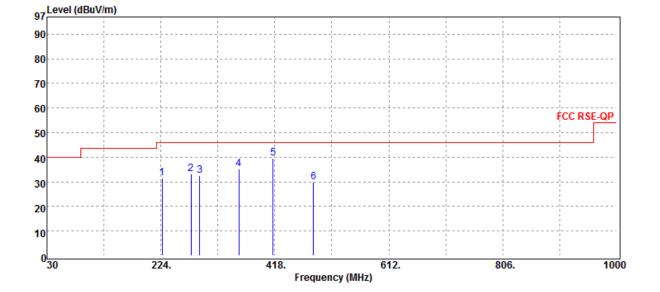

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	42.17	-10.69	31.48	46.00	-14.52
275.41	S	Peak	41.65	-8.39	33.26	46.00	-12.74
289.96	S	Peak	40.53	-7.87	32.66	46.00	-13.34
356.89	S	Peak	41.92	-6.82	35.10	46.00	-10.90
415.09	S	Peak	45.21	-5.73	39.48	46.00	-6.52
483.96	S	Peak	34.69	-4.75	29.94	46.00	-16.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exconerate parties to a transaction form exercising all their rights and obligations under the content or ap-ransaction documents. This document is instruction if the content of the content of the content or ap-ransaction documents. This document is prevent of the content of the content of the content or ap-ransaction documents. This document is document to the content of the content of the content or ap-ransaction documents. This document is document to the content of the content of the content or ap-ransaction documents. This document is document to the content of the content of the content or ap-ransaction documents. This document is document to the provide the transaction of the content or ap-ransaction documents. This document is the prevent of the content of the content or ap-ransaction of the document is document in the transaction of the content or ap-ransaction documents. This document is the prevent of the content of the content or ap-ransaction of the document is document to the prevent of the transaction of the content or ap-transaction of the document is unable to the prevent of the transaction of the content or ap-transaction of the document is appreciated to the prevent of the transaction of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Operation Band	:2.4G
Fundamental Frequency	:2402 MHz
Operation Mode	:TX CH LO\
EUT Pol.	:E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-11-08 :21 deg_C / 51 RH :Kane :HORIZONTAL

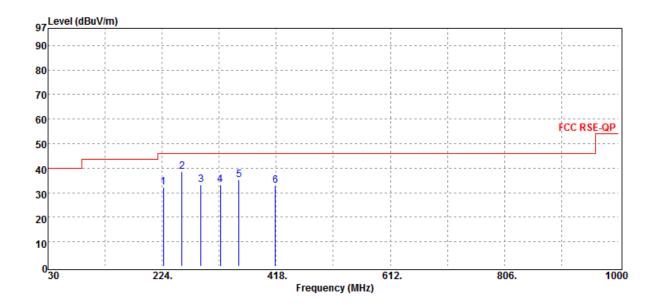

LOW


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	43.02	-10.69	32.33	46.00	-13.67
257.95	S	Peak	47.54	-9.02	38.52	46.00	-7.48
289.96	S	Peak	41.26	-7.87	33.39	46.00	-12.61
322.94	S	Peak	40.59	-7.31	33.28	46.00	-12.72
354.95	S	Peak	42.01	-6.84	35.17	46.00	-10.83
416.06	S	Peak	38.65	-5.73	32.92	46.00	-13.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band	:2.4G
Fundamental Frequency	:2440 MHz
Operation Mode	:TX CH MID
EUT Pol.	:E2 Plane

:2017-11-08 Test Date Temp./Humi. :21 deg_C / 51 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

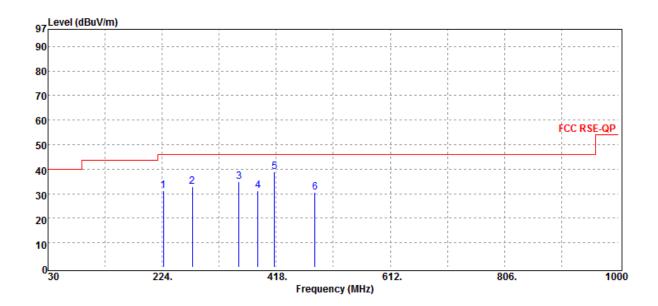

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	41.78	-10.69	31.09	46.00	-14.91
275.41	S	Peak	41.26	-8.39	32.87	46.00	-13.13
354.95	S	Peak	41.75	-6.84	34.91	46.00	-11.09
386.96	S	Peak	37.37	-6.31	31.06	46.00	-14.94
415.09	S	Peak	44.55	-5.73	38.82	46.00	-7.18
483.96	S	Peak	35.41	-4.75	30.66	46.00	-15.34


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band	:2.4G
Fundamental Frequency	:2440 MHz
Operation Mode	:TX CH MID
EUT Pol.	:E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-11-08 :21 deg_C / 51 RH :Kane :HORIZONTAL

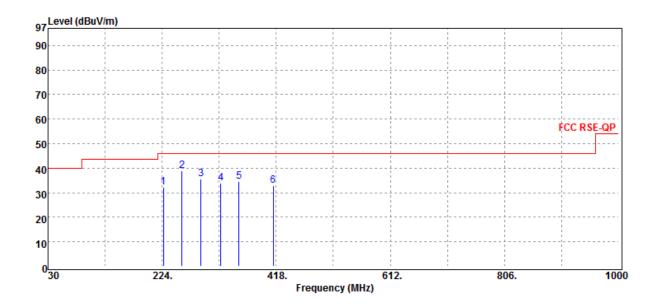


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	42.86	-10.69	32.17	46.00	-13.83
257.95	S	Peak	47.86	-9.02	38.84	46.00	-7.16
289.96	S	Peak	43.58	-7.87	35.71	46.00	-10.29
323.91	S	Peak	41.06	-7.31	33.75	46.00	-12.25
354.95	S	Peak	41.34	-6.84	34.50	46.00	-11.50
413.15	S	Peak	38.67	-5.74	32.93	46.00	-13.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band	:2.4G
Fundamental Frequency	:2480 MHz
Operation Mode	:TX CH HIGH
EUT Pol.	:E2 Plane

:2017-11-08 Test Date Temp./Humi. :21 deg_C / 51 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

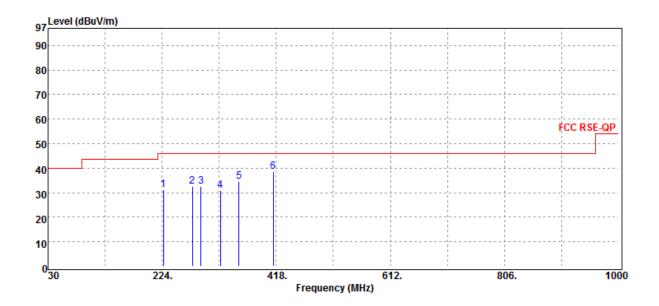

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	41.77	-10.69	31.08	46.00	-14.92
275.41	S	Peak	41.02	-8.39	32.63	46.00	-13.37
289.96	S	Peak	40.45	-7.87	32.58	46.00	-13.42
322.94	S	Peak	38.18	-7.31	30.87	46.00	-15.13
354.95	S	Peak	41.30	-6.84	34.46	46.00	-11.54
413.15	S	Peak	44.44	-5.74	38.70	46.00	-7.30


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band	:2.4G
Fundamental Frequency	:2480 MHz
Operation Mode	:TX CH HIGH
EUT Pol.	:E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-11-08 :21 deg_C / 51 RH :Kane :HORIZONTAL

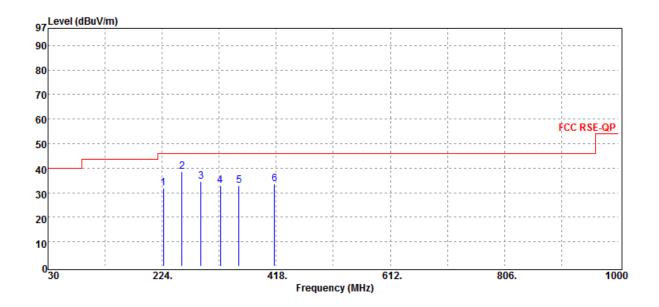

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
225.94	S	Peak	42.57	-10.69	31.88	46.00	-14.12
257.95	S	Peak	47.61	-9.02	38.59	46.00	-7.41
289.96	S	Peak	42.29	-7.87	34.42	46.00	-11.58
322.94	S	Peak	40.15	-7.31	32.84	46.00	-13.16
354.95	S	Peak	39.60	-6.84	32.76	46.00	-13.24
415.09	S	Peak	39.25	-5.73	33.52	46.00	-12.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



н

Fundamental	Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2.4G :2402 MHz :Tx CH LOW :E2 Plane		e umi. ment Antenna P	:22 deg :Kane	:2017-11-08 :22 deg_C / 61 RH :Kane :VERTICAL	
97 	BuV/m)							
90								
80						FCC RSE-PK		
70	·							
60	·	 				FCC RSE-AV		
50	2							
40		 						
30				·				
20				1 1 1 1		 		
10				· · · · · · · · · · · · · · · · · · ·				
0 <mark>.</mark> 1000	6100. 11200. Frequency			16300. 21400. Hz)		26500		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
		Mode	Reading Level		FS	@3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
4804.00	н	Average	26.58	4.92	31.50	54.00	-22.50	

Peak

39.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under use to attend the fuller extend of the hore. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

4.92

44.10

74.00

-29.90



Н

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:2.4G :2402 MHz :Tx CH LOV :E2 Plane	V	Test Date Temp./Hu Engineer Measurer	ımi.	:Kane	1-08 _C / 61 RH CONTAL
97	BuV/m)						
90							
80						FCC RSE-PK	
70				 			
60	·	 				FCC RSE-AV	
50	2						
40							
30				· · · · · · · · · · · · · · · · · · ·			
20				· · · · · · · · · · · · · · · · · · ·			
10		 		 			
0 <mark></mark> 1000	610	00.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	н	Average	25.48	4.92	30.40	54.00	-23.60

Peak

38.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under use to attend the fuller extend of the hore. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

4.92

43.88

74.00

-30.12



Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:2.4G :2440 MHz :Tx CH MID :E2 Plane		Test Date Temp./Hu Engineer Measure	ımi.	:Kane	<u>_</u> C / 61 RH
97 Level (dE	BuV/m)						1
90							
80						FCC RSE-PK	
70							
60						FCC RSE-AV	
50	2	 					
40							
30							
20							
10							
0 <mark></mark>	640	0	44200	16300.	24400	2650	
1000	610	0.	11200. Frequency (MH		21400.	2000	10
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4880.00	Н	Average	26.43	5.17	31.60	54.00	-22.40
4880.00	Н	Peak	38.11	5.17	43.28	74.00	-30.72



Н

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:2.4G :2440 MHz :Tx CH MID :E2 Plane		Test Date Temp./Hu Engineer Measure	umi.	:Kane	11-08 g_C / 61 RH ZONTAL
97 Level (d	BuV/m)						_
90							
80						FOC DEF DV	
70						FCC RSE-PK	•
60						FCC RSE-AV	
50						FUC KSE-AV	-
40	2						
30							
20							
10						 	
0			44200	16300.	24.400	2005	
°1000	610	10.	11200. Frequency (MH		21400.	265	00
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4880.00	Н	Average	25.21	5.17	30.38	54.00	-23.62
1000 00			07.40			74.00	04.40

Peak

37.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under use to attend the fuller extend of the hore. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

5.17

42.57

74.00

-31.43



н

Operation Ba Fundamental Operation Mo	Frequency	:2.4G :2480 MHz :Tx CH HIG	н	Test Date Temp./Hu Engineer	ımi.	:Kane	LC / 61 RH
EUT Pol.		:E2 Plane		Measure	ment Antenna P	ol. :VERTI	CAL
97 Level (dl	BuV/m)						1
90							
80				· · · · · · · · · · · · · · · · · · ·		FCC RSE-PK	
70			· · · · · · · · · · · · · · · · · · ·				
60						FCC RSE-AV	
50	2						
40				·			
30				 			
20							
10							
0 <mark></mark> 1000	610)0.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Average	26.80	5.29	32.09	54.00	-21.91

Peak

41.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under use to attend the fuller extend of the hore. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

5.29

46.82

74.00

-27.18



4960.00

Н

Н

peration Ba undamenta peration Me UT Pol.	I Frequency	:2.4G :2480 MHz :Tx CH HIG :E2 Plane	Н	Test Date Temp./Hu Engineer Measure	ımi.	:Kane	11-08 g_C / 61 RH ZONTAL
97 Level (d	IBuV/m)						٦
90				 1 1			
80						FCC RSE-PK	
70							
60						FCC RSE-AV	
50	2						
40						· · · · · · · · · · · · · · · · · · ·	
30						· ¹	
20						 	
10						 	
0 <mark></mark>	610	10.	11200. Frequency (MH	16300. z)	21400.	265	 00
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

Average

Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under use to attend the fuller extend of the hore. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

5.29

5.29

26.27

40.33

31.56

45.62

54.00

74.00

-22.44

-28.38



20 dB Bandwidth Measurement 8

8.1 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- Set ETU normal operating mode. 2.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

8.3 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018			
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	01/05/2017	01/04/2018			

8.4 Measurement Results:


Frequency	20dB
(MHz)	Bandwidth
	(kHz)
2402	2140
2440	2070
2480	2073

Refer to attached data chart.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2402MHz

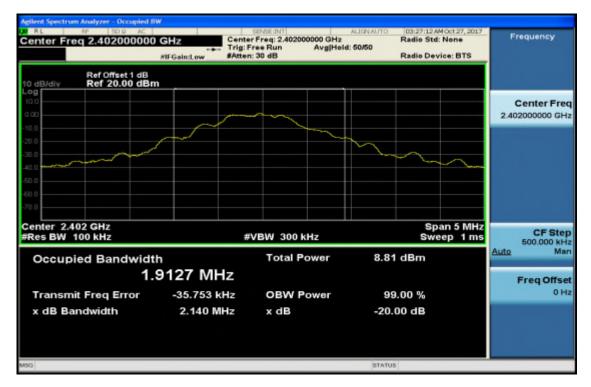


2440MHz

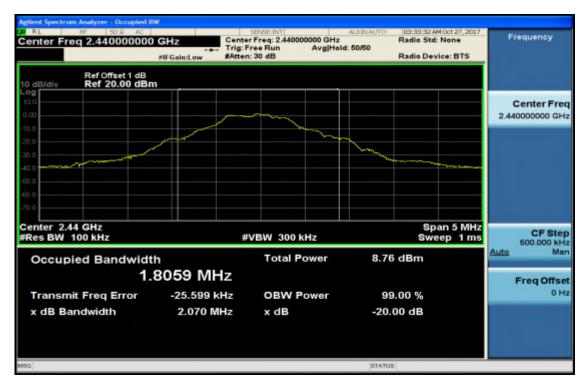

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Trains accument is solved by the Company's subject to its General conductors of electronic Documents at <u>www.sgs.com/tems</u> - document.htm. At tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號





2480MHz

RL 19 503 AC Center Freq 2.480000000	GHz Cent	sense int er Freq: 2.480000000 GHz Free Run Avg Hold n: 30 dB	R: 50/50	8:35:19 AM Oct 27, 2017 adio Std: None adio Device: BTS	Frequency
Ref Offset 1 dB 10 dB/div Ref 20.00 dBn	1				
Log 10.0 0.00					Center Freq 2.48000000 GHz
-10.0			m		
40.0				an a	
-60.0					
Center 2.48 GHz #Res BW 100 kHz		≇VBW 300 kHz		Span 5 MHz Sweep 1 ms	CF Step 500.000 kHz
Occupied Bandwidt	^h 7998 MHz	Total Power	8.70 d	Bm	Auto Man Freg Offset
Transmit Freq Error	-19.476 kHz	OBW Power	99.0	0%	0 Hz
x dB Bandwidth	2.073 MHz	x dB	-20.00	dB	
153			STATUS		



Antenna Requirement 9

9.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. I

9.2 Antenna Connected Construction:

embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless the wee stated the solids from in this test report leading only to the statistic and such sample(s) test and such sample(s) are retained to so days only. First SA days only 小 熱音 結果 (筆) 副誌 2 様 品 負 , 同時 山核 品 僅 保留 00 氏 o 本 報告 未遅本 公 司 書 面許 可 , 不可 部 介 載 ? This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervance of this document is unaverted to the fuller unit of the long. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.