

Page 1 of 72

### ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

### INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

OF

Applicant: **HTC Corporation** 

No. 88, Sec. 3, Zhongxing Rd. Xindian Dist., New Taipei City 231,

Taiwan

**Product Name:** Add-On Cover

**Brand Name:** VIVE

Model No.: 2Q6L300

**Model Difference:** N/A

**Report Number:** T190815W02-RP3

FCC ID: NM82Q6L300

**FCC Rule Part:** §15.247, Cat: DSS

**Issue Date:** Sep. 25, 2019

Date of Test: Aug. 08, 2019 ~ Aug. 23, 2019

Date of EUT Received: Sep. 06, 2019

Issued by: Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this re-port. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 2 of 72

Tested By:

Gary Lee / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 3 of 72

## **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190815W02-RP3	Rev.00	Initial creation of document	All	Sep. 25, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





### **Table of Contents**

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	. 12
6	CONDUCTED EMISSION TEST	. 13
7	PEAK OUTPUT POWER MEASUREMENT	17
8	20DB BANDWIDTH MEASUREMENT	. 19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	. 23
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	. 29
11	FREQUENCY SEPARATION	. 58
12	NUMBER OF HOPPING FREQUENCY	. 60
13	TIME OF OCCUPANCY (DWELL TIME)	. 62
11	ANTENNA RECHIREMENT	72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 5 of 72

### **GENERAL INFORMATION**

#### 1.1 **Product description**

<u>-</u>			
Product Name:	Add-On Cover		
Brand Name:	VIVE		
Model No.:	2Q6L300		
Model Difference:	N/A		
Hardware Version:	XA		
Software Version:	N/A		
	12Vdc from AC/DC Adapter		
Power Supply:	1. Model No.: TC NE30W-EU, Supplier: HTC Adapter: 2. Model No.: TC NE30W-UK, Supplier: HTC 3. Model No.: TC NE30W-US, Supplier: HTC		

Radio Technology:	Bluetooth BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power (EIRP):	9.35 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s
Antenna Designation:	PIFA Antenna, Peak Gain: 0.34dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 6 of 72

#### 1.2 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

#### 1.3 **Test Facility**

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

#### 1.4 **Special Accessories**

There is no special accessory used while test was conducted.

#### 1.5 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。



Page 7 of 72

#### SYSTEM TEST CONFIGURATION 2

#### 2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 **Test Procedure**

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### 2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### 2.4 **Measurement Results Explanation Example**

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page 8 of 72



### 2.5 **Configuration of Tested System** Fig. 2-1 Radiated Emission & Conduction

Fig. 2-2 Conducted






**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	L430	R9-WGNK5	Unshielded	Shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





### **SUMMARY OF TEST RESULTS**

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB & 99% Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 10 of 72

### **DESCRIPTION OF TEST MODES**

#### 4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 11 of 72

#### 4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case.

### **RADIATED EMISSION TEST:**

	RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
	RADIATED EMISSION TEST (ABOVE 1 GHz)						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			


### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

### ANTENNA PORT CONDUCTED MEASUREMENT:

	ANTENNAT ON CONDUCTED MEAGONEMENT.						
	CONDUCTED TEST						
	I	Peak Output Power,	20dB Band Width				
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH5			
	Band Edge						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
		Frequency S	Separation				
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
	Number of hopping frequency						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
	Time of Occupancy (Dwell time)						
Bluetooth	Bluetooth 2402 to 2480 2402, 2441, 2480 GFSK, π/4-DQPSK, 8-DPSK DH1/DH3/DH5						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





### **MEASUREMENT UNCERTAINTY**

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



**CONDUCTED EMISSION TEST** 

#### 6.1 **Standard Applicable**

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Troquency within room in the to o	Trequestey maint fee tall to comin in chair fiet exceed the infinit table de belem					
	Limits					
Frequency range	dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
		•				

### Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 6.2 **Measurement Equipment Used**

Conduction (RF)							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EMI Test Receiver	R&S	ESCI 3	100335	02/12/2019	02/11/2020		
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2018	11/25/2019		
LISN	SCHWARZBECK	NSLK 8127	8127-649	04/02/2019	04/01/2020		
LISN	FCC	FCC-LISN-50/250-25-2-01	4034	04/09/2019	04/08/2020		
Test Software	Farad	EZ-EMC	Ver. SGS- 03A2	N.C.R	N.C.R		


#### 6.3 **EUT Setup**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



### 6.4 Test SET-UP (Block Diagram of Configuration)

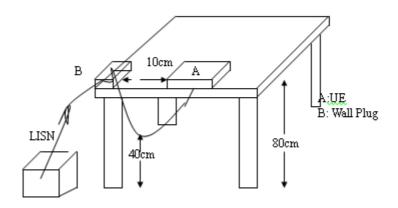

### 6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

### 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AC 120V/60Hz

**Test Voltage:** 

Report No.: T190815W02-RP3

**GARY** 


Page 15 of 72

### AC POWER LINE CONDUCTED EMISSION TEST DATA

Test By:

**Description:** operation 2019/8/19

Line: Temp.(°C)/Hum.(%): 24.7(°C)/63%

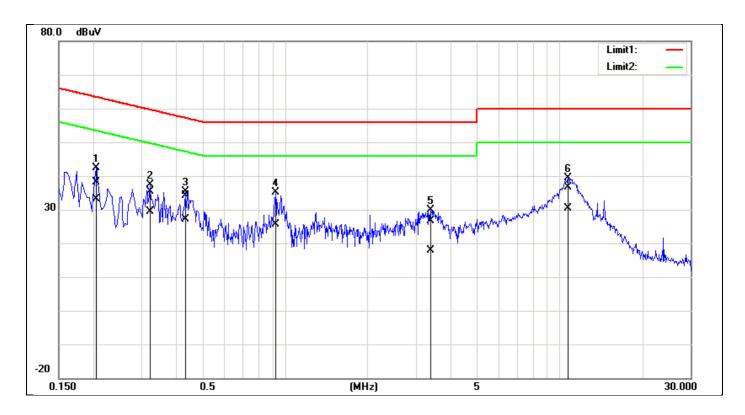

No.	Fre- quency	Qua- siPeak reading	Average reading	Correc- tion factor	Qua- siPeak result	Average result	Qua- siPeak limit	Average limit	Qua- siPeak margin	Aver- age margin	Re- mark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.2060	27.97	22.89	10.13	38.10	33.02	63.36	53.37	-25.26	-20.35	Pass
2	0.3220	25.21	19.15	10.14	35.35	29.29	59.65	49.66	-24.30	-20.37	Pass
3	0.4340	24.01	17.02	10.14	34.15	27.16	57.18	47.18	-23.03	-20.02	Pass
4	0.9260	25.06	15.55	10.17	35.23	25.72	56.00	46.00	-20.77	-20.28	Pass
5	3.3940	16.38	7.54	10.22	26.60	17.76	56.00	46.00	-29.40	-28.24	Pass
6*	10.7340	26.29	20.12	10.35	36.64	30.47	60.00	50.00	-23.36	-19.53	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unleaviful and offenders may be prospectived to the fullest event of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law




Page 16 of 72

2019/8/19 **Description:** operation Date:

Line: Temp.(°C)/Hum.(%): 24.7(°C)/63%

AC 120V/60Hz **GARY Test Voltage:** Test By:

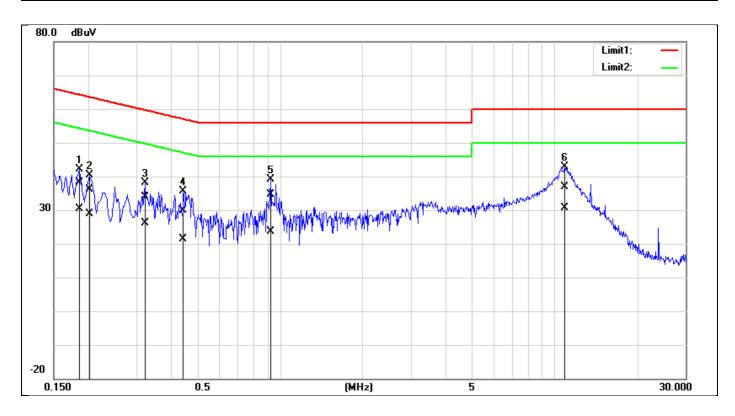

No.	Fre- quency	Qua- siPeak reading	Average reading	Correc- tion factor	Qua- siPeak result	Average result	Qua- siPeak limit	Average limit	Qua- siPeak margin	Aver- age margin	Re- mark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1860	28.07	20.38	10.02	38.09	30.40	64.21	54.21	-26.12	-23.81	Pass
2	0.2020	26.21	18.76	10.02	36.23	28.78	63.52	53.53	-27.29	-24.75	Pass
3	0.3220	23.78	16.00	10.03	33.81	26.03	59.65	49.66	-25.84	-23.63	Pass
4	0.4460	19.79	11.43	10.03	29.82	21.46	56.95	46.95	-27.13	-25.49	Pass
5	0.9260	24.58	13.65	10.04	34.62	23.69	56.00	46.00	-21.38	-22.31	Pass
6*	10.8580	26.63	20.43	10.22	36.85	30.65	60.00	50.00	-23.15	-19.35	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 17 of 72

### PEAK OUTPUT POWER MEASUREMENT


#### 7.1 **Standard Applicable**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

#### 7.2 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1804001	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726104	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726107	02/13/2019	02/12/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

#### 7.3 Test Set-up:




#### 7.4 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### 7.5 **Measurement Result**

1M BR	mode	(Peak)	1:

### 1M BR mode (Average):

IIII DI	t illoue (i e	anj.			יום ויוו	illoue (Ave	erage).					
СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)			
Low	2402	8.88	7.727	125	Low	2402	8.19	6.584	125			
Mid	2441	9.35	8.610	125	Mid	2441	8.50	7.071	125			
High	2480	8.96	7.870	125	High	2480	8.30	6.753	125			
2M EDD made (Deals).					2M ED	2M CDD made (Assarana):						

### 2M EDR mode (Peak):

### 2M EDR mode (Average):

	// modo (i	· ·			Ziii Zzit iiiodo (ttorago):					
СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)	
Low	2402	8.21	6.622	125	Low	2402	5.12	3.248	125	
Mid	2441	8.63	7.295	125	Mid	2441	6.29	4.252	125	
High	2480	7.95	6.237	125	High	2480	5.39	3.457	125	

### 3M EDR mode (Peak):

### 3M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8.41	6.934	125	Low	2402	5.55	3.592	125
Mid	2441	8.83	7.638	125	Mid	2441	6.26	4.230	125
High	2480	8.37	6.871	125	High	2480	5.80	3.805	125

NOTE: cable loss as 5dB that offsets in the spectu \*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 19 of 72

#### **20DB BANDWIDTH MEASUREMENT** 8


#### 8.1 Standard Applicable

For frequency hopping systems operating in the 2400 MHz-2483.5 MHz no limit for 20dB bandwidth.

#### 8.2 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

#### 8.3 **Test Set-up**



#### 8.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed NOTE:

For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 20 of 72

#### 8.5 **Measurement Result**

GESK

GFSK	OI OIL								
	20 dB	2/3 BW							
CH	BW								
	(MHz)	(MHz)							
Low	0.9233	0.62							
Mid	0.9241	0.62							
High	0 9241	0.62							

π/4-DQPSK

	α. σ. τ			
	20 dB	2/3 BW		
СН	BW			
	(MHz)	(MHz)		
Low	1.335	0.89		
Mid	1.334	0.89		
High	1.341	0.89		

8-DPSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.340	0.89
Mid	1.336	0.89
High	1 339	0.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




### OBW 20dB\_GFSK\_1M\_DH5\_2402MHz




### OBW 20dB\_GFSK\_1M\_DH5\_2441MHz




### OBW 20dB\_GFSK\_1M\_DH5\_2480MHz

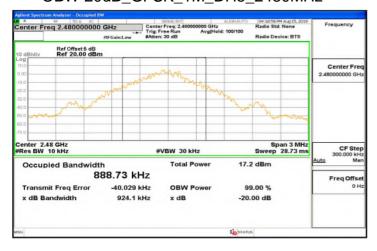


### OBW 20dB $\pi$ 4DQPSK 2M DH5 2402MHz

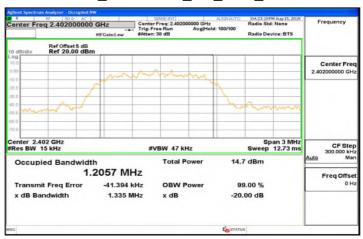

### OBW 20dB\_π4DQPSK\_2M\_DH5\_2441MHz

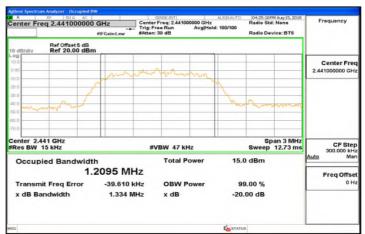

### OBW 20dB $\pi$ 4DQPSK 2M DH5 2480MHz

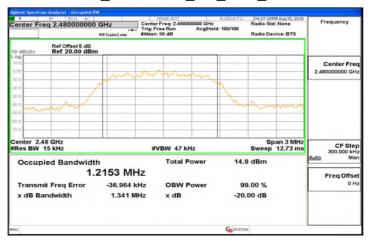

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/tems\_and\_conditions.htm">www.sqs.com/tems\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/tems\_e-document.htm">www.sqs.com/tems\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 22 of 72



### OBW 20dB 8DPSK 3M DH5 2402MHz

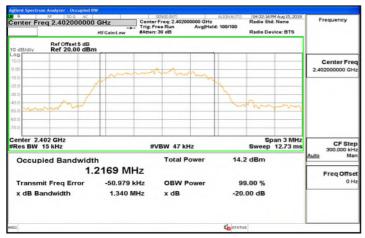

### OBW 20dB\_8DPSK\_3M\_DH5\_2441MHz

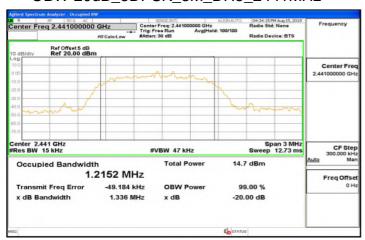

### OBW 20dB 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic Documents at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> are supplied to the limitation of liability, indemnification and jurisdiction issued by the conditions. therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 23 of 72

### CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


#### 9.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

#### 9.2 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

#### 9.3 **Test SET-UP**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 24 of 72

#### 9.4 **Measurement Procedure**

### Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

### **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


#### 9.5 **Measurement Result**

See next page for test plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Band Edge GFSK 1M DH5 2402MHz

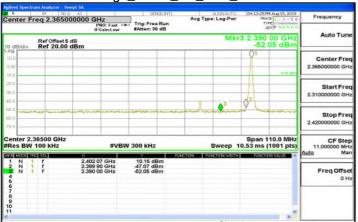

Band Edge\_GFSK\_1M\_DH5\_2480MHz

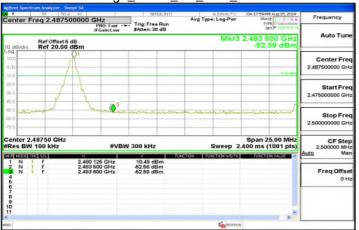

Band Edge 8DPSK 3M DH5 2402MHz

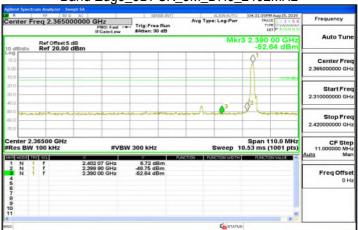


Band Edge 8DPSK\_3M\_DH5 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Hopping Band Edge\_GFSK\_1M\_DH5\_2402MHz

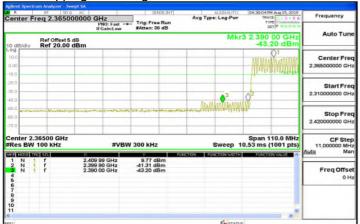

Hopping Band Edge\_GFSK\_1M\_DH5\_2480MHz

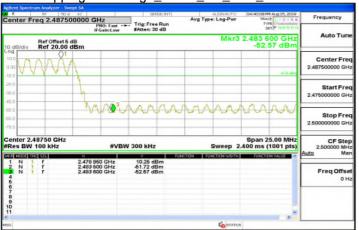

Hopping Band Edge\_8DPSK\_3M\_DH5\_2402MHz



Hopping Band Edge\_8DPSK\_3M\_DH5\_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### Spurious Emission\_GFSK\_1M\_DH5\_2402MHz



### Spurious Emission\_GFSK\_1M\_DH5\_2441MHz



### Spurious Emission GFSK 1M DH5 2480MHz



### Spurious Emission π4DQPSK 2M DH5 2402MHz



### Spurious Emission\_π4DQPSK\_2M\_DH5\_2441MHz



### Spurious Emission\_π4DQPSK\_2M\_DH5\_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 28 of 72



Spurious Emission 8DPSK 3M DH5 2402MHz



### Spurious Emission\_8DPSK\_3M\_DH5\_2441MHz



### Spurious Emission 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> edocument.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 29 of 72

#### RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT 10

#### 10.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Conditions htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





#### 10.2 **Measurement Equipment Used**


966A Chamber							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due		
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020		
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020		
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020		
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020		
Digital Thermo- Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020		
Horn Antenna	SCHWARZBECK	BBHA 9120D	779	03/09/2019	03/08/2020		
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020		
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019		
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020		
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020		
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020		
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020		
Software	e3 V6.11-20180413						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




### 10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

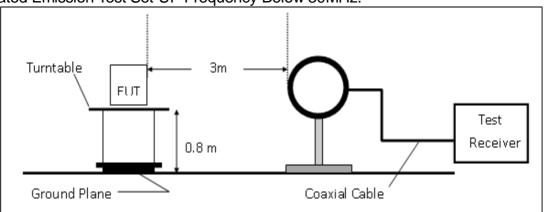

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

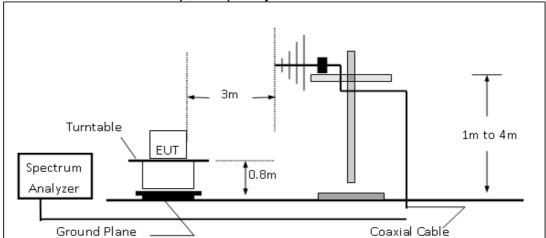

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

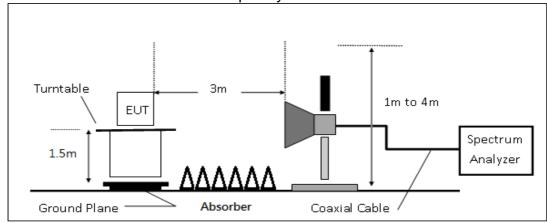

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 32 of 72

### 10.4 Measurement Procedure

### Radiated Emission

- The testing follows the Measurement Procedure of ANSI C63.10:2013.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

### 10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable			
		Loss)			
	RA = Reading Amplitude	AG = Amplifier Gain			
	AF = Antenna Factor				

The limit of the emission level is expressed in dBuV/m, which converts 20\*log(uV/m)

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 33 of 72

### 10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page 34 of 72



# 10.7 Measurement Result Radiated Band Edge Measurement Result:


**Project Number** :T190815W02 **Test Date** :2019-08-20 **Operation Band** Temp./Humi. :BT BR :27.3/62 Fundamental Frequency :2402 MHz Engineer :Kane Operation Mode :BE CH Low Measurement Antenna Pol. :VERTICAL EUT Pol. :E2 Plan

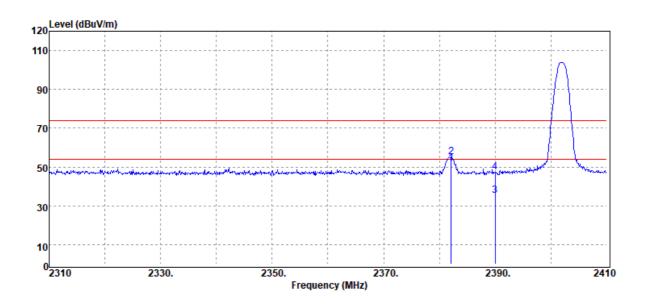

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2382.10	Average	55.30	-3.37	51.93	54.00	-2.07
2382.10	Peak	58.64	-3.37	55.27	74.00	-18.73
2390.00	Average	38.70	-3.38	35.32	54.00	-18.68
2390.00	Peak	50.91	-3.38	47.53	74.00	-26.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's solve responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Project Number :T190815W02
Operation Band :BT BR
Fundamental Frequency :2402 MHz
Operation Mode :BE CH Low
EUT Pol. :E2 Plan

Test Date :2019-08-20
Temp./Humi. :27.3/62
Engineer :Kane


Measurement Antenna Pol. :HORIZONTAL

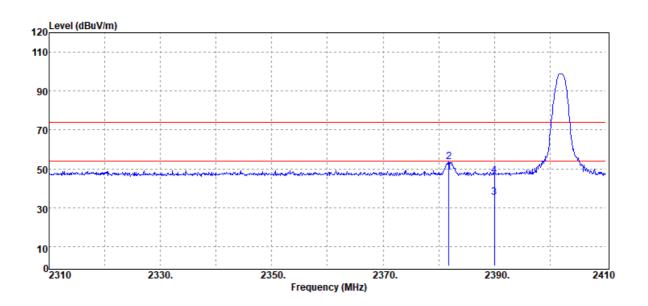

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
2381.80	Average	51.69	-3.37	48.32	54.00	-5.68
2381.80	Peak	56.74	-3.37	53.37	74.00	-20.63
2390.00	Average	38.68	-3.38	35.30	54.00	-18.70
2390.00	Peak	50.08	-3.38	46.70	74.00	-27.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





**Project Number** :T190815W02 **Operation Band** :BT BR Fundamental Frequency :2480 MHz **Operation Mode** :BE CH High EUT Pol. :E2 Plan


**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

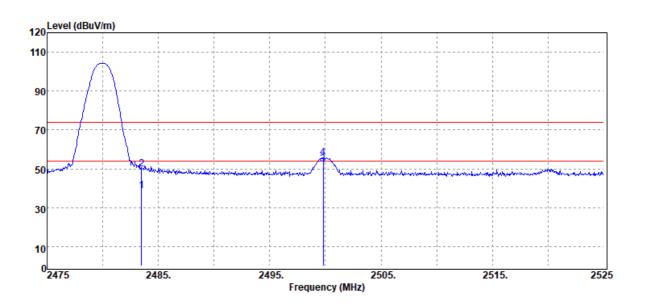

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	41.61	-2.83	38.78	54.00	-15.22
2483.50	Peak	52.45	-2.83	49.62	74.00	-24.38
2499.80	Average	54.98	-2.72	52.26	54.00	-1.74
2499.80	Peak	58.51	-2.72	55.79	74.00	-18.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

所力の方成内。 地球口車大幅工業到別訊之後の日本、「四寸以後の理味用別人。 予報百木經平公口書間計刊。 个刊節の復装。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






:T190815W02 :BT BR :2480 MHz :BE CH High :E2 Plan


**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

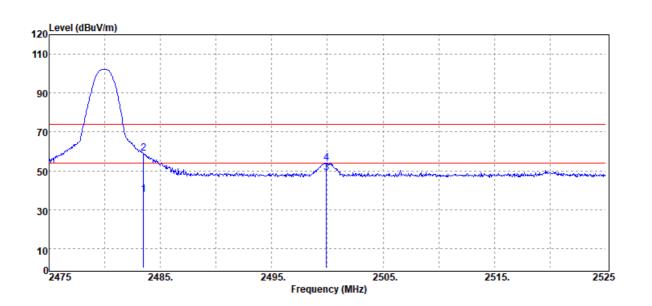

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	40.47	-2.83	37.64	54.00	-16.36
2483.50	Peak	61.61	-2.83	58.78	74.00	-15.22
2499.90	Average	51.80	-2.72	49.08	54.00	-4.92
2499.90	Peak	56.67	-2.72	53.95	74.00	-20.05


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Project Number :T190815W02
Operation Band :BT EDR
Fundamental Frequency :2402 MHz
Operation Mode :BE CH Low
EUT Pol. :E2 Plan

Test Date :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

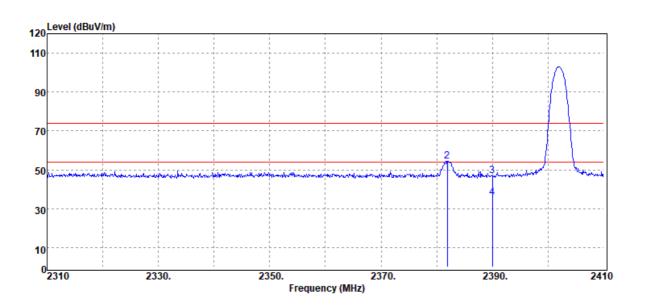

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	_
2381.90	Average	52.51	-3.37	49.14	54.00	-4.86	
2381.90	Peak	57.92	-3.37	54.55	74.00	-19.45	
2390.00	Peak	50.28	-3.38	46.90	74.00	-27.10	
2390.00	QP	39.06	-3.38	35.68	74.00	-38.32	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






**Project Number** :T190815W02 **Operation Band** :BT EDR Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane


Measurement Antenna Pol. :HORIZONTAL

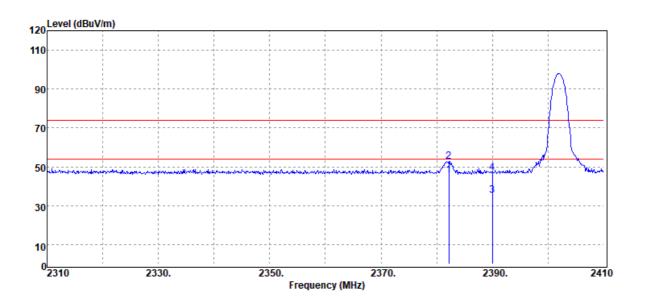

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2382.20	Average	49.01	-3.37	45.64	54.00	-8.36
2382.20	Peak	56.07	-3.37	52.70	74.00	-21.30
2390.00	Average	38.84	-3.38	35.46	54.00	-18.54
2390.00	Peak	50.16	-3.38	46.78	74.00	-27.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT EDR :2480 MHz :BE CH High :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

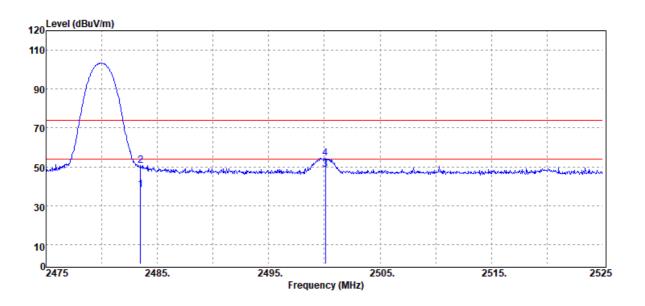

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	40.87	-2.83	38.04	54.00	-15.96
2483.50	Peak	53.68	-2.83	50.85	74.00	-23.15
2500.10	Average	51.45	-2.71	48.74	54.00	-5.26
2500.10	Peak	57.14	-2.71	54.43	74.00	-19.57


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT EDR :2480 MHz :BE CH High :E2 Plan Test Date :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

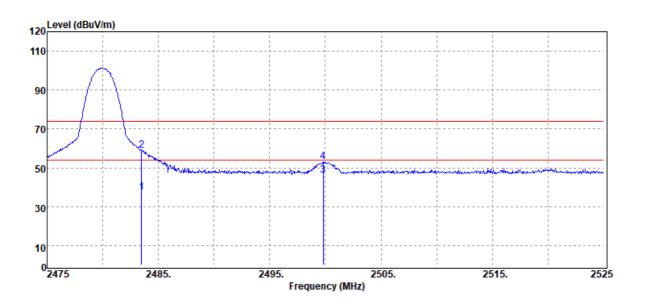

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	40.08	-2.83	37.25	54.00	-16.75
2483.50	Peak	61.92	-2.83	59.09	74.00	-14.91
2499.80	Average	48.67	-2.72	45.95	54.00	-8.05
2499.80	Peak	55.70	-2.72	52.98	74.00	-21.02


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T19
Operation Band :BT
Fundamental Frequency :240
Operation Mode :BE
EUT Pol. :E2

:T190815W02 :BT BR Hopping :2402 MHz :BE CH Low :E2 Plan Test Date :2019-08-20
Temp./Humi. :27.3/62
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

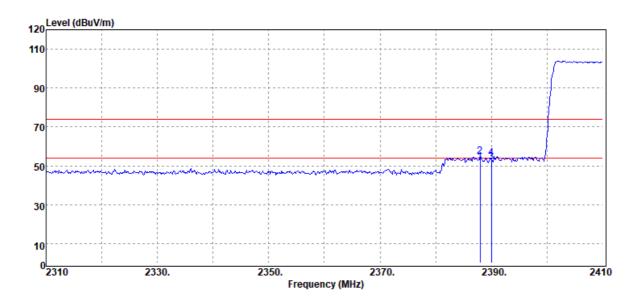

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2388.00	Average	55.28	-3.39	51.89	54.00	-2.11
2388.00	Peak	58.21	-3.39	54.82	74.00	-19.18
2390.00	Average	55.29	-3.38	51.91	54.00	-2.09
2390.00	Peak	57.46	-3.38	54.08	74.00	-19.92


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:T190815W02 :BT BR Hopping :2402 MHz :BE CH Low :E2 Plan Test Date :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

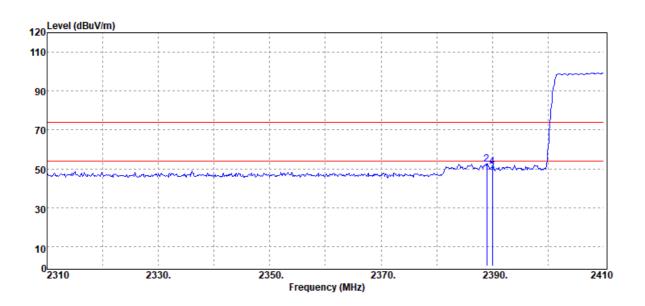


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2389.00	Average	51.34	-3.39	47.95	54.00	-6.05
2389.00	Peak	55.84	-3.39	52.45	74.00	-21.55
2390.00	Average	51.36	-3.38	47.98	54.00	-6.02
2390.00	Peak	54.40	-3.38	51.02	74.00	-22.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






:T190815W02 :BT BR Hopping :2480 MHz :BE CH High :E2 Plan Test Date :2019-08-20
Temp./Humi. :27.3/62
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

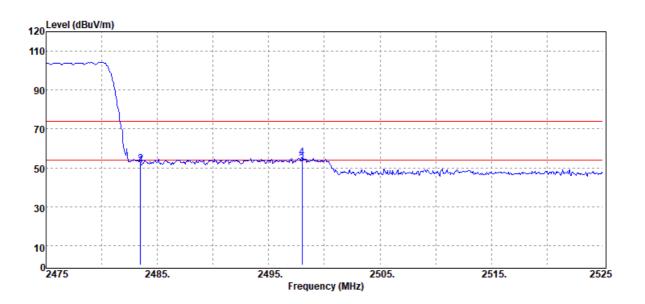

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	53.81	-2.83	50.98	54.00	-3.02
2483.50	Peak	54.87	-2.83	52.04	74.00	-21.96
2498.00	Average	54.61	-2.73	51.88	54.00	-2.12
2498.00	Peak	57.86	-2.73	55.13	74.00	-18.87


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:T190815W02 :BT BR Hopping :2480 MHz :BE CH High :E2 Plan Test Date :2019-08-20
Temp./Humi. :27.3/62
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

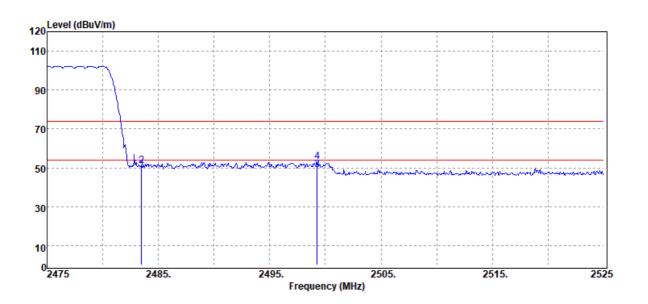


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.42	-2.83	48.59	54.00	-5.41
2483.50	Peak	53.72	-2.83	50.89	74.00	-23.11
2499.25	Average	51.51	-2.72	48.79	54.00	-5.21
2499.25	Peak	55.82	-2.72	53.10	74.00	-20.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






:T190815W02 :BT EDR Hopping :2402 MHz :BE CH Low :E2 Plan Test Date :2019-08-20
Temp./Humi. :27.3/62
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

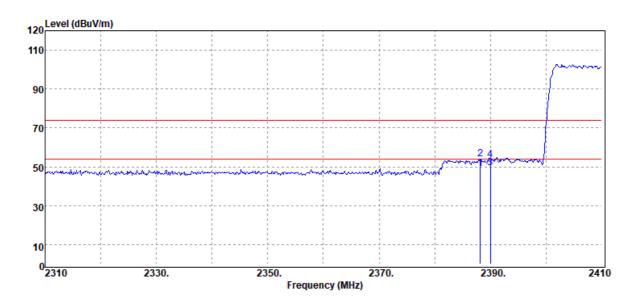

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2388.20	Average	52.37	-3.39	48.98	54.00	-5.02
2388.20	Peak	57.22	-3.39	53.83	74.00	-20.17
2390.00	Average	52.67	-3.38	49.29	54.00	-4.71
2390.00	Peak	56.94	-3.38	53.56	74.00	-20.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






:T190815W02 :BT EDR Hopping :2402 MHz :BE CH Low

:E2 Plan

**Test Date** Temp./Humi. Engineer

:2019-08-20 :27.3/62 :Kane


Measurement Antenna Pol. :HORIZONTAL

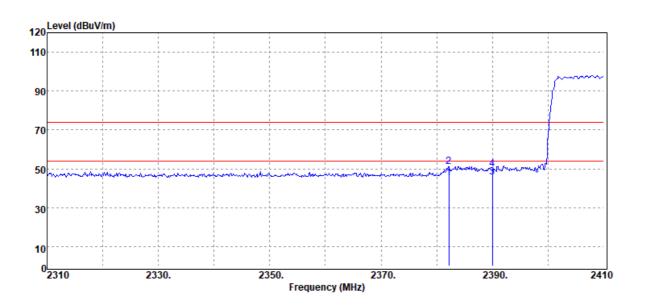

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2382.20	Average	48.78	-3.37	45.41	54.00	-8.59
2382.20	Peak	54.60	-3.37	51.23	74.00	-22.77
2390.00	Average	48.88	-3.38	45.50	54.00	-8.50
2390.00	Peak	53.25	-3.38	49.87	74.00	-24.13


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT EDR Hopping :2480 MHz :BE CH High :E2 Plan Test Date :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

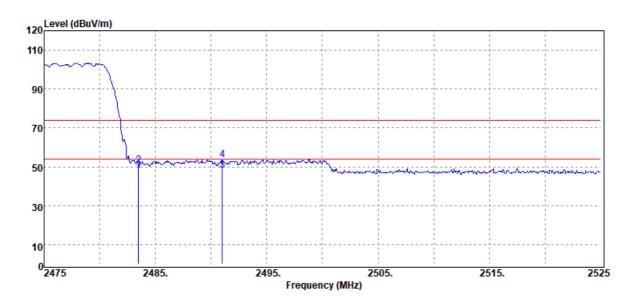

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.82	-2.83	47.99	54.00	-6.01
2483.50	Peak	53.55	-2.83	50.72	74.00	-23.28
2491.00	Average	50.95	-2.78	48.17	54.00	-5.83
2491.00	Peak	56.46	-2.78	53.68	74.00	-20.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:T190815W02 :BT EDR Hopping :2480 MHz :BE CH High

:E2 Plan

Test Date :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

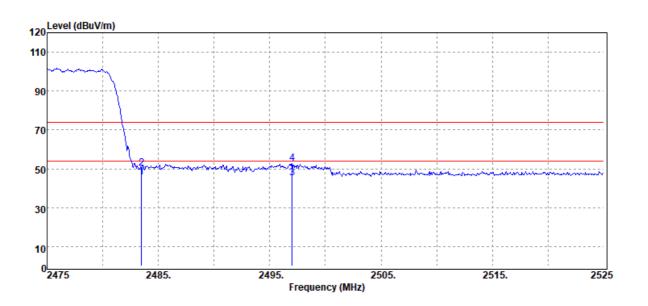

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	48.41	-2.83	45.58	54.00	-8.42
2483.50	Peak	53.27	-2.83	50.44	74.00	-23.56
2497.00	Average	48.12	-2.74	45.38	54.00	-8.62
2497.00	Peak	55.48	-2.74	52.74	74.00	-21.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



:2019-08-20

:27.3/62

:Kane

Page 50 of 72




## **Radiated Spurious Emission Measurement Result:** For Frequency from 30MHz to 1000MHz

**Project Number** :T190815W02 **Test Date Operation Band** Temp./Humi. :BT BR Fundamental Frequency :2441 MHz Engineer Operation Mode :Tx CH Mid Measurement Antenna Pol. : VERTICAL EUT Pol. :E2 Plan

100 Level (dBuV/m) 90 80 70 60 50 40 30 20 10 224. 418. 612. 806. 1000 Frequency (MHz)

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
165.80	Peak	39.50	-10.34	29.16	43.50	-14.34
231.76	Peak	47.39	-10.75	36.64	46.00	-9.36
308.39	Peak	40.47	-7.97	32.50	46.00	-13.50
385.99	Peak	42.05	-6.20	35.85	46.00	-10.15
463.59	Peak	39.34	-3.53	35.81	46.00	-10.19
772.05	Peak	32.50	1.51	34.01	46.00	-11.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2441 MHz :Tx CH Mid :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

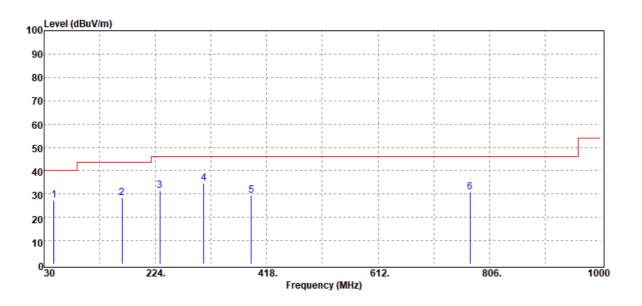

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
47.46	Peak	41.44	-14.26	27.18	40.00	-12.82
165.80	Peak	38.86	-10.34	28.52	43.50	-14.98
231.76	Peak	42.33	-10.75	31.58	46.00	-14.42
308.39	Peak	42.52	-7.97	34.55	46.00	-11.45
390.84	Peak	35.45	-5.96	29.49	46.00	-16.51
772.05	Peak	29.39	1.51	30.90	46.00	-15.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page 52 of 72



### For Frequency above 1GHz


**Project Number** :T190815W02 **Operation Band** :BT BR Fundamental Frequency :2402 MHz Operation Mode :Tx CH Low EUT Pol. :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

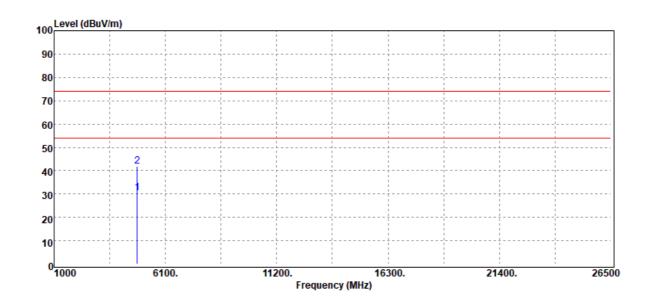

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	27.38	3.05	30.43	54.00	-23.57
4804.00	Peak	38.99	3.05	42.04	74.00	-31.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2402 MHz :Tx CH Low :E2 Plan


**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

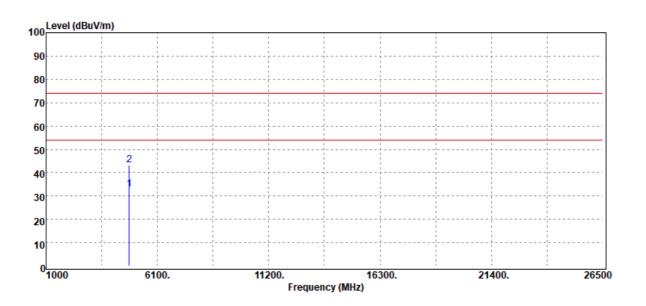

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	4804.00	Average	29.87	3.05	32.92	54.00	-21.08
	4804.00	Peak	40.22	3.05	43.27	74.00	-30.73


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2441 MHz :Tx CH Mid :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

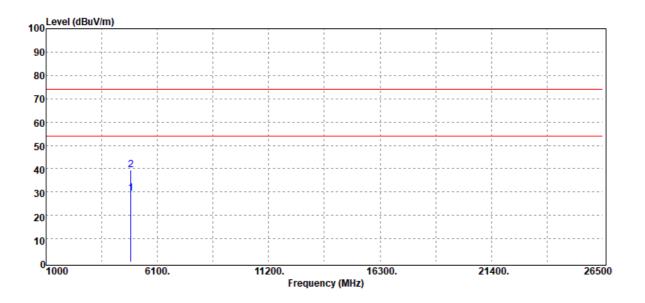

Margin
dB
-24.50
-34.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2441 MHz :Tx CH Mid :E2 Plan


**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

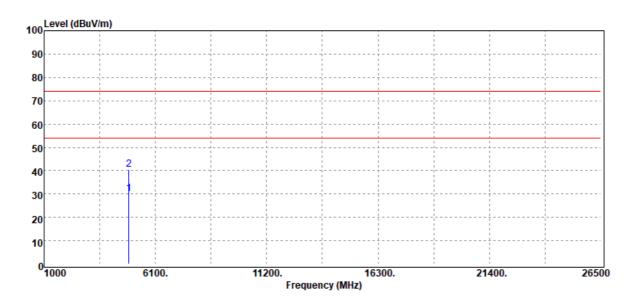

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	26.73	3.38	30.11	54.00	-23.89
4882.00	Peak	37.27	3.38	40.65	74.00	-33.35


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2480 MHz :Tx CH High :E2 Plan

**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane Measurement Antenna Pol. :VERTICAL

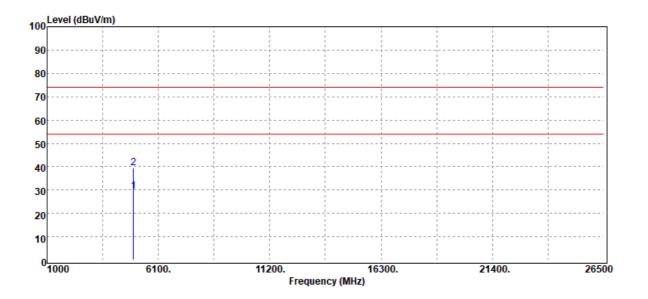

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	25.44	4.06	29.50	54.00	-24.50
4960.00	Peak	35.46	4.06	39.52	74.00	-34.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。






:T190815W02 :BT BR :2480 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-20 Temp./Humi. :27.3/62 Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

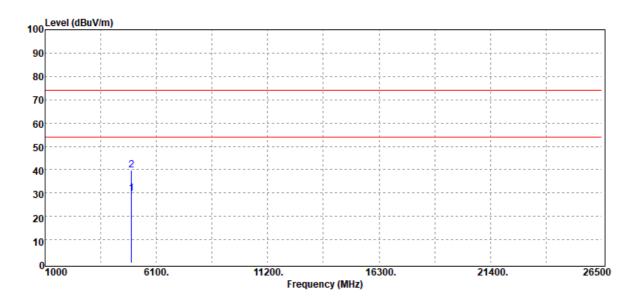

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4	960.00	Average	25.83	4.06	29.89	54.00	-24.11
4	960.00	Peak	35.58	4.06	39.64	74.00	-34.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。





## 11 FREQUENCY SEPARATION


#### **Standard Applicable** 11.1

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

## **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

#### Test Set-up 11.3



#### 11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

#### 11.5 Measurement Result


Channel separation (MHz)	Limit	Result
1	≥25 kHz or 2/3 times 20dB bandwidth	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



# **Frequency Separation Test Data**

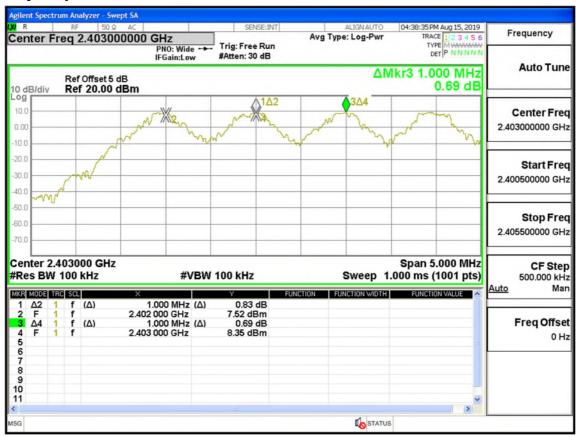

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





### 12 NUMBER OF HOPPING FREQUENCY


#### 12.1 **Standard Applicable**

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

#### **Measurement Equipment Used** 12.2

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

### 12.3 Test Set-up



#### 12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.


#### 12.5 Measurement Result

#### **Tabular Data of Total Channel Number**

	Channel Number	Limit
2.4 GHz – 2.441 GHz	40	
2.441 GHz – 2.4835 GHz	39	>15
2.4 GHz ~2.4835 GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





#### **Channel Number**

## Hopping Frequency\_GFSK\_1M\_DH5\_2400-2441 MHz

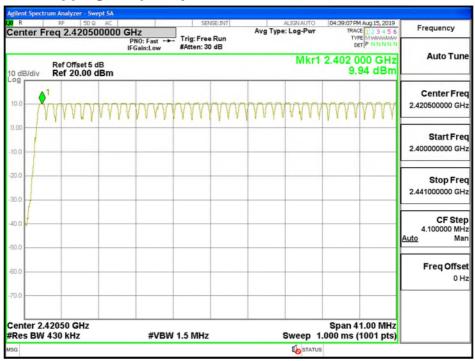

## Hopping Frequency\_GFSK\_1M\_DH5\_2441-2480 MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 62 of 72

## TIME OF OCCUPANCY (DWELL TIME)


#### **Standard Applicable** 13.1

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

#### **Measurement Equipment Used** 13.2

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUM- BER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
Bluetooth Test Set	Anritsu	MT8852B	6k00006107	08/11/2019	08/10/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412- 018	01/02/2019	01/01/2020
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2019	01/01/2020

### 13.3 Test Set-up



#### 13.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C6310:2015.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep =  $2\sim8$ ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 63 of 72

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 \* 20 ) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)\*(0.4\*20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

### Tabular Result of the Measurement

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	121.60	400ms	2.63	3.00
Low	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
Mid	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
High	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.00	1.00

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms) 1/T (kHz)		VBW setting (kHz)
	2DH1	123.20	400ms	2.60	3.00
Mid	2DH3	262.40	400ms	0.61	1.00
	2DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page 64 of 72

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms) 1/T (kHz)		VBW setting (kHz)
	3DH1	124.80	400ms	2.56	3.00
Mid	3DH3	264.00	400ms	0.61	1.00
	3DH5	307.20	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





A period time = 0.4 (s) \* 79 = 31.6 (s)

## GFSK (1Mbps):

CH Low	DH1 time slot DH3 time slot DH5 time slot	= = =		* *	(1600/2/79) (1600/4/79) (1600/6/79)	* *	31.6 31.6 31.6	= = =	121.60 262.40 308.80	(ms) (ms) (ms)
CH Mid	DH1 time slot DH3 time slot DH5 time slot	= = =	0.385 1.640 2.895	* *	(1600/2/79) (1600/4/79) (1600/6/79)	* *	31.6 31.6 31.6	= =	123.20 262.40 308.80	(ms) (ms) (ms)
CH High	DH1 time slot DH3 time slot DH5 time slot	= = =	1.010	* * *	(1600/2/79) (1600/4/79) (1600/6/79)	* *	31.6 31.6 31.6	= =	123.20 262.40 308.80	(ms) (ms) (ms)
π/4 -DQPSk	( (2Mbps):									
CH Mid	2DH1 time slot 2DH3 time slot 2DH5 time slot	=		* *	(1600/2/79) (1600/4/79) (1600/6/79)	* *	31.6 31.6 31.6	= = =	123.20 262.40 308.80	(ms) (ms) (ms)
8-DPSK (3Mbps):										

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

3DH1 time slot = 0.390 \*

3DH3 time slot = 1.650 \*

3DH5 time slot = 2.880 \*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

CH Mid

(1600/2/79) \* 31.6 = 124.80 (ms)

(1600/4/79) \* 31.6 = 264.00 (ms)

(1600/6/79) \* 31.6 = 307.20 (ms)



Page 66 of 72

GFSK (1Mbps) for AFH Mode							
Hopping Channel PACKET TYPE Measurement Result Limit							
Number		(ms)	(ms)				
20	DH5	154.40	400ms				
	π/4 DQPSK (2Mb	ps) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement Result					
Number	PACKETTIPE	(ms)	(ms)				
20	2DH5	154.40	400ms				
	8-DPSK (3Mbps	s) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement Posult					
Number	PACKETTIPE	(ms)	(ms)				
20	3DH5	153.60	400ms				

## GFSK (1Mbps):

DH5 time slc =	2.895	(ms)	*	(800/6/20) * 8 =	154.40	(ms)
π/4 -DQPSK (2Mbps):						
2DH5 time s =	2.895	(ms)	*	(800/6/20) * 8 =	154.40	(ms)
8-DPSK (3Mbps):						
3DH5 time s =	2.880	(ms)	*	(800/6/20) * 8 =	153.60	(ms)


## 13.6 Measurement Result

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




## Dwell Time\_GFSK\_1M\_DH1\_2402MHz

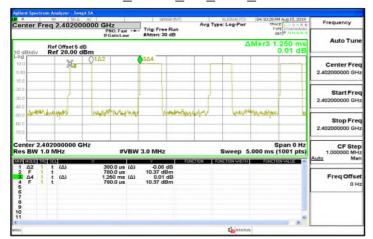

## Dwell Time\_GFSK\_1M\_DH1\_2441MHz



### Dwell Time GFSK 1M DH1 2480MHz

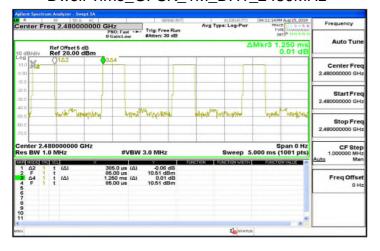

## Dwell Time\_GFSK\_1M\_DH3\_2402MHz



## Dwell Time\_GFSK\_1M\_DH3\_2441MHz



### Dwell Time GFSK 1M DH3 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## Dwell Time\_GFSK\_1M\_DH5\_2402MHz




## Dwell Time\_GFSK\_1M\_DH5\_2441MHz

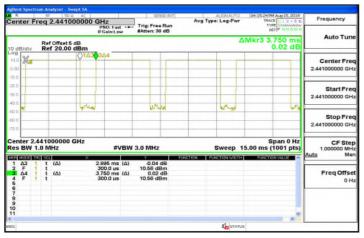


### Dwell Time GFSK 1M DH5 2480MHz




## Dwell Time\_π4DQPSK\_2M\_DH1\_2402MHz

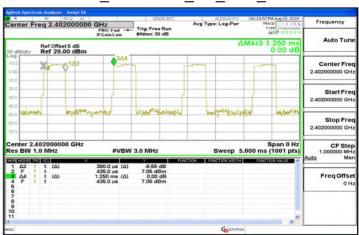

## Dwell Time\_π4DQPSK\_2M\_DH1\_2441MHz

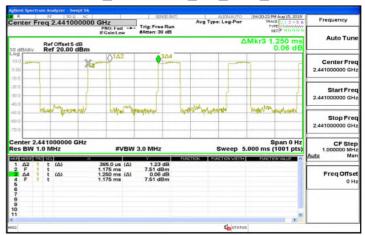


## Dwell Time π4DQPSK 2M DH1 2480MHz

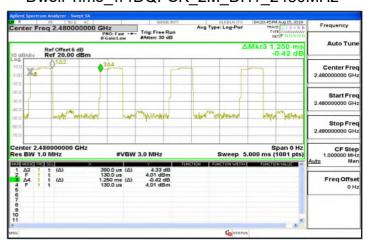


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




## Dwell Time $\pi 4DQPSK_2M_DH3_2402MHz$

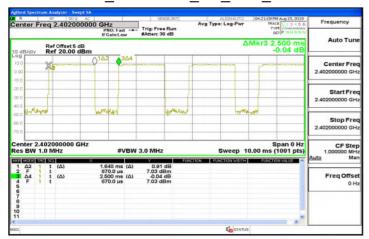


## Dwell Time $\pi 4DQPSK$ 2M DH3 2441MHz

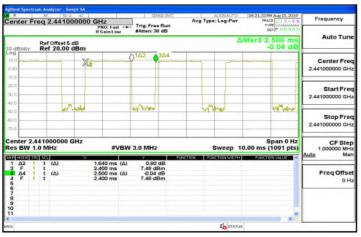

## Dwell Time $\pi$ 4DQPSK 2M DH3 2480MHz

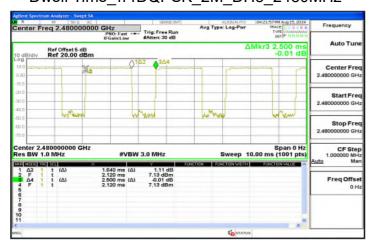


## Dwell Time\_π4DQPSK\_2M\_DH5\_2402MHz

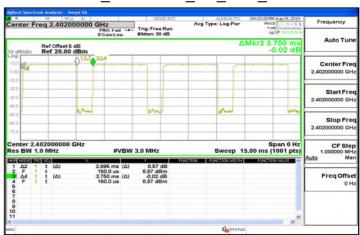

## Dwell Time\_π4DQPSK\_2M\_DH5\_2441MHz




## Dwell Time π4DQPSK 2M DH5 2480MHz

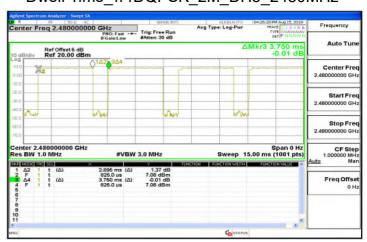


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




## Dwell Time\_8DPSK\_3M\_DH1\_2402MHz

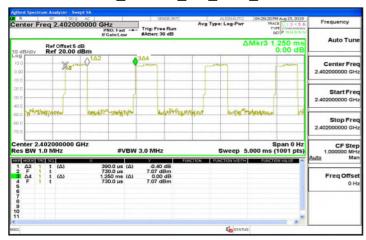


## Dwell Time\_8DPSK\_3M\_DH1\_2441MHz

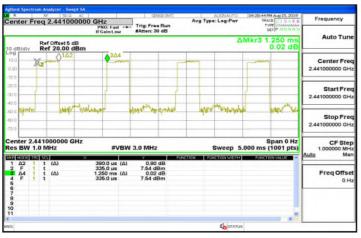

### Dwell Time 8DPSK 3M DH1 2480MHz

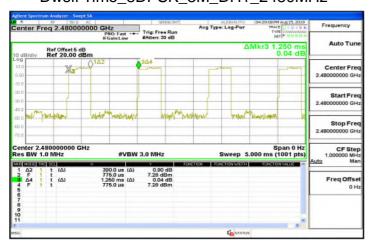


## Dwell Time\_8DPSK\_3M\_DH3\_2402MHz

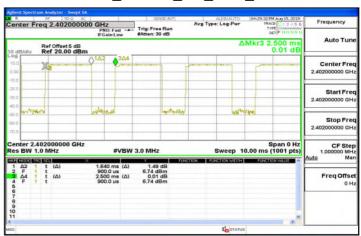

## Dwell Time\_8DPSK\_3M\_DH3\_2441MHz



### Dwell Time 8DPSK 3M DH3 2480MHz

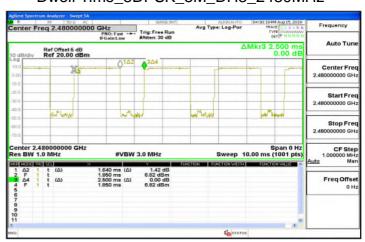

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 71 of 72

## Dwell Time\_8DPSK\_3M\_DH5\_2402MHz



## Dwell Time\_8DPSK\_3M\_DH5\_2441MHz



### Dwell Time 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page 72 of 72

### 14 ANTENNA REQUIREMENT

## **Standard Applicable**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

#### 14.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/tems">www.sgs.com/tems</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/tems">www.sgs.com/tems</a> and conditions htm</a> and for electronic format document, and printing the first of the first documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law