



FCC RADIO TEST REPORT

FCC ID : NM82Q6P100
Equipment : Headset
Model Name : 2Q6P100
Applicant : HTC Corporation
No.88, Sec. 3, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
Manufacturer : HTC Corporation
No.23, Xinghua Rd., Taoyuan District,
Taoyuan City, Taiwan 330
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 22, 2019 and testing was started from Feb. 12, 2019 and completed on Mar. 12, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements	33
4 List of Measuring Equipment.....	34
5 Uncertainty of Evaluation	35
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR912242F	01	Initial issue of report	Mar. 26, 2019

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 6.24 dB at 160.950 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 15.78 dB at 0.908 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Maggie Chiang



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, and 2.4GHz Proprietary Radio

Product Specification subjective to this standard	
Antenna Type	WLAN: <Ant. 1>: PCB Antenna <Ant. 2>: PCB Antenna Bluetooth: PCB Antenna 2.4GHz Proprietary Radio: PCB Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH15-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2.4GHz Proprietary Radio	3	2403	31	2431	59	2459
	5	2405	33	2433	61	2461
	7	2407	35	2435	63	2463
	9	2409	37	2437	65	2465
	11	2411	39	2439	67	2467
	13	2413	41	2441	69	2469
	15	2415	43	2443	71	2471
	17	2417	45	2445	73	2473
	19	2419	47	2447	75	2475
	21	2421	49	2449	77	2477
	23	2423	51	2451	79	2479
	25	2425	53	2453	-	-
	27	2427	55	2455	-	-
	29	2429	57	2457	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	2.4GHz Proprietary Radio
Conducted Test Cases	Mode 1: 2.4GHz Proprietary Radio Tx CH03_2403 MHz Mode 2: 2.4GHz Proprietary Radio Tx CH41_2441 MHz Mode 3: 2.4GHz Proprietary Radio Tx CH79_2479 MHz
Radiated Test Cases	Mode 1: 2.4GHz Proprietary Radio Tx CH03_2403 MHz Mode 2: 2.4GHz Proprietary Radio Tx CH41_2441 MHz Mode 3: 2.4GHz Proprietary Radio Tx CH79_2479 MHz
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + H-Pattern + Controller Power on (2.4GHz RF Link) + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, the tests were performed with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
3.	Notebook	ASUS	P2430U	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Controller	HTC	2Q6M200	N/A	N/A	N/A
5.	Mobile Phone	SONY	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "Tool" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

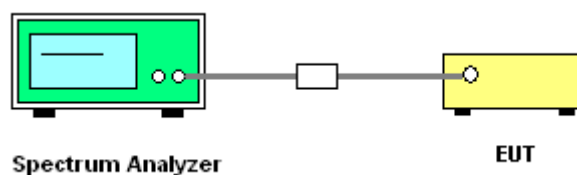




3.1.5 Test Result of 6dB Bandwidth


Test Engineer :	Howard Lin	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
2.4GHz	2Mbps	1	03	2403	0.880	0.50	Pass
2.4GHz	2Mbps	1	41	2441	0.860	0.50	Pass
2.4GHz	2Mbps	1	79	2479	0.840	0.50	Pass


6 dB Bandwidth Plot on Channel 03

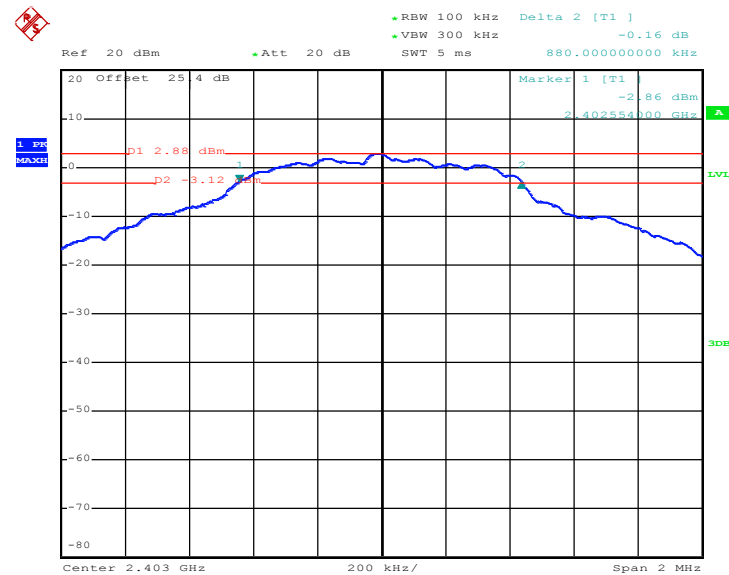

Date: 12.MAR.2019 17:01:40

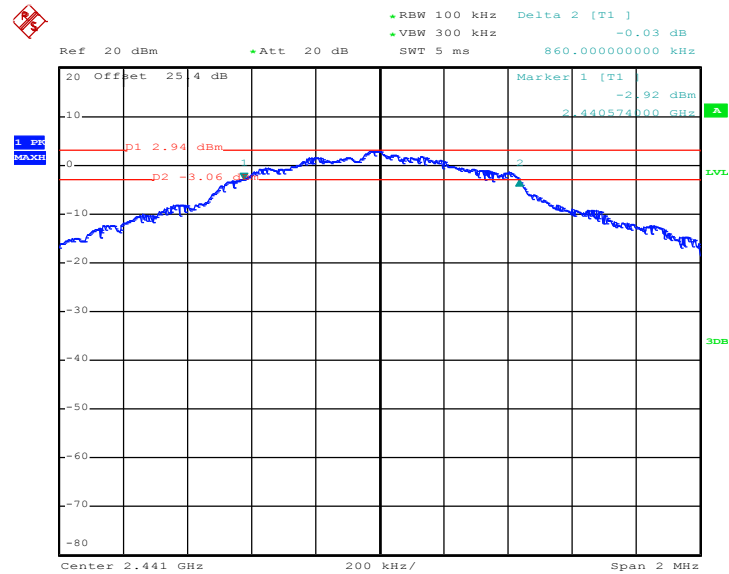6 dB Bandwidth Plot on Channel 41


Date: 12.MAR.2019 17:15:51

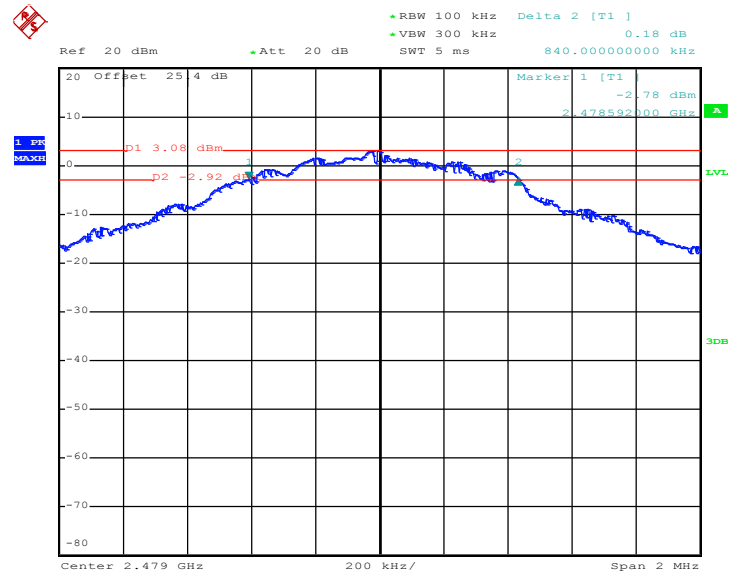6 dB Bandwidth Plot on Channel 79


Date: 12.MAR.2019 17:19:20




3.1.6 Test Result of 99% Occupied Bandwidth


Test Engineer :	Howard Lin	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	Pass/Fail
2.4GHz	2Mbps	1	03	2403	1.602	Pass
2.4GHz	2Mbps	1	41	2441	1.636	Pass
2.4GHz	2Mbps	1	79	2479	1.638	Pass


99% Bandwidth Plot on Channel 03

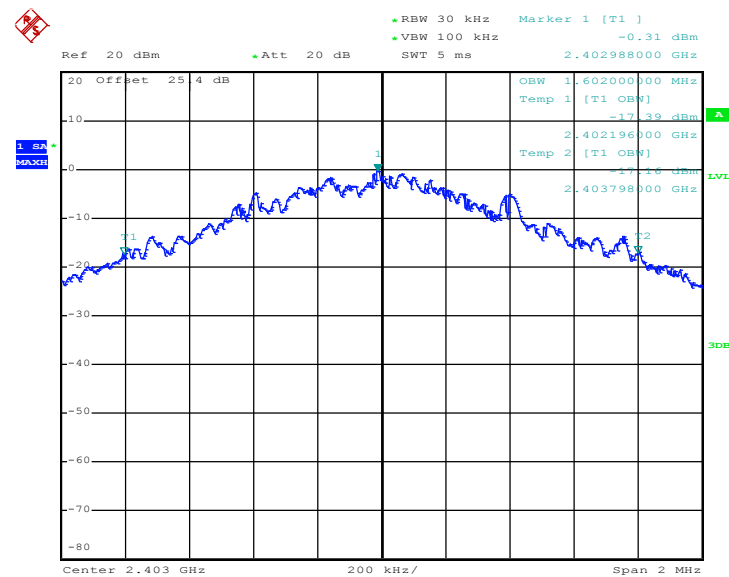

Date: 12.MAR.2019 17:14:07

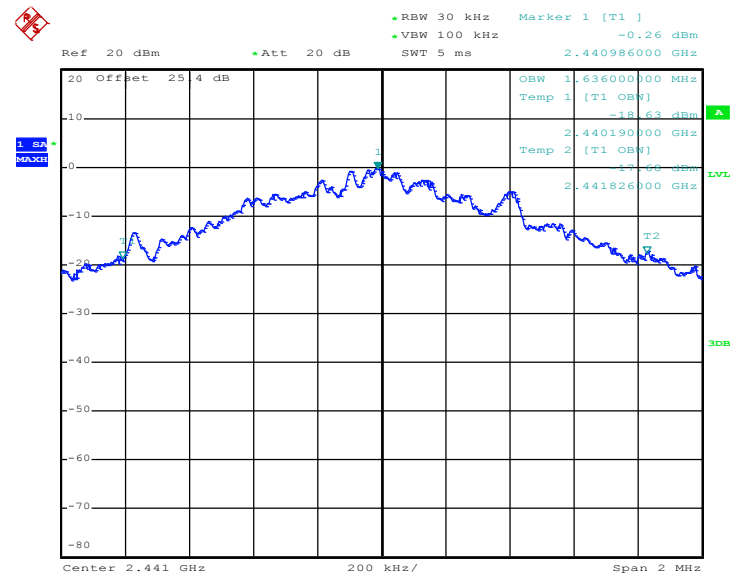99% Occupied Bandwidth Plot on Channel 41


Date: 12.MAR.2019 17:18:06

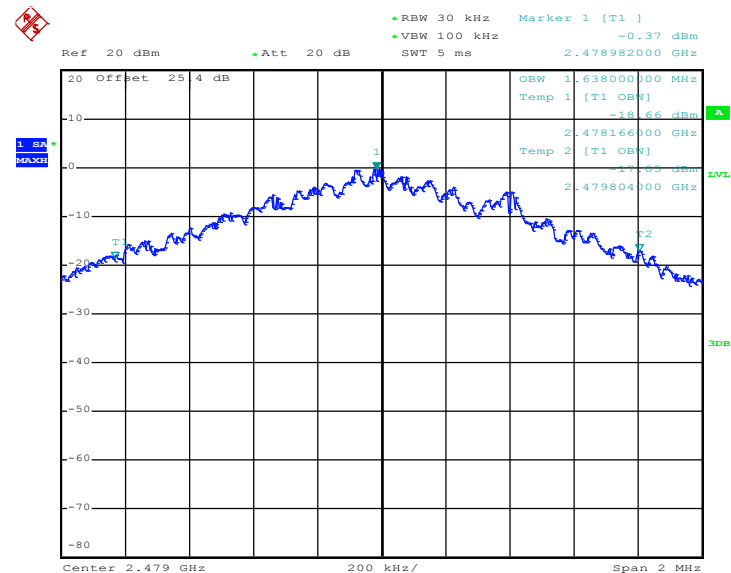99% Occupied Bandwidth Plot on Channel 79


Date: 12.MAR.2019 17:25:27

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

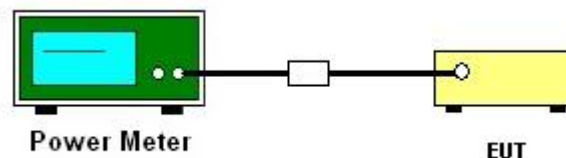

3.2.5 Test Result of Average output Power

Test Engineer :	Howard Lin				Temperature :	21~25°C
					Relative Humidity :	51~54%
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
2.4GHz	2Mbps	1	03	2403	0.47	3.20
2.4GHz	2Mbps	1	41	2441	0.47	3.10
2.4GHz	2Mbps	1	79	2479	0.47	3.20

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

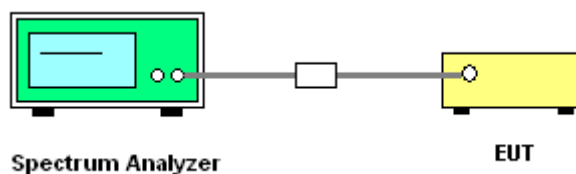




3.3.5 Test Result of Power Spectral Density

Test Engineer :	Howard Lin	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/100kHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
2.4GHz	2Mbps	1	03	2403	2.90	-10.72	-1.00	8.00	Pass
2.4GHz	2Mbps	1	41	2441	2.97	-9.90	-1.00	8.00	Pass
2.4GHz	2Mbps	1	79	2479	3.11	-9.50	-1.00	8.00	Pass

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 03

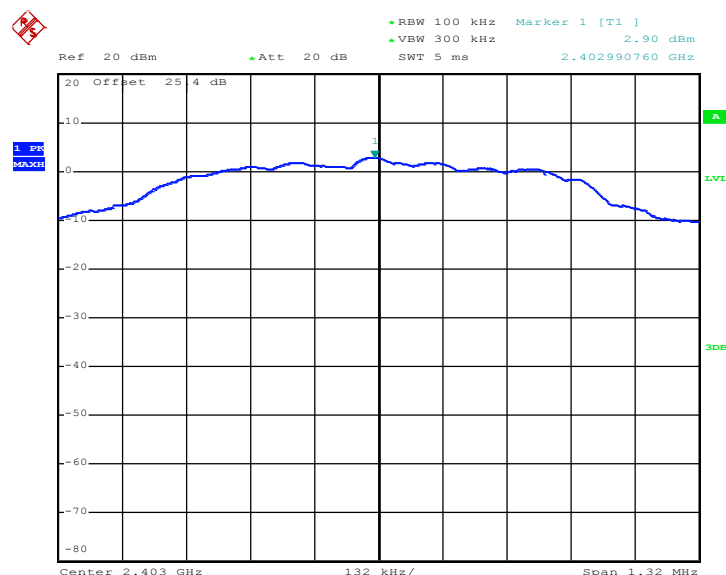

Date: 12.MAR.2019 17:02:35




PSD 100kHz Plot on Channel 41

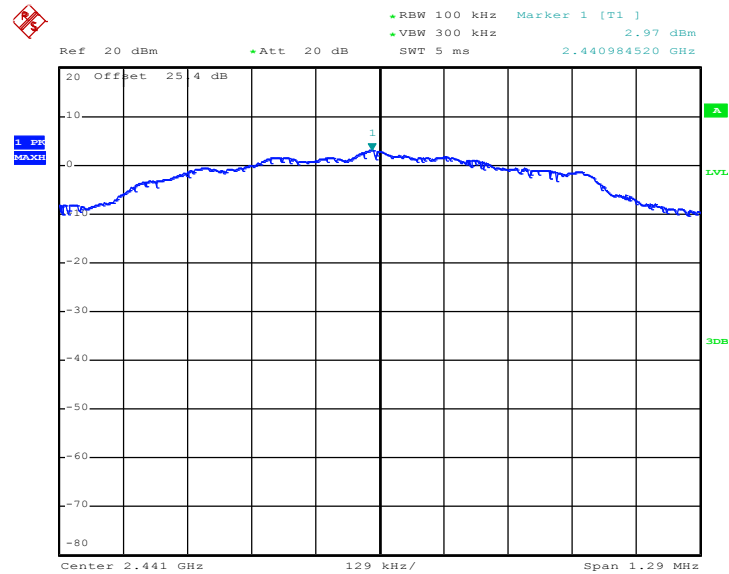

Date: 12.MAR.2019 17:16:22


PSD 100kHz Plot on Channel 79

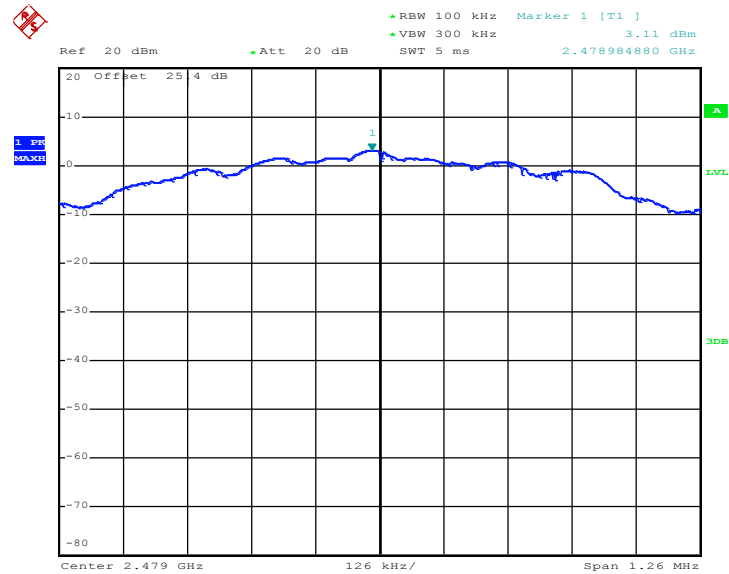

Date: 12.MAR.2019 17:19:51


3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 03

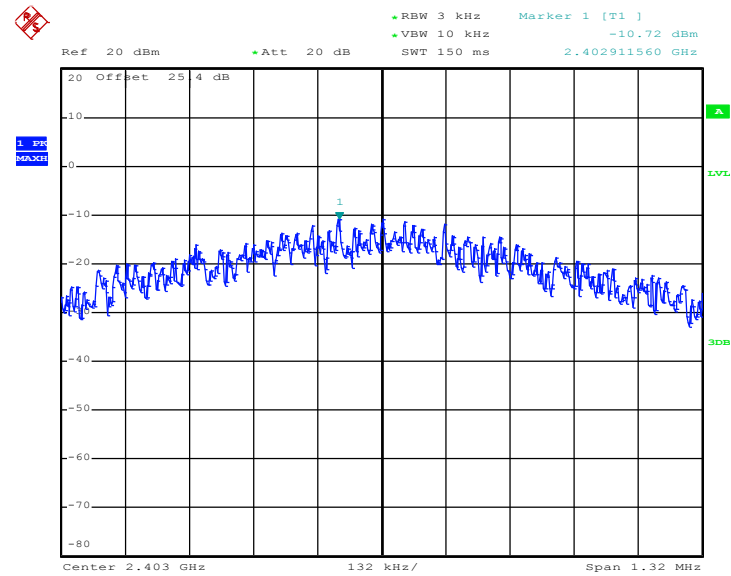

Date: 12.MAR.2019 17:01:54


PSD 3kHz Plot on Channel 41

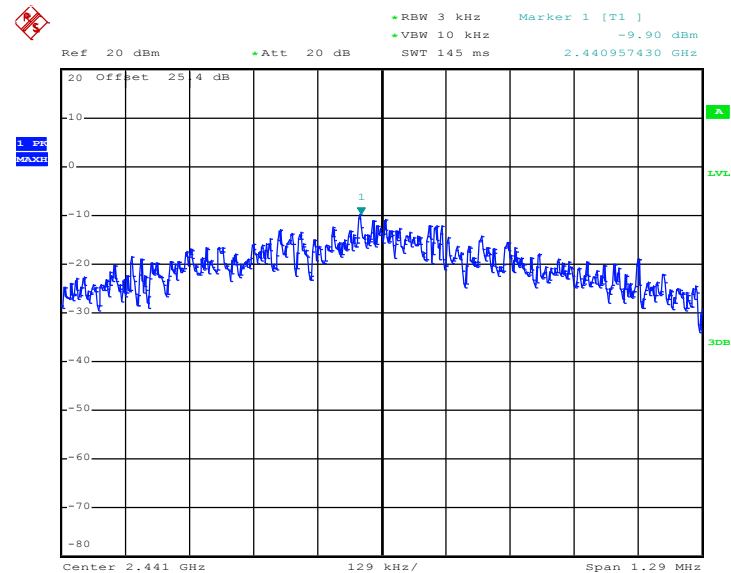

Date: 12.MAR.2019 17:16:07



PSD 3kHz Plot on Channel 79

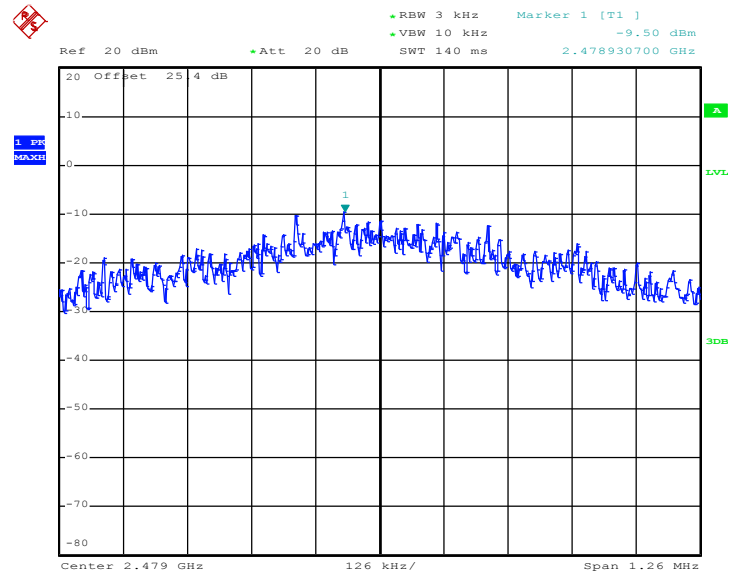

Date: 12.MAR.2019 17:19:35

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

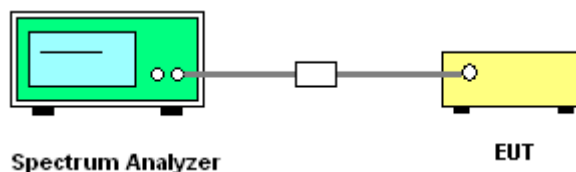




3.4.5 Test Result of Conducted Band Edges Plots


Test Engineer :	Howard Lin	Temperature :	21~25°C
		Relative Humidity :	51~54%

Low Band Edge Plot on Channel 03

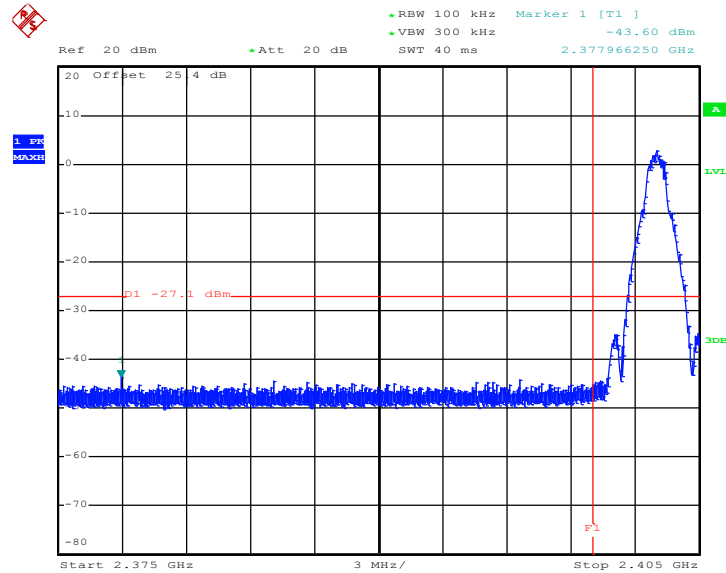

Date: 12.MAR.2019 17:13:39

High Band Edge Plot on Channel 79

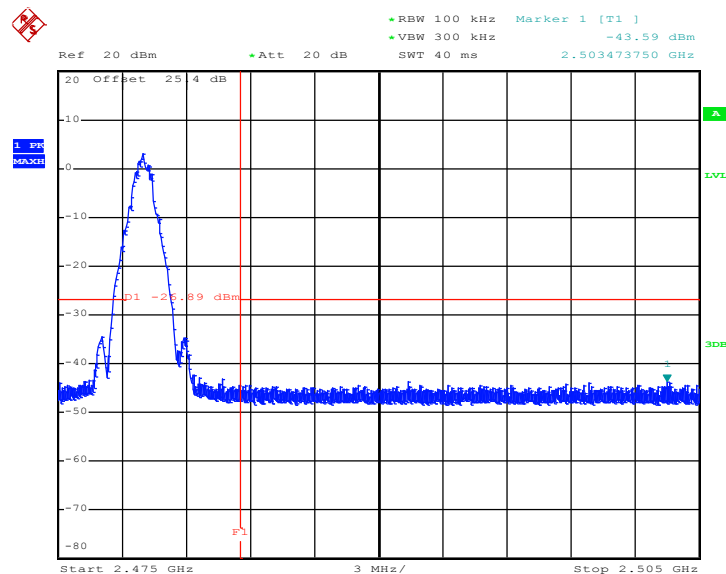


Date: 12.MAR.2019 17:23:46



3.4.6 Test Result of Conducted Spurious Emission Plots


Test Engineer :	Howard Lin	Temperature :	21~25°C
		Relative Humidity :	51~54%

Conducted Spurious Emission Plot on 2.4GHz Channel 03

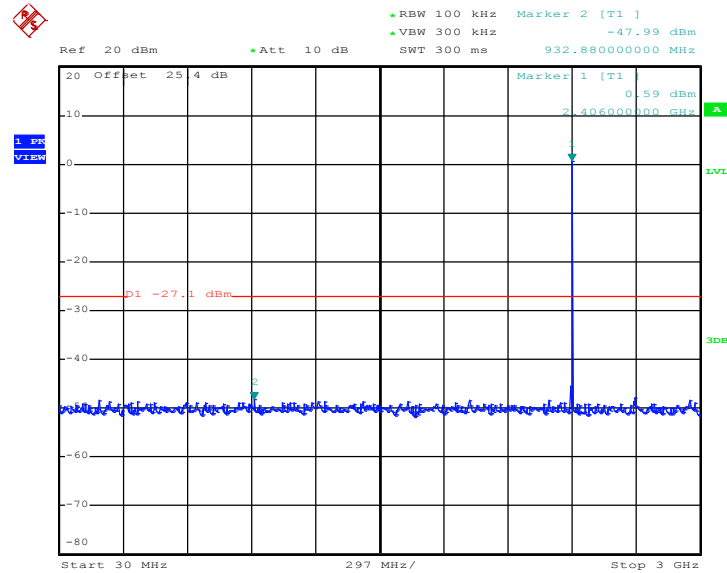

Date: 12.MAR.2019 17:03:33

Conducted Spurious Emission Plot on 2.4GHz Channel 03

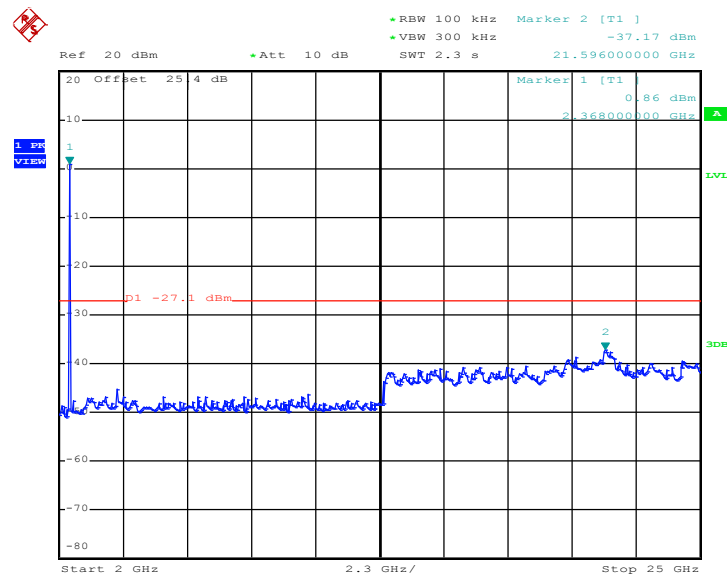

Date: 12.MAR.2019 17:03:46



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

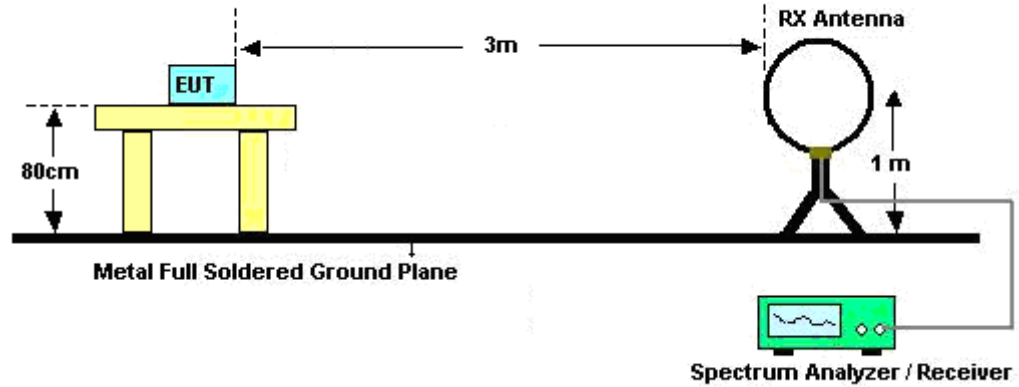

For radiated emissions from 30MHz to 1GHz

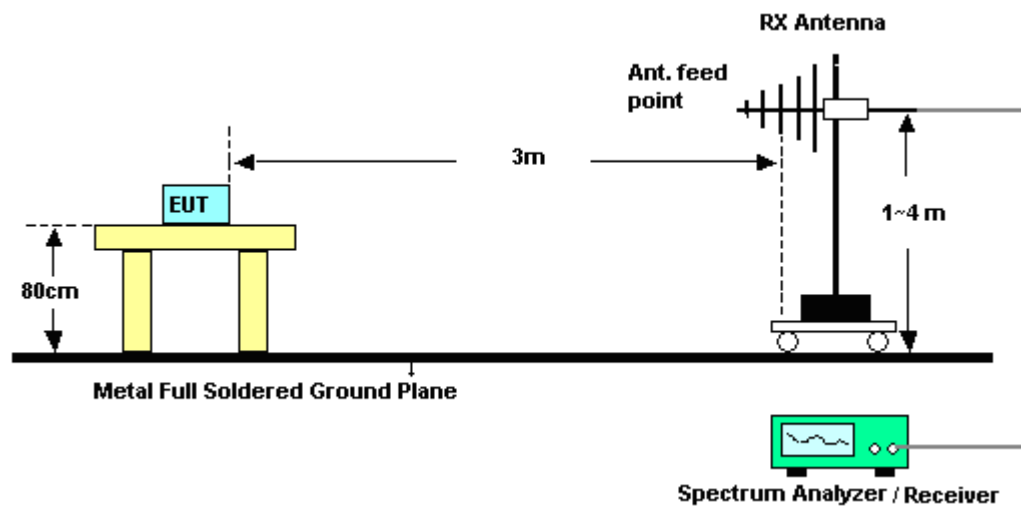

For radiated emissions above 1GHz

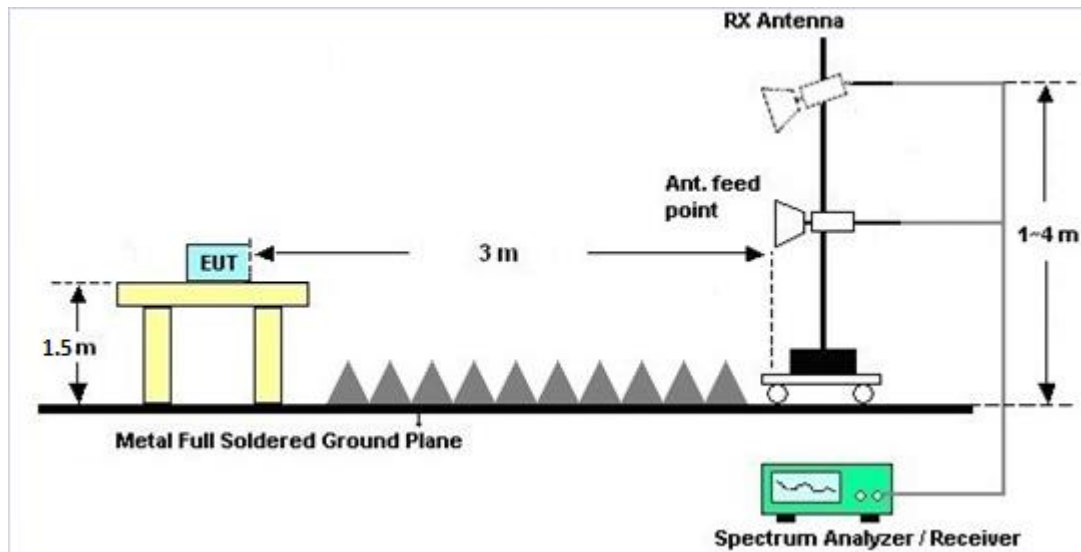

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

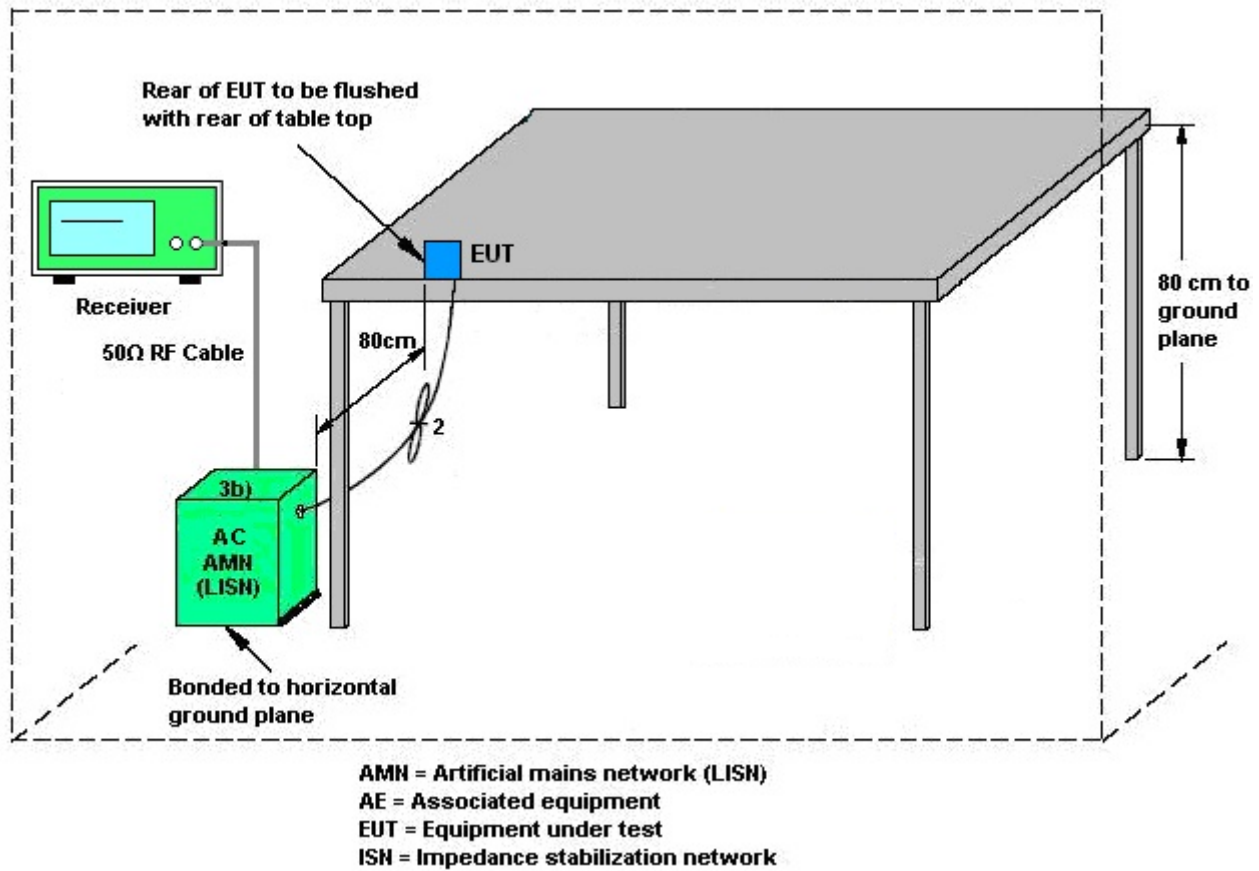

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RadiPower	15100041SN009	10MHz~6GHz	May 07, 2018	Feb. 12, 2019~Mar. 12, 2019	May 06, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV 30	100895	9kHz~30GHz	Apr. 20, 2018	Feb. 12, 2019~Mar. 12, 2019	Apr. 19, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Apr. 17, 2018	Feb. 12, 2019~Mar. 12, 2019	Apr. 16, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 19, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Feb. 19, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Feb. 19, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Feb. 19, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 19, 2019	N/A	Conduction (CO05-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Sep. 14, 2018	Feb. 19, 2019	Sep. 13, 2019	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Nov. 08, 2018	Feb. 19, 2019	Nov. 07, 2019	Conduction (CO05-HY)
ISN	TESEQ	ISN T8-Cat6	38909	N/A	Jan. 30, 2019	Feb. 19, 2019	Jan. 29, 2020	Conduction (CO05-HY)
ISN Cable	Woken	RG-400	N/A	N/A	Dec. 31, 2018	Feb. 19, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Mar. 29, 2018	Mar. 07, 2019~Mar. 08, 2019	Mar. 28, 2019	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00802N1D01N-06	47020&06	30MHz to 1GHz	Oct. 13, 2018	Mar. 07, 2019~Mar. 08, 2019	Oct. 12, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Oct. 17, 2018	Mar. 07, 2019~Mar. 08, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Mar. 07, 2019~Mar. 08, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000550006	1GHz~18GHz	Jul. 10, 2018	Mar. 07, 2019~Mar. 08, 2019	Jul. 09, 2019	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2018	Mar. 07, 2019~Mar. 08, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 01, 2018	Mar. 07, 2019~Mar. 08, 2019	Oct. 31, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	Apr. 25, 2018	Mar. 07, 2019~Mar. 08, 2019	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 07, 2019~Mar. 08, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 07, 2019~Mar. 08, 2019	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-000451	N/A	N/A	Mar. 07, 2019~Mar. 08, 2019	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 16, 2018	Mar. 07, 2019~Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4	30M-18G	Apr. 16, 2018	Mar. 07, 2019~Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	MTJ	000000-MT18A-100D3210	30M-18G	Apr. 16, 2018	Mar. 07, 2019~Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN1	3 GHz Highpass	Sep. 16, 2018	Mar. 07, 2019~Mar. 08, 2019	Sep. 15, 2019	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1G Low Pass	Sep. 16, 2018	Mar. 07, 2019~Mar. 08, 2019	Sep. 15, 2019	Radiation (03CH15-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26℃
		Relative Humidity :	51~53%

EUT Information

Report NO : 912242
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

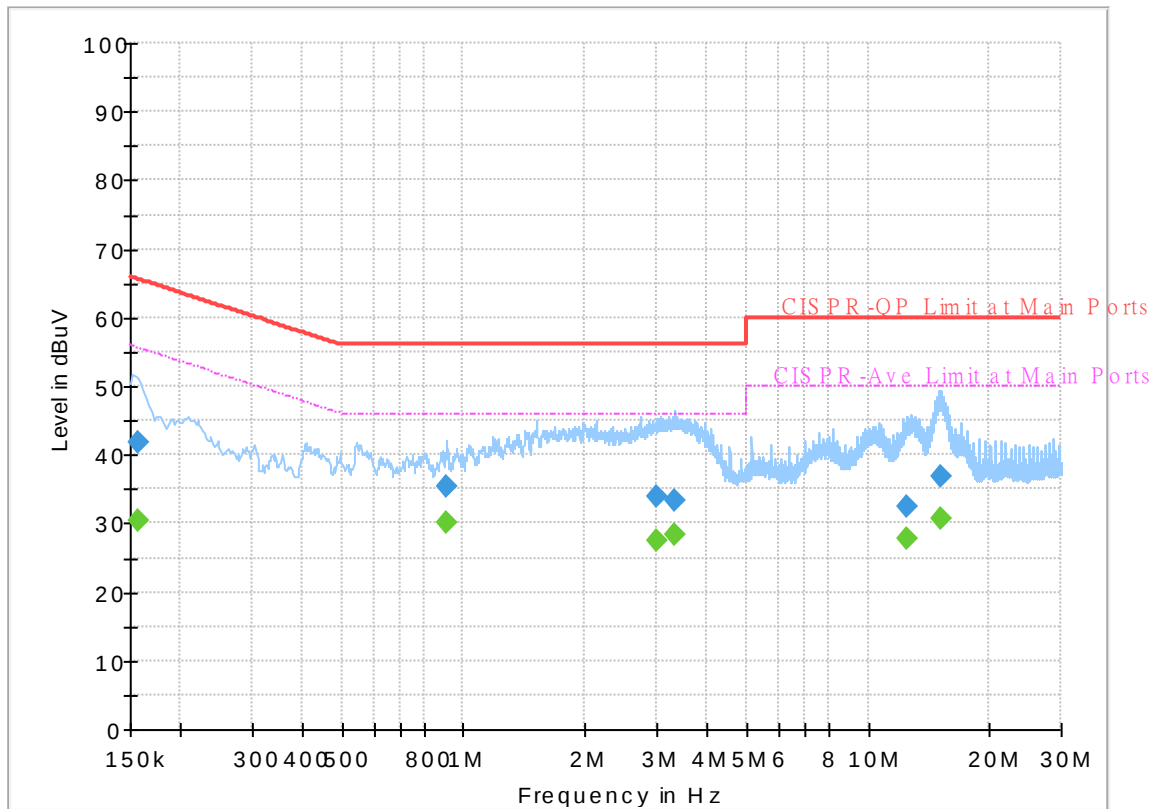


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	30.47	55.63	25.16	L1	OFF	19.5
0.156750	41.76	---	65.63	23.87	L1	OFF	19.5
0.908250	---	30.22	46.00	15.78	L1	OFF	19.6
0.908250	35.35	---	56.00	20.65	L1	OFF	19.6
3.012000	---	27.42	46.00	18.58	L1	OFF	19.6
3.012000	34.05	---	56.00	21.95	L1	OFF	19.6
3.340500	---	28.25	46.00	17.75	L1	OFF	19.7
3.340500	33.45	---	56.00	22.55	L1	OFF	19.7
12.507000	---	27.79	50.00	22.21	L1	OFF	20.0
12.507000	32.48	---	60.00	27.52	L1	OFF	20.0
15.168750	---	30.79	50.00	19.21	L1	OFF	20.1
15.168750	36.97	---	60.00	23.03	L1	OFF	20.1

EUT Information

Report NO : 912242
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

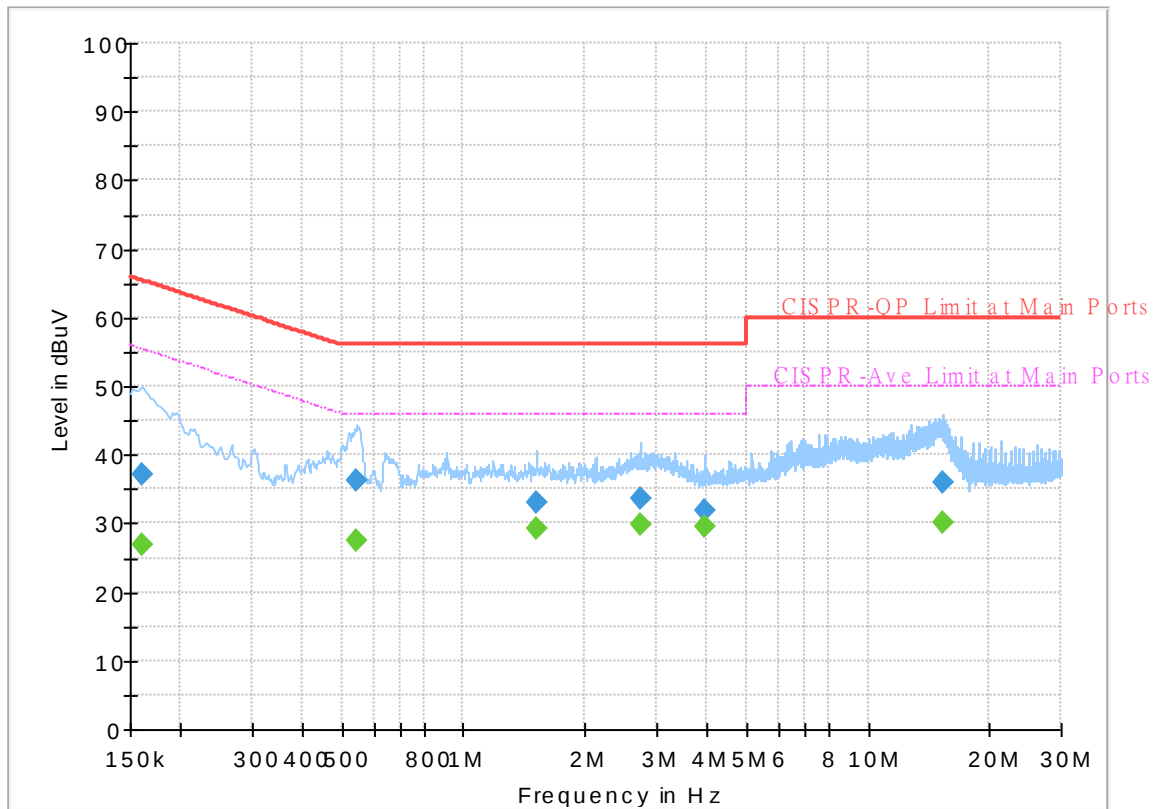

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	26.91	55.40	28.49	N	OFF	19.5
0.161250	37.01	---	65.40	28.39	N	OFF	19.5
0.546000	---	27.36	46.00	18.64	N	OFF	19.5
0.546000	36.32	---	56.00	19.68	N	OFF	19.5
1.518000	---	29.34	46.00	16.66	N	OFF	19.6
1.518000	33.10	---	56.00	22.90	N	OFF	19.6
2.728500	---	29.96	46.00	16.04	N	OFF	19.6
2.728500	33.77	---	56.00	22.23	N	OFF	19.6
3.943500	---	29.44	46.00	16.56	N	OFF	19.7
3.943500	31.81	---	56.00	24.19	N	OFF	19.7
15.364500	---	30.06	50.00	19.94	N	OFF	20.1
15.364500	35.91	---	60.00	24.09	N	OFF	20.1



Appendix B. Radiated Spurious Emission

Test Engineer :	BigShow Wang	Temperature :	24.5~25.3°C
		Relative Humidity :	49~53%

2.4GHz 2400~2483.5MHz

2.4G Tx (Band Edge @ 3m)

Wifi	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4G Tx CH 03 2403MHz		2340.975	54.14	-19.86	74	41.62	27.7	15.7	30.88	391	347	P	H
		2320.5	43.89	-10.11	54	31.34	27.77	15.67	30.89	391	347	A	H
	*	2403	90.48	-	-	77.94	27.6	15.79	30.85	391	347	P	H
	*	2403	89.65	-	-	77.11	27.6	15.79	30.85	391	347	A	H
													H
													H
		2351.685	54.24	-19.76	74	41.73	27.67	15.72	30.88	236	90	P	V
		2330.16	43.89	-10.11	54	31.32	27.77	15.69	30.89	236	90	A	V
	*	2403	97.21	-	-	84.67	27.6	15.79	30.85	236	90	P	V
	*	2403	96.35	-	-	83.81	27.6	15.79	30.85	236	90	A	V
													V
													V
2.4G Tx CH 41 2441MHz		2336.88	53.46	-20.54	74	40.95	27.7	15.7	30.89	349	130	P	H
		2380.7	43.59	-10.41	54	31.06	27.63	15.76	30.86	349	130	A	H
	*	2441	87.93	-	-	75.31	27.6	15.85	30.83	349	130	P	H
	*	2441	87.1	-	-	74.48	27.6	15.85	30.83	349	130	A	H
		2498.04	53.07	-20.93	74	40.55	27.4	15.93	30.81	349	130	P	H
		2488.03	43.41	-10.59	54	30.92	27.4	15.91	30.82	349	130	A	H
		2338.7	53.89	-20.11	74	41.38	27.7	15.7	30.89	207	89	P	V
		2371.32	43.62	-10.38	54	31.1	27.63	15.75	30.86	207	89	A	V
	*	2441	97.45	-	-	84.83	27.6	15.85	30.83	207	89	P	V
	*	2441	96.45	-	-	83.83	27.6	15.85	30.83	207	89	A	V
		2486.28	52.81	-21.19	74	40.25	27.47	15.91	30.82	207	89	P	V
		2498.18	43.52	-10.48	54	31	27.4	15.93	30.81	207	89	A	V



2.4G Tx CH 79 2479MHz	*	2479	86.52	-	-	73.97	27.47	15.9	30.82	398	85	P	H
	*	2479	85.17	-	-	72.62	27.47	15.9	30.82	398	85	A	H
		2484.28	53.98	-20.02	74	41.42	27.47	15.91	30.82	398	85	P	H
		2492.16	43.85	-10.15	54	31.34	27.4	15.92	30.81	398	85	A	H
													H
													H
	*	2479	95.76	-	-	83.21	27.47	15.9	30.82	254	88	P	V
	*	2479	94.95	-	-	82.4	27.47	15.9	30.82	254	88	A	V
		2483.76	56.17	-17.83	74	43.61	27.47	15.91	30.82	254	88	P	V
		2483.52	44.3	-9.7	54	31.74	27.47	15.91	30.82	254	88	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

2.4G Tx (Harmonic @ 3m)

Wifi Ant 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4G Tx CH 03 2403MHz		4806	40.63	-33.37	74	58.92	31.3	8.45	58.04	100	0	P	H
													H
													H
													H
		4806	42.12	-31.88	74	60.41	31.3	8.45	58.04	100	0	P	V
													V
													V
													V
2.4G Tx CH 41 2441MHz		4882	39.82	-34.18	74	57.96	31.3	8.67	58.11	100	0	P	H
		7323	45.25	-28.75	74	56.09	36.23	11.27	58.34	100	0	P	H
													H
													H
		4882	41.88	-32.12	74	60.02	31.3	8.67	58.11	100	0	P	V
		7323	45.27	-28.73	74	56.11	36.23	11.27	58.34	100	0	P	V
													V
													V
2.4G Tx CH 79 2479MHz		4958	40.54	-33.46	74	58.34	31.47	8.9	58.17	100	0	P	H
		7437	45.18	-28.82	74	55.56	36.6	11.33	58.31	100	0	P	H
													H
													H
		4958	43.1	-30.9	74	60.9	31.47	8.9	58.17	100	0	P	V
		7437	45	-29	74	55.38	36.6	11.33	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz Tx (LF)

Wifi	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4G Tx LF		153.19	36.19	-7.31	43.5	50.17	16.9	1.62	32.5	-	-	P	H
		160.95	37.26	-6.24	43.5	51.67	16.4	1.69	32.5	164	0	Q	H
		224	38.2	-7.8	46	53.17	15.62	1.91	32.5	151	12	Q	H
		229.82	38.25	-7.75	46	52.66	16.18	1.92	32.51	145	13	Q	H
		253.1	39.41	-6.59	46	50.9	18.97	2.06	32.52	-	-	P	H
		386.96	34.54	-11.46	46	43.26	21.38	2.45	32.55	-	-	P	H
													H
													H
													H
													H
													H
													H
		47.46	33.19	-6.81	40	49.26	15.67	0.85	32.59	100	0	P	V
		160.95	33.11	-10.39	43.5	47.51	16.41	1.69	32.5	-	-	P	V
		230.79	35.97	-10.03	46	50.27	16.28	1.93	32.51	-	-	P	V
		254.07	35.52	-10.48	46	46.89	19.09	2.06	32.52	-	-	P	V
		462.62	31.67	-14.33	46	38.24	23.35	2.64	32.56	-	-	P	V
		894.27	37.86	-8.14	46	37.01	28.81	3.72	31.68	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	BigShow Wang	Temperature :	24.5~25.3°C
		Relative Humidity :	49~53%





Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





2.4GHz Tx (Band Edge @ 3m)

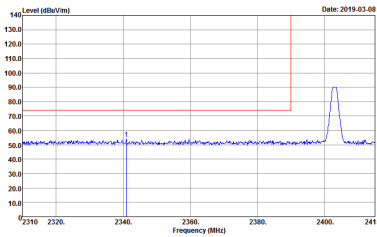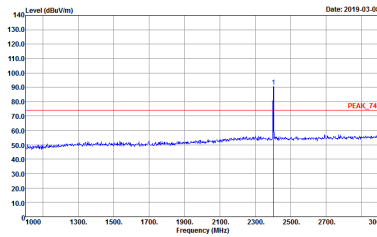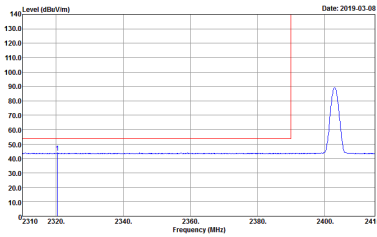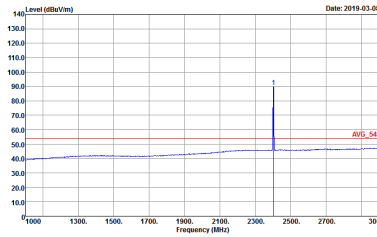2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH03 2403MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 1	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 1
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 1	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 1

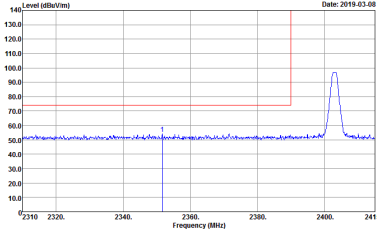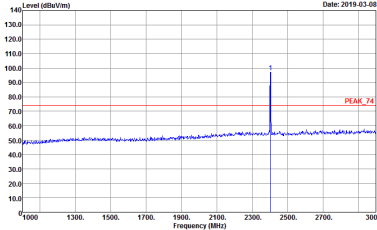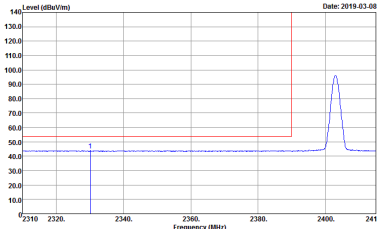
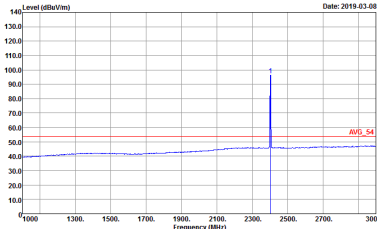


2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH03 2403MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 1	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 1
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 1	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 1

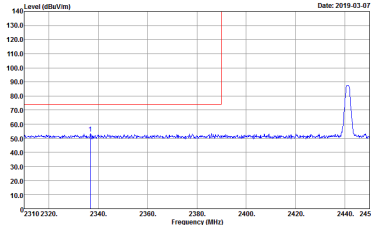
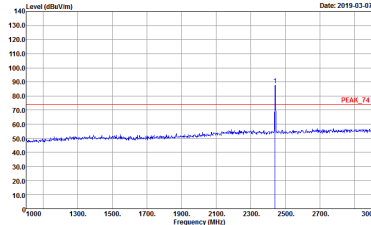
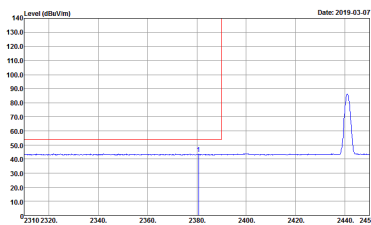
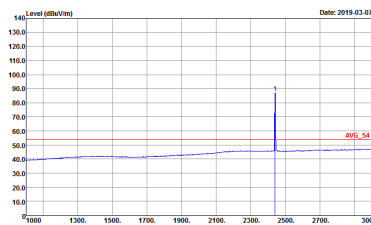




2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH41 2441MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 2	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 2
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 2	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 2

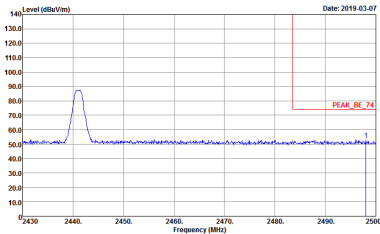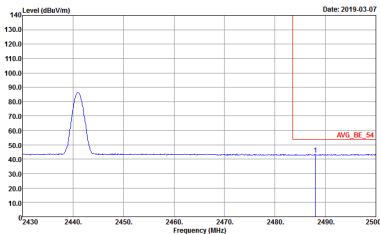





2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH41 2441MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 9120D_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 2	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 9120D_15_1620 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 2	Left blank

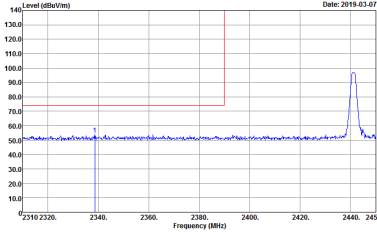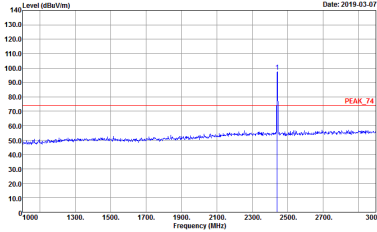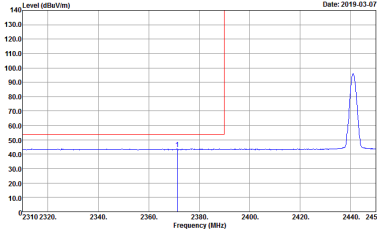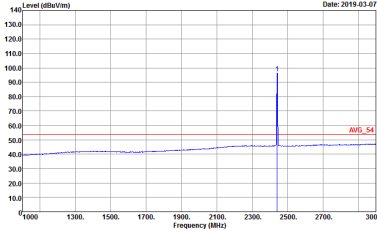





2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH41 2441MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 2	 Site : 03CH15-HY Condition : PEAK_74 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 2
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 2	 Site : 03CH15-HY Condition : AVG_54 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 2

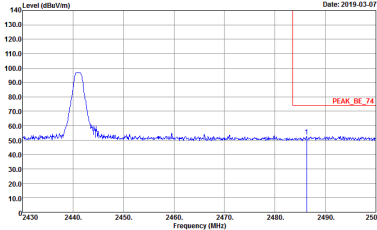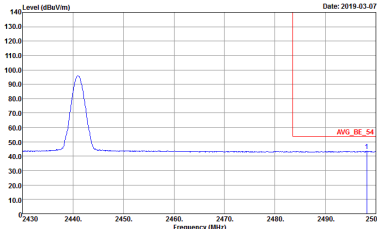2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH41 2441MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 9120D_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 2	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 9120D_15_1620 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 2	Left blank

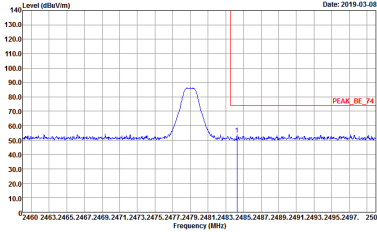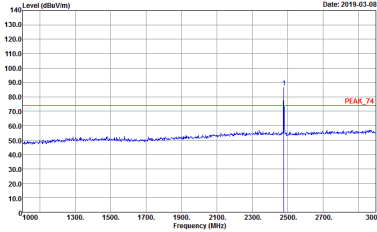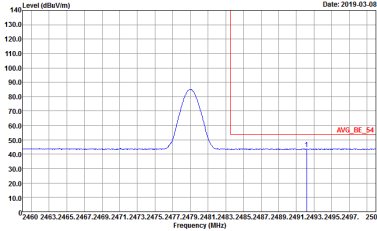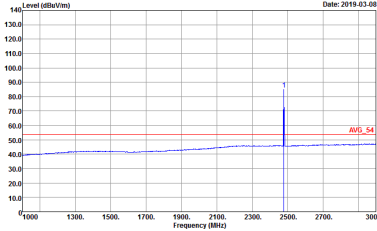

2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH79 2479MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3

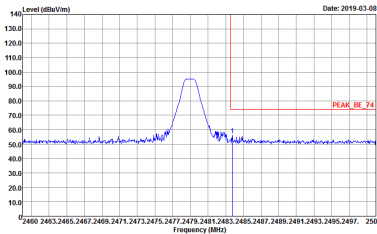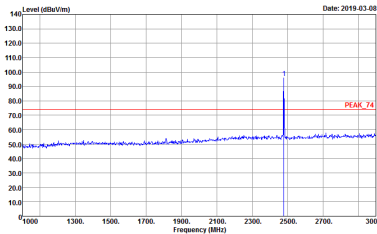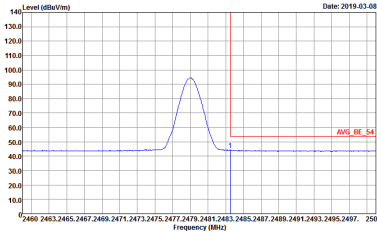
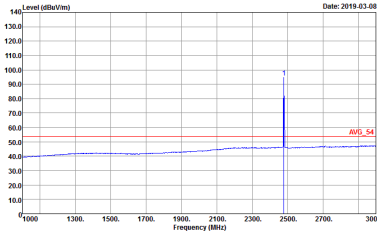


2.4G	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	2.4G Tx CH79 2479MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 912242 Mode : 3



2.4GHz 2400~2483.5MHz

2.4GHz Tx (Harmonic @ 3m)

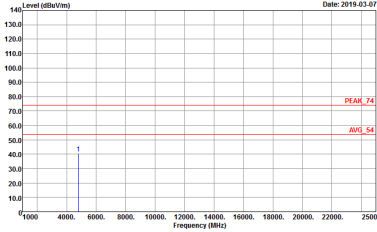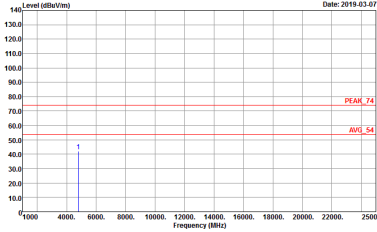2.4G	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	2.4G Tx CH03 2403MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 1	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 1





2.4G	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	2.4G Tx CH41 2441MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2019-03-07 Site : 00CH15-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 2	Level (dBuV/m) Date: 2019-03-07 Site : 00CH15-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 2



2.4G	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	2.4G Tx CH79 2479MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2019-03-07 Site : 03CHS-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 912242 Mode : 3	Level (dBuV/m) Date: 2019-03-07 Site : 03CHS-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 912242 Mode : 3

Emission below 1GHz
2.4GHz Tx (LF)

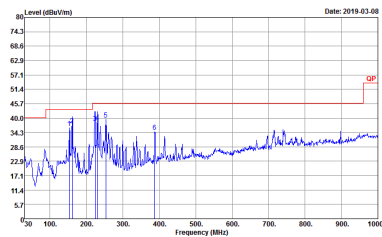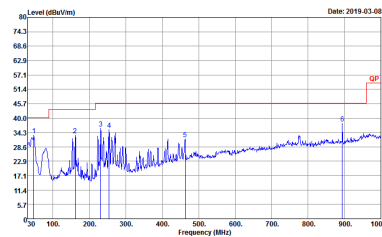
2.4G	2.4GHz 2400~2483.5MHz	
ANT	2.4G Tx LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 HORIZONTAL Detector : Peak Project : 912242 Mode : 4	 Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 VERTICAL Detector : Peak Project : 912242 Mode : 4



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
2.4GHz Proprietary Radio	89.8	1057	0.95	1kHz	0.47

2.4GHz Proprietary Radio

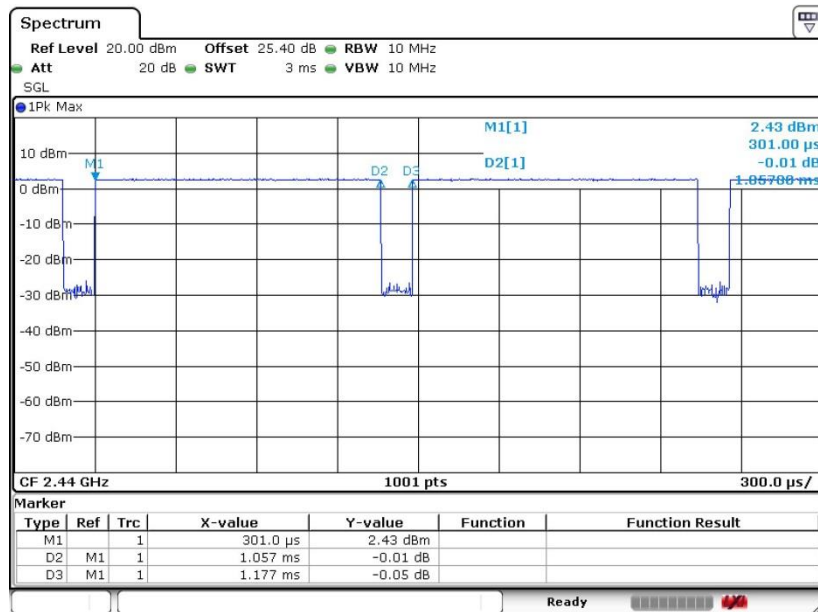

Date: 12.FEB.2019 10:56:57

————THE END————