


7.4.3 Test Mode: Mode 3 TX- WLAN CH06 (2437 MHz)


- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

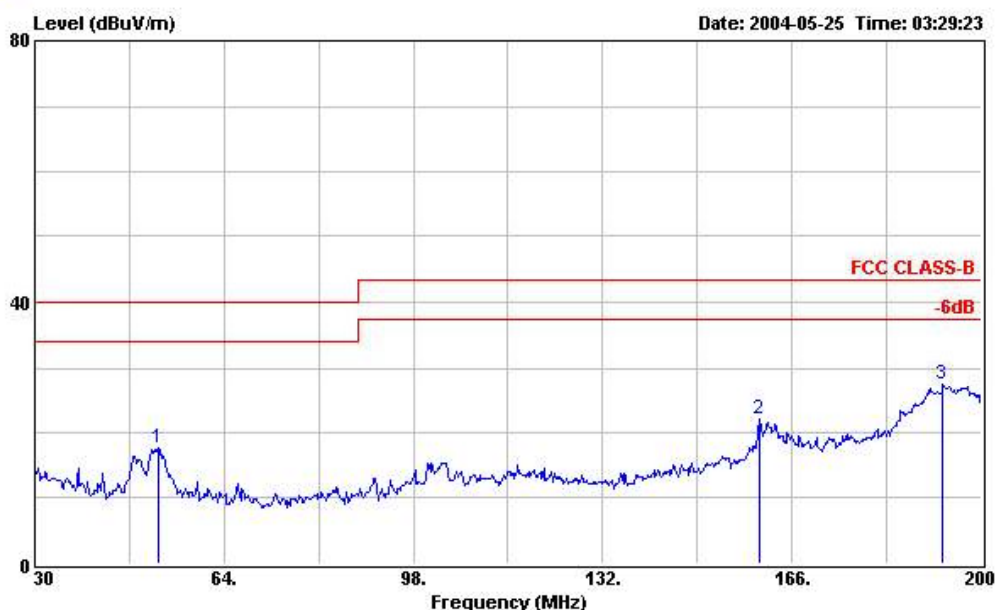


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	52.270	17.78	-22.22	40.00	34.42	10.13	1.22	27.99	Peak	---	---
2	160.220	22.16	-21.34	43.50	34.93	12.70	2.31	27.78	Peak	---	---
3	193.030	27.42	-16.08	43.50	38.00	14.64	2.49	27.71	Peak	---	---

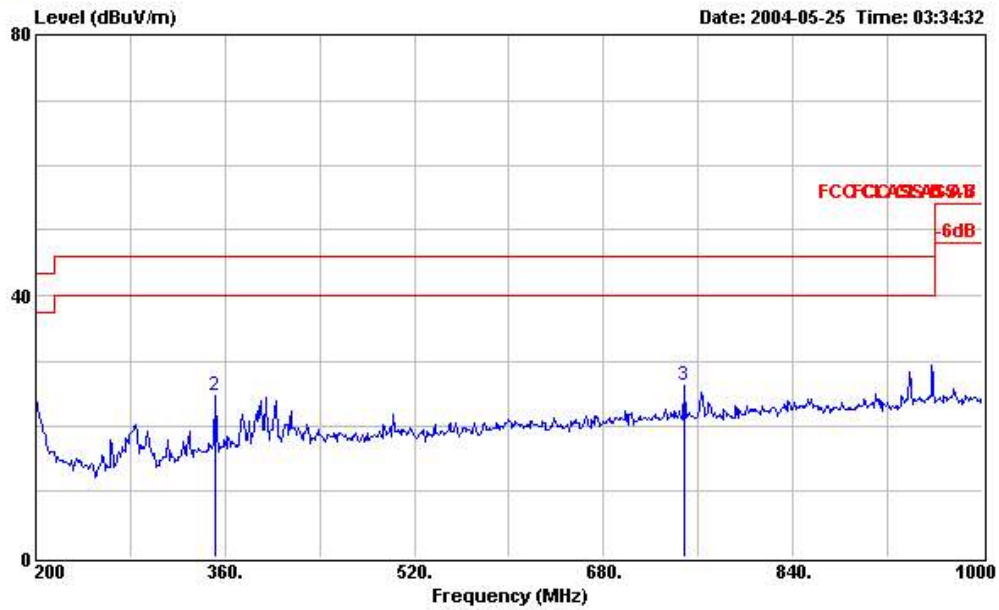


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	200.000	23.87	-19.63	43.50	33.61	15.39	2.57	27.70	Peak	---	---
2	352.000	24.73	-21.27	46.00	33.76	15.26	3.27	27.56	Peak	---	---
3	748.800	26.23	-19.77	46.00	30.14	20.00	4.84	28.75	Peak	---	---

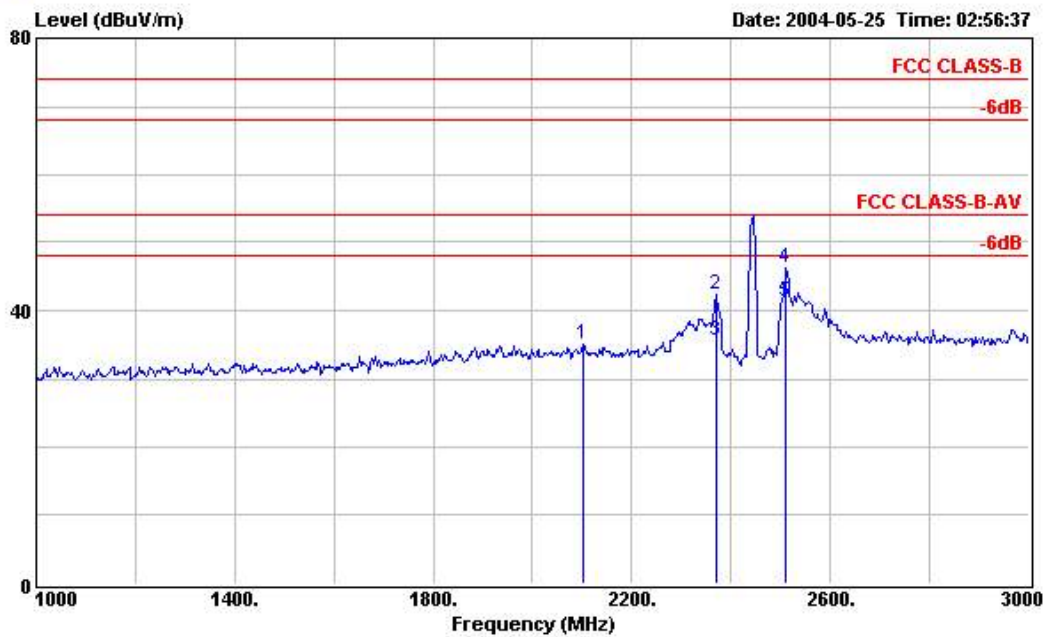


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2102.000	35.12	-38.88	74.00	46.80	27.62	1.67	40.97	Peak	---	---
2	2372.000	42.21	-31.79	74.00	53.48	28.16	1.70	41.13	Peak	---	---
3	2372.000	35.52	-18.48	54.00	46.79	28.16	1.70	41.13	Average	---	---
4	2510.000	46.14	-27.86	74.00	57.01	28.47	1.86	41.20	Peak	---	---
5	2510.000	41.28	-12.72	54.00	52.15	28.47	1.86	41.20	Average	---	---

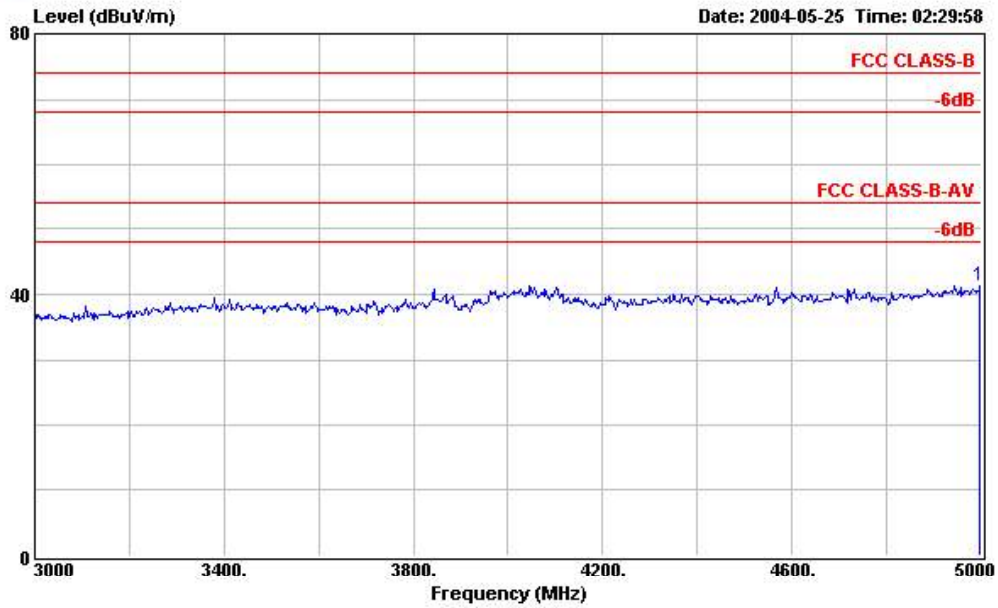


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4998.000	41.34	-32.66	74.00	47.91	33.40	2.63	42.60	Peak	---	---

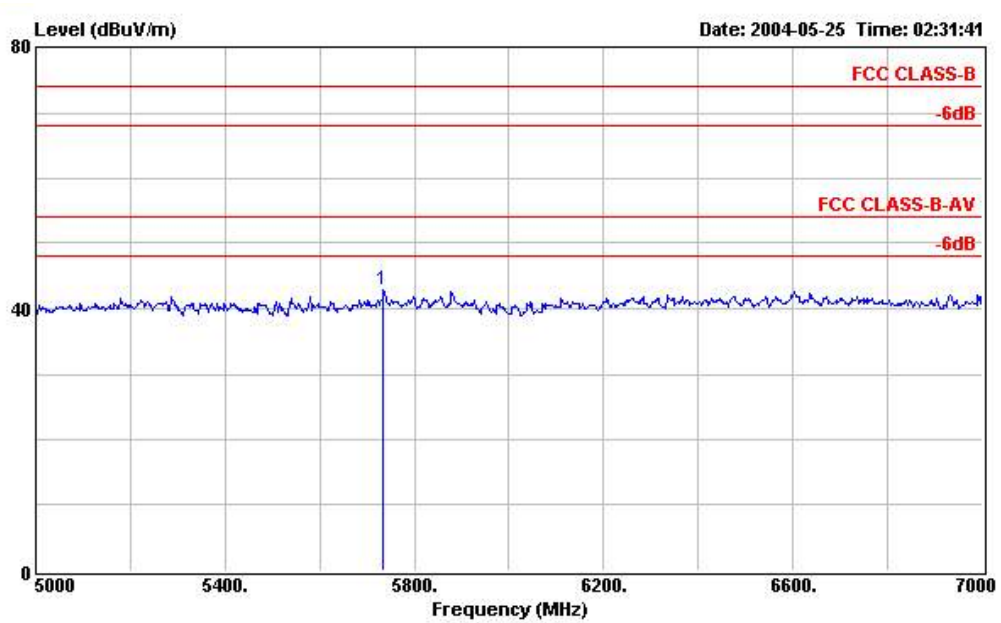


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

1	5734.000	42.94	-31.06	74.00	49.38	34.10	2.66	43.20	Peak	---	---
Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table	
MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos	
		dB	dBuV/m	dBuV	dB	dB	dB		cm	deg	

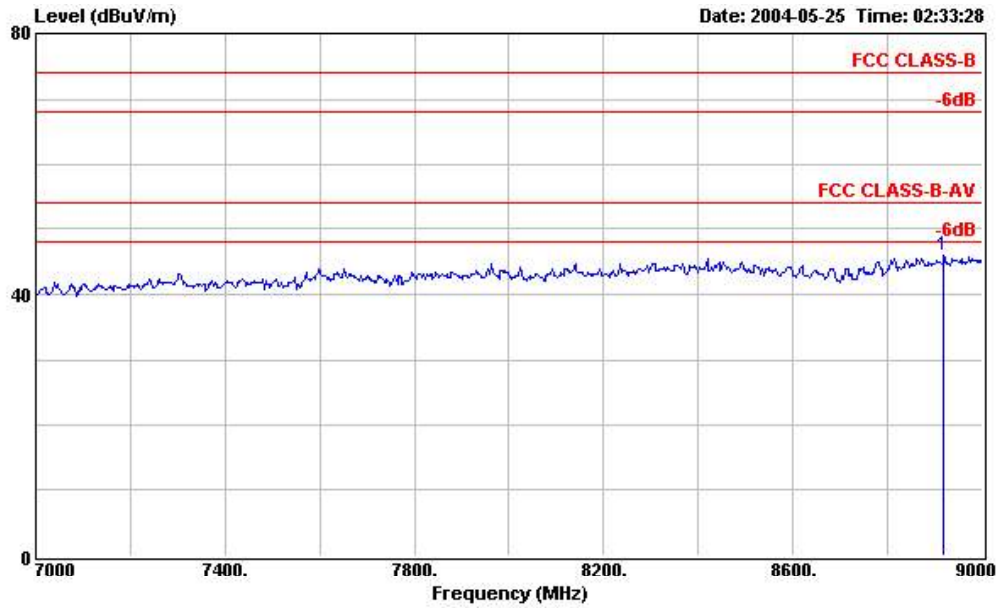


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 8918.000	46.00	-28.00	74.00	45.68	38.07	3.25	41.00	Peak	---	---

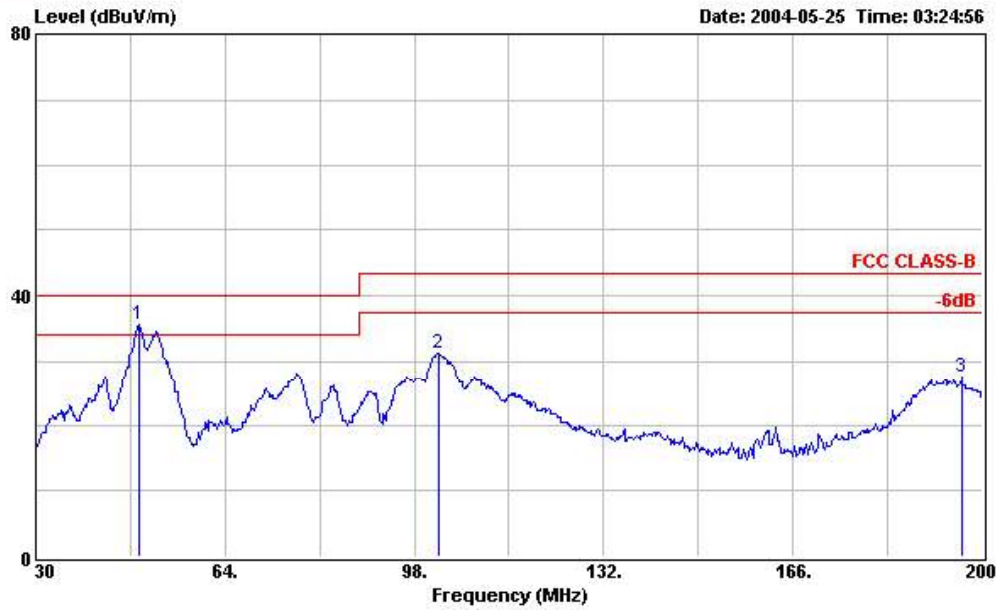

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : WLAN TX CH06 2437MHz


	Over	Limit	Read	Probe	Cable	Preamp	Ant	Table		
Freq	Level	Limit	Level	Factor	Loss	Factor	Pos	Pos	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		
1	48.700	35.71	-4.29	40.00	52.32	10.22	1.17	28.00	Peak	---
2	102.420	31.16	-12.34	43.50	47.29	9.95	1.81	27.89	Peak	---
3	196.260	27.65	-15.85	43.50	38.11	14.72	2.53	27.71	Peak	---

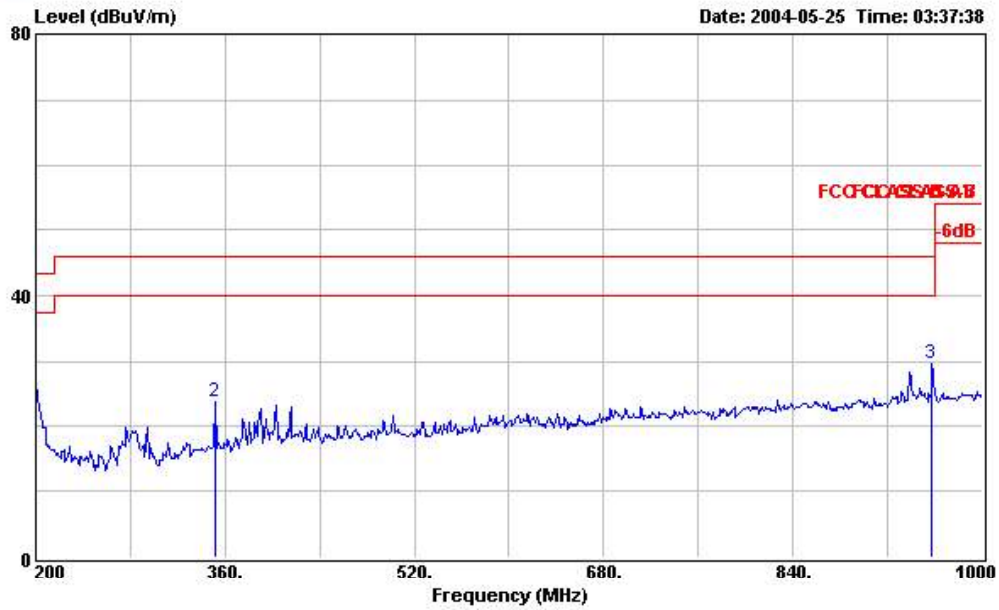

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	200.000	25.90	-17.60	43.50	35.64	15.39	2.57	27.70	Peak	---	---
2	352.000	23.71	-22.29	46.00	32.74	15.26	3.27	27.56	Peak	---	---
3	957.600	29.50	-16.50	46.00	30.19	21.90	5.65	28.24	Peak	---	---



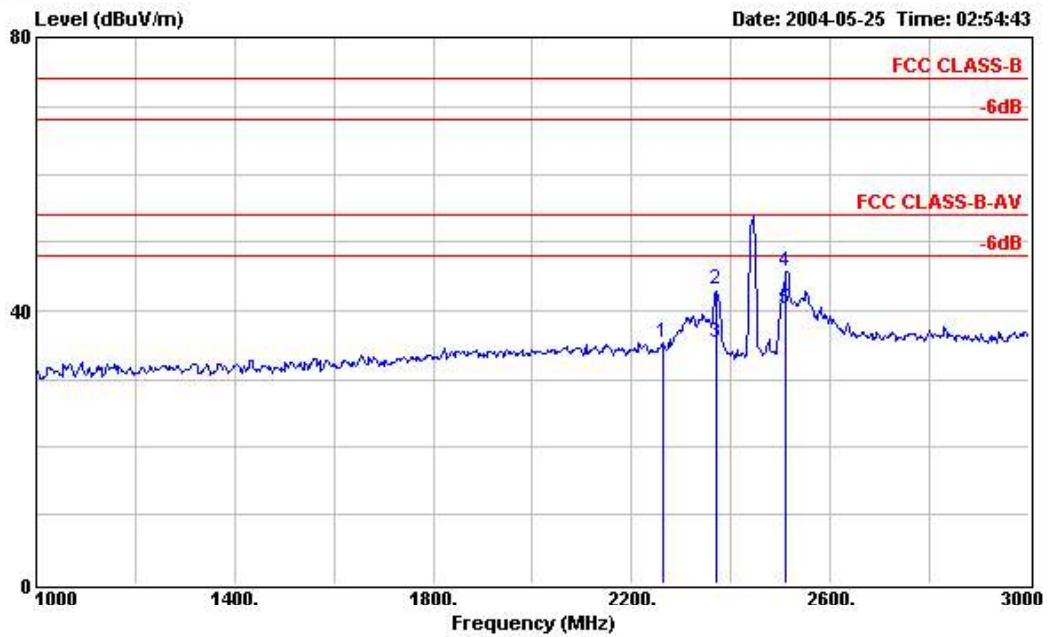


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2262.000	35.28	-38.72	74.00	46.67	27.94	1.73	41.06	Peak	---	---
2	2372.000	42.99	-31.01	74.00	54.26	28.16	1.70	41.13	Peak	---	---
3	2372.000	35.43	-18.57	54.00	46.70	28.16	1.70	41.13	Average	---	---
4	2510.000	45.79	-28.21	74.00	56.66	28.47	1.86	41.20	Peak	---	---
5	2510.000	40.38	-13.62	54.00	51.25	28.47	1.86	41.20	Average	---	---

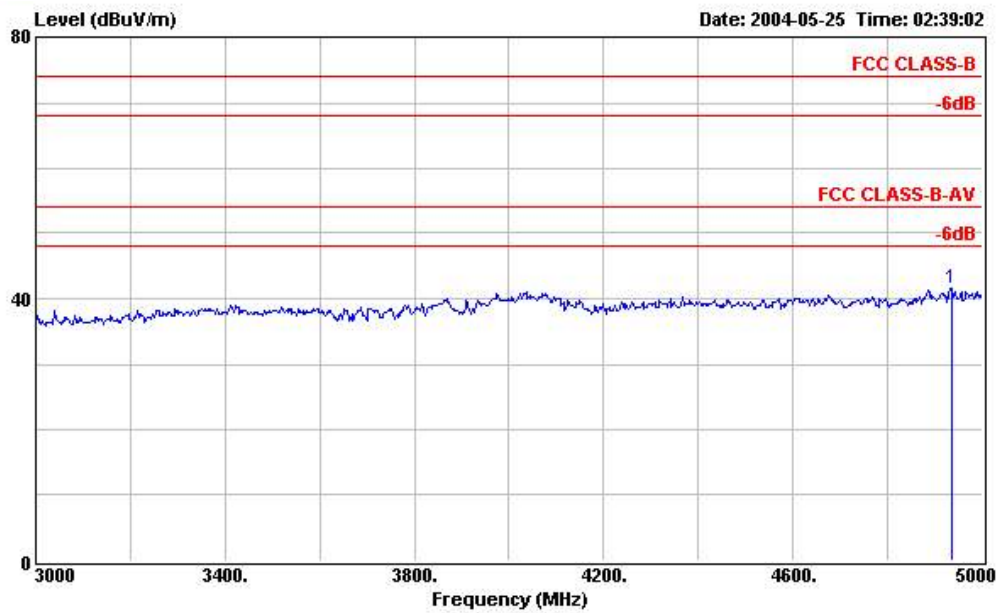


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : WLAN TX CH06 2437MHz

No.	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
			Limit	Line							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4934.000	41.55	-32.45	74.00	48.32	33.29	2.46	42.52	Peak	---	---

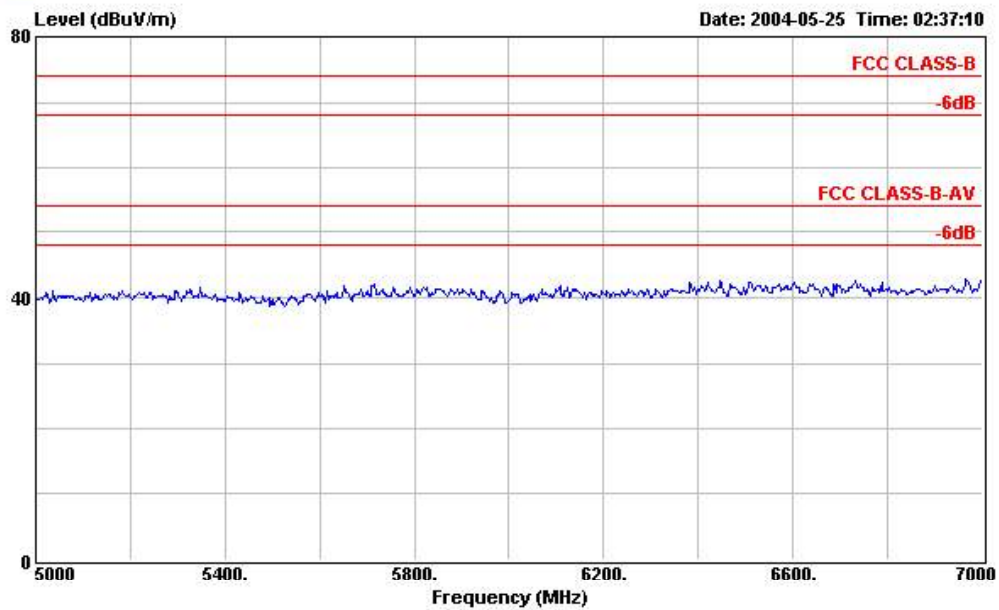

Site : 03CH03-HY  
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
EUT  
Power : 120V/60Hz  
Model :  
Memo : WLAN TX CH06 2437MHz

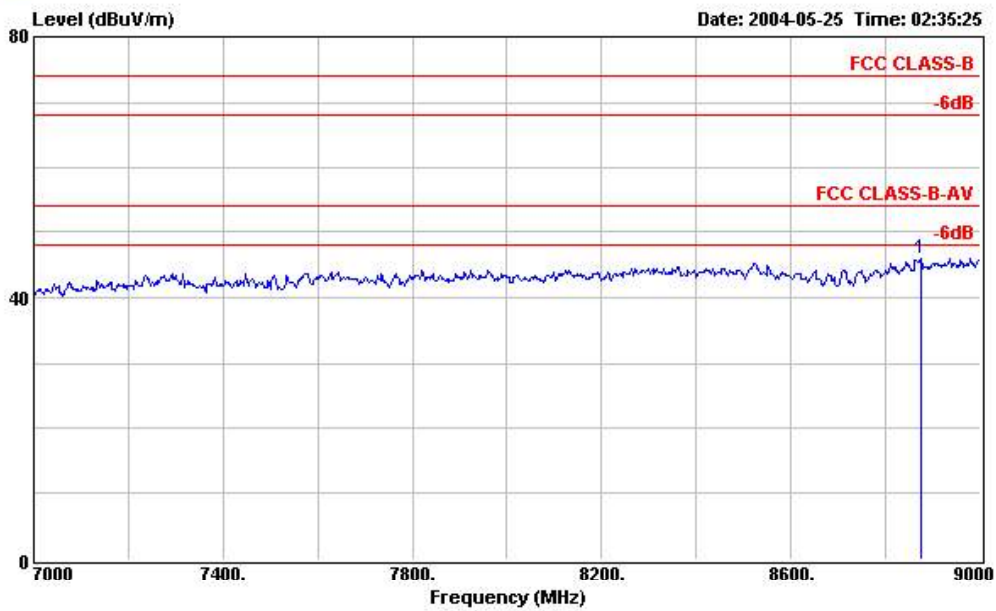


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 8876.000	46.09	-27.91	74.00	45.78	38.05	3.32	41.06	Peak	---	---

Mark:


Frequency from 9000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

BT TX CH39 2441 MHz

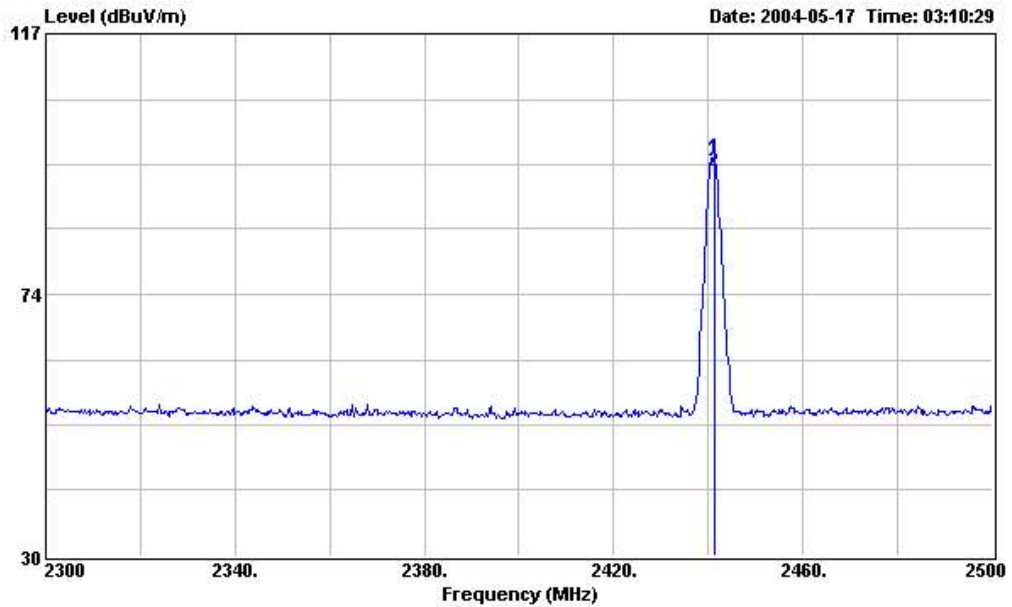

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH39 2441MHz


	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
			dB	dBuV/m							
1	2441.200	96.27	-----	-----	66.19	28.31	1.77	0.00	Peak	---	---
2	2441.200	94.22	-----	-----	64.14	28.31	1.77	0.00	Average	---	---

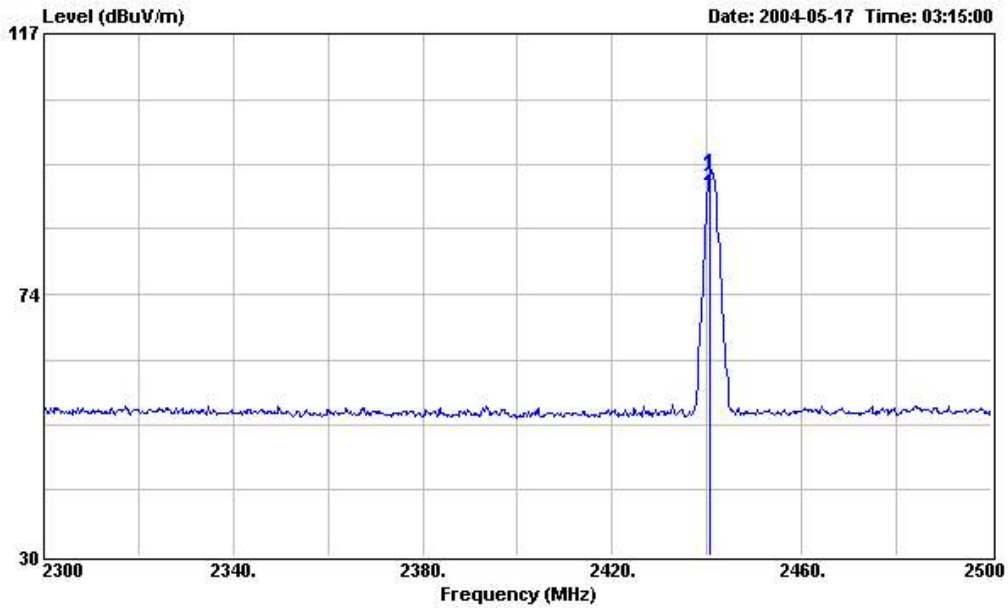

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 VERTICAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : BT TX CH39 2441MHz


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2440.600	93.96	-----	-----	63.89	28.30	1.77	0.00	Peak	---	---
2	2440.600	91.68	-----	-----	61.61	28.30	1.77	0.00	Average	---	---

WLAN TX CH06 2437 MHz

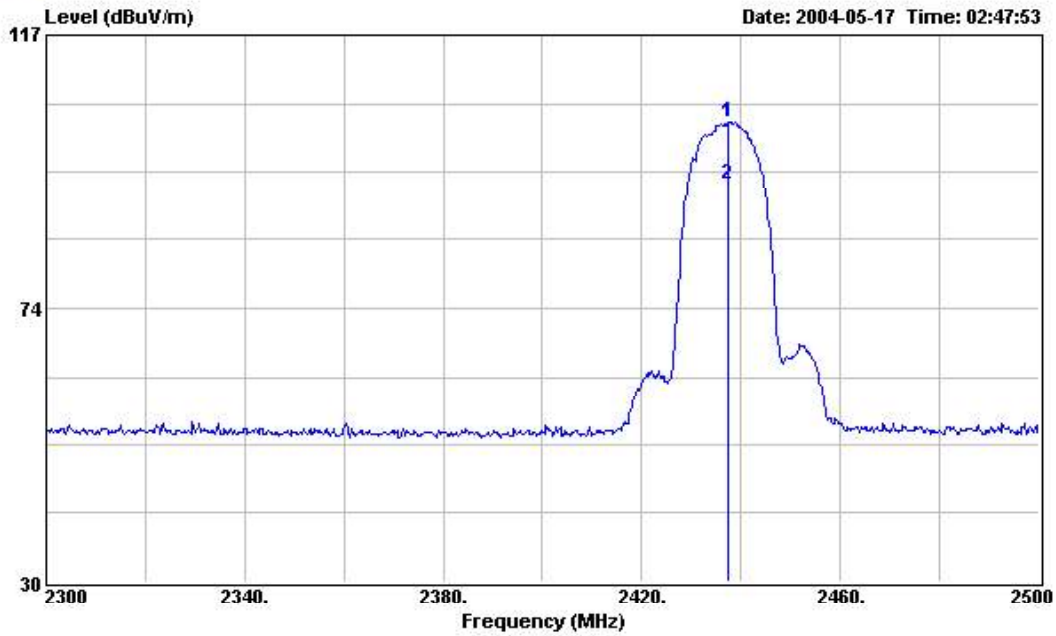

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

Over	Limit	Read	Probe	Cable	Preamp	Ant	Table
Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
		Level	Factor	Loss	Factor	Pos	Pos
		Level	Factor	Loss	Factor	Pos	Pos

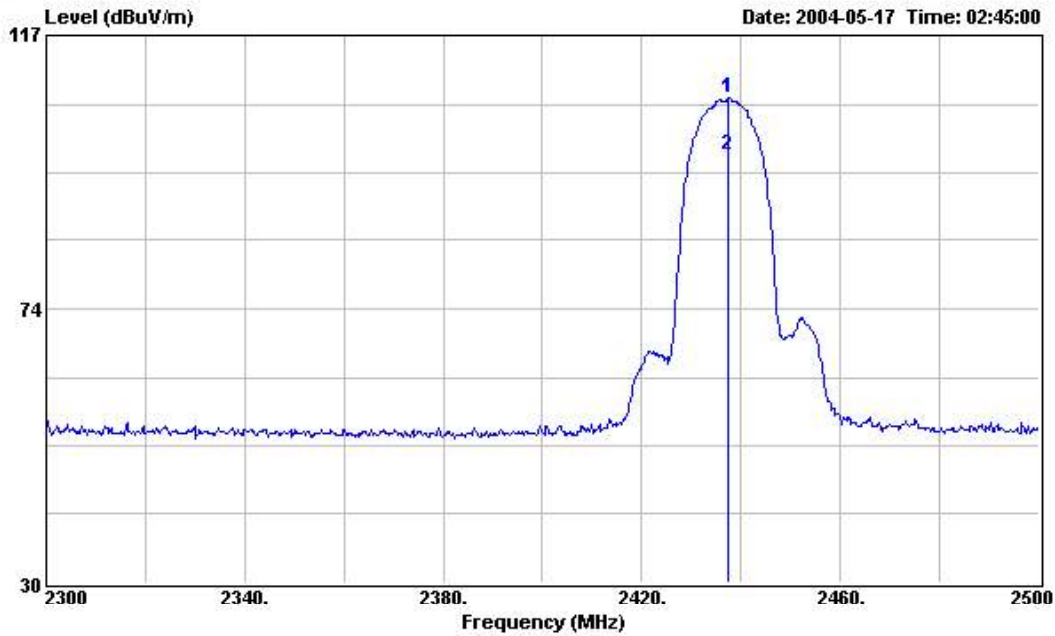

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : WLAN TX CH06 2437MHz

	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table		
Freq	Level	Limit	Line	Level	Factor	Cable	Preamp	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg		
1	2437.400	107.06	-----	-----	77.00	28.30	1.76	0.00	Peak	---	---
2	2437.400	97.97	-----	-----	67.91	28.30	1.76	0.00	Average	---	---



**FCC TEST REPORT**


**Report No. :F451503**

■ Field strength of fundamental and harmonics

Test Item	Frequency ( MHz )	Polarity	Antenna Factor ( dB/m )	Cable Loss ( dB )	Reading ( dBuV )	Preamp Factor (dB)	Limits ( dBuV/m )	Emission ( dBuV/m )	Margin ( dB )	Detect Mode
Bluetooth	2441.200	H	28.31	1.77	66.19	0.00	-	96.27	-	Peak
	2441.200	V	28.30	1.77	63.89	0.00	-	93.96	-	AV
	4882.000	V/H	-	-	-	-	-	-	-	AV/Peak
	7323.000	V/H	-	-	-	-	-	-	-	AV/Peak
	9764.000	V/H	-	-	-	-	-	-	-	AV/Peak
	12205.000	V/H	-	-	-	-	-	-	-	AV/Peak
	14646.000	V/H	-	-	-	-	-	-	-	AV/Peak
	17087.000	V/H	-	-	-	-	-	-	-	AV/Peak
	19528.000	V/H	-	-	-	-	-	-	-	AV/Peak
	21969.000	V/H	-	-	-	-	-	-	-	AV/Peak
	24410.000	V/H	-	-	-	-	-	-	-	AV/Peak
WLAN	2437.400	H	28.30	1.76	73.24	0.00	-	103.30	-	Peak
	2437.400	V	28.30	1.76	77.00	0.00	-	107.06	-	AV
	4874.000	V/H	-	-	-	-	-	-	-	AV/Peak
	7311.000	V/H	-	-	-	-	-	-	-	AV/Peak
	9748.000	V/H	-	-	-	-	-	-	-	AV/Peak
	12185.000	V/H	-	-	-	-	-	-	-	AV/Peak
	14622.000	V/H	-	-	-	-	-	-	-	AV/Peak
	17059.000	V/H	-	-	-	-	-	-	-	AV/Peak
	19496.000	V/H	-	-	-	-	-	-	-	AV/Peak
	21933.000	V/H	-	-	-	-	-	-	-	AV/Peak
24370.000	V/H	-	-	-	-	-	-	-	AV/Peak	

Remark:


- The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer :   
Jay

7.4.4 Test Mode: Mode 4 TX- BT CH78 (2480 MHz), WLAN CH11 (2462 MHz)


- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

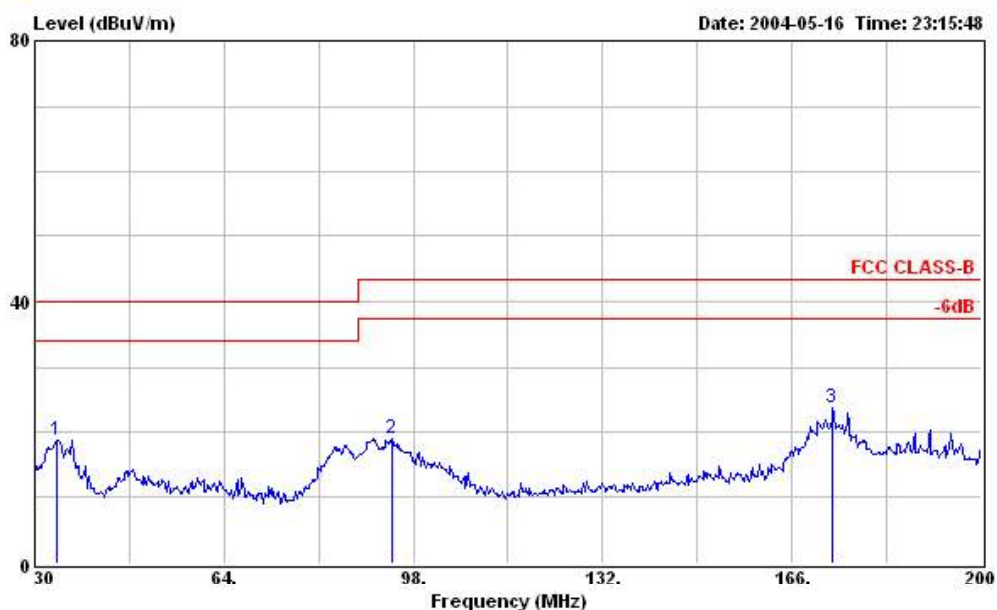


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : BT TX CH78 2480MHz  
       : WLAN TX CH11 2462MHz  
       : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	33.910	18.80	-21.20	40.00	32.57	13.27	1.00	28.04	Peak	---	---
2	94.260	19.05	-24.45	43.50	35.97	9.34	1.65	27.91	Peak	---	---
3	173.310	23.68	-19.82	43.50	35.69	13.36	2.38	27.75	Peak	---	---

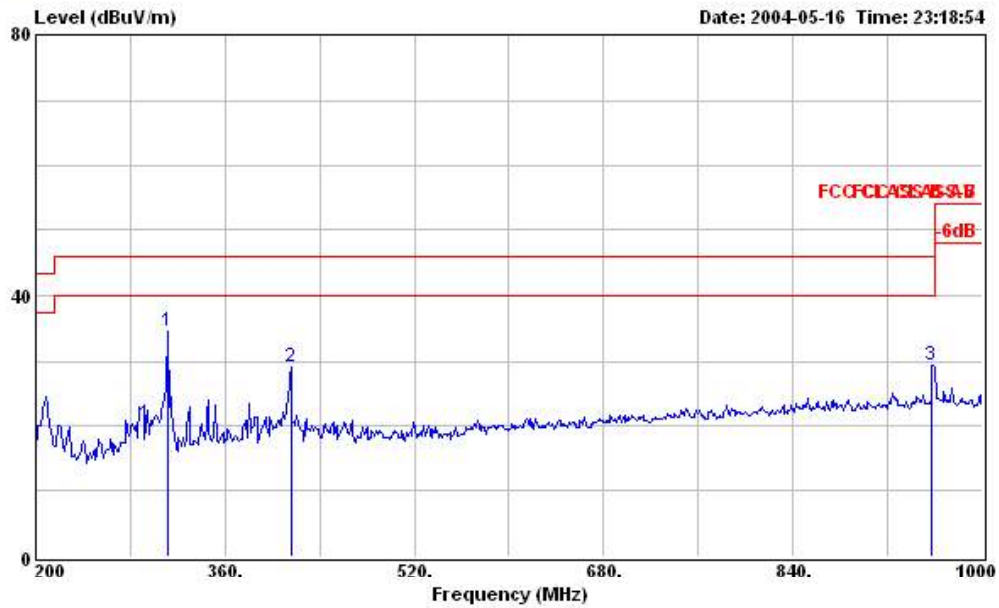


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

Peak	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	311.200	34.44	-11.56	46.00	44.80	13.86	3.14	27.36	Peak	---	---
2	416.000	29.13	-16.87	46.00	37.47	16.05	3.55	27.94	Peak	---	---
3	957.600	29.34	-16.66	46.00	30.03	21.90	5.65	28.24	Peak	---	---

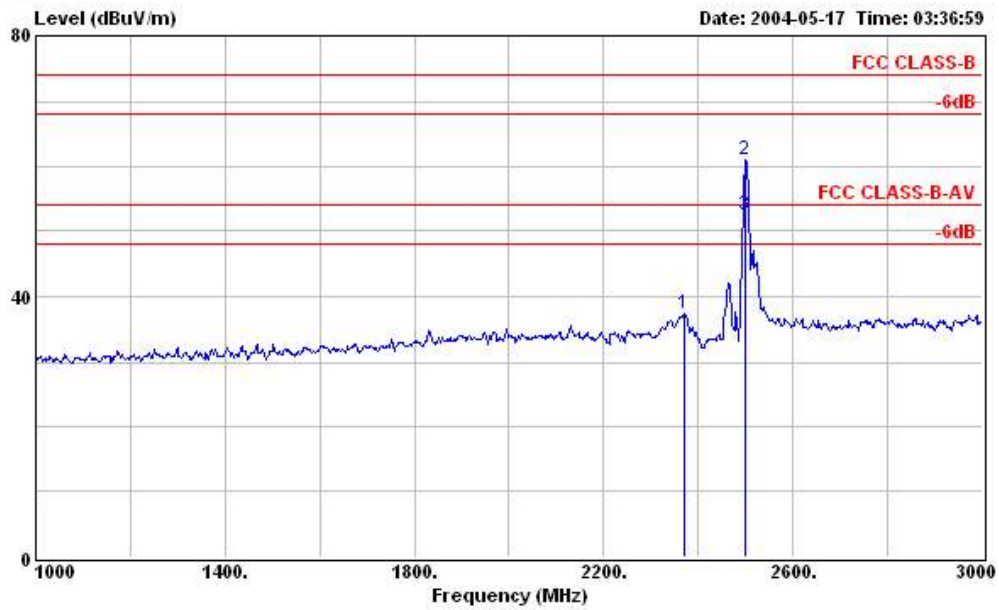


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2372.000	37.28	-36.72	74.00	48.55	28.16	1.70	41.13	Peak	---	---
2	2500.000	61.07	-12.93	74.00	71.98	28.44	1.85	41.20	Peak	100	360
3	2500.000	52.45	-1.55	54.00	63.36	28.44	1.85	41.20	Average	100	360

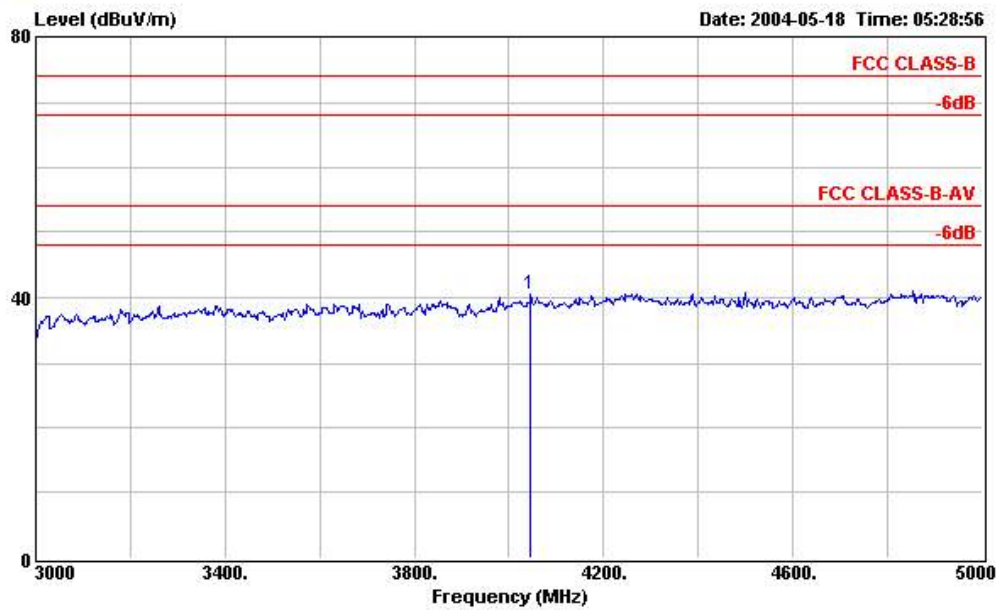


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
		dB	dBuV/m							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 4046.000	40.56	-33.44	74.00	47.05	32.58	2.48	41.55	Peak	---	---

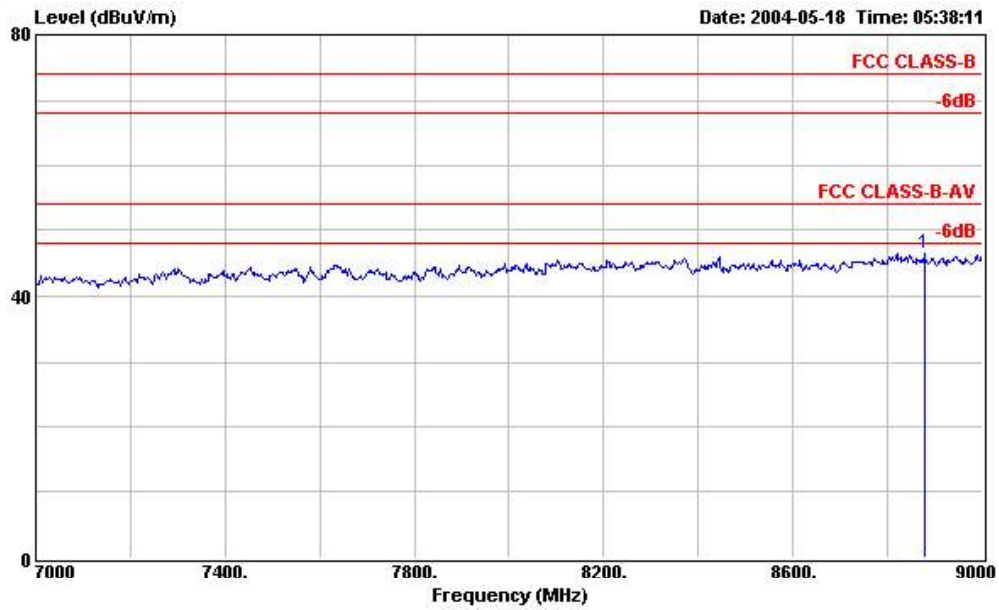


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8878.000	46.55	-27.45	74.00	46.24	38.05	3.31	41.05	Peak	---	---

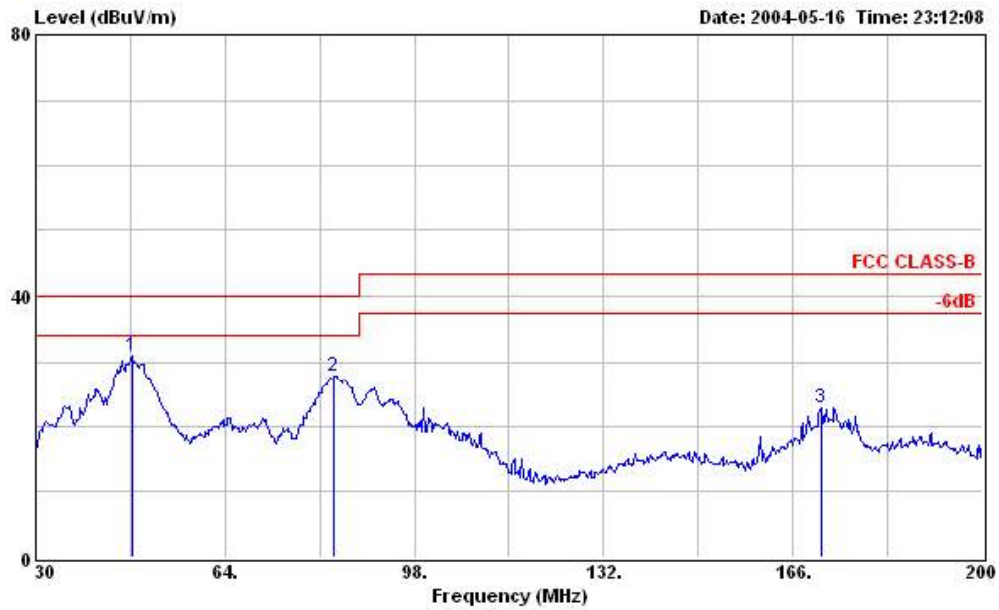

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	47.340	30.93	-9.07	40.00	47.47	10.30	1.16	28.00	Peak	---	---
2	83.550	27.88	-12.12	40.00	44.56	9.69	1.56	27.93	Peak	---	---
3	171.100	22.95	-20.55	43.50	35.05	13.29	2.37	27.76	Peak	---	---

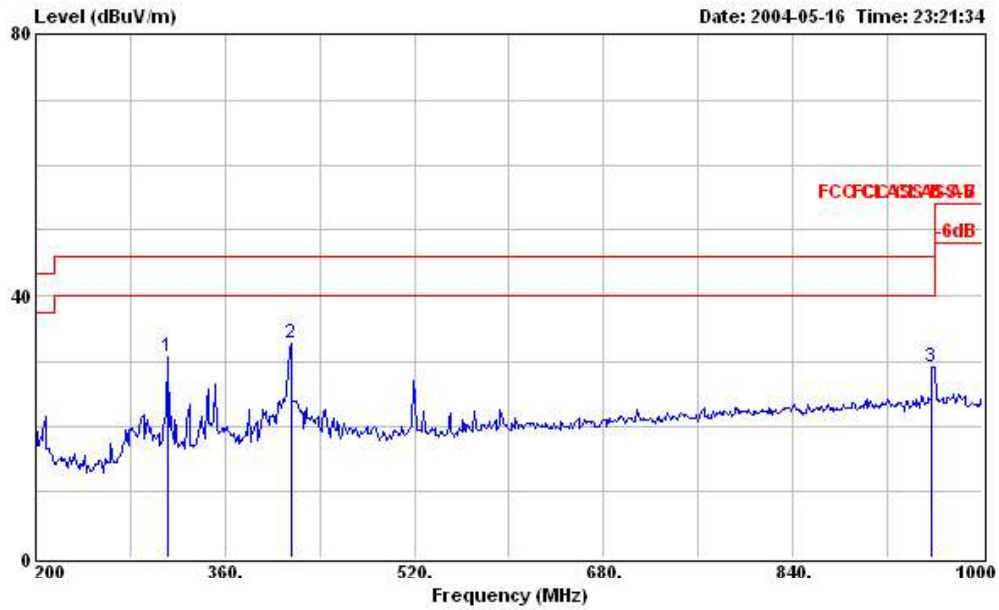

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL  
 EUT  
 Power : 120W/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
       : WLAN TX CH11 2462MHz  
       : Cradle +USB


Peak	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	311.200	30.67	-15.33	46.00	41.03	13.86	3.14	27.36	Peak	---	---
2	416.000	32.63	-13.37	46.00	40.97	16.05	3.55	27.94	Peak	---	---
3	957.600	29.18	-16.82	46.00	29.87	21.90	5.65	28.24	Peak	---	---



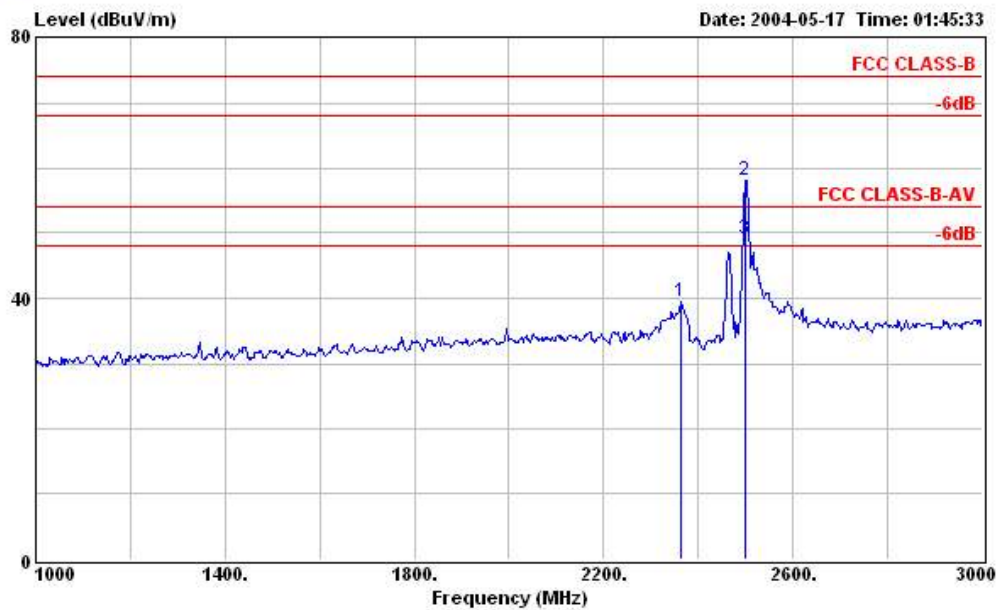


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

Peak	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2364.000	39.38	-34.62	74.00	50.65	28.15	1.70	41.12	Peak	---	---
2	2500.000	58.30	-15.70	74.00	69.21	28.44	1.85	41.20	Peak	100	360
3	2500.000	49.01	-4.99	54.00	59.92	28.44	1.85	41.20	Average	100	360

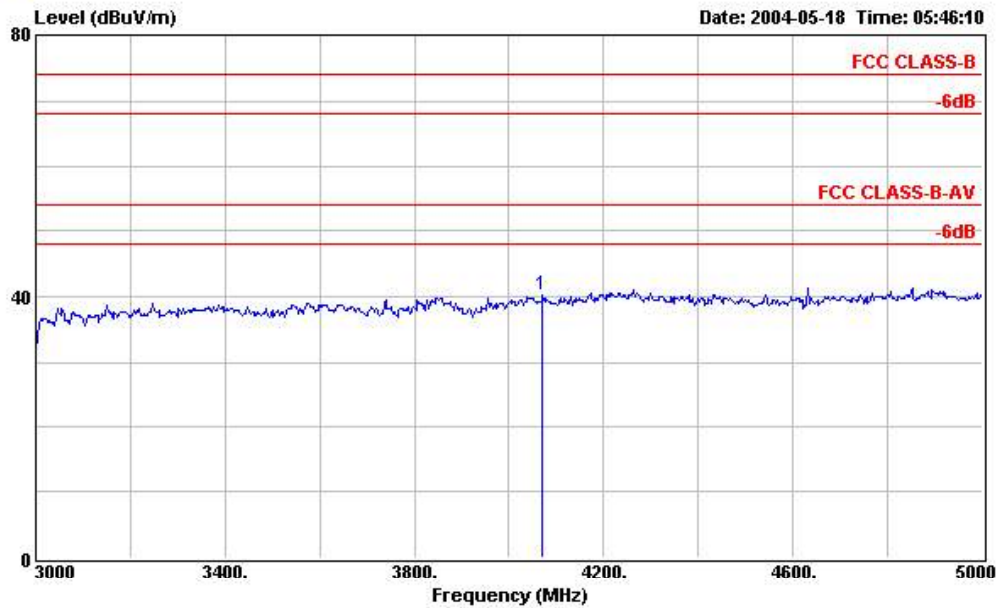


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 4070.000	40.18	-33.82	74.00	46.62	32.57	2.56	41.57	Peak	---	---

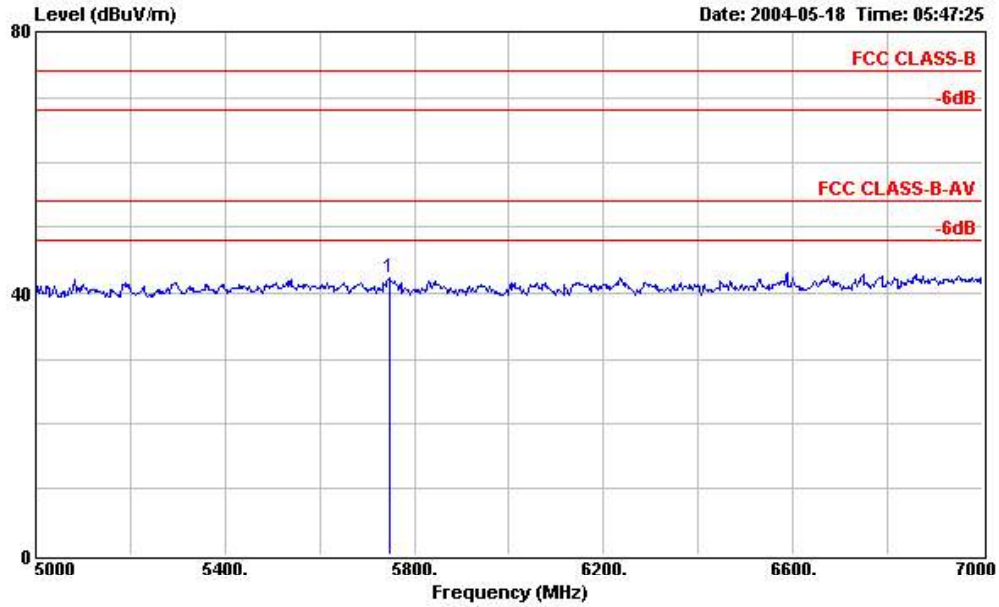

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT  
 Power : 120W/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
 : WLAN TX CH11 2462MHz  
 : Cradle +USB

1	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5748.000	42.43	-31.57	74.00	48.92	34.10	2.61	43.20	Peak	---	---

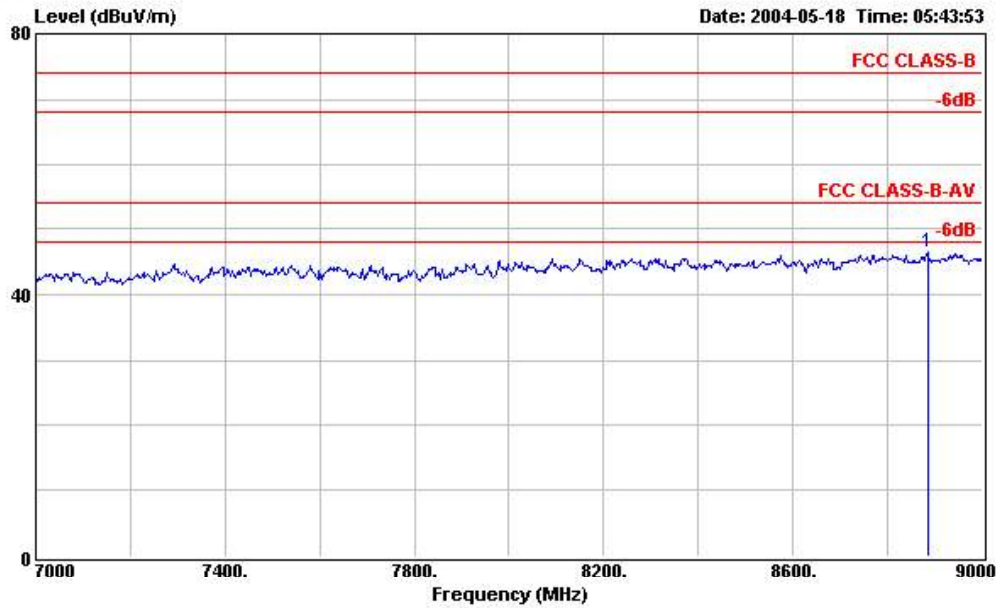

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL  
 EUT :  
 Power : 120W/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz  
       : WLAN TX CH11 2462MHz  
       : Cradle +USB

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
1	8884.000	46.57	-27.43	74.00	46.28	38.05	3.29	41.05	Peak	---


Mark:

Frequency from 9000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

7.4.5 Test Mode: Mode 5 TX- BT CH78 (2480 MHz)


- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBUV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

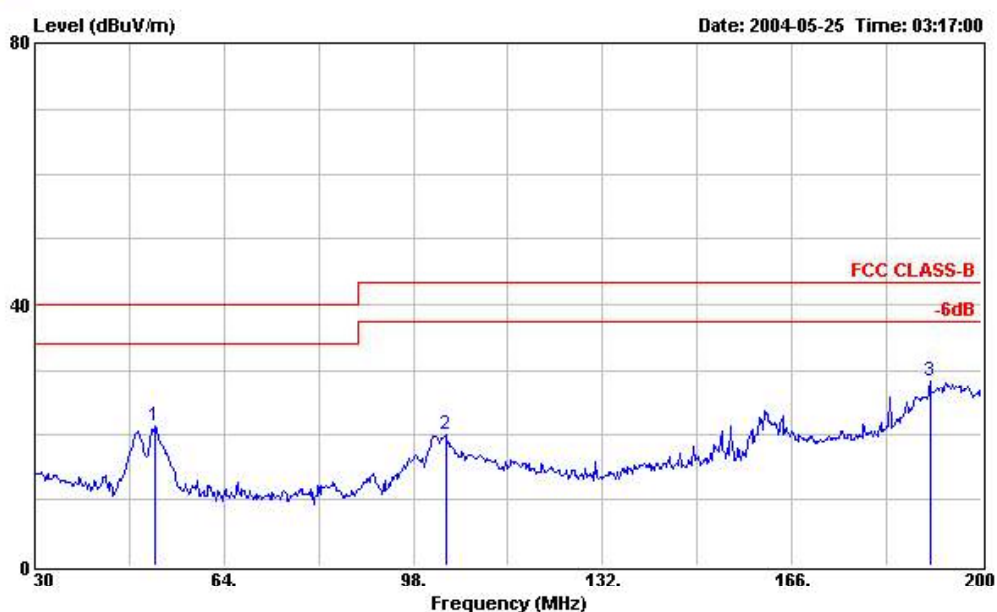


Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz

	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg		
1	51.590	21.24	-18.76	40.00	37.89	10.13	1.21	27.99	Peak	---	---
2	103.780	20.07	-23.43	43.50	36.10	10.04	1.82	27.89	Peak	---	---
3	190.820	28.30	-15.20	43.50	38.95	14.59	2.48	27.72	Peak	---	---

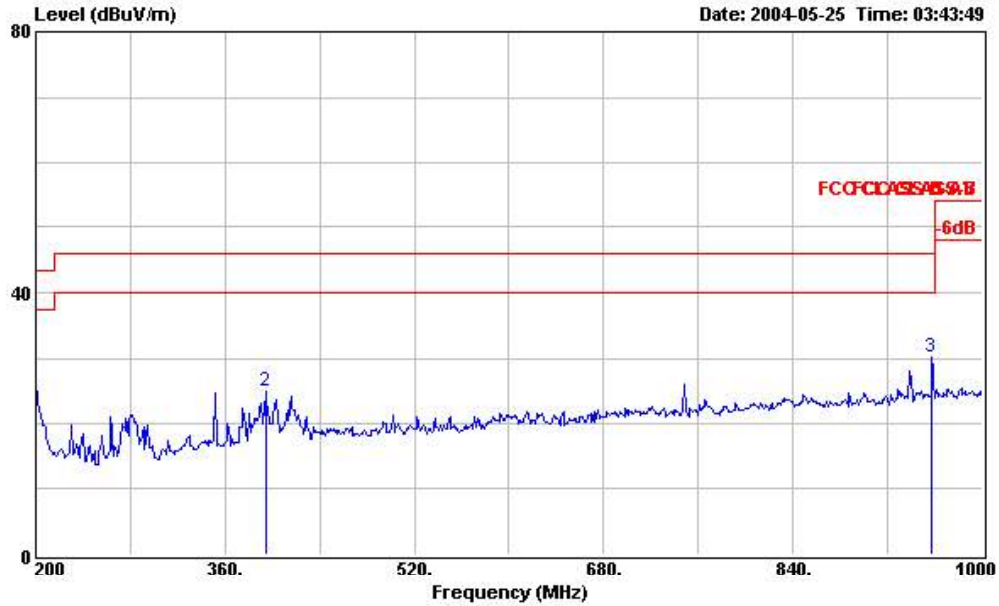

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL  
 EUT  
 Power : 120V/60Hz  
 Model  
 Memo : BT TX CH78 2480MHz

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table	
		Limit	Line								Loss
NHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg	
1	200.000	25.67	-17.83	43.50	35.41	15.39	2.57	27.70	Peak	---	---
2	394.400	24.93	-21.07	46.00	33.57	15.68	3.45	27.77	Peak	---	---
3	957.600	30.04	-15.96	46.00	30.73	21.90	5.65	28.24	Peak	---	---

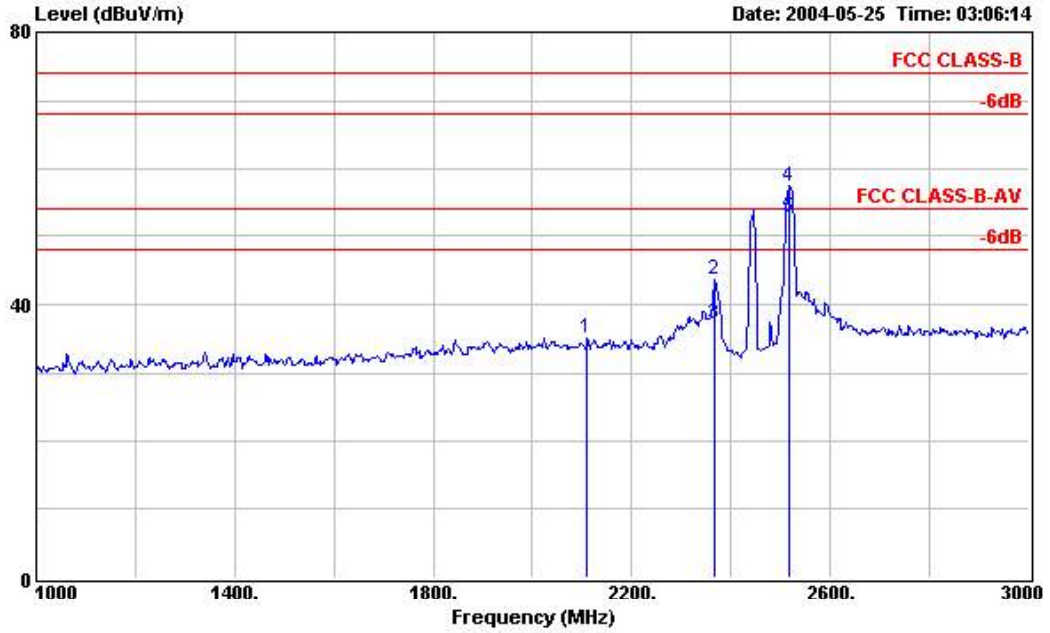

Site : 03CH03-HY  
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL  
 EUT :  
 Power : 120V/60Hz  
 Model :  
 Memo : BT TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2110.000	35.19	-38.81	74.00	46.86	27.63	1.67	40.97	Peak	---	---
2	2366.000	43.58	-30.42	74.00	54.86	28.15	1.70	41.13	Peak	---	---
3	2366.000	37.22	-16.78	54.00	48.50	28.15	1.70	41.13	Average	---	---
4	2518.000	57.53	-16.47	74.00	68.38	28.49	1.86	41.20	Peak	---	---
5	2518.000	52.73	-1.27	54.00	63.58	28.49	1.86	41.20	Average	---	---