

Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 1 of 70

## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

**Product Name: PDA Phone** 

**Brand Name:** HTC

**Model Name:** BLAC100

**Model Difference:** N/A

FCC ID: **NM8BKNV** 

**Report No.:** EH/2008/50027

**Issue Date:** Aug. 27, 2008

**FCC Rule Part: §15.247** 

**Prepared for: HTC Corporation** 

No. 23 Xinghua Rd., Taoyuan City, Taoyuan

County 330, Taiwan, ROC

Prepared by: SGS Taiwan Ltd.

**Electronics & Communication Laboratory** 

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan





*Note:* This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 2 of 70

## VERIFICATION OF COMPLIANCE

**HTC** Corporation **Applicant:** 

No. 23 Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan,

**ROC** 

PDA Phone **Equipment Under Test:** 

**Brand Name:** HTC

Model No.: BLAC100

**Model Difference:** N/A

FCC ID: NM8BKNV

File Number: EH/2008/80015

Date of test: Aug. 09, 2008 ~ Aug. 22, 2008

**Date of EUT Received:** Aug. 08, 2008

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Sky Wang	Date	Aug. 27, 2008	
_	Sky Wang/Asst. Supervisor			
Prepared By:	Eva Cono	Date	Aug. 27, 2008	
Approved By:	Eva Kao / Asst. Supervisor	Date	Aug. 27, 2008	
_	Vincent Su / Manager			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless otherwise stated the results shown in this test report reter only to the sample(s) tester report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attentic is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appear ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 3 of 70

## Version

Version No.	Date	Description
00	Aug. 27, 2008	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless orienties stated the results shown in this test report reter only to the sample(s) test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of the documents in unlocation from exercising all their rights and obligations under the full content of the full or exercised the full content of the full party and the property of the full content of the full co ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 4 of 70

## **Table of Contents**

1.	GEN	ERAL INFORMATION	6
	1.1.	Related Submittal(s) / Grant (s)	9
	1.2.	Test Methodology	9
	1.3.	Test Facility	<u>ç</u>
	1.4.	Special Accessories	9
	1.5.	Equipment Modifications	9
2.	SYST	TEM TEST CONFIGURATION	1(
	2.1.	EUT Configuration	
	2.2.	EUT Exercise	10
	2.3.	Test Procedure	10
	2.4.	Configuration of Tested System	1
3.	SUM	MARY OF TEST RESULTS	12
4.		CRIPTION OF TEST MODES	
5.		DUCTED EMISSION TEST	
	5.1.	Standard Applicable	
	5.2.	EUT Setup	13
	5.3.	Measurement Procedure	13
	5.4.	Measurement Equipment Used:	14
	5.5.	Measurement Result	14
6.	PEA:	K OUTPUT POWER MEASUREMENT	17
	6.1.	Standard Applicable	
	6.2.	Measurement Procedure	18
	6.3.	Measurement Equipment Used:	18
	6.4.	Measurement Result	19
7.	6dB ]	Bandwidth	24
	7.1.	Standard Applicable	
	7.2.	Measurement Procedure	24
	7.3.	Measurement Equipment Used:	24
	7.4.	Measurement Result	25
8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	30
-•	8.1.	Standard Applicable	
	8.2.	Measurement Procedure	
	8.3.	Measurement Equipment Used:	30
	8.4.	Measurement Result	30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 5 of 70

9.	<b>SPUF</b>	RIOUS RADIATED EMISSION TEST	37
	9.1.	Standard Applicable	37
	9.2.	EUT Setup	37
	9.3.	Measurement Procedure	37
	9.4.	Test SET-UP (Block Diagram of Configuration)	38
	9.5.	Measurement Equipment Used:	39
	9.6.	Field Strength Calculation	39
	9.7.	Measurement Result	39
10.	Peak	Power Spectral Density	64
	10.1.		
	10.2.	Measurement Procedure	64
	10.3.	Measurement Equipment Used:	64
	10.4.	Measurement Result	65
11.	ANTI	ENNA REQUIREMENT	70
	11.1.	-	
	11.2.	Antenna Connected Construction	70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless otherwise stated the results shown in this test report reter only to the sample(s) test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of the document is unlockful to add offered and the proposed to the fullest extent of the law. ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 6 of 70

## **GENERAL INFORMATION**

#### General:

Ocherar.			
Product Name	PDA Phone		
Brand Name	HTC		
Model Name	BLAC100		
Model Difference	N/A		
Data Cable (USB)	2 provided		
Simple Hands-free (SHF)	1 provided,		
Cigar Lighter Adaptor (CLA)	) 1 provided		
	3.8 Vdc re-ch	nargeable battery or 5Vdc by AC/DC power adapter	
Power Supply	Battery:	2 provided	
	Adapter	2 provided	

#### GSM and WCDMA:

	CONT UND THE CONTROL					
	E-GSM/GPRS 850 Class 12	824 MHz– 849MHz	33 dBm			
	E-GSM/GPRS 900 Class 12	880MHz – 915MHz	33 dBm			
Cellular Phone Standards	E-GSM/GPRS 1800 Class 12	1710MHz-1785MHz	30 dBm			
Frequency Range and Power	E-GSM/GPRS 1900 Class 12	1850MHz – 1910MHz	30 dBm			
	WCDMA/HSUPA/HSDPA Band I	1920MHz – 1980MHz	24 dBm			
	WCDMA/HSUPA/HSDPA Band VIII	880MHz – 915MHz	23dBm			
IMEI	353969020014519					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 7 of 70

		-
<b>1</b> \\	$\Delta N$	J٠
VV L	TUT.	٧.

Frequency Range:	2412 – 2462 MHz
Channel number:	11 channels
Max. Output Power:	802.11 b: 17.58 dBm peak 802.11 g: 13.86dBm peak
Modulation Technology:	DSSS, OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation:	PIFA Antenna / 2dBi.
Type of Emission	16M6M7D

The EUT is compliance with IEEE 802.11 b/g Standard.

#### Bluetooth:

Diuctootii.			
Bluetooth Version	<ul> <li>V1.1 (GFSK)</li> <li>V1.2 (GFSK)</li> <li>V2.0 (GFSK)</li> <li>V2.0 + EDR (GFSK + π/4DQPSK + 8DPSK)</li> <li>V2.1 + EDR (GFSK + π/4DQPSK + 8DPSK)</li> </ul>		
Frequency Range	2402 – 2480MHz		
Channel number	79 channels max.		
Rated Power	0.89 dBm (Peak)		
Modulation type	Frequency Hopping Spread Spectrum		
Antenna Designation	PIFA Antenna / 2dBi.		
Type of Emission	1M32F1D		

The EUT is compliance with Bluetooth 2.0 Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 8 of 70

#### GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion oscillator	19.2kHz
Antenna Designation	mono pole

This test report applies for 802.11b and 802.11g WLAN.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 9 of 70

## 1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: NM8BKNV filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a Doc procedure.

## 1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

## 1.4. Special Accessories

Not available for this EUT intended for grant.

### 1.5. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 10 of 70

## SYSTEM TEST CONFIGURATION

## 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

#### 2.3. Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 11 of 70

# 2.4. Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration

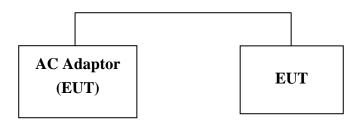

**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	WiFi Software	N/A	WLAN eMapi	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 12 of 70

## SUMMARY OF TEST RESULTS

FCC Rules Description Of Test		Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)(c)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
	100 KHz Bandwidth Of	
§15.247(d)	Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 1Mbps data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 6Mbps data rate are chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 13 of 70

### CONDUCTED EMISSION TEST

## 5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				

#### Note

## 5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The LISN was connected with 110Vac/60Hz power source.

## **5.3.** Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- **3.** Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless orderwise stated the results shown in this test report reter only to the sample(s) tester report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appear ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 14 of 70

# 5.4. Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LA						
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2007	09/14/2008		
LISN	Rolf-Heine	NNB-2/16Z	99012	02/18/2008	02/17/2009		
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/18/2008	02/17/2009		
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2007	10/29/2008		

#### 5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 15 of 70

Air Pressure:

hpa

## AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	WLAN Operatin	g		Test Date:	Aug. 25, 2008
Temperature:	26 ℃	Humidity:	61%	Test By:	Sky

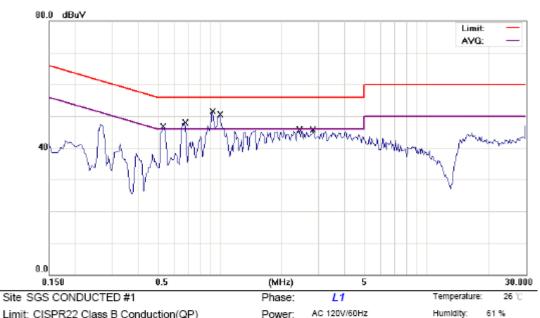

Distance:

Limit: CISPR22 Class B Conduction(QP)

EUT: PDA Phone M/N: BLAC 100 Note: WLAN operating

No	. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dΒ	Detector	Comment	
1		0.5300	44.26	0.03	44.29	56.00	-11.71	QP		
- 2		0.5300	32.16	0.03	32.19	46.00	-13.81	AVG		
3	,	0.6800	45.23	0.02	45.25	56.00	-10.75	QP		
- 4		0.6800	32.65	0.02	32.67	46.00	-13.33	AVG		
5	*	0.9200	48.20	0.01	48.21	56.00	-7.79	QP		
6	i	0.9200	32.98	0.01	32.99	46.00	-13.01	AVG		
7	,	1.0000	47.10	0.01	47.11	56.00	-8.89	QP		
8	;	1.0000	36.85	0.01	36.86	46.00	-9.14	AVG		
5	)	2.4300	40.08	0.01	40.09	56.00	-15.91	QP		
10	)	2.4300	27.52	0.01	27.53	46.00	-18.47	AVG		
11		2.8200	39.12	0.01	39.13	56.00	-16.87	QP		
12	2	2.8200	28.10	0.01	28.11	46.00	-17.89	AVG		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 16 of 70

Humidity:

Air Pressure:

hpa

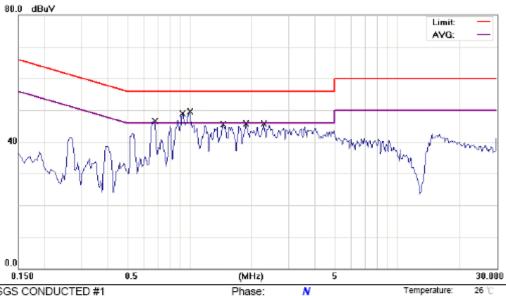

Power:

Distance:

AC 120V/60Hz

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: PDA Phone M/N: BLAC 100 Note: WLAN operating

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.6800	43.90	0.02	43.92	56.00	-12.08	QP	
2	0.6800	30.64	0.02	30.66	46.00	-15.34	AVG	
3	0.9200	45.47	0.01	45.48	56.00	-10.52	QP	
4	0.9200	32.25	0.01	32.26	46.00	-13.74	AVG	
5 *	1.0000	45.75	0.01	45.76	56.00	-10.24	QP	
6	1.0000	31.91	0.01	31.92	46.00	-14.08	AVG	
7	1.4500	40.88	0.01	40.89	56.00	-15.11	QP	
8	1.4500	26.74	0.01	26.75	46.00	-19.25	AVG	
9	1.8700	39.19	0.01	39.20	56.00	-16.80	QP	
10	1.8700	24.68	0.01	24.69	46.00	-21.31	AVG	
11	2.2800	39.18	0.01	39.19	56.00	-16.81	QP	
12	2.2800	24.59	0.01	24.60	46.00	-21.40	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 17 of 70

## PEAK OUTPUT POWER MEASUREMENT

## 6.1. Standard Applicable

According to  $\S15.247(a)(2)$ , (b)

- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and
- 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (c) Operation with directional antenna gains greater than 6 dBi.
- (1) Fixed point-to-point operation:
- (i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for
- fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
- (ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms">http://www.sgs.com/terms</a>

and conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 18 of 70

### **6.2.** Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW= 1MHz, VBW = 3MHz, Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

## 6.3. Measurement Equipment Used:

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010			
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009			
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009			
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 19 of 70

### 6.4. Measurement Result

## 802.11b

Cable loss = $0$		Peak Power Output						
СН	Frequency		Required					
	(MHz)	1	2	5.5	11	Limit		
1	2412	17.31	17.24	17.16	17.09	30 dBm		
6	2437	17.58	17.51	17.43	17.35	30 dBm		
11	2462	17.05	16.96	16.89	16.80	30 dBm		

## 802.11g

Cabl	le loss = 0		Peak Power Output							
СН	Frequency		Data Rate           6         9         12         18         24         36         48         54					Required		
СН	(MHz)	6						48	54	Limit
1	2412	13.45	13.38	13.31	13.24	13.15	13.05	12.91	12.82	30 dBm
6	2437	13.54	13.46	13.38	13.30	13.22	13.10	13.00	12.89	30 dBm
11	2462	13.86	13.78	13.69	13.60	13.52	13.41	13.30	13.16	30 dBm

Cable loss = 0

\*Note: Offset 10.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 20 of 70

## 802.11b, 1Mbps

# **Power Output Plot (CH Low)**

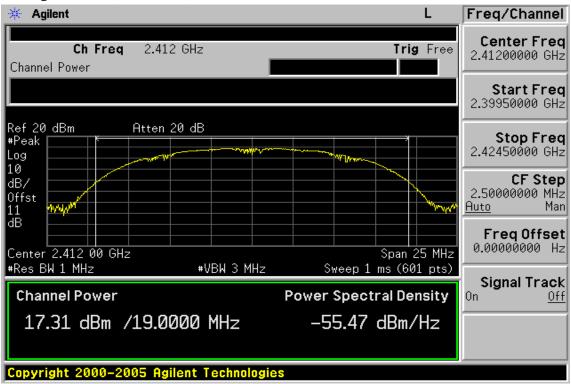

# **Power Output Plot (CH Mid)**

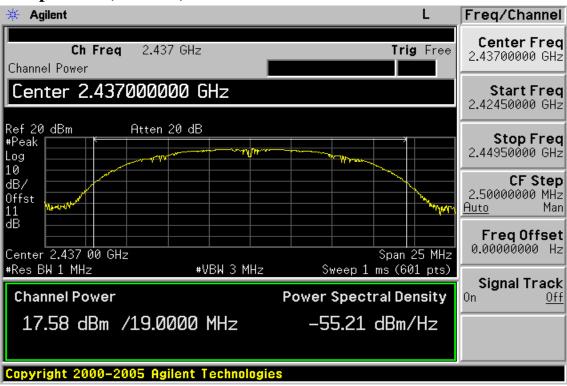

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488


www.sgs.com.tw



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 21 of 70

# **Power Output Plot (CH High)**

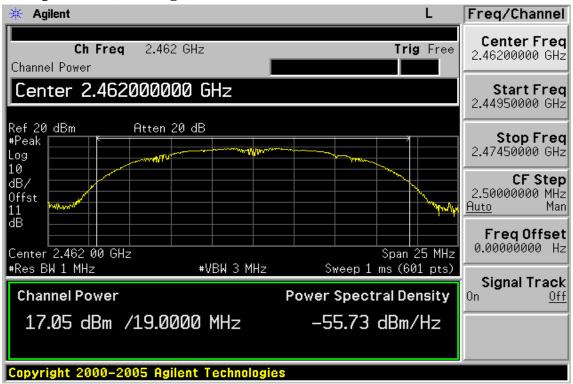

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of the documents in unposition is unposition. ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 22 of 70

# 802.11g, 6Mbps

# **Power Output Plot (CH Low)**

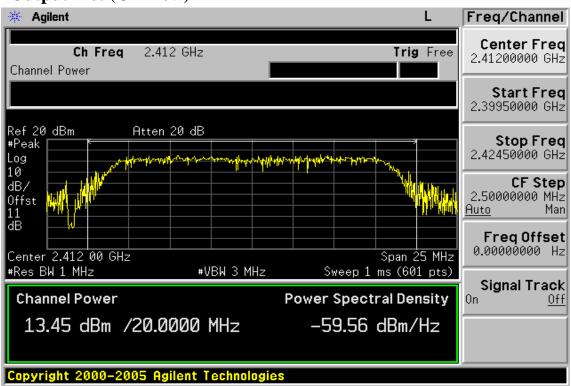

# **Power Output Plot (CH Mid)**

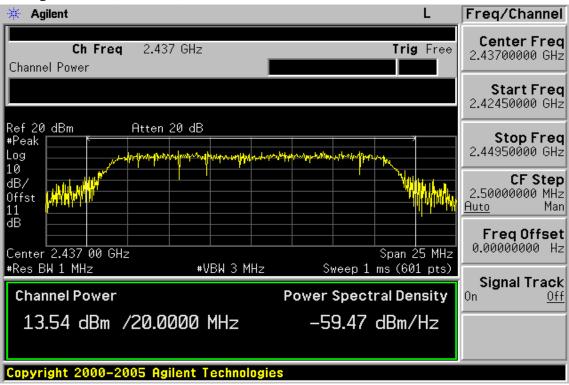

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention


is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 23 of 70

# **Power Output Plot (CH High)**

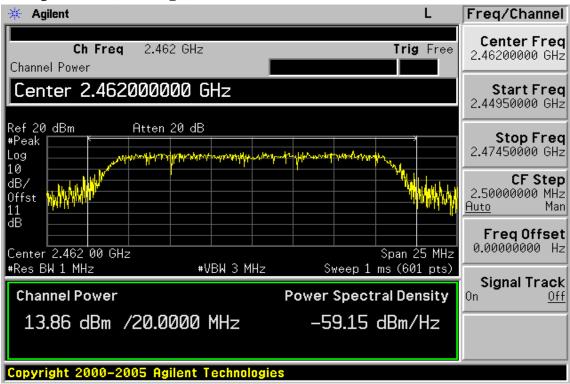

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 Issue Date: Aug. 27, 2008

Page: 24 of 70

## 7. 6dB Bandwidth

## 7.1. Standard Applicable

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

#### 7.2. Measurement Procedure

- 1.Place the EUT on the table and set it in transmitting mode.
- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the 3.antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=1% bandwidth, VBW =3\* RBW, Span= 50MHz, Sweep=auto
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

7.3. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010			
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009			
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009			
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 25 of 70

### 7.4. Measurement Result

#### 802.11b

СН	Bandwidth (MHz)	Bandwidth (KHz)	Result
Lower	10.144	> 500	PASS
Mid	10.153	> 500	PASS
Higher	10.159	> 500	PASS

<sup>\*</sup>Offset 10.5dB

### 802.11g

СН	Bandwidth (MHz)	Bandwidth (KHz)	Result
Lower	16.586	> 500	PASS
Mid	16.556	> 500	PASS
Higher	16.575	> 500	PASS

<sup>\*</sup>Offset 10.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 26 of 70

### 802.11b

## 6dB Band Width Test Data CH-Low

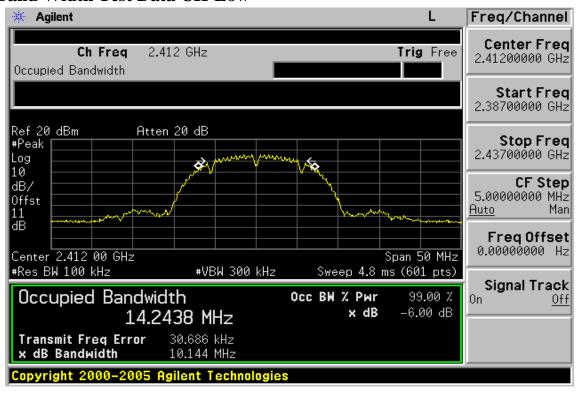

## 6dB Band Width Test Data CH-Mid

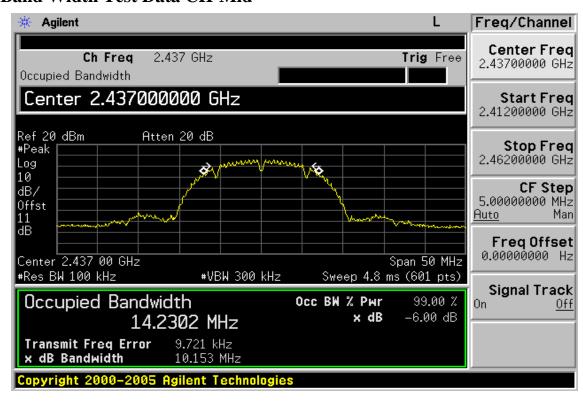

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 🚺 (886-2) 2299-3279


f (886-2) 2298-0488



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 27 of 70

## 6dB Band Width Test Data CH-High

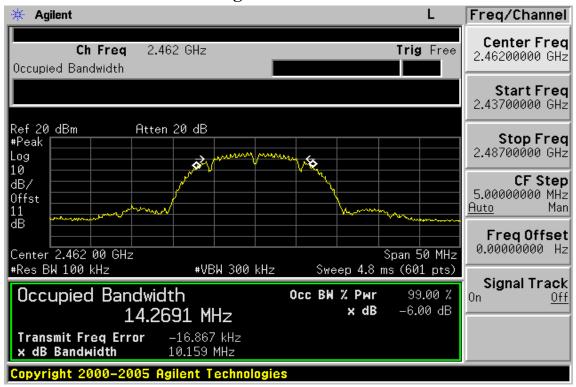

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of the documents in unposition is unposition. ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 28 of 70

## 802.11g

### 6dB Band Width Test Data CH-Low

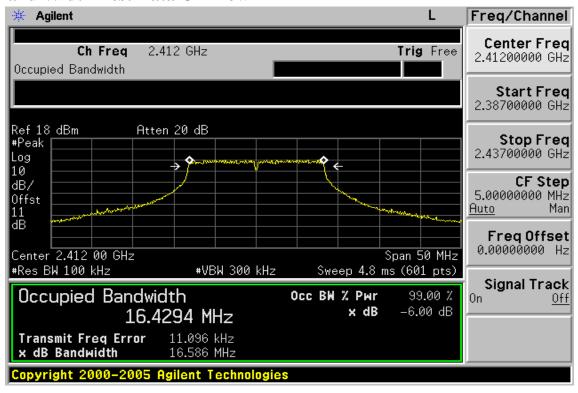

### 6dB Band Width Test Data CH-Mid

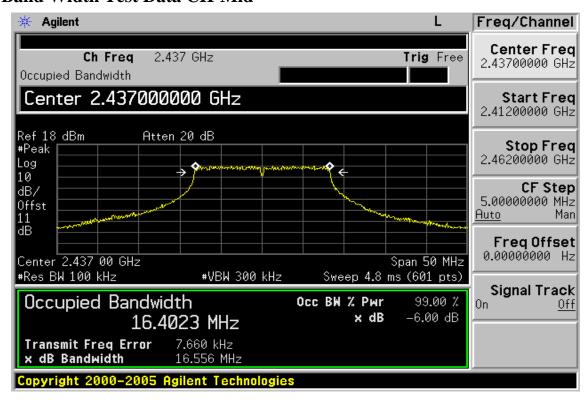

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 29 of 70

# 6dB Band Width Test Data CH-High

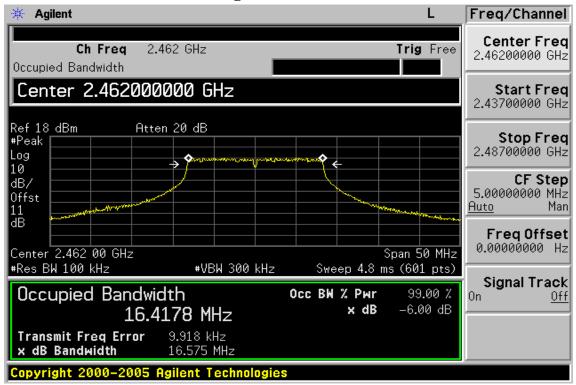

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 30 of 70

### 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

## 8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 8.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=30MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

## 8.3. Measurement Equipment Used:

	Conducted Emission Test Site								
<b>EQUIPMENT</b>	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010				
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009				
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009				
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009				

## 8.4. Measurement Result

Refer to attach spectrum analyzer data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 31 of 70

# 802.11b **Band Edges Test Data CH-Low**



# **Band Edges Test Data CH-High**

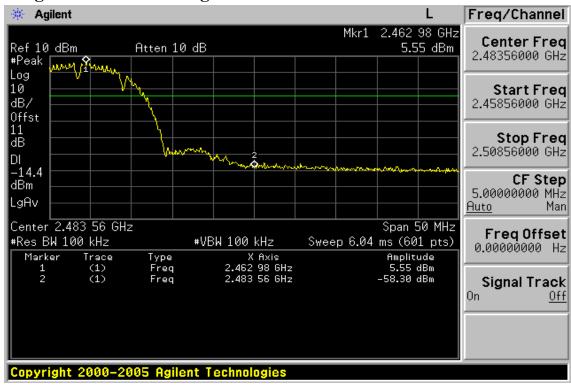

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 32 of 70

Radiated Emission: 802.11 b mode

Operation Mode TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412 MHz Test By Sky Pol Ver. **Tmperature** 25 ℃

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	( <b>dB</b> )	
2390.00	52.06		-10.76	41.30		74.00	54.00	-12.70	Peak
Operation	Mode	TX C	H Low			Test	Date .	Aug. 25, 2	008
Fundamen	tal Frequer	ncy 2412	MHz			Test	By	Sky	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							

	Peak	AV		Actual FS		Peak	AV		
Fre q.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2390.00	52.43		-10.76	41.67		74.00	54.00	-12.33	Peak

## Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested. This rest report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 33 of 70

Radiated Emission: 802.11 b mode

Operation Mode TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462 MHz Test By Sky Pol Ver. **Temperature** 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	( <b>dB</b> )	
2483.50	52.11		-10.46	41.65		74.00	54.00	-12.35	Peak
Operation 1	Mode	TX C	H High			Test	Date A	Aug. 25, 2	008
Fundament	tal Frequer	ncy 2462	MHz			Test	By S	Sky	
Temperatu	re	25 °C				Pol	I	Hor.	
Humidity		65 %							

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	52.75		-10.46	42.29		74.00	54.00	-11.71	Peak

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the


Onless otherwise stated the results shown in this test report reter only to the sample(s) tested. This rest report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 34 of 70

# 802.11g **Band Edges Test Data CH-Low**

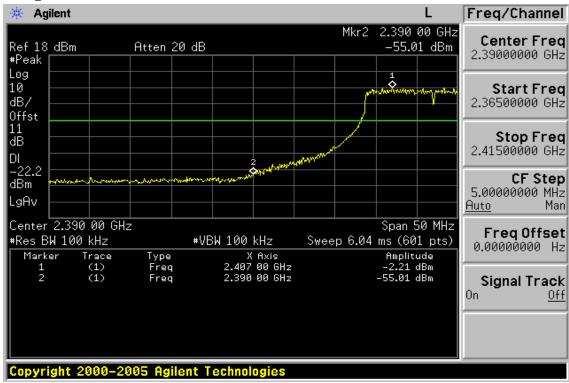

# **Band Edges Test Data CH-High**

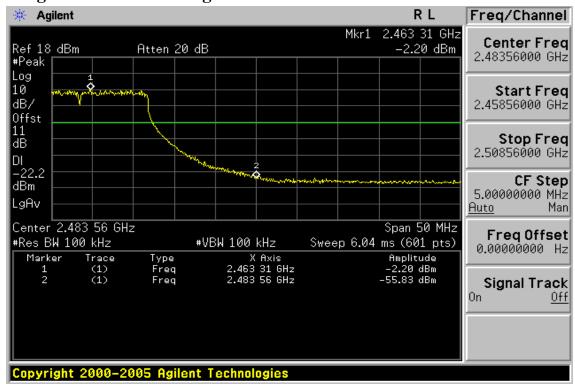

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 35 of 70

Radiated Emission: 802.11 g mode

Operation Mode TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412 MHz Test By Sky Pol Ver. **Tmperature** 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	ıal FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	$(\mathbf{dB})$	
2390.00	52.13		-10.76	41.37		74.00	54.00	-12.63	Peak
Operation 1	Mode	TX C	H Low			Test	Date	Aug. 25, 2	008
Fundament	tal Frequer	ncy 2412	MHz			Test	By	Sky	
Temperatu	re	25 ℃				Pol	]	Hor.	
Humidity		65 %							

	Peak	$\mathbf{AV}$		Actu	ıal FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m	)(dBuV/m)	(dB)	
2390.00	52.24		-10.76	41.48		74.00	54.00	-12.52	Peak

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested. This rest report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 36 of 70

Radiated Emission: 802.11 g mode

Operation Mode TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462 MHz Test By Sky Pol Ver. Temperature 25 ℃

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	ıal FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	(dB)	
2483.50	52.62		-10.46	42.16		74.00	54.00	-11.84	Peak
Operation	Mode	TX C	H High			Test	Date	Aug. 25, 20	800
Fundamen	tal Frequer	ncy 2462	MHz		Test By Sky				
Temperatu	re	25 ℃				Pol		Hor.	
Humidity		65 %							
	Peak	$\mathbf{AV}$		Actu	ıal FS	Peak	$\mathbf{AV}$		
Freq.	O	Reading			AV	Limit	Limit	O	Remark

	reak	AV		Actu	airs	reak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	( <b>dB</b> )	
2483.50	52.11		-10.46	41.65		74.00	54.00	-12.35	Peak

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested. This rest report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/80015 Issue Date: Aug. 27, 2008

Page: 37 of 70

### 9. SPURIOUS RADIATED EMISSION TEST

## 9.1. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

## 9.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.

#### 9.3. Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until all frequency measured were complete.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 


Page: 38 of 70

## 9.4. Test SET-UP (Block Diagram of Configuration)

## (A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

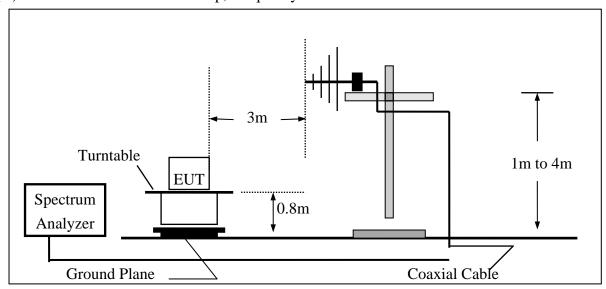

## (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

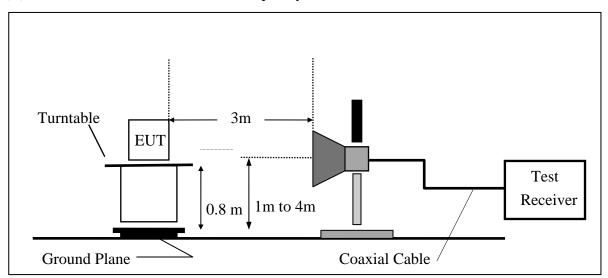

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 39 of 70

#### **Measurement Equipment Used:** 9.5.

	966 Chamber											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009							
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2009							
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010							
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3158	11/29/2007	11/28/2008							
Horn antenna	Schwarzbeck	BBHA 9120D	9120D-673	05/09/2008	05/10/2010							
Horn antenna	Schwarzbeck	BBHA 9170	184/185	12/31/2007	12/30/2008							
Pre-Amplifier	HP	8447F	3113A06892	01/05/2008	01/04/2009							
Pre-Amplifier	HP	8449B	3008A01973	01/05/2008	01/04/2009							
Turn Table	HD	DT420	N/A	N.C.R	N.C.R							
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R							
Controller	HD	HD100	N/A	N.C.R	N.C.R							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2008	01/04/2009							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2008	01/04/2009							

## 9.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

### 9.7. Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of the documents in unposition is unposition. ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488

www.sgs.com.tw




Page: 40 of 70

## **Conducted Spurious Emission Measurement Result (802.11b)** Ch Low 30MHz – 3GHz

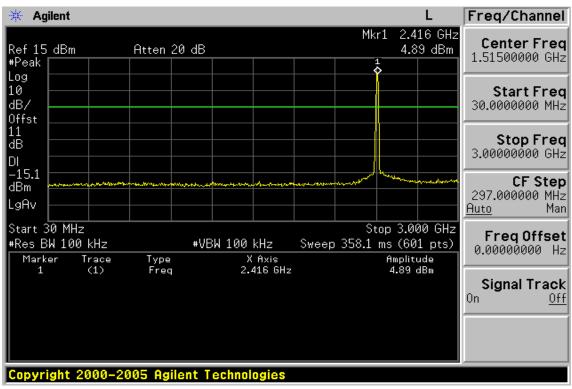

## Ch Low 3GHz - 26.5GHz

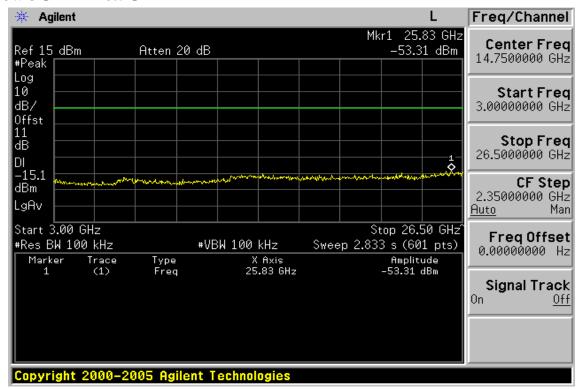

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488

www.sgs.com.tw




Page: 41 of 70

### Ch Mid 30MHz - 3GHz

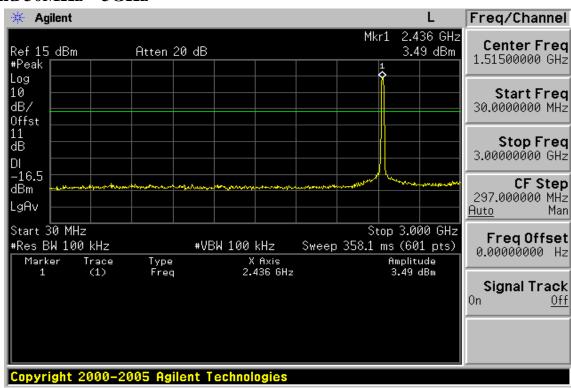

### Ch Mid 3GHz - 26.5GHz

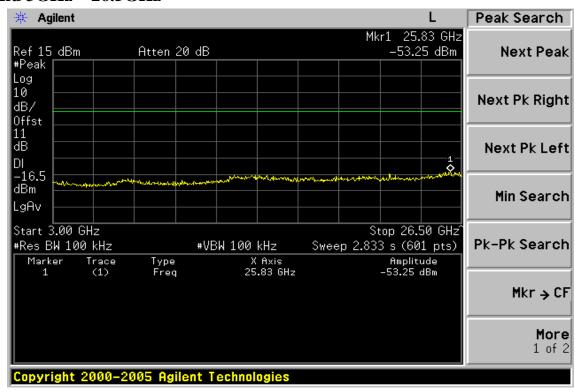

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention


is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Page: 42 of 70

## Ch High 30MHz – 3GHz

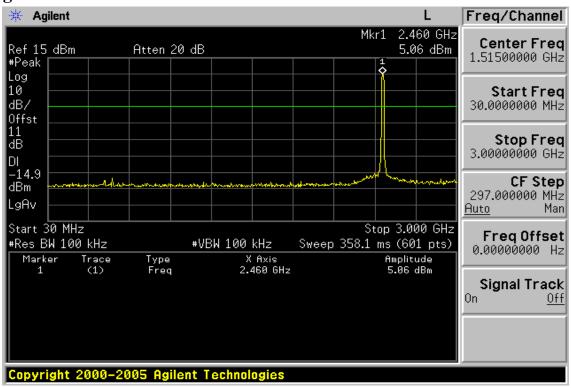

## Ch High 3GHz – 26.5GHz

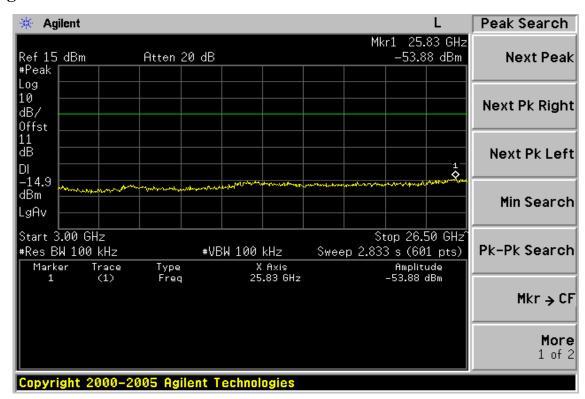

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488

www.sgs.com.tw




Page: 43 of 70

## **Conducted Spurious Emission Measurement Result (802.11g)** Ch Low 30MHz – 3GHz

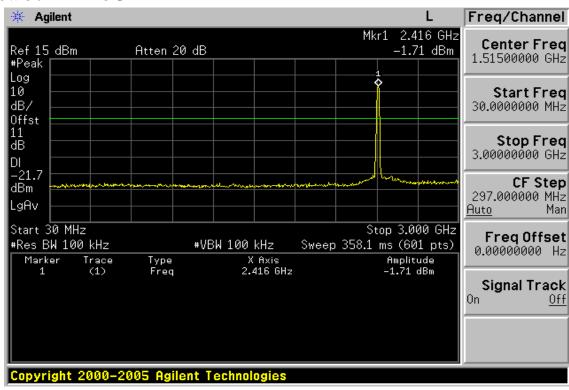

### Ch Low 3GHz - 26.5GHz

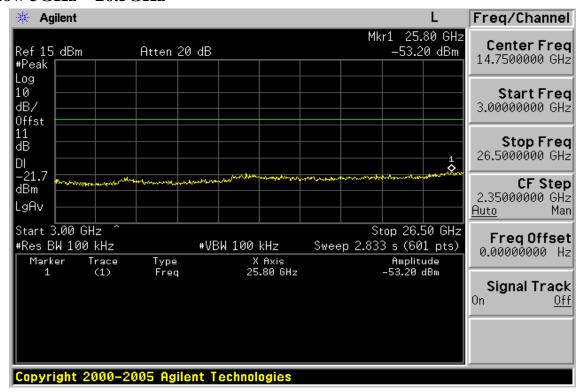

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488




Page: 44 of 70

### Ch Mid 30MHz - 3GHz

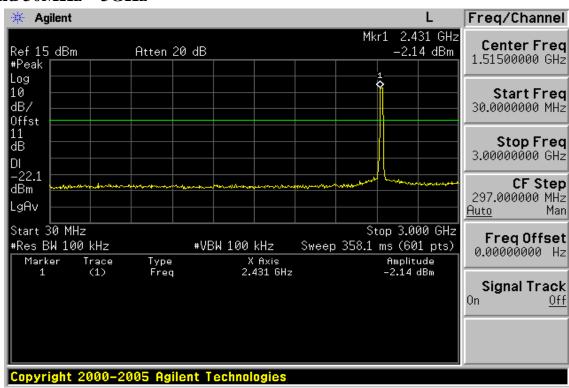

### Ch Mid 3GHz - 26.5GHz

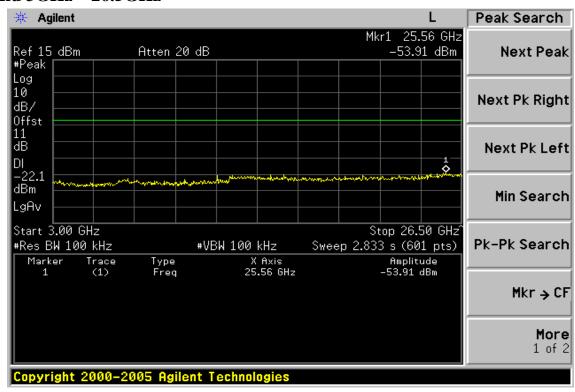

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention


is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Page: 45 of 70

## Ch High 30MHz – 3GHz

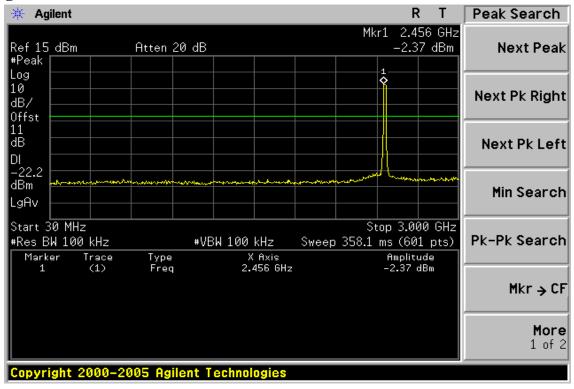

## Ch High 3GHz – 26.5GHz

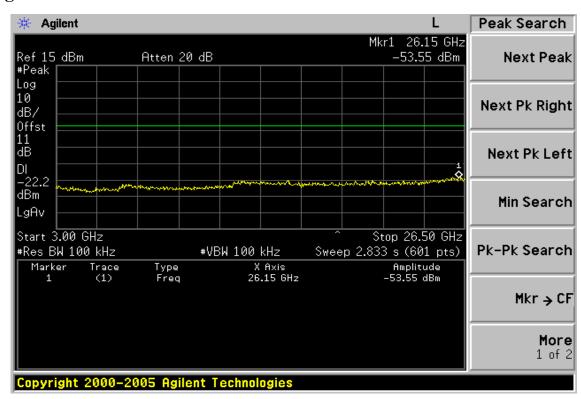

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 46 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
130.88	V	Peak	60.34	-28.16	32.18	43.50	-11.32
232.73	V	Peak	60.60	-30.08	30.52	46.00	-15.48
366.59	V	Peak	53.59	-26.74	26.85	46.00	-19.15
235.64	H	Peak	59.81	-29.99	29.82	46.00	-16.18
298.69	H	Peak	55.64	-28.54	27.10	46.00	-18.90
358.83	H	Peak	51.91	-26.91	25.00	46.00	-21.00

#### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 47 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
130.88	V	Peak	58.35	-28.16	30.19	43.50	-13.31
232.73	V	Peak	59.86	-30.08	29.78	46.00	-16.22
366.59	V	Peak	54.08	-26.74	27.34	46.00	-18.66
130.88	H	Peak	57.26	-28.16	29.10	43.50	-14.40
230.79	Н	Peak	60.88	-30.13	30.75	46.00	-15.25
298.69	Н	Peak	55.15	-28.54	26.61	46.00	-19.39

#### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 48 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH High **Test Date** Aug. 25, 2008

Fundamental Frequency 2462MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
128.94	V	Peak	56.83	-28.27	28.56	43.50	-14.94
232.73	V	Peak	62.41	-30.08	32.33	46.00	-13.67
298.69	V	Peak	53.15	-28.54	24.61	46.00	-21.39
85.29	Н	Peak	60.46	-30.75	29.71	40.00	-10.29
130.88	H	Peak	59.95	-28.16	31.79	43.50	-11.71
198.78	H	Peak	59.11	-31.30	27.81	43.50	-15.69
232.73	Н	Peak	59.59	-30.08	29.51	46.00	-16.49

### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 49 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	60.22	-26.67	33.55	40.00	-6.45
128.94	V	Peak	58.96	-28.27	30.69	43.50	-12.81
232.73	V	Peak	65.03	-30.08	34.95	46.00	-11.05
128.94	H	Peak	57.91	-28.27	29.64	43.50	-13.86
237.58	Н	Peak	59.75	-29.94	29.81	46.00	-16.19
298.69	Н	Peak	56.84	-28.54	28.30	46.00	-17.70

#### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 50 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode 802.11g TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
85.29	V	Peak	60.94	-30.75	30.19	40.00	-9.81
130.88	V	Peak	59.11	-28.16	30.95	43.50	-12.55
232.73	V	Peak	59.62	-30.08	29.54	46.00	-16.46
128.94	Н	Peak	57.79	-28.27	29.52	43.50	-13.98
235.64	H	Peak	59.97	-29.99	29.98	46.00	-16.02
358.83	Н	Peak	51.51	-26.91	24.60	46.00	-21.40

#### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 51 of 70

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode 802.11g TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462MHz Test By Sky Pol Ver./Hor **Temperature** 25 °C

Humidity 60 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Mar- gin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
85.29	V	Peak	60.56	-30.75	29.81	40.00	-10.19
128.94	V	Peak	58.46	-28.27	30.19	43.50	-13.31
232.73	V	Peak	62.17	-30.08	32.09	46.00	-13.91
128.94	H	Peak	58.44	-28.27	30.17	43.50	-13.33
218.18	Н	Peak	62.00	-30.78	31.22	46.00	-14.78
232.73	Н	Peak	61.71	-30.08	31.63	46.00	-14.37

#### Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 52 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Ver. **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1988.0	48.60		-12.73	35.87		74.00	54.00	-18.13	Peak
4824.0						74.00	54.00		
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 53 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Hor **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	<b>Actual FS</b>		$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4824.0						74.00	54.00	_
7236.0						74.00	54.00	
9648.0						74.00	54.00	
12060.0						74.00	54.00	
14472.0						74.00	54.00	
16884.0						74.00	54.00	
19296.0						74.00	54.00	
21708.0						74.00	54.00	
24120.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 54 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Ver **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1936.0	48.37		-13.01	35.36		74.00	54.00	-18.64	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 55 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Hor **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	<b>Actual FS</b>		$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4874.0						74.00	54.00	_
7311.0						74.00	54.00	
9748.0						74.00	54.00	
12185.0						74.00	54.00	
14622.0						74.00	54.00	
17059.0						74.00	54.00	
19496.0						74.00	54.00	
21933.0						74.00	54.00	
24370.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 56 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462MHz Test By Sky Pol Ver **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1143.0	51.22		-15.79	35.43		74.00	54.00	-18.57	Peak
1936.0	47.37		-13.01	34.36		74.00	54.00	-19.64	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 57 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH High **Test Date** Aug. 25, 2008

Fundamental Frequency 2462MHz Test By Sky Pol Hor **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	45.11		-5.91	39.20		74.00	54.00	-14.80	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 58 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Ver. **Temperature** 25 °C

Humidity 60 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4824.0						74.00	54.00	
7236.0						74.00	54.00	
9648.0						74.00	54.00	
12060.0						74.00	54.00	
14472.0						74.00	54.00	
16884.0						74.00	54.00	
19296.0						74.00	54.00	
21708.0						74.00	54.00	
24120.0						74.00	54.00	

#### Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- Data of measurement within this frequency range shown " " in the table above means (2) the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- **(4)** Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 59 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low Test Date Aug. 25, 2008

Fundamental Frequency 2412MHz Test By Sky Pol Hor **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4824.0						74.00	54.00	_
7236.0						74.00	54.00	
9648.0						74.00	54.00	
12060.0						74.00	54.00	
14472.0						74.00	54.00	
16884.0						74.00	54.00	
19296.0						74.00	54.00	
21708.0						74.00	54.00	
24120.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 60 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Ver **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4874.0						74.00	54.00	_
7311.0						74.00	54.00	
9748.0						74.00	54.00	
12185.0						74.00	54.00	
14622.0						74.00	54.00	
17059.0						74.00	54.00	
19496.0						74.00	54.00	
21933.0						74.00	54.00	
24370.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 61 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Mid Test Date Aug. 25, 2008

Fundamental Frequency 2437MHz Test By Sky Pol Hor **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4874.0						74.00	54.00	
7311.0						74.00	54.00	
9748.0						74.00	54.00	
12185.0						74.00	54.00	
14622.0						74.00	54.00	
17059.0						74.00	54.00	
19496.0						74.00	54.00	
21933.0						74.00	54.00	
24370.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 62 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462MHz Test By Sky Pol Ver **Temperature** 23 °C

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4924.0						74.00	54.00	_
7386.0						74.00	54.00	
9848.0						74.00	54.00	
12310.0						74.00	54.00	
14772.0						74.00	54.00	
17234.0						74.00	54.00	
19696.0						74.00	54.00	
22158.0						74.00	54.00	
24620.0						74.00	54.00	

#### Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200
- Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 Issue Date: Aug. 27, 2008

Page: 63 of 70

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH High Test Date Aug. 25, 2008

Fundamental Frequency 2462 MHz Test By Sky Temperature  $23 \,^{\circ}\text{C}$  Pol Hor

Humidity 54 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$	
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4924.0						74.00	54.00	_
7386.0						74.00	54.00	
9848.0						74.00	54.00	
12310.0						74.00	54.00	
14772.0						74.00	54.00	
17234.0						74.00	54.00	
19696.0						74.00	54.00	
22158.0						74.00	54.00	
24620.0						74.00	54.00	

#### Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 64 of 70

## 10. Peak Power Spectral Density

## 10.1. Standard Applicable

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 10.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

## 10.3. Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010				
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009				
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009				
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 65 of 70

### 10.4. Measurement Result

### 802.11b

СН	RF Power Density   Cable loss   RF Power Density		Maximum Limit	
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-7.90	0.00	-7.90	8
Mid	-7.94	0.00	-7.94	8
High	-8.01	0.00	-8.01	8

## 802.11g

СН	RF Power Density	RF Power Density   Cable loss   RF Power Density		Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-15.78	0.00	-15.78	8
Mid	-15.91	0.00	-15.91	8
High	-15.78	0.00	-15.78	8


Note: offset 11 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Page: 66 of 70

802.11b **Power Spectral Density Test Plot (CH-Low)** 

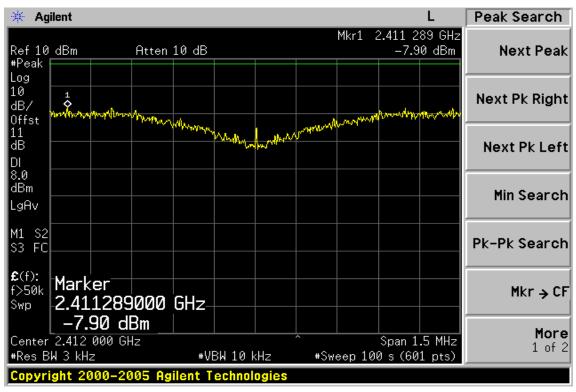

## **Power Spectral Density Test Plot (CH-Mid)**

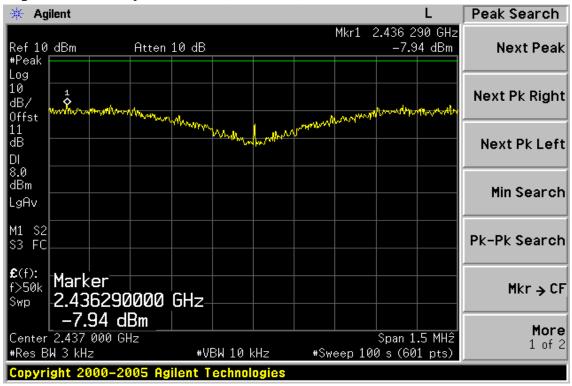

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 67 of 70

## **Power Spectral Density Test Plot (CH-High)**

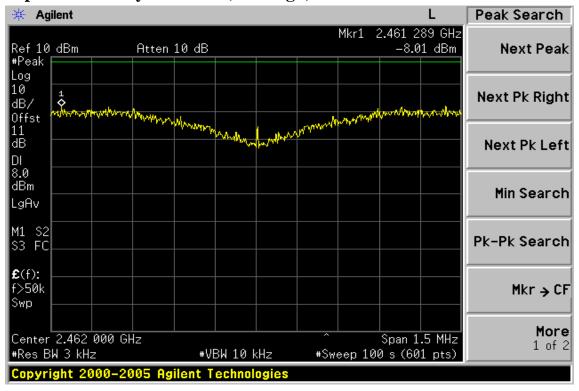

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Page: 68 of 70

802.11g **Power Spectral Density Test Plot (CH-Low)** 



## **Power Spectral Density Test Plot (CH-Mid)**

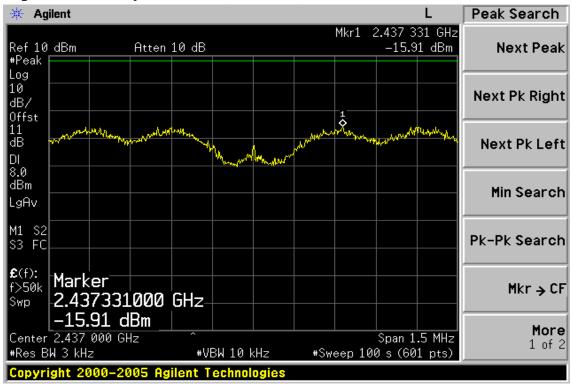

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀 第五下路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488


www.sgs.com.tw



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 69 of 70

# **Power Spectral Density Test Plot (CH-High)**

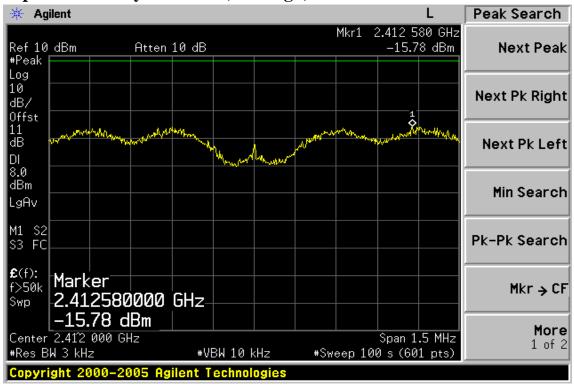

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/80015 **Issue Date: Aug. 27, 2008** 

Page: 70 of 70

## 11. ANTENNA REQUIREMENT

## 11.1. Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 11.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company under its General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms">http://www.sgs.com/terms</a>

and conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.