



A D T

FCC SAR Test Report

Report No. : SA121025C24
Applicant : HTC Corporation
Address : 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.
Product : Smartphone
FCC ID : NM8CDMAHTX21
Brand : HTC
Model No. : CDMA HTX21
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1991 / IEEE 1528:2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)
KDB 248227 D01 v01r02 / KDB 648474 D01 v01r05
KDB 941225 D01 v02 / KDB 941225 D03 v01 / KDB 941225 D06 v01
Date of Testing : Oct. 31, 2012 ~ Nov. 08, 2012

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : Evonne Liu
Evonne Liu / Specialist

Approved By : Roy Wu
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR).....	6
3.2 SPEAG DASY System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	12
3.4 SAR Measurement Procedure	13
3.4.1 Area & Zoom Scan Procedure	13
3.4.2 Volume Scan Procedure.....	13
3.4.3 Power Drift Monitoring.....	13
3.4.4 Spatial Peak SAR Evaluation	14
3.4.5 SAR Averaged Methods	14
4. SAR Measurement Evaluation	15
4.1 EUT Configuration and Setting.....	15
4.2 EUT Testing Position	17
4.3 Tissue Verification	19
4.4 System Verification.....	20
4.5 Conducted Power Results.....	21
4.6 SAR Testing Results.....	24
4.6.1 SAR Results for Head	24
4.6.2 SAR Results for Body.....	25
4.6.3 Simultaneous Multi-band Transmission Evaluation	27
5. Calibration of Test Equipment.....	31
6. Measurement Uncertainty	32
7. Information on the Testing Laboratories	34
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	



Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Original release	Dec. 14, 2012



1. Summary of Maximum SAR Value

Mode / Band	Test Position	SAR-1g (W/kg)	SAR-10g (W/kg)
GSM850	Head	0.233	0.177
	Body Worn (1 cm Gap)	0.406	0.218
	Hotspot Mode (1 cm Gap)	0.618	0.432
GSM1900	Head	0.238	0.138
	Body Worn (1 cm Gap)	0.44	0.241
	Hotspot Mode (1 cm Gap)	1.18	0.599
WCDMA Band II	Head	0.707	0.41
	Body Worn (1 cm Gap)	1.26	0.695
	Hotspot Mode (1 cm Gap)	1.35	0.699
WCDMA Band V	Head	0.273	0.21
	Body Worn (1 cm Gap)	0.449	0.319
	Hotspot Mode (1 cm Gap)	0.488	0.28
CDMA2000 BC0	Head	0.247	0.19
	Body Worn (1 cm Gap)	0.4	0.286
	Hotspot Mode (1 cm Gap)	0.433	0.248
WLAN 2.4GHz	Head	0.102	0.043
	Body Worn (1 cm Gap)	0.158	0.065
	Hotspot Mode (1 cm Gap)	0.184	0.075
WLAN 5GHz	Head	0.673	0.241
	Body Worn (1 cm Gap)	1.22	0.402
	Hotspot Mode (1 cm Gap)	0.83	0.264
Bluetooth / NFC	Head	N/A	N/A
	Body Worn (1 cm Gap)	N/A	N/A
	Hotspot Mode (1 cm Gap)	N/A	N/A

Note:

1. The SAR limit (**1.6 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991.
2. Since the Bluetooth/NFC maximum power is less than P_{Ref} , SAR testing for Bluetooth/NFC is not required.



2. Description of Equipment Under Test

EUT Type	Smartphone
FCC ID	NM8CDMAHTX21
Brand Name	HTC
Model Name	CDMA HTX21
IMEI Code	990000670179003
Tx Frequency Bands (Unit: MHz)	GSM850 : 824 ~ 849 GSM1900 : 1850 ~ 1910 WCDMA Band II : 1850 ~ 1910 WCDMA Band V : 824 ~ 849 CDMA2000 BC0 : 824 ~ 849 WLAN : 2400 ~ 2483.5, 5150 ~ 5350, 5470 ~ 5725, 5725 ~ 5825 Bluetooth : 2400 ~ 2483.5
Uplink Modulations	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK CDMA2000 : QPSK 802.11b : DSSS 802.11a/g/n : OFDM Bluetooth : GFSK
Maximum AVG Conducted Power (Unit: dBm)	GSM850 : 33.37 GSM1900 : 29.45 WCDMA Band II : 23.76 WCDMA Band V : 23.29 CDMA2000 BC0 : 25.06 802.11b : 18.58 802.11g : 13.77 802.11n HT20 (2.4GHz) : 12.77 802.11n HT40 (2.4GHz) : 12.75 802.11a : 13.60 802.11n HT20 (5GHz) : 13.54 802.11n HT40 (5GHz) : 13.30 Bluetooth : 2.32
Antenna Type	Fixed Internal Antenna
EUT Stage	Identical Prototype

Note:

1. This device does not support DTM capability.
2. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

FCC SAR Test Report

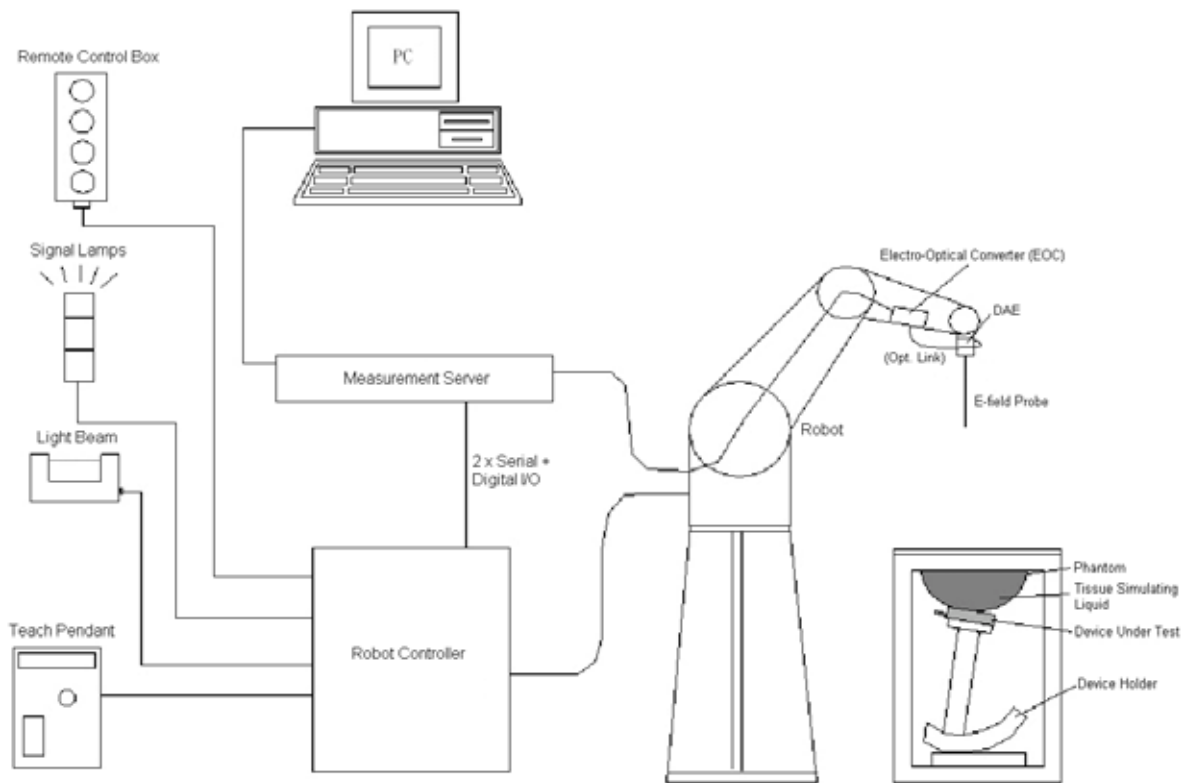


Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY4



Fig-3.3 DASY5

FCC SAR Test Report

3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.


Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	

3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	


3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	


FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	


3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

FCC SAR Test Report

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

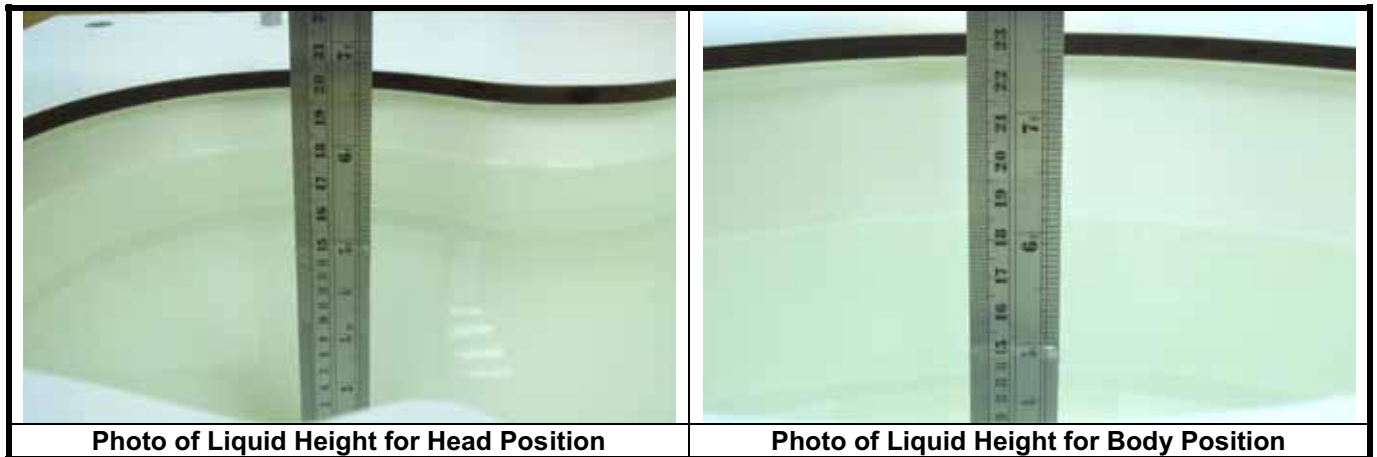

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

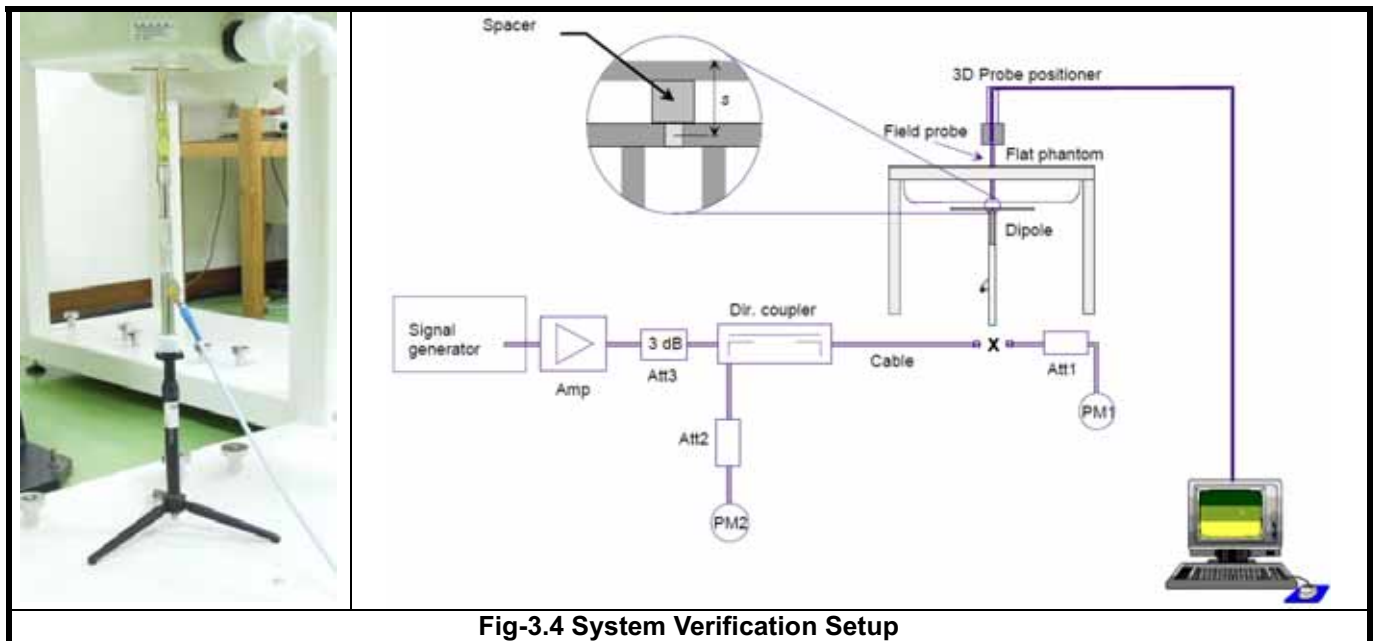


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.



3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASYS system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for below 3 GHz, and 7x7x9 points with step size 4, 4 and 2.5 mm for above 5 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



FCC SAR Test Report

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

FCC SAR Test Report

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Antenna Location>

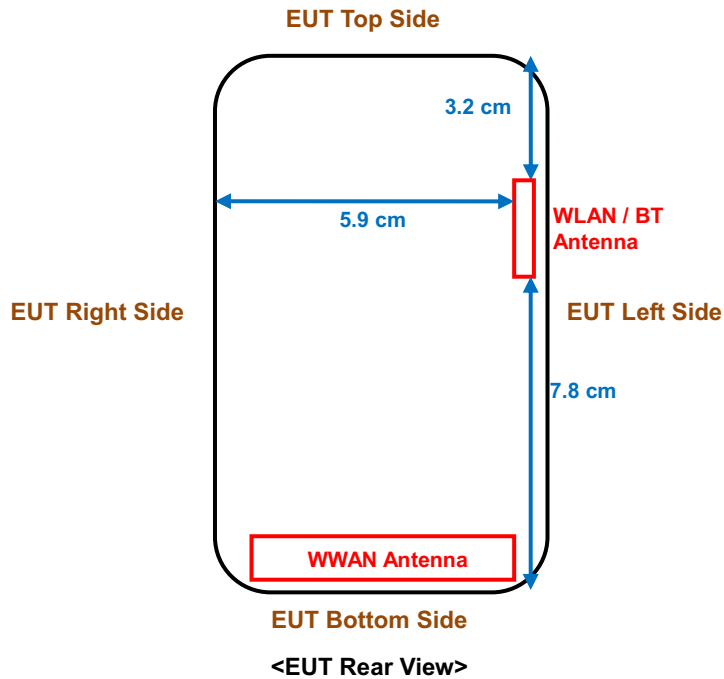

This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces / slide edges where a transmitting antenna is within 2.5 cm from the edge. Since the SAR is required for antenna located within 2.5 cm from edge, SAR testing for each antenna is listed as below.

WWAN Antenna : Front Face, Rear Face, Left Side, Right Side, Bottom Side

WLAN / BT Antenna : Front Face, Rear Face, Left Side

The simultaneous transmission possibilities are listed as below.

Simultaneous TX Combination	Configuration	Head (Voice / VoIP)	Body Worn (Voice / VoIP)	Hotspot (Data)
1	GSM850 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
2	GSM1900 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
3	WCDMA II (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
4	WCDMA V (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
5	CDMA2000 BC0 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes

The WLAN and BT cannot transmit simultaneously, so there is no co-location test requirement for WLAN and BT.



FCC SAR Test Report

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For GSM850, the power control level is set to 5. For GPRS850 (GMSK, CS1), the power control level is set to 5. For EDGE850 (GMSK: MCS1, 8PSK:MCS9), the power control level is set to 8. For GSM1900, the power control level is set to 0. For GPRS1900 (GMSK, CS1), the power control level is set to 0. For EDGE1900 (GMSK: MCS1, 8PSK:MCS9), the power control level is set to 2.

For WCDMA, head and body SAR is tested under 12.2k RMC mode with power control set all up bits. SAR for AMR is not required since its power is less than 1/4 dB higher than RMC. SAR for HSDPA/HSUPA is not required since its power is less than 1/4 dB higher than RMC without HSDPA/HSUPA and SAR for 12.2 kbps RMC is less than 75% of the SAR limit (1.2 W/kg).

For CDMA, SAR is tested under 1xRTT and the power control set "All Up Bits". SAR for EVDO is not required since its power is less than 1/4 dB higher than the 1xRTT. The steps for system simulator (Agilent E5515C) setup are as below.

1. Set the Sector ID
2. Set the Protocol Release
3. Set the Cell Band and connecting Channel
4. Set the RTAP Rate
5. Set the power control
6. Press "Start Data Connection" button

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle. The data rates for WLAN SAR testing were set in 1 Mbps for 802.11b, 6 Mbps for 802.11a, and MCS0 for 802.11n HT40 due to the highest RF output power.

4.2 EUT Testing Position

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Right Side, Left Side, Bottom Side, Front Face of EUT with phantom 1 cm gap**, and **Rear Face of EUT with phantom 1 cm gap** positions as illustrated below:

1. Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

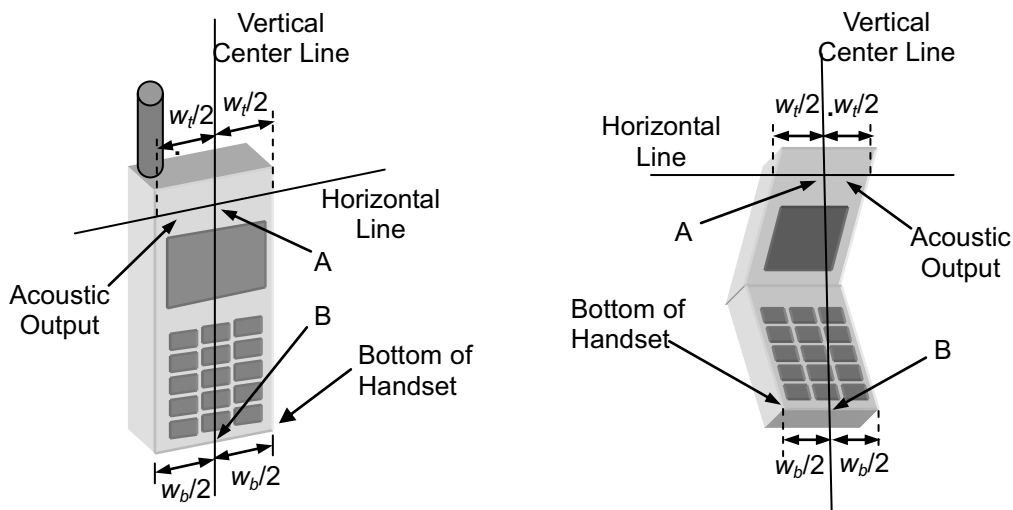


Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

FCC SAR Test Report

2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

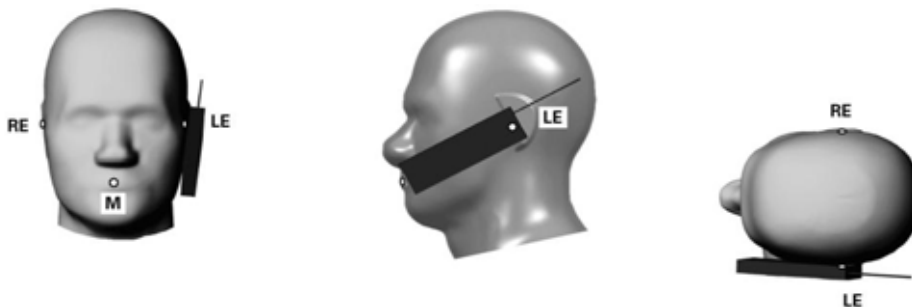


Fig-4.2 Illustration for Cheek Position

3. Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

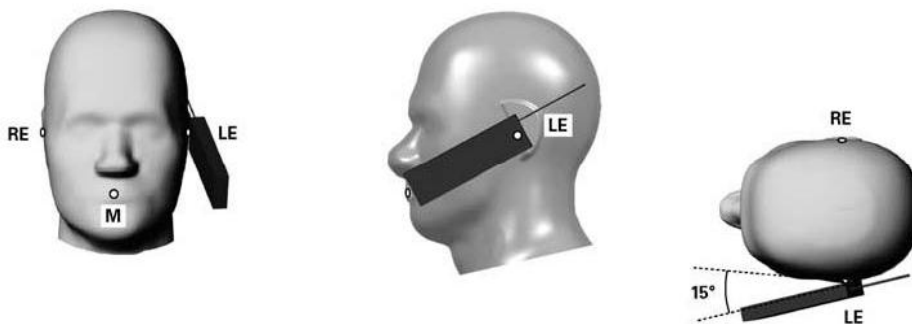


Fig-4.3 Illustration for Tilted Position

FCC SAR Test Report

4. Body Worn Position

- (a) To position the EUT parallel to the phantom surface.
- (b) To adjust the EUT parallel to the flat phantom.
- (c) To adjust the distance between the EUT surface and the flat phantom to 1.0 cm.

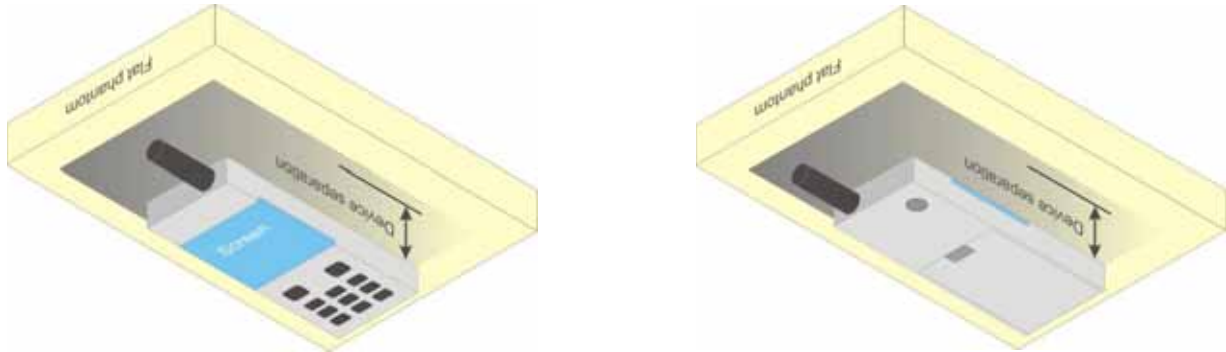


Fig-4.4 Illustration for Body Worn Position

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
H835	835	21.0	0.916	42.748	0.90	41.5	1.78	3.01	Oct. 31, 2012
H1900	1900	20.6	1.412	40.293	1.40	40.0	0.86	0.73	Nov. 01, 2012
H2450	2450	20.5	1.79	40.10	1.80	39.2	-0.56	2.30	Nov. 01, 2012
H5G	5200	20.8	4.538	36.622	4.66	36.0	-2.62	1.73	Nov. 06, 2012
H5G	5500	20.5	4.931	36.498	4.96	35.6	-0.58	2.52	Nov. 08, 2012
H5G	5800	20.5	5.18	35.752	5.27	35.3	-1.71	1.28	Nov. 08, 2012
B835	835	20.7	0.988	56.906	0.97	55.2	1.86	3.09	Oct. 31, 2012
B835	835	20.7	0.962	54.724	0.97	55.2	-0.82	-0.86	Nov. 01, 2012
B1900	1900	20.5	1.544	53.431	1.52	53.3	1.58	0.25	Nov. 01, 2012
B1900	1900	20.3	1.55	53.00	1.52	53.3	1.97	-0.56	Nov. 02, 2012
B2450	2450	20.3	2.02	53.40	1.95	52.7	3.59	1.33	Nov. 01, 2012
B5G	5200	20.4	5.263	49.005	5.30	49.0	-0.70	0.01	Nov. 02, 2012
B5G	5500	20.4	5.706	48.521	5.65	48.6	0.99	-0.16	Nov. 02, 2012
B5G	5800	20.4	6.118	47.772	6.00	48.2	1.97	-0.89	Nov. 02, 2012
B5G	5800	20.8	6.127	47.81	6.00	48.2	2.12	-0.81	Nov. 06, 2012
B5G	5800	20.6	6.118	47.772	6.00	48.2	1.97	-0.89	Nov. 08, 2012

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within ± 2 °C.



FCC SAR Test Report

4.4 System Verification

The measuring results for system check are shown as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Oct. 31, 2012	Head	835	9.46	2.33	9.32	-1.48	4d021	3578	1277
Nov. 01, 2012	Head	1900	38.90	9.91	39.64	1.90	5d036	3578	1277
Nov. 01, 2012	Head	2450	52.90	13.20	52.80	-0.19	737	3864	579
Nov. 06, 2012	Head	5200	79.60	7.91	79.10	-0.63	1018	3578	1277
Nov. 08, 2012	Head	5500	84.70	8.99	89.90	6.14	1018	3578	1277
Nov. 08, 2012	Head	5800	78.60	8.44	84.40	7.38	1018	3578	1277
Oct. 31, 2012	Body	835	9.60	2.54	10.16	5.83	4d021	3578	1277
Nov. 01, 2012	Body	835	9.60	2.47	9.88	2.92	4d021	3578	1277
Nov. 01, 2012	Body	1900	38.90	10.50	42.00	7.97	5d036	3578	1277
Nov. 02, 2012	Body	1900	38.90	9.74	38.96	0.15	5d036	3864	579
Nov. 01, 2012	Body	2450	50.00	12.10	48.40	-3.20	737	3864	579
Nov. 02, 2012	Body	5200	72.70	7.63	76.30	4.95	1018	3578	1277
Nov. 02, 2012	Body	5500	78.30	7.48	74.80	-4.47	1018	3578	1277
Nov. 02, 2012	Body	5800	73.40	6.90	69.00	-5.99	1018	3578	1277
Nov. 06, 2012	Body	5800	73.40	6.89	68.90	-6.13	1018	3578	1277
Nov. 08, 2012	Body	5800	73.40	7.73	77.30	5.31	1018	3578	1277

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.



FCC SAR Test Report

A D T

4.5 Conducted Power Results

The measuring conducted power (Unit: dBm) are shown as below.

Band	GSM850			GSM1900		
	128	189	251	512	661	810
Channel						
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1 Uplink)	32.80	33.11	33.37	29.45	29.36	29.38
GPRS 8 (GMSK, 1 Uplink)	32.81	33.12	33.34	29.41	29.29	29.35
GPRS 10 (GMSK, 2 Uplink)	30.46	30.77	31.03	28.13	28.04	28.06
GPRS 11 (GMSK, 3 Uplink)	29.14	29.45	29.71	27.15	27.06	27.08
GPRS 12 (GMSK, 4 Uplink)	27.94	28.25	28.51	26.63	26.54	26.56
EDGE 8 (GMSK, 1 Uplink)	32.56	32.87	33.13	29.40	29.31	29.33
EDGE 10 (GMSK, 2 Uplink)	30.25	30.56	30.82	28.09	28.00	28.02
EDGE 11 (GMSK, 3 Uplink)	28.87	29.18	29.44	26.96	26.87	26.89
EDGE 12 (GMSK, 4 Uplink)	27.70	28.01	28.27	26.36	26.27	26.29
EDGE 8 (8PSK, 1 Uplink)	26.66	26.97	27.23	25.50	25.41	25.43
EDGE 10 (8PSK, 2 Uplink)	26.49	26.80	27.06	25.13	25.04	25.06
EDGE 11 (8PSK, 3 Uplink)	26.24	26.55	26.81	24.08	23.99	24.01
EDGE 12 (8PSK, 4 Uplink)	23.90	24.21	24.47	23.02	22.93	22.95
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1 Uplink)	23.80	24.11	24.37	20.45	20.36	20.38
GPRS 8 (GMSK, 1 Uplink)	23.81	24.12	24.34	20.41	20.29	20.35
GPRS 10 (GMSK, 2 Uplink)	24.46	24.77	25.03	22.13	22.04	22.06
GPRS 11 (GMSK, 3 Uplink)	24.88	25.19	25.45	22.89	22.80	22.82
GPRS 12 (GMSK, 4 Uplink)	24.94	25.25	25.51	23.63	23.54	23.56
EDGE 8 (GMSK, 1 Uplink)	23.56	23.87	24.13	20.40	20.31	20.33
EDGE 10 (GMSK, 2 Uplink)	24.25	24.56	24.82	22.09	22.00	22.02
EDGE 11 (GMSK, 3 Uplink)	24.61	24.92	25.18	22.70	22.61	22.63
EDGE 12 (GMSK, 4 Uplink)	24.70	25.01	25.27	23.36	23.27	23.29
EDGE 8 (8PSK, 1 Uplink)	17.66	17.97	18.23	16.50	16.41	16.43
EDGE 10 (8PSK, 2 Uplink)	20.49	20.80	21.06	19.13	19.04	19.06
EDGE 11 (8PSK, 3 Uplink)	21.98	22.29	22.55	19.82	19.73	19.75
EDGE 12 (8PSK, 4 Uplink)	20.90	21.21	21.47	20.02	19.93	19.95

Note:

1. SAR testing for GSM/GPRS/EDGE was performed on the maximum frame-averaged power mode.
2. The frame-averaged power is linearly scaled the maximum burst-averaged power based on time slots. The calculated methods are shown as below:

Frame-averaged power = Burst-averaged power (1 Uplink) – 9 dBm
Frame-averaged power = Burst averaged power (2 Uplink) – 6 dBm
Frame-averaged power = Burst averaged power (3 Uplink) – 4.26 dBm
Frame-averaged power = Burst averaged power (4 Uplink) – 3 dBm



FCC SAR Test Report

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.4	846.6
RMC 12.2K	23.71	23.76	23.68	23.29	23.05	23.16
HSDPA Subtest-1	22.66	22.94	22.86	22.40	22.28	22.44
HSDPA Subtest-2	22.60	22.81	22.62	22.45	22.25	22.35
HSDPA Subtest-3	22.25	22.41	22.28	21.91	21.71	21.93
HSDPA Subtest-4	22.26	22.42	22.31	21.96	21.82	21.89
HSUPA Subtest-1	22.03	22.31	22.23	22.08	21.84	21.95
HSUPA Subtest-2	21.00	21.28	21.20	20.93	20.69	20.80
HSUPA Subtest-3	21.54	21.82	21.74	21.23	20.99	21.10
HSUPA Subtest-4	21.82	22.03	21.95	21.92	21.68	21.79
HSUPA Subtest-5	22.59	22.87	22.79	22.43	22.19	22.30

Band	CDMA2000 BC0		
Channel	1013	384	777
Frequency (MHz)	824.70	836.52	848.31
1xRTT RC1+SO55	24.94	24.51	24.18
1xRTT RC3+SO55	25.06	24.56	24.21
1xRTT RC3+SO32 (FCH)	25.00	24.34	24.05
1xRTT RC3+SO32 (SCH)	24.91	24.36	24.20
1xEVDO Rev.0 (RTAP 153.6)	24.84	24.34	23.89
1xEVDO Rev. A (RETAP 4096)	24.80	24.31	23.83



FCC SAR Test Report

A D T

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	18.41	18.58	17.63	13.23	13.53	13.77

Band	802.11n (HT20)			802.11n (HT40)		
Channel	1	6	11	3	6	9
Frequency (MHz)	2412	2437	2462	2422	2437	2452
Average Power	12.51	12.51	12.77	12.75	12.74	11.94

Band	802.11a							
Channel	36	40	44	48	52	56	60	64
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320
Average Power	13.51	13.46	13.33	13.34	13.32	13.56	13.51	13.60

Band	802.11a							
Channel	100	104	108	112	116	132	136	140
Frequency (MHz)	5500	5520	5540	5560	5580	5660	5680	5700
Average Power	12.78	12.93	13.04	12.24	13.34	12.8.	12.88	12.71

Band	802.11a							
Channel	149	153	157	161	-	-	-	-
Frequency (MHz)	5745	5765	5785	5805	-	-	-	-
Average Power	12.89	12.91	12.89	12.84	-	-	-	-

Band	802.11n (HT20)							
Channel	36	40	44	48	52	56	60	64
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320
Average Power	13.51	13.41	13.24	13.35	13.35	13.41	13.52	13.54

Band	802.11n (HT20)							
Channel	100	104	108	112	116	132	136	140
Frequency (MHz)	5500	5520	5540	5560	5580	5660	5680	5700
Average Power	12.91	12.73	13.10	13.28	13.30	12.77	12.91	12.75

Band	802.11n (HT20)							
Channel	149	153	157	161	-	-	-	-
Frequency (MHz)	5745	5765	5785	5805	-	-	-	-
Average Power	13.03	12.92	12.93	12.96	-	-	-	-

Band	802.11n (HT40)							
Channel	38	46	54	62	102	134	151	159
Frequency (MHz)	5190	5230	5270	5310	5510	5670	5755	5795
Average Power	12.91	13.05	13.09	12.93	13.18	13.01	13.25	13.30



FCC SAR Test Report

4.6 SAR Testing Results

4.6.1 SAR Results for Head

Plot No.	Band	Mode	Test Position	Channel	Conducted Power (dBm)	Power Drift (dB)	SAR-1g (W/kg)	SAR-10g (W/kg)
1	GSM850	GSM	Right Cheek	251	33.37	0.01	0.233	0.177
2	GSM850	GSM	Right Tilted	251	33.37	0.10	0.11	0.086
3	GSM850	GSM	Left Cheek	251	33.37	-0.11	0.197	0.149
4	GSM850	GSM	Left Tilted	251	33.37	-0.05	0.115	0.089
5	GSM1900	GSM	Right Cheek	512	29.45	0.02	0.238	0.138
6	GSM1900	GSM	Right Tilted	512	29.45	0.10	0.039	0.023
7	GSM1900	GSM	Left Cheek	512	29.45	-0.04	0.165	0.106
8	GSM1900	GSM	Left Tilted	512	29.45	0.10	0.061	0.038
10	WCDMA II	RMC12.2K	Right Cheek	9400	23.76	0.05	0.707	0.41
11	WCDMA II	RMC12.2K	Right Tilted	9400	23.76	-0.09	0.092	0.059
12	WCDMA II	RMC12.2K	Left Cheek	9400	23.76	0.07	0.455	0.286
13	WCDMA II	RMC12.2K	Left Tilted	9400	23.76	0.04	0.114	0.07
14	WCDMA V	RMC12.2K	Right Cheek	4132	23.29	-0.03	0.273	0.21
15	WCDMA V	RMC12.2K	Right Tilted	4132	23.29	0.06	0.131	0.104
16	WCDMA V	RMC12.2K	Left Cheek	4132	23.29	-0.02	0.235	0.18
17	WCDMA V	RMC12.2K	Left Tilted	4132	23.29	0.11	0.154	0.121
18	CDMA BC0	RC3+SO55	Right Cheek	1013	25.06	-0.07	0.247	0.19
19	CDMA BC0	RC3+SO55	Right Tilted	1013	25.06	0.06	0.107	0.085
20	CDMA BC0	RC3+SO55	Left Cheek	1013	25.06	-0.03	0.194	0.147
21	CDMA BC0	RC3+SO55	Left Tilted	1013	25.06	-0.07	0.116	0.091
101	802.11b	-	Right Cheek	6	18.58	0.12	0.102	0.043
102	802.11b	-	Right Tilted	6	18.58	0.13	0.025	0.012
103	802.11b	-	Left Cheek	6	18.58	0.17	0.04	0.017
104	802.11b	-	Left Tilted	6	18.58	0.15	0.011	0.00428
131	802.11a	-	Right Cheek	36	13.51	-0.051	0.402	0.133
132	802.11a	-	Right Tilted	36	13.51	-0.04	0.217	0.073
133	802.11a	-	Left Cheek	36	13.51	0.104	0.188	0.056
134	802.11a	-	Left Tilted	36	13.51	0.12	0.188	0.06
135	802.11a	-	Right Cheek	64	13.60	0.021	0.481	0.164
136	802.11a	-	Right Tilted	64	13.60	0.031	0.286	0.099
137	802.11a	-	Left Cheek	64	13.60	0.085	0.244	0.078
138	802.11a	-	Left Tilted	64	13.60	0.05	0.223	0.069
139	802.11a	-	Right Cheek	116	13.34	-0.09	0.42	0.072
140	802.11a	-	Right Tilted	116	13.34	-0.01	0.256	0.046
141	802.11a	-	Left Cheek	116	13.34	-0.08	0.286	0.104
142	802.11a	-	Left Tilted	116	13.34	0.08	0.22	0.076
143	802.11a	-	Right Cheek	153	12.91	0.16	0.673	0.241
144	802.11a	-	Right Tilted	153	12.91	0.13	0.327	0.08
145	802.11a	-	Left Cheek	153	12.91	0.17	0.242	0.091
146	802.11a	-	Left Tilted	153	12.91	0.11	0.2	0.072
147	802.11n	HT40	Right Cheek	159	13.30	0.09	0.576	0.203

Note:

- SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
- Since HSPA, EVDO and WLAN of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for head SAR.
- According to KDB 941225, the SAR testing for HSPA is not required when the maximum power is less than 1/4 dB higher than RMC12.2K.



FCC SAR Test Report

A D T

4. According to KDB 941225, the SAR testing for EVDO is not required when the maximum power is less than 1/4 dB higher than 1xRTT.
5. SAR testing for 802.11g/n is not required when its maximum power is less than 1/4 dB higher than 802.11b.
6. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.

4.6.2 SAR Results for Body

<Body Worn Mode>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Conducted Power (dBm)	Power Drift (dB)	SAR-1g (W/kg)	SAR-10g (W/kg)
27	GSM850	GSM	Front Face	1	251	33.37	0.18	0.403	0.241
28	GSM850	GSM	Rear Face	1	251	33.37	-0.09	0.406	0.218
34	GSM1900	GSM	Front Face	1	512	29.45	0.08	0.44	0.241
35	GSM1900	GSM	Rear Face	1	512	29.45	-0.08	0.428	0.239
41	WCDMA II	RMC12.2K	Front Face	1	9400	23.76	-0.065	1.05	0.584
42	WCDMA II	RMC12.2K	Rear Face	1	9400	23.76	-0.083	1.26	0.695
62	WCDMA II	RMC12.2K	Front Face	1	9262	23.71	0.192	0.942	0.535
63	WCDMA II	RMC12.2K	Front Face	1	9538	23.68	-0.004	0.933	0.518
66	WCDMA II	RMC12.2K	Rear Face	1	9262	23.71	-0.02	1.16	0.651
67	WCDMA II	RMC12.2K	Rear Face	1	9538	23.68	-0.004	1.23	0.672
48	WCDMA V	RMC12.2K	Front Face	1	4132	23.29	0.03	0.398	0.279
49	WCDMA V	RMC12.2K	Rear Face	1	4132	23.29	0.14	0.449	0.319
55	CDMA BC0	RC3+SO32	Front Face	1	1013	25.00	0.11	0.396	0.226
56	CDMA BC0	RC3+SO32	Rear Face	1	1013	25.00	0.18	0.4	0.286
108	802.11b	-	Front Face	1	6	18.58	0.11	0.021	0.00809
109	802.11b	-	Rear Face	1	6	18.58	0.117	0.158	0.065
113	802.11a	-	Front Face	1	36	13.51	0.10	0.11	0.036
114	802.11a	-	Rear Face	1	36	13.51	-0.09	0.505	0.171
115	802.11a	-	Front Face	1	64	13.60	0.06	0.156	0.054
116	802.11a	-	Rear Face	1	64	13.60	0.01	0.608	0.204
117	802.11a	-	Front Face	1	116	13.34	0.04	0.23	0.082
118	802.11a	-	Rear Face	1	116	13.34	0.12	1.22	0.402
126	802.11a	-	Rear Face	1	108	13.04	-0.17	0.954	0.323
127	802.11a	-	Rear Face	1	136	12.88	0.06	0.843	0.287
123	802.11a	-	Front Face	1	153	12.91	0.05	0.202	0.072
124	802.11a	-	Rear Face	1	153	12.91	0.06	0.811	0.285
130	802.11a	-	Rear Face	1	157	12.89	0.02	0.783	0.267
125	802.11n	HT40	Rear Face	1	159	13.30	0.08	0.605	0.168

Note:

1. SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
2. Since HSPA, EVDO and WLAN of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for body-worn SAR.
3. According to KDB 941225, the SAR testing for HSPA is not required when the maximum power is less than 1/4 dB higher than RMC12.2K.
4. According to KDB 941225, the SAR testing for EVDO is not required when the maximum power is less than 1/4 dB higher than 1xRTT.
5. SAR testing for 802.11g/n is not required when its maximum power is less than 1/4 dB higher than 802.11b.
6. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.



FCC SAR Test Report

<Hotspot Mode>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Conducted Power (dBm)	Power Drift (dB)	SAR-1g (W/kg)	SAR-10g (W/kg)
22	GSM850	GPRS12	Front Face	1	251	28.51	0.18	0.558	0.395
23	GSM850	GPRS12	Rear Face	1	251	28.51	0.17	0.618	0.432
24	GSM850	GPRS12	Left Side	1	251	28.51	-0.08	0.244	0.132
25	GSM850	GPRS12	Right Side	1	251	28.51	0.14	0.324	0.23
26	GSM850	GPRS12	Bottom Side	1	251	28.51	0.05	0.37	0.185
29	GSM1900	GPRS12	Front Face	1	512	26.63	-0.05	0.758	0.419
30	GSM1900	GPRS12	Rear Face	1	512	26.63	-0.03	0.763	0.429
31	GSM1900	GPRS12	Left Side	1	512	26.63	-0.03	0.24	0.14
32	GSM1900	GPRS12	Right Side	1	512	26.63	0.01	0.331	0.194
57	GSM1900	GPRS12	Bottom Side	1	512	26.63	-0.027	0.832	0.432
58	GSM1900	GPRS12	Bottom Side	1	661	26.54	-0.072	1.15	0.591
59	GSM1900	GPRS12	Bottom Side	1	810	26.56	-0.053	1.18	0.599
36	WCDMA II	RMC12.2K	Front Face	1	9400	23.76	-0.016	1.02	0.569
37	WCDMA II	RMC12.2K	Rear Face	1	9400	23.76	0.04	1.25	0.692
38	WCDMA II	RMC12.2K	Left Side	1	9400	23.76	-0.081	0.338	0.196
39	WCDMA II	RMC12.2K	Right Side	1	9400	23.76	-0.113	0.432	0.255
40	WCDMA II	RMC12.2K	Bottom Side	1	9400	23.76	-0.013	1.35	0.699
60	WCDMA II	RMC12.2K	Front Face	1	9262	23.71	0.103	0.988	0.557
61	WCDMA II	RMC12.2K	Front Face	1	9538	23.68	-0.037	0.979	0.537
64	WCDMA II	RMC12.2K	Rear Face	1	9262	23.71	0.016	1.16	0.651
65	WCDMA II	RMC12.2K	Rear Face	1	9538	23.68	0.003	1.25	0.682
68	WCDMA II	RMC12.2K	Bottom Side	1	9262	23.71	-0.158	1.25	0.653
69	WCDMA II	RMC12.2K	Bottom Side	1	9538	23.68	0.047	1.27	0.652
43	WCDMA V	RMC12.2K	Front Face	1	4132	23.29	0.05	0.471	0.27
44	WCDMA V	RMC12.2K	Rear Face	1	4132	23.29	0.05	0.488	0.28
45	WCDMA V	RMC12.2K	Left Side	1	4132	23.29	0.11	0.212	0.111
46	WCDMA V	RMC12.2K	Right Side	1	4132	23.29	0.04	0.262	0.184
47	WCDMA V	RMC12.2K	Bottom Side	1	4132	23.29	0.01	0.402	0.197
50	CDMA BC0	RC3+SO32	Front Face	1	1013	25.00	0.18	0.433	0.248
51	CDMA BC0	RC3+SO32	Rear Face	1	1013	25.00	0.16	0.389	0.274
52	CDMA BC0	RC3+SO32	Left Side	1	1013	25.00	0.00	0.092	0.049
53	CDMA BC0	RC3+SO32	Right Side	1	1013	25.00	-0.07	0.124	0.088
54	CDMA BC0	RC3+SO32	Bottom Side	1	1013	25.00	-0.13	0.165	0.08
105	802.11b	-	Front Face	1	6	18.58	-0.12	0.026	0.00944
106	802.11b	-	Rear Face	1	6	18.58	-0.18	0.184	0.075
107	802.11b	-	Left Side	1	6	18.58	0.113	0.081	0.038
110	802.11a	-	Front Face	1	36	13.51	0.10	0.112	0.036
111	802.11a	-	Rear Face	1	36	13.51	0.06	0.515	0.172
112	802.11a	-	Left Side	1	36	13.51	0.01	0.361	0.13
119	802.11a	-	Front Face	1	153	12.91	0.01	0.198	0.072
120	802.11a	-	Rear Face	1	153	12.91	0.03	0.83	0.264
121	802.11a	-	Left Side	1	153	12.91	0.01	0.532	0.207
128	802.11a	-	Rear Face	1	157	12.89	0.07	0.624	0.221
122	802.11n	HT40	Rear Face	1	159	13.30	0.03	0.646	0.193

Note:

- SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
- According to KDB 941225, the SAR testing for HSPA is not required when the maximum power is less than 1/4 dB higher than RMC12.2K.
- According to KDB 941225, the SAR testing for EVDO is not required when the maximum power is less than 1/4 dB higher than 1xRTT.



FCC SAR Test Report

A D T

4. Only WLAN 5G band 1 and 4 (5.15~5.25 and 5.725~5.825 GHz) support wireless hotspot mode.
5. SAR testing for 802.11g/n is not required when its maximum power is less than 1/4 dB higher than 802.11b.
6. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.

Test Engineer : Mars Chang, and Morrison Huang

4.6.3 Simultaneous Multi-band Transmission Evaluation

No.	Conditions (SAR1 + SAR2)	Mode	Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
1	GSM850 + WLAN	Head	Right Cheek	0.233	0.673	0.906	-
			Right Tilted	0.11	0.327	0.437	-
			Left Cheek	0.197	0.286	0.483	-
			Left Tilted	0.115	0.223	0.338	-
		Body-Worn	Front Face	0.403	0.23	0.633	-
			Rear Face	0.406	1.22	1.626	Analyzed as below
		Hotspot	Front Face	0.558	0.198	0.756	-
			Rear Face	0.618	0.83	1.448	-
			Left Side	0.244	0.532	0.776	-
			Right Side	0.324	0	0.324	-
			Top Side	0	0	0	-
			Bottom Side	0.37	0	0.37	-
2	GSM1900 + WLAN	Head	Right Cheek	0.238	0.673	0.911	-
			Right Tilted	0.039	0.327	0.366	-
			Left Cheek	0.165	0.286	0.451	-
			Left Tilted	0.061	0.223	0.284	-
		Body-Worn	Front Face	0.44	0.23	0.67	-
			Rear Face	0.428	1.22	1.648	Analyzed as below
		Hotspot	Front Face	0.758	0.198	0.956	-
			Rear Face	0.763	0.83	1.593	-
			Left Side	0.24	0.532	0.772	-
			Right Side	0.331	0	0.331	-
			Top Side	0	0	0	-
			Bottom Side	1.18	0	1.18	-
3	WCDMA II + WLAN	Head	Right Cheek	0.707	0.673	1.38	-
			Right Tilted	0.092	0.327	0.419	-
			Left Cheek	0.455	0.286	0.741	-
			Left Tilted	0.114	0.223	0.337	-
		Body-Worn	Front Face	1.05	0.23	1.28	-
			Rear Face	1.26	1.22	2.48	Analyzed as below
		Hotspot	Front Face	1.02	0.198	1.218	-
			Rear Face	1.25	0.83	2.08	Analyzed as below
			Left Side	0.338	0.532	0.87	-
			Right Side	0.432	0	0.432	-
			Top Side	0	0	0	-
			Bottom Side	1.35	0	1.35	-



FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Mode	Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
4	WCDMA V + WLAN	Head	Right Cheek	0.273	0.673	0.946	-
			Right Tilted	0.131	0.327	0.458	-
			Left Cheek	0.235	0.286	0.521	-
			Left Tilted	0.154	0.223	0.377	-
		Body-Worn	Front Face	0.398	0.23	0.628	-
			Rear Face	0.449	1.22	1.669	Analyzed as below
		Hotspot	Front Face	0.471	0.198	0.669	-
			Rear Face	0.488	0.83	1.318	-
			Left Side	0.212	0.532	0.744	-
			Right Side	0.262	0	0.262	-
			Top Side	0	0	0	-
			Bottom Side	0.402	0	0.402	-
		5	CDMA2000 BC0 + WLAN	Head	Right Cheek	0.247	0.673
Right Tilted	0.107				0.327	0.434	-
Left Cheek	0.194				0.286	0.48	-
Left Tilted	0.116				0.223	0.339	-
Body-Worn	Front Face			0.396	0.23	0.626	-
	Rear Face			0.4	1.22	1.62	Analyzed as below
Hotspot	Front Face			0.433	0.198	0.631	-
	Rear Face			0.389	0.83	1.219	-
	Left Side			0.092	0.532	0.624	-
	Right Side			0.124	0	0.124	-
	Top Side			0	0	0	-
	Bottom Side			0.165	0	0.165	-

Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. The calculation of SPLSR (SAR to Peak Location Spacing Ratio) is as follows.

<SPLSR calculation procedure>

- 1) Use DASY software to open SAR data file with zoom scan results.
- 2) Export data file to SEMCAD using 'Field Data Export' function.
- 3) Search for highest SAR based on the imported measured/interpolated data and identify the X, Y, and Z coordinates. Per the SAR system manufacture, DASY stores the individual coordinates of each measurement point in the measurement file where the, center coordinate (x=0, y=0) is always the Grid Reference Point as set in DASY for a phantom section.
- 4) Calculate the peak SAR separation distances using the Pythagoras' theorem where
Peak Location Separation = $\text{Sqrt}[(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2]$
- 5) Calculate SPLSR = (SAR1 + SAR2) / Peak SAR separation distance.
- 6) The SPLSR calculation plots shown in test report are for reference only as the images were generated in a separate software program to add the antenna and arrow references. The distance information in the calculations below each plot is derived from the DASY SAR zoom scan data as specified in this procedure.



FCC SAR Test Report

1. The calculation of SPLSR for (GSM850 + WLAN, Body-worn, Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : GSM850-Cube0 (2.92, -7.04, -17.97), 0.406

SAR 1 : GSM850-Cube1 (2.6, -4.04, -18), 0.358

SAR 2 : WLAN (0.9, 2.6, -20.61), 1.22

Peak Location Spacing for SAR1 (Cube0)-SAR2 = 10.2 cm

Peak Location Spacing for SAR1 (Cube1)-SAR2 = 7.3 cm

SPLSR for SAR1 (Cube0)-SAR2 = $(0.406 + 1.22) / 10.2 = 0.159$

SPLSR for SAR1 (Cube1)-SAR2 = $(0.358 + 1.22) / 7.3 = 0.215$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.

2. The calculation of SPLSR for (GSM1900 + WLAN, Body-worn, Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : GSM1900 (-0.9, -6.6, -20.64), 0.428

SAR 2 : WLAN (0.9, 2.6, -20.61), 1.22

Peak Location Spacing for SAR1-SAR2 = 9.4 cm

SPLSR for SAR1-SAR2 = $(0.428 + 1.22) / 9.4 = 0.176$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.

3. The calculation of SPLSR for (WCDMA II + WLAN, Body-worn, Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : WCDMA II (-0.46, -6.2, -20.64), 1.26

SAR 2 : WLAN (0.9, 2.6, -20.61), 1.22

Peak Location Spacing for SAR1-SAR2 = 8.9 cm

SPLSR for SAR1-SAR2 = $(1.26 + 1.22) / 8.9 = 0.279$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.

4. The calculation of SPLSR for (WCDMA II + WLAN, Hotspot, Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : WCDMA II (-0.49, -6.24, -20.64), 1.25

SAR 2 : WLAN (0.78, 2.92, -20.61), 0.83

Peak Location Spacing for SAR1-SAR2 = 9.2 cm

SPLSR for SAR1-SAR2 = $(1.25 + 0.83) / 9.2 = 0.225$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.



FCC SAR Test Report

5. The calculation of SPLSR for (WCDMA V + WLAN, Body-worn, Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : WCDMA V-Cube0 (3.56, -6.24, -17.97), 0.409

SAR 1 : WCDMA V-Cube1 (1, -4.04, -18.01), 0.449

SAR 2 : WLAN (0.9, 2.6, -20.61), 1.22

Peak Location Spacing for SAR1 (Cube0)-SAR2 = 9.6 cm

Peak Location Spacing for SAR1 (Cube1)-SAR2 = 7.1 cm

SPLSR for SAR1 (Cube0)-SAR2 = $(0.409 + 1.22) / 9.6 = 0.17$

SPLSR for SAR1 (Cube1)-SAR2 = $(0.449 + 1.22) / 7.1 = 0.234$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.

6. The calculation of SPLSR for (CDMA BC0 + WLAN, Body-worn-Rear Face) is as below:

Coordinate of Peak SAR Location (X, Y, Z) & SAR Value:

SAR 1 : CDMA BC0-Cube0 (3.56, -6.24, -17.97), 0.351

SAR 1 : CDMA BC0-Cube1 (0.84, -4.04, -18), 0.4

SAR 2 : WLAN (0.9, 2.6, -20.61), 1.22

Peak Location Spacing for SAR1 (Cube0)-SAR2 = 9.6 cm

Peak Location Spacing for SAR1 (Cube1)-SAR2 = 7.1 cm

SPLSR for SAR1 (Cube0)-SAR2 = $(0.351 + 1.22) / 9.6 = 0.164$

SPLSR for SAR1 (Cube1)-SAR2 = $(0.4 + 1.22) / 7.1 = 0.227$

The volume scan for this condition is not required because all calculated SPLSR are less than 0.3.

Standalone SAR for BT/NFC, and simultaneous transmission SAR for WWAN and BT/NFC are not required because BT/NFC maximum power is less than P_{Ref} . WLAN and Bluetooth is share the same antenna and they cannot transmit simultaneously.



5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Kit	SPEAG	D835V2	4d021	Apr. 20, 2012	Annual
System Validation Kit	SPEAG	D1900V2	5d036	Jan. 26, 2012	Annual
System Validation Kit	SPEAG	D2450V2	737	Jan. 24, 2012	Annual
System Validation Kit	SPEAG	D5GHzV2	1018	Jan. 18, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3578	Jun. 21, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3864	Jul. 19, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE3	579	Apr. 27, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE4	1277	Jul. 19, 2012	Annual
SAM Phantom	SPEAG	QD000P40CD	TP-1652	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1485	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1202	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1653	N/A	N/A
ELI Phantom	SPEAG	QDOVA001B	TP-1039	N/A	N/A
ELI Phantom	SPEAG	QDOVA001B	TP-1043	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50260642	Nov. 02, 2012	Annual
ENA Series Network Analyzer	Agilent	E5071C	MY46214281	May 14, 2012	Annual
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	May 06, 2012	Annual
Power Meter	Anritsu	ML2495A	1218009	May 07, 2012	Annual
Power Sensor	Anritsu	MA2411B	1207252	May 07, 2012	Annual
EXA Spectrum Analyzer	Agilent	N9010A	MY52100136	Apr. 23, 2012	Annual
Dielectric Probe Kit	Agilent	85070D	E2-020018	May 14, 2012	Annual
Thermometer	YFE	YF-160A	110600361	Feb. 21, 2012	Annual
Directional Coupler	Woken	0110A056020-10	11122702	Apr. 19, 2012	Annual
Power Amplifier	AR	5S1G4	0339656	Apr. 23, 2012	Annual
Power Amplifier	Mini-Circuit	ZVE-8G	001000422	Apr. 23, 2012	Annual
Attenuator	Woken	00800A1G01L-03	N/A	Apr. 19, 2012	Annual



FCC SAR Test Report

6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty (1g)	V _i
Measurement System						
Probe Calibration	6.0	Normal	1	1	± 6.0 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.6	Normal	1	1	± 0.6 %	∞
Response Time	0.0	Rectangular	√3	1	± 0.0 %	∞
Integration Time	1.7	Rectangular	√3	1	± 1.0 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.5	Rectangular	√3	1	± 0.3 %	∞
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %	∞
Max. SAR Eval.	2.3	Rectangular	√3	1	± 1.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	29
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	29
Combined Standard Uncertainty					± 11.7 %	
Expanded Uncertainty (K=2)					± 23.4 %	

Uncertainty budget for frequency range 300 MHz to 3 GHz



FCC SAR Test Report

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.55	Normal	1	1	± 6.55 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	2.0	Rectangular	√3	1	± 1.2 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.3	Normal	1	1	± 0.3 %	∞
Response Time	0.8	Rectangular	√3	1	± 0.5 %	∞
Integration Time	2.6	Rectangular	√3	1	± 1.5 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.8	Rectangular	√3	1	± 0.5 %	∞
Probe Positioning	9.9	Rectangular	√3	1	± 5.7 %	∞
Max. SAR Eval.	4.0	Rectangular	√3	1	± 2.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	30
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	30
Combined Standard Uncertainty					± 13.4 %	
Expanded Uncertainty (K=2)					± 26.8 %	

Uncertainty budget for frequency range 3 GHz to 6 GHz



7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.
Tel: 886-3-318-3232
Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.
Tel: 886-2-2605-2180
Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.
Tel: 886-3-593-5343
Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---