




FCC Test Report

According to

47 CFR Part 24E

Equipment : PDA Phone
Model No. : DIAM210
FCC ID : NM8DMM
Tx Frequency Range : 1850.2 ~ 1909.8 MHz
Max. EIRP Power : GSM1900 (GSM) : 1.76 W
GSM1900 (EDGE) : 0.78 W
Emission Designator : GSM : 300KGXW
EDGE : 300KG7W
Applicant : High Tech Computer Corp.
23 Xinghua Rd., Taoyuan 330, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on May 07, 2008 at **Sporton International Inc. LAB.**
- Report No.: FG822609-05, Report Version: Rev. 02.

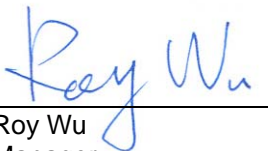
Roy Wu
Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

History of This Test Report ii

1. General Information1

1.1. Applicant.....1

1.2. Manufacturer1

1.3. Basic Combination under Test1

1.4. Feature of Equipment under Test1

1.5. Report Date1

2 Test Configuration of Equipment under Test2

2.1 Test Manner2

2.2 Test Mode2

2.3 Connection Diagram of Test System2

2.4 Ancillary Equipment List2

3. General Information of Test Site.....3

3.1 Test Voltage3

3.2 Test Compliance.....3

3.3 Frequency Range3

3.4 Test Distance.....3

4. Test Data and Test Result4

4.1 List of Measurements and Examinations4

4.2 RF Output Power5

4.3 EIRP Measurement6

4.4 Occupied Bandwidth and Band Edge Measurement9

4.5 Conducted Emission.....26

4.6 Field Strength of Spurious Radiation37

4.7 Frequency Stability (Temperature Variation)45

4.8 Frequency Stability (Voltage Variation)47

5. List of Measurement Equipments.....49

6. Uncertainty Evaluation50

Appendix A – Setup Photographs



History of This Test Report

Report Issue Date: May 23, 2008

Report No.	Description



1. General Information

1.1. Applicant

High Tech Computer Corp.
23 Xinghua Rd., Taoyuan 330, Taiwan

1.2 Manufacturer

High Tech Computer Corp.
23 Xinghua Rd., Taoyuan 330, Taiwan

1.3 Basic Combination under Test

PDA Phone A	Photo Camera 1 + Video Camera 1
PDA Phone B	Photo Camera 2 + Video Camera 2

1.4 Feature of Equipment under Test

Product Feature & Specification	
DUT Type :	PDA Phone
Model Name :	DIAM210
FCC ID :	NM8DMM
Tx Frequency :	1850 MHz ~1910 MHz
Rx Frequency :	1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna :	30.00 dBm (GSM), 25.96 dBm (EDGE)
Maximum EIRP :	GSM1900 (GSM) : 1.76 W (32.46 dBm) GSM1900 (EDGE) : 0.78 W (28.92 dBm)
Type of Antenna Connector :	N/A
Antenna Type :	PIFA Antenna
Type of Modulation :	GSM : GMSK EDGE : 8PSK
Type of Emission :	GSM : 300KGXW EDGE : 300KG7W
Device Power Class :	1
DUT Stage :	Identical Prototype

1.5 Report Date

EUT Received : Apr. 10, 2008
Report Date : May 23, 2008

2 Test Configuration of Equipment under Test


2.1 Test Manner

- The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- During all testings, EUT is in link mode with base station emulator at maximum power level.
- Frequency range investigated: radiated emission 30MHz to 19000 MHz for GSM1900.

2.2 Test Mode

Application	GSM1900
Radiated Emission	<input checked="" type="checkbox"/> Mode 1: GSM Link Mode <input checked="" type="checkbox"/> Mode 2: EDGE Link Mode <input checked="" type="checkbox"/> Mode 3: GSM Link Mode + WLAN Link
Conducted Measurement	<input checked="" type="checkbox"/> Mode 1: GSM Link Mode <input checked="" type="checkbox"/> Mode 2: EDGE Link Mode

2.3 Connection Diagram of Test System

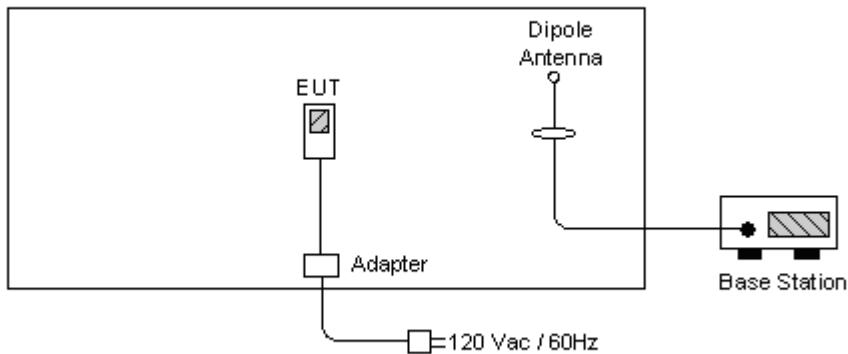

2.4 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable / Power Code
1.	Base Station	R&S	CMU200	N/A	Unshielded, 1.8m
2.	BT Base Station	Anritus	8852A	N/A	Unshielded, 1.8m



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-328-4978
Test Site No : 03CH06-HY, TH02-HY
FCC Designation No : TW1022

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC.

3.1 Test Voltage

AC 120V / 60Hz

3.2 Test Compliance

47 CFR Part 24E

3.3 Frequency Range

a. Radiation: from 30 MHz to 19000 MHz for GSM1900

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
§2.1046	RF Output Power	Passed	4.2
§24.232	EIRP	Passed	4.3
§2.1049, §24.238(b)	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	Conducted Emission	Passed	4.5
§2.1053	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, §24.235	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §24.235	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments

As described in chapter 5 of this test report.

4.2.2 Test Procedure

- a. The transmitter output was connected to power meter and base station through power divider.
- b. Set EUT at PCL=0 for GSM1900 maximum power through base station.
- c. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout

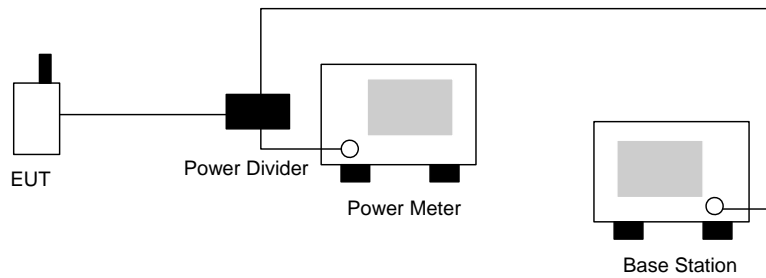

4.2.4 Test Result

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GSM)	512	1850.2 (Low)	30.00	1.000
	661	1880.0 (Mid)	30.00	1.000
	810	1909.8 (High)	29.90	0.977
GSM1900 (EDGE)	512	1850.2 (Low)	25.93	0.392
	661	1880.0 (Mid)	25.96	0.394
	810	1909.8 (High)	25.84	0.384



4.3 EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-C.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

- a. The EUT was placed on a turntable with 1.0 meter height in an fully anechoic chamber.
- b. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiated power.
- d. The height of the receiving antenna is also kept at 1.0M height.
- e. Taking the record of maximum EIRP.
- f. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
- g. The conducted power at the terminal of the dipole antenna is measured.
- h. Repeat step 3 to step 5 to get the maximum EIRP of the substitution antenna.
- i. $EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in Spectrum Analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

4.3.3 Test Setup Layout of EIRP

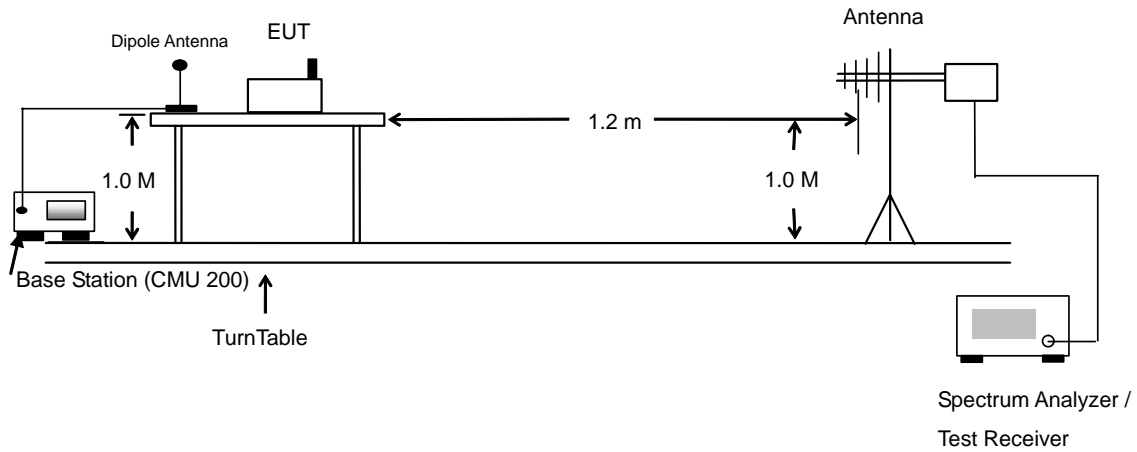



4.3.4 Test Result

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.07	-51.88	0.00	1.96	31.77	1.50
1880.00	-24.59	-52.99	0.00	2.00	30.40	1.10
1909.80	-26.64	-54.28	0.00	1.98	29.62	0.92
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-21.63	-52.13	0.00	1.96	32.46	1.76
1880.00	-23.82	-53.17	0.00	2.00	31.35	1.36
1909.80	-25.33	-54.13	0.00	1.98	30.78	1.20

GSM1900 (EDGE) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.93	-51.88	0.00	1.96	27.91	0.62
1880.00	-28.36	-52.99	0.00	2.00	26.63	0.46
1909.80	-30.58	-54.28	0.00	1.98	25.68	0.37
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.17	-52.13	0.00	1.96	28.92	0.78
1880.00	-27.38	-53.17	0.00	2.00	27.79	0.60
1909.80	-29.03	-54.13	0.00	1.98	27.08	0.51

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure

- a. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- b. The 99% occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
- c. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly $BW/100$.


4.4.3 Test Setup Layout

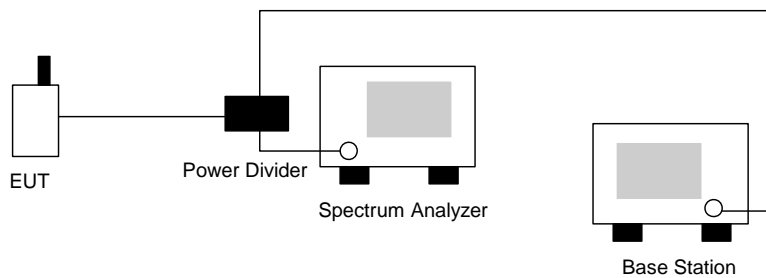



4.4.4 Test Result

- Mode 1
- Test Mode : GSM1900 (GSM) CH512 Lower Band Edge
- Power State : High

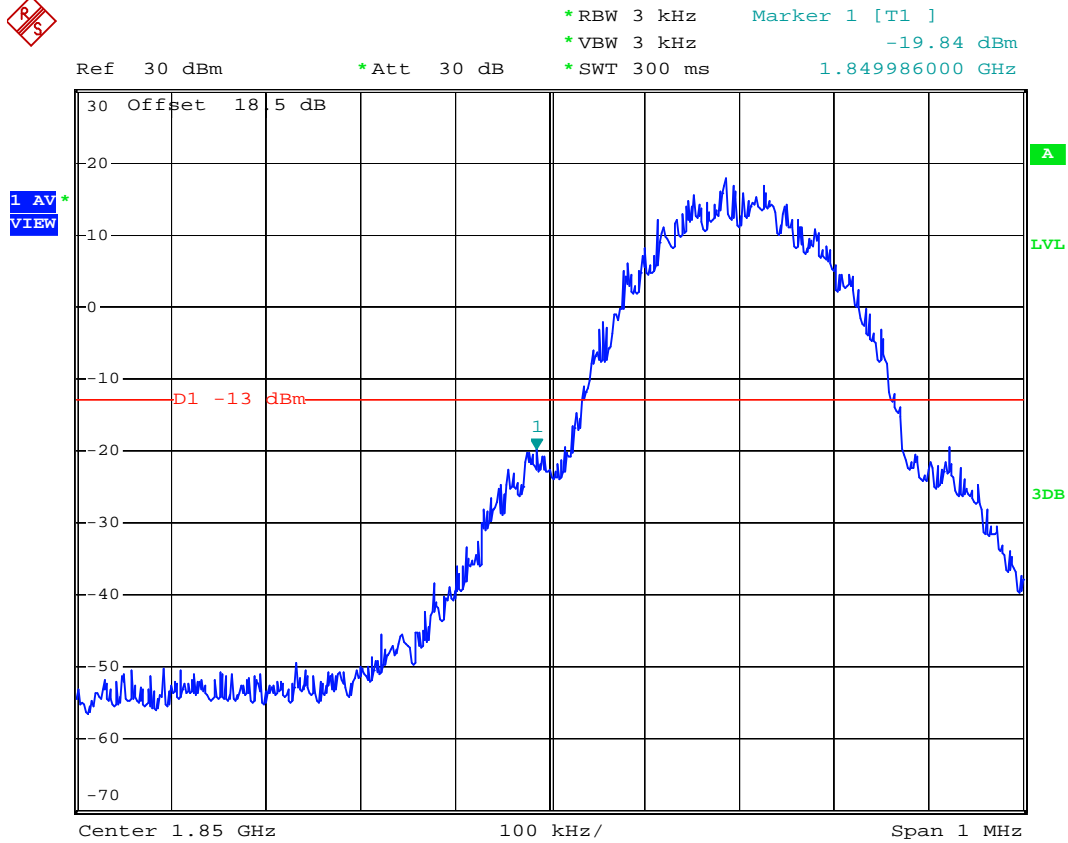

Date: 30.APR.2008 11:52:03




- Test Mode : GSM1900 (GSM) CH512 99% Occupied Bandwidth
- Power State : High



*RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 22.14 dBm
 *SWT 300 ms 1.850198000 GHz

Ref 30 dBm

*Att 30 dB

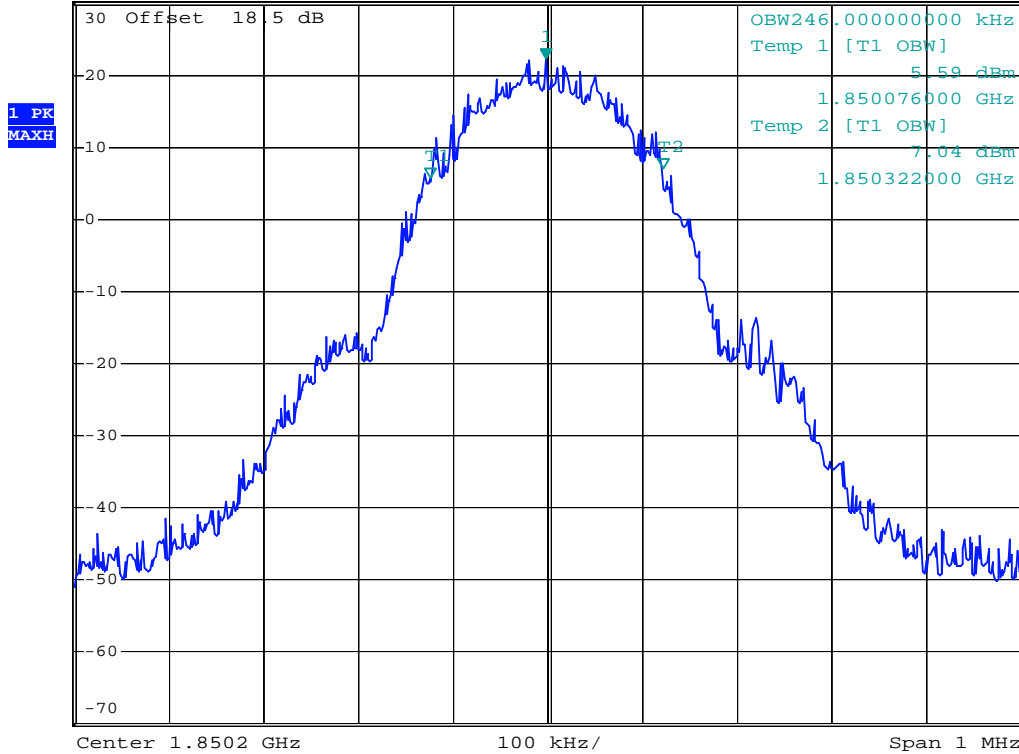

Date: 30.APR.2008 11:49:30



- Test Mode : GSM1900 (GSM) CH661 99% Occupied Bandwidth
- Power State : High




*RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 23.75 dBm
 *SWT 300 ms 1.880000000 GHz

Ref 30 dBm

*Att 30 dB

1 PK
MAXH

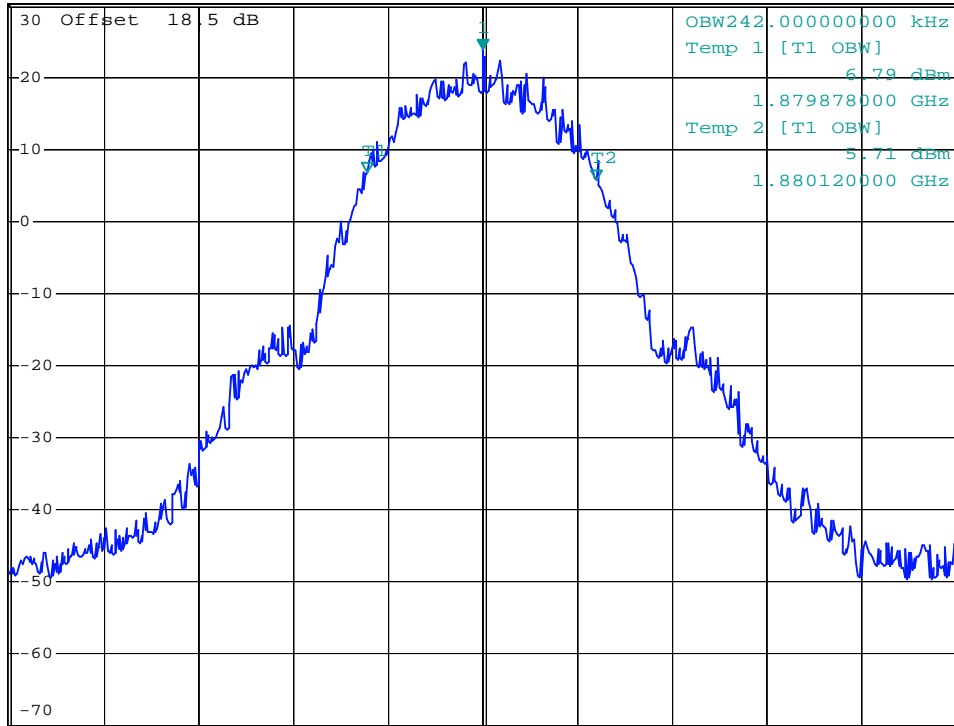

Center 1.88 GHz


100 kHz/

Span 1 MHz

Date: 30.APR.2008 11:49:57



- Test Mode : GSM1900 (GSM) CH810 99% Occupied Bandwidth
- Power State : High

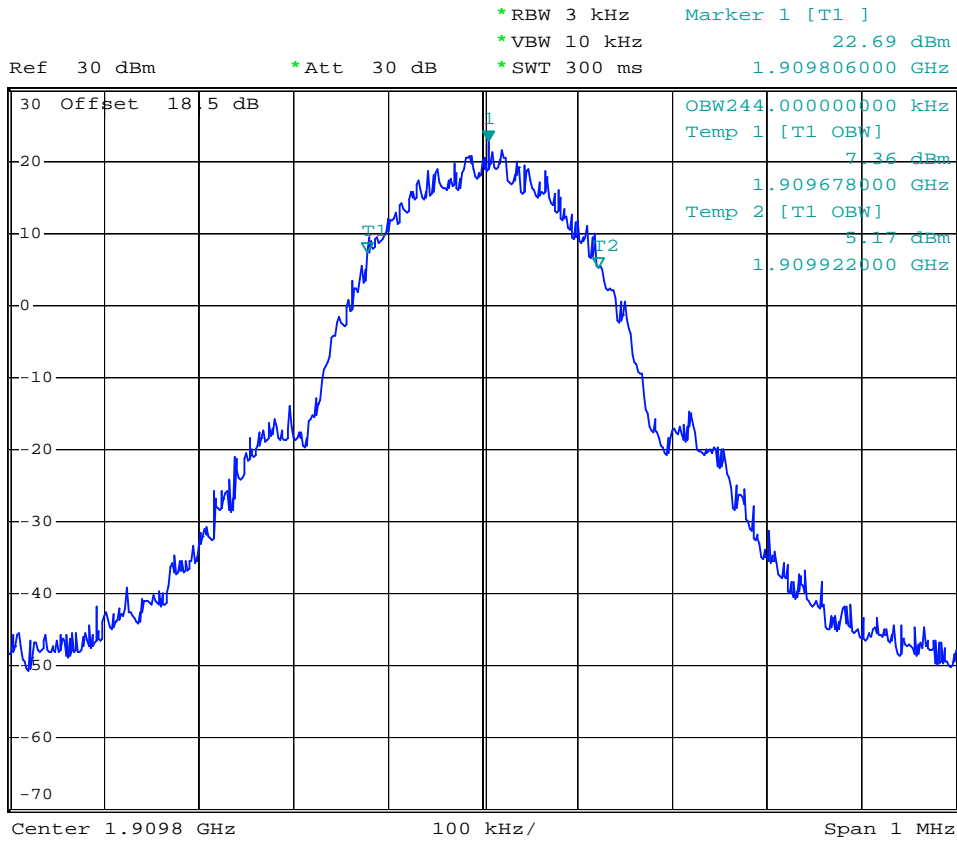

Date: 30.APR.2008 11:48:59



- Test Mode : GSM1900 (GSM) CH512 26dB Bandwidth
- Power State : High




*RBW 3 kHz Delta 2 [T1]
 *VBW 10 kHz 0.69 dB
 *SWT 300 ms 312.00000000 kHz

Ref 30 dBm

*Att 30 dB

1 PK
VIEW

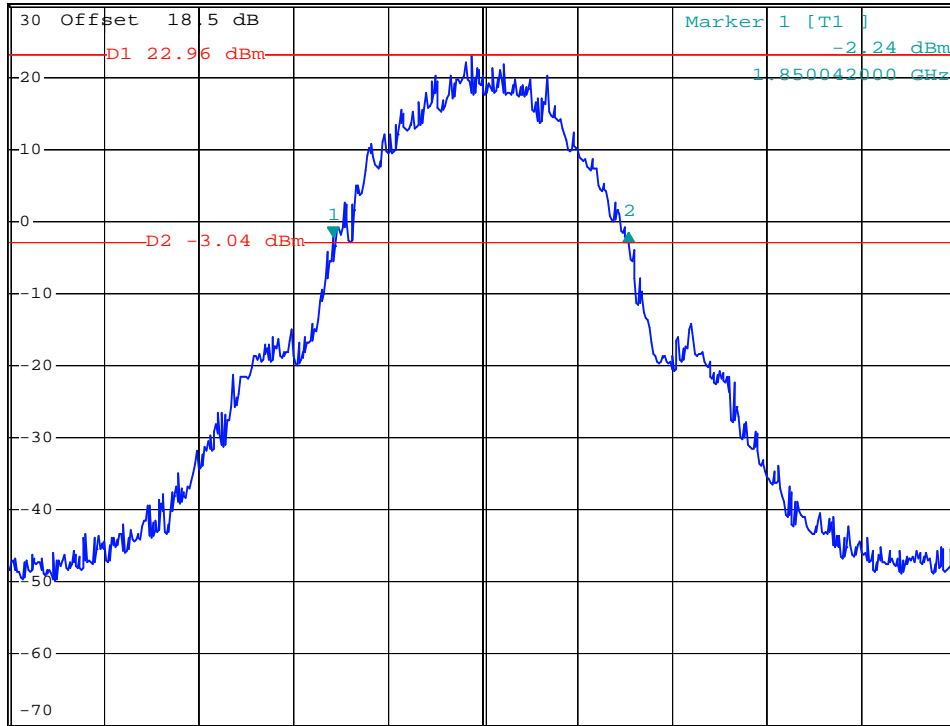

Center 1.8502 GHz

100 kHz/

Span 1 MHz

Date: 30.APR.2008 10:50:32



- Test Mode : GSM1900 (GSM) CH661 26dB Bandwidth
- Power State : High




*RBW 3 kHz Delta 2 [T1]
 *VBW 10 kHz 0.51 dB
 *SWT 300 ms 310.00000000 kHz

Ref 30 dBm

*Att 30 dB

1 PK
VIEW

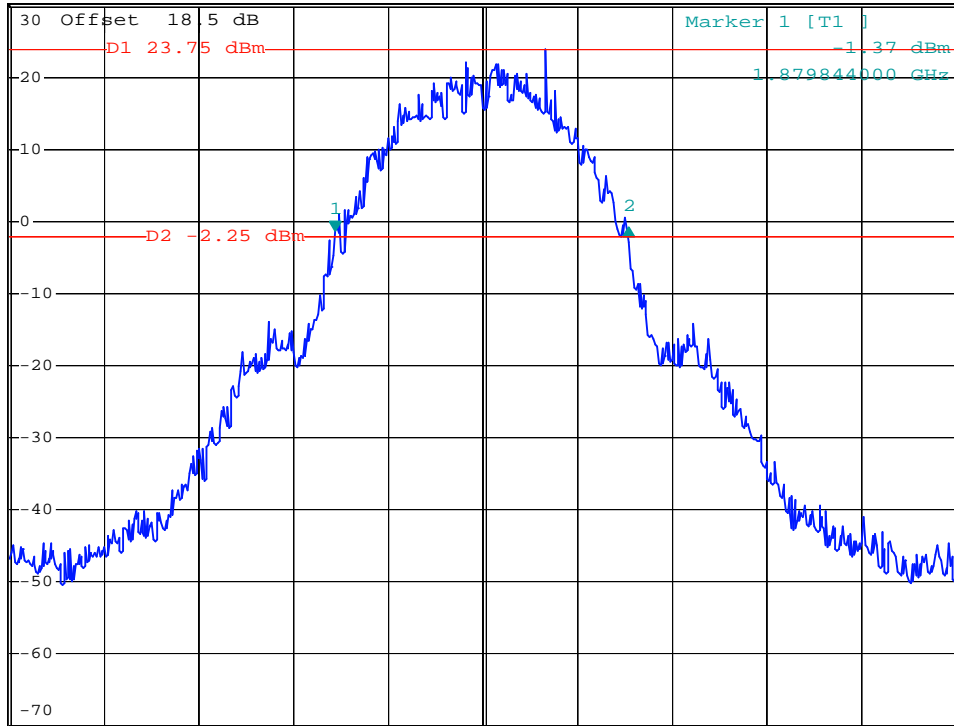

Center 1.88 GHz

100 kHz/

Span 1 MHz

Date: 30.APR.2008 11:46:50



- Test Mode : GSM1900 (GSM) CH810 26dB Bandwidth
- Power State : High




*RBW 3 kHz Delta 2 [T1]
 *VBW 10 kHz 0.33 dB
 *SWT 300 ms 312.00000000 kHz

Ref 30 dBm

*Att 30 dB

1 PK VIEW

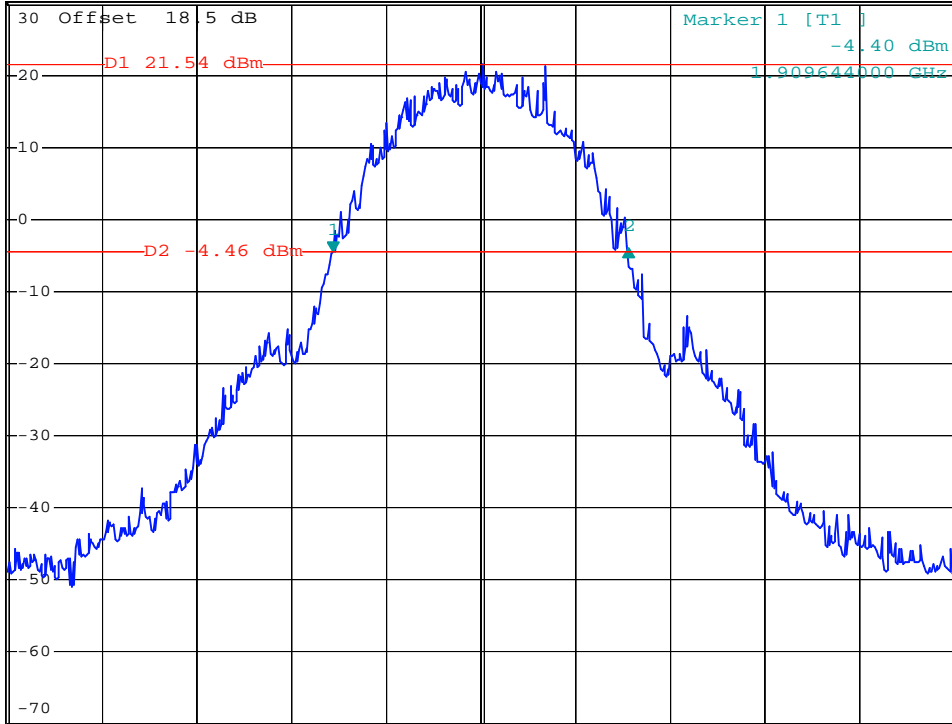

Center 1.9098 GHz 100 kHz/ Span 1 MHz


Date: 30.APR.2008 11:48:04



- Test Mode : GSM1900 (GSM) CH810 Higher Band Edge
- Power State : High



Ref 30 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1]
*VBW 3 kHz -19.63 dBm
*SWT 300 ms 1.910022000 GHz

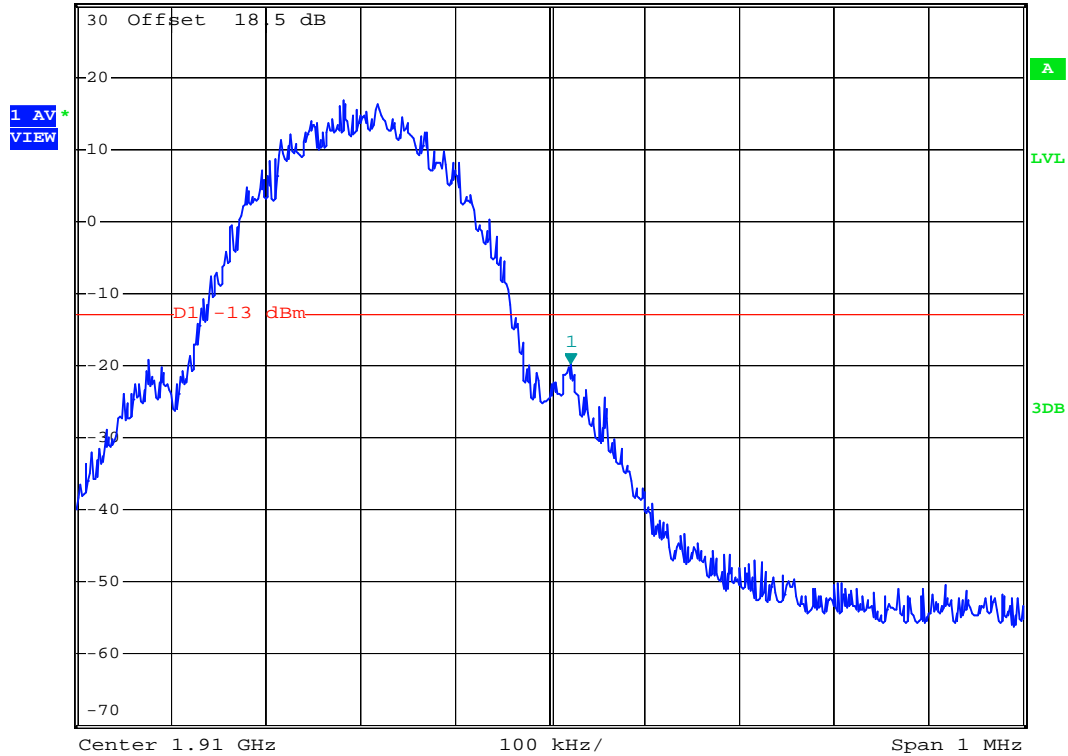

Date: 30.APR.2008 11:54:43



- Mode 2
- Test Mode : GSM1900 (EDGE) CH512 Lower Band Edge
- Power State : High




*RBW 3 kHz Marker 1 [T1]
 *VBW 3 kHz -25.51 dBm
 *SWT 300 ms 1.849972000 GHz

Ref 30 dBm

*Att 30 dB

1 AV*
VIEW

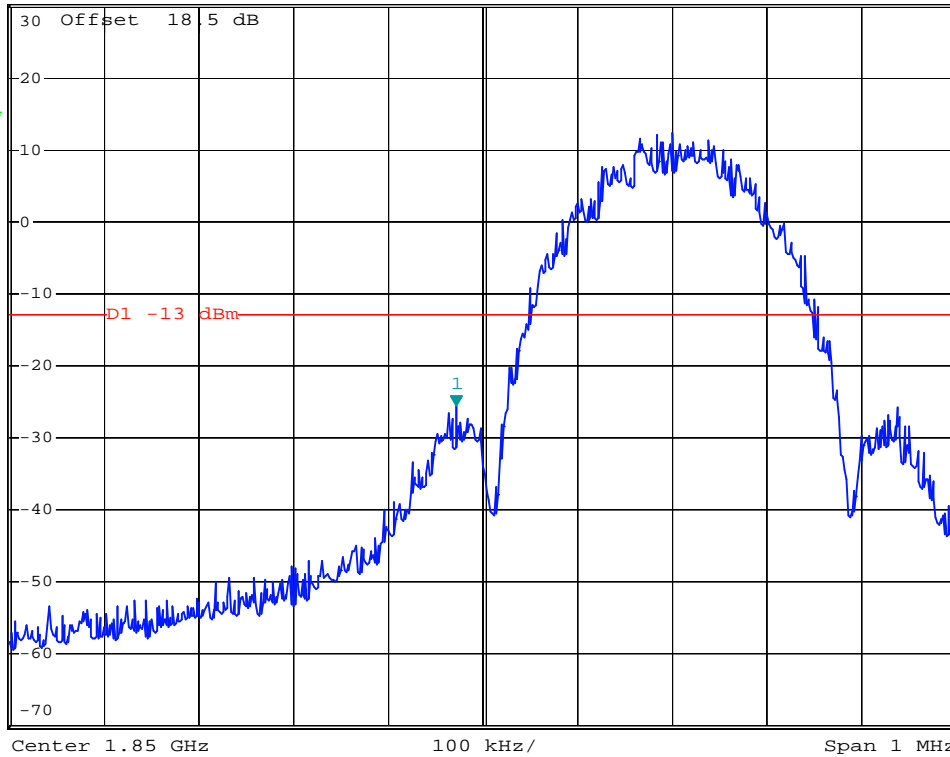


Date: 30.APR.2008 12:13:02



- Test Mode : GSM1900 (EDGE) CH512 99% Occupied Bandwidth
- Power State : High



*RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 18.09 dBm
 *SWT 300 ms 1.850168000 GHz
 Ref 30 dBm *Att 30 dB

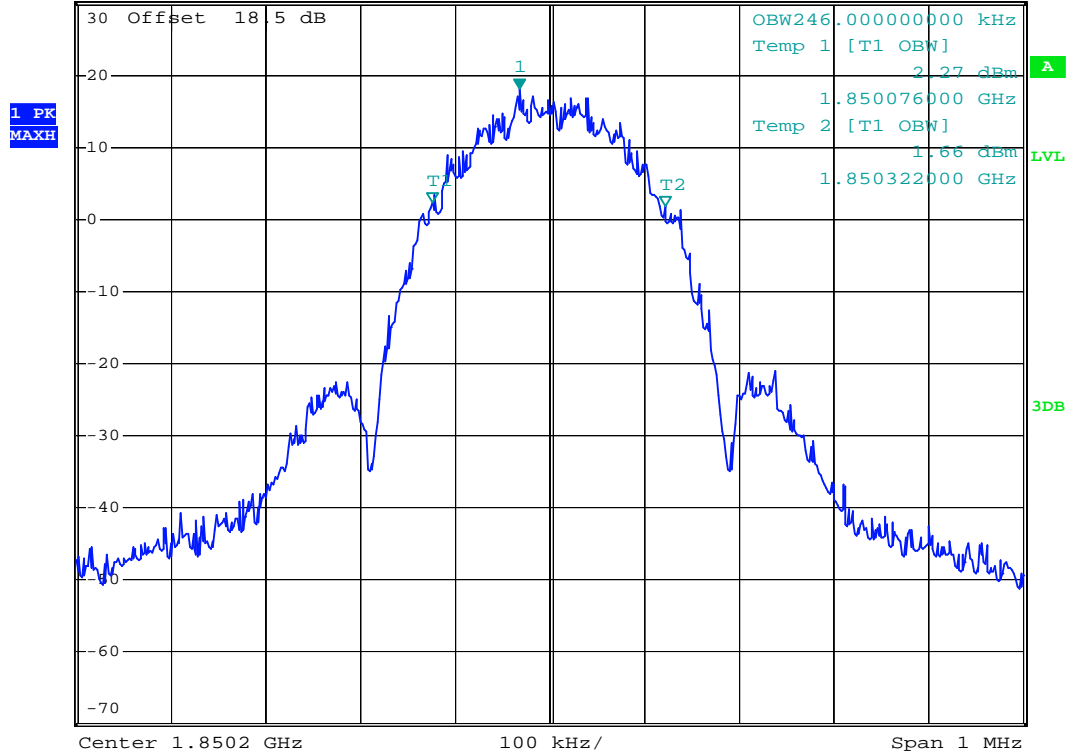

Date: 30.APR.2008 12:09:44




- Test Mode : GSM1900 (EDGE) CH661 99% Occupied Bandwidth
- Power State : High



*RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 17.54 dBm
 *SWT 300 ms 1.879966000 GHz

Ref 30 dBm

*Att 30 dB

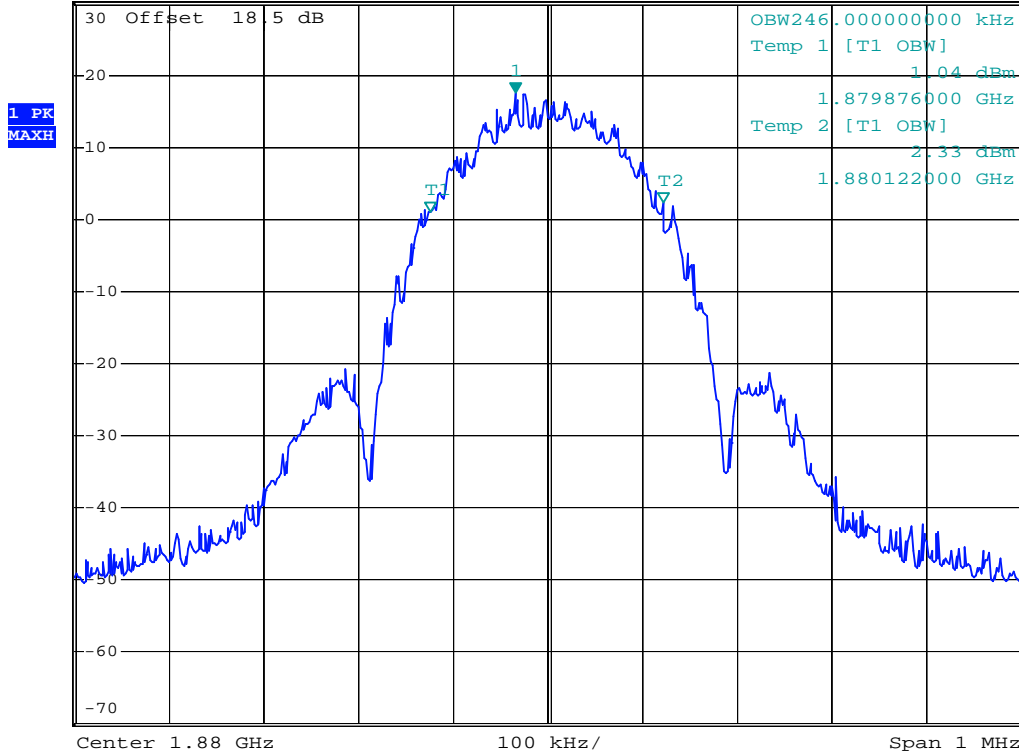


Date: 30.APR.2008 12:11:02



- Test Mode : GSM1900 (EDGE) CH810 99% Occupied Bandwidth
- Power State : High



*RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 16.95 dBm
 *SWT 300 ms 1.909796000 GHz
 Ref 30 dBm *Att 30 dB

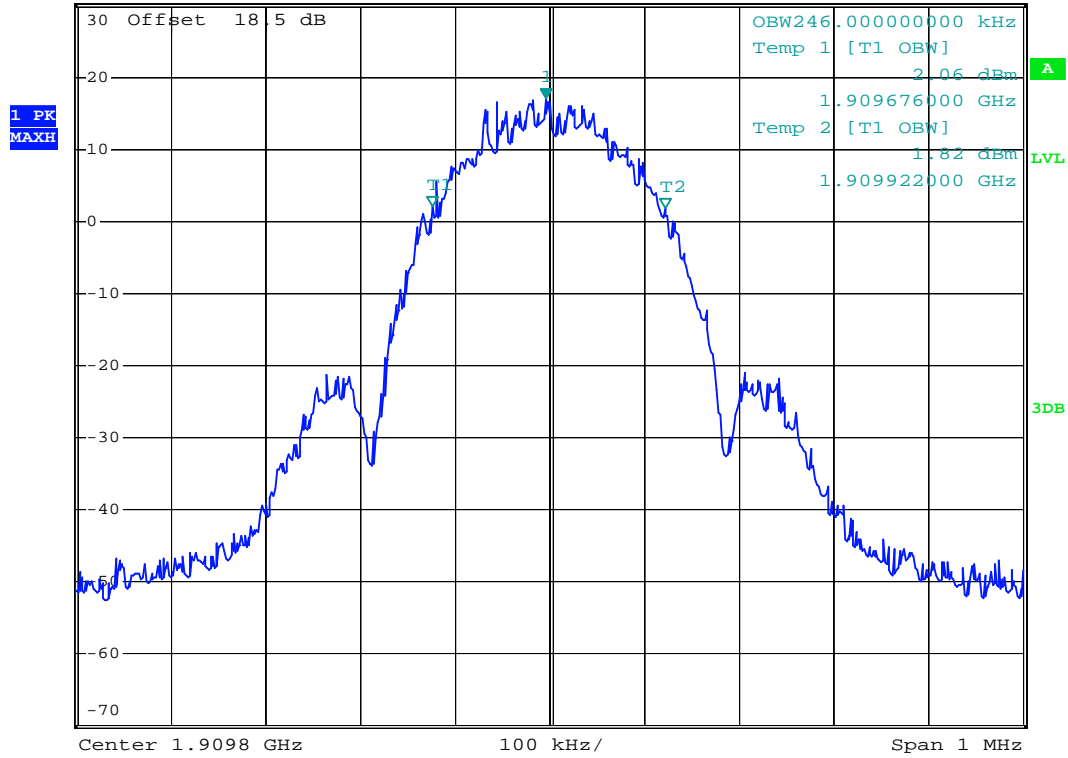

Date: 30.APR.2008 12:10:22



- Test Mode : GSM1900 (EDGE) CH512 26dB Bandwidth
- Power State : High




*RBW 3 kHz Delta 2 [T1]
 *VBW 10 kHz 1.45 dB
 *SWT 300 ms 302.00000000 kHz

Ref 30 dBm

*Att 30 dB

1 PK VIEW

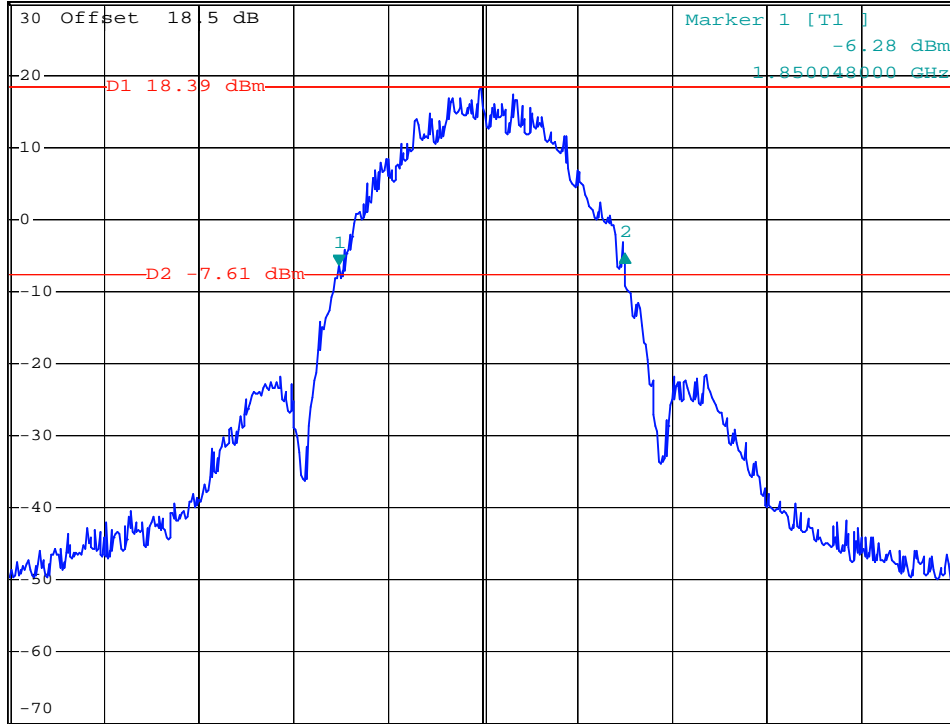

Center 1.8502 GHz

100 kHz/

Span 1 MHz


Date: 30.APR.2008 12:09:04



- Test Mode : GSM1900 (EDGE) CH661 26dB Bandwidth
- Power State : High



Ref 30 dBm *Att 30 dB *RBW 3 kHz Delta 2 [T1] 0.29 dB
*VBW 10 kHz *SWT 300 ms 304.00000000 kHz

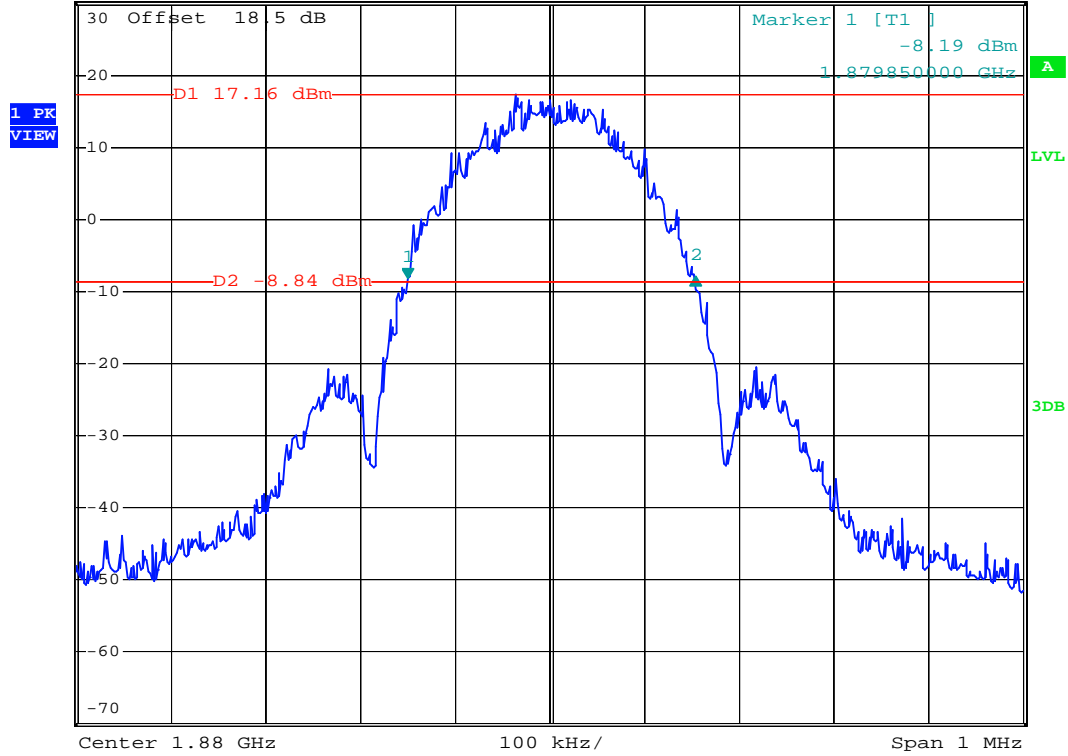

Date: 30.APR.2008 12:07:49



- Test Mode : GSM1900 (EDGE) CH810 26dB Bandwidth
- Power State : High




*RBW 3 kHz Delta 2 [T1]
 *VBW 10 kHz 0.55 dB
 *SWT 300 ms 304.00000000 kHz

Ref 30 dBm

*Att 30 dB

1 PK VIEW

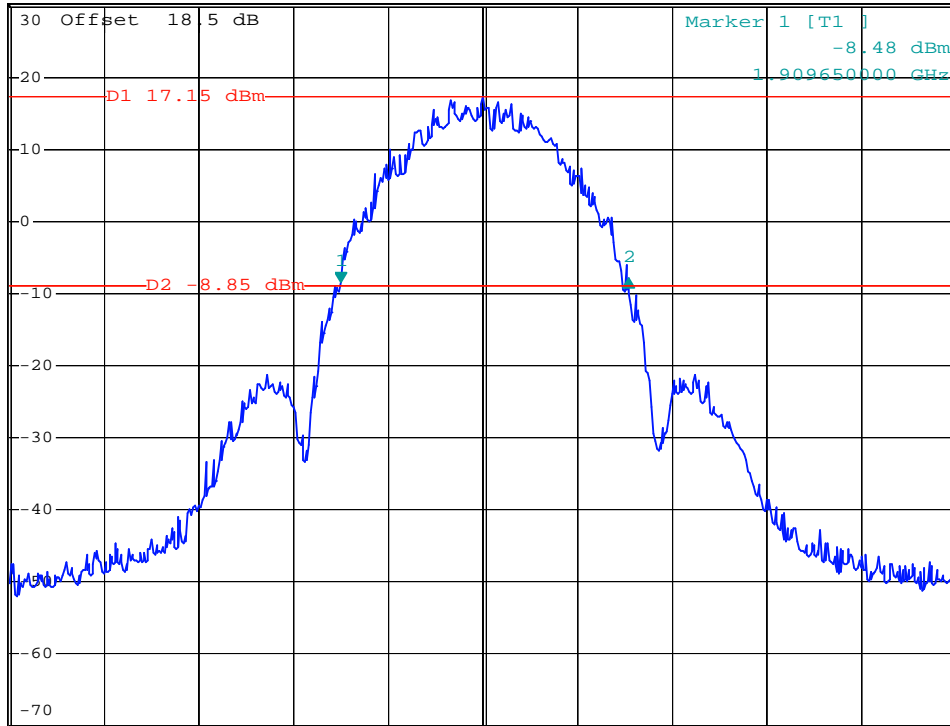

Center 1.9098 GHz

100 kHz/

Span 1 MHz


Date: 30.APR.2008 12:05:40



- Test Mode : GSM1900(EDGE) CH810 Higher Band Edge
- Power State : High



Ref 30 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1]
*VBW 3 kHz -27.07 dBm
*SWT 300 ms 1.910036000 GHz

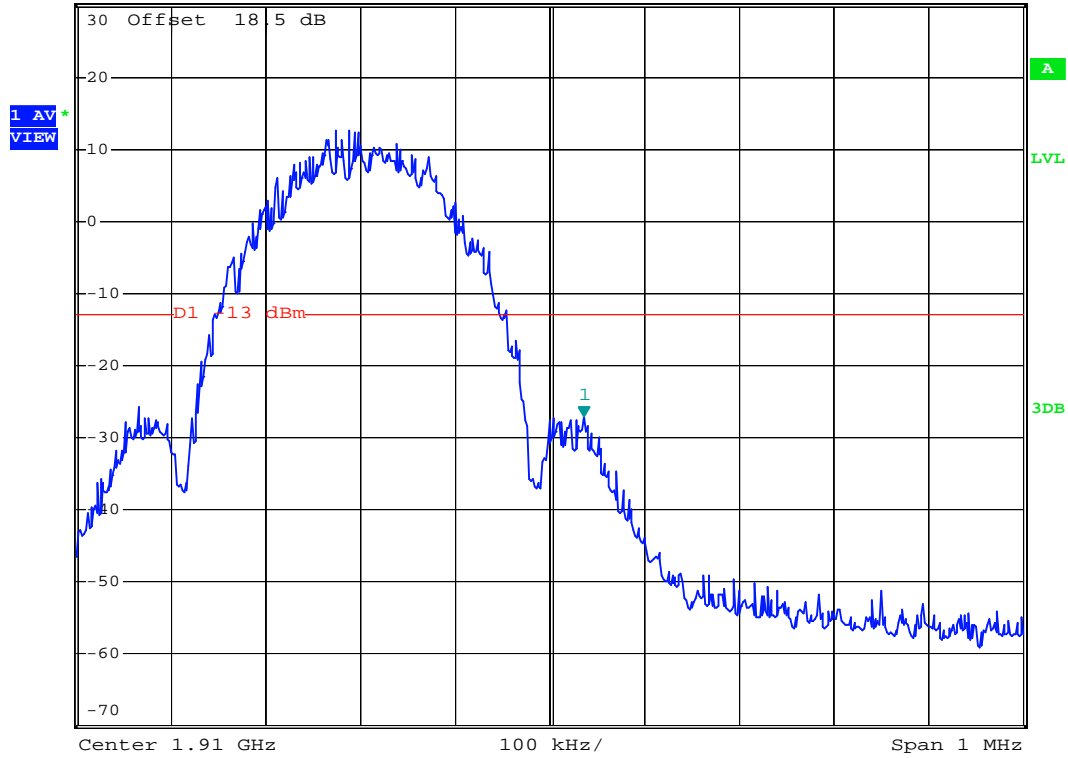

Date: 30.APR.2008 12:15:44

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

- a. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- b. The middle channel for the highest RF power within the transmitting frequency was measured.
- c. The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

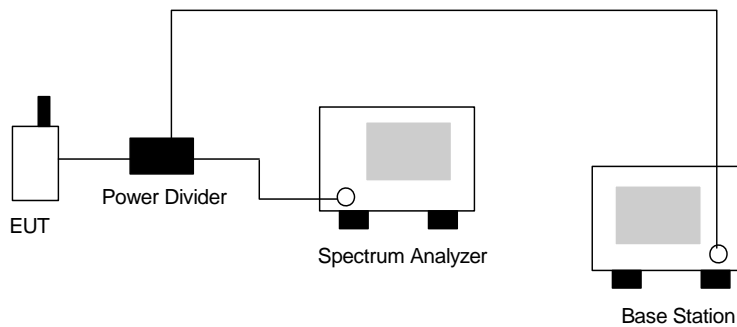



4.5.4 Test Result

- Mode 1
- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 30M-1G

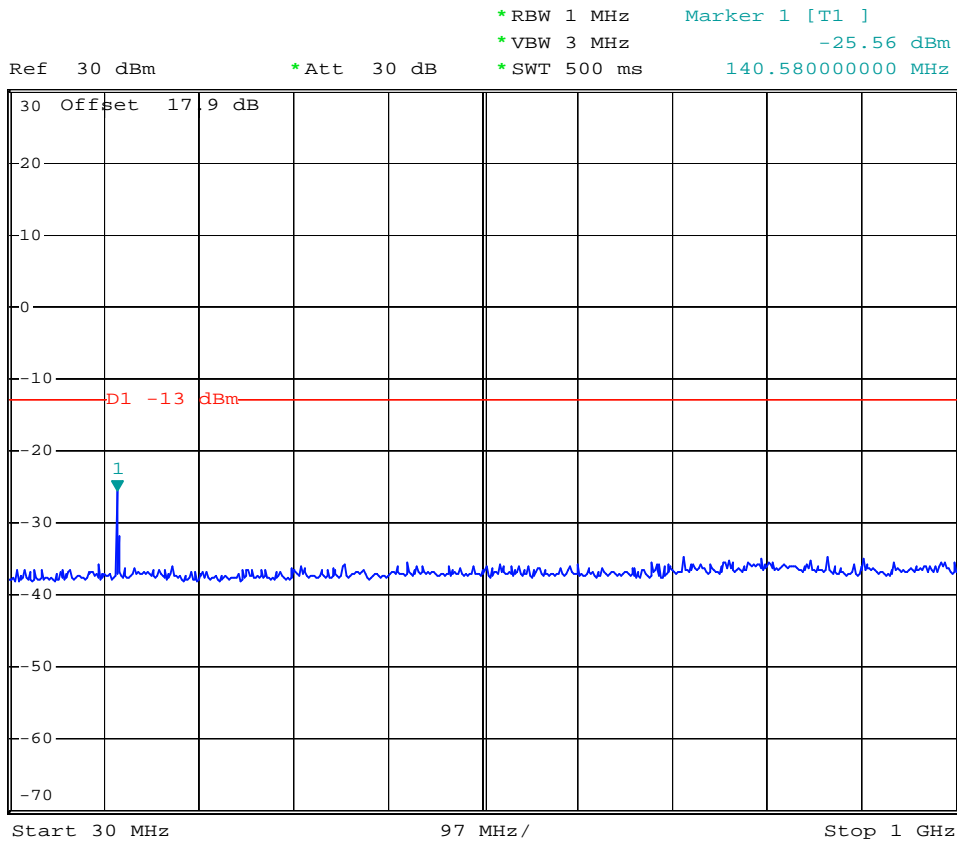

Date: 30.APR.2008 13:59:41



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 1G-3G




*RBW 1 MHz Marker 2 [T1]
 *VBW 3 MHz -30.43 dBm
 *SWT 500 ms 2.960000000 GHz

Ref 35 dBm

*Att 30 dB

1 PK
VIEW

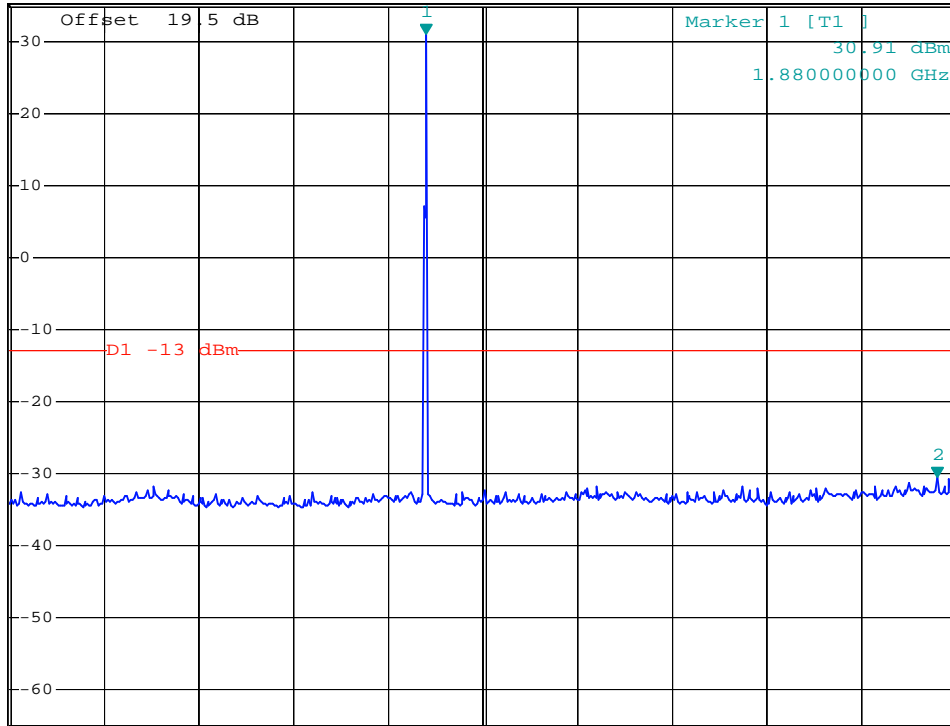

Start 1 GHz

200 MHz/

Stop 3 GHz

Date: 30.APR.2008 14:04:03




- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 3G-7G



*RBW 1 MHz Marker 2 [T1]
 *VBW 3 MHz -43.19 dBm
 *SWT 500 ms 5.640000000 GHz

Ref 0 dBm

*Att 0 dB

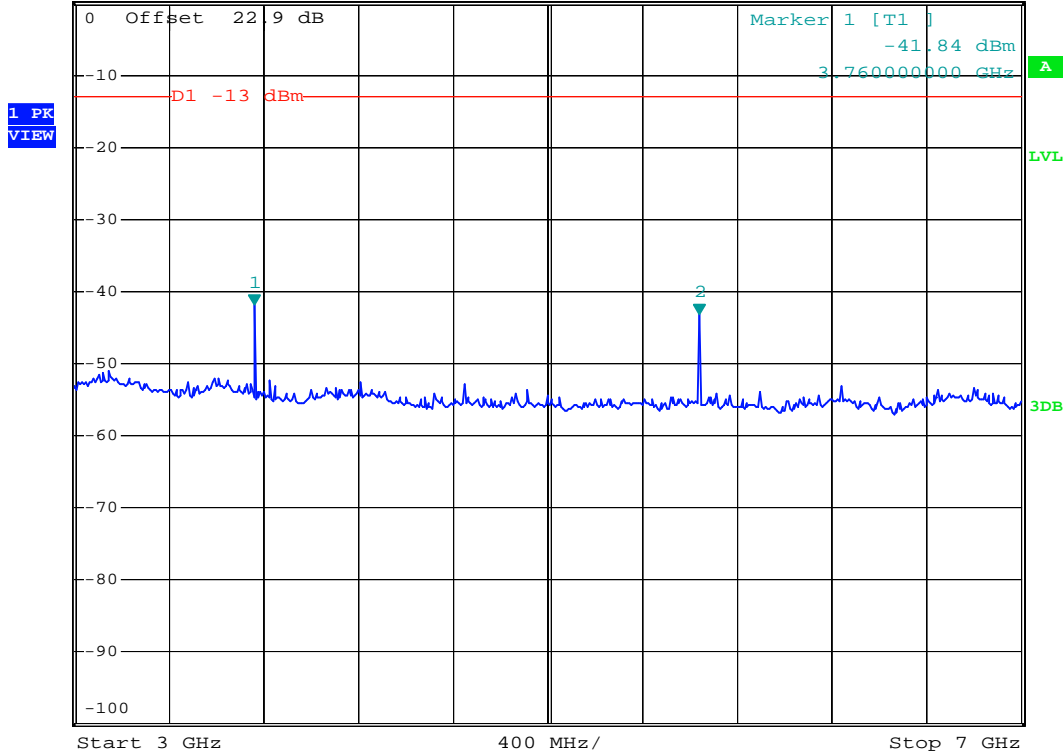

Date: 30.APR.2008 14:09:21




- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 7G-13.6G



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -47.95 dBm
 *SWT 500 ms 13.507600000 GHz

Ref 0 dBm *Att 0 dB

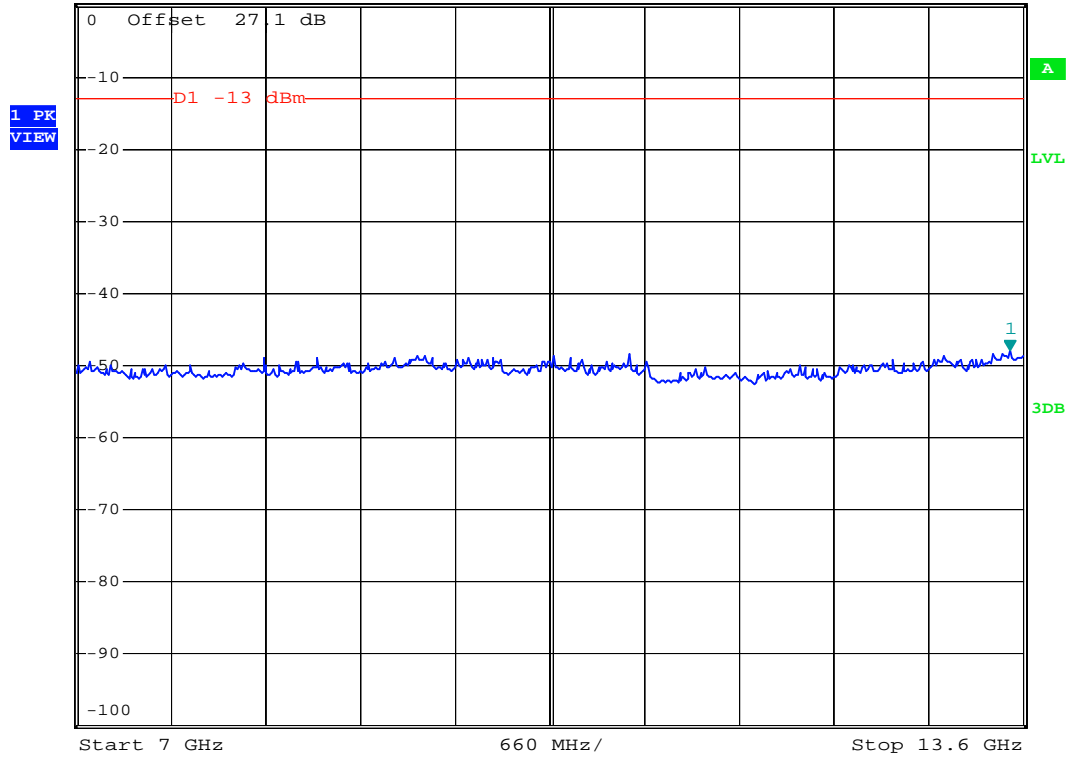

Date: 30.APR.2008 14:12:36




- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 13.6G-19.1G



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -22.67 dBm
 *SWT 500 ms 13.985000000 GHz

Ref 0 dBm *Att 0 dB

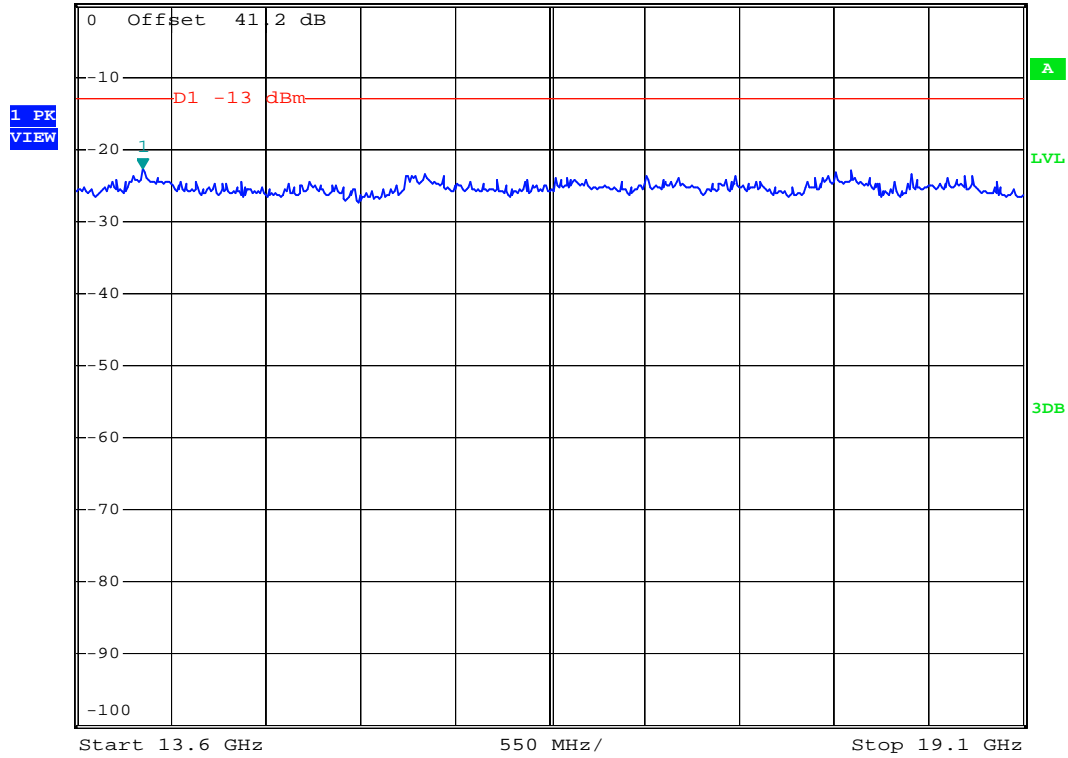

Date: 30.APR.2008 14:14:16



- Mode 2
- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 30M-1G




*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -28.66 dBm
 *SWT 500 ms 140.58000000 MHz

Ref 30 dBm

*Att 30 dB

1 PK
VIEW

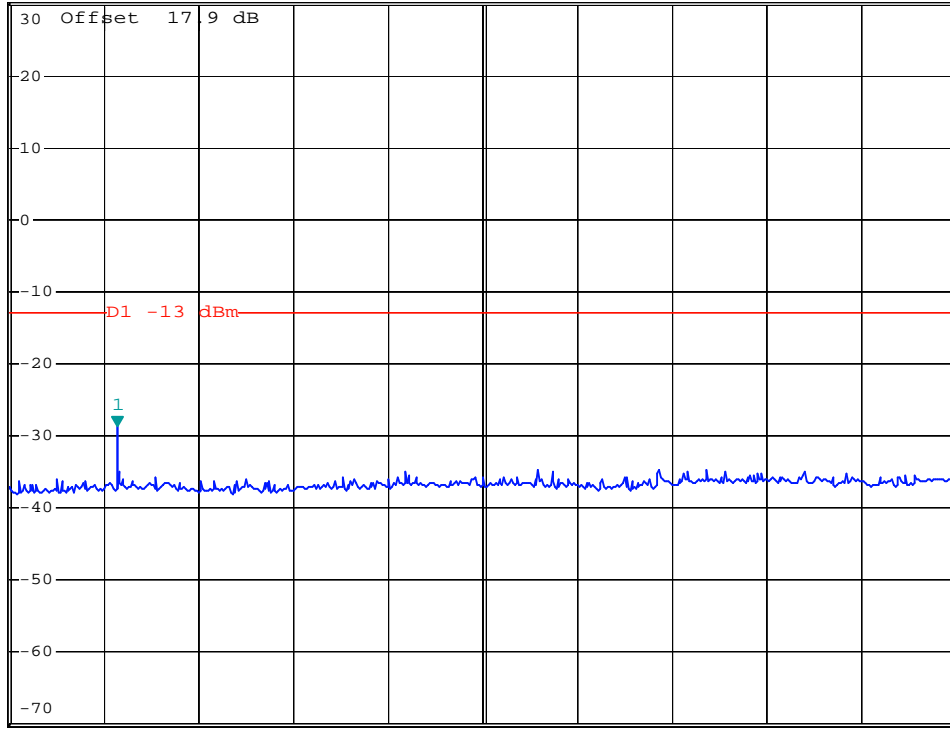

Start 30 MHz

97 MHz/

Stop 1 GHz

Date: 30.APR.2008 13:56:12



- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 1G-3G




*RBW 1 MHz Marker 2 [T1]
 *VBW 3 MHz -30.47 dBm
 *SWT 500 ms 2.984000000 GHz

Ref 35 dBm

*Att 30 dB

1 PK
VIEW

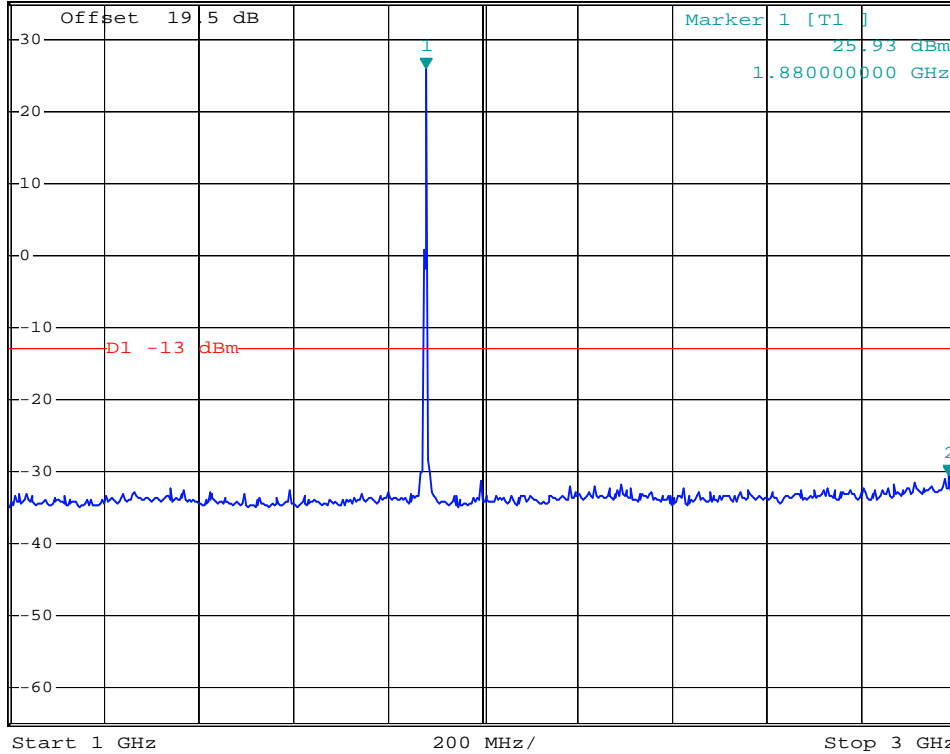

Date: 30.APR.2008 14:04:51




- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 3G-7G



*RBW 1 MHz Marker 2 [T1]
 *VBW 3 MHz -46.68 dBm
 *SWT 500 ms 5.640000000 GHz

Ref 0 dBm

*Att 0 dB

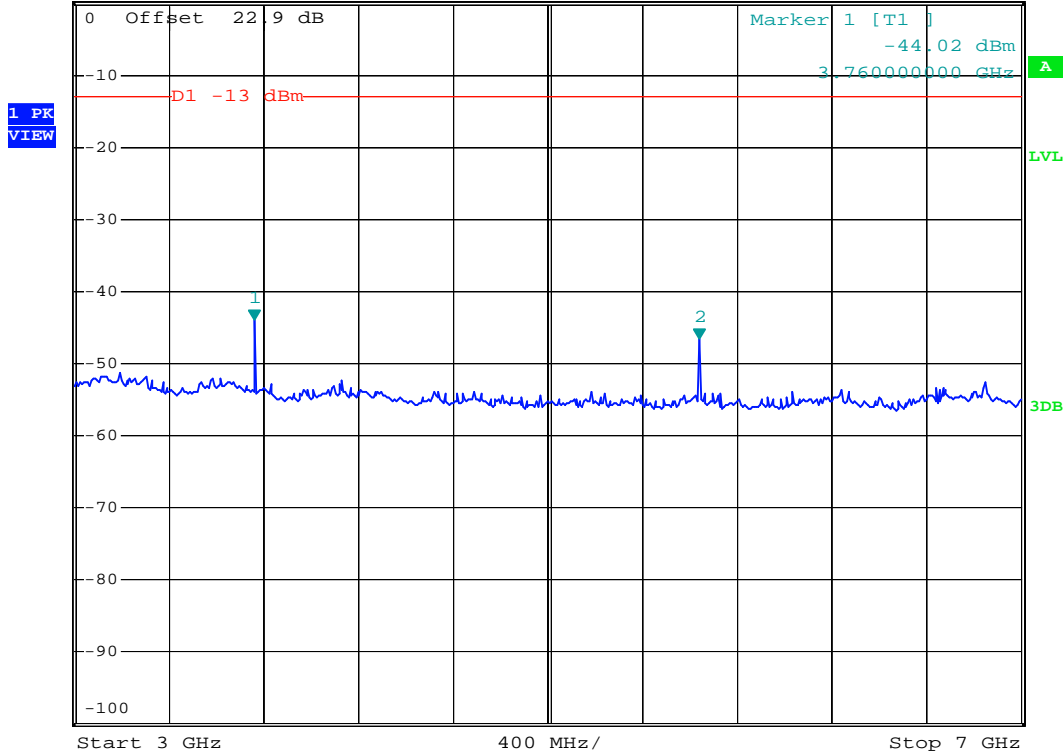

Date: 30.APR.2008 14:10:00



- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 7G-13.6G




*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -47.60 dBm
 *SWT 500 ms 13.60000000 GHz

Ref 0 dBm

*Att 0 dB

1 PK
VIEW

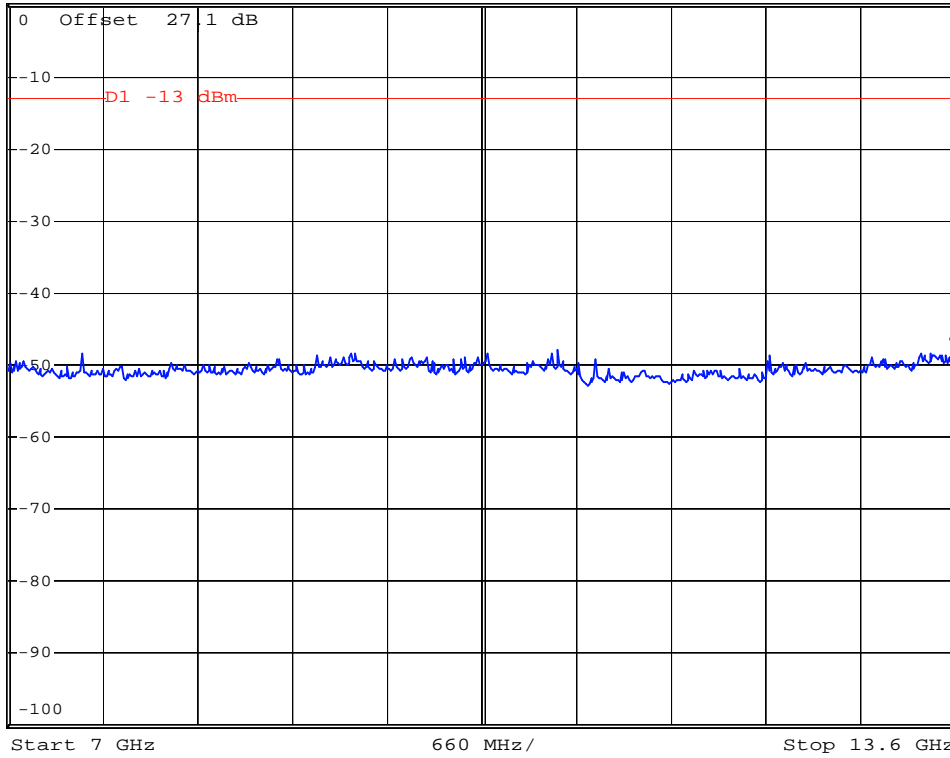

Date: 30.APR.2008 14:13:04



Test Mode : GSM1900 (EDGE) CH661


Frequency Range : 13.6G-19.1G



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -22.78 dBm
*SWT 500 ms 15.58000000 GHz

Ref 0 dBm

*Att 0 dB

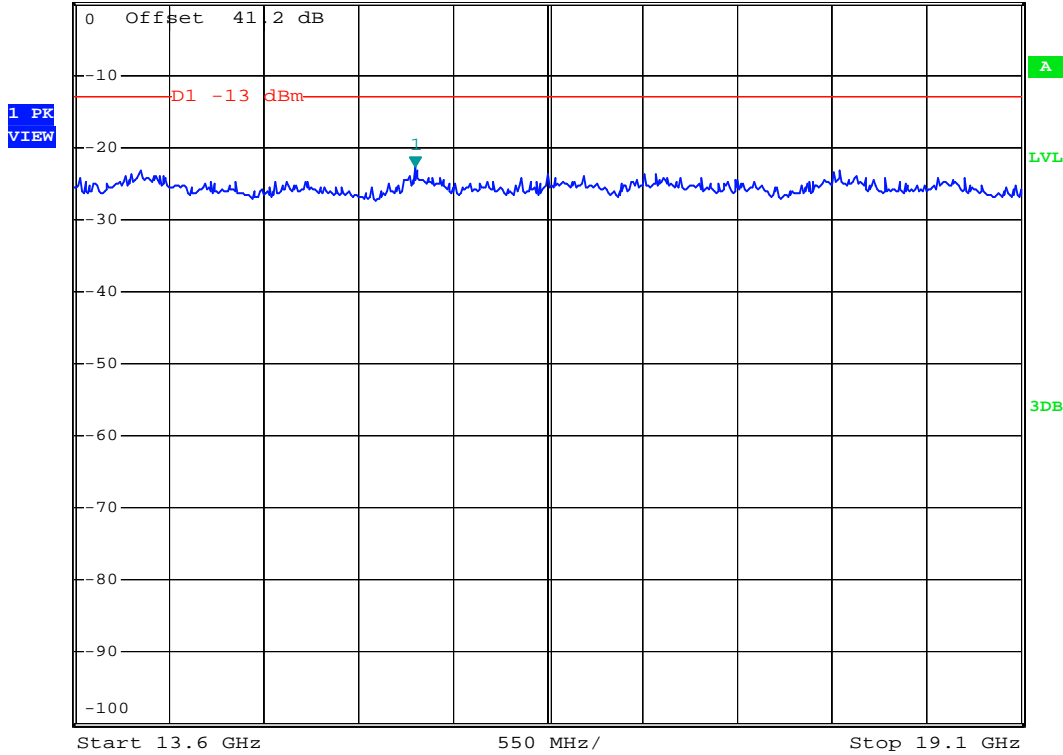

Date: 30.APR.2008 14:13:50



4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-C.


4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

- a. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
- b. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- d. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
- e. Taking the record of maximum spurious emission.
- f. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
- g. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- h. Taking the record of output power at antenna port.
- i. Repeat step 7 to step 8 for another polarization.
- j. Emission level (dBm) = output power + substitution Gain.


4.6.3 Test Setup Layout

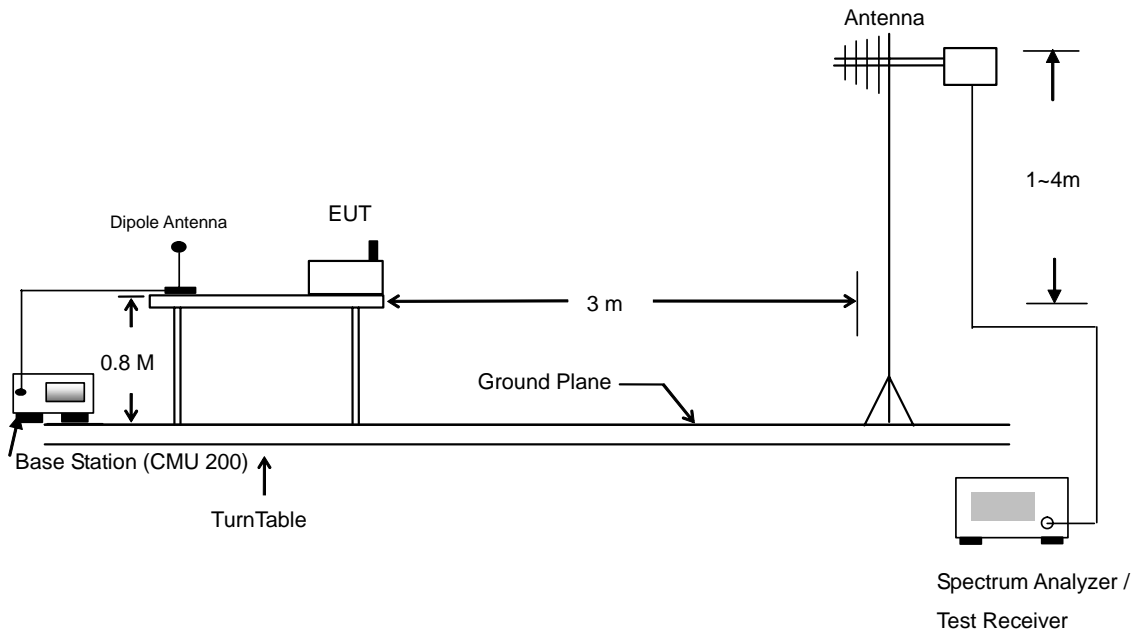



4.6.4 Test Data

- Mode 1
- Horizontal Polarization

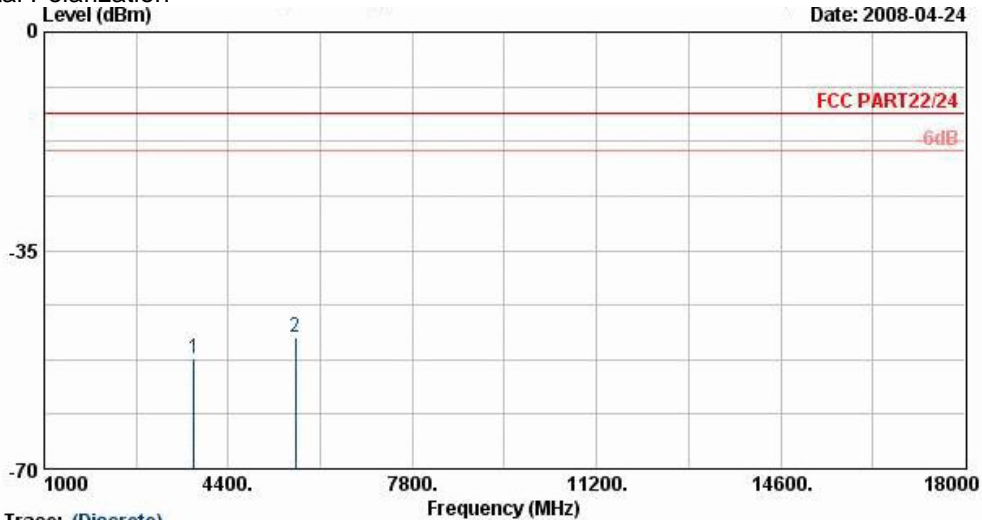


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : PCS 1900 Link Mode ; Ch561 + Adaptor
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-52.23	-13	-39.23	-61.69	-55.6	4.03	7.40	H	Pass
5636	-48.85	-13	-35.85	-60.99	-53.79	3.87	8.81	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

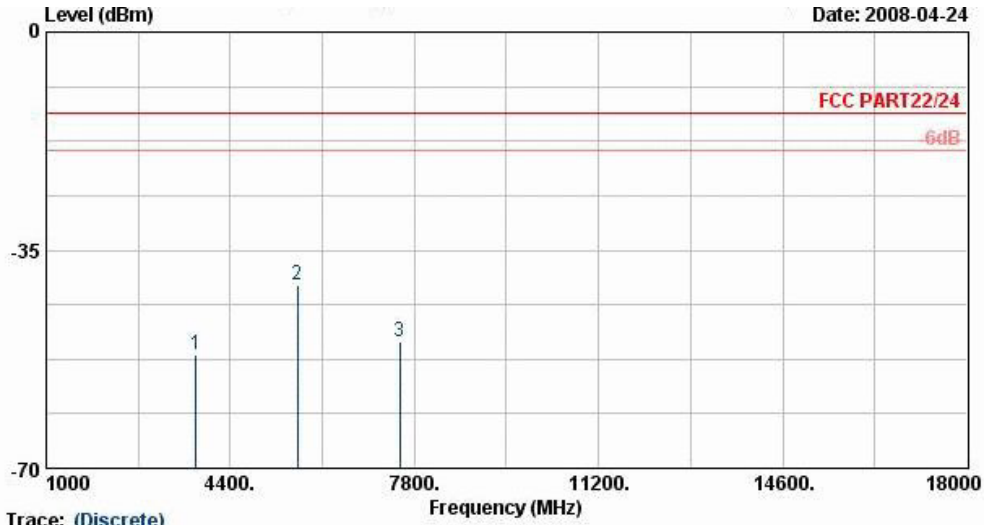


Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.82	-13	-38.82	-63.92	-55.7	4.03	7.91	V	Pass
5636	-40.50	-13	-27.50	-60.74	-46.4	3.87	9.77	V	Pass
7524	-49.62	-13	-36.62	-70.21	-54.6	5.83	10.81	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- Mode 2
- Horizontal Polarization

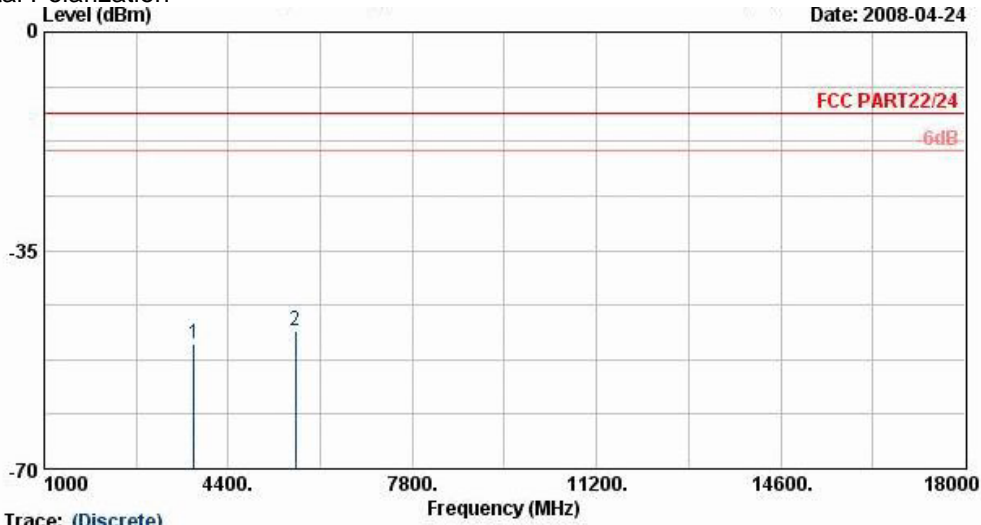

Trace: (Discrete)


Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : EDGE 1900 Link Mode ; Ch189 + Adaptor
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-49.85	-13	-36.85	-58.63	-53.22	4.03	7.40	H	Pass
5636	-47.85	-13	-34.85	-60	-52.79	3.87	8.81	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

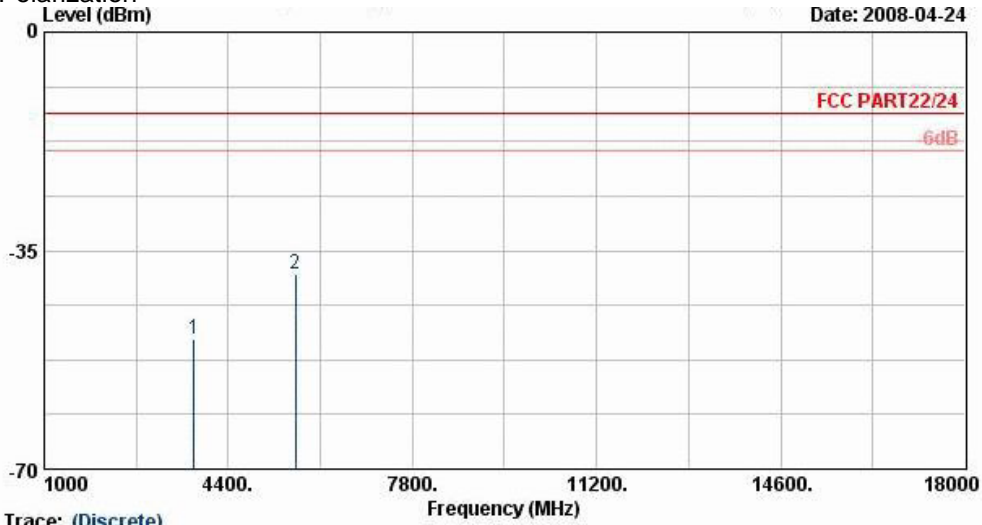


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : EDGE 1900 Link Mode ; Ch189 + Adaptor
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-49.12	-13	-36.12	-62.05	-53	4.03	7.91	V	Pass
5636	-38.70	-13	-25.70	-59.43	-44.6	3.87	9.77	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- Mode 3
- Horizontal Polarization

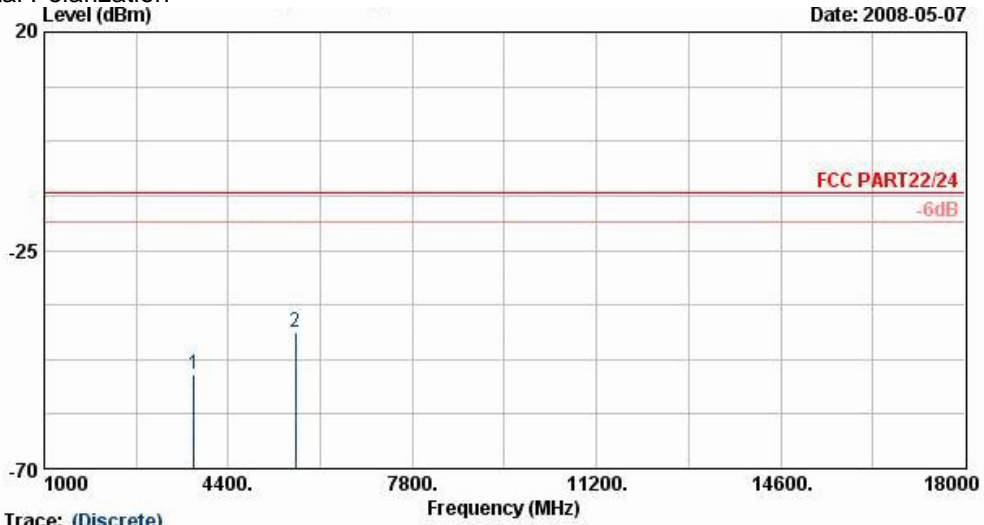

Date: 2008-05-07


Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : PCS 1900 Link Mode ; Ch561 + Adaptor
 : + 11b Tx_CH06
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.63	-13	-37.63	-62.66	-54	4.03	7.40	H	Pass
5636	-41.86	-13	-28.86	-59.66	-46.8	3.87	8.81	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

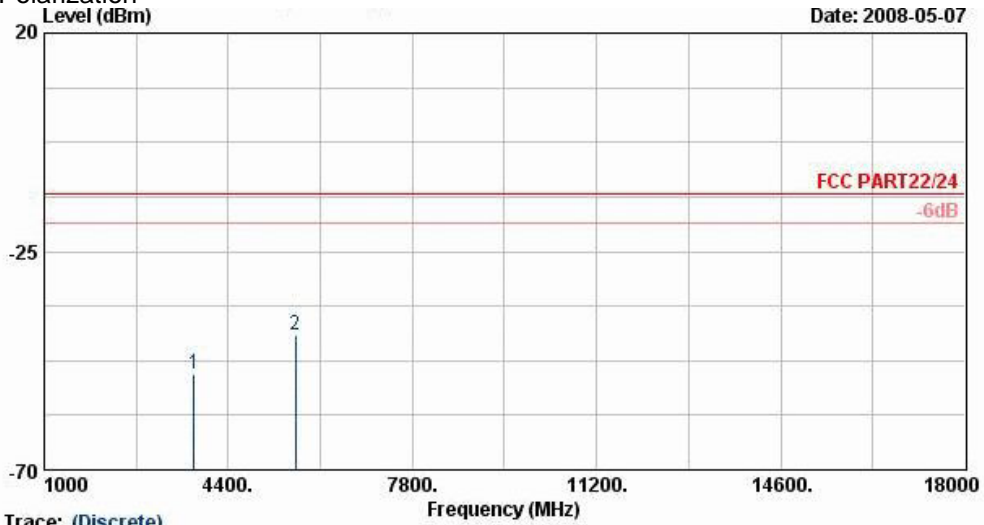

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 EUT : PDA phone w/sliding
 : keyboard WCDMA(Band IX)
 : + GSM/GPRS/EDGE(850/900/1800/1900)
 Power : 120Vac/60Hz
 Model : FG 822609-05
 Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
 : + 11b Tx_CH06
 Plane : E1
 IMEI : 35319002001101301

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.12	-13	-37.12	-63.9	-54	4.03	7.91	V	Pass
5636	-42.10	-13	-29.10	-60.25	-48	3.87	9.77	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

- a. The EUT and test equipment were set up as shown on the following section.
- b. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- c. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- d. The temperature tests were performed for the worst case.
- e. Test data was recorded.

4.7.3 Test Setup Layout

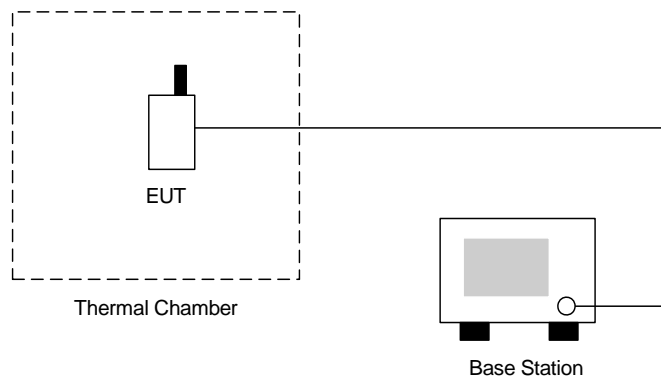



4.7.4 Test Result

• Test Mode : GSM1900 (GSM) CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-63	-0.03	2.5	Passed
-20	-55	-0.03		
-10	-30	-0.02		
0	-37	-0.02		
10	-41	-0.02		
20	-38	-0.02		
30	-23	-0.01		
40	-28	-0.01		
50	-34	-0.02		

• Test Mode : GSM1900 (EDGE) CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-61	-0.03	2.5	Passed
-20	-63	-0.03		
-10	-68	-0.04		
0	-49	-0.03		
10	-24	-0.01		
20	31	0.02		
30	-54	-0.03		
40	-58	-0.03		
50	-64	-0.03		

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

- a. The EUT was placed in a temperature chamber at 25 ± 5 °C and connected as the following section.
- b. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- c. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

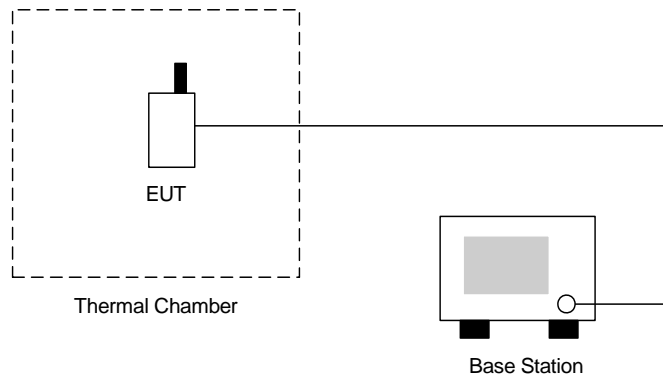



4.8.4 Test Result

- Test Mode : GSM1900 (GSM) CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-36.0	-0.02	2.5	Passed
BEP	-26.0	-0.01		
4.2	-18.0	-0.01		

- Test Mode : GSM1900 (EDGE) CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	25.0	0.01	2.5	Passed
BEP	-26.0	-0.01		
4.2	-28.0	-0.01		

Remark:

- Normal Voltage= 3.7V.
- Battery End Point (BEP)= 3.2 V.



5. List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY44211028	9KHz-26.5GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH07-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 26, 2007	Jul. 25, 2008	Radiation (03CH07-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 01, 2007	Nov. 30, 2008	Radiation (03CH07-HY)
Double Ridge Horn Antenna	Com-Power	AH118	071025	1G~18G	Jun. 04, 2007	Jun. 03, 2008	Radiation (03CH07-HY)
SHF-EHF Horn	SCHWARZBEC K	BBHA 9170	9170-251	14G - 40G	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5G	Nov. 22, 2007	Nov. 21, 2008	Radiation (03CH07-HY)
Pre Amplifier	EMEC	PA303	PA303-SMA-	100K~3GHz	Nov. 26, 2007	Nov. 25, 2008	Radiation (03CH07-HY)
Base Station Simulator	R & S	CMU200	103937	Third-Band	Oct. 19, 2007	Oct. 18, 2008	Radiation (03CH07-HY)
Thermal Chamber	Tenyi technology	TTH-D35P	TBN-930701	N/A	Aug. 02, 2007	Aug. 01, 2008	Conducted (TH02-HY)
Spectrum	R&S	FSP40	100055	9KHz~40GHz	Jun. 25, 2007	Jun. 24, 2008	Conducted (TH02-HY)
Bluetooth Test	ANRITSU	MT8852A	6K00003939	N/A	N/A	N/A	Conducted (TH02-HY)
Power Divider	ARRA	5200-1	3871	N/A	Oct. 01, 2007	Sep. 30, 2008	Conducted (TH02-HY)
DC Power Supply	TOPWARD	3303D	740889	N/A	May 25, 2007	May 24, 2009	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 21, 2008	Feb. 20, 2009	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 21, 2008	Feb. 20, 2009	Conducted (TH02-HY)



6. Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	4.72				

END OF TEST REPORT