

Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 1 of 65

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: Dream

HTC **Brand Name:**

DREA100 Model Name:

FCC ID: **NM8DRM**

Report No.: EH/2008/50014

Issue Date: Jun. 04, 2008

FCC Rule Part: §15.247

Prepared for: HTC Corporation

No.23, Xinghua Rd., Taoyuan City, Taoyuan

County 330, Taiwan, R.O.C

SGS Taiwan Ltd. Prepared by:

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan.





Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌紀刊工業品工工路134號 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 2 of 65

VERIFICATION OF COMPLIANCE

Applicant: HTC Corporation

No.23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan,

R.O.C

Equipment Under Test: Dream

Brand Name: HTC

FCC ID Number: NM8DRM DREA100 Model No.:

N/A **Model Difference:**

File Number: EH/2008/50014

May. 23, 2008 ~ Jun. 02, 2008 **Date of test:**

May. 22, 2008 **Date of EUT Received:**

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Jin	Date	Jun. 04, 2008	
Prepared By:	Bondi Liu / Engineer Gigi yek	Date	Jun. 04, 2008	
Approved By:	Gigi Yeh / Clerk Vincent Su / Manager	Date 	Jun. 04, 2008	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 3 of 65

Version

Version No.	Date
00	Jun. 04, 2008

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明。此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 4 of 65

Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	10
	1.3.	Test Methodology	10
	1.4.	Test Facility	10
	1.5.	Special Accessories	10
	1.6.	Equipment Modifications	10
2.	SYS	TEM TEST CONFIGURATION	11
	2.1.	EUT Configuration	11
	2.2.	EUT Exercise	11
	2.3.	Test Procedure	11
	2.4.	Configuration of Tested System	12
3.	SUM	IMARY OF TEST RESULTS	13
4.	DES	CRIPTION OF TEST MODES	13
5.	CON	NDUCTED EMISSION TEST	14
	5.1.	Standard Applicable	14
	5.2.	EUT Setup	14
	5.3.	Measurement Procedure	14
	5.4.	Measurement Equipment Used:	15
	5.5.	Measurement Result.	15
6.	PEA	K OUTPUT POWER MEASUREMENT	18
	6.1.	Standard Applicable	18
	6.2.	Measurement Procedure	18
	6.3.	Measurement Result	18
	6.4.	Measurement Equipment Used:	19
7.	20dB	B BAND WIDTH	23
	7.1.	Standard Applicable	23
	7.2.	Measurement Procedure	23
	7.3.	Measurement Result.	23
	7.4.	Measurement Equipment Used:	24



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 5 of 65

8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	28
	8.1.	Standard Applicable	28
	8.2.	Measurement Procedure	28
	8.3.	Measurement Result.	28
	8.4.	Measurement Equipment Used:	28
9.	SPUR	RIOUS RADIATED EMISSION TEST	33
	9.1.	Standard Applicable	36
	9.2.	EUT Setup	36
	9.3.	Measurement Procedure	36
	9.4.	Test SET-UP (Block Diagram of Configuration)	37
	9.5.	Measurement Equipment Used:	38
	9.6.	Field Strength Calculation	38
	9.7.	Measurement Result	38
10.	FRE(QUENCY SEPARATION	51
	10.1.	Standard Applicable	51
	10.2.	Measurement Procedure	51
	10.3.	Measurement Result	51
	10.4.	Measurement Equipment Used:	51
11.	NUM	BER OF HOPPING FREQUENCY	53
	11.1.	Standard Applicable	
	11.2.	Measurement Procedure	53
	11.3.	Measurement Result	53
	11.4.	Measurement Equipment Used:	53
12.	TIME	E OF OCCUPANCY (DWELL TIME)	55
		Standard Applicable	
	12.2.	Measurement Procedure	55
	12.3.	Measurement Result	55
	12.4.	Measurement Equipment Used:	56
13.	PEAF	K POWER SPECTRAL DENSITY	62
	13.1.		
	13.2.	Measurement Procedure	62
	13.3.	Measurement Result	62
	13.4.	Measurement Equipment Used:	62



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 6 of 65

14. AN	TENNA REQUIREMENT	65
	1. Standard Applicable	
14.	2. Antenna Connected Construction	65
APPEN	NDIX 1 PHOTOGRPHS OF SET UP	66
APPEN	DIX 2 PHOTOGRPHS OF EUT	69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明。此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 7 of 65

1. GENERAL INFORMATION

1.1. Product Description

General:

Ocherai.				
Product Name:	Dream			
Brand Name:	HTC			
Model Name:	DREA100			
Model Difference:	N/A			
Simple Hands-Free (SHF):	1 provide, Mode No.:	CHM-311STV08002, Supplier: COTRON		
Data Cable (USB):	2 provide, Model: MI	EC/60-4426-300C;70H00272_00M		
	3.7 Vdc re-chargeable battery or 5Vdc by AC/DC power adapter			
Power Supply	Battery:	1. Model: DREA160 2. P/N: 35H00106-01M		
Tower Suppry	Adapter:	Model: PSAA05A-050		
	Car Charger:	Model: CLA05D-050A		
	Jog ball	EUT		
Jog ball and EUT color de-	TMU Dark Green	Black color		
scription	TMU Brown	Black color		
	TMU Nude	Original color		



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 8 of 65

GSM:

	GSM/GPRS 850	824 MHz– 849MHz	33 dBm		
	EDGE 850 824 MHz– 849MHz		27 dBm		
Cellular Phone Standards Frequency Range and Power	GSM/GPRS 1900	1850MHz – 1910MHz	30 dBm		
quanty sample and selection	EDGE 1900	1850MHz – 1910MHz	26 dBm		
	WCDMA Band IV	1710MHz – 1755MHz	23 dBm		
Type of Emission	GSM: 300KGXW EDGE: 300KG7W WCDMA: 4M20F9W				
IMEI 35827901002462600					
Antenna Designation	GSM850: PIFA Antenna, -1.5dBi				
Timelina Designation	GSM1900: PIFA Antenna. 0.5dBi				

WLAN:

Frequency Range	2412 – 2462 MHz
Channel number	11 channels
Rated Power	802.11 b: 18.02 dBm (Peak) 802.11 g: 13.16 dBm (Peak)
Modulation Technology	DSSS, OFDM
Modulation type	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation	PIFA Antenna, 0.5 dBi
Type of Emission	16M5M7D

The EUT is compliance with IEEE 802.11 b/g Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 9 of 65

Bluetooth:

Frequency Range	2402 – 2480MHz
Channel number	79 channels
Rated Power	1.25 dBm (Peak)
Modulation type	Frequency Hopping Spread Spectrum (FHSS) (GFSK) (π/ 4-DQPSK) (8DPSK)
Antenna Designation	PIFA Antenna, 0.5dBi

The EUT is compliance with Bluetooth 2.0 with EDR.

This test report applies for Bluetooth.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 10 of 65

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>NM8DRM</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a Doc procedure.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 11 of 65

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 12 of 65

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Test software	BlueSuite 1.22	CSR	Verson1.22	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 13 of 65

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	No Limit
§15.247I	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203,	Antenna Requirement	Compliant
§15.247(b)(4)(i)	_	

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) · mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.

The Radiated Spurious Emission was performed at X. Y. and Z. axle. The worst case Y axle was reported.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 14 of 65

5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV) Quasi-peak Average		
MHz			
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 110Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 15 of 65

5.4. Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
EMC Analyzer	НР	8594EM	3624A00203	09/02/2007	09/03/2008					
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2007	06/10/2008					
Transient Limiter	HP	11947A	3107A02062	09/02/2007	09/03/2008					
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2007	12/30/2008					
LISN	Rolf-Heine	NNB-2/16Z	99013	01/10/2008	01/09/2009					
Coaxial Cables	FCC	FCC-LISN-50/250-25-2-01	04034	01/11/2008	01/10/2009					

5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 16 of 65

Humidity.


Air Pressure:

58 %

hpa

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operation Mode			Test Date:	Jun. 02, 2008
Temperature:	26 ℃	Humidity:	58%	Test By:	Bondi

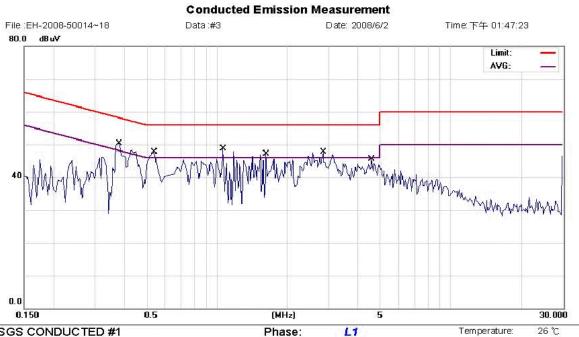

Power:

Distance:

AC 120V/60Hz

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: Dream M/N: DREA100

Note: Bluetooth operation + Charger mode

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1		0.3800	50.29	0.10	50.39	58.28	-7.89	QP	
2	*	0.3800	44.00	0.10	44.10	48.28	-4.18	AVG	
3		0.5400	47.66	0.06	47.72	56.00	-8.28	QP	
4		0.5400	39.00	0.06	39.06	46.00	-6.94	AVG	
5		1.0600	48.68	0.04	48.72	56.00	-7.28	QP	
6		1.0600	38.00	0.04	38.04	46.00	-7.96	AVG	
7		1.6200	47.11	0.04	47.15	56.00	-8.85	QP	
8		1.6200	37.00	0.04	37.04	46.00	-8.96	AVG	
9		2.8600	47.75	0.04	47.79	56.00	-8.21	QP	
10		2.8600	35.00	0.04	35.04	46.00	-10.96	AVG	
11		4.5800	45.47	0.05	45.52	56.00	-10.48	QP	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 17 of 65

Humidity. Air Pressure:

Member of SGS Group

hpa

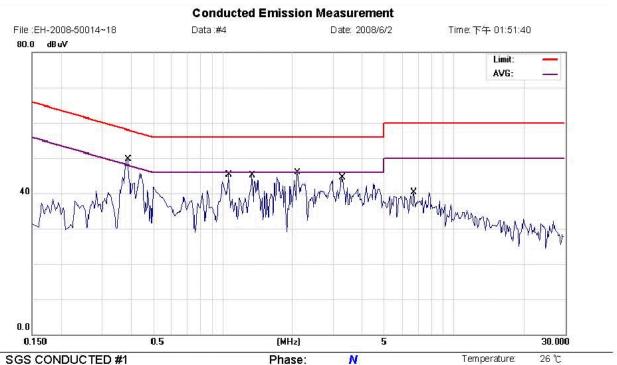

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: Dream M/N: DREA100

Note: Bluetooth operation + Charger mode

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1 *	0.3900	49.61	0.08	49.69	58.06	-8.37	QP	
2	0.3900	37.00	0.08	37.08	48.06	-10.98	AVG	
3	1.0600	45.33	0.03	45.36	56.00	-10.64	QP	
4	1.0600	35.00	0.03	35.03	46.00	-10.97	AVG	
5	1.3400	45.16	0.03	45.19	56.00	-10.81	QP	
6	1.3400	34.00	0.03	34.03	46.00	-11.97	AVG	
7	2.1000	45.82	0.03	45.85	56.00	-10.15	QP	
8	2.1000	35.00	0.03	35.03	46.00	-10.97	AVG	
9	3.2800	44.53	0.04	44.57	56.00	-11.43	QP	
10	3.2800	33.00	0.04	33.04	46.00	-12.96	AVG	
11	6.7200	40.21	0.13	40.34	60.00	-19.66	QP	

Power:

Distance:

AC 120V/60Hz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 18 of 65

6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 Watts.

6.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.3. Measurement Result

(Normal Mode)

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	0.39	0.50	0.89	0.00123	1
2441.00	0.75	0.50	1.25	0.00133	1
2480.00	-0.23	0.50	0.27	0.00106	1

*Note: Offset 0.5dB

(EDR Mode)

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	-1.11	0.50	-0.61	0.00087	1
2441.00	-0.74	0.50	-0.24	0.00095	1
2480.00	-1.75	0.50	-1.25	0.00075	1

*Note: Offset 0.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**


Page: 19 of 65

6.4. Measurement Equipment Used:

	Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009							
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008							
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A							
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009							

(Normal Mode)

Peak Power Output Data Plot (CH Low)

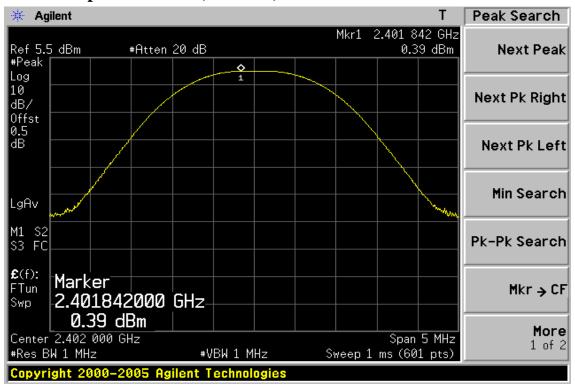


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 20 of 65

Peak Power Output Data Plot (CH Mid)

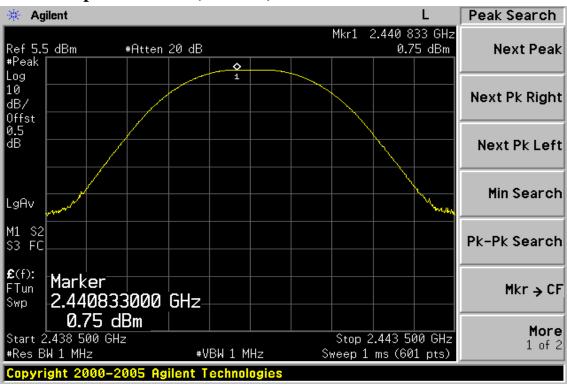

Peak Power Output Data Plot (CH High)

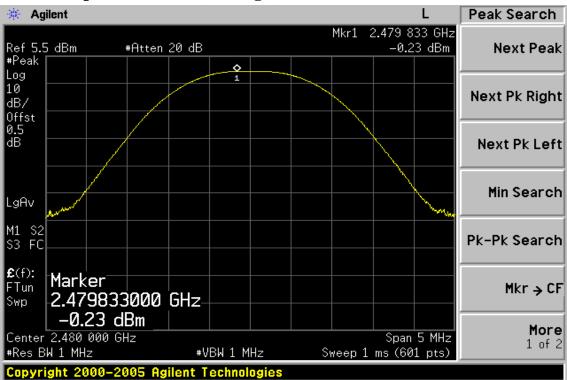

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**


Page: 21 of 65

(EDR Mode)

Peak Power Output Data Plot (CH Low)

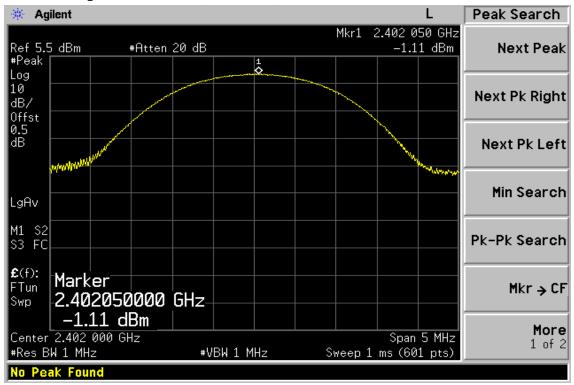

Peak Power Output Data Plot (CH Mid)

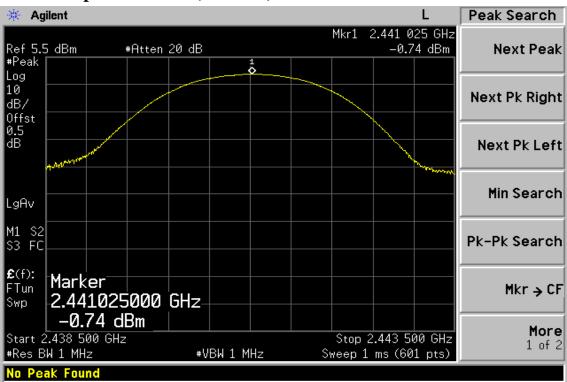


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 22 of 65

Peak Power Output Data Plot (CH High)

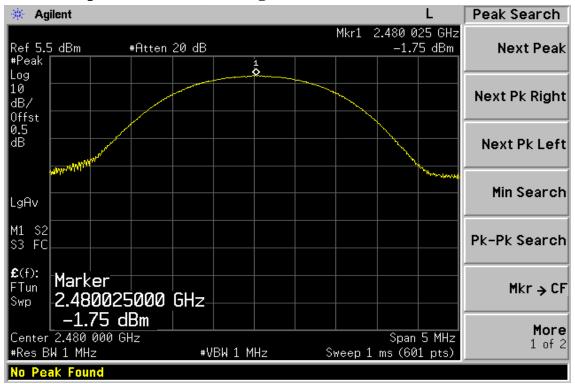

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 23 of 65

7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

7.3. Measurement Result

(Normal Mode)

СН	Bandwidth
	(MHz)
Lower	0.922
Mid	0.923
Higher	0.924

(EDR Mode)

СН	Bandwidth	2/3 Bandwidth		
	(MHz)	(MHz)		
Lower	1.373	0.915		
Mid	1.373	0.915		
Higher	1.379	0.919		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 24 of 65

7.4. Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009					
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008					
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A					
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009					

(Normal Mode)

20dB Band Width Test Data CH-Low



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 25 of 65

20dB Bandwidth Test Data CH-Mid



20dB Bandwidth Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**


Page: 26 of 65

(EDR Mode)

20dB Bandwidth Test Data CH-Low

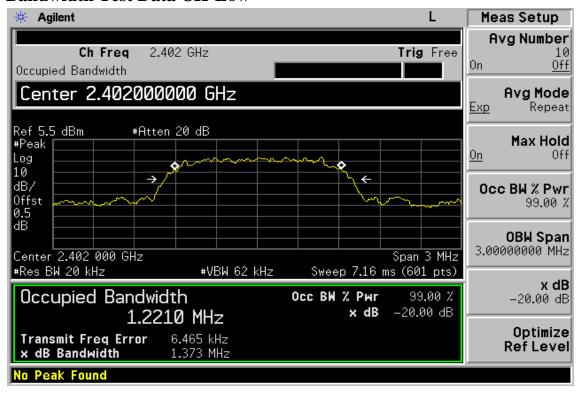

20dB Bandwidth Test Data CH-Mid

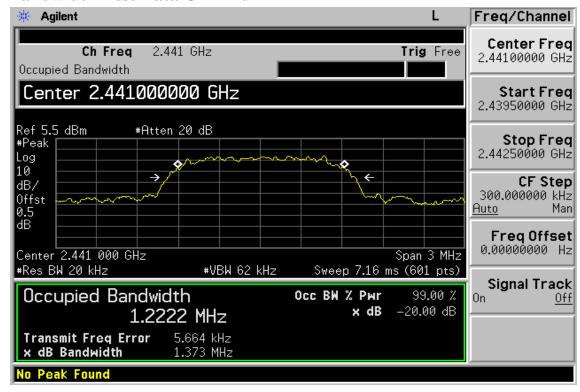


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 27 of 65

20dB Bandwidth Test Data CH-High

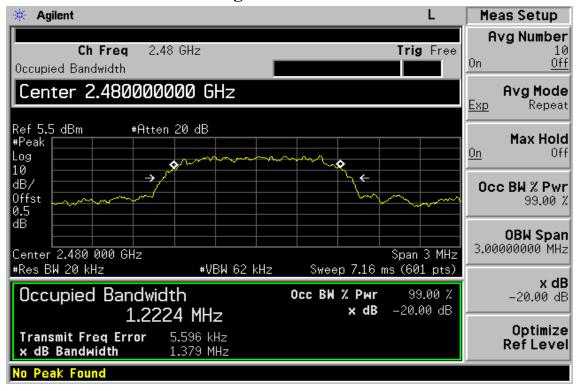

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 28 of 65

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.3. Measurement Result

Refer to attach spectrum analyzer data chart.

8.4. Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT MFR MODEL SERIAL LAST CAL										
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009					
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008					
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A					
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009					

Note: Measurement Equipment for radiated emission refers to section 9.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group





Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 29 of 65

(Normal Mode)

Conducted Emission: Test Data CH-Low

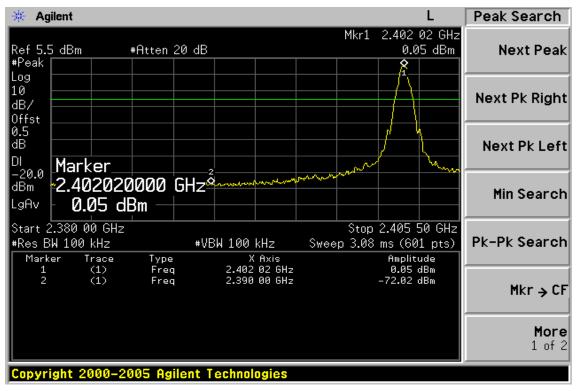

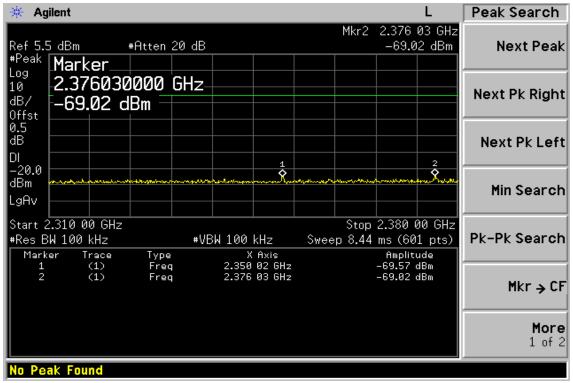


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**


Page: 30 of 65

Conducted Emission: Test Data CH-High

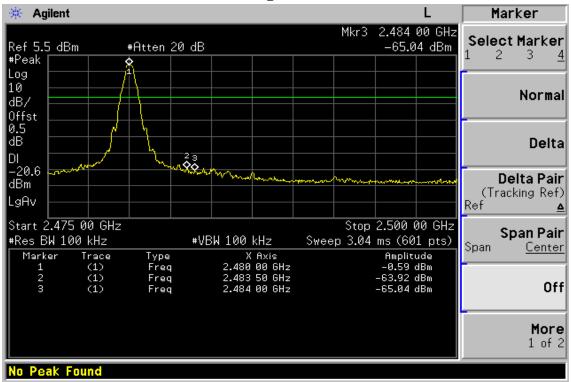

(EDR Mode)

Conducted Emission: Test Data CH-Low

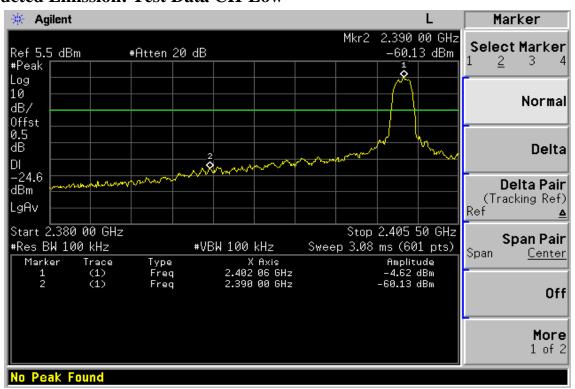


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 31 of 65

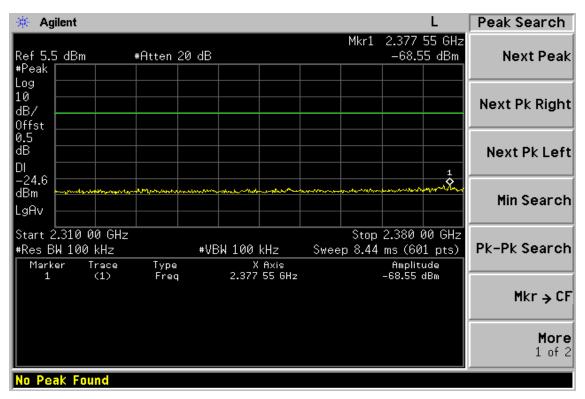

Conducted Emission: Test Data CH-High

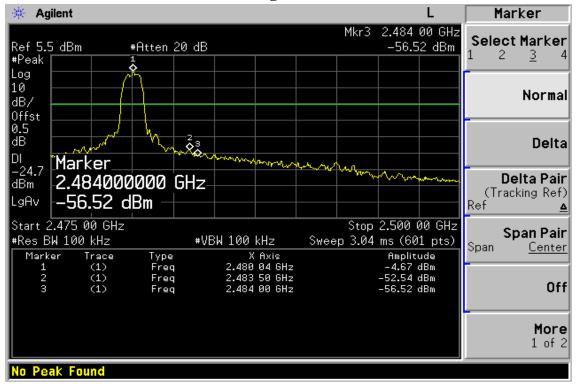

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 32 of 65

(Normal Mode)

Radiated Emission:

Operation Mode TX CH Low **Test Date** Jun. 02, 2008 Fundamental Frequency 2402 MHz Test By Bondi Pol Temperature 25 °C Ver. Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/n	(dB)	
2390.00	40.76		-10.76	30.00		74.00	54.00	-24.00	Peak
Operation	Mode	TX C	H Low			Test	Date	Jun. 02, 20	008
Fundamen	tal Freque	ncy 2402	MHz			Test	By	Bondi	
Temperatu	ire	25 ℃				Pol		Hor.	
Humidity		65 %							

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2390.00	41.03		-10.76	30.27		74.00	54.00	-23.73	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 33 of 65

Radiated Emission:

Operation ModeTX CH HighTest DateJun. 02, 2008Fundamental Frequency2480 MHzTest ByBondiTemperature25 °CPolVer.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	40.87		-10.46	30.41		74.00	54.00	-23.59	Peak

Operation Mode TX CH High Test Date Jun. 02, 2008 Fundamental Frequency 2480 MHz Test By Bondi Temperature 25 $^{\circ}$ C Pol Hor.

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m))(dBuV/m)	(dB)	
2483 50	42 49		-10 46	32 03		74.00	54 00	-21.97	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 34 of 65

(EDR Mode)

Radiated Emission:

Operation Mode TX CH Low Test Date Jun. 02, 2008 Fundamental Frequency 2402 MHz Test By Bondi Pol Temperature Ver. 25 °C 65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/n	(dB)	
2390.00	41.81		-10.76	31.05		74.00	54.00	-22.95	Peak
Operation Mode		TX C	CH Low			Test	Date	Jun. 02, 20	800
Fundamental Frequency		ncy 2402	MHz			Test	By	Bondi	
Temperatu	ire	25 ℃				Pol		Hor.	
Humidity		65 %							

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2390.00	45 13		-10 76	34 37		74.00	54 00	-19 63	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 35 of 65

Radiated Emission:

Operation Mode TX CH High Jun. 02, 2008 Test Date Fundamental Frequency 2480 MHz Test By Bondi Pol Temperature 25 °C Ver. Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2483.50	45.95		-10.46	35.49		74.00	54.00	-18.51	Peak
2496.00	44.44		-10.46	33.98		74.00	54.00	-20.02	Peak
Operation Mode		TX C	CH High			Test	t Date	Jun. 02, 20	008
Fundamental Frequency		ncy 2480	MHz			Test	t By	Bondi	
Temperature		25 ℃				Pol		Hor.	
Humidity		65 %							

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading Ant	./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV) CF	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)(dBuV/m)	(dB)	
2483.50	50.90	-10	0.46	40.44		74.00	54.00	-13.56	Peak
2496.00	47.63	-10	0.46	37.17		74.00	54.00	-16.83	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 36 of 65

9. SPURIOUS RADIATED EMISSION TEST

9.1. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host PC system was connected with 110Vac/60Hz power source.

9.3. Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008


Page: 37 of 65

9.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1GHz

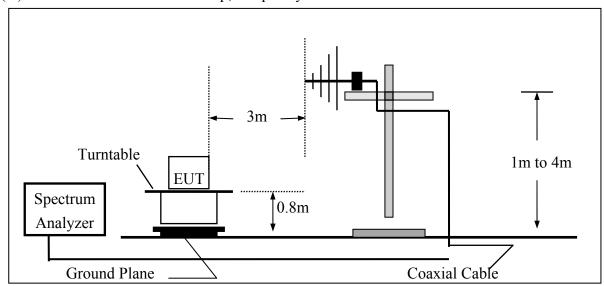

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

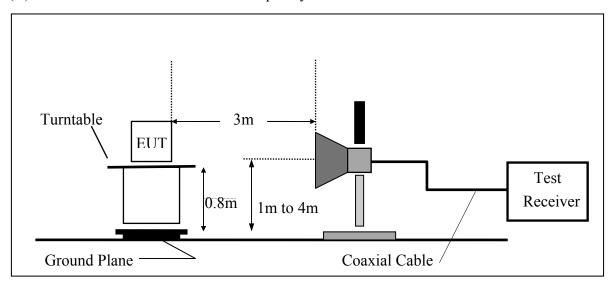

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 38 of 65

Measurement Equipment Used:

	966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009				
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2008	05/26/2009				
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008				
Bi-log Antenna	SCHWAZBECK	VULB9160	3224	11/14/2007	11/13/2008				
Horn antenna	SCHWAZBECK	BBHA 9120D	309/320	12/14/2007	12/13/2008				
Horn antenna	SCHWAZBECK	BBHA 9170	184/185	12/13/2007	12/12/2008				
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008				
Pre-Amplifier	HP	8494B	3008A00578	02/26/2008	02/25/2009				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R				
Controller	HD	HD100	N/A	N.C.R	N.C.R				
I and I am Calif	HILDED - CHILDIED	SUCOFLEX	10	10/00/2007	10/00/2000				
Low Loss Cable	HUBER+SUHNER	104PEA-10M	10m	10/09/2007	10/08/2008				
Low Loss Cohla	HUBER+SUHNER	SUCOFLEX	3m	10/00/2007	10/09/2009				
Low Loss Cable	HUBEK+SUHNEK	104PEA-3M	3m	10/09/2007	10/08/2008				
Site NSA	SGS	966 chamber	N/A	11/17/2007	11/16/2008				

9.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.7. Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention


is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 39 of 65

Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

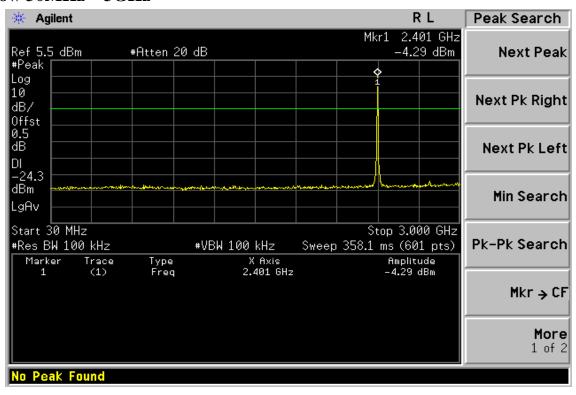

Ch Low 3GHz – 26.5GHz

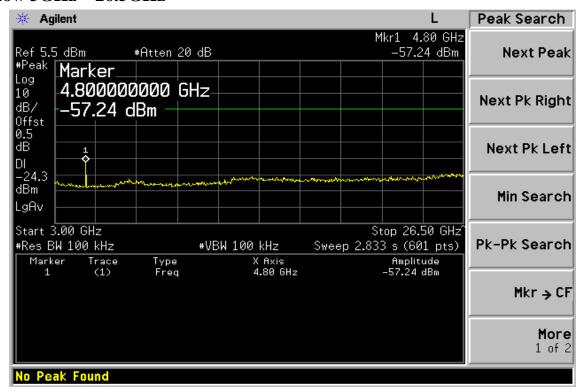


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 40 of 65

Ch Mid 30MHz - 3GHz

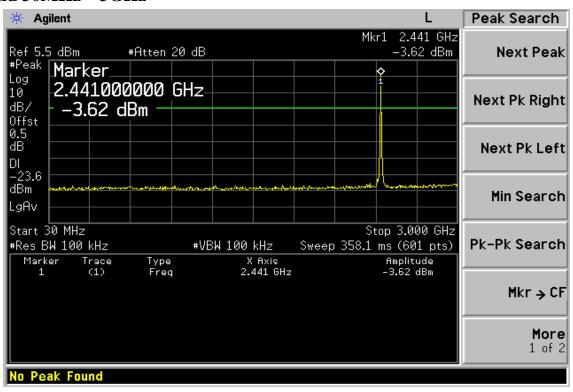

Ch Mid 3GHz – 26.5GHz

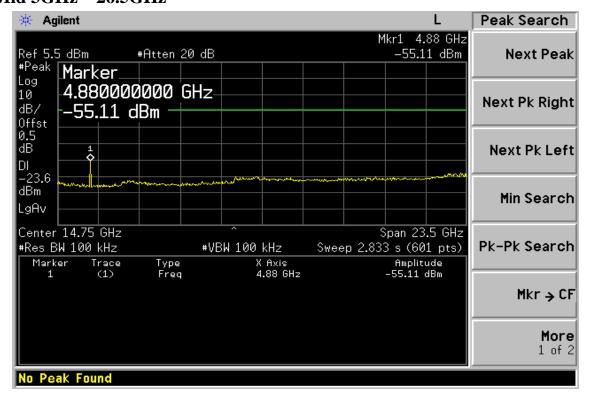


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 41 of 65

Ch High 30MHz – 3GHz

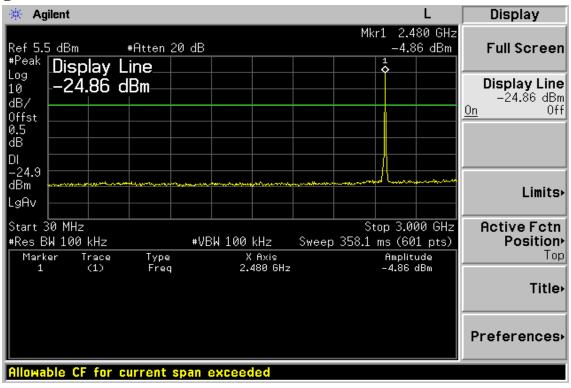

Ch High 3GHz - 26.5GHz

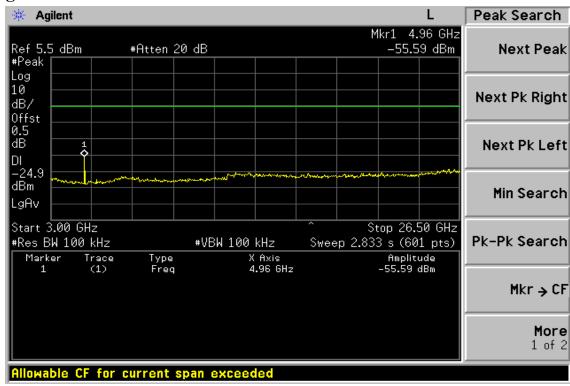

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 42 of 65

Radiated Spurious Emission Measurement Result (below 1GHz) (Normal Mode)

Operation Mode TX CH Low Test Date Jun. 02, 2008

Fundamental Frequency 2402MHz Test By Bondi Temperature 25 °C Pol Ver./Hor.

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	58.34	-26.67	31.67	40.00	-8.33
85.29	V	Peak	56.90	-30.75	26.15	40.00	-13.85
109.54	V	Peak	51.42	-29.51	21.91	43.50	-21.59
158.04	V	Peak	45.30	-26.99	18.31	43.50	-25.19
512.09	V	Peak	44.57	-24.54	20.03	46.00	-25.97
798.24	V	Peak	44.57	-20.21	24.36	46.00	-21.64
58.13	Н	Peak	49.28	-26.67	22.61	40.00	-17.39
119.24	Н	Peak	48.73	-28.89	19.84	43.50	-23.66
167.74	Н	Peak	50.17	-27.76	22.41	43.50	-21.09
216.24	Н	Peak	48.30	-30.90	17.40	46.00	-28.60
512.09	Н	Peak	43.93	-24.54	19.39	46.00	-26.61
790.48	Н	Peak	44.85	-20.26	24.59	46.00	-21.41

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 43 of 65

Radiated Spurious Emission Measurement Result (below 1GHz) (Normal Mode)

Operation Mode TX CH Mid Test Date Jun. 02, 2008 Fundamental Frequency 2441MHz Test By Bondi

Temperature 25 °C Pol Ver./Hor.

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	58.11	-26.67	31.44	40.00	-8.56
85.29	V	Peak	56.21	-30.75	25.46	40.00	-14.54
109.54	V	Peak	51.50	-29.51	21.99	43.50	-21.51
150.28	V	Peak	44.99	-26.97	18.02	43.50	-25.48
463.59	V	Peak	44.33	-25.10	19.23	46.00	-26.77
735.19	V	Peak	44.69	-20.84	23.85	46.00	-22.15
58.13	Н	Peak	48.34	-26.67	21.67	40.00	-18.33
119.24	Н	Peak	46.88	-28.89	17.99	43.50	-25.51
167.74	Н	Peak	47.58	-27.76	19.82	43.50	-23.68
313.24	Н	Peak	45.39	-28.00	17.39	46.00	-28.61
560.59	Н	Peak	44.48	-23.54	20.94	46.00	-25.06
814.64	Н	Peak	45.02	-19.97	25.05	46.00	-20.95

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 44 of 65

Radiated Spurious Emission Measurement Result (below 1GHz) (Normal Mode)

Operation Mode TX CH High Test Date Jun. 02, 2008

Fundamental Frequency 2480MHz Test By Bondi Temperature 25 °C Pol Ver./Hor.

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	57.90	-26.67	31.23	40.00	-8.77
85.29	V	Peak	55.77	-30.75	25.02	40.00	-14.98
99.84	V	Peak	51.93	-30.49	21.44	43.50	-22.06
150.28	V	Peak	45.63	-26.97	18.66	43.50	-24.84
293.84	V	Peak	44.57	-28.67	15.90	46.00	-30.10
693.48	V	Peak	44.21	-21.32	22.89	46.00	-23.11
75.59	Н	Peak	49.95	-30.23	19.72	40.00	-20.28
167.74	Н	Peak	46.69	-27.76	18.93	43.50	-24.57
313.24	Н	Peak	46.47	-28.00	18.47	46.00	-27.53
455.83	Н	Peak	43.88	-24.95	18.93	46.00	-27.07
623.64	Н	Peak	43.16	-22.37	20.79	46.00	-25.21
691.54	Н	Peak	44.48	-21.34	23.14	46.00	-22.86

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 45 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH Low Test Date Jun. 02, 2008 Fundamental Frequency 2402 MHz Test By Bondi Temperature 25 °C Pol Ver.

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4804.0	47.74		-6.01	41.73		74.00	54.00	-12.27
7206.0						74.00	54.00	
9608.0						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 46 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH Low Jun. 02, 2008 Test Date

Fundamental Frequency 2402 MHz Test By Bondi Temperature 25 °C Pol Hor.

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4804.0	48.19		-6.01	42.18		74.00	54.00	-11.82
7206.0						74.00	54.00	
9608.0						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 47 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH Mid Test Date Jun. 02, 2008

Fundamental Frequency 2441 MHz Test By Bondi Temperature 25 $^{\circ}\text{C}$ Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4882.0	48.40		-5.93	42.47		74.00	54.00	-11.53
7323.0						74.00	54.00	
9764.0						74.00	54.00	
12205.0						74.00	54.00	
14646.0						74.00	54.00	
17087.0						74.00	54.00	
19528.0						74.00	54.00	
21969.0						74.00	54.00	
24410.0						74.00	54.00	

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 48 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH Mid Jun. 02, 2008 Test Date

Fundamental Frequency 2441 MHz Test By Bondi Temperature 25 °C Pol Hor.

65 % Humidity

		\mathbf{AV}	Peak	al FS	Actu		\mathbf{AV}	Peak	
rgin	Mar	Limit	Limit	\mathbf{AV}	Peak	Ant./CL	Reading	Reading	Freq.
B)	(dE	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	CF(dB)	(dBuV)	(dBuV)	(MHz)
67	-9.6	54.00	74.00		44.33	-5.93		50.26	4882.0
		54.00	74.00						7323.0
		54.00	74.00						9764.0
		54.00	74.00						12205.0
		54.00	74.00						14646.0
		54.00	74.00						17087.0
		54.00	74.00						19528.0
		54.00	74.00						21969.0
		54.00	74.00						24410.0
		54.00 54.00 54.00 54.00 54.00	74.00 74.00 74.00 74.00 74.00						12205.0 14646.0 17087.0 19528.0 21969.0

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 49 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH High Jun. 02, 2008 Test Date

Fundamental Frequency 2480 MHz Test By Bondi Temperature 25 °C Pol Ver.

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4960.0	48.42		-5.87	42.55		74.00	54.00	-11.45
7440.0						74.00	54.00	
9920.0						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 50 of 65

Radiated Spurious Emission Measurement Result (above 1GHz) (Normal Mode)

Operation Mode TX CH High Jun. 02, 2008 Test Date

Fundamental Frequency 2480 MHz Test By Bondi Temperature 25 °C Pol Hor.

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4960.0	50.44		-5.87	44.57		74.00	54.00	-9.43
7440.0						74.00	54.00	
9920.0						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 51 of 65

10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.3. Measurement Result

Channel separation	Limit	Result
MHz	kHz	
1	>=25KHz or 2/3* 20 dB bandwidth	PASS

10.4. Measurement Equipment Used:

10. 1. Weasurement Equipment esea.						
Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009	
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008	
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2008	11/10/2009	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention


is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 52 of 65

Frequency Separation Test Data

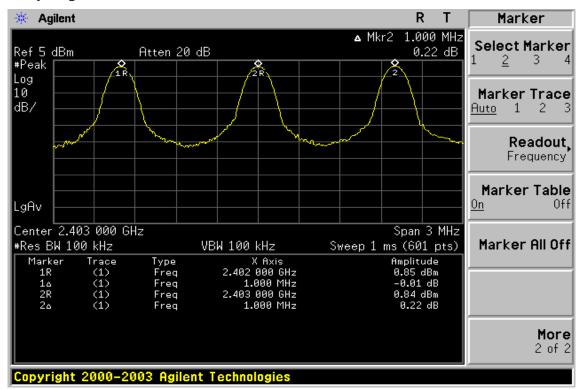

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 53 of 65

11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz,
- 5. Max hold, view and count how many channel in the band.

11.3. Measurement Result

Total No of hopping channel	Limit (CH)	Measurement result (CH)	Result
	15	79	Pass

11.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2008	11/10/2009
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008


Page: 54 of 65

Channel Number

2.4 GHz - 2.441GHz

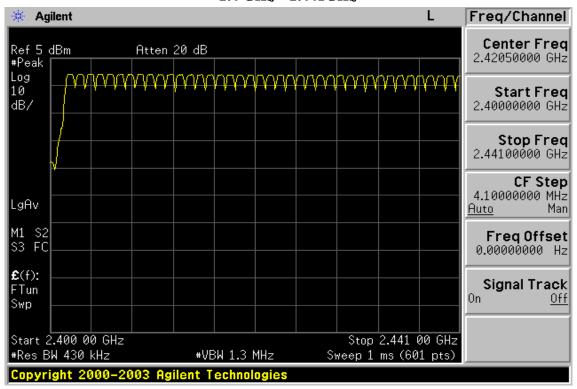

2.441 GHz - 2.4835GHz

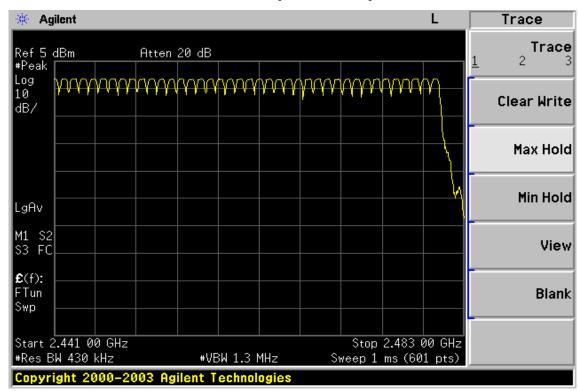

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 55 of 65

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 0Hz, Adjust Sweep = 30s.
- 5. Repeat above procedures until all frequency measured were complete.

12.3. Measurement Result

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms)

DH5 time slot = 2.925 (ms) * (1600/(5*79)) * 31.6 = 374.4 (ms)

CH Mid: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms)

DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

CH High: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.662 (ms) * (1600/(3*79)) * 31.6 = 354.5 (ms)

DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 56 of 65


12.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2008	11/10/2009
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009

Dwell Time Test Data

CH-Low

DH1

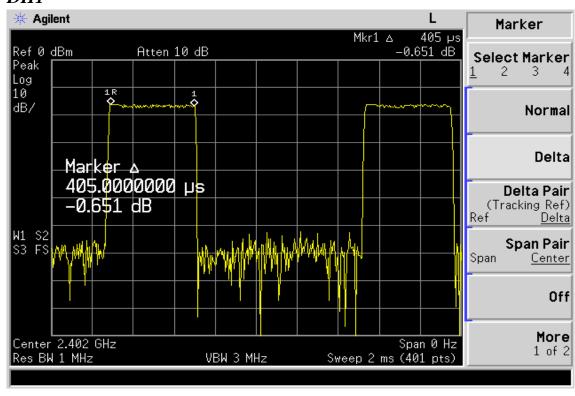


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 57 of 65

DH3

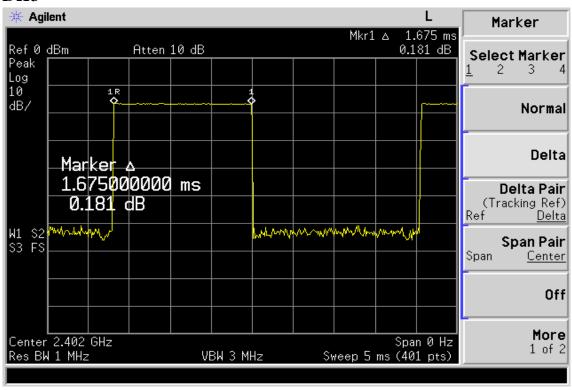

DH5

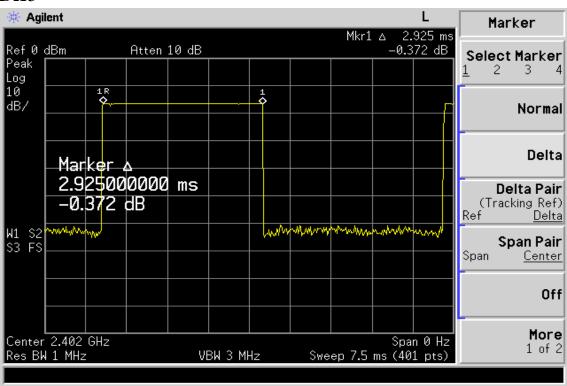

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008


Page: 58 of 65

CH-Mid

DH1

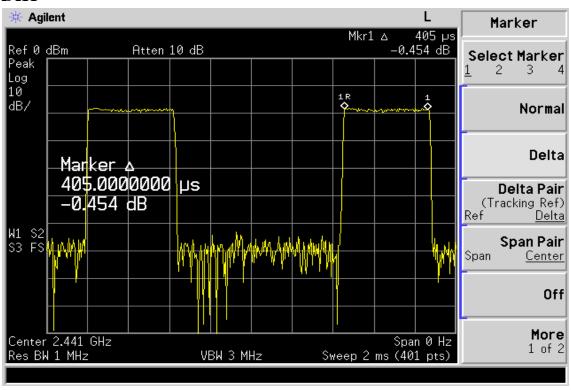

DH3

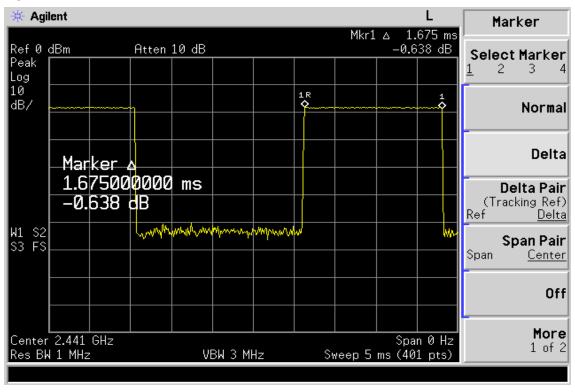


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 59 of 65

DH5

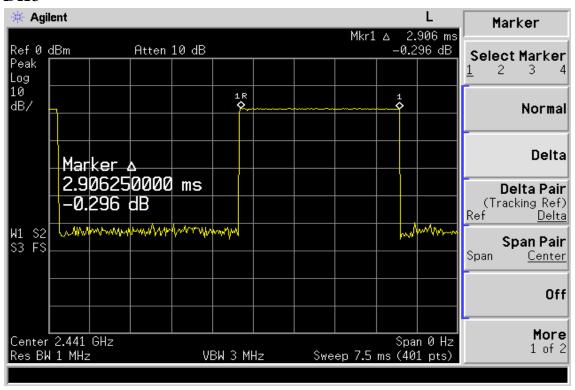

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group




Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008


Page: 60 of 65

CH-High

DH1

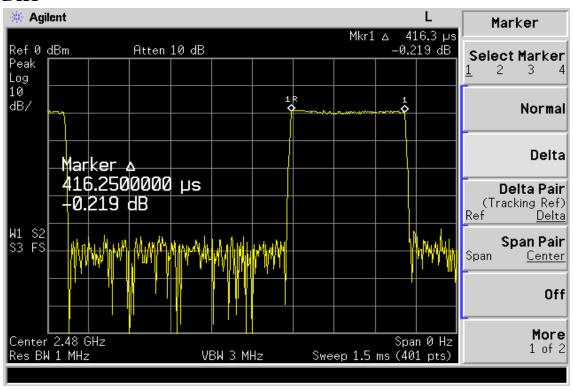

DH3

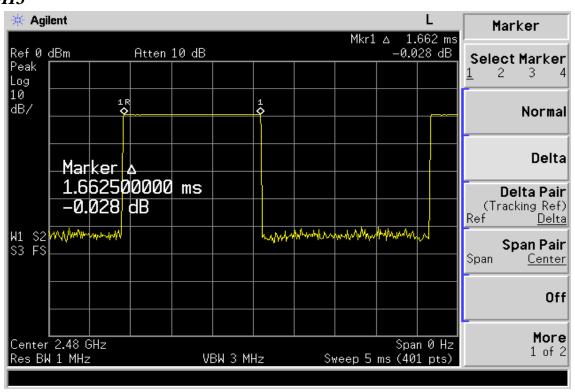


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 61 of 65

DH5

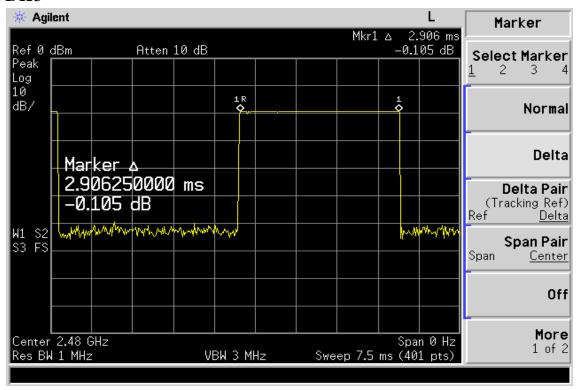

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 62 of 65

13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300KHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

13.3. Measurement Result (EDR Mode)

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-19.79	0.50	-19.29	8
Mid	-19.35	0.50	-18.85	8
High	-20.41	0.50	-19.91	8

^{*}Note: Offset 0.5dB

13.4. Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2009	
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2008	
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2008	11/10/2009	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circuit	BW-S6W5	N/A	01/05/2008	01/04/2009	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2008/50014 **Issue Date: Jun. 04, 2008**

Page: 63 of 65

Power Spectral Density Test Plot (CH-Low)

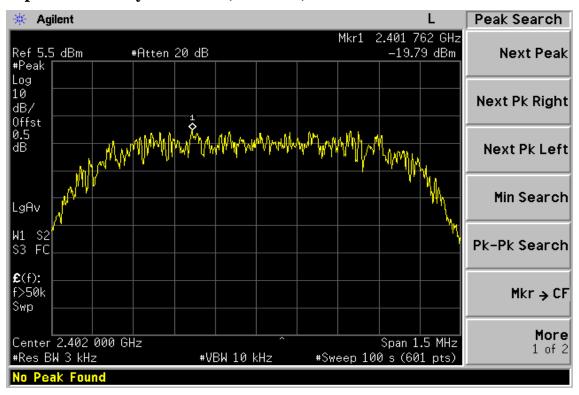

Power Spectral Density Test Plot (CH-Mid)

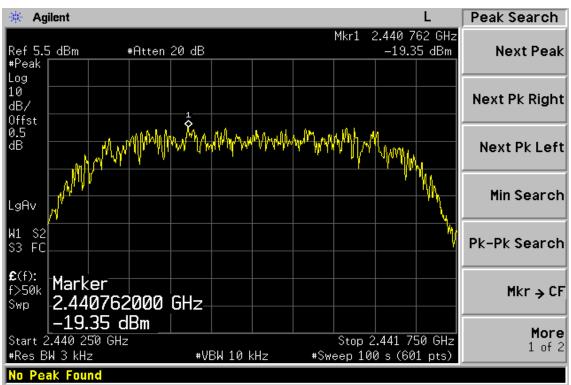

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the


Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 64 of 65

Power Spectral Density Test Plot (CH-High)

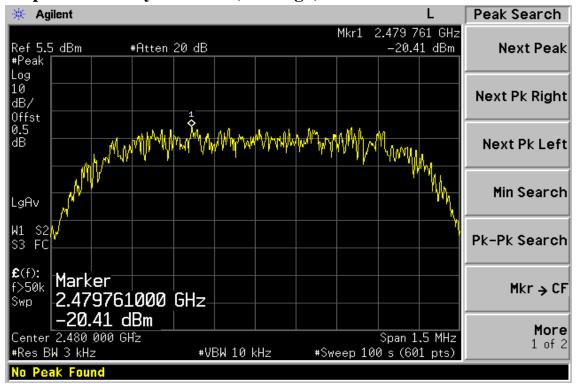

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50014 Issue Date: Jun. 04, 2008

Page: 65 of 65

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 0.5 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.