



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

PDA phone

Model: HERA110

Trade Name: N/A

Issued to

**High Tech Computer Corp.
No. 23, Xinghua Rd., Taoyuan City,
Taoyuan County 330, Taiwan**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION 3**
- 2. EUT DESCRIPTION 4**
- 3. TEST METHODOLOGY 5**
 - 3.1 EUT CONFIGURATION 5
 - 3.2 EUT EXERCISE 5
 - 3.3 GENERAL TEST PROCEDURES 5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS 6
 - 3.5 DESCRIPTION OF TEST MODES 7
- 4. INSTRUMENT CALIBRATION 8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION 8
 - 4.2 MEASUREMENT EQUIPMENT USED 8
- 5. FACILITIES AND ACCREDITATIONS 9**
 - 5.1 FACILITIES 9
 - 5.2 EQUIPMENT 9
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS 10
- 6. SETUP OF EQUIPMENT UNDER TEST 11**
 - 6.1 SETUP CONFIGURATION OF EUT 11
 - 6.2 SUPPORT EQUIPMENT 11
- 7. FCC PART 15.247 REQUIREMENTS 12**
 - CONDITION A: WLAN OPERATION 12**
 - 7.1 6DB BANDWIDTH 12
 - 7.2 PEAK POWER 16
 - 7.3 AVERAGE POWER 20
 - 7.4 BAND EDGES MEASUREMENT 24
 - 7.5 PEAK POWER SPECTRAL DENSITY 33
 - 7.6 SPURIOUS EMISSIONS 37
 - CONDITION B: BLUETOOTH OPERATION 51**
 - 7.7 PEAK POWER 51
 - 7.8 AVERAGE POWER 52
 - 7.9 BAND EDGES MEASUREMENT 53
 - 7.10 PEAK POWER SPECTRAL DENSITY 58
 - 7.11 FREQUENCY SEPARATION 61
 - 7.12 NUMBER OF HOPPING FREQUENCY 63
 - 7.13 TIME OF OCCUPANCY (DWELL TIME) 65
 - 7.14 SPURIOUS EMISSIONS 67
- 8. POWER LINE CONDUCTED EMISSIONS 76**
- APPENDIX I RADIO FREQUENCY EXPOSURE 79**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP 81**



1. TEST RESULT CERTIFICATION

Applicant: High Tech Computer Corp.
No. 23, Xinghua Rd., Taoyuan City,
Taoyuan County 330, Taiwan

Equipment Under Test: PDA phone

Trade Name: N/A

Model Number: HERA110

Date of Test: December 26 ~ 29, 2006

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | |
|-------------------------------|---|
| Product | PDA phone |
| Trade Name | N/A |
| Model Number | HERA110 |
| Model Name Discrepancy | N/A |
| Power Supply | <p>Power Adaptor</p> <ol style="list-style-type: none"> DELTA ELECTRONICS, INC. Model: ADP-5FH I/P: 100-240V, 0.2A O/P: 5V, 1A LPS PHIHONG Model: PSAA05A-050 I/P: 100-240V, 200mA, 50-60Hz, 13-20VA O/P: 5, 1A LPS <p>Rechargeable Battery:</p> <ol style="list-style-type: none"> Celxpert Model: HERA160 Rating: 3.7VDC, 1130mAh DynaPack Model: HERA160 Rating: 3.7VDC, 1130mAh |
| Accessories | <ul style="list-style-type: none"> ● Holster: NEWTECH (model name: HTC-353-1) ● Earphone: MERRY (model name: EMC220), Unshielded, 1.2m ● USB Cable: Shielded, 1.2m |
| Frequency Range | <p>WLAN: 2412 ~ 2462 MHz</p> <p>Bluetooth: 2402 MHz ~ 2480 MHz</p> |
| Transmit Power | <p>WLAN:</p> <p>IEEE 802.11b: 18.21 dBm</p> <p>IEEE 802.11g: 19.11 dBm</p> <p>Bluetooth: 0.74 dBm</p> |
| Modulation Technique | <p>WLAN: DSSS (CCK; DQPSK; DBPSK)</p> <p>Bluetooth: FHSS (GFSK)</p> |
| Number of Channels | <p>WLAN: 11 Channels</p> <p>Bluetooth: 79 Channels</p> |
| Antenna Specification | <p>WLAN: 1 dBi</p> <p>Bluetooth: 1 dBi</p> |
| Antenna Designation | <p>WLAN: Embedded WiFi Antenna</p> <p>Bluetooth: Embedded BT Antenna</p> |

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **NM8HERA** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: HERA110) comes with two power adaptors, two rechargeable batteries, one headset and one splitter for sale. After the preliminary test, the EUT with power adaptor (Model: ADP-5FH) and rechargeable battery (HERA160) were found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed. The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode with charging only.

Condition A (WLAN operation):

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 22Mbps data rate were chosen for the final testing.

IEEE802.11g: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for the final testing.

Condition B (Bluetooth operation):

Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) were chosen for final testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 01/18/2007 |
| Power Meter | Agilent | E4416A | GB41291611 | 05/24/2007 |
| Power Sensor | Agilent | E9327A | US40441097 | 05/24/2007 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|-----------------|-------------------|----------------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 08/02/2007 |
| Test Receiver | Rohde&Schwarz | ESCI | 100064 | 11/13/2007 |
| Switch Controller | TRC | Switch Controller | SC94050010 | 05/05/2007 |
| 4 Port Switch | TRC | 4 Port Switch | SC94050020 | 05/05/2007 |
| Horn-Antenna | TRC | HA-0502 | 06 | 06/06/2007 |
| Horn-Antenna | TRC | HA-0801 | 04 | 05/05/2007 |
| Horn-Antenna | TRC | HA-1201A | 01 | 07/10/2007 |
| Horn-Antenna | TRC | HA-1301A | 01 | 07/18/2007 |
| Bilog- Antenna | Sunol Sciences | JB3 | A030205 | 03/09/2007 |
| Turn Table | Max-Full | MFT-120S | T120S940302 | N.C.R. |
| Antenna Tower | Max-Full | MFA-430 | A440940302 | N.C.R. |
| Controller | Max-Full | MF-CM886 | CC-C-1F-13 | N.C.R. |
| Site NSA | CCS | N/A | FCC: 965860 IC: IC 6106 | 09/25/2008 |
| Test S/W | LABVIEW (V 6.1) | | | |

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

| Powerline Conducted Emissions Test Site | | | | |
|---|--------------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| EMI TEST RECEIVER 9kHz-30MHz | ROHDE & SCHWARZ | ESHS30 | 828144/003 | 10/31/2007 |
| TWO-LINE V-NETWORK 9kHz-30MHz | SCHAFFNER | NNB41 | 03/10013 | 06/14/2007 |
| LISN 10kHz-100MHz | EMCO | 3825/2 | 9106-1809 | 03/20/2007 |
| Test S/W | LABVIEW (V 6.1) | | | |

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILTIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|---|
| USA | A2LA | EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001 |  0824-01 |
| USA | FCC | 3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements |  93105, 90471 965860 |
| Japan | VCCI | 3/10 meter Open Area Test Sites to perform conducted/radiated measurements |  R-393/1066/725/879 C-402/747/912 |
| Norway | NEMKO | EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2 |  ELA 124a ELA 124b ELA 124c |
| Taiwan | TAF | EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3 |  |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 |  SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014 |
| Canada | Industry Canada | 3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1 |  IC 3991-3 IC 3991-4 IC 6106 |

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|--|---------|--------------|--------------|-------------------|------------|------------------|
| 1. | Bluetooth Headset (Remote) | COREGA | CG-BTHS01-10 | CG-BTHS01-10 | 10T90020500124 | N/A | N/A |
| 2. | Wireless Communication Test Set (Remote) | Agilent | E5515C | GB44051665 | FCC DOC | N/A | N/A |
| 3. | Wireless Pre-N Router (Remote) | BELKIN | F5D8230-4 | N/A | SA3-AGNO901APO100 | N/A | Unshielded, 1.8m |

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.247 REQUIREMENTS


CONDITION A: WLAN OPERATION

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Test Result |
|---------|-----------------|-----------------|-------------|-------------|
| Low | 2412 | 12875 | >500 | PASS |
| Mid | 2437 | 12875 | | PASS |
| High | 2462 | 13375 | | PASS |


IEEE 802.11g

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Test Result |
|---------|-----------------|-----------------|-------------|-------------|
| Low | 2412 | 16570 | >500 | PASS |
| Mid | 2437 | 16483 | | PASS |
| High | 2462 | 16570 | | PASS |




Test Plot

6dB Bandwidth (IEEE 802.11b / CH Low)

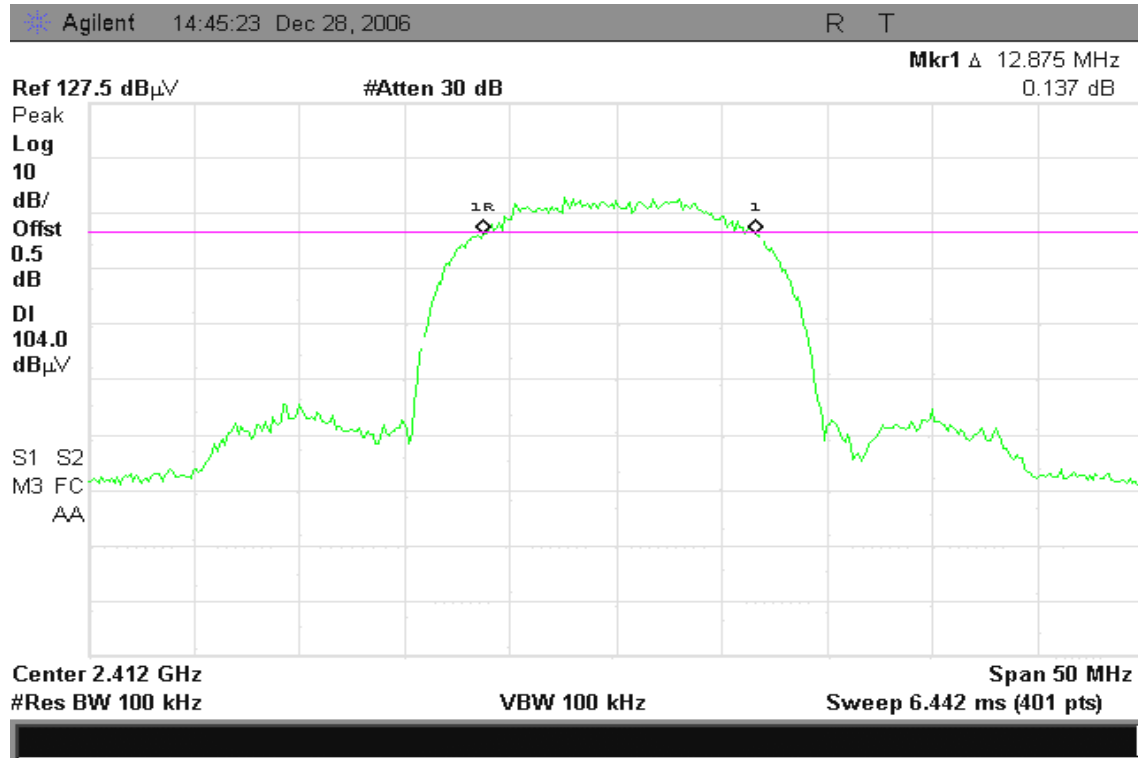


6dB Bandwidth (IEEE 802.11b / CH Mid)

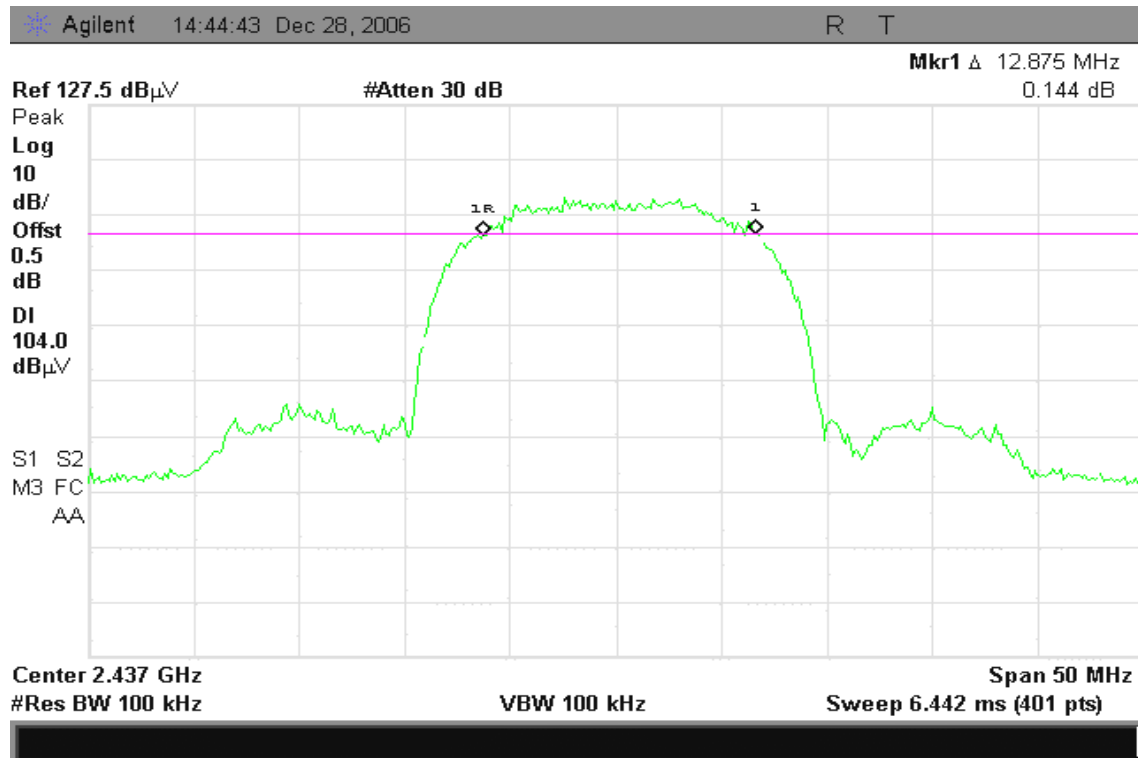




6dB Bandwidth (IEEE 802.11b / CH High)

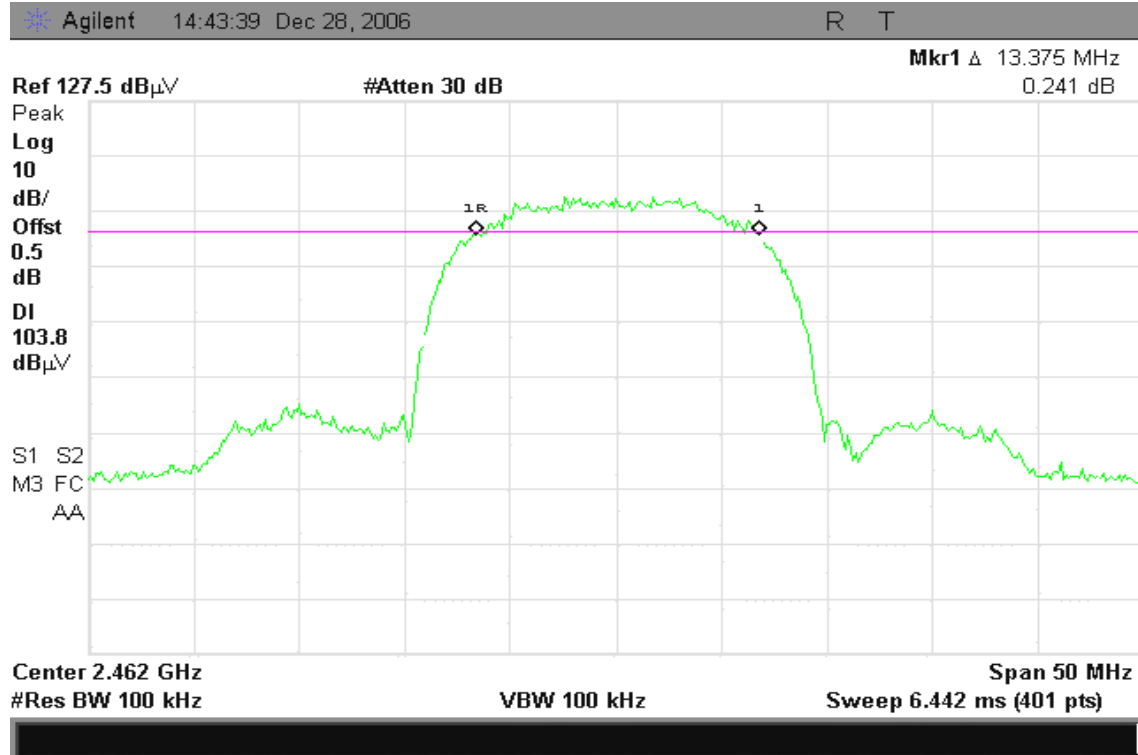


6dB Bandwidth (IEEE 802.11g / CH Low)

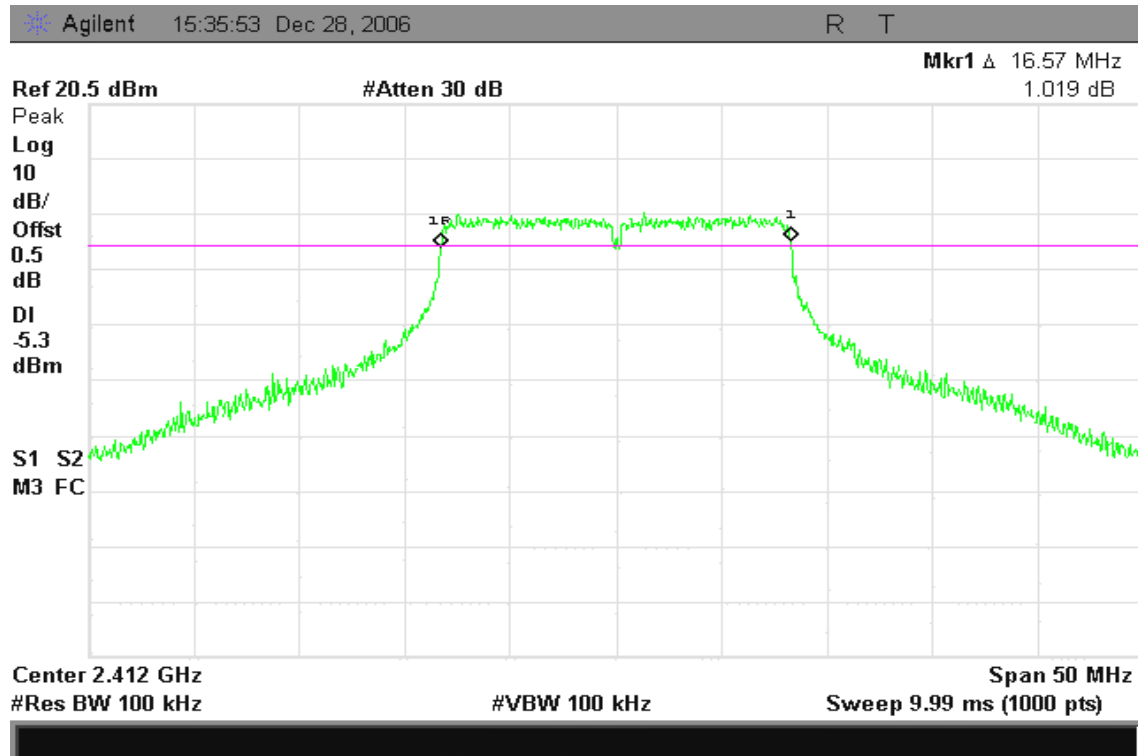




6dB Bandwidth (IEEE 802.11g / CH Mid)

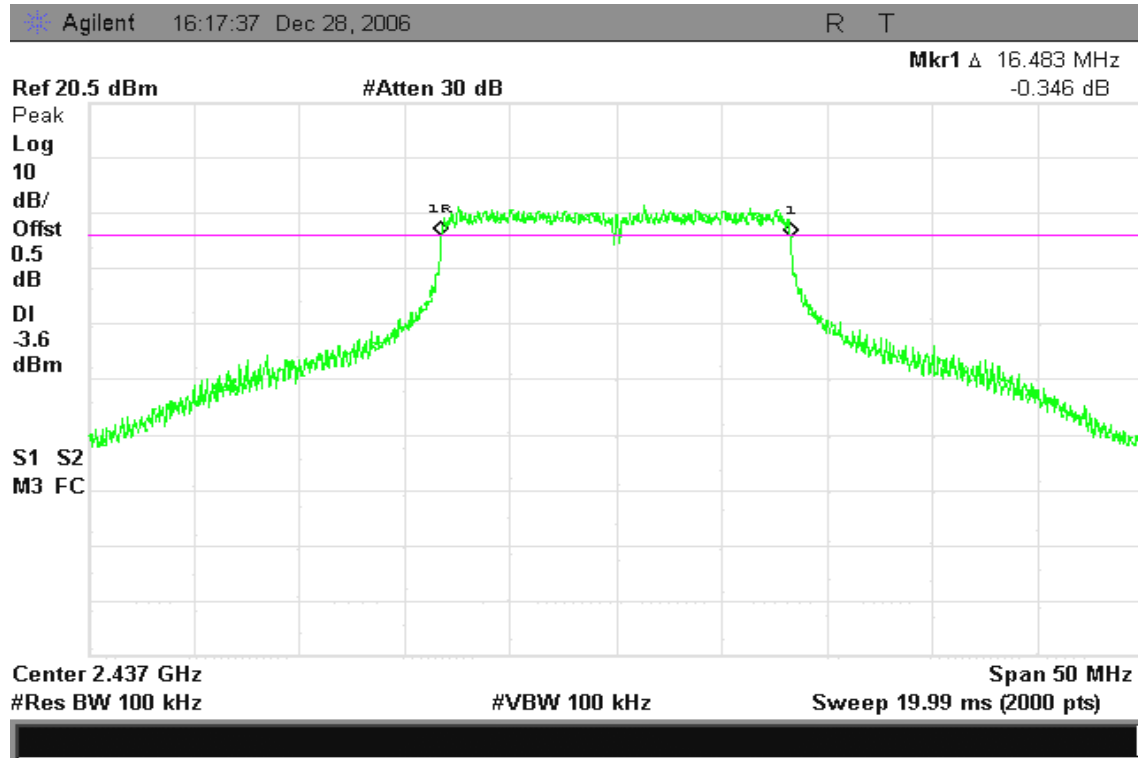

6dB Bandwidth (IEEE 802.11g / CH High)

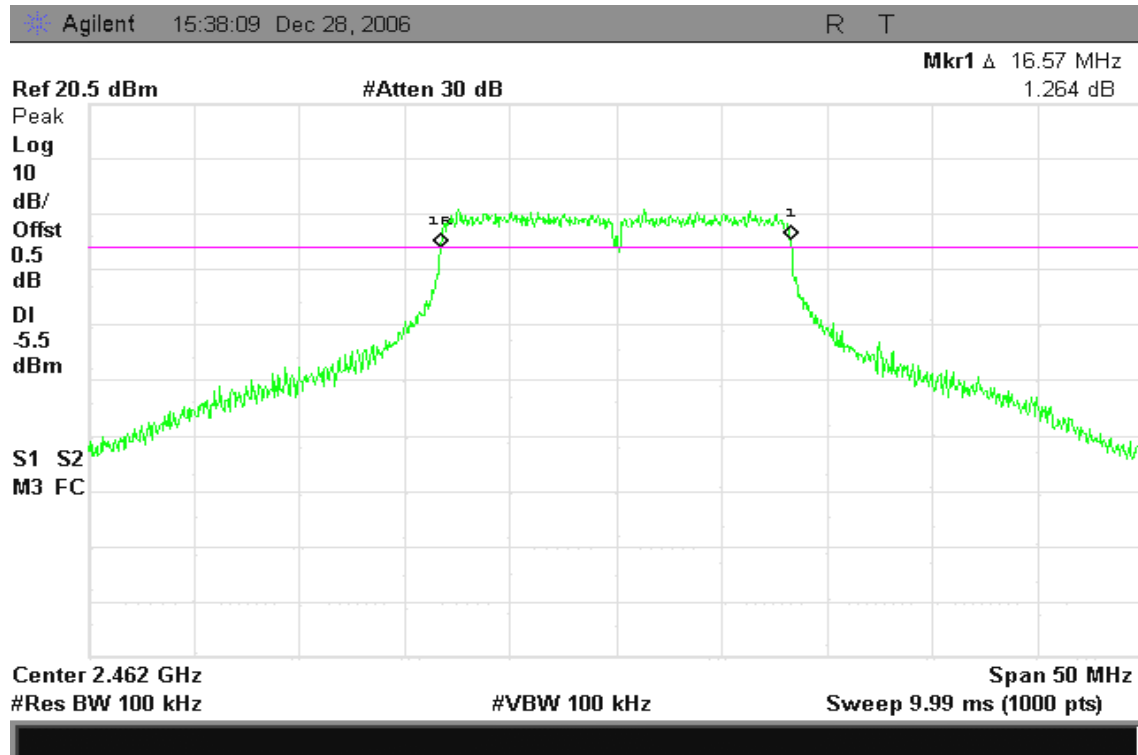




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|-----------|-------------|
| Low | 2412 | 17.05 | 0.05070 | 1 | PASS |
| Mid | 2437 | 18.21 | 0.06622 | | PASS |
| High | 2462 | 18.03 | 0.06353 | | PASS |


IEEE 802.11g

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|-----------|-------------|
| Low | 2412 | 18.60 | 0.07244 | 1 | PASS |
| Mid | 2437 | 18.77 | 0.07534 | | PASS |
| High | 2462 | 19.11 | 0.08147 | | PASS |




Test Plot

Peak Power (IEEE 802.11b / CH Low)

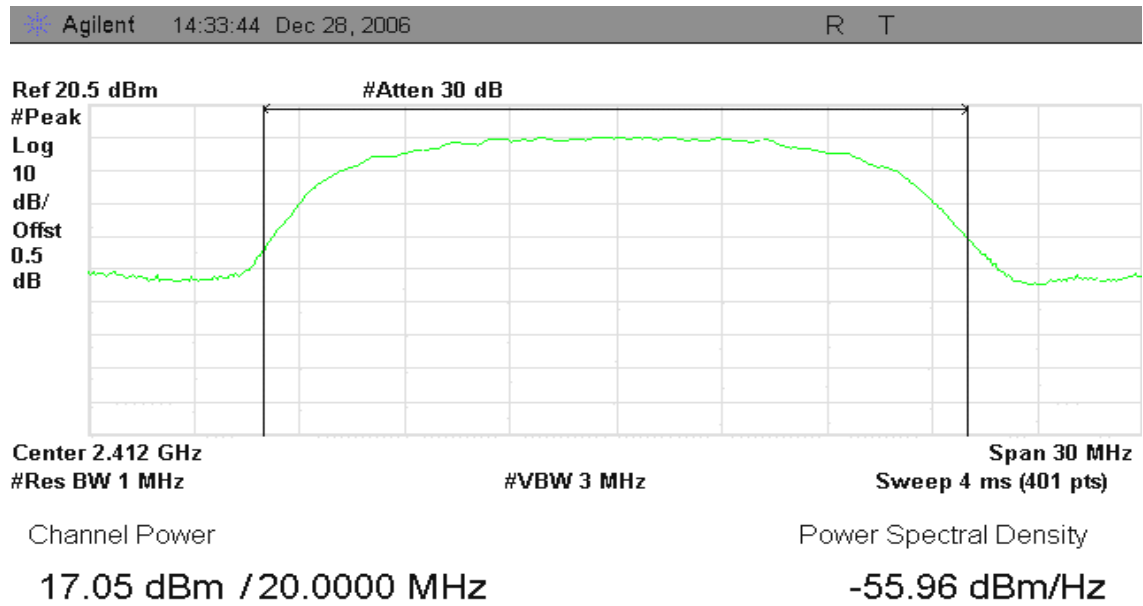


Peak Power (IEEE 802.11b / CH Mid)

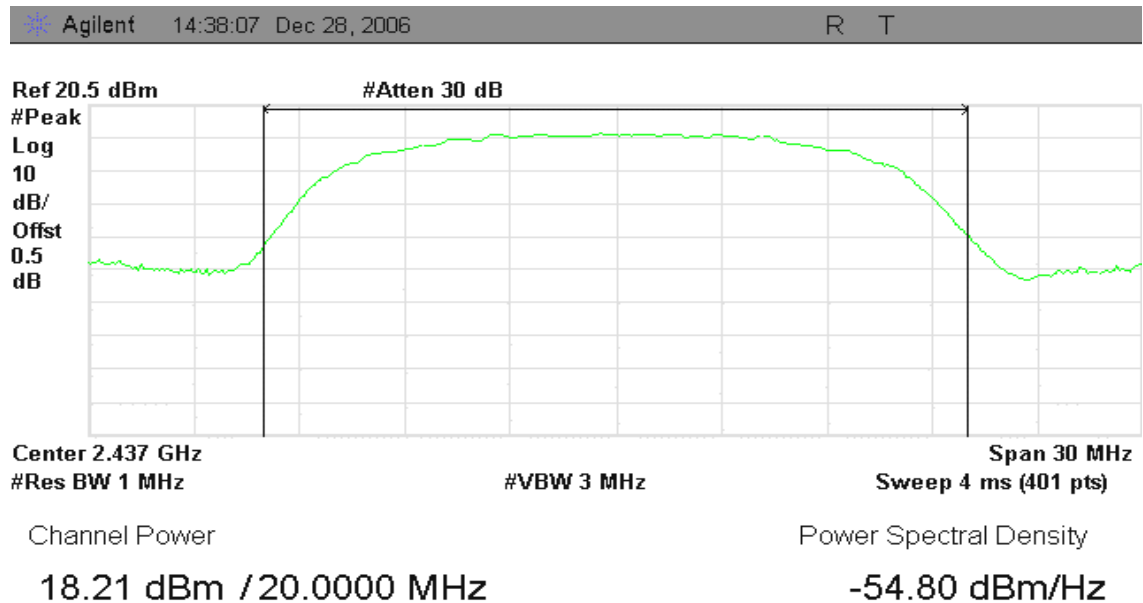



Peak Power (IEEE 802.11b / CH High)

Agilent 14:37:22 Dec 28, 2006 R T

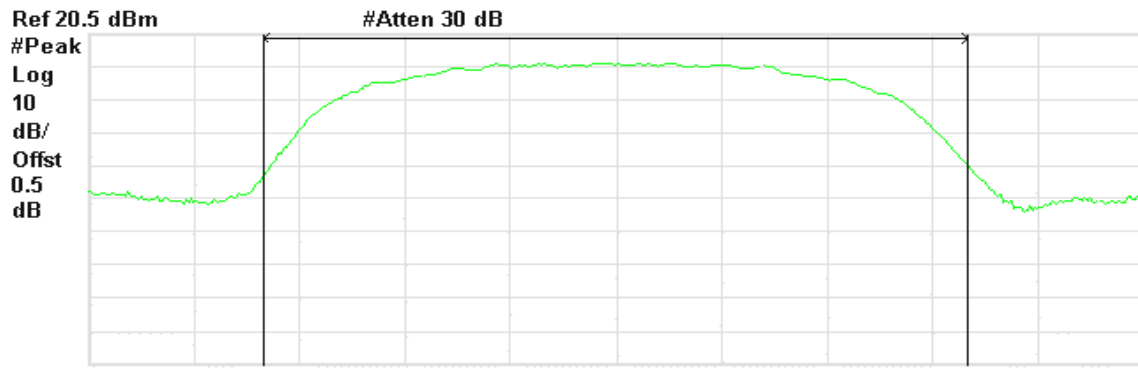

Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Span 30 MHz

Channel Power


18.03 dBm / 20.0000 MHz

Power Spectral Density

-54.98 dBm/Hz

Peak Power (IEEE 802.11g / CH Low)

Agilent 15:22:01 Dec 28, 2006 R T

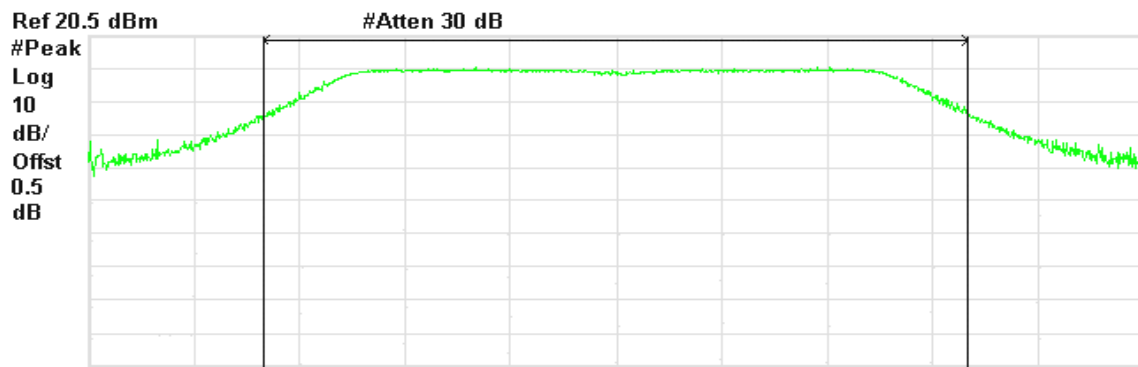

Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 9.99 ms (1000 pts) Span 30 MHz

Channel Power

18.60 dBm / 20.0000 MHz


Power Spectral Density

-54.41 dBm/Hz



Peak Power (IEEE 802.11g / CH Mid)

Agilent 15:21:22 Dec 28, 2006 R T

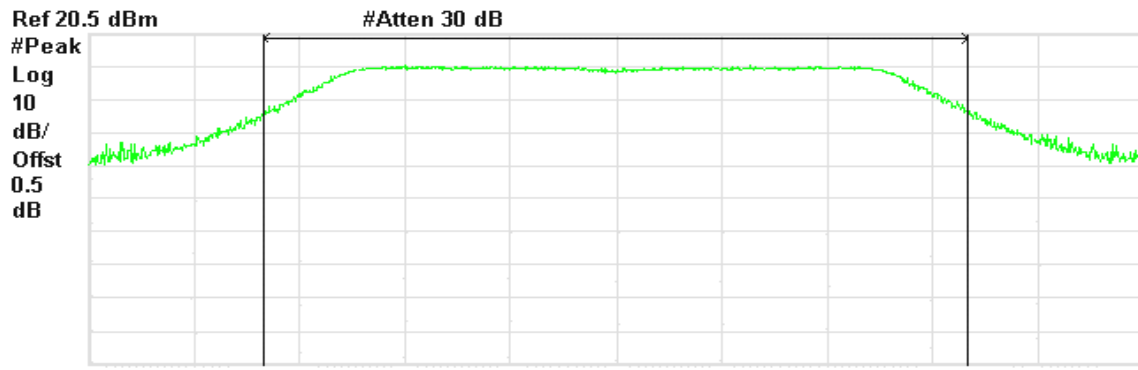

Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 9.99 ms (1000 pts) Span 30 MHz

Channel Power


18.77 dBm / 20.0000 MHz

Power Spectral Density

-54.24 dBm/Hz

Peak Power (IEEE 802.11g / CH High)

Agilent 15:23:12 Dec 28, 2006 R T

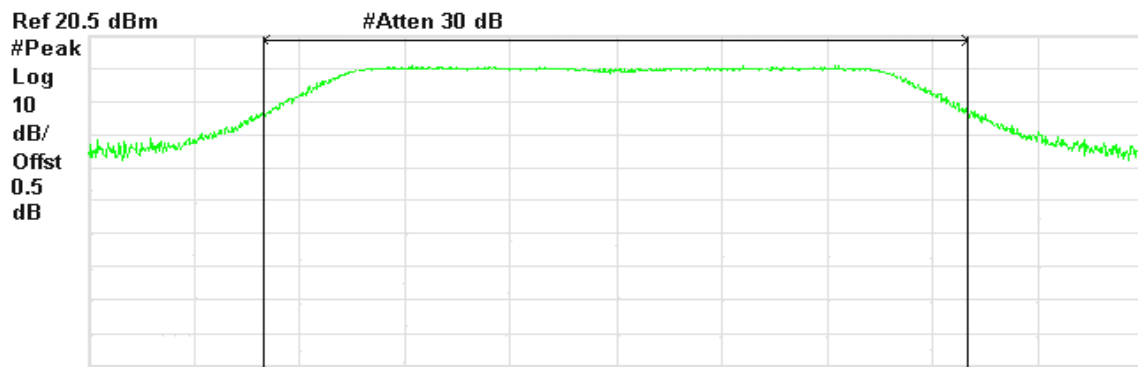

Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 9.99 ms (1000 pts) Span 30 MHz

Channel Power

19.11 dBm / 20.0000 MHz

Power Spectral Density

-54.01 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2412 | 12.74 | 0.01879 |
| Mid | 2437 | 12.94 | 0.01968 |
| High | 2462 | 12.45 | 0.01758 |


Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2412 | 14.81 | 0.03027 |
| Mid | 2437 | 14.83 | 0.03041 |
| High | 2462 | 15.01 | 0.03170 |




Test Plot

Average Power (IEEE 802.11b / CH Low)

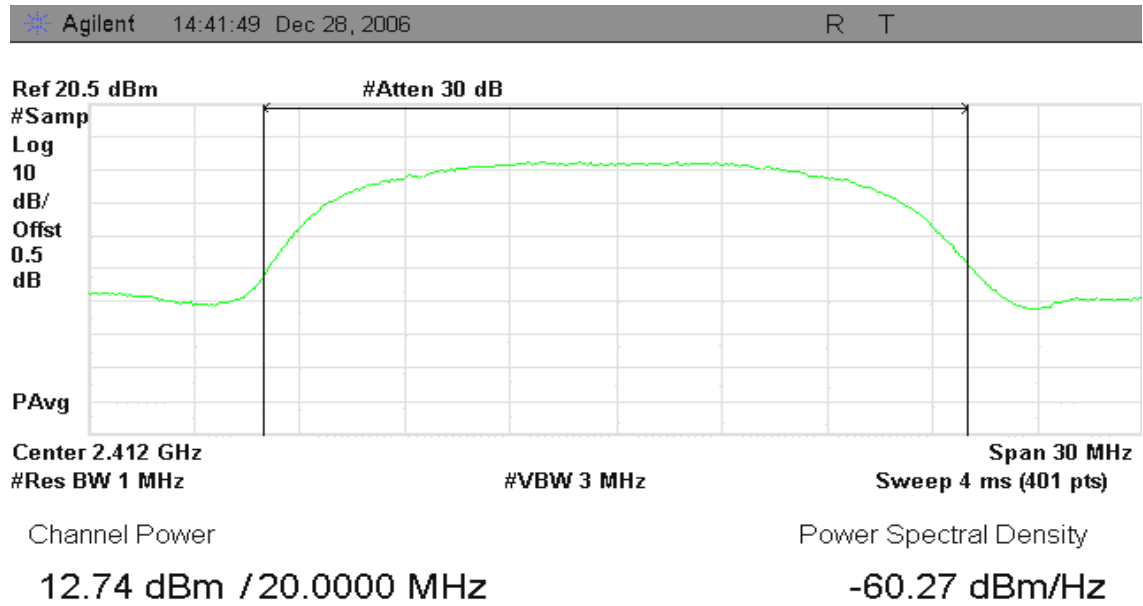


Average Power (IEEE 802.11b / CH Mid)

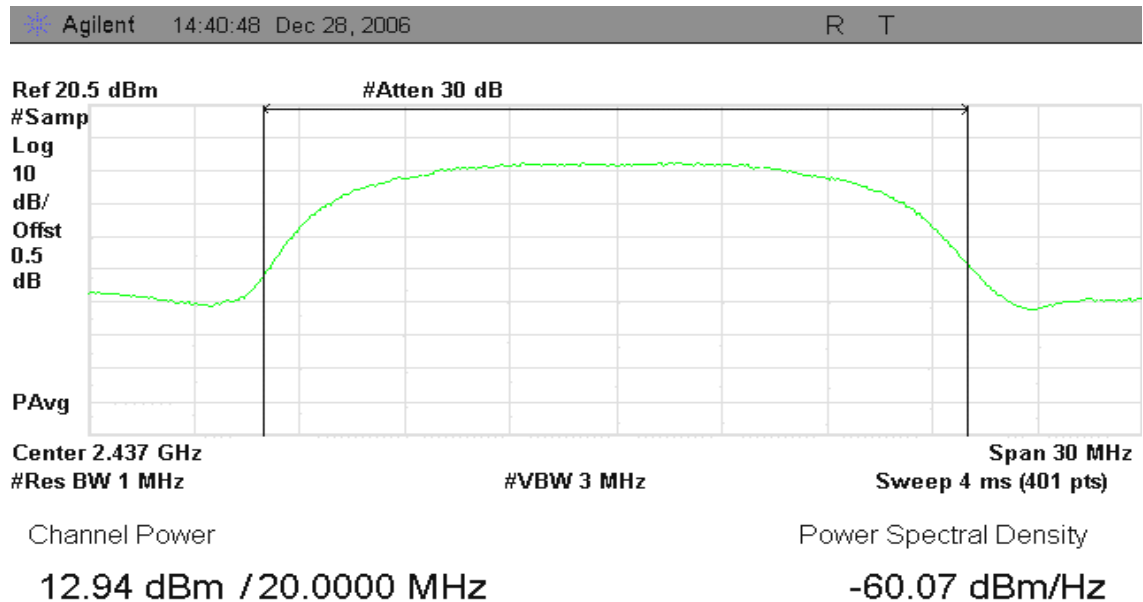



Average Power (IEEE 802.11b / CH High)

Agilent 14:42:13 Dec 28, 2006 R T

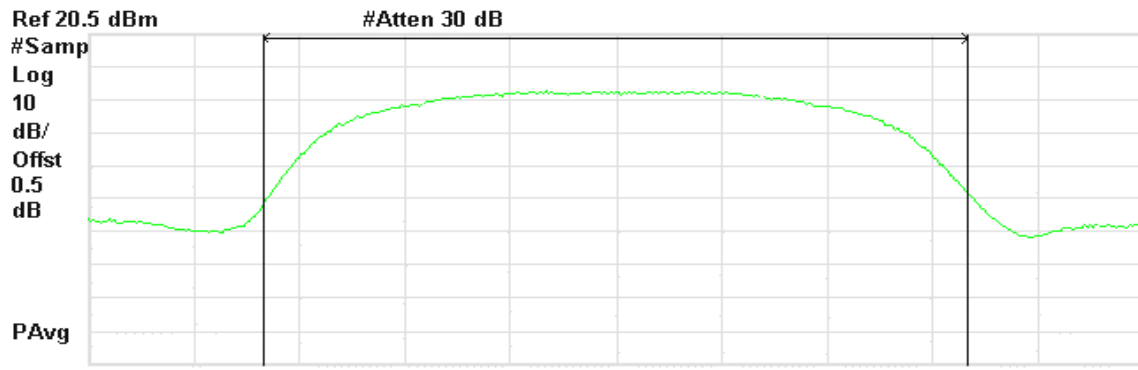

Center 2.462 GHz Span 30 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power


12.45 dBm / 20.0000 MHz

Power Spectral Density

-59.87 dBm/Hz

Average Power (IEEE 802.11g / CH Low)

Agilent 17:18:54 Dec 28, 2006 R T

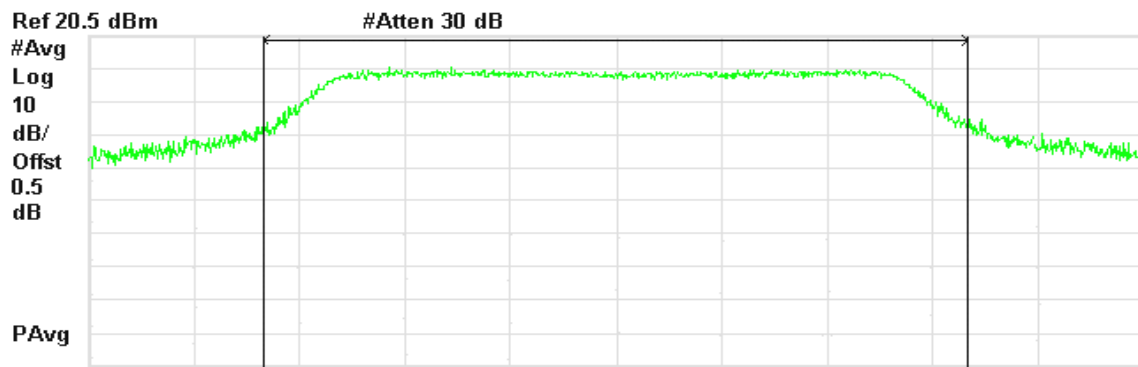

Center 2.412 GHz Span 30 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 19.98 ms (1000 pts)

Channel Power

14.81 dBm / 20.0000 MHz


Power Spectral Density

-58.20 dBm/Hz



Average Power (IEEE 802.11g / CH Mid)

Agilent 17:18:22 Dec 28, 2006 R T

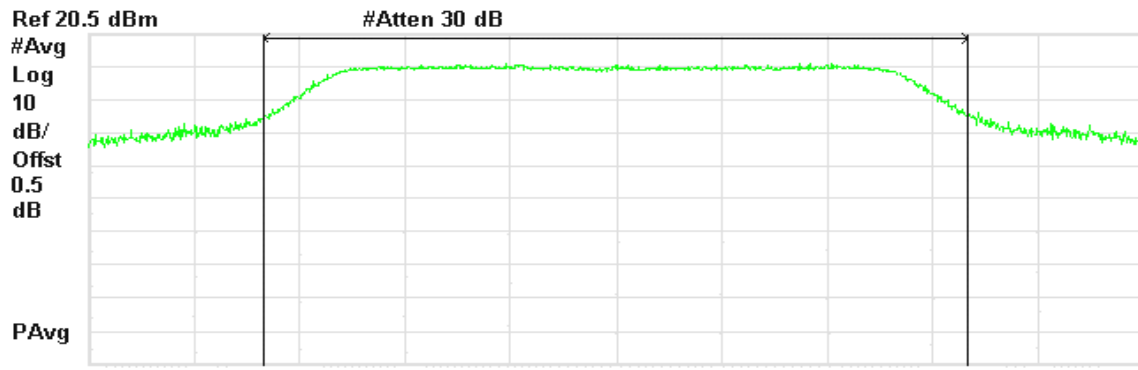

Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 19.98 ms (1000 pts) Span 30 MHz

Channel Power


14.83 dBm / 20.0000 MHz

Power Spectral Density

-58.18 dBm/Hz

Average Power (IEEE 802.11g / CH High)

Agilent 17:19:31 Dec 28, 2006 R T

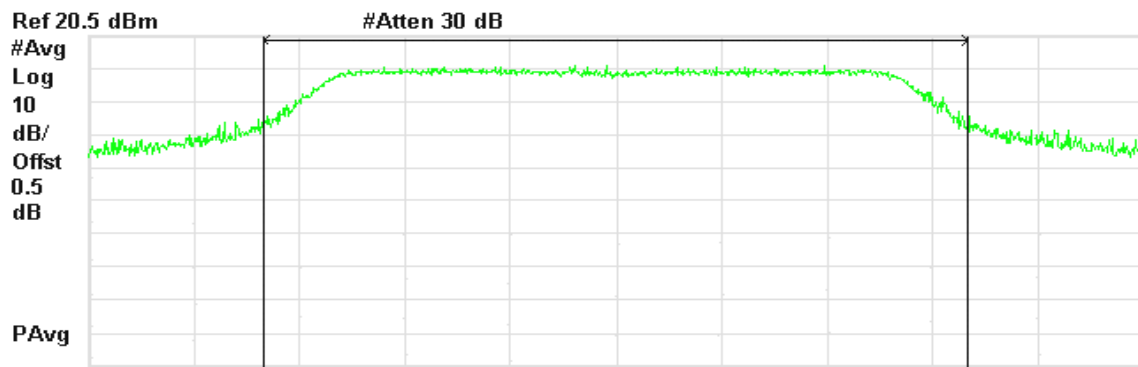

Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 19.98 ms (1000 pts) Span 30 MHz

Channel Power

15.01 dBm / 20.0000 MHz

Power Spectral Density


-58.00 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

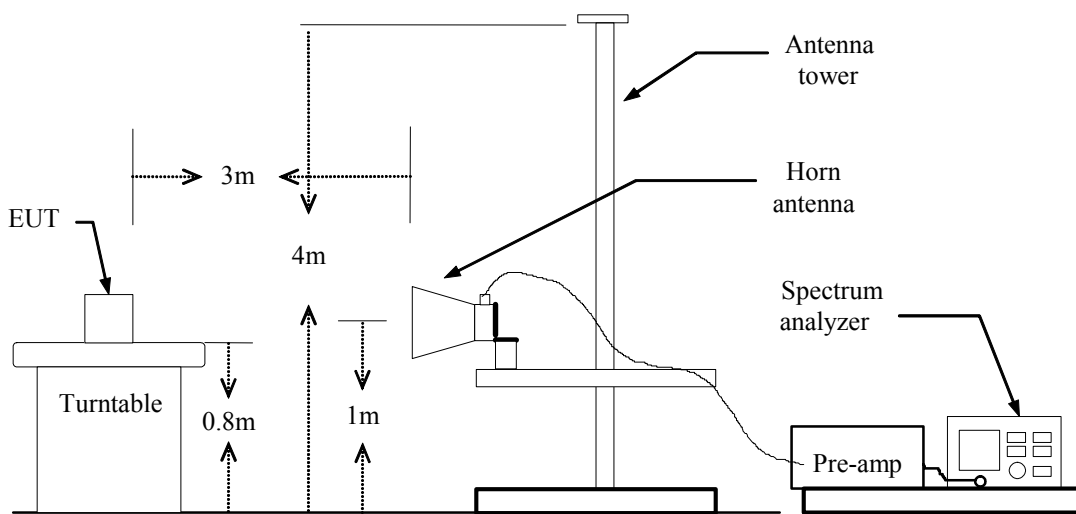

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 16:29:58 Dec 26, 2006

R T

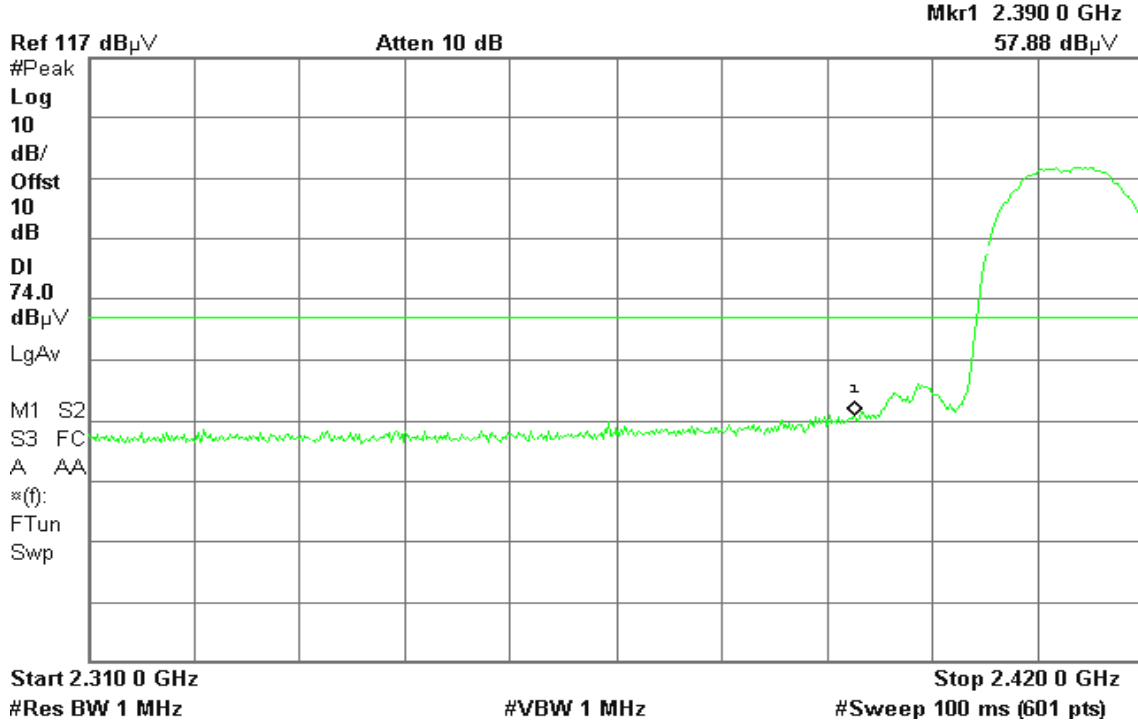


Detector mode: Average

Polarity: Vertical

Agilent 16:29:28 Dec 26, 2006

R T

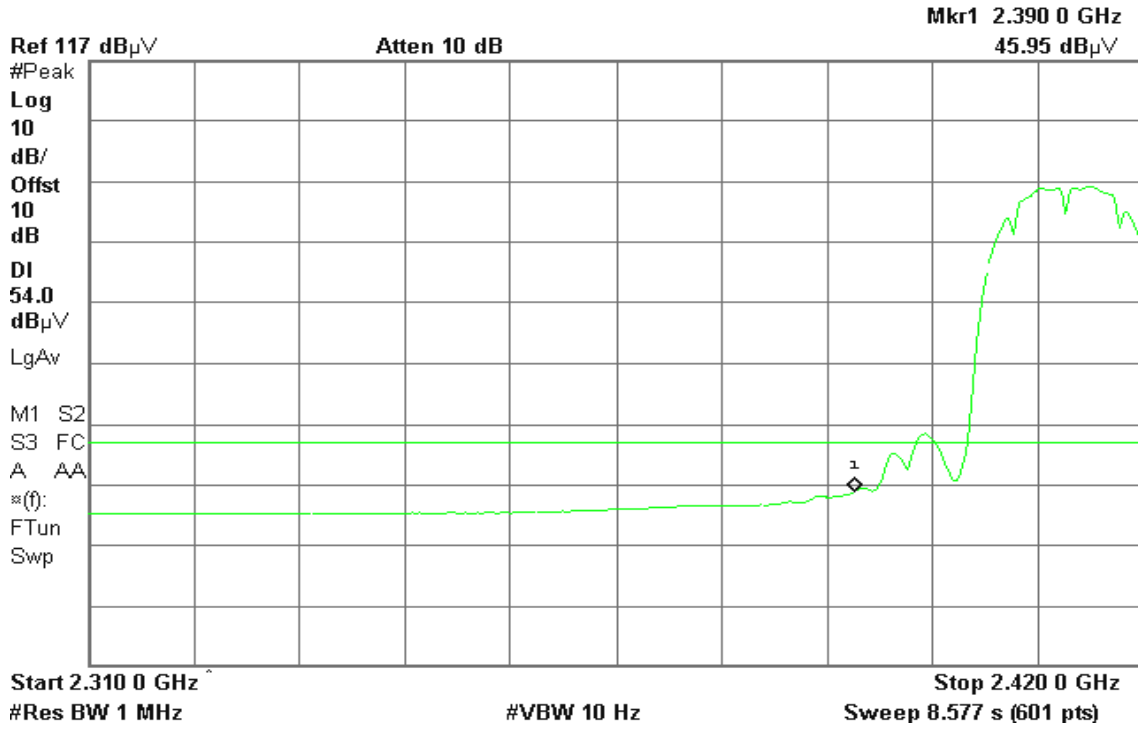




Detector mode: Peak

Polarity: Horizontal

Agilent 16:24:17 Dec 26, 2006

R T

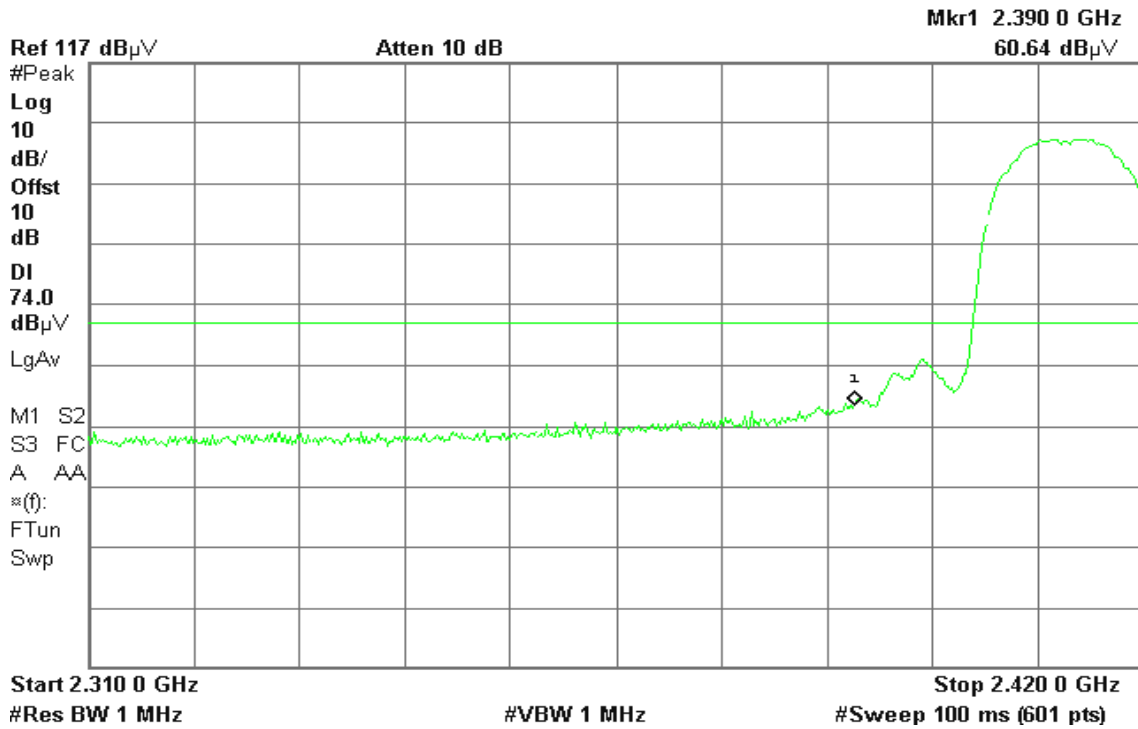


Detector mode: Average

Polarity: Horizontal

Agilent 16:23:59 Dec 26, 2006

R T

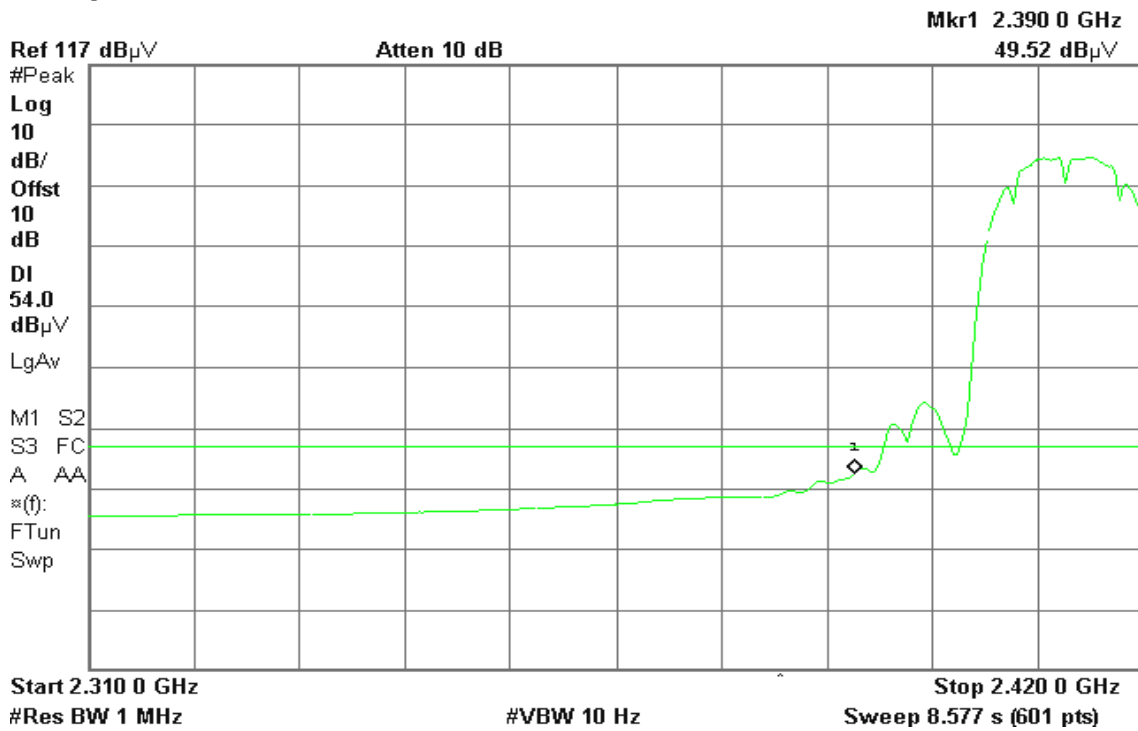



Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:35:17 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
56.94 dB μ V

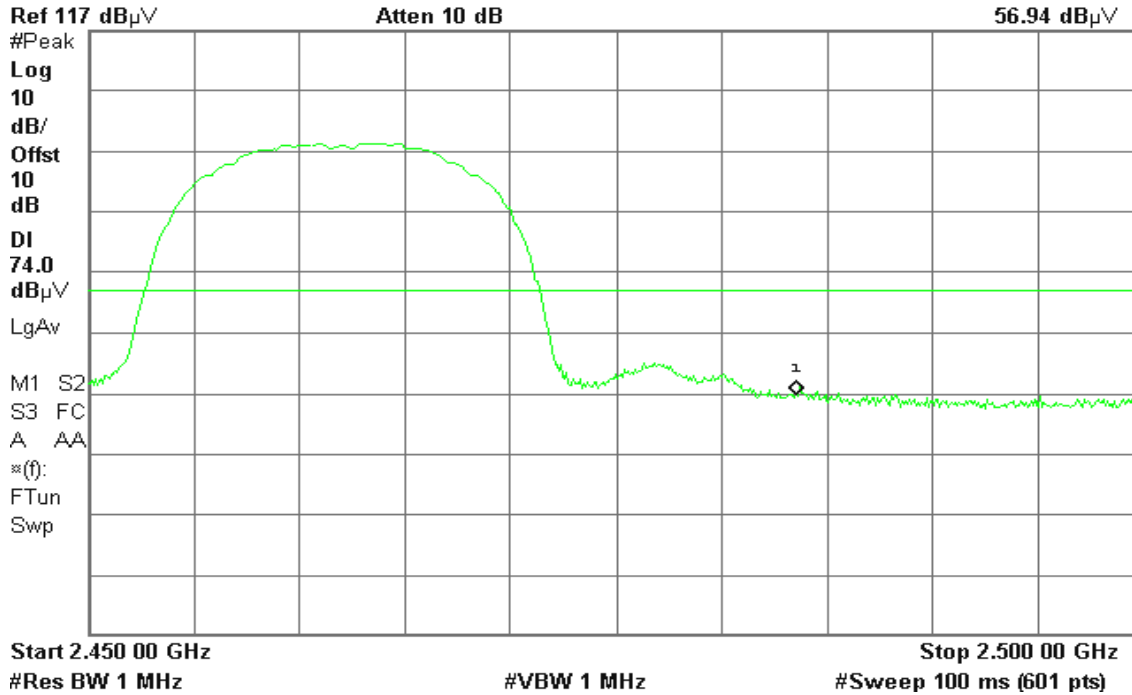


Detector mode: Average

Polarity: Vertical

Agilent 16:34:57 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
45.38 dB μ V

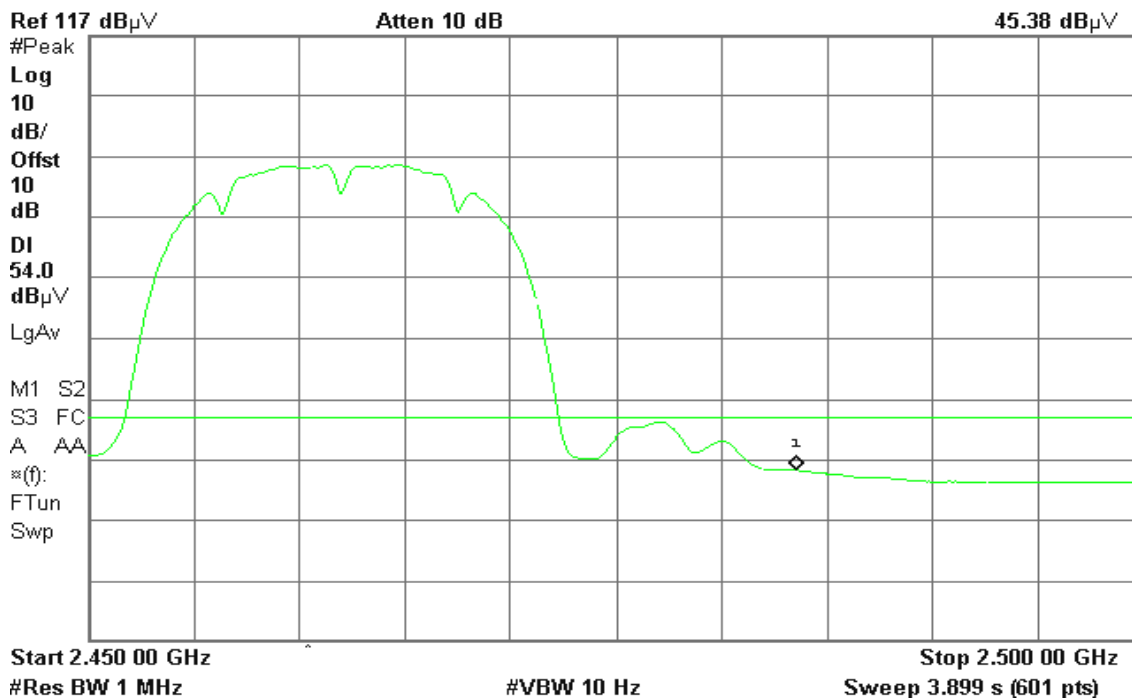




Detector mode: Peak

Polarity: Horizontal

Agilent 16:39:19 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
61.29 dB μ V

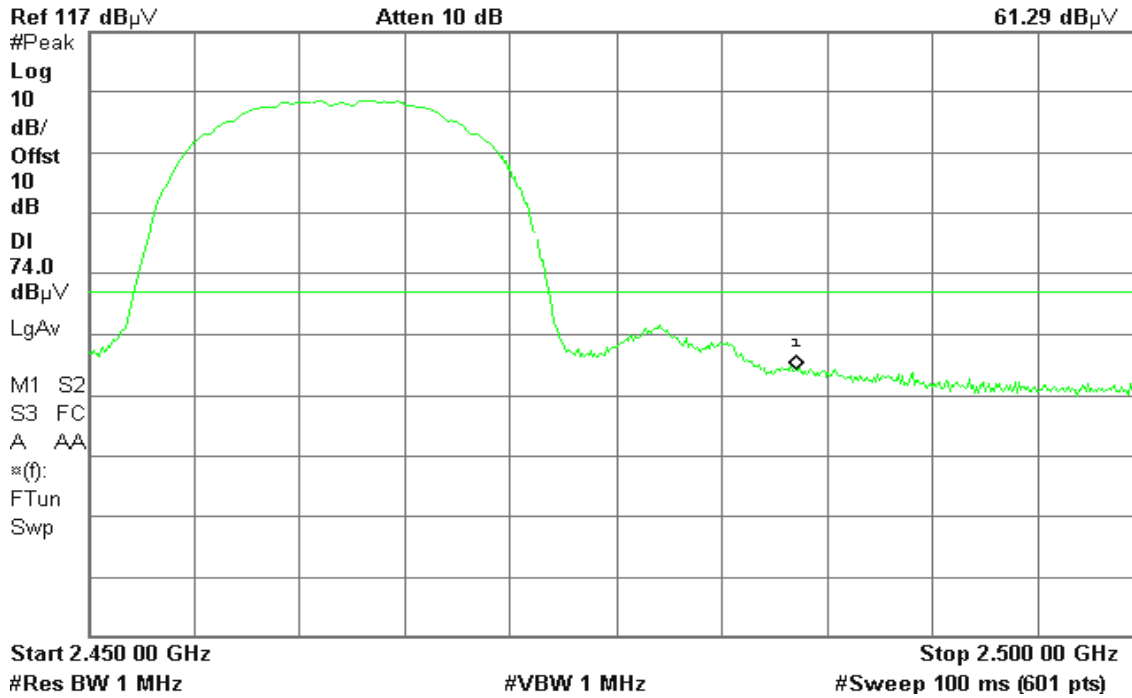


Detector mode: Average

Polarity: Horizontal

Agilent 16:39:00 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
50.69 dB μ V

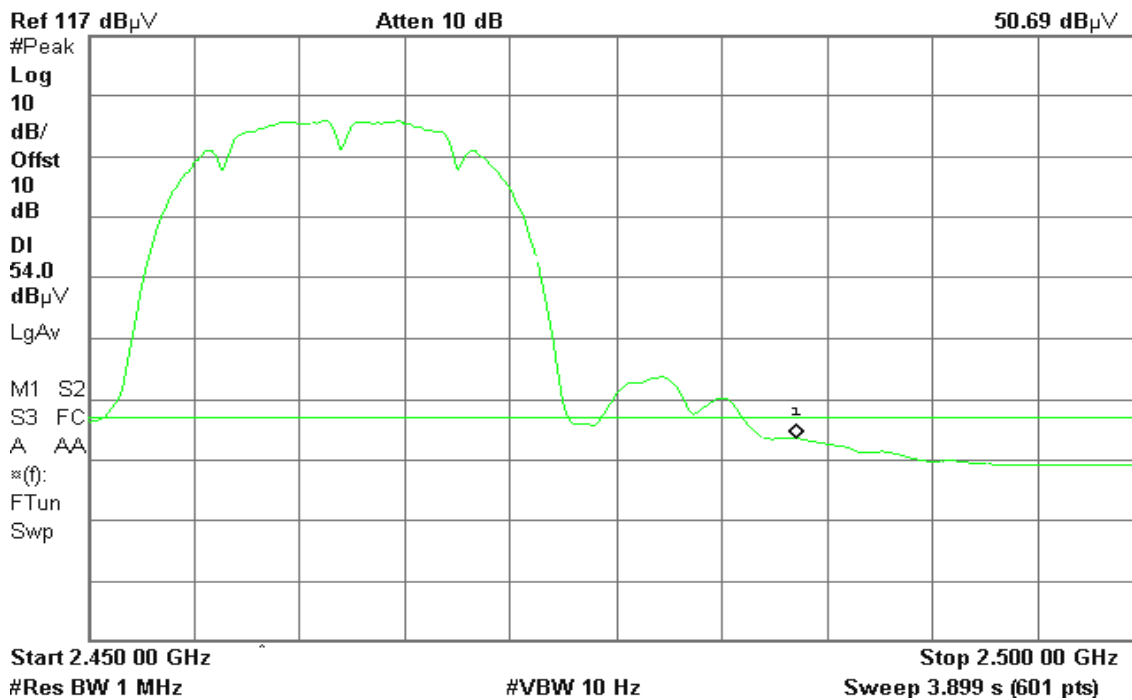




Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:07:28 Dec 26, 2006

R T

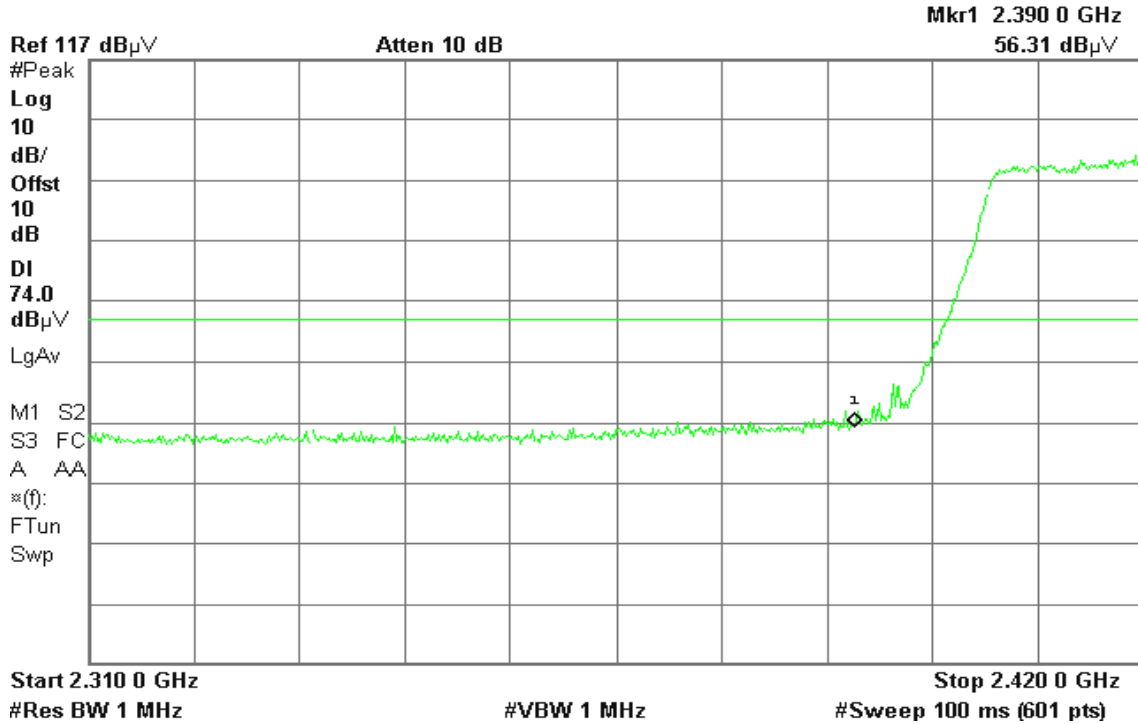


Detector mode: Average

Polarity: Vertical

Agilent 17:07:07 Dec 26, 2006

R T

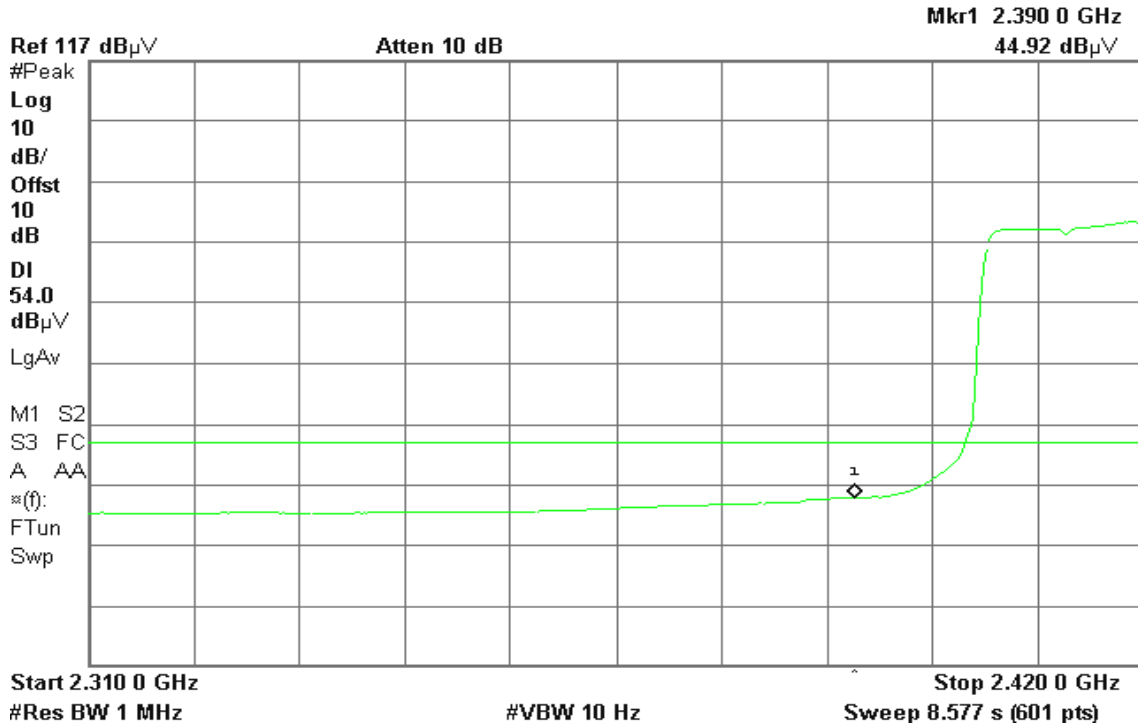




Detector mode: Peak

Polarity: Horizontal

Agilent 17:11:09 Dec 26, 2006

R T

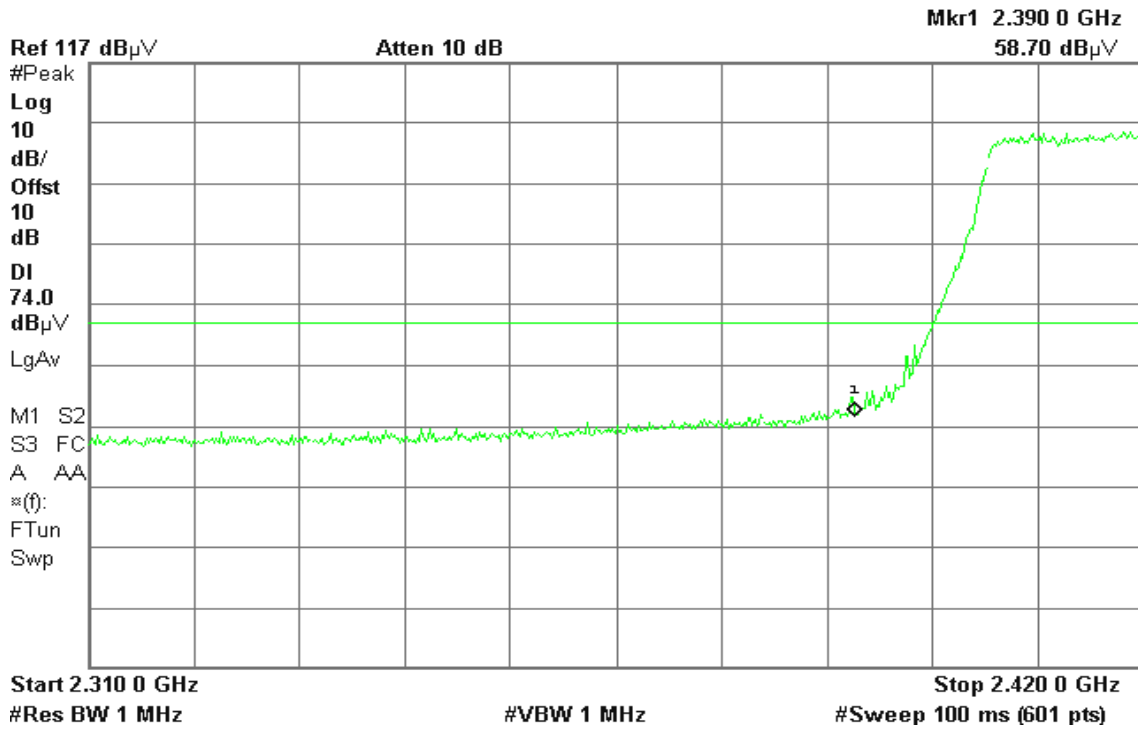


Detector mode: Average

Polarity: Horizontal

Agilent 17:10:51 Dec 26, 2006

R T

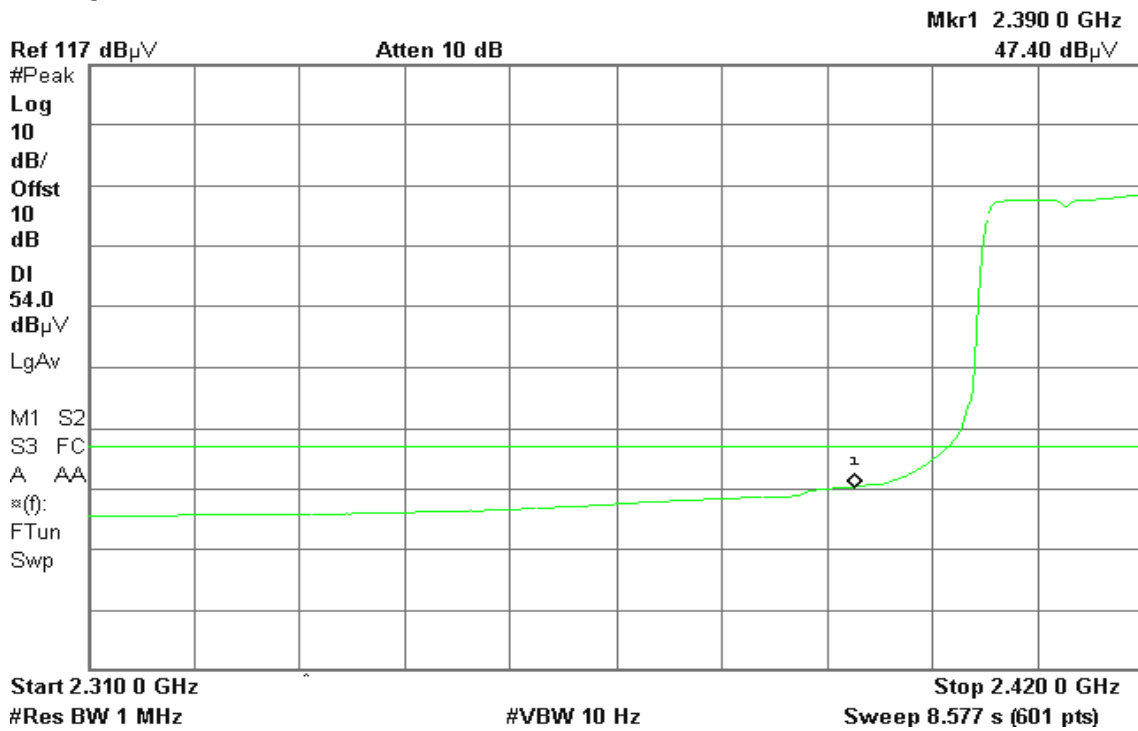



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:02:07 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
57.93 dB μ V

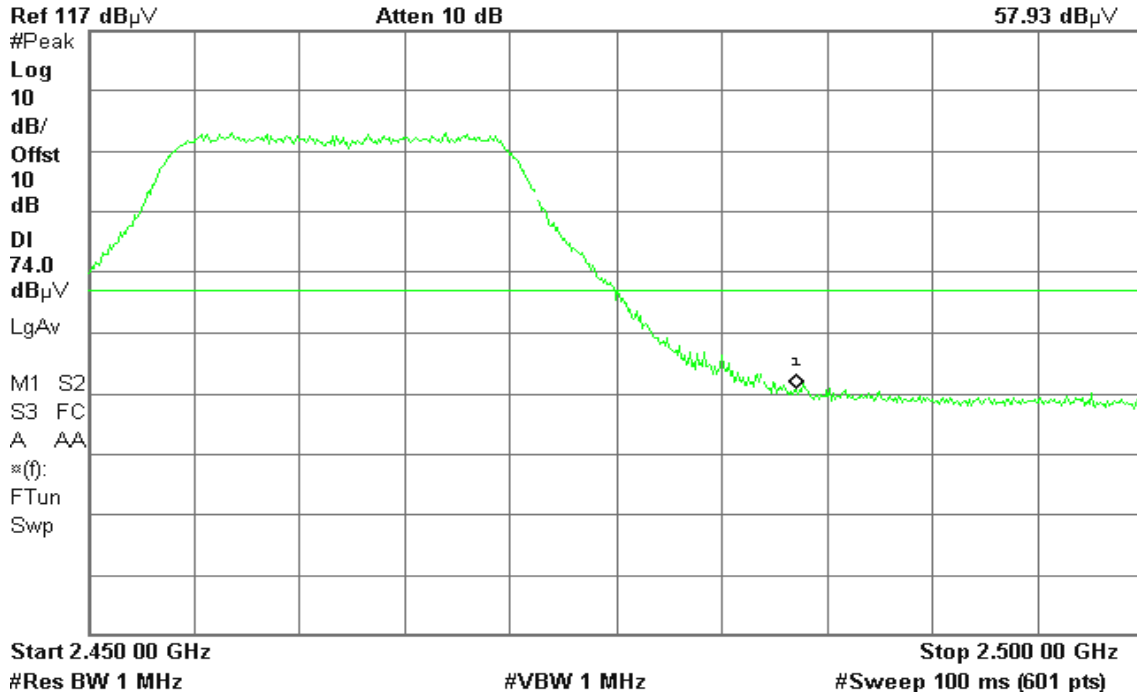


Detector mode: Average

Polarity: Vertical

Agilent 17:01:48 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
45.11 dB μ V

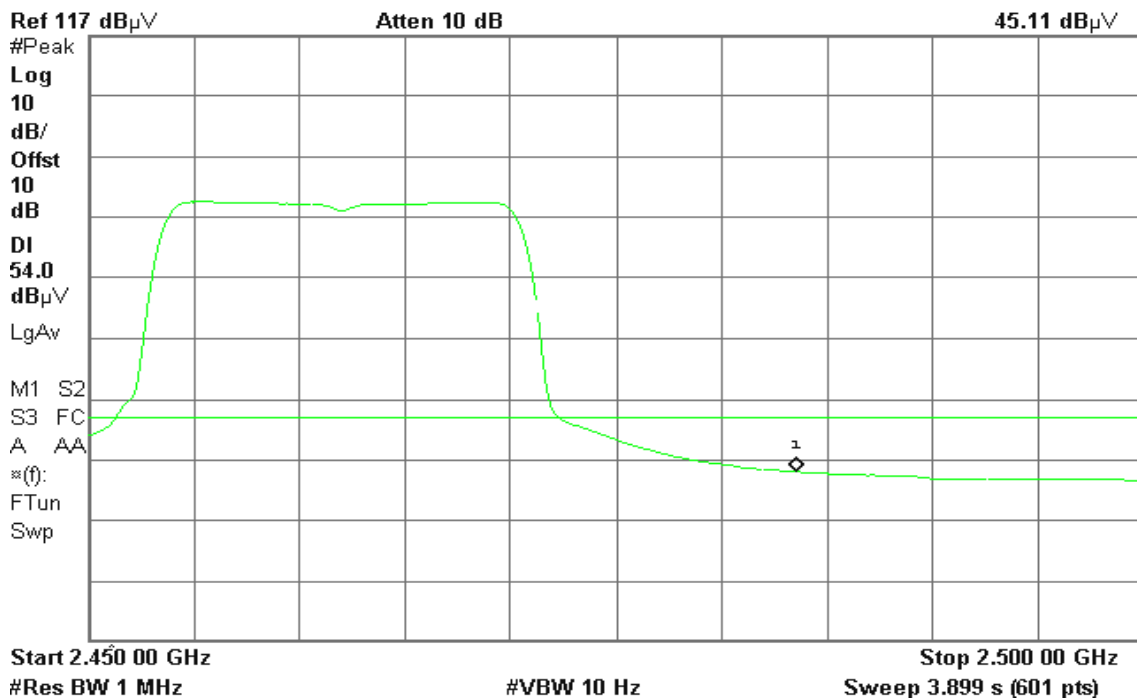




Detector mode: Peak

Polarity: Horizontal

Agilent 16:57:33 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
64.16 dB μ V

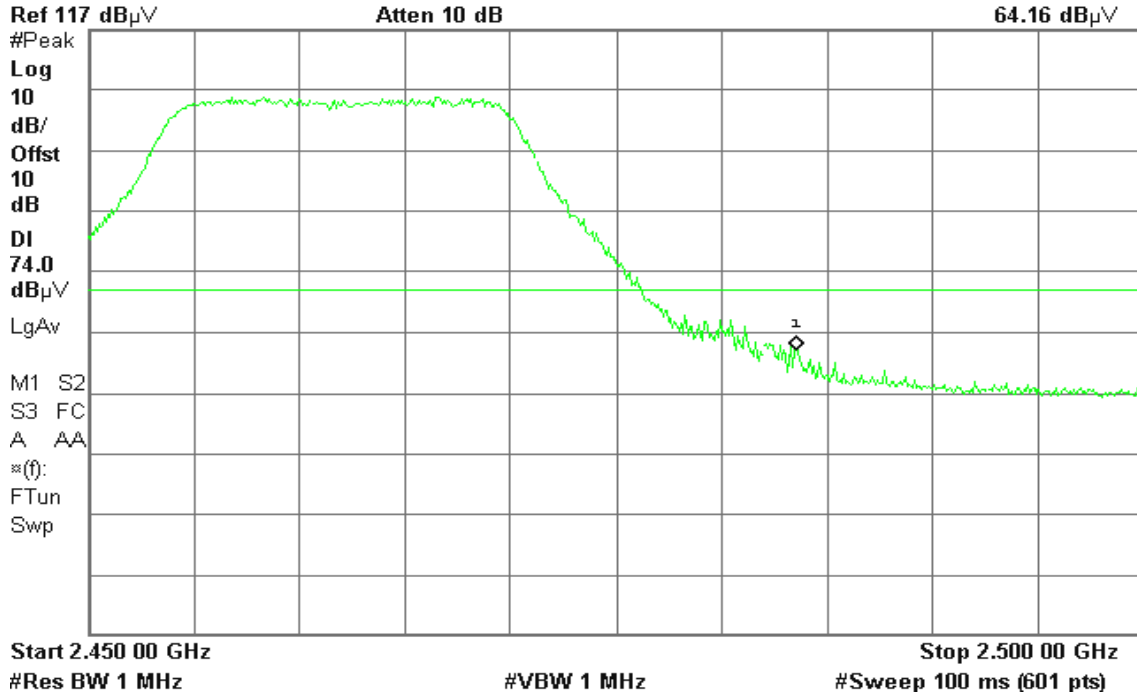


Detector mode: Average

Polarity: Horizontal

Agilent 16:57:11 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
48.03 dB μ V

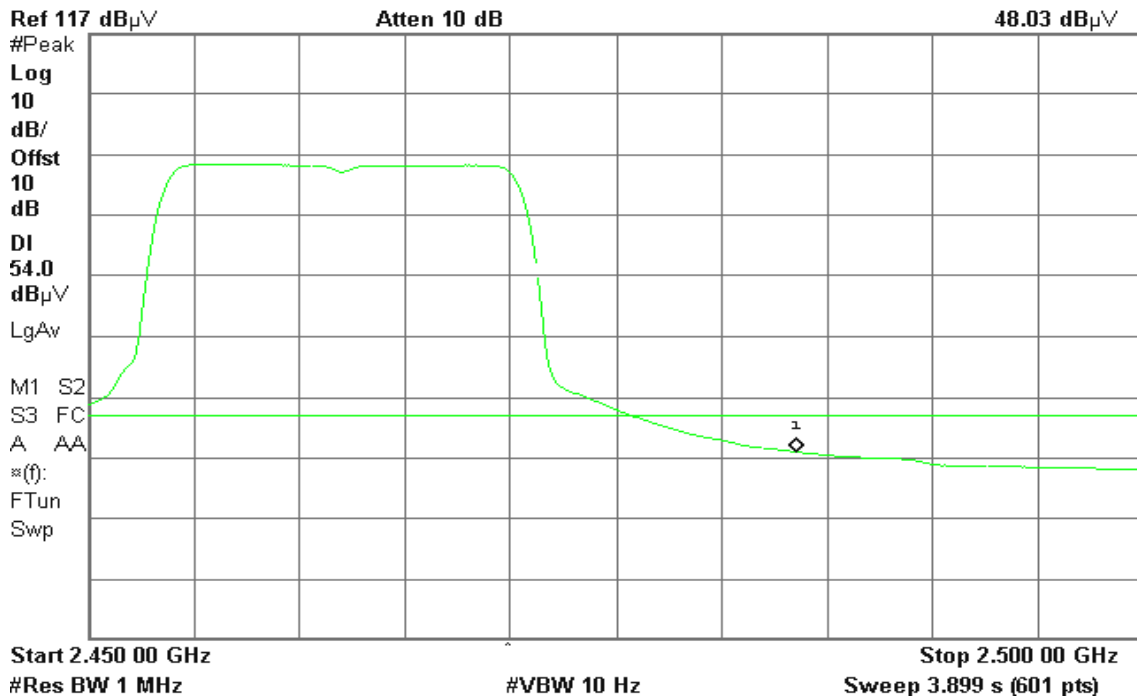




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Test Result |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -7.619 | 8.00 | PASS |
| Mid | 2437 | -7.199 | | PASS |
| High | 2462 | -2.640 | | PASS |


IEEE 802.11g

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Test Result |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -3.351 | 8.00 | PASS |
| Mid | 2437 | -2.786 | | PASS |
| High | 2462 | -2.940 | | PASS |




Test Plot

PPSD (IEEE 802.11b / CH Low)

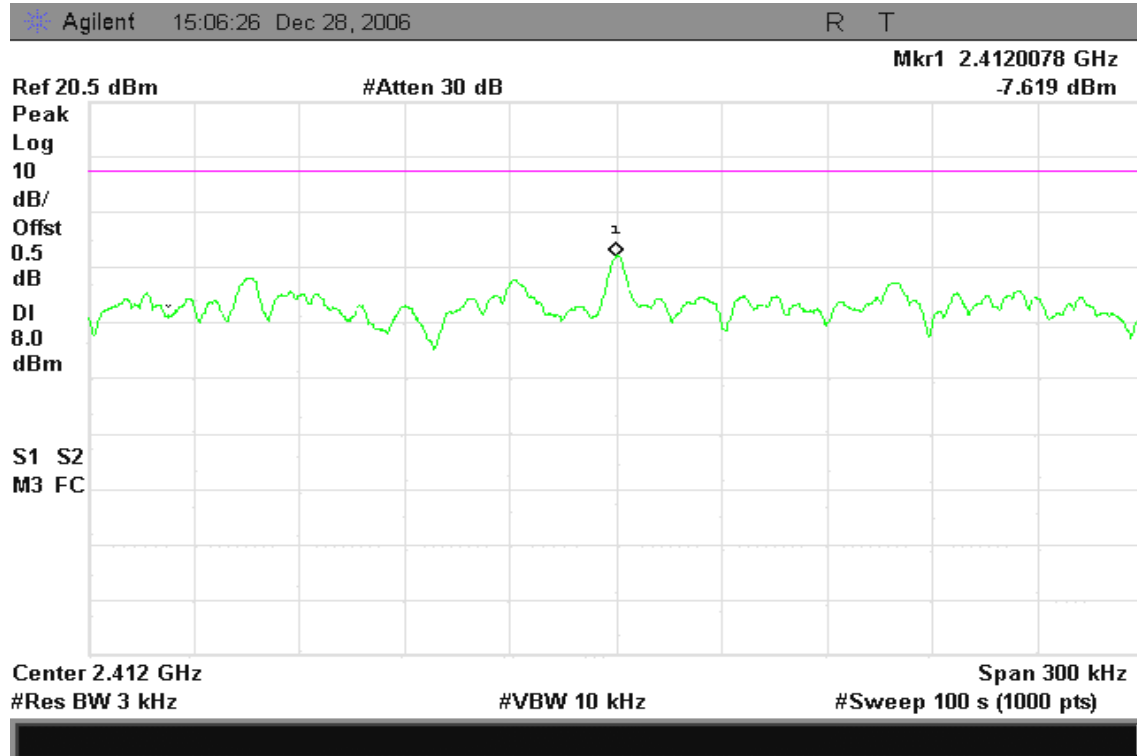


PPSD (IEEE 802.11b / CH Mid)

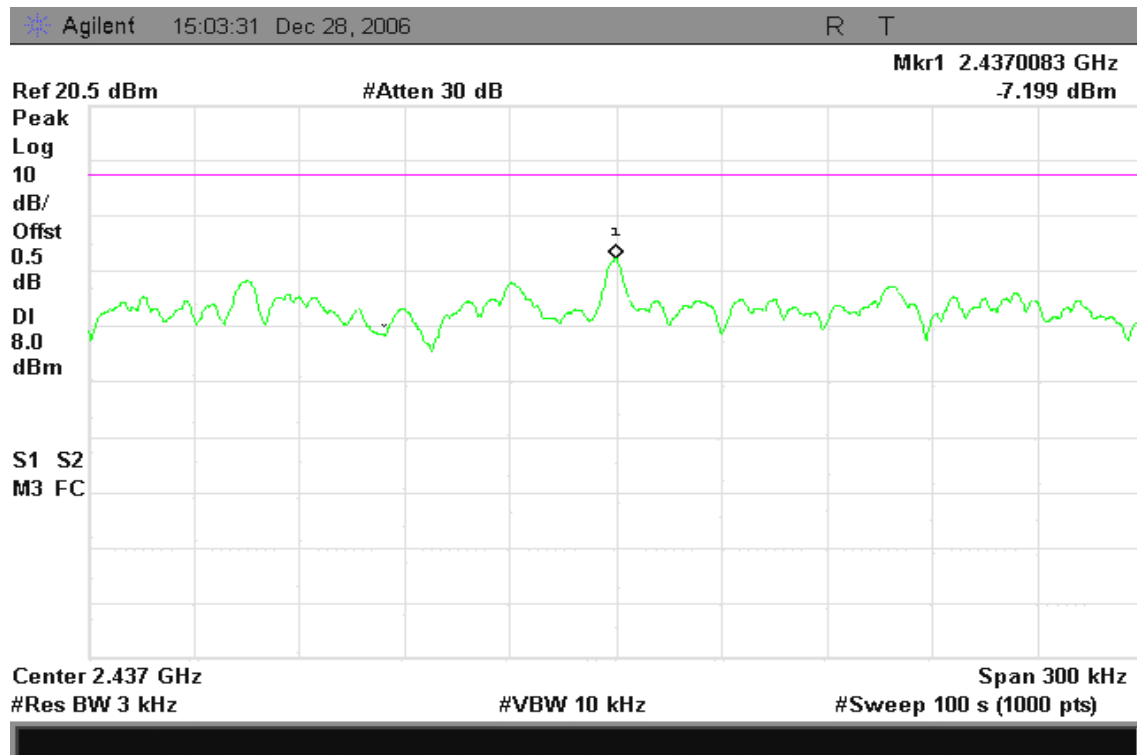




PPSD (IEEE 802.11b / CH High)

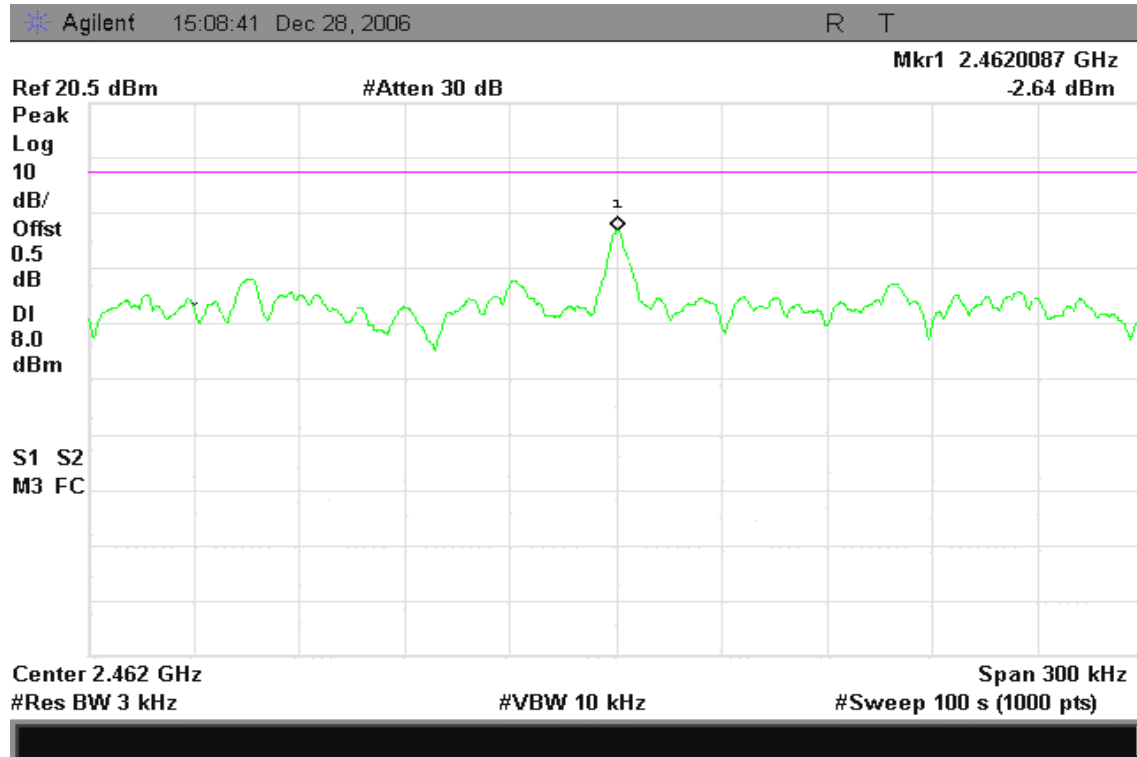


PPSD (IEEE 802.11g / CH Low)

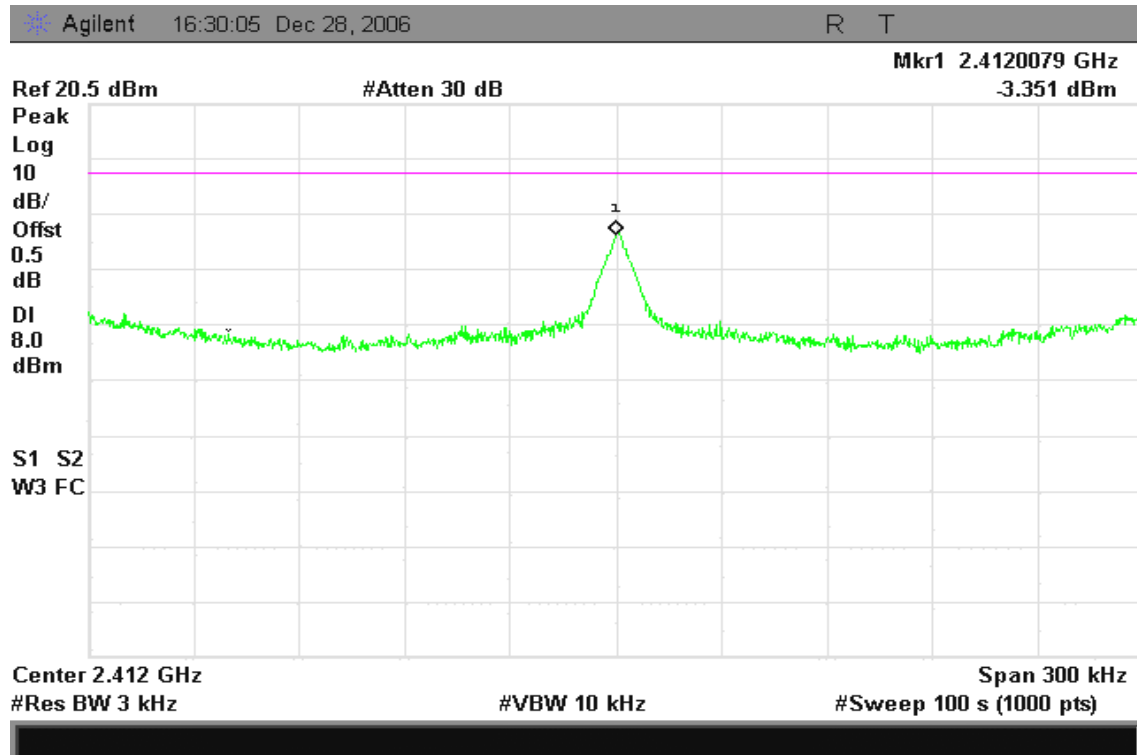




PPSD (IEEE 802.11g / CH Mid)

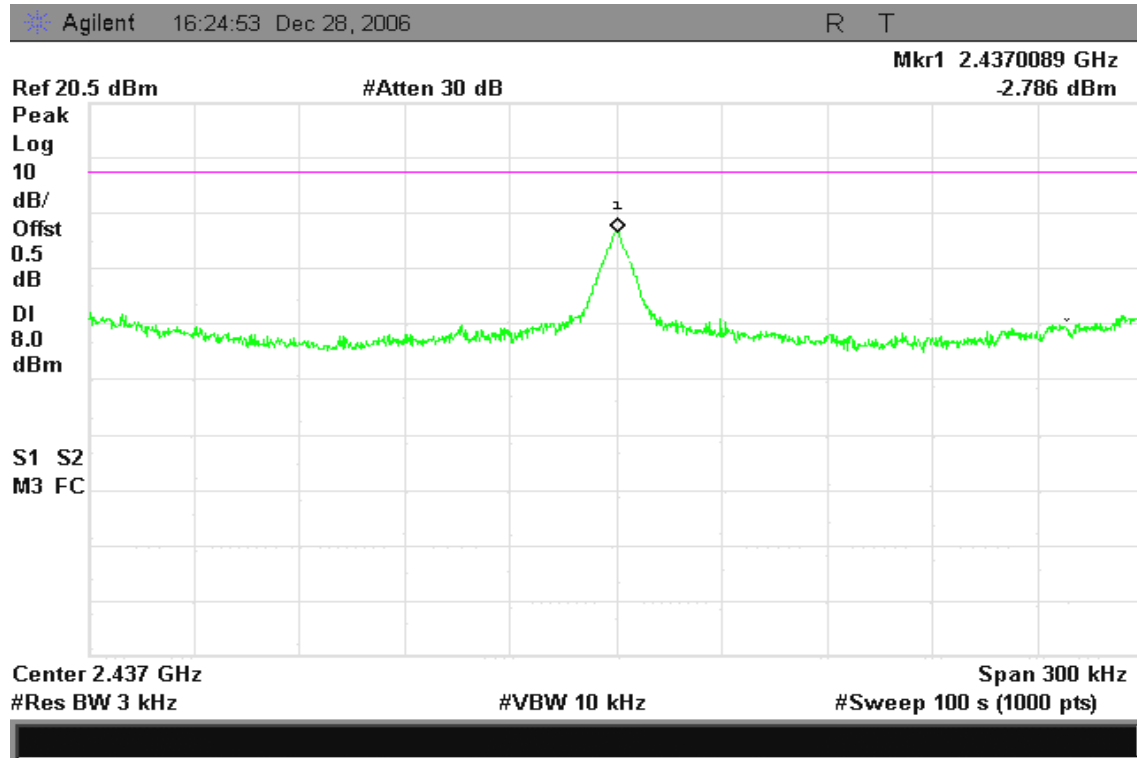

PPSD (IEEE 802.11g / CH High)

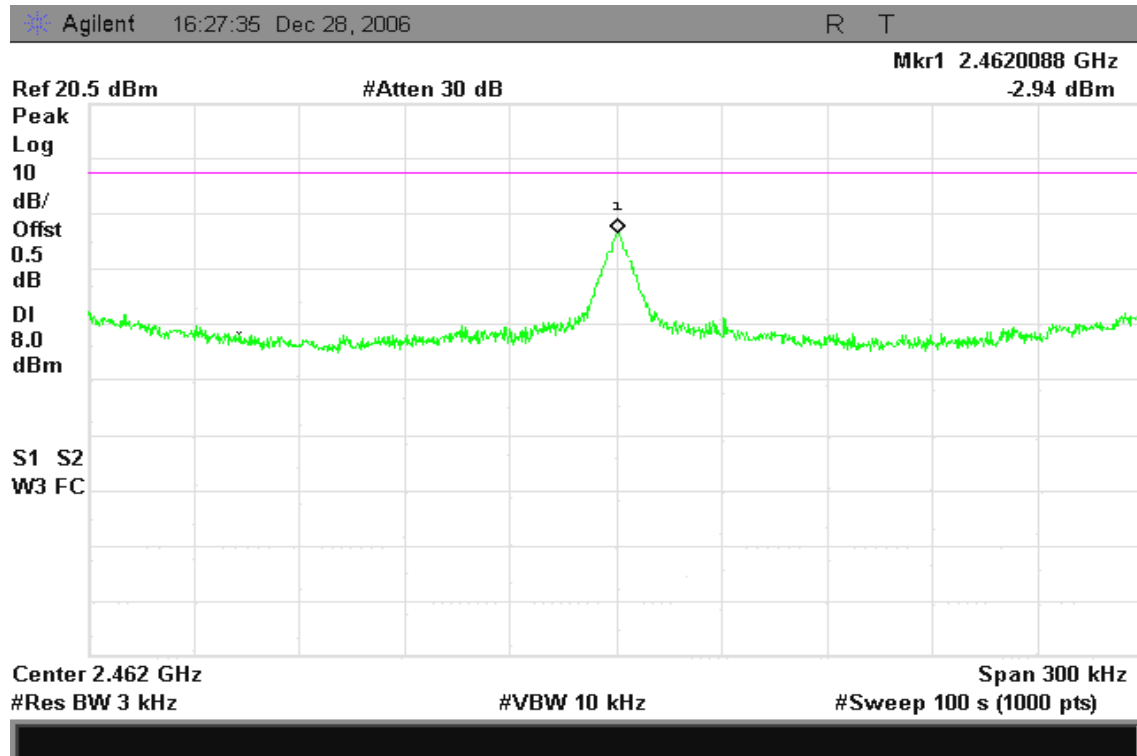


7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted.




Test Plot

IEEE 802.11b / CH Low

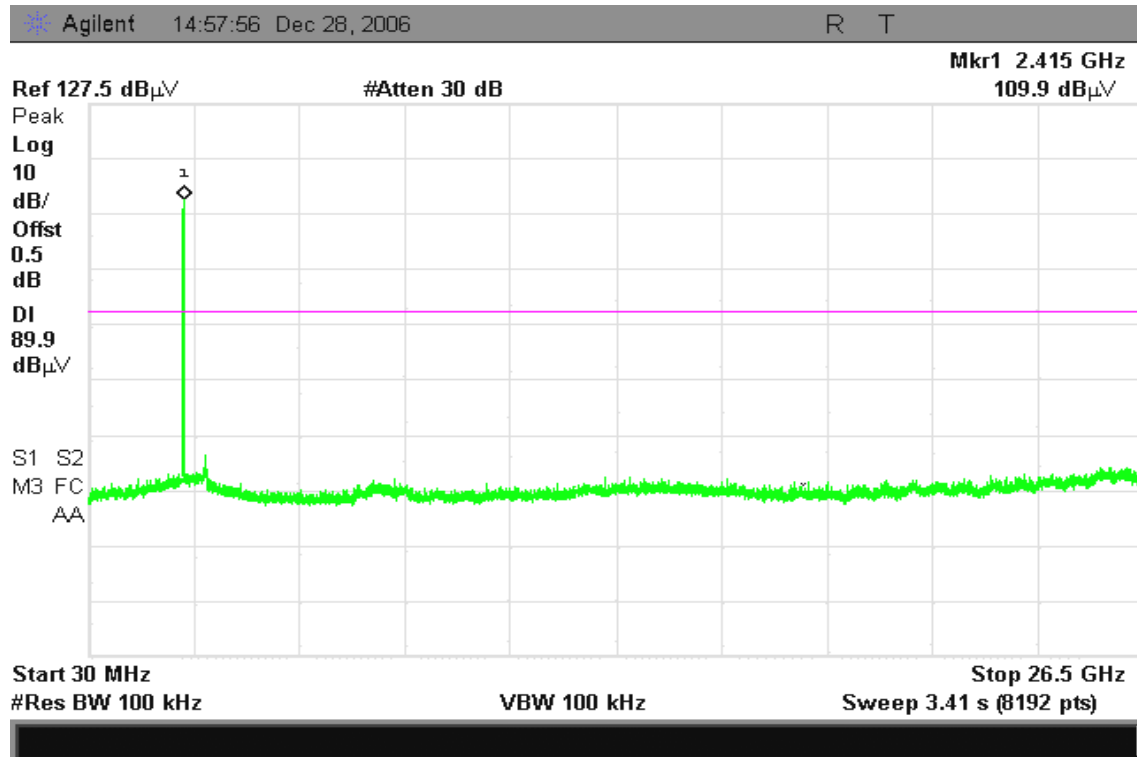


IEEE 802.11b / CH Mid

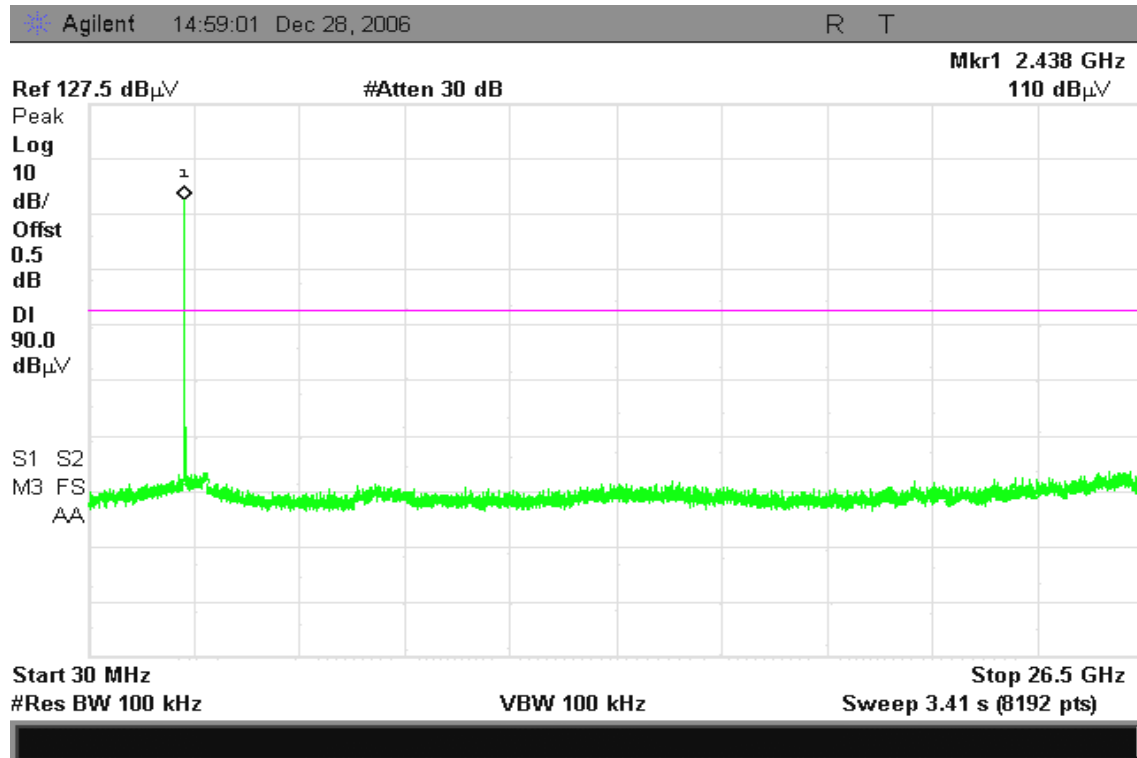




IEEE 802.11b / CH High

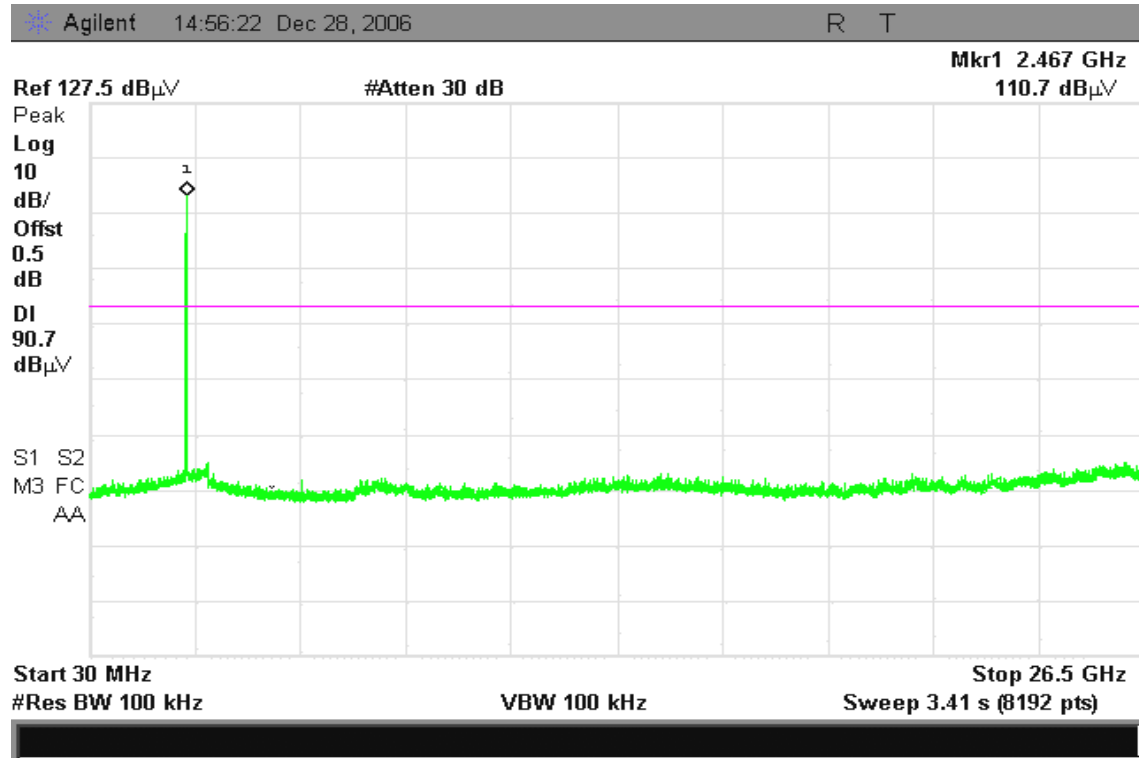


IEEE 802.11g / CH Low

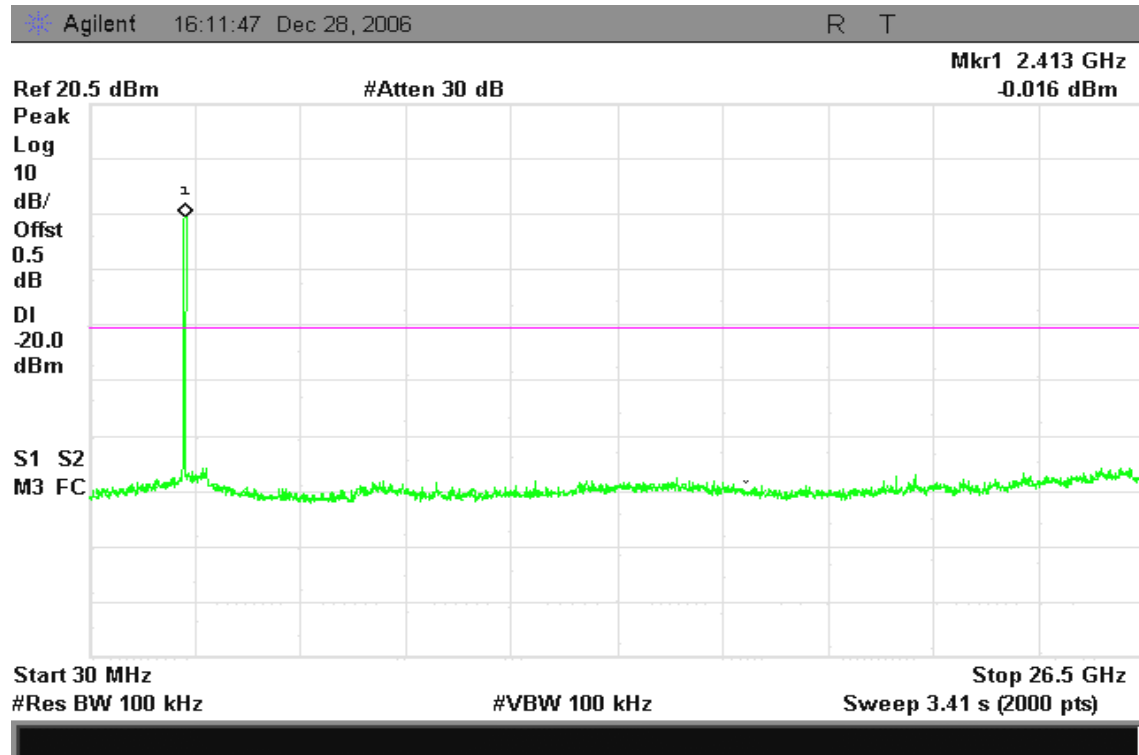




IEEE 802.11g / CH Mid

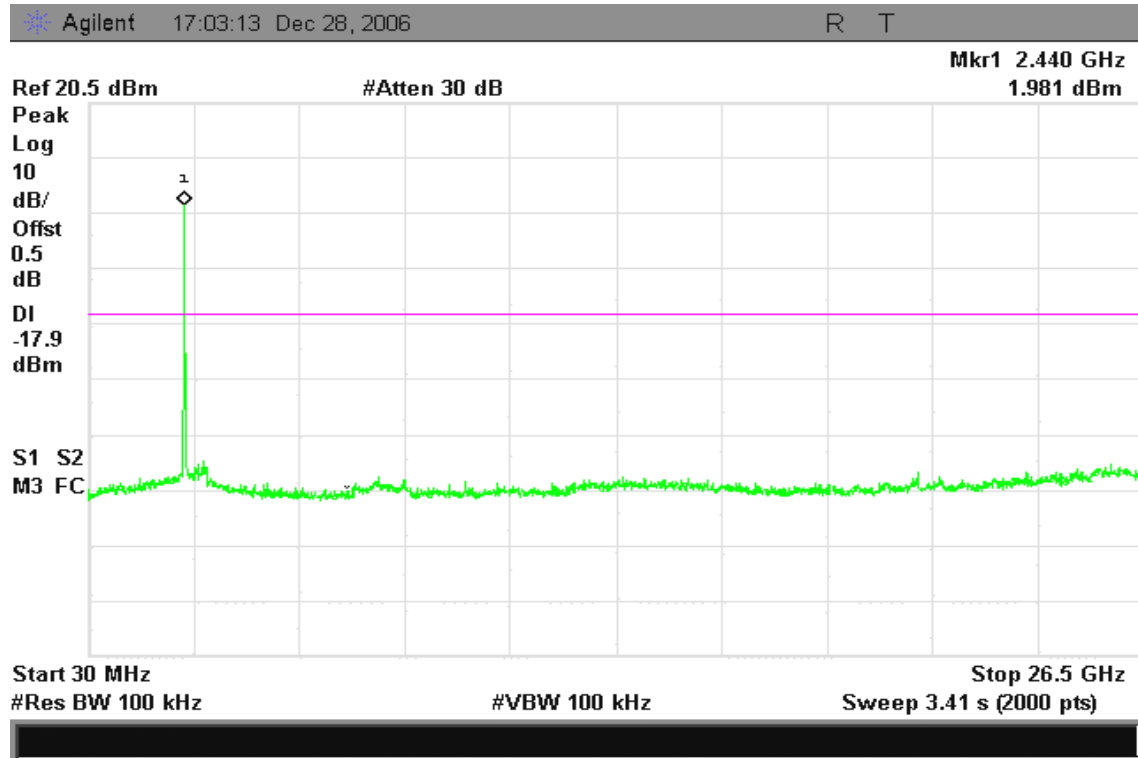

IEEE 802.11g / CH High

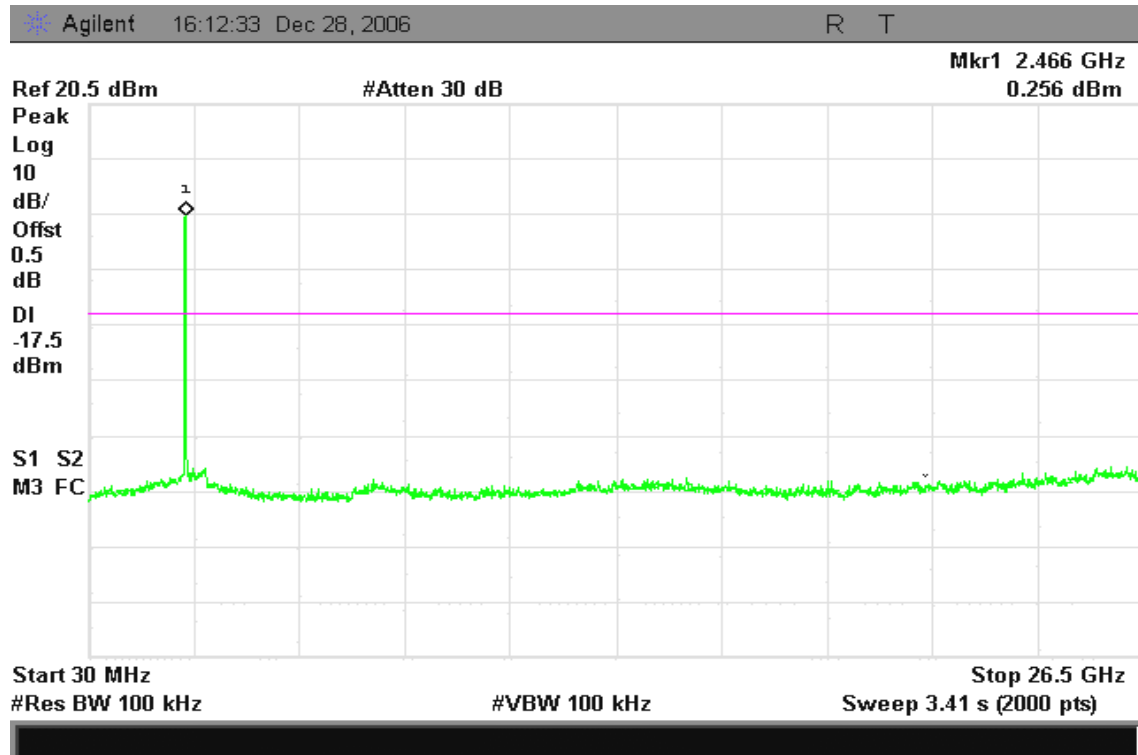



7.6.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (µV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength (µV/m at 3-meter) | Field Strength (dBµV/m at 3-meter) |
|-----------------|----------------------------------|------------------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

Below 1 GHz

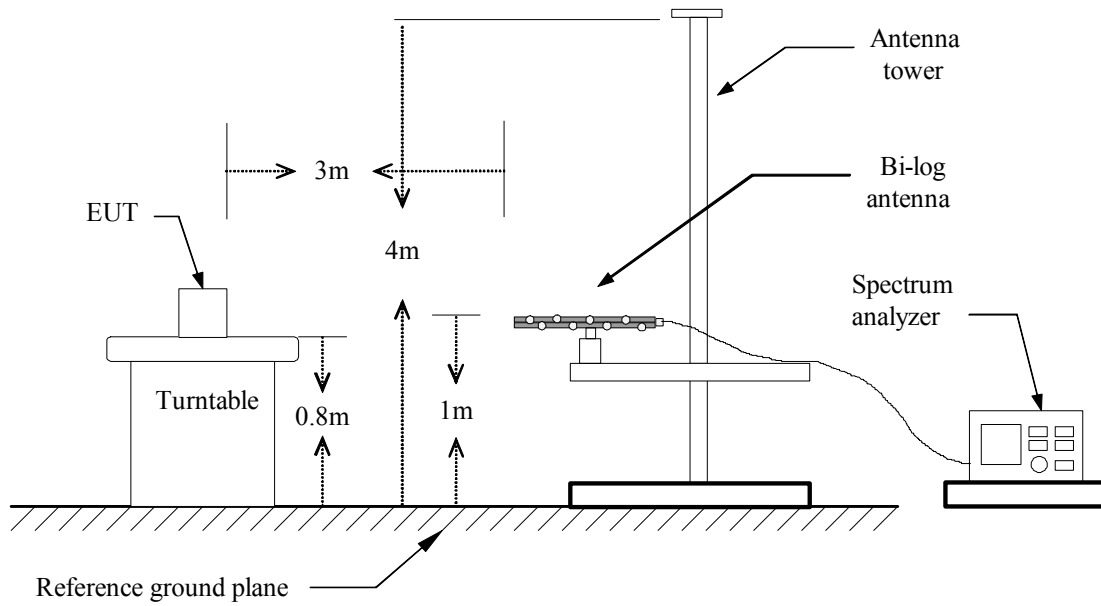

Above 1 GHz

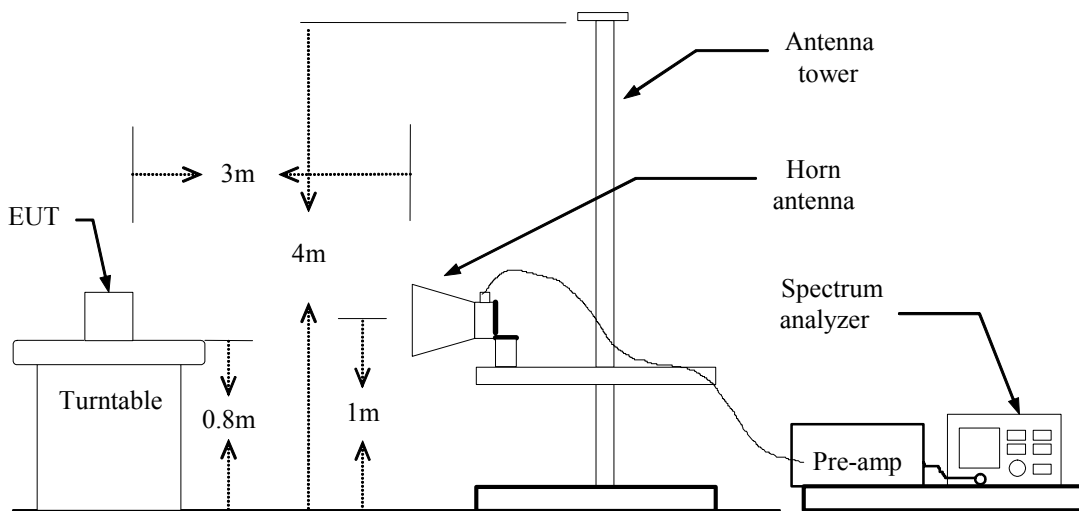



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** December 26, 2006**Temperature:** 23°C**Tested by:** Skyman Tsai**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------|-----------------------|----------------|--------------------------|-----------------|----------------|-------------|
| 57.48 | V | Peak | 67.64 | -33.01 | 34.64 | 40.00 | -5.36 |
| 130.23 | V | Peak | 50.50 | -26.50 | 24.00 | 43.50 | -19.50 |
| 243.40 | V | Peak | 47.79 | -27.56 | 20.23 | 46.00 | -25.77 |
| 296.75 | V | Peak | 52.25 | -25.40 | 26.85 | 46.00 | -19.15 |
| 351.72 | V | Peak | 49.45 | -23.90 | 25.54 | 46.00 | -20.46 |
| 405.07 | V | Peak | 44.95 | -22.65 | 22.30 | 46.00 | -23.70 |
| 30.00 | H | Peak | 39.74 | -18.92 | 20.82 | 40.00 | -19.18 |
| 57.48 | H | Peak | 50.46 | -33.01 | 17.45 | 40.00 | -22.55 |
| 181.97 | H | Peak | 45.62 | -27.78 | 17.84 | 43.50 | -25.66 |
| 278.97 | H | Peak | 47.31 | -25.56 | 21.75 | 46.00 | -24.25 |
| 296.75 | H | Peak | 49.60 | -25.40 | 24.20 | 46.00 | -21.80 |
| 940.18 | H | Peak | 38.25 | -13.21 | 25.04 | 46.00 | -20.96 |

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



WLAN OPERATION

Above 1 GHz

Operation Mode: IEEE 802.11b / TX / CH Low

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 5445.00 | H | 40.45 | 27.81 | 11.98 | 52.43 | 39.79 | 74.00 | 54.00 | -14.21 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH Mid

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2318.33 | V | 41.73 | --- | 3.89 | 45.62 | --- | 74.00 | 54.00 | -8.38 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1676.67 | H | 41.91 | --- | 0.42 | 42.33 | --- | 74.00 | 54.00 | -11.67 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH High

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2131.67 | V | 40.36 | --- | 3.30 | 43.67 | --- | 74.00 | 54.00 | -10.33 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1653.33 | H | 41.65 | --- | 0.24 | 41.89 | --- | 74.00 | 54.00 | -12.11 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH Low

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1980.00 | V | 41.98 | --- | 2.74 | 44.72 | --- | 74.00 | 54.00 | -9.28 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2033.33 | H | 42.25 | --- | 2.99 | 45.24 | --- | 74.00 | 54.00 | -8.76 | Peak |
| 3591.67 | H | 40.52 | --- | 7.62 | 48.14 | --- | 74.00 | 54.00 | -5.86 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH Mid

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1666.67 | V | 42.52 | --- | 0.34 | 42.87 | --- | 74.00 | 54.00 | -11.13 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2053.33 | H | 42.11 | --- | 3.06 | 45.17 | --- | 74.00 | 54.00 | -8.83 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH High

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1520.00 | V | 42.98 | --- | -0.78 | 42.20 | --- | 74.00 | 54.00 | -11.80 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2310.00 | H | 42.37 | --- | 3.86 | 46.24 | --- | 74.00 | 54.00 | -7.76 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



CONDITION B: BLUETOOTH OPERATION


7.7 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2402 | 0.55 | 0.00114 | 1 | PASS |
| Mid | 2441 | 0.74 | 0.00119 | | PASS |
| High | 2480 | -0.24 | 0.00095 | | PASS |




7.8 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data


| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2402 | 0.53 | 0.00113 |
| Mid | 2441 | 0.72 | 0.00118 |
| High | 2480 | -0.26 | 0.00094 |

7.9 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

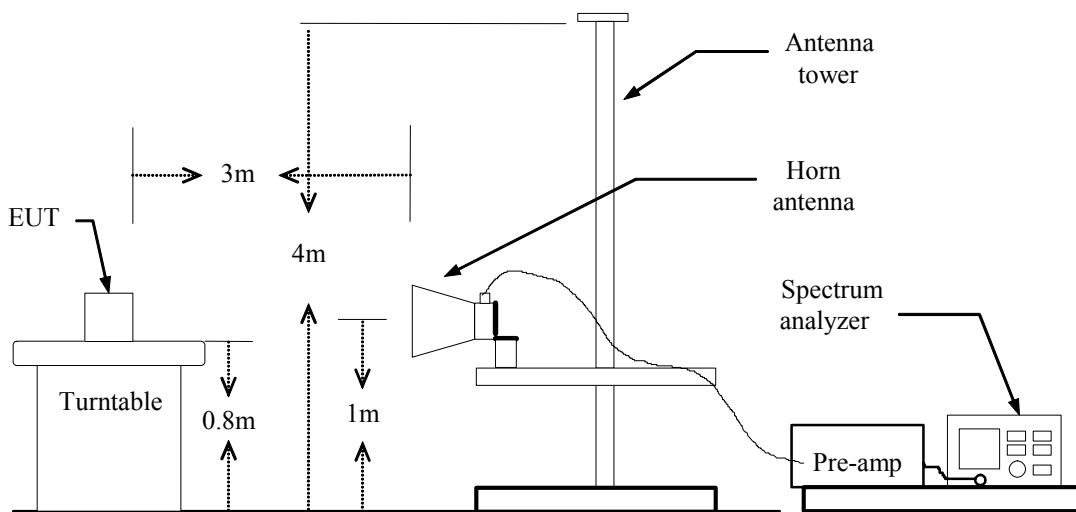

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (c) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (d) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (Bluetooth mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:14:33 Dec 26, 2006

R T

Mkr1 2.390 00 GHz
54.27 dB μ V

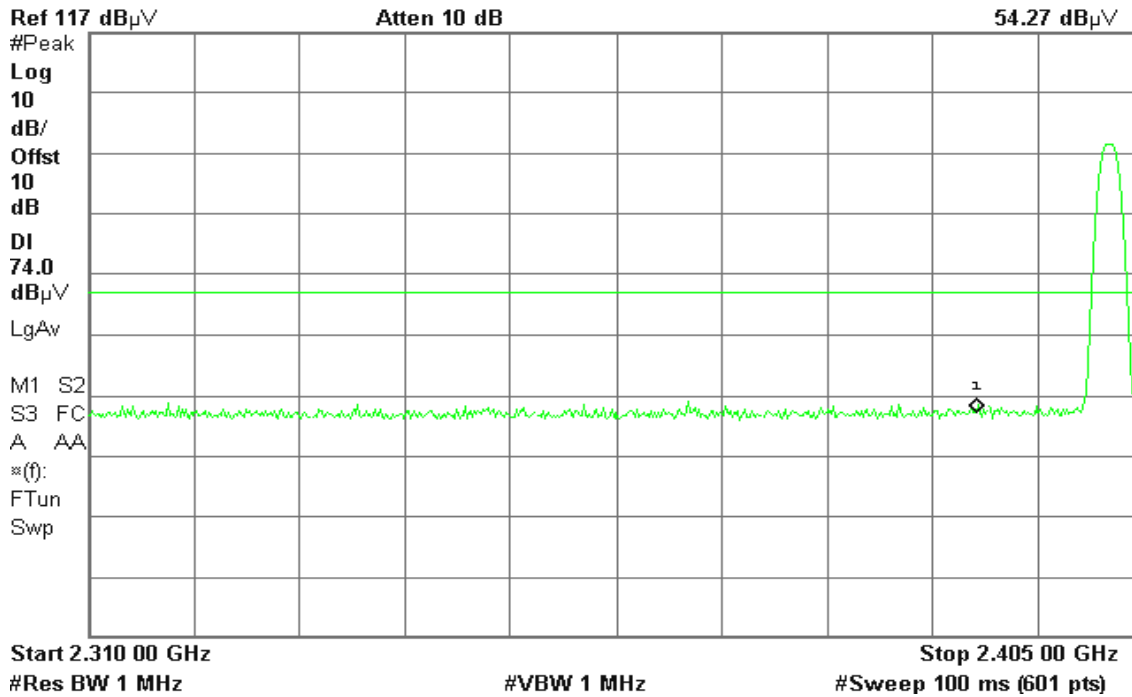


Detector mode: Average

Polarity: Vertical

Agilent 20:14:13 Dec 26, 2006

R T

Mkr1 2.390 00 GHz
42.45 dB μ V

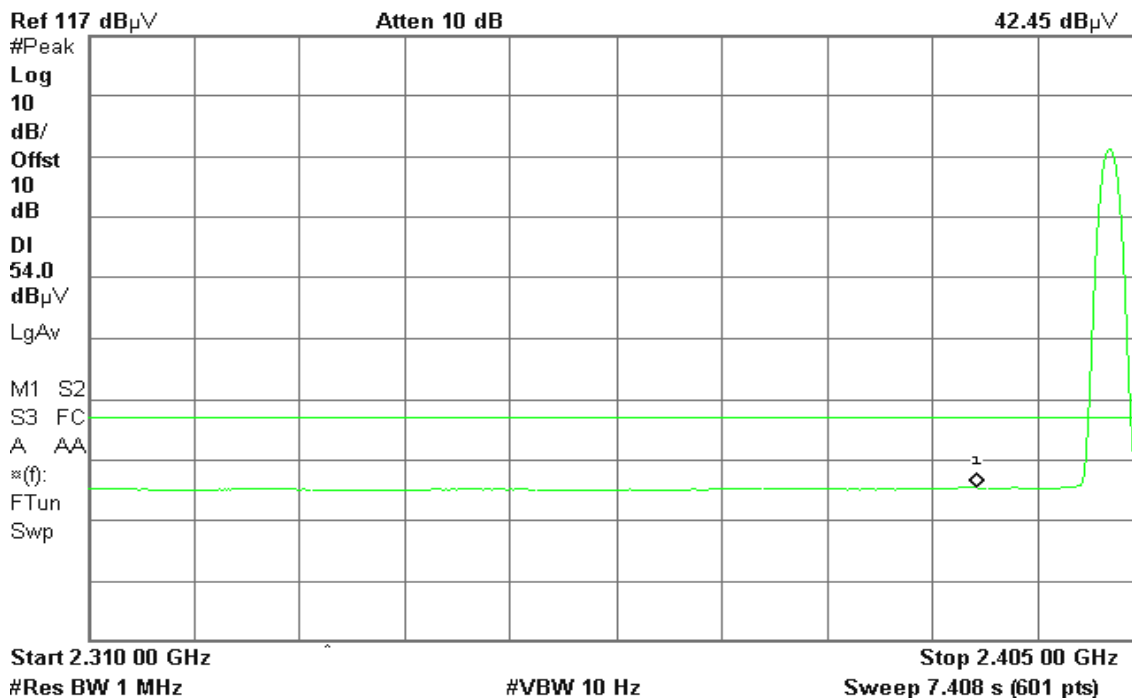




Detector mode: Peak

Polarity: Horizontal

Agilent 20:10:17 Dec 26, 2006

R T

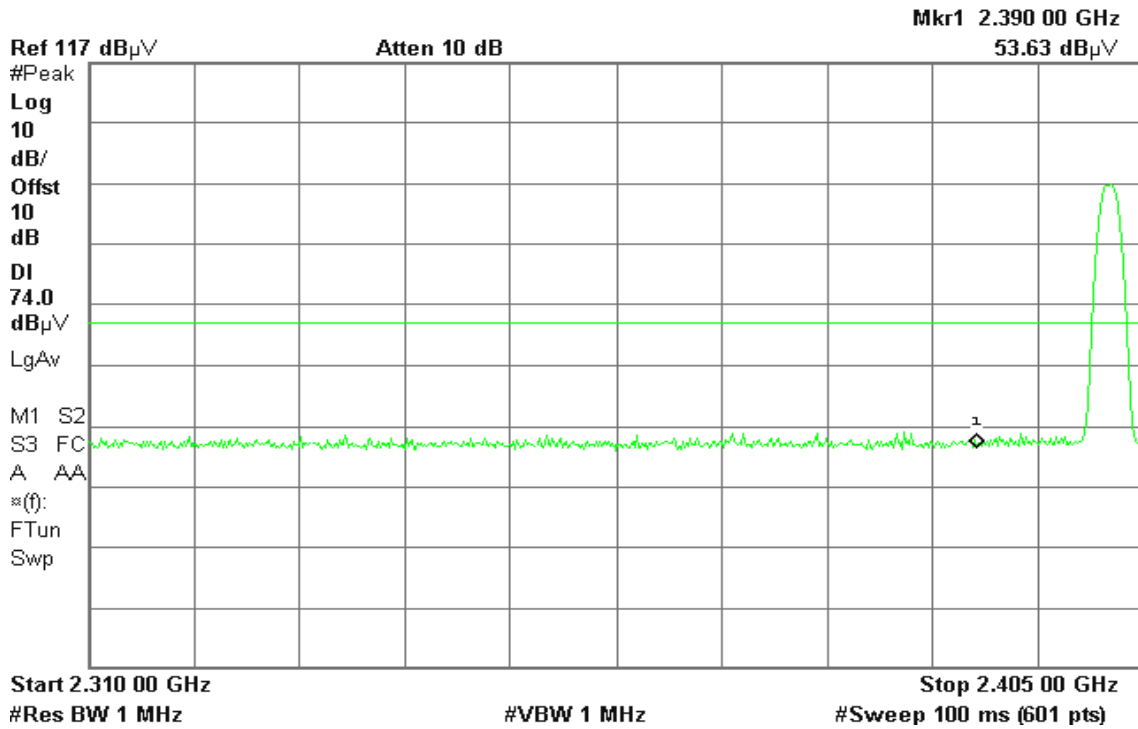


Detector mode: Average

Polarity: Horizontal

Agilent 20:09:06 Dec 26, 2006

R T

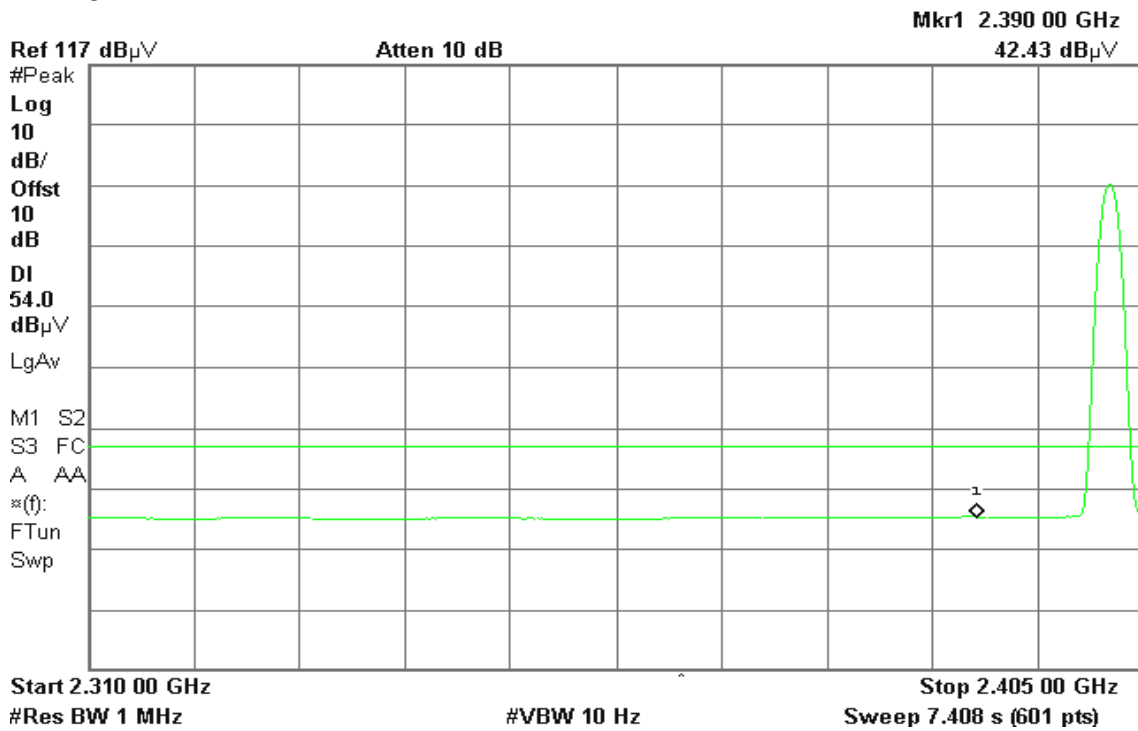



Band Edges (Bluetooth mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:20:07 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
54.30 dB μ V

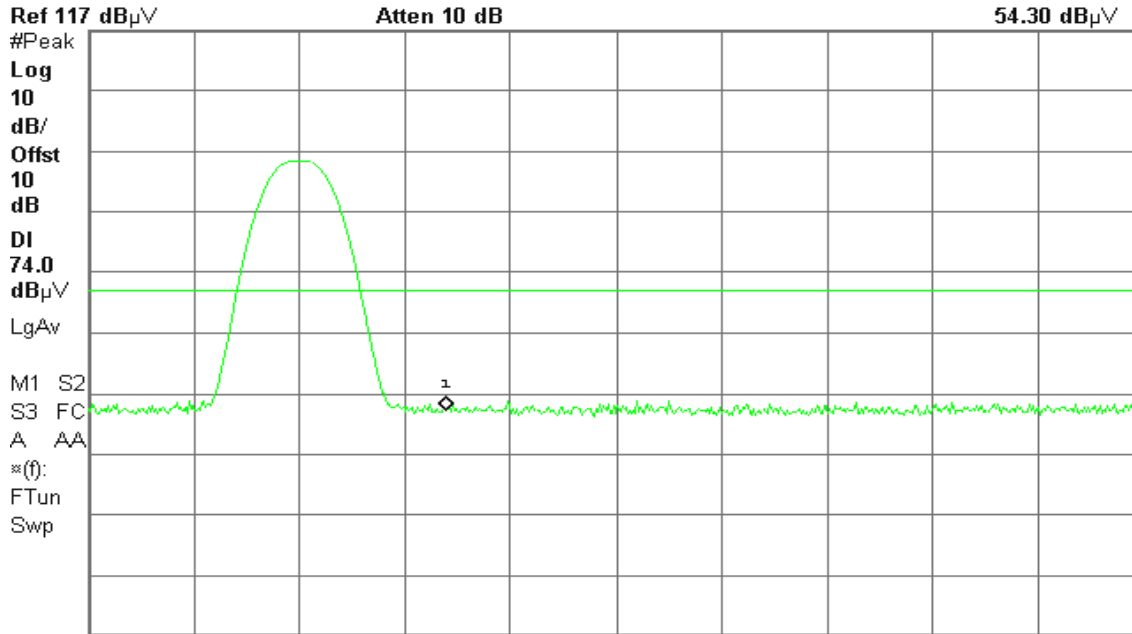

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:19:47 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
42.60 dB μ V

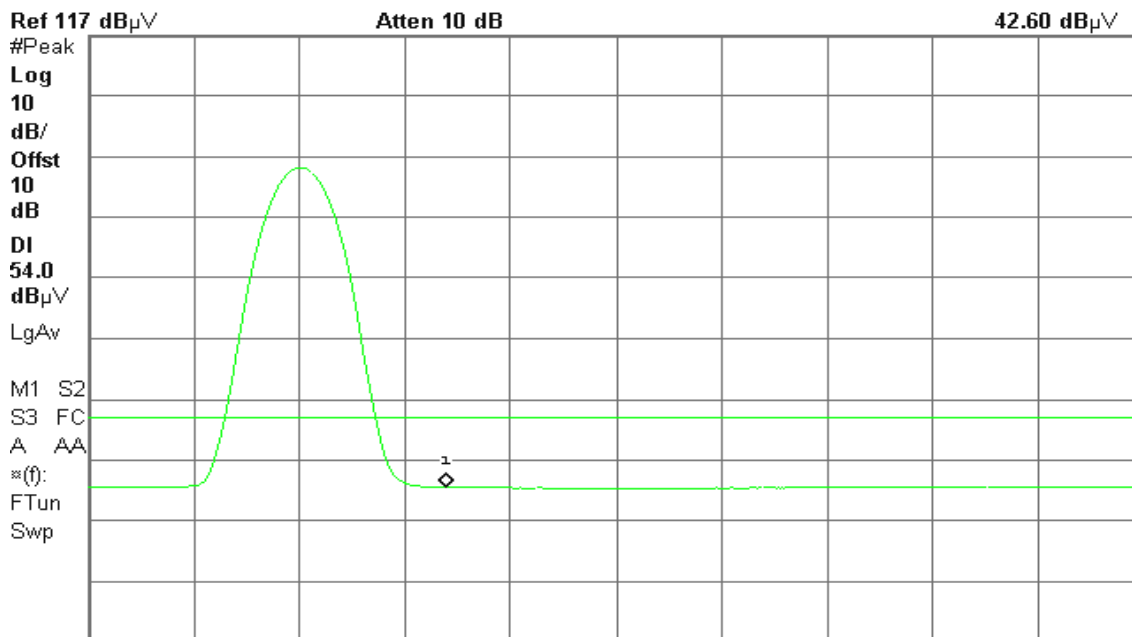

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.949 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 20:24:29 Dec 26, 2006

R T

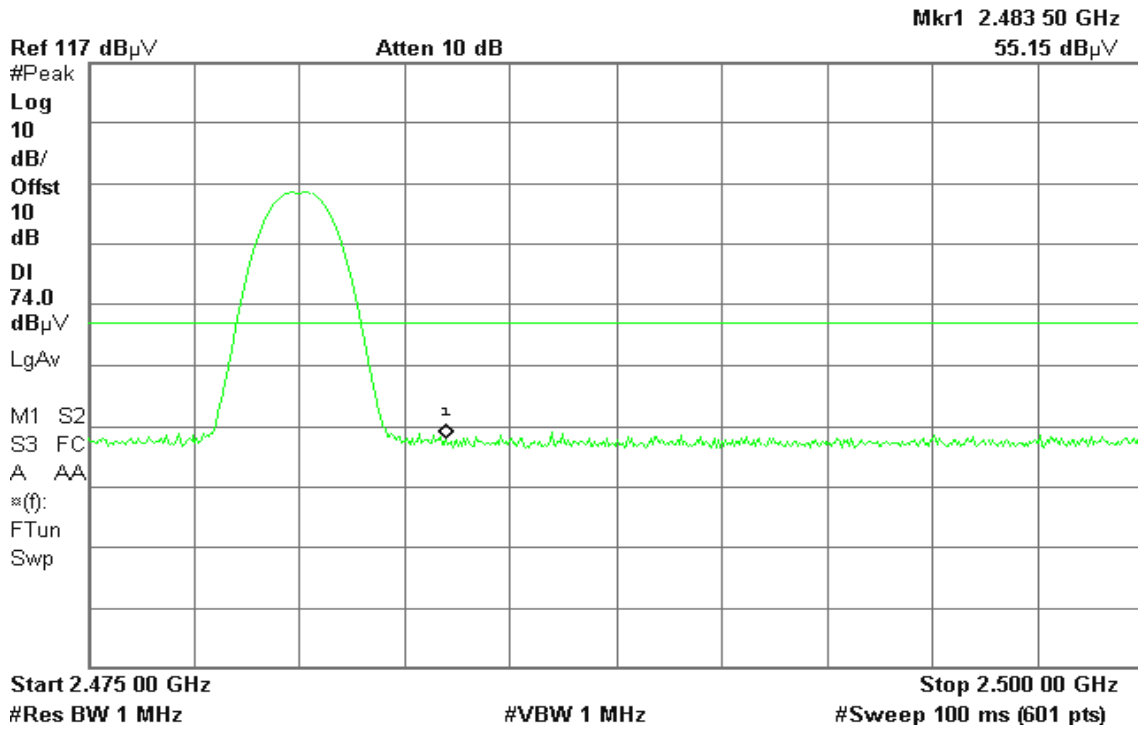


Detector mode: Average

Polarity: Horizontal

Agilent 20:23:35 Dec 26, 2006

R T

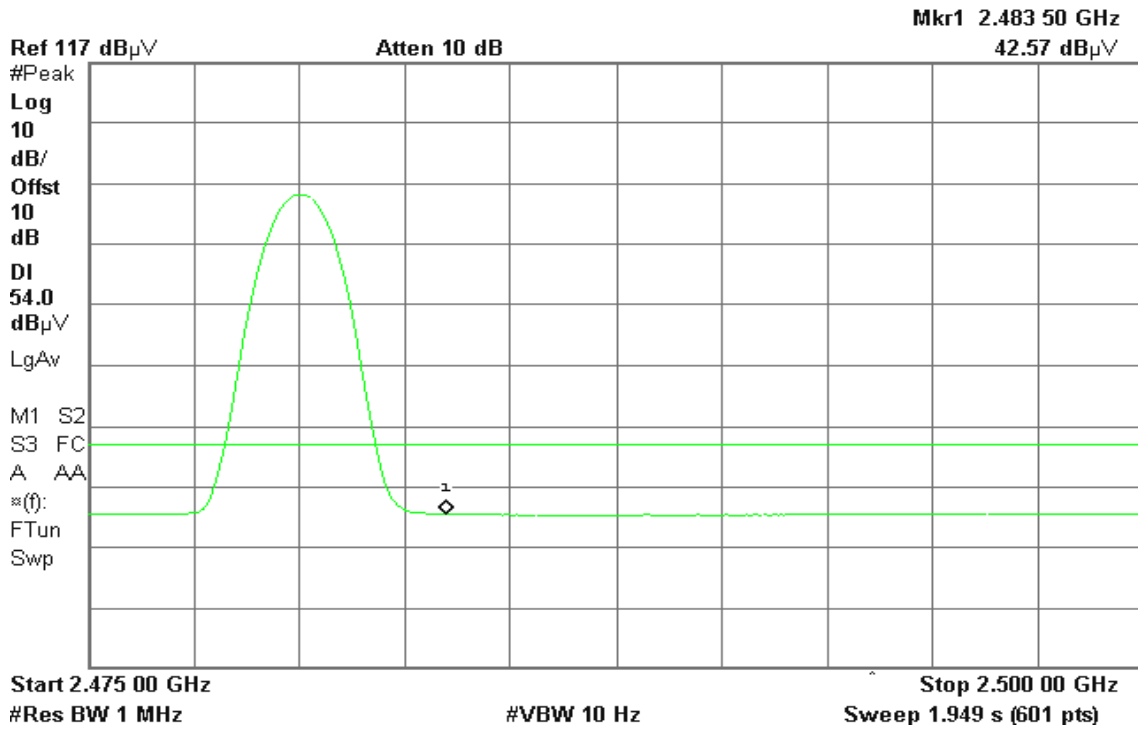




7.10 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted


Test Data

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2402 | -9.169 | 8.00 | PASS |
| Mid | 2441 | -8.801 | | PASS |
| High | 2480 | -9.872 | | PASS |




Test Plot

PPSD (Bluetooth mode / CH Low)

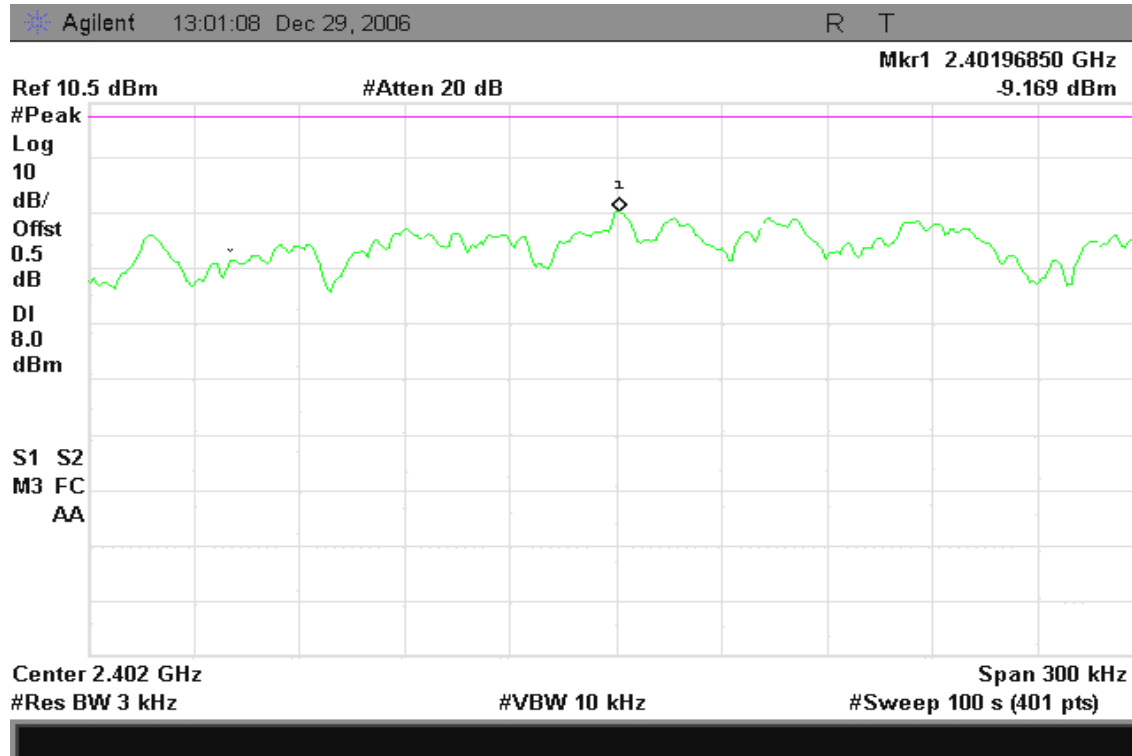


PPSD (Bluetooth mode / CH Mid)

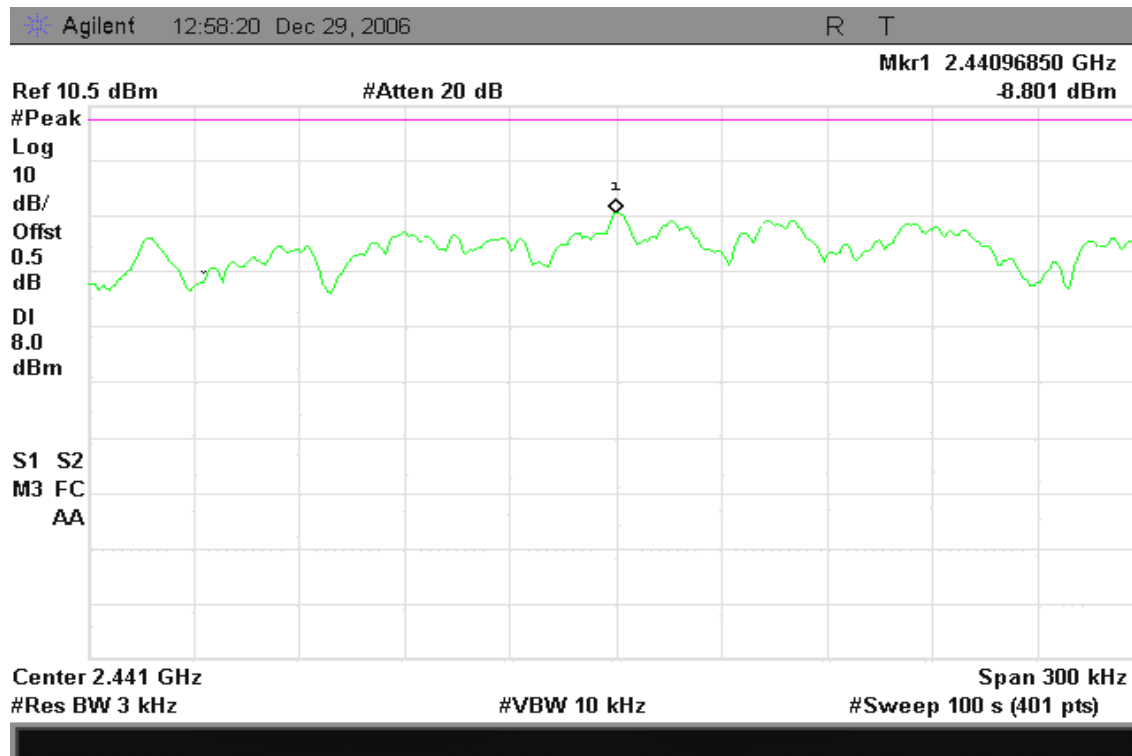



PPSD (Bluetooth mode / CH High)

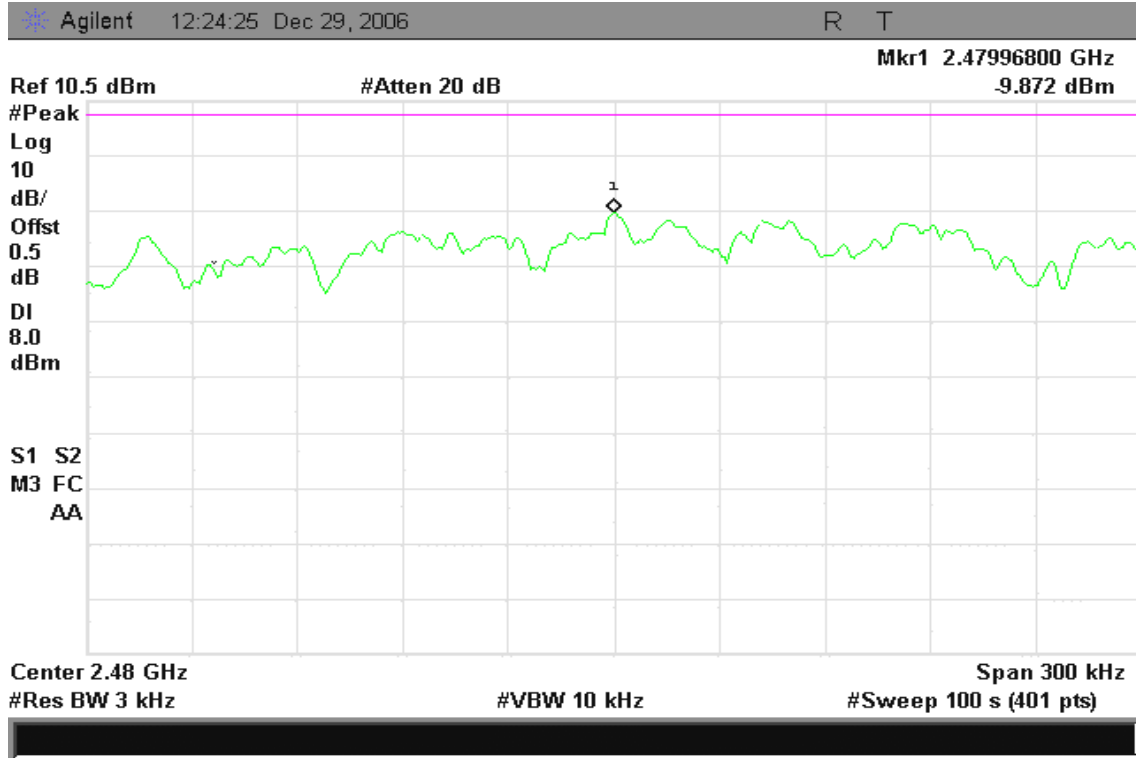


7.11 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted


Test Data

| Channel Separation (MHz) | 20dB Bandwidth (kHz) | Channel Separation Limit (kHz) | Result |
|--------------------------|----------------------|--------------------------------|--------|
| 1.00 | 810 | > 20dB Bandwidth | Pass |




Test Plot

Measurement of Channel Separation

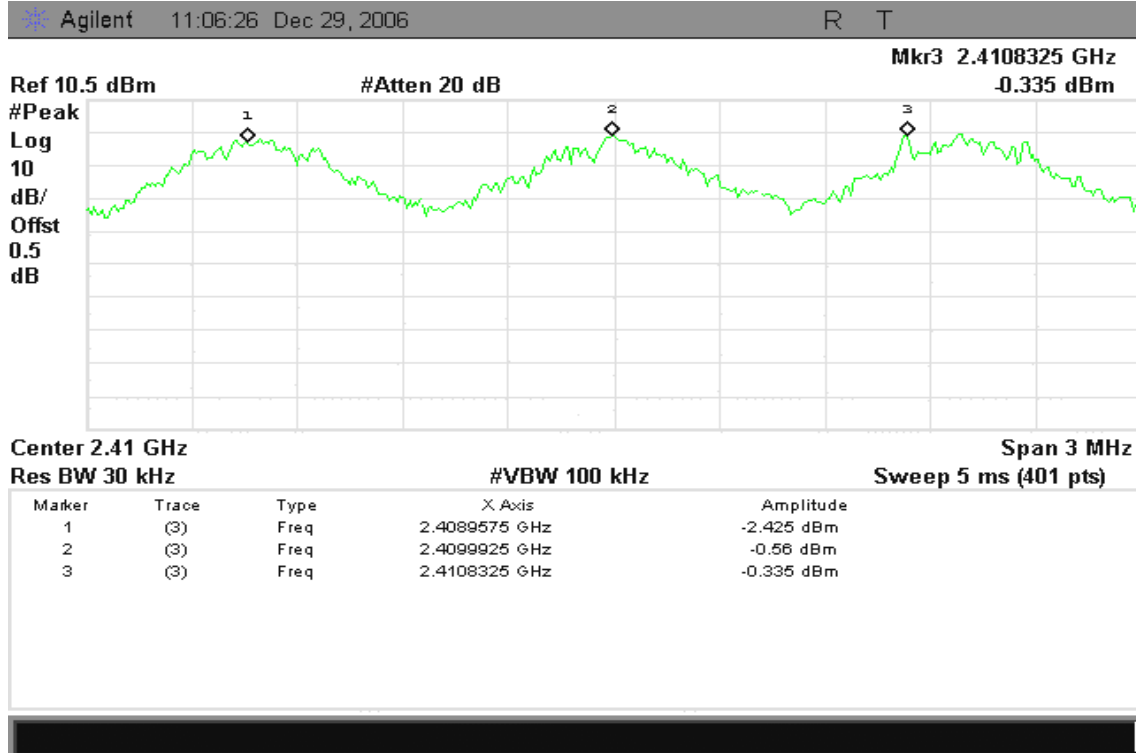

Measurement of 20dB Bandwidth

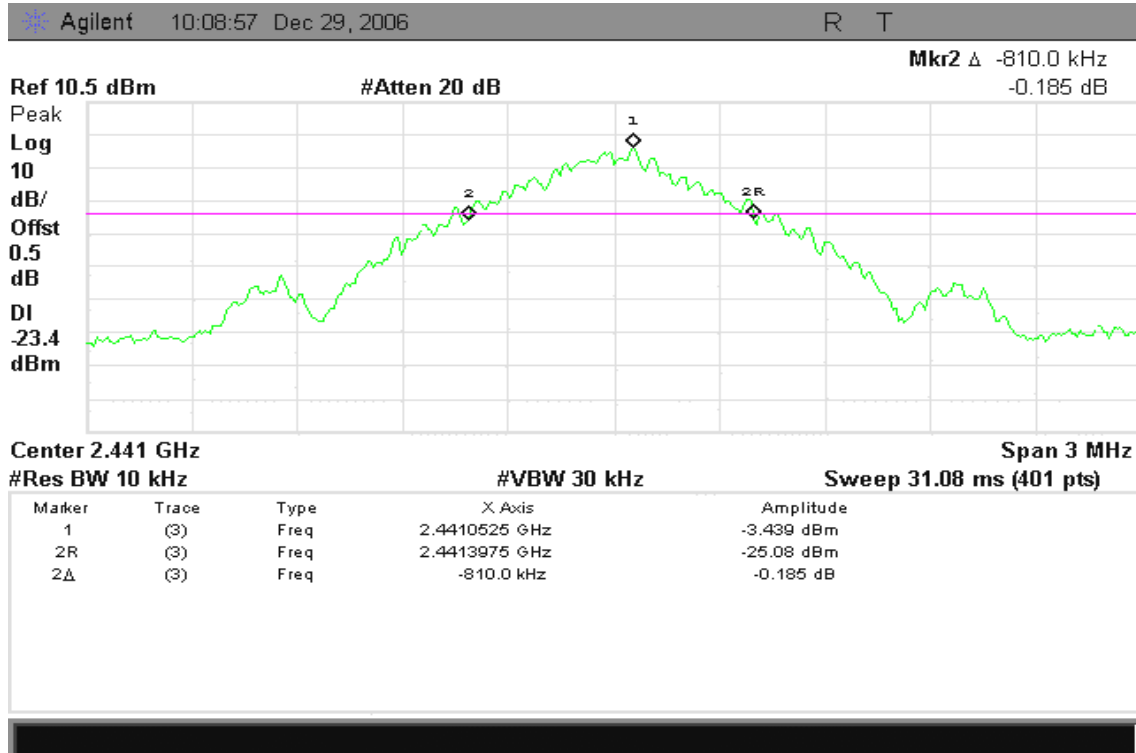


7.12 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=1MHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data


| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79 | >75 | PASS |




Test Plot

Channel Number

2.4 GHz – 2.441 GHz

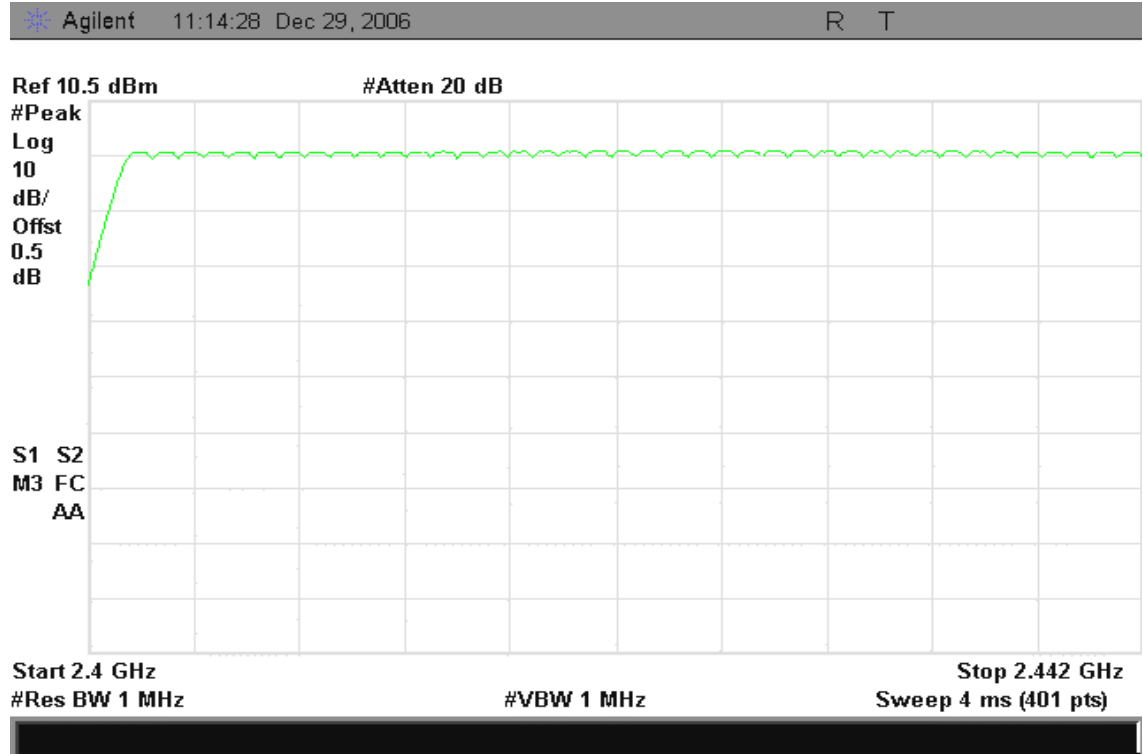

2.441 GHz – 2.4835 GHz

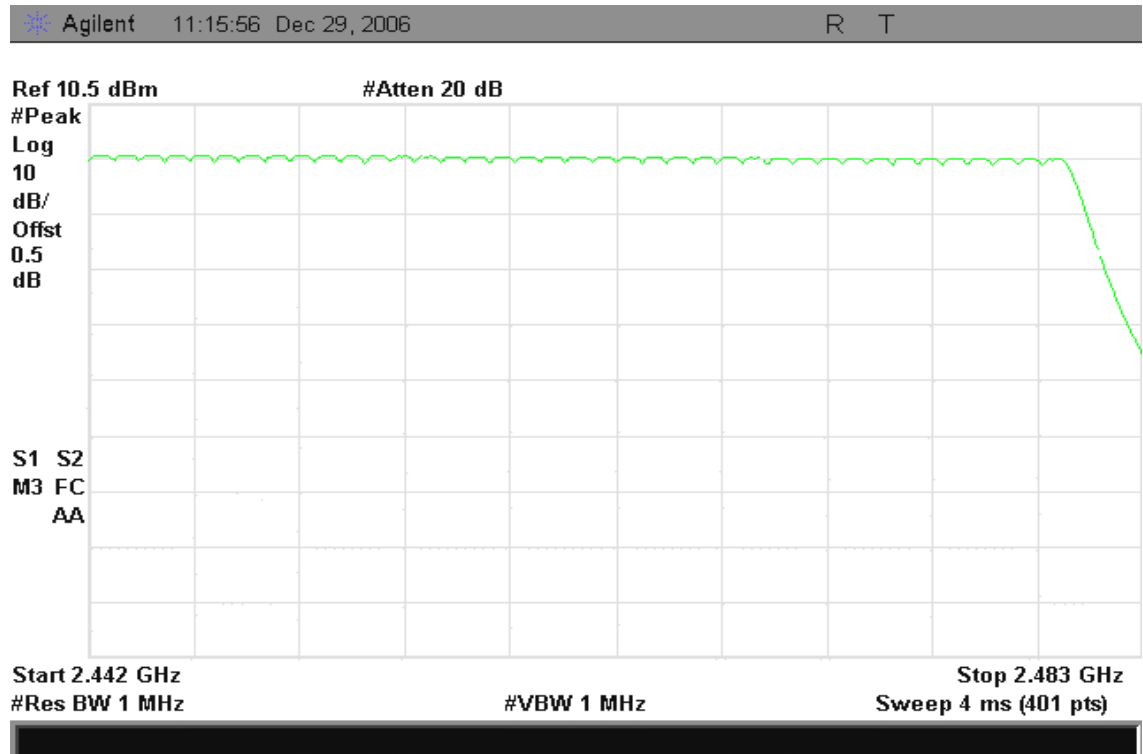



7.13 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

TEST RESULTS


No non-compliance noted

Average time of occupancy = $10 * 33 * 412.5\mu\text{s}$
= $10 * 33 * 0.0004125 \text{ s}$
= 0.13 s




Test Plot

Pulse width

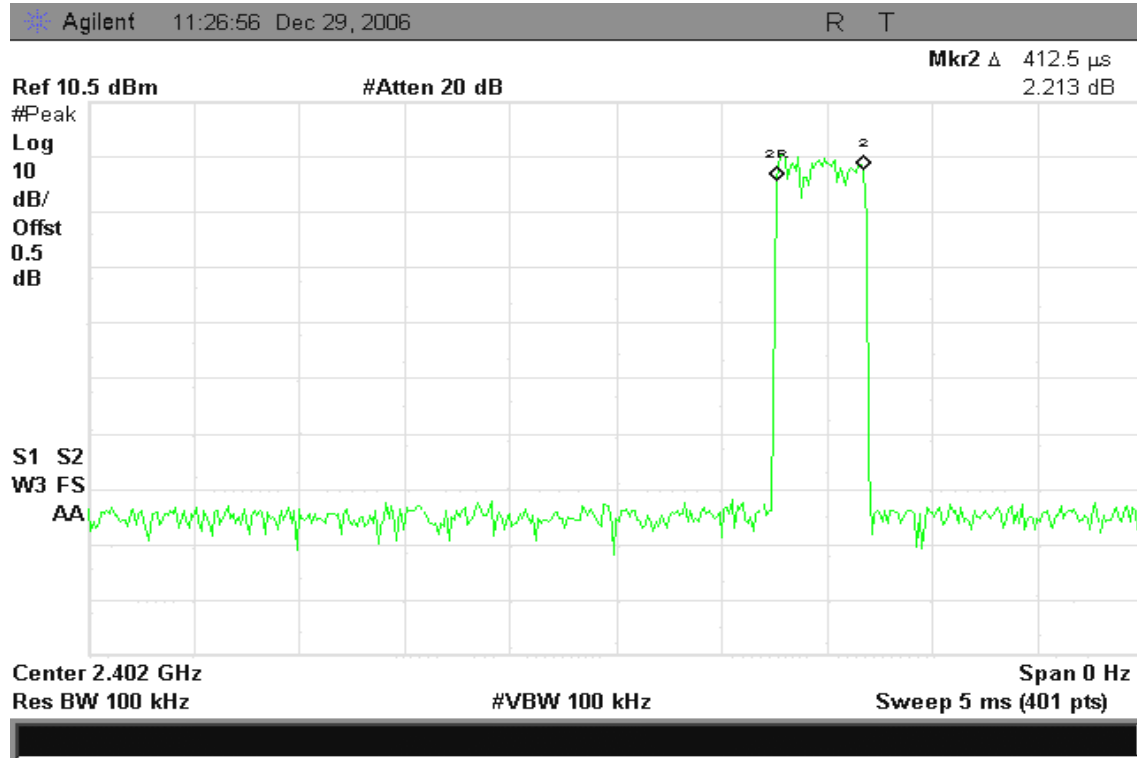

Number of pulses in 3.16 second observation period

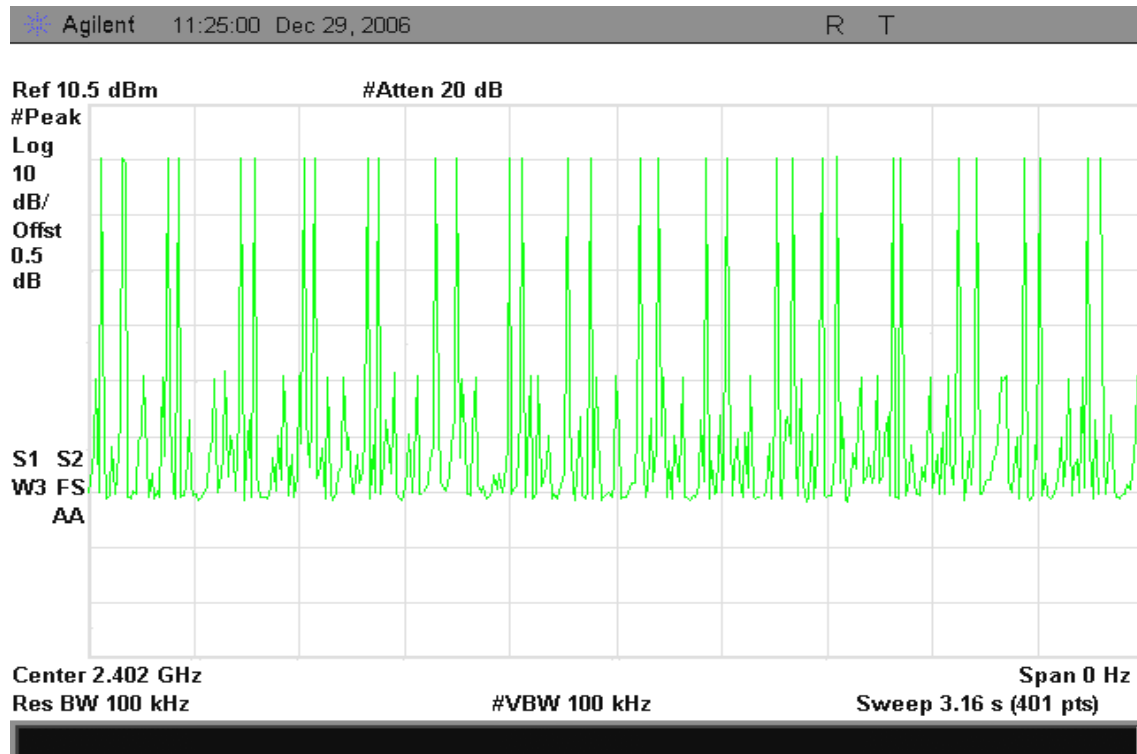


7.14 SPURIOUS EMISSIONS

7.14.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted




Test Plot

CH Low

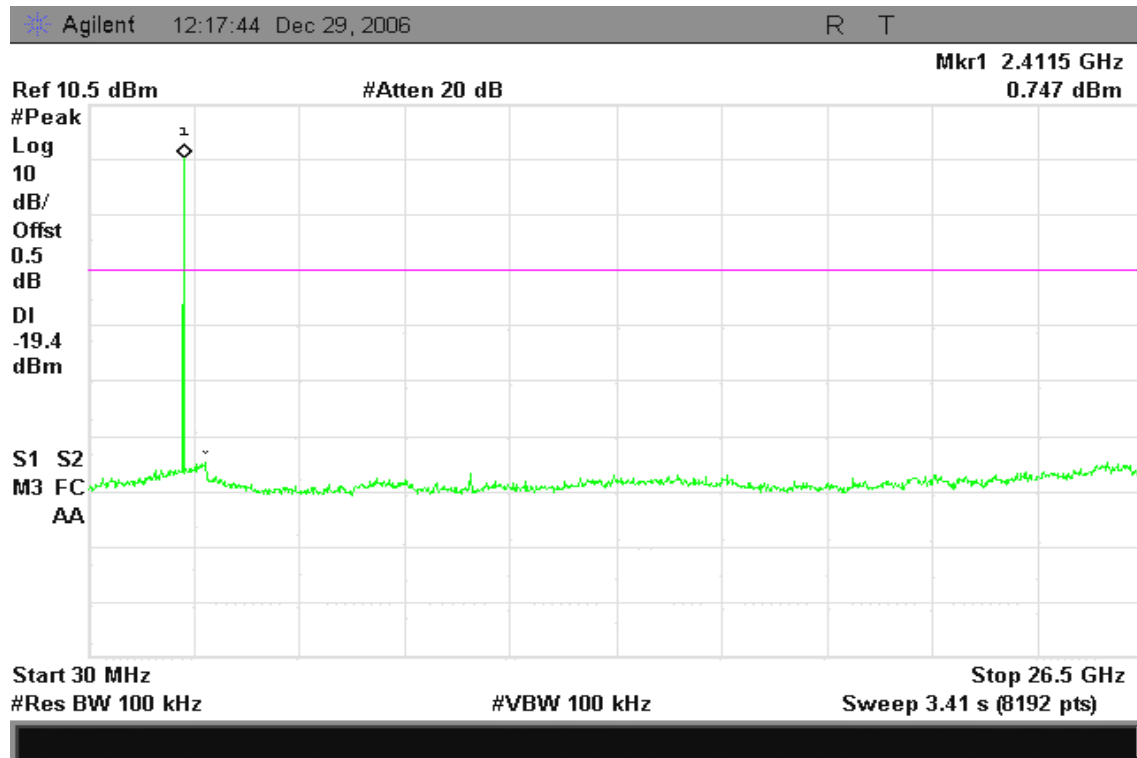


CH Mid

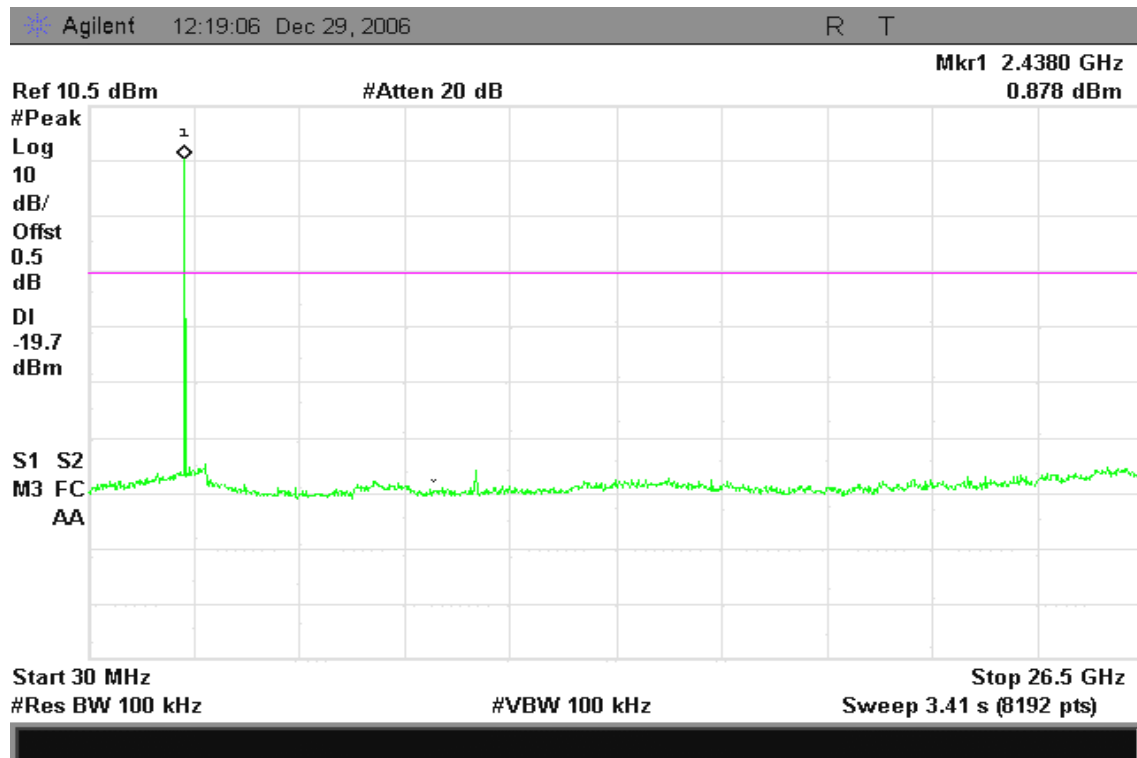



CH High

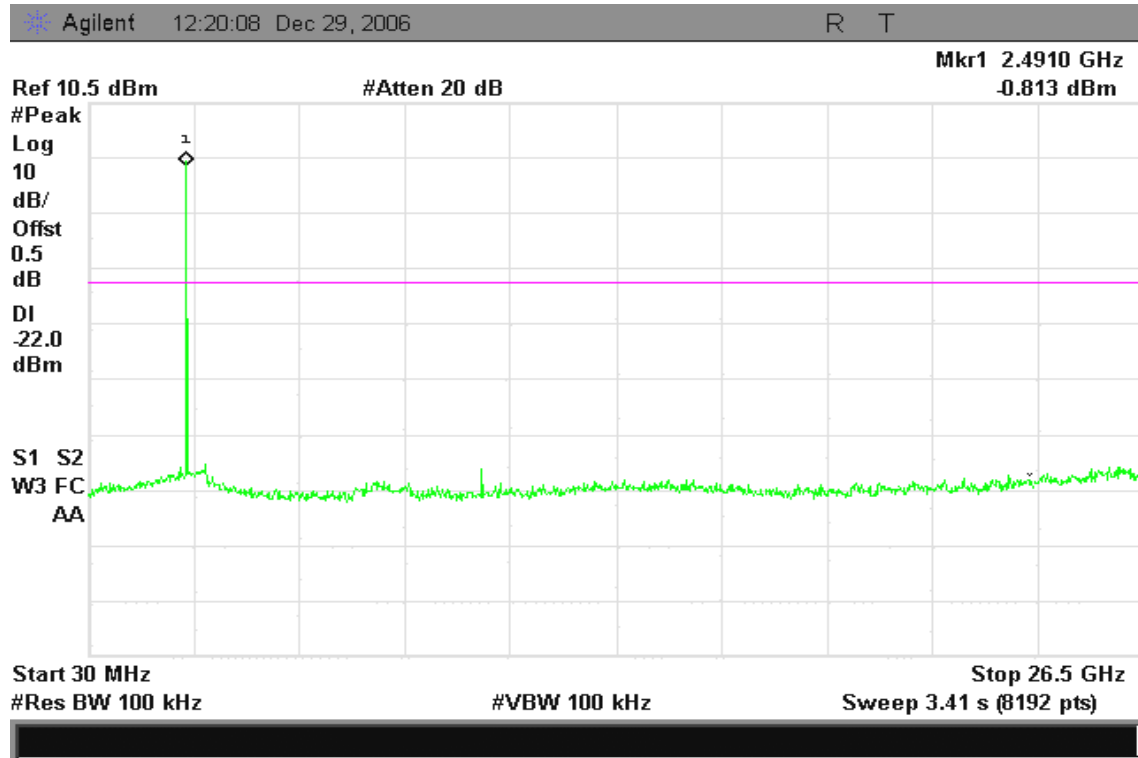



7.14.1 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength (dB $\mu\text{V/m}$ at 3-meter) |
|-----------------|--|--|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

Below 1 GHz

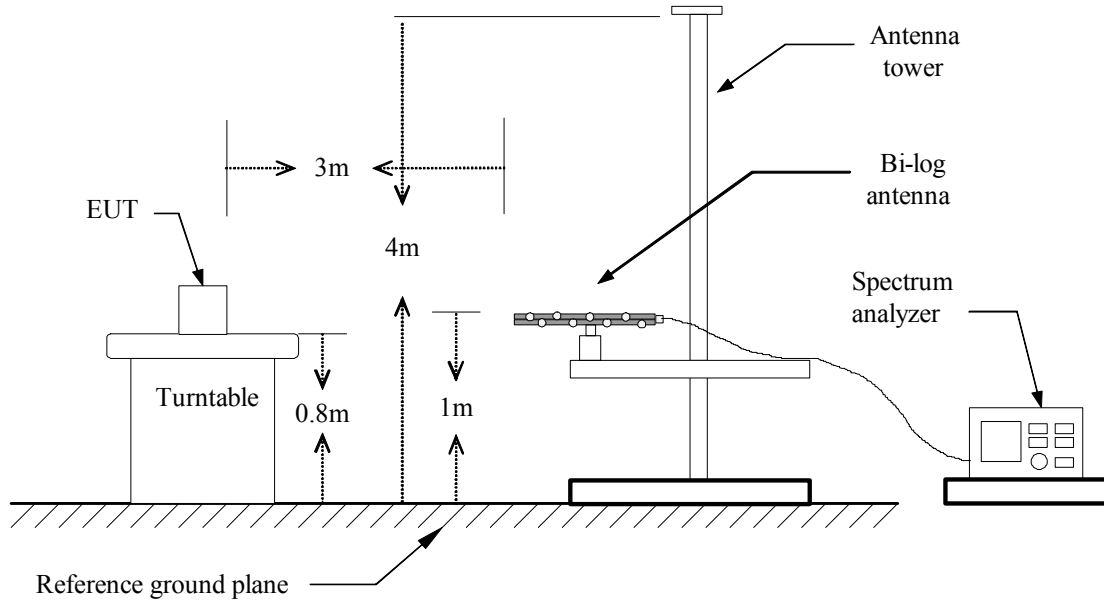

Above 1 GHz

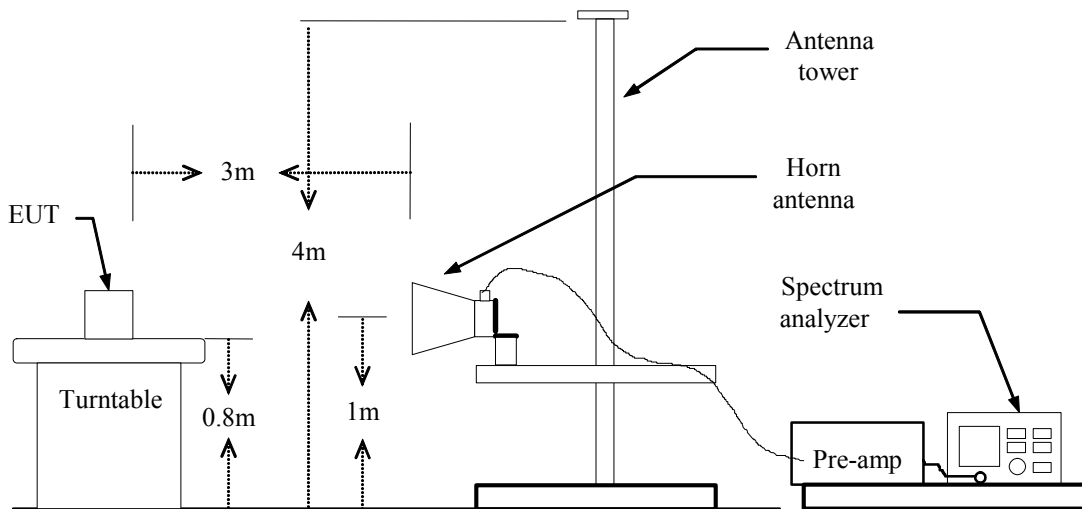



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(e) PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO



BLUETOOTH OPERATION

Above 1 GHz

Operation Mode: Bluetooth / TX / CH Low

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1875.00 | V | 41.02 | --- | 1.93 | 42.96 | --- | 74.00 | 54.00 | -11.04 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1886.67 | H | 40.96 | --- | 2.02 | 42.98 | --- | 74.00 | 54.00 | -11.02 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Bluetooth / TX / CH Mid

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1886.67 | V | 41.93 | --- | 2.02 | 43.96 | --- | 74.00 | 54.00 | -10.04 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1875.00 | H | 41.46 | --- | 1.93 | 43.39 | --- | 74.00 | 54.00 | -10.61 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Bluetooth / TX / CH High

Test Date: December 26, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1641.67 | V | 41.72 | --- | 0.15 | 41.88 | --- | 74.00 | 54.00 | -12.12 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1898.33 | H | 40.90 | --- | 2.11 | 43.02 | --- | 74.00 | 54.00 | -10.98 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m)..



8. POWER LINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dBμV) | |
|-----------------------|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: Normal Link with charging **Test Date:** December 28, 2006
Temperature: 25°C **Tested by:** Skyman Tsai
Humidity: 55% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-------------|-------------------|-------------------|-------------------|------------------|------------------|-----------------|-----------------|----------------|----------------|------|
| 0.179 | 32.150 | 28.740 | 0.142 | 32.292 | 28.882 | 64.532 | 54.532 | -32.240 | -25.650 | L1 |
| 0.550 | 36.670 | 33.290 | 0.100 | 36.770 | 33.390 | 56.000 | 46.000 | -19.230 | -12.610 | L1 |
| 1.890 | 38.730 | 30.960 | 0.100 | 38.830 | 31.060 | 56.000 | 46.000 | -17.170 | -14.940 | L1 |
| 2.382 | 36.410 | 27.260 | 0.100 | 36.510 | 27.360 | 56.000 | 46.000 | -19.490 | -18.640 | L1 |
| 5.861 | 19.150 | 17.770 | 0.286 | 19.436 | 18.056 | 60.000 | 50.000 | -40.564 | -31.944 | L1 |
| 14.769 | 18.780 | 16.760 | 0.795 | 19.575 | 17.555 | 60.000 | 50.000 | -40.425 | -32.445 | L1 |
| 0.180 | 30.380 | 27.180 | 0.140 | 30.520 | 27.320 | 64.486 | 54.486 | -33.966 | -27.166 | L2 |
| 0.372 | 8.990 | 5.000 | 0.100 | 9.090 | 5.100 | 58.456 | 48.456 | -49.366 | -43.356 | L2 |
| 2.130 | 38.270 | 29.350 | 0.100 | 38.370 | 29.450 | 56.000 | 46.000 | -17.630 | -16.550 | L2 |
| 2.253 | 35.070 | 27.210 | 0.100 | 35.170 | 27.310 | 56.000 | 46.000 | -20.830 | -18.690 | L2 |
| 5.907 | 33.450 | 32.700 | 0.291 | 33.741 | 32.991 | 60.000 | 50.000 | -26.259 | -17.009 | L2 |
| 26.634 | 14.250 | 11.540 | 1.265 | 15.515 | 12.805 | 60.000 | 50.000 | -44.485 | -37.195 | L2 |


Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Data Plots

Conducted emissions (Line 1)

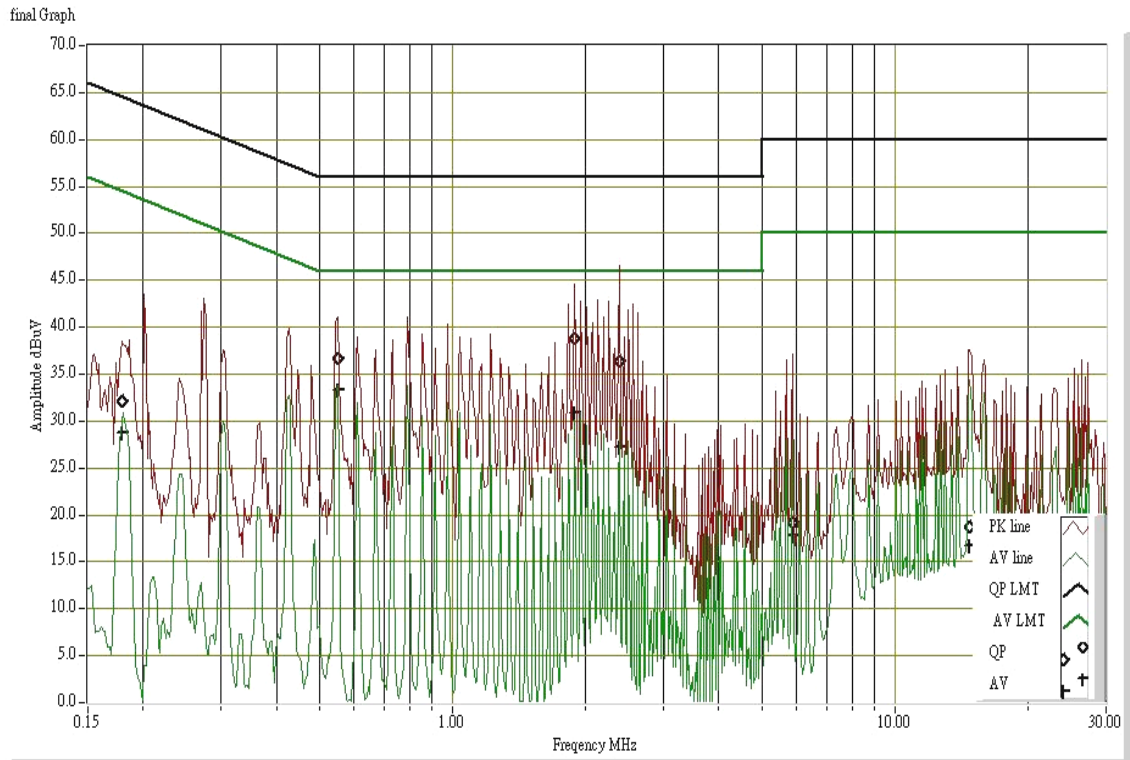

Conducted emissions (Line 2)

