

RE_Cheek_WLAN 802.11 g_CH6_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.071 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.50 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

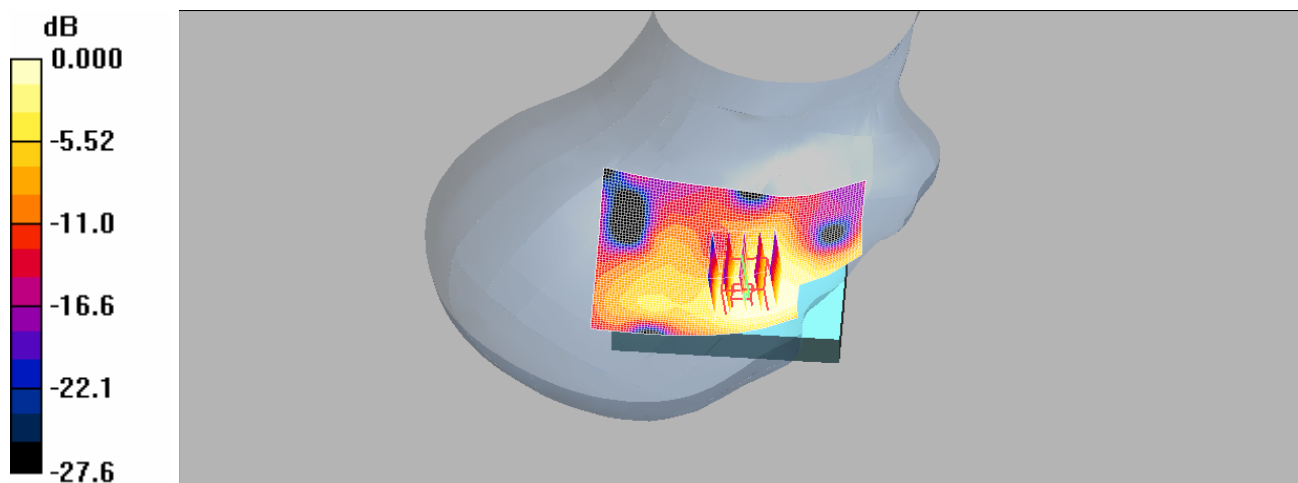

0 dB = 0.067mW/g

RE_Cheek_WLAN 802.11 g_CH11_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.068 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

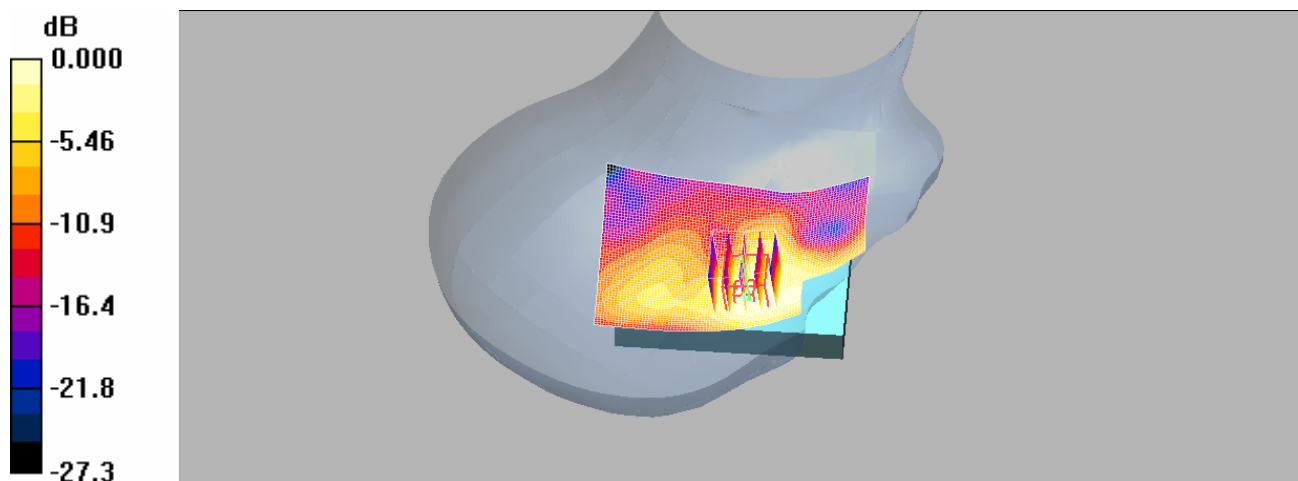

LE_Cheek_WLAN 802.11 g_CH1_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.122 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.42 V/m; Power Drift = 0.040 dB
Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.107 mW/g

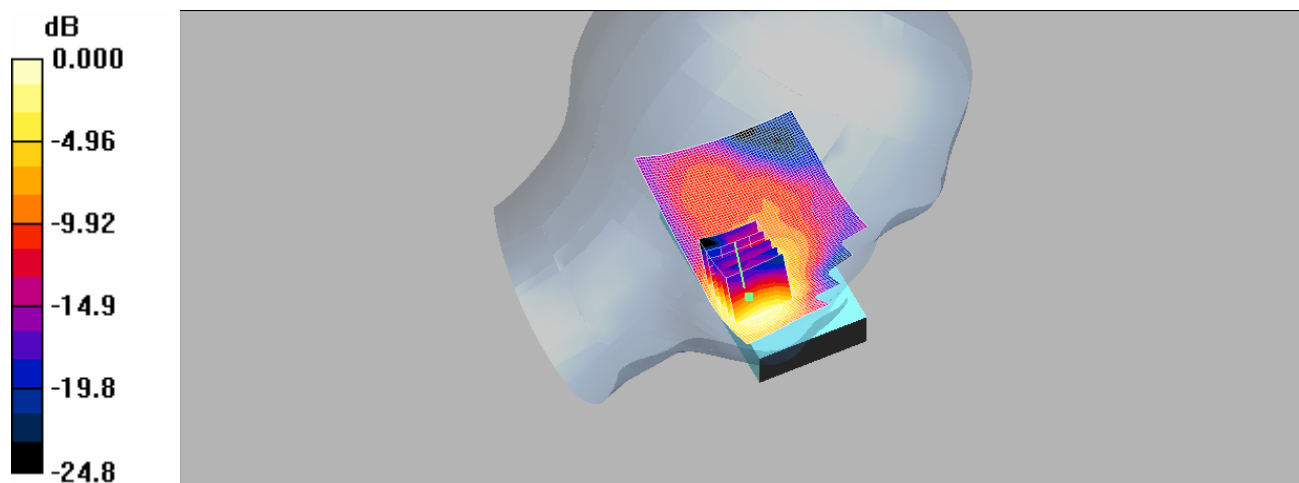

0 dB = 0.107mW/g

LE_Cheek_WLAN 802.11 g_CH6_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.136 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.32 V/m; Power Drift = 0.168 dB
Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.060 mW/g
Maximum value of SAR (measured) = 0.122 mW/g

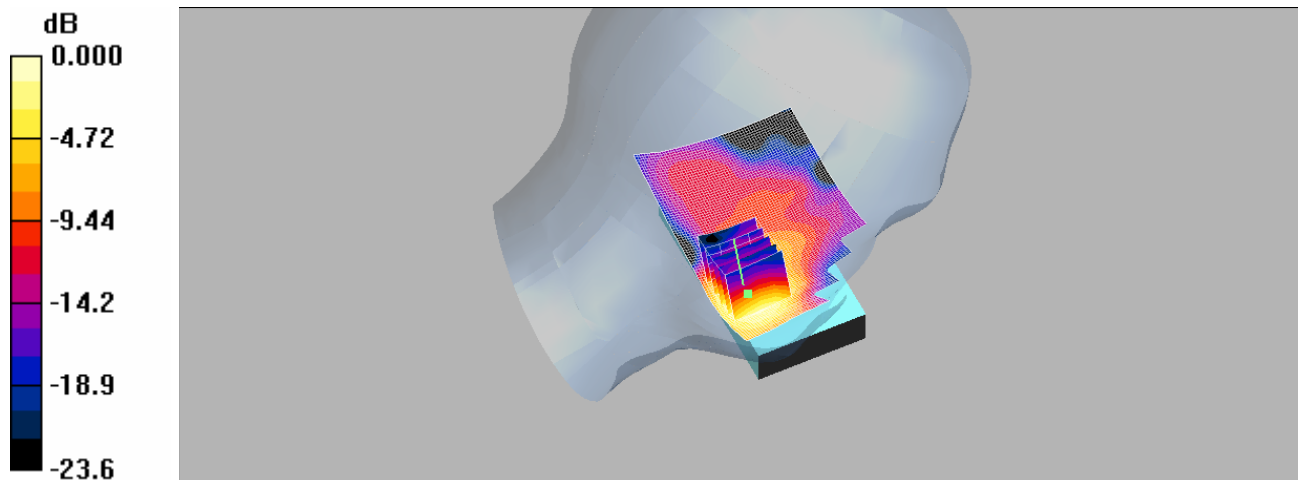

0 dB = 0.122mW/g

LE_Cheek_WLAN 802.11 g_CH11_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.126 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.18 V/m; Power Drift = 0.122 dB
Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.114 mW/g

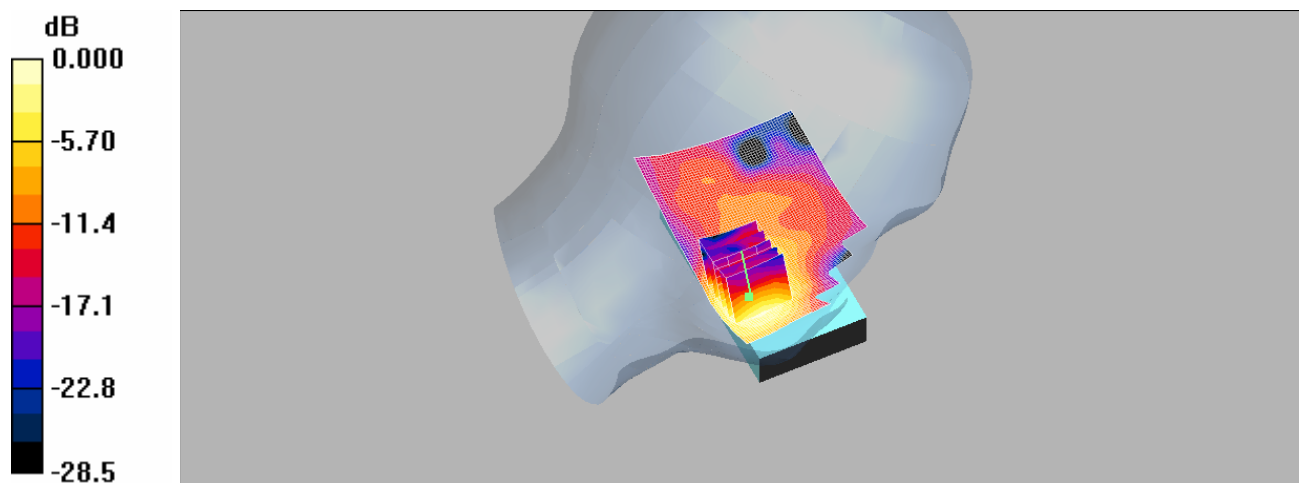

0 dB = 0.114mW/g

RE_Tilt_WLAN 802.11 g_CH1_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.032 mW/g


RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.68 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.051 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

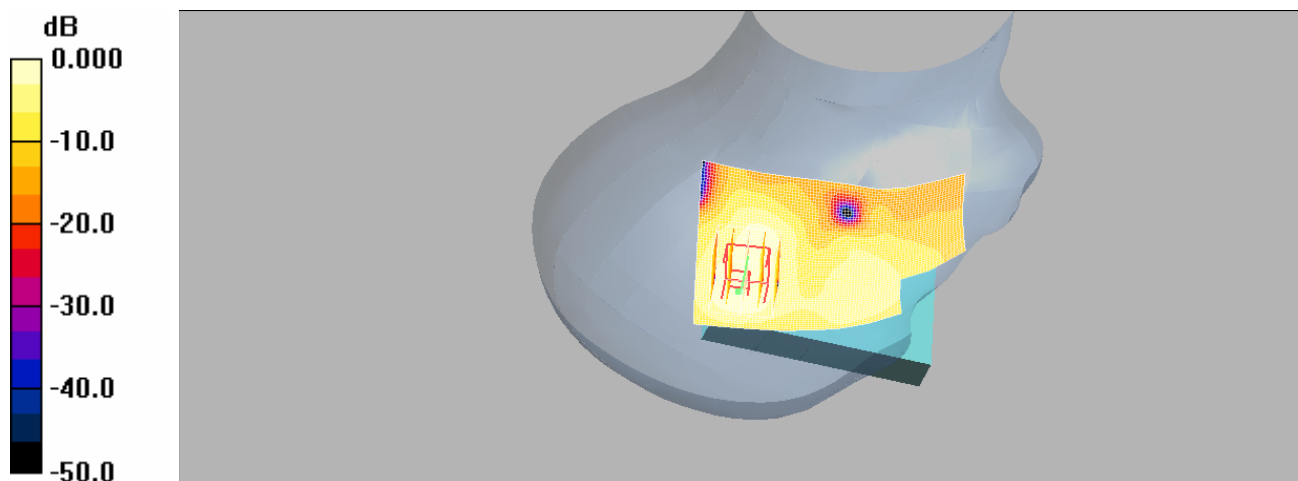

0 dB = 0.033mW/g

RE_Tilt_WLAN 802.11 g_CH6_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.042 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.28 V/m; Power Drift = -0.197 dB
Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.042 mW/g

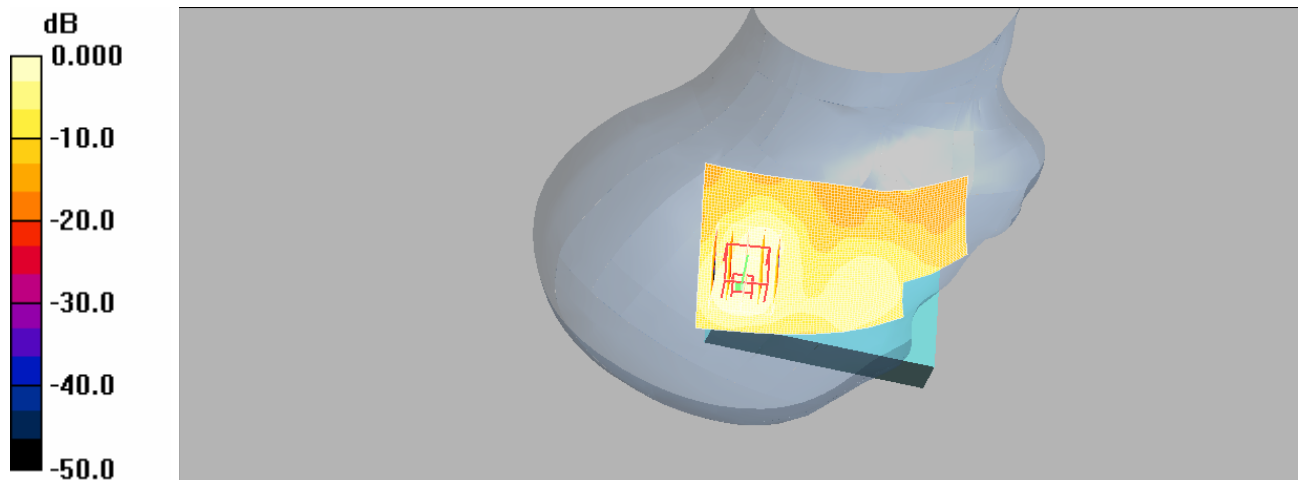

0 dB = 0.042mW/g

RE_Tilt_WLAN 802.11 g_CH11_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.029 mW/g


RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.37 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

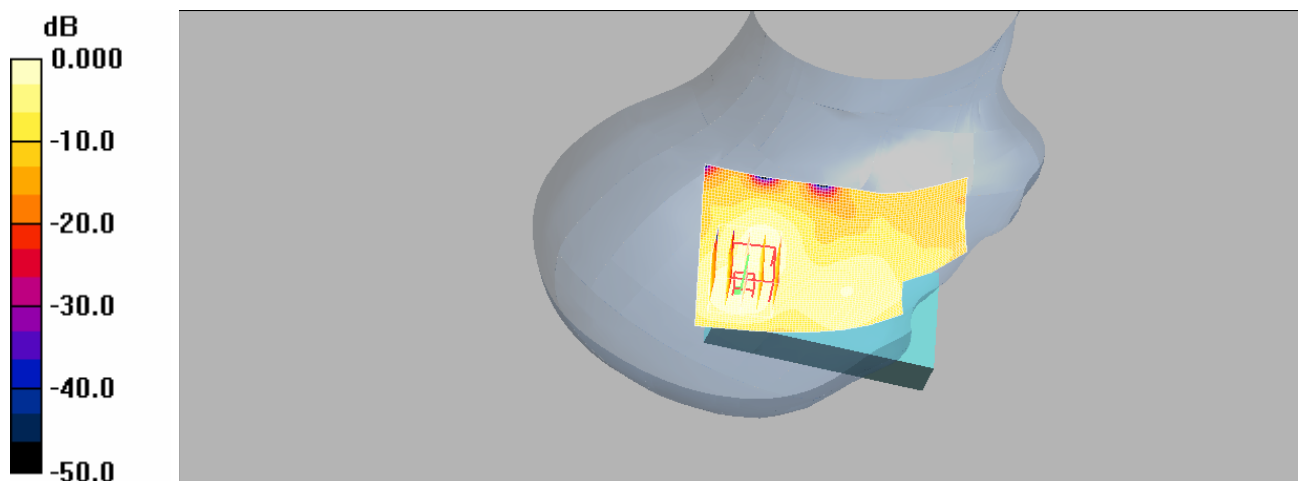

0 dB = 0.030mW/g

LE_Tilt_WLAN 802.11 g_CH1_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.038 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.44 V/m; Power Drift = 0.125 dB
Peak SAR (extrapolated) = 0.067 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.035 mW/g

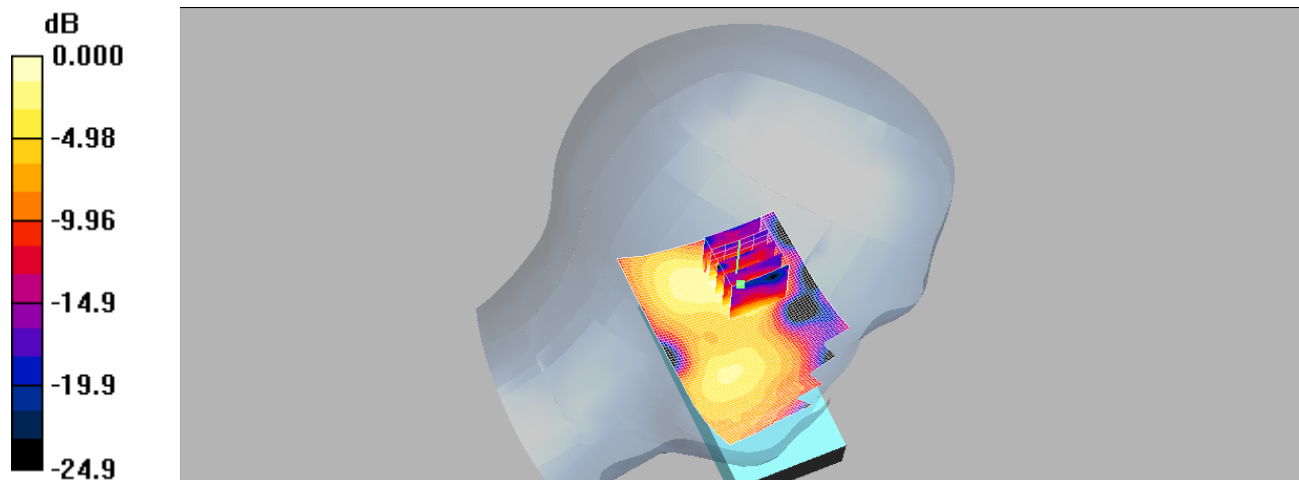

LE_Tilt_WLAN 802.11 g_CH6_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.051 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.70 V/m; Power Drift = 0.163 dB
Peak SAR (extrapolated) = 0.085 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.020 mW/g
Maximum value of SAR (measured) = 0.044 mW/g

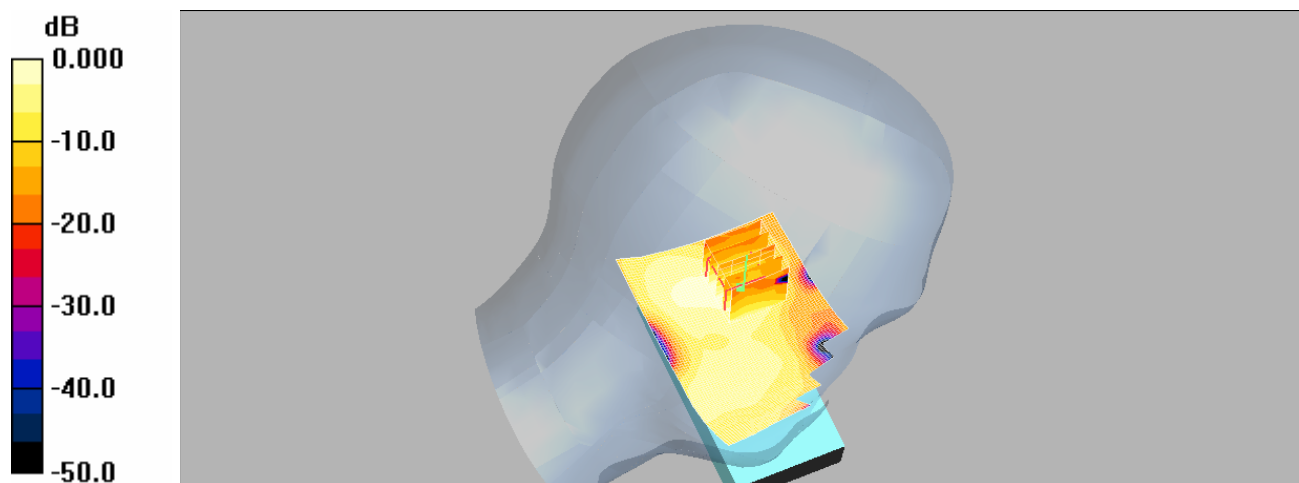

LE_Tilt_WLAN 802.11 g_CH11_Slider off

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.051 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.68 V/m; Power Drift = 0.062 dB
Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.020 mW/g
Maximum value of SAR (measured) = 0.042 mW/g

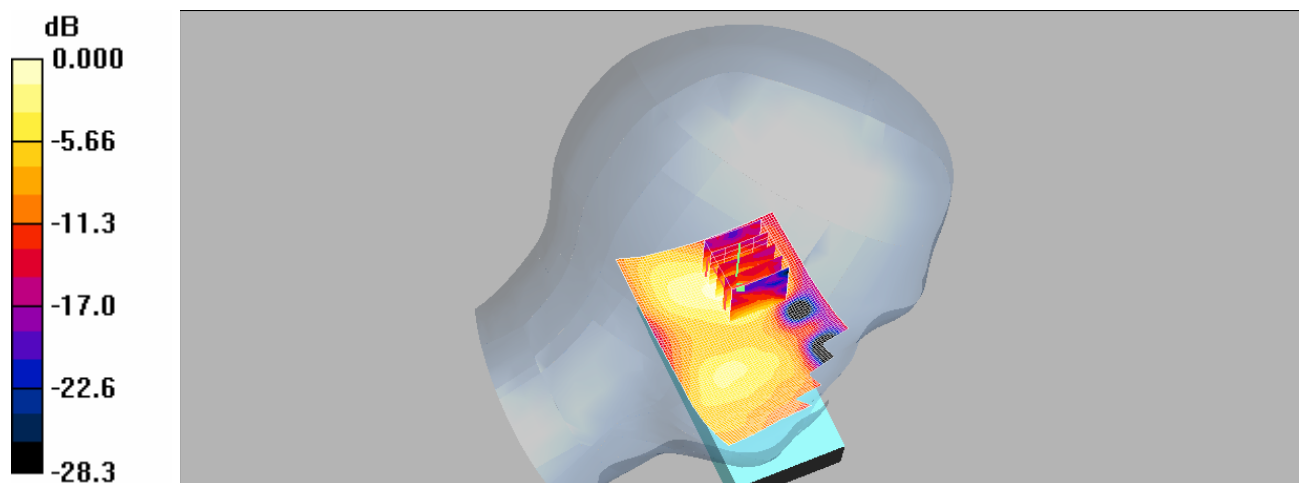

0 dB = 0.042mW/g

Re_Cheek_WLAN 802.11 g_CH1_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.070 mW/g


Re_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.30 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.073 mW/g

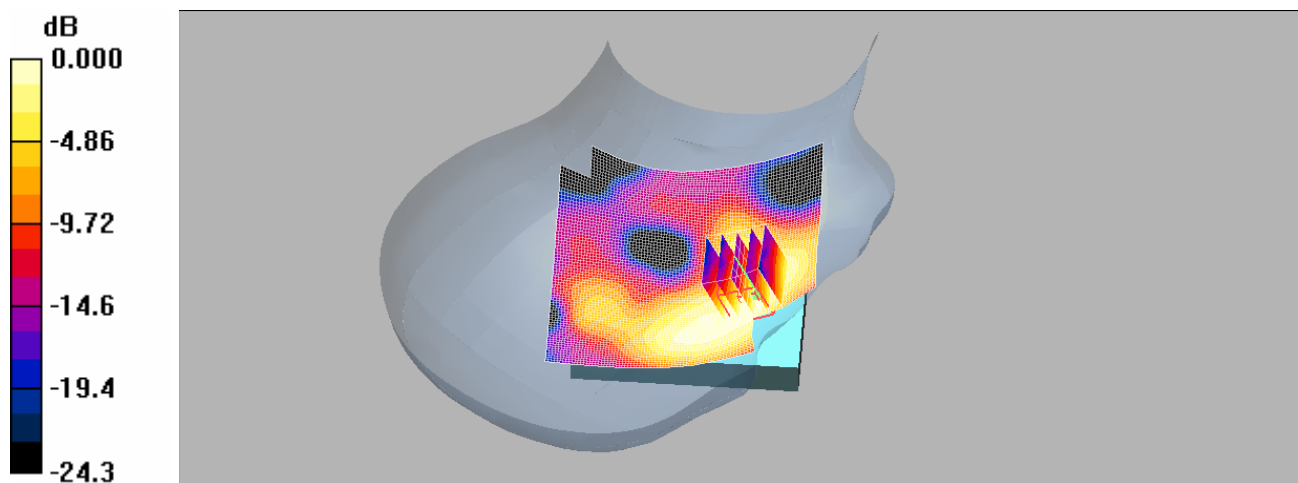

Re_Cheek_WLAN 802.11 g_CH6_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.074 mW/g

Re_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.67 V/m; Power Drift = 0.152 dB
Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.039 mW/g
Maximum value of SAR (measured) = 0.079 mW/g

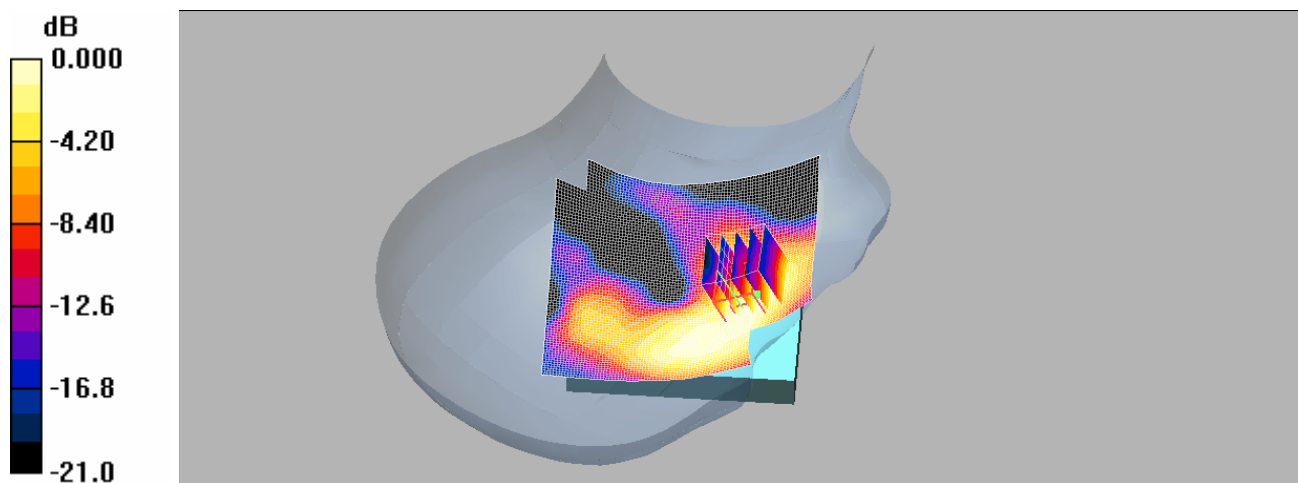

0 dB = 0.079mW/g

Re_Cheek_WLAN 802.11 g_CH11_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.057 mW/g

Re_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.34 V/m; Power Drift = 0.129 dB
Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.030 mW/g
Maximum value of SAR (measured) = 0.061 mW/g

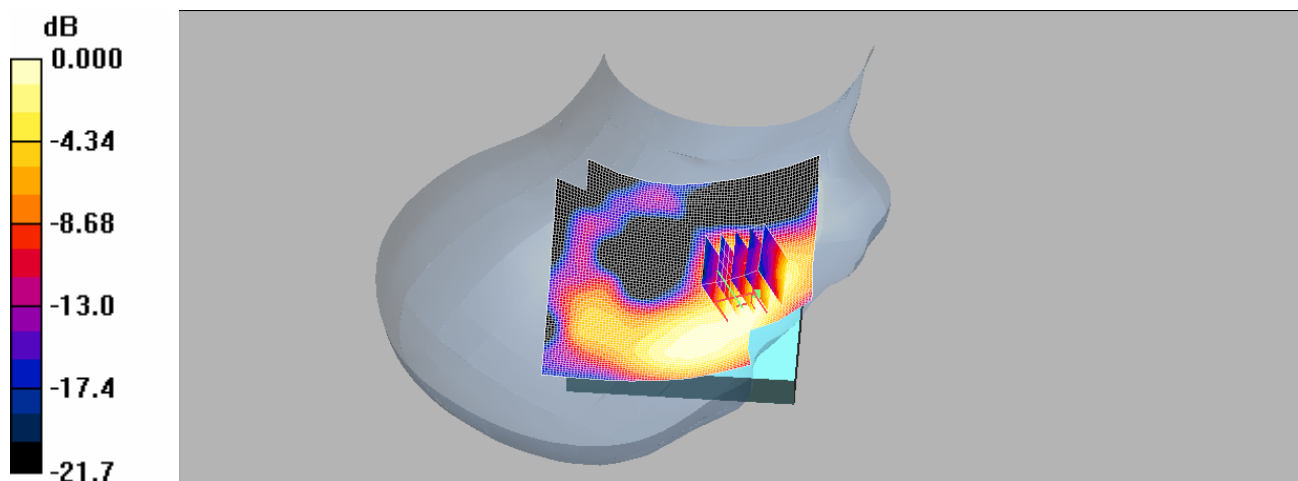

0 dB = 0.061mW/g

Le_Cheek_WLAN 802.11 g_CH1_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.130 mW/g

Le_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.01 V/m; Power Drift = 0.089 dB
Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.062 mW/g
Maximum value of SAR (measured) = 0.137 mW/g

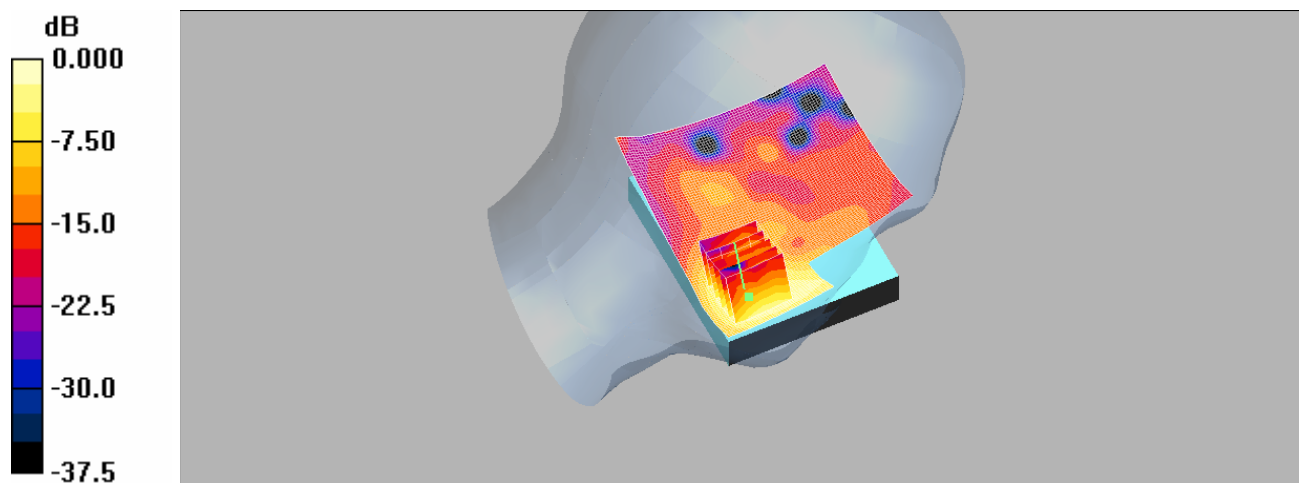

0 dB = 0.137mW/g

Le_Cheek_WLAN 802.11 g_CH6_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.144 mW/g

Le_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.95 V/m; Power Drift = 0.093 dB
Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.148 mW/g

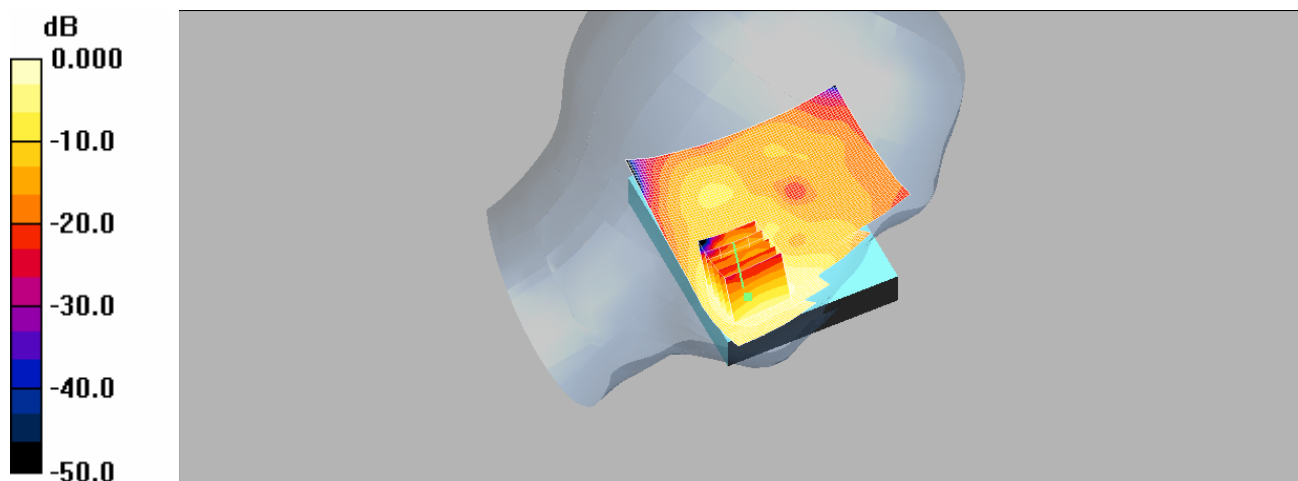

0 dB = 0.148mW/g

Le_Cheek_WLAN 802.11 g_CH11_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.118 mW/g

Le_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.69 V/m; Power Drift = -0.166 dB
Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.116 mW/g

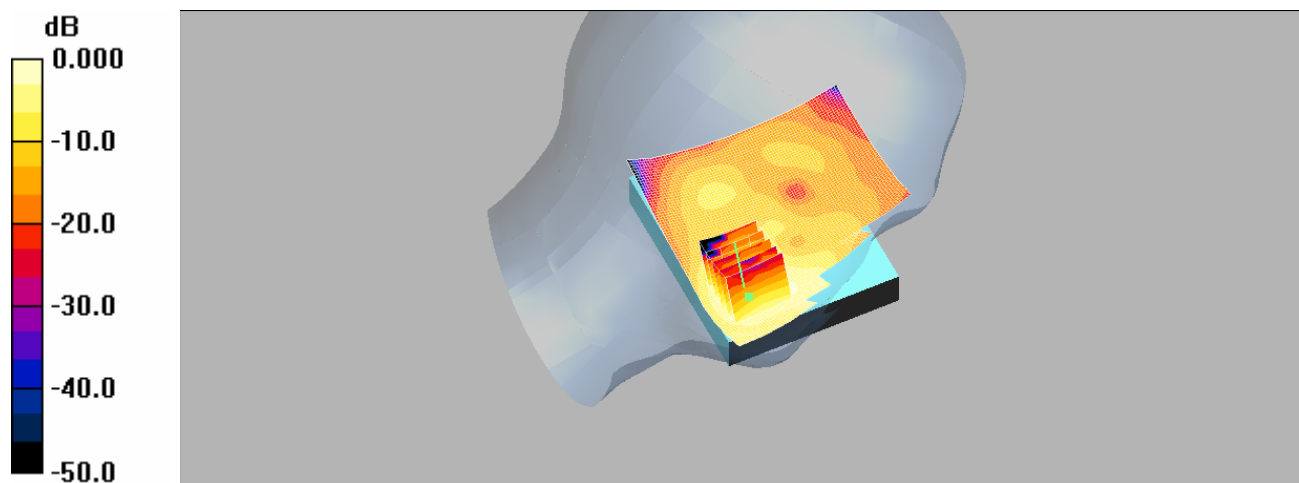

Re_Tilt_WLAN 802.11 g_CH1_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.068 mW/g

Re_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.71 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.026 mW/g
Maximum value of SAR (measured) = 0.061 mW/g

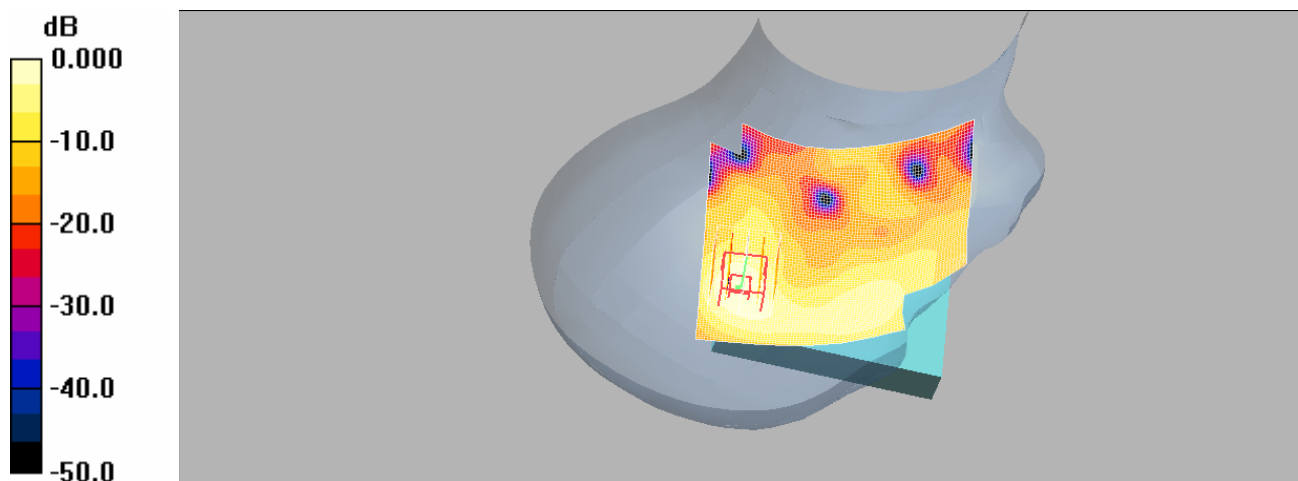

0 dB = 0.061mW/g

Re_Tilt_WLAN 802.11 g_CH6_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.075 mW/g

Re_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.86 V/m; Power Drift = 0.002 dB
Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.031 mW/g
Maximum value of SAR (measured) = 0.070 mW/g

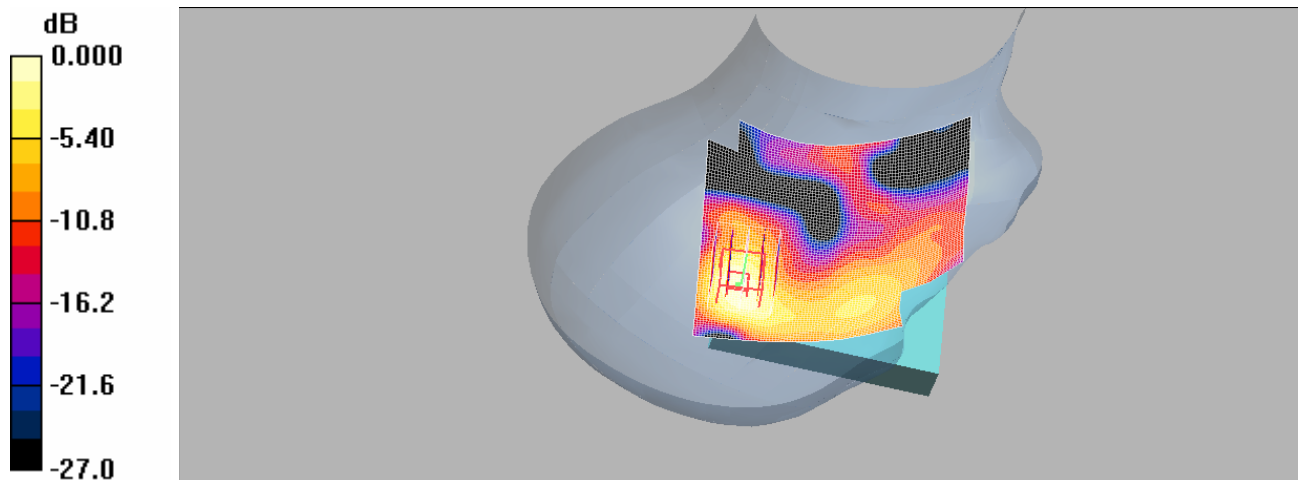

0 dB = 0.070mW/g

Re_Tilt_WLAN 802.11 g_CH11_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.057 mW/g

Re_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.08 V/m; Power Drift = -0.065 dB
Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.023 mW/g
Maximum value of SAR (measured) = 0.054 mW/g

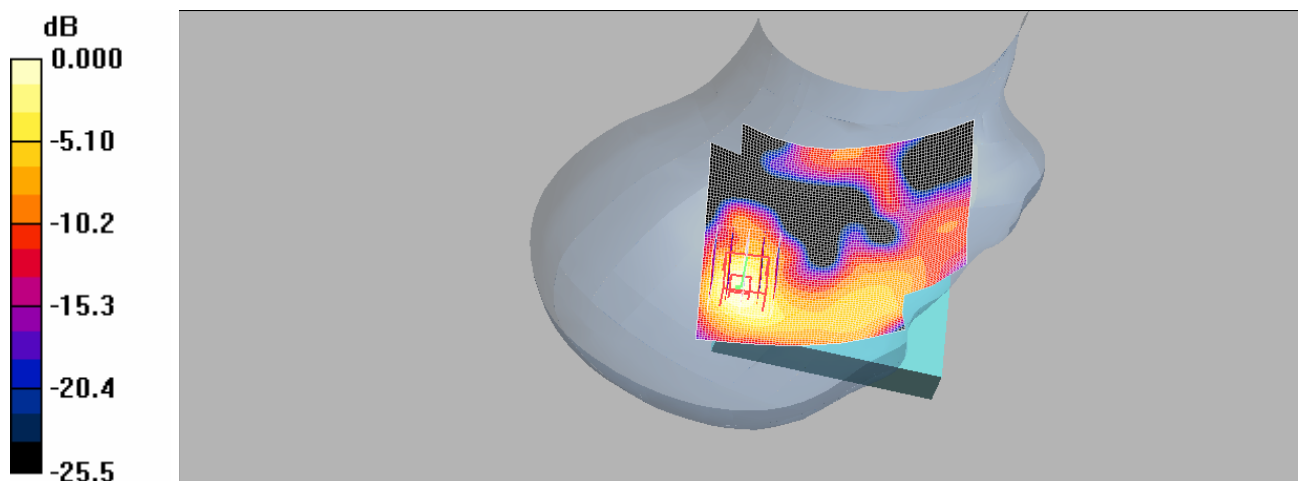

0 dB = 0.054mW/g

Le_Tilt_WLAN 802.11 g_CH1_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.050 mW/g

Le_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.99 V/m; Power Drift = 0.119 dB
Peak SAR (extrapolated) = 0.089 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.021 mW/g
Maximum value of SAR (measured) = 0.051 mW/g

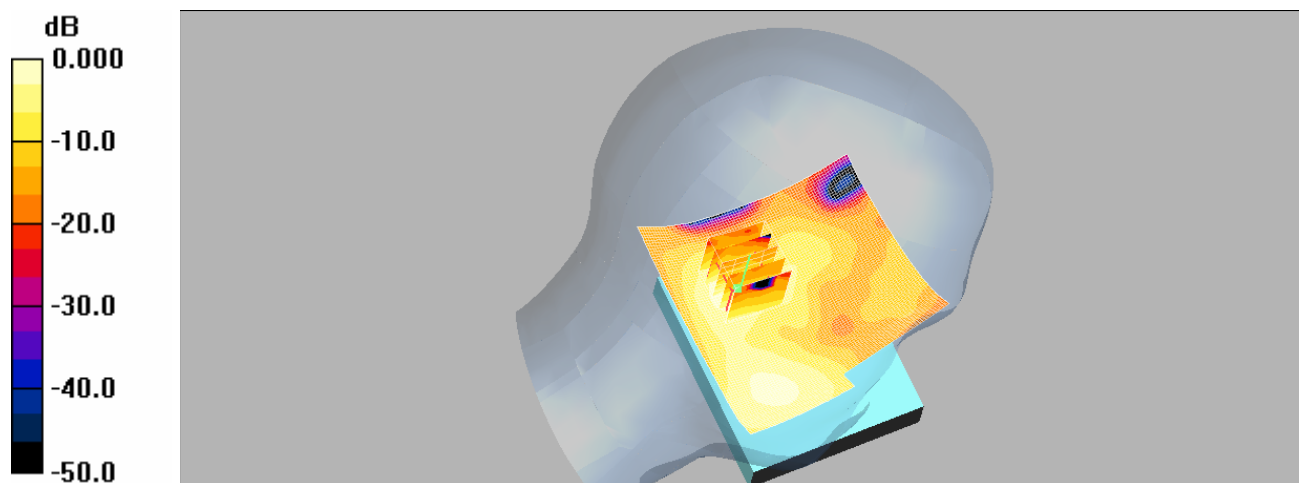

0 dB = 0.051mW/g

Le_Tilt_WLAN 802.11 g_CH6_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.057 mW/g

Le_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.51 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.023 mW/g
Maximum value of SAR (measured) = 0.054 mW/g

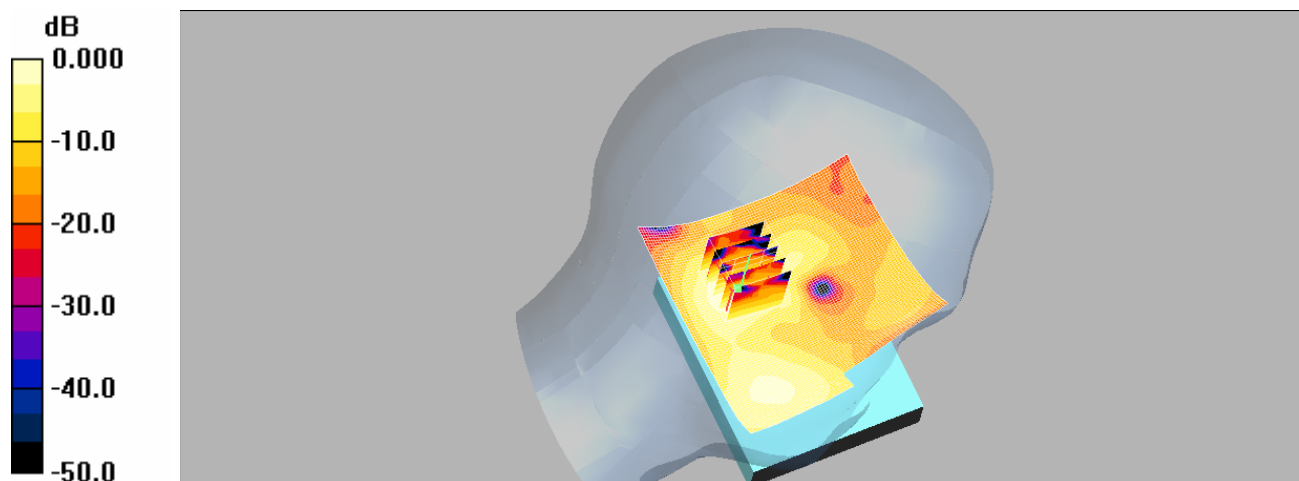

0 dB = 0.054mW/g

Le_Tilt_WLAN 802.11 g_CH11_Slider on

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.037 mW/g

Le_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.22 V/m; Power Drift = 0.135 dB
Peak SAR (extrapolated) = 0.044 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.039 mW/g

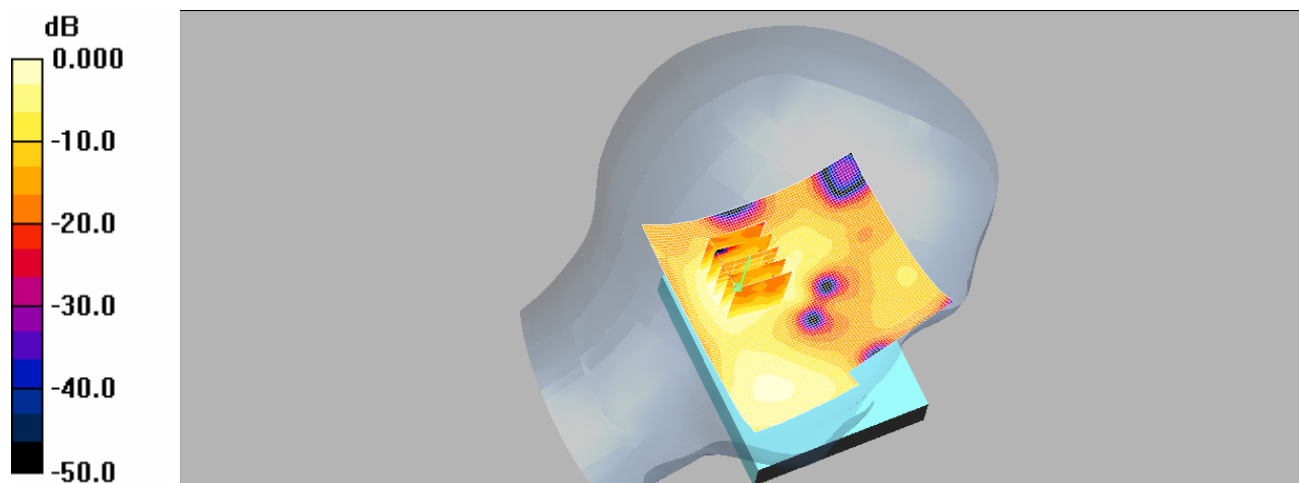

Re_Cheek_WLAN 802.11 g_CH11_Hold up

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Re_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.040 mW/g

Re_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.58 V/m; Power Drift = 0.167 dB
Peak SAR (extrapolated) = 0.061 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.036 mW/g

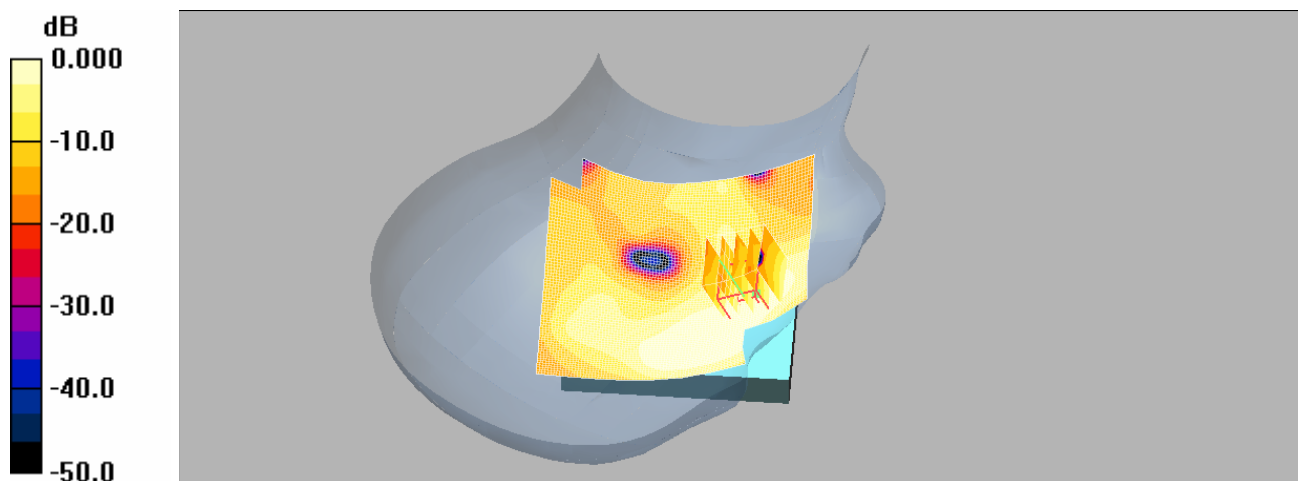

Le_Cheek_WLAN 802.11 g_CH11_Hlod up

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Le_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.104 mW/g

Le_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.05 V/m; Power Drift = 0112 dB
Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.048 mW/g
Maximum value of SAR (measured) = 0.101 mW/g

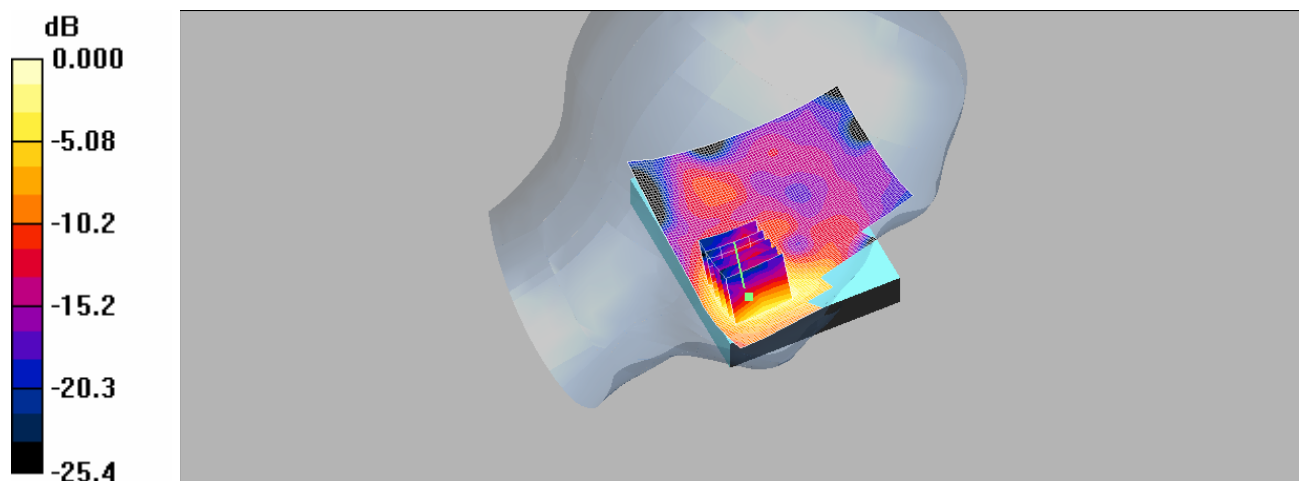

0 dB = 0.101mW/g

BODY_WLAN 802.11 g_CH1

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.1$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.175 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 2.99 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.079 mW/g
Maximum value of SAR (measured) = 0.166 mW/g

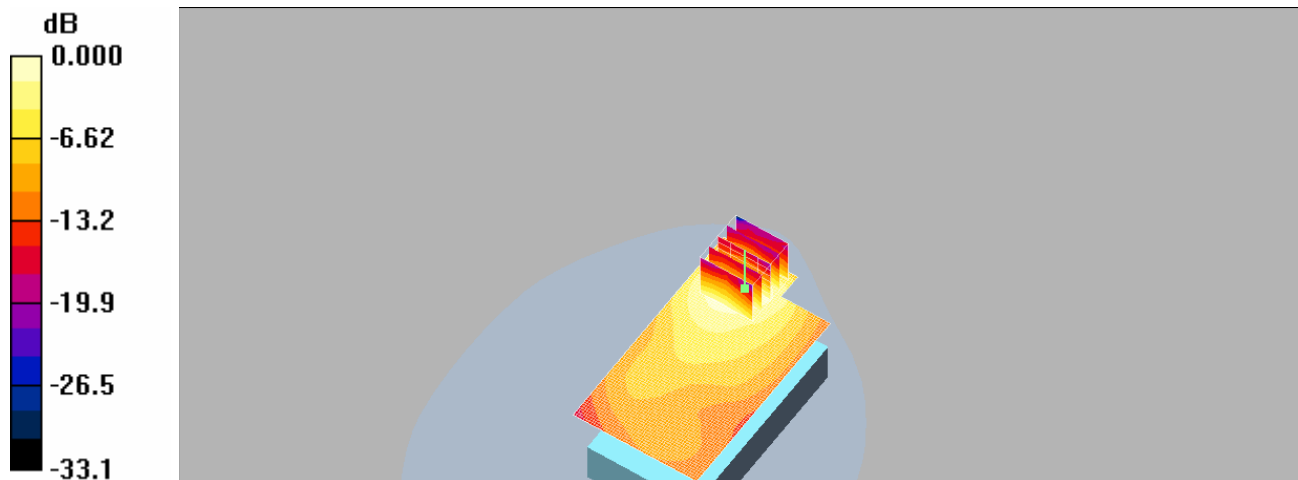

0 dB = 0.166mW/g

BODY_WLAN 802.11 g_CH6

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.184 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.93 V/m; Power Drift = 0.185 dB
Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.085 mW/g
Maximum value of SAR (measured) = 0.179 mW/g

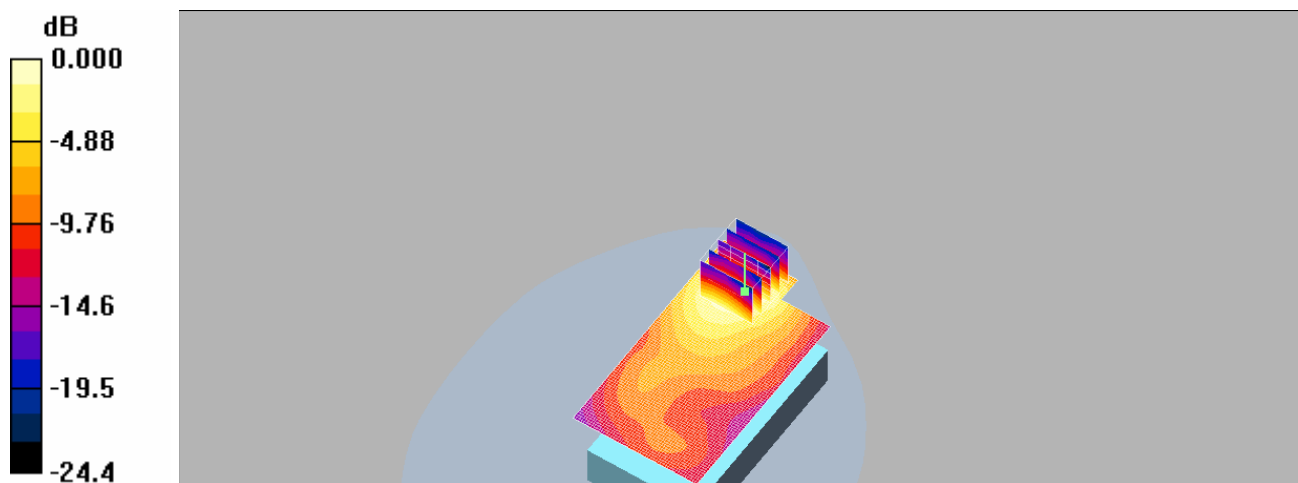

0 dB = 0.179mW/g

BODY_WLAN 802.11 g_CH11

DUT: Kais140; TypeWLAN 802.11;IMEI: 35972801001016601

Communication System: Wireless LAN; Frequency: 2462 MHz;Duty Cycle: 1:1Medium:
Muscle 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.172 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.88 V/m; Power Drift = 0.197 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

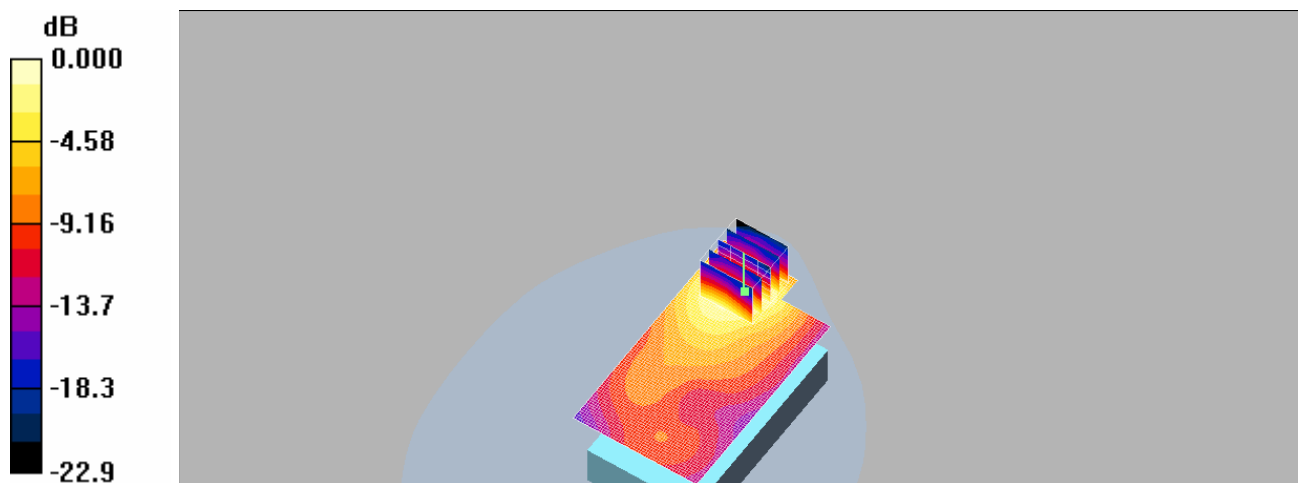

0 dB = 0.172mW/g

BODY_CH251

DUT: Kais140; Type:GSM;IMEI: 35972801001008301

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.56 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 16.6 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.5 mW/g; SAR(10 g) = 1.09 mW/g

Maximum value of SAR (measured) = 1.59 mW/g

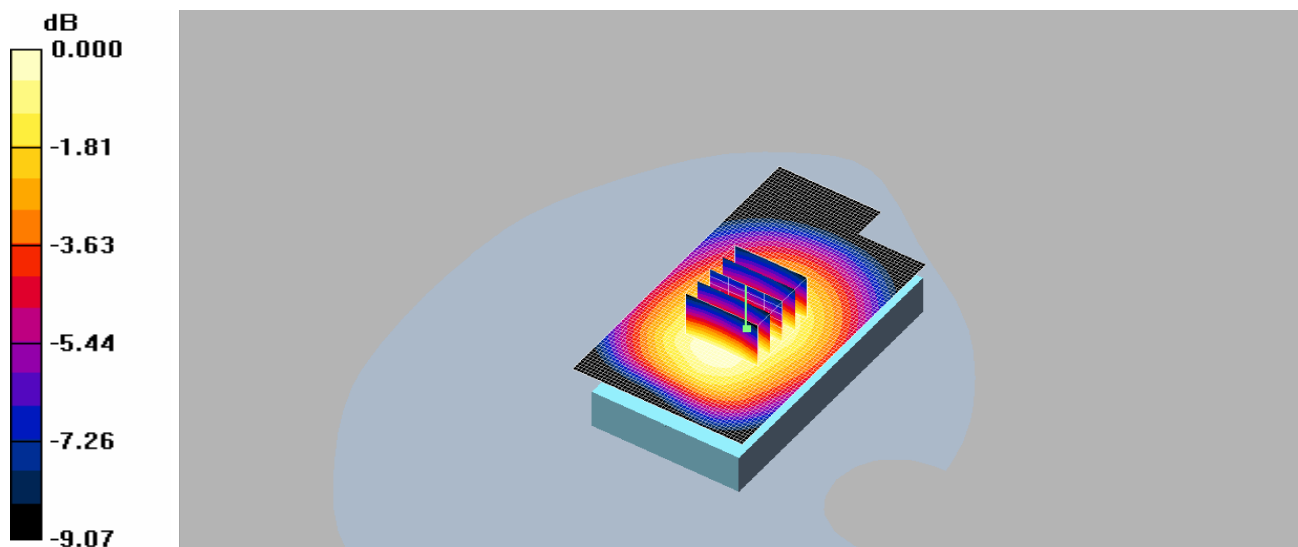

0 dB = 1.59mW/g

BODY_CH661

DUT: Kais140; Type:GSM;IMEI: 35972801001008301

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 55$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 23.0 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.985 mW/g; SAR(10 g) = 0.562 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

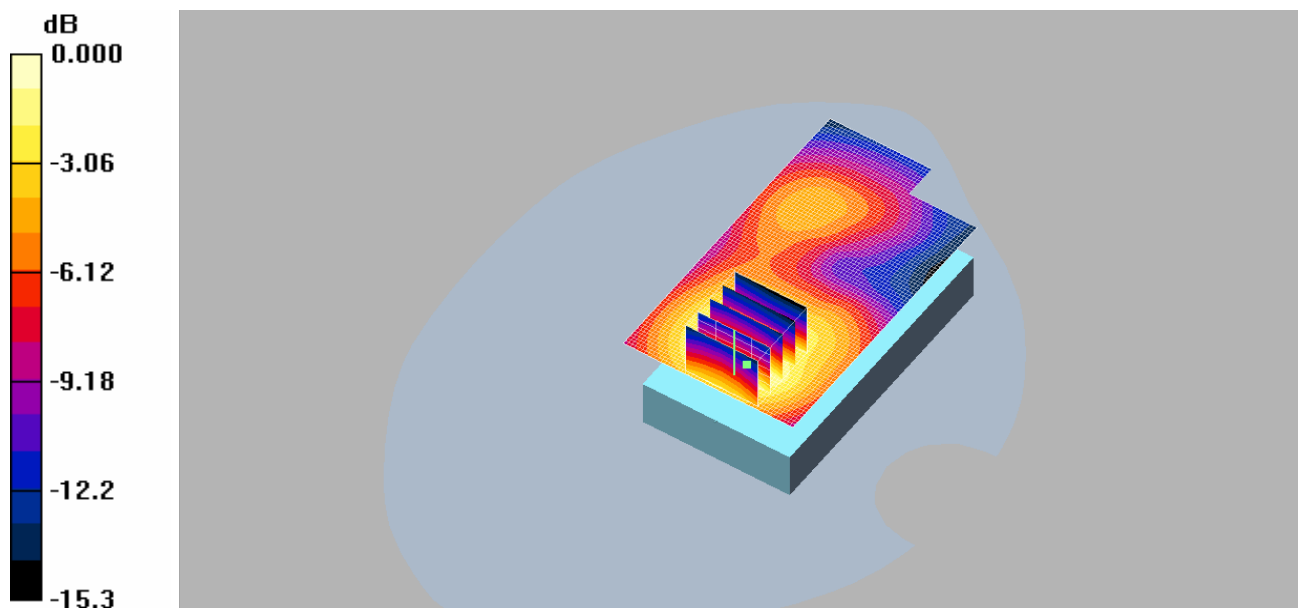

0 dB = 1.03mW/g

BODY_WLAN 802.11 b_CH6

DUT: Kais140; Type: WLAN 802.11;IMEI: 35972801001008301

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.728 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.92 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 0.709 mW/g

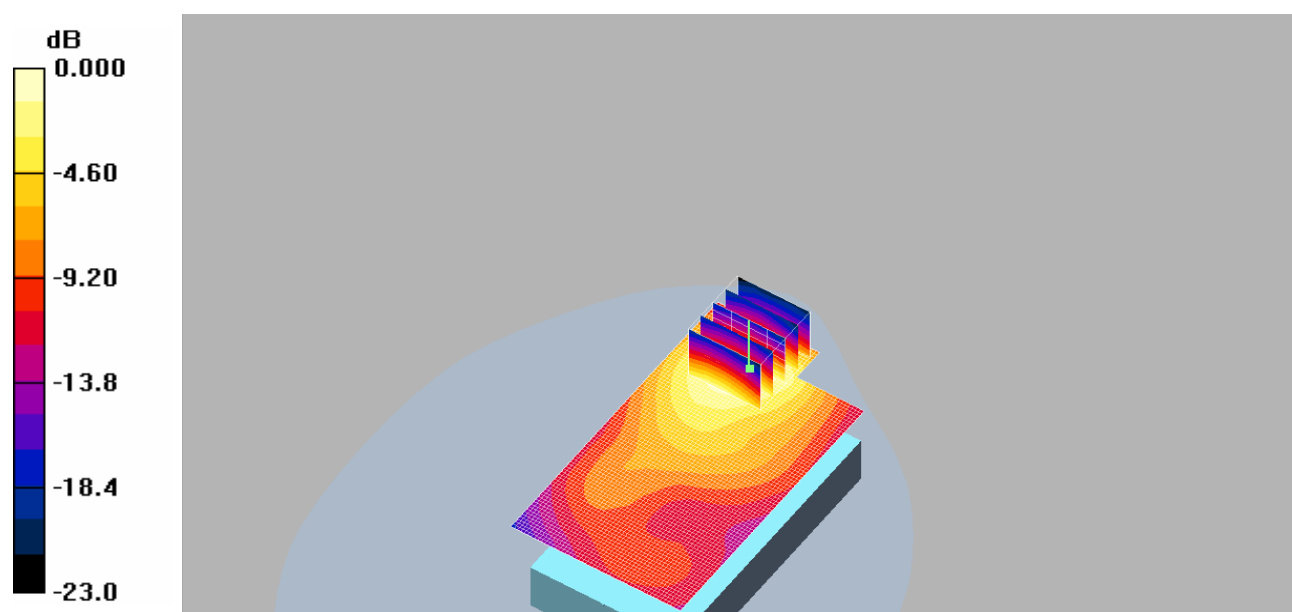

0 dB = 0.709mW/g

BODY_WLAN 802.11 g_CH6

DUT: Kais140; Type:WLAN 802.11;IMEI: 35972801001008301

Communication System: Wireless LAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.215 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.08 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

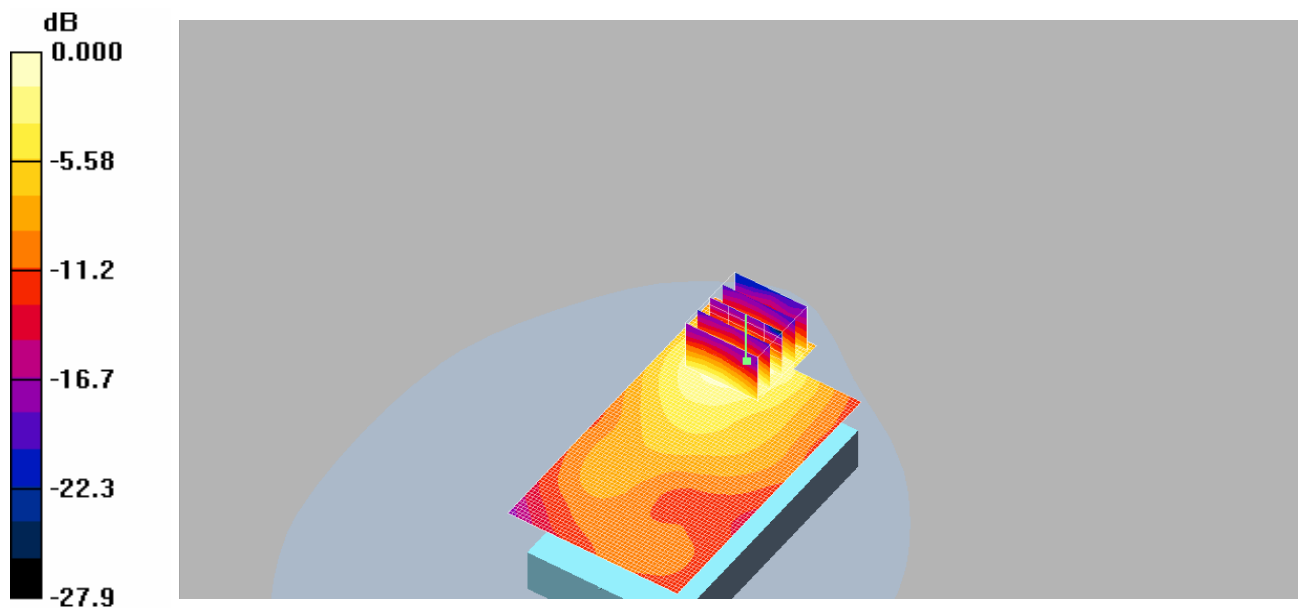

0 dB = 0.216mW/g

BODY_CH251

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.61 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.073 dB


Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.54 mW/g; SAR(10 g) = 1.12 mW/g

Maximum value of SAR (measured) = 1.62 mW/g

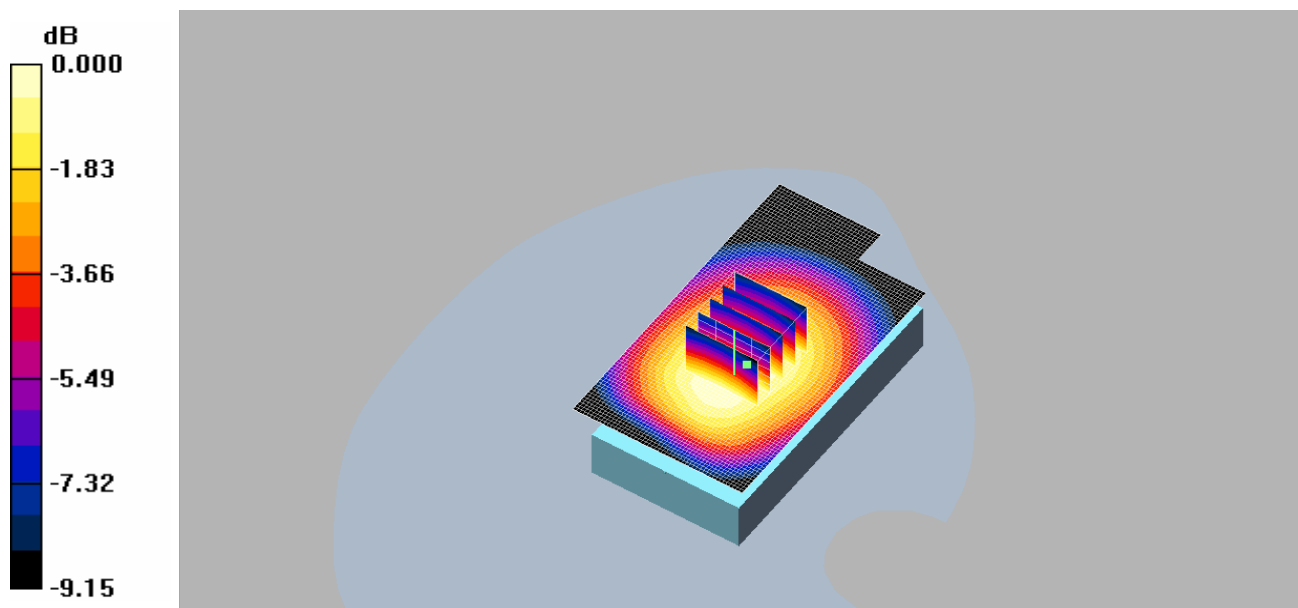

0 dB = 1.62mW/g

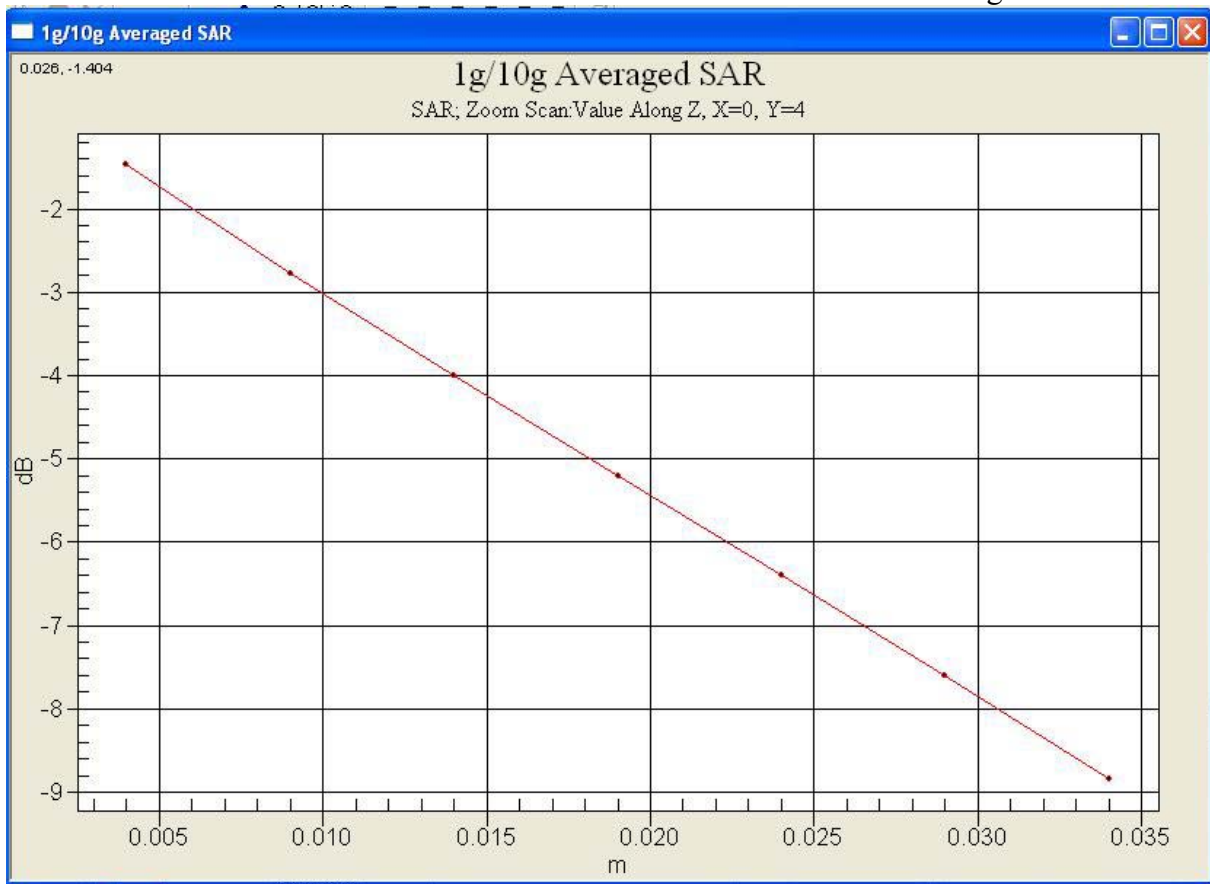

BODY_CH251__ repeated for EUT front to phantom

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.487 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.0 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.347 mW/g
Maximum value of SAR (measured) = 0.484 mW/g

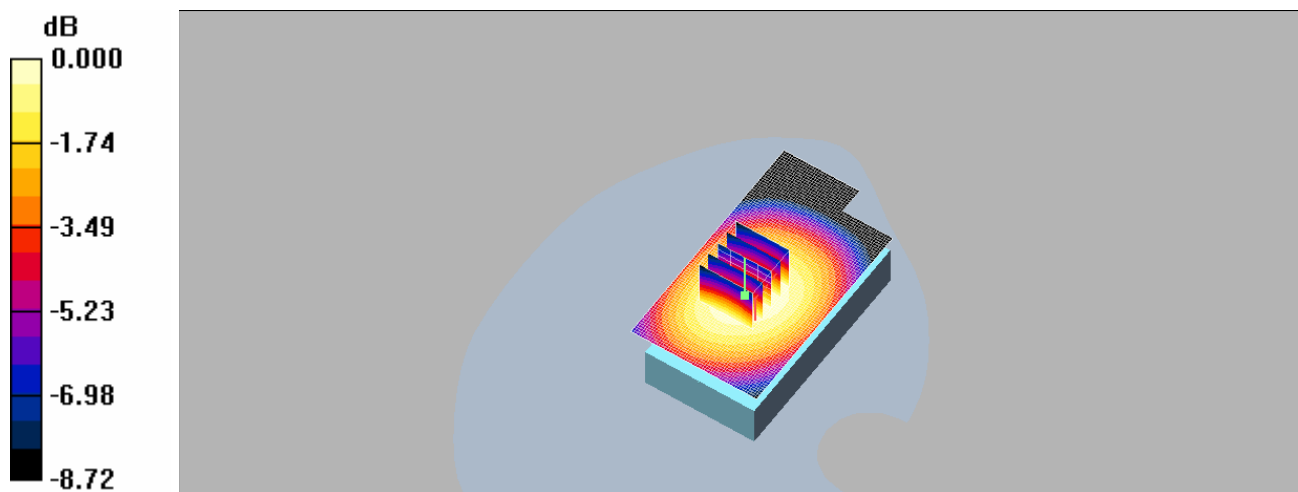

BODY_CH251_ repeated with Memory card

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.60 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.0 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.51 mW/g; SAR(10 g) = 1.1 mW/g
Maximum value of SAR (measured) = 1.58 mW/g

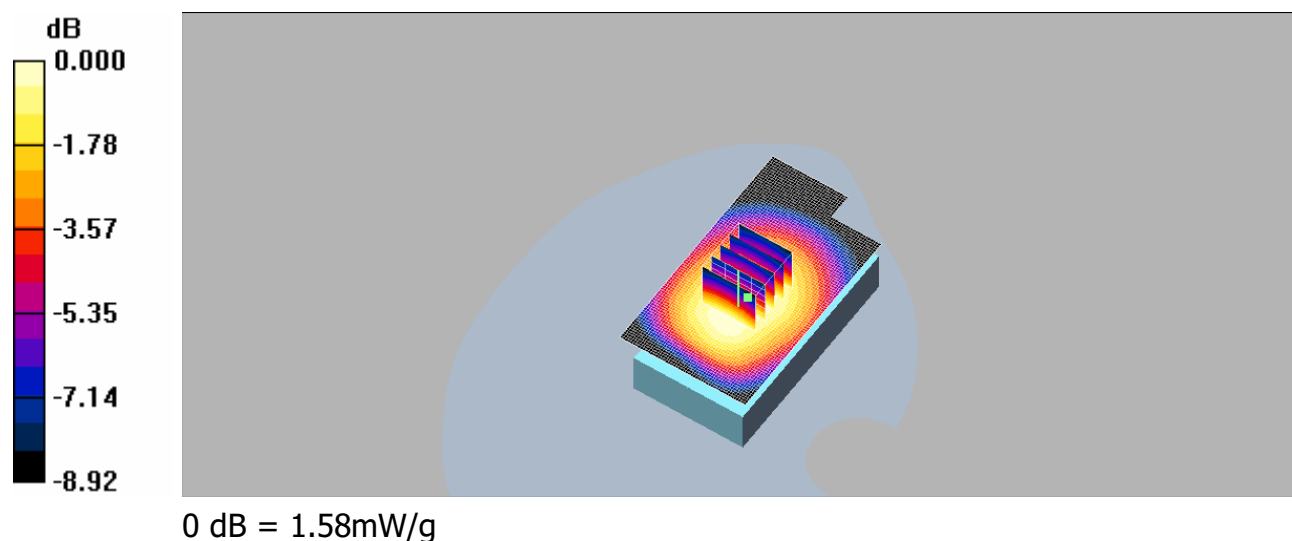

BODY_CH251_ repeated with Bluetooth active

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.63 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 17.1 V/m; Power Drift = -0.057 dB
Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 1.12 mW/g
Maximum value of SAR (measured) = 1.63 mW/g

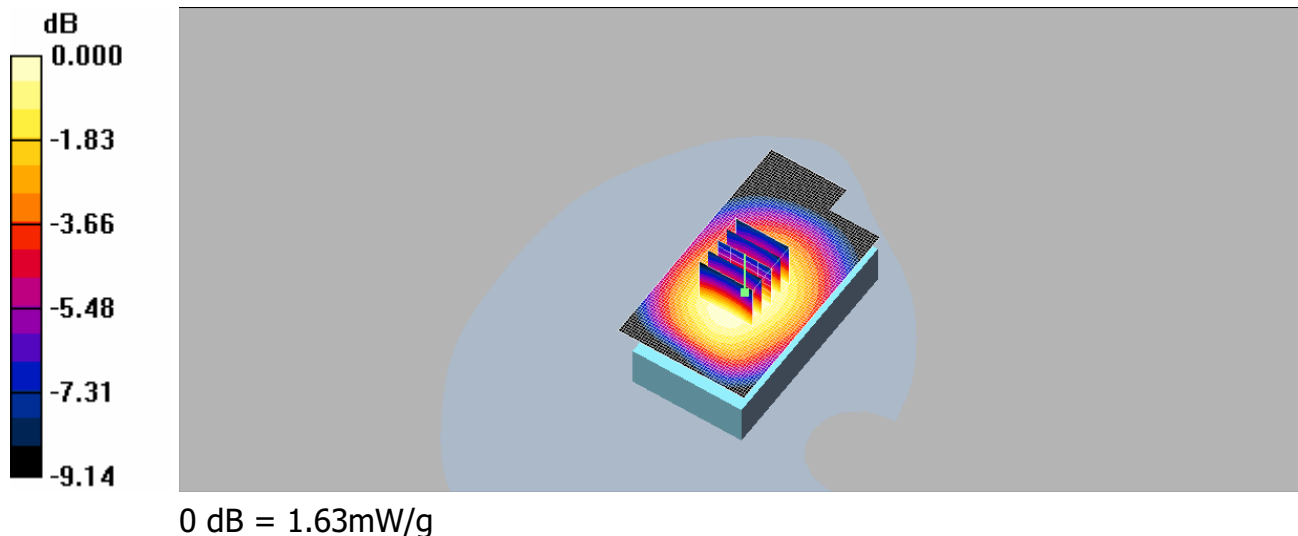

BODY_CH251_ repeated with WLAN 802.11 b active

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.991 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 0.918 mW/g


BODY/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.628 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

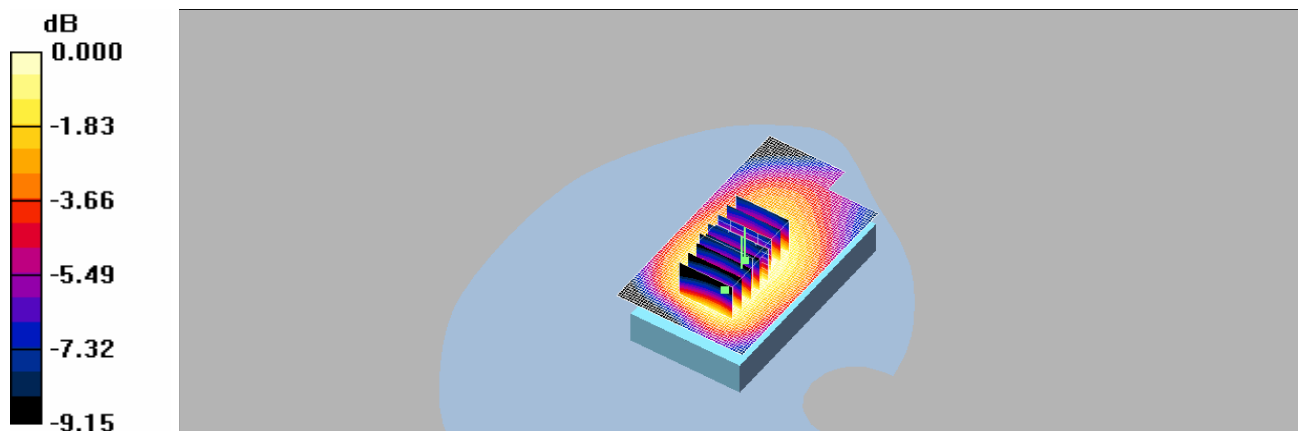

0 dB = 0.916mW/g

BODY_CH251_ repeated with WLAN 802.11 g active

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.936 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 0.890 mW/g


BODY/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.618 mW/g

Maximum value of SAR (measured) = 0.889 mW/g

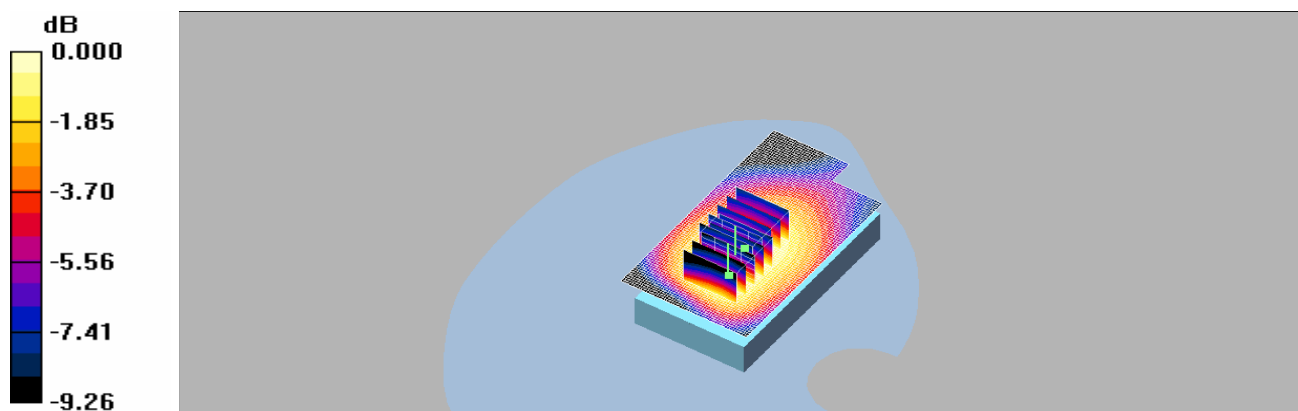

0 dB = 0.889mW/g

BODY_CH251_ repeated with WLAN 802.11 & Bluetooth active

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.658 mW/g

Maximum value of SAR (measured) = 0.977 mW/g


BODY/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.679 mW/g

Maximum value of SAR (measured) = 0.984 mW/g

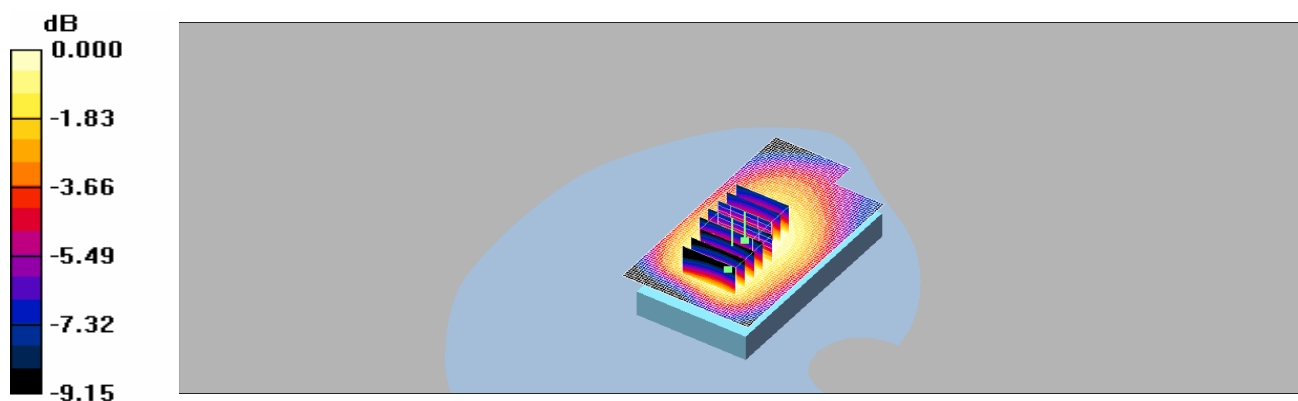

BODY_CH251_ repeated with headset_1

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.34 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 15.7 V/m; Power Drift = 0.115 dB
Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.946 mW/g
Maximum value of SAR (measured) = 1.37 mW/g

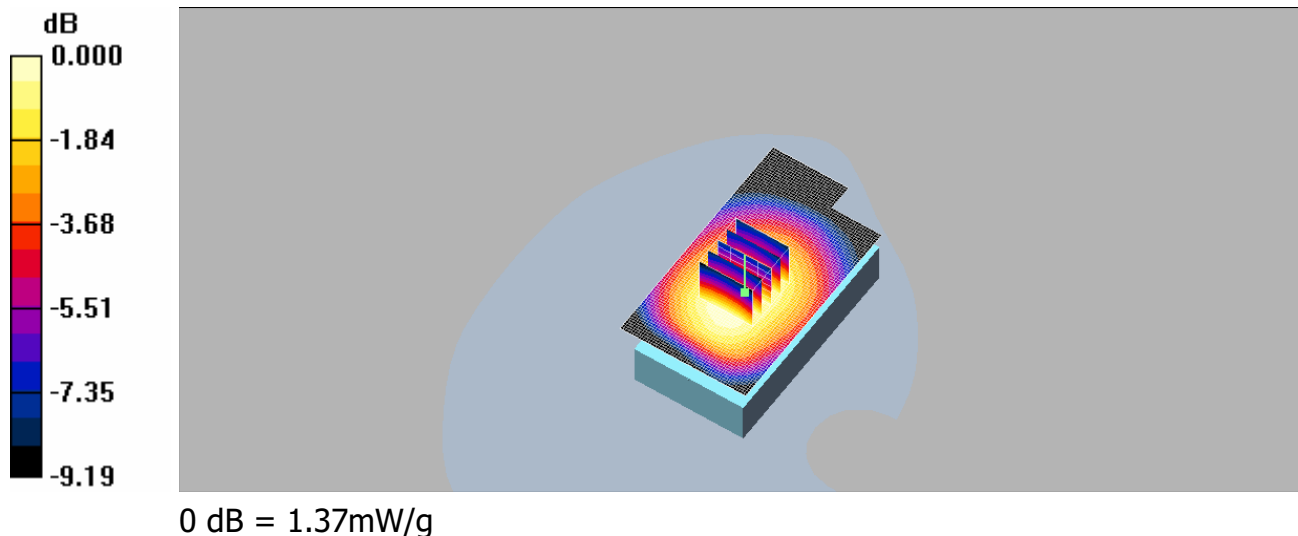

BODY_CH251_ repeated with headset_2

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.34 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 16.4 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.934 mW/g
Maximum value of SAR (measured) = 1.36 mW/g

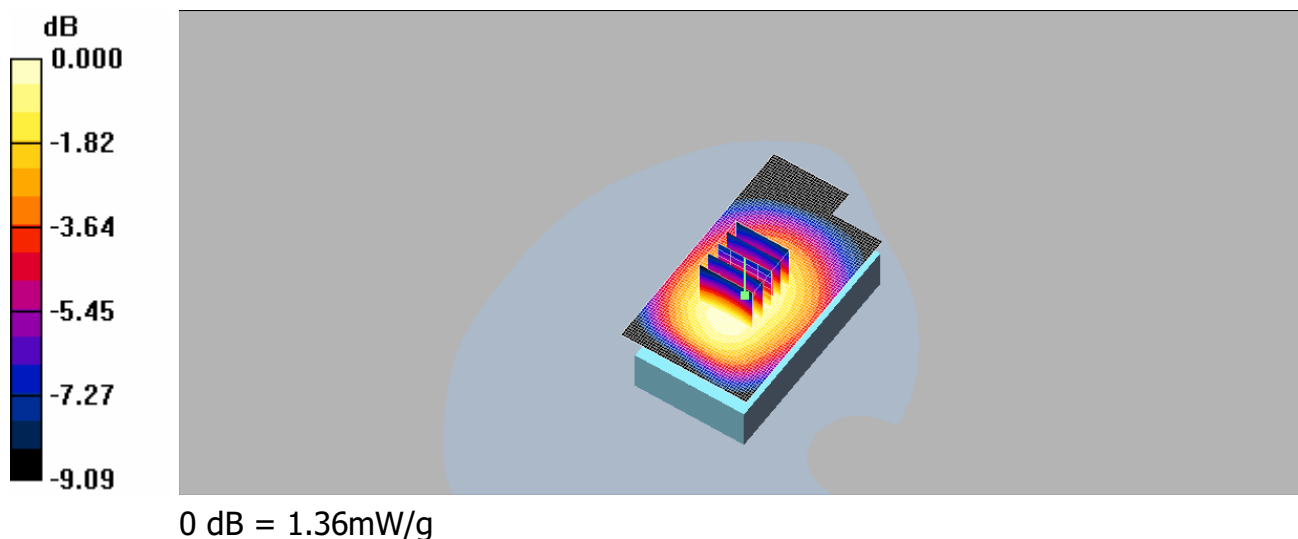

BODY_CH251_ repeated with Samsung Battery

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:4
Medium: Head 850 MHz Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.62 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 15.8 V/m; Power Drift = -0.063 dB
Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 1.12 mW/g
Maximum value of SAR (measured) = 1.61 mW/g

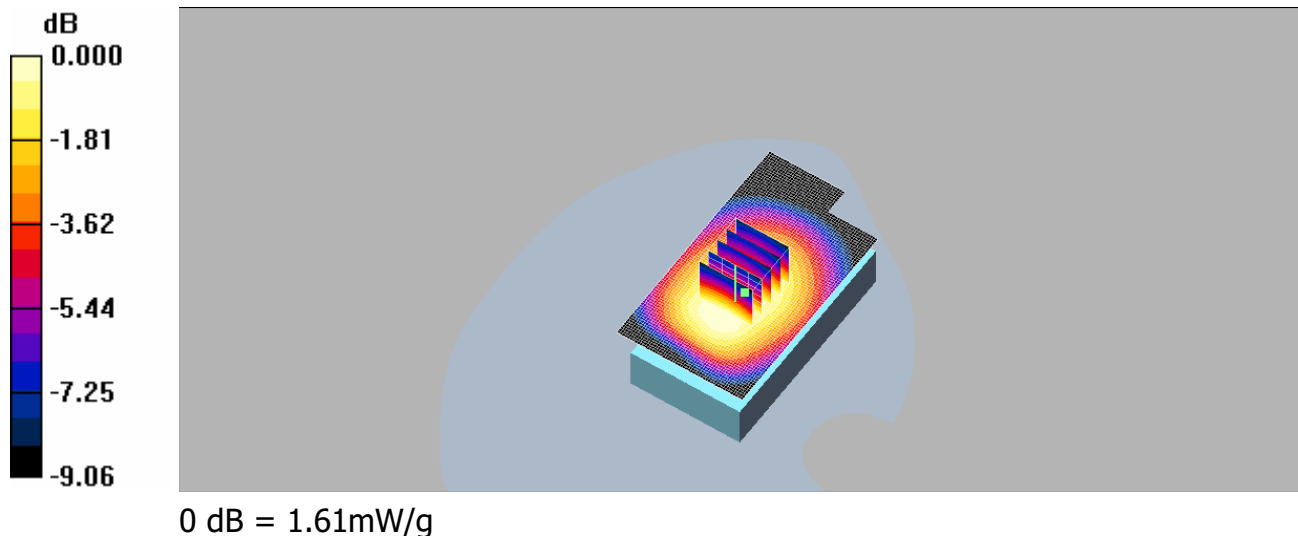

RE_Cheek_CH512_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.417 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.399 mW/g

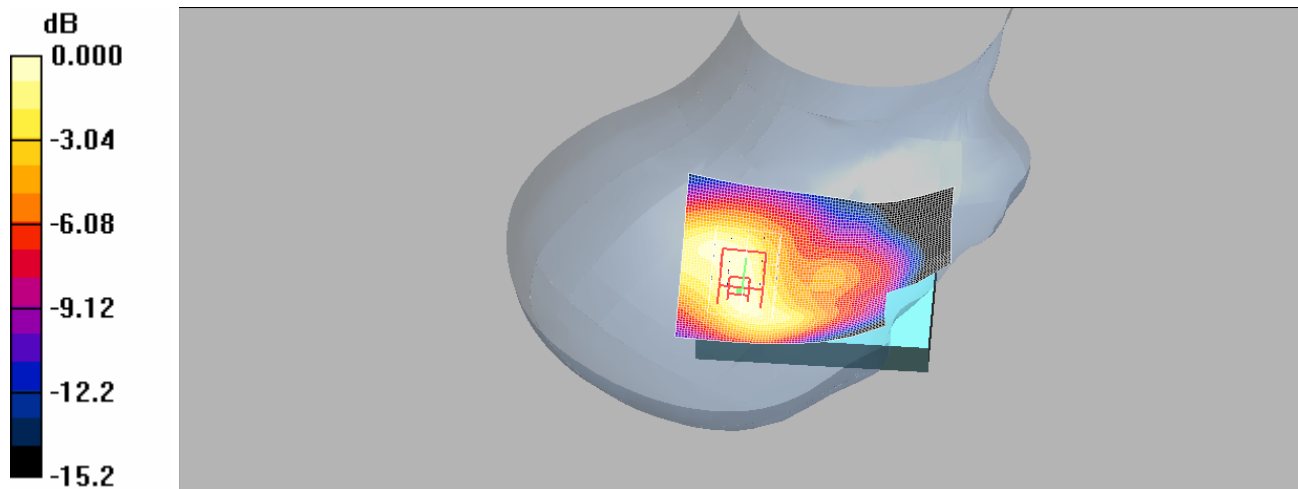

0 dB = 0.399mW/g

RE_Cheek_CH661_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.329 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.3 V/m; Power Drift = -0.149 dB
Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.180 mW/g
Maximum value of SAR (measured) = 0.318 mW/g

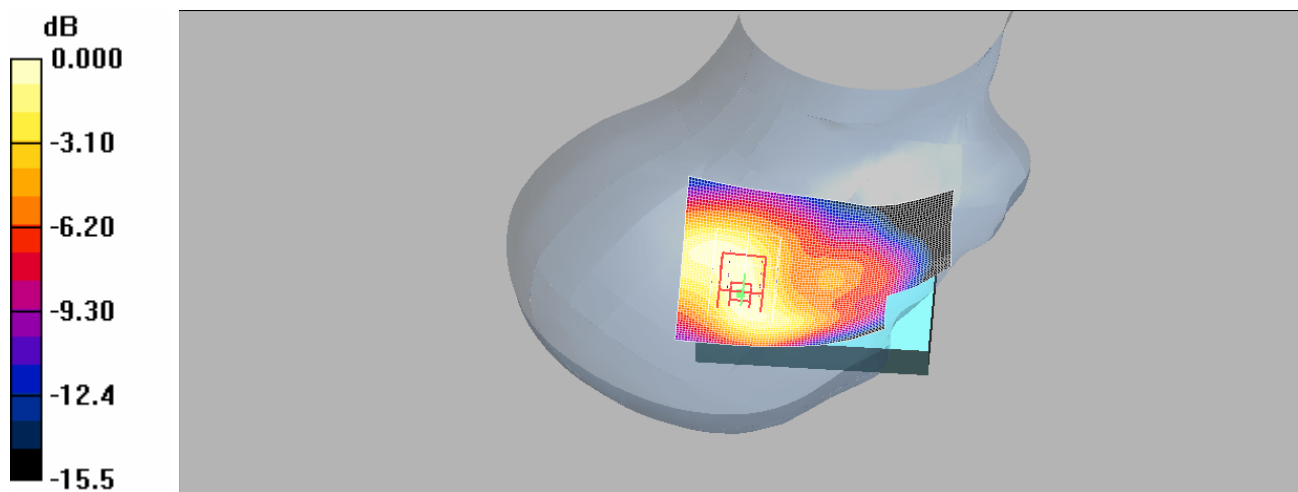

0 dB = 0.318mW/g

RE_Cheek_CH810_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.221 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.3 V/m; Power Drift = 0.061 dB
Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.123 mW/g
Maximum value of SAR (measured) = 0.223 mW/g

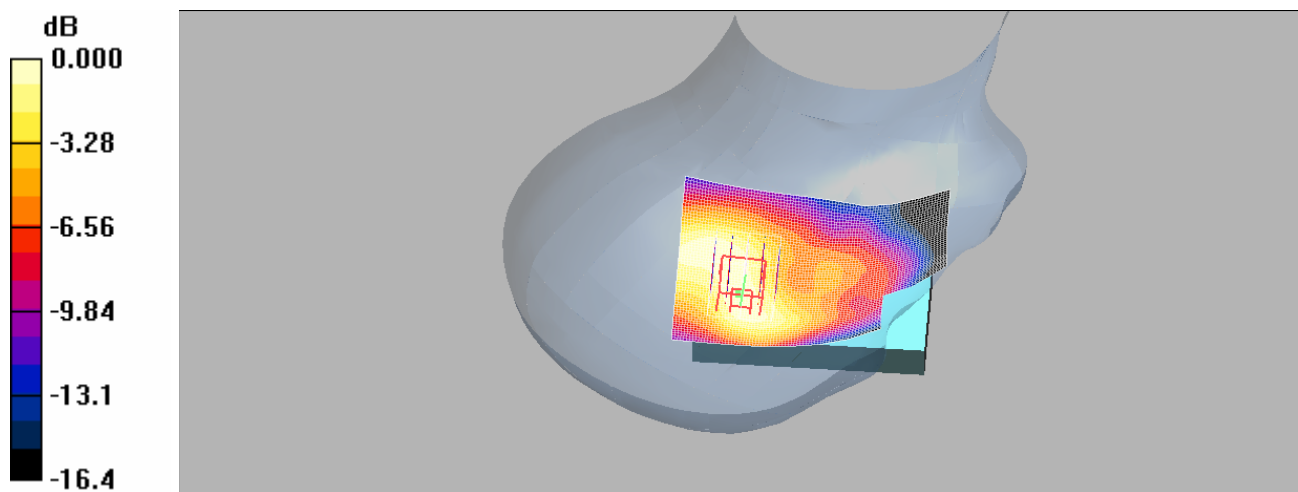

0 dB = 0.223mW/g

LE_Cheek_CH512_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.453 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.4 V/m; Power Drift = 0.045 dB
Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.235 mW/g
Maximum value of SAR (measured) = 0.470 mW/g

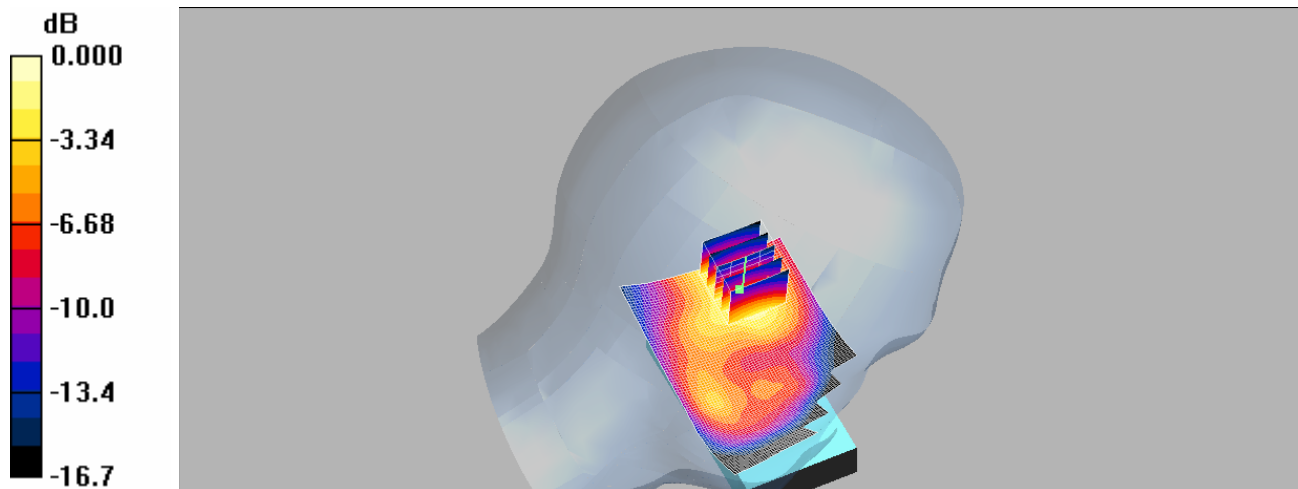

LE_Cheek_CH661_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.408 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.7 V/m; Power Drift = -0.129 dB
Peak SAR (extrapolated) = 0.639 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.204 mW/g
Maximum value of SAR (measured) = 0.409 mW/g

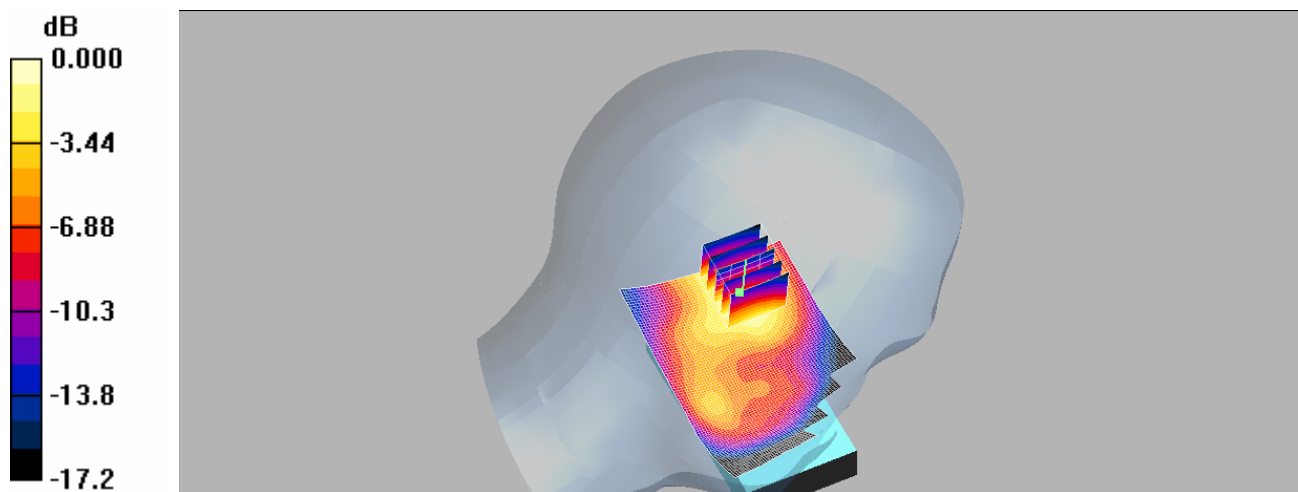

LE_Cheek_CH810_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.265 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.79 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.136 mW/g
Maximum value of SAR (measured) = 0.275 mW/g

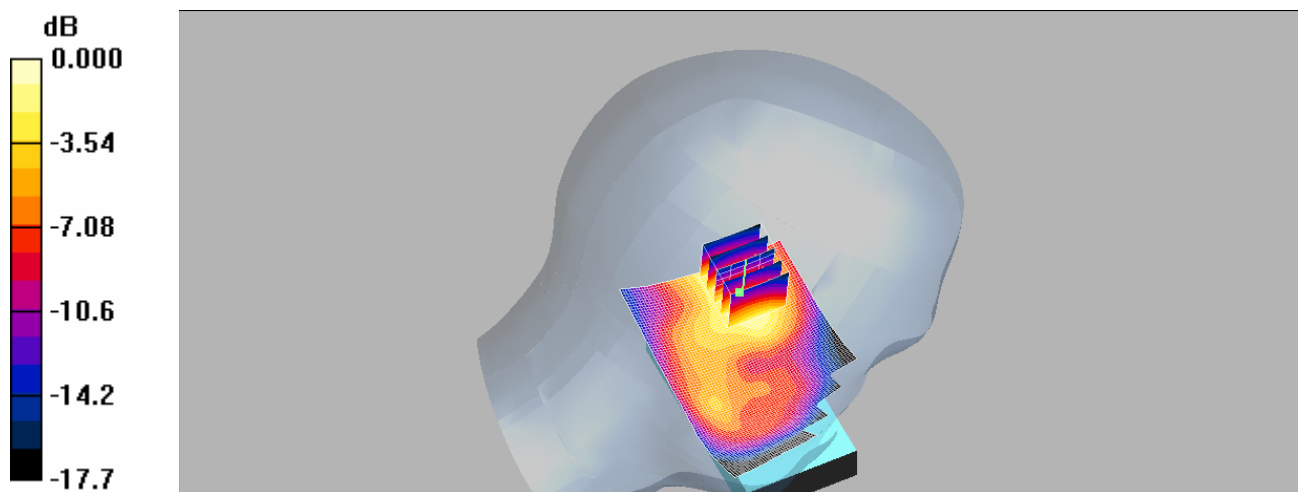

0 dB = 0.275mW/g

RE_Tilt_CH512_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.667 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.7 V/m; Power Drift = 0.121 dB
Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.615 mW/g; SAR(10 g) = 0.364 mW/g
Maximum value of SAR (measured) = 0.668 mW/g

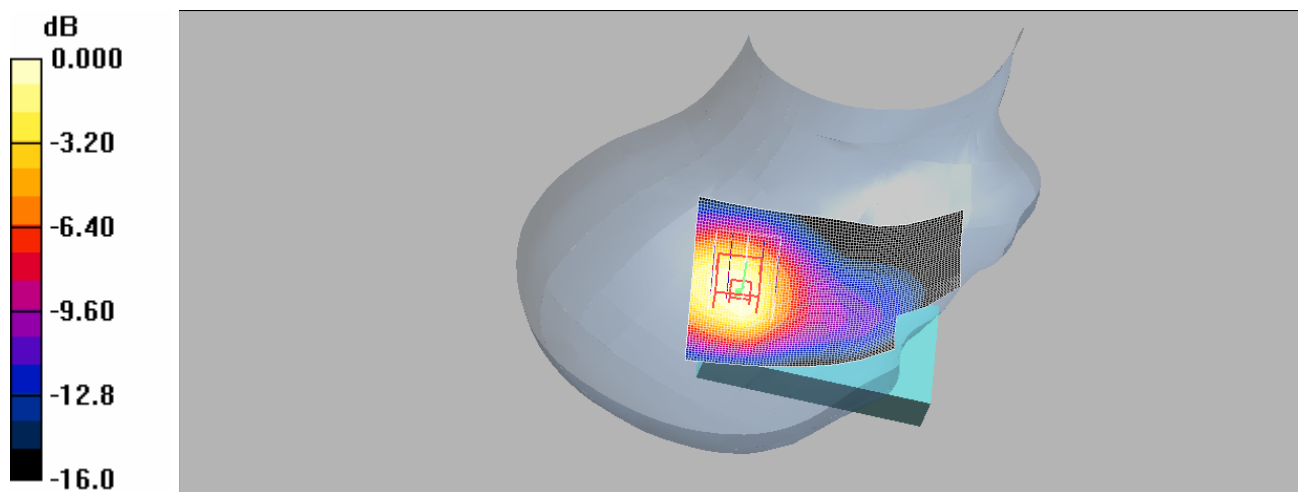

RE_Tilt_CH661_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.554 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.0 V/m; Power Drift = -0.011 dB
Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.292 mW/g
Maximum value of SAR (measured) = 0.526 mW/g

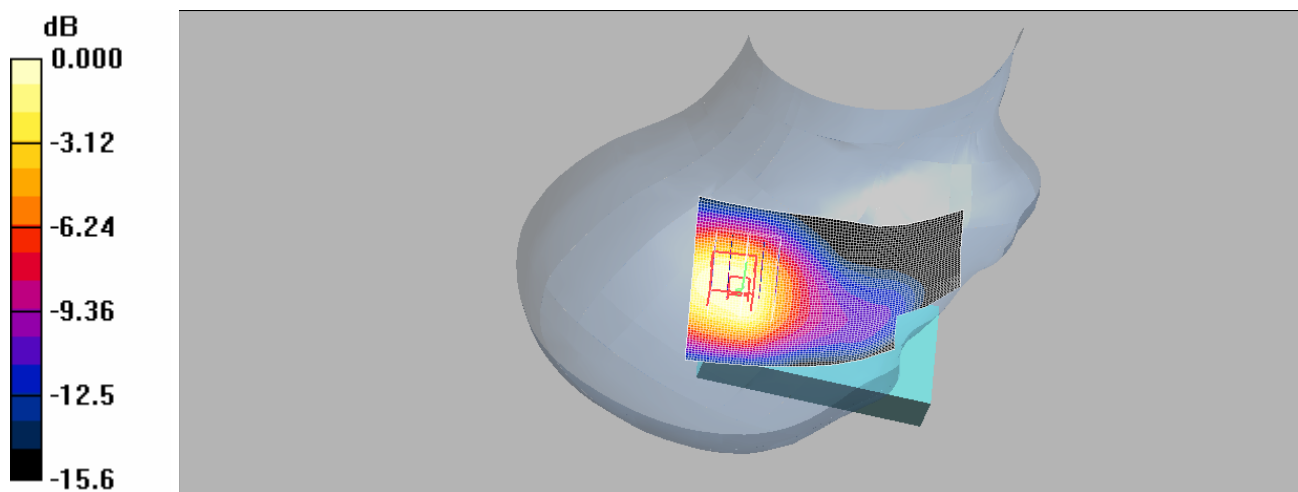

0 dB = 0.526mW/g

RE_Tilt_CH810_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

RE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.336 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.9 V/m; Power Drift = 0.050 dB
Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.185 mW/g
Maximum value of SAR (measured) = 0.327 mW/g

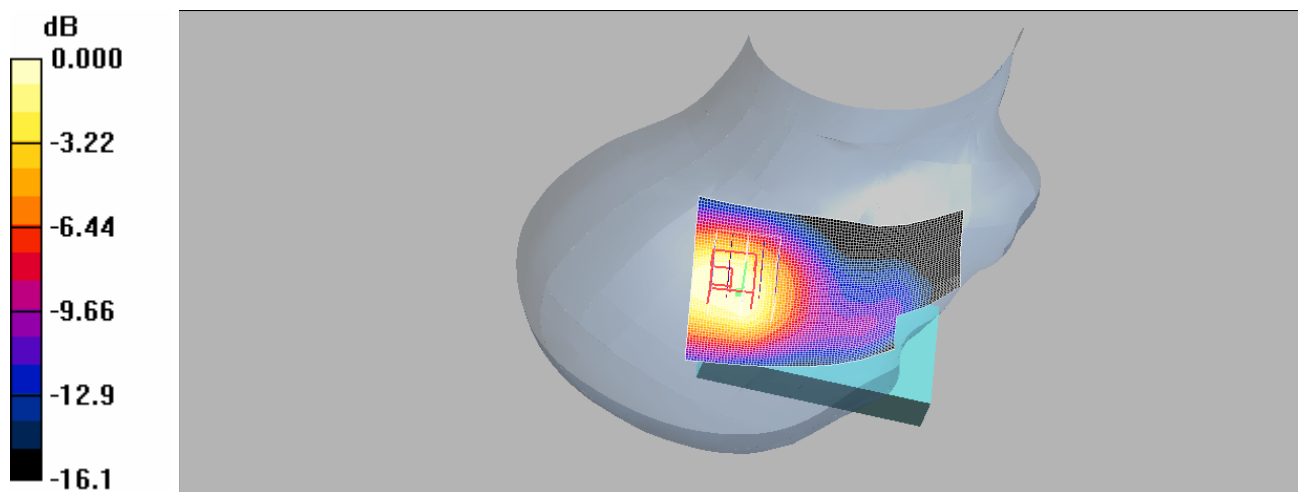

0 dB = 0.327mW/g

LE_Tilt_CH512_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176


LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.684 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.8 V/m; Power Drift = 0.047 dB
Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.362 mW/g
Maximum value of SAR (measured) = 0.681 mW/g

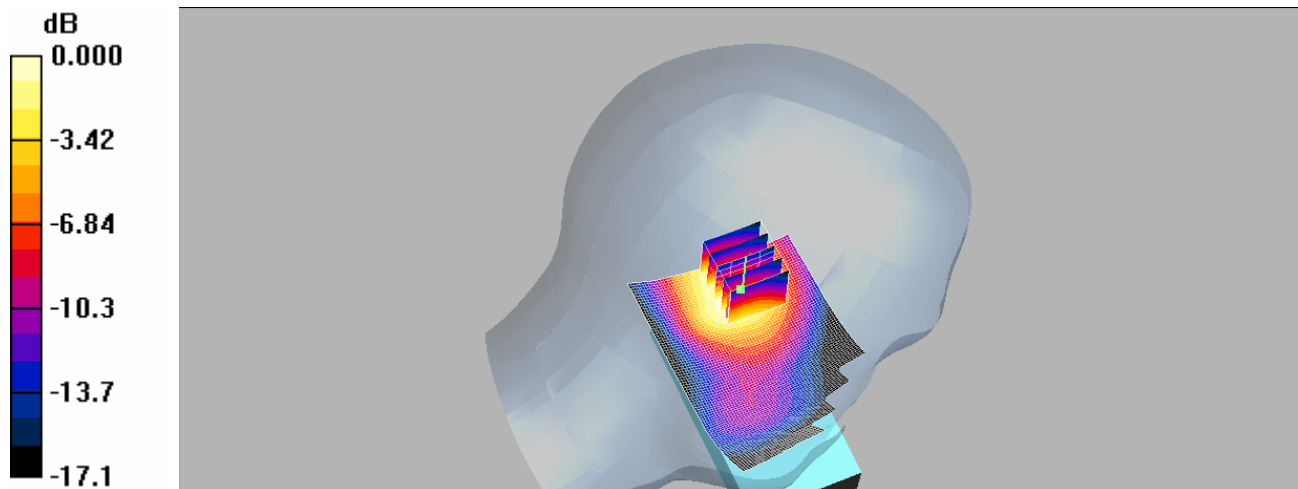

0 dB = 0.681mW/g

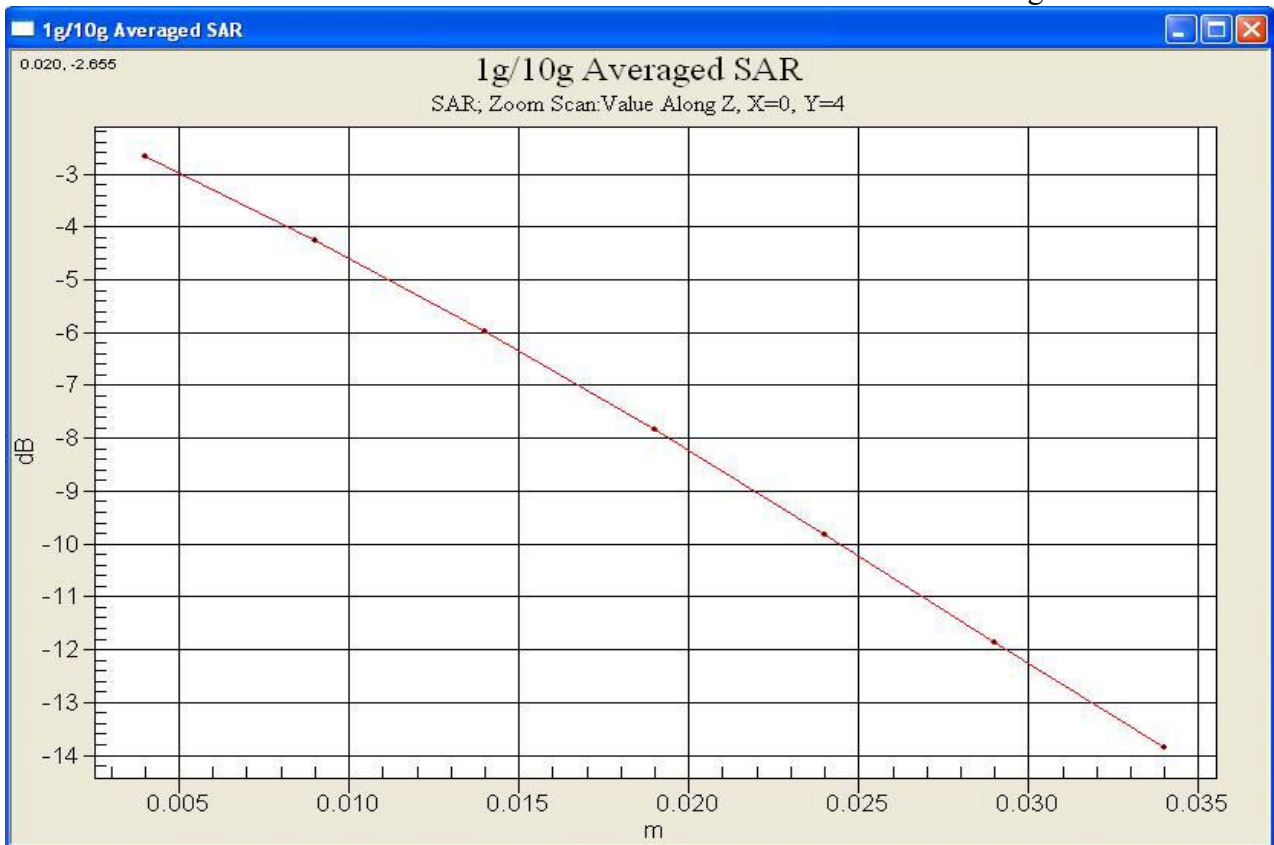

LE_Tilt_CH661_Slider off

DUT: Kais140; Type:GSM;IMEI: 35972801000000101

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2007/10/1
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.559 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.4 V/m; Power Drift = -0.199 dB
Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.284 mW/g
Maximum value of SAR (measured) = 0.538 mW/g

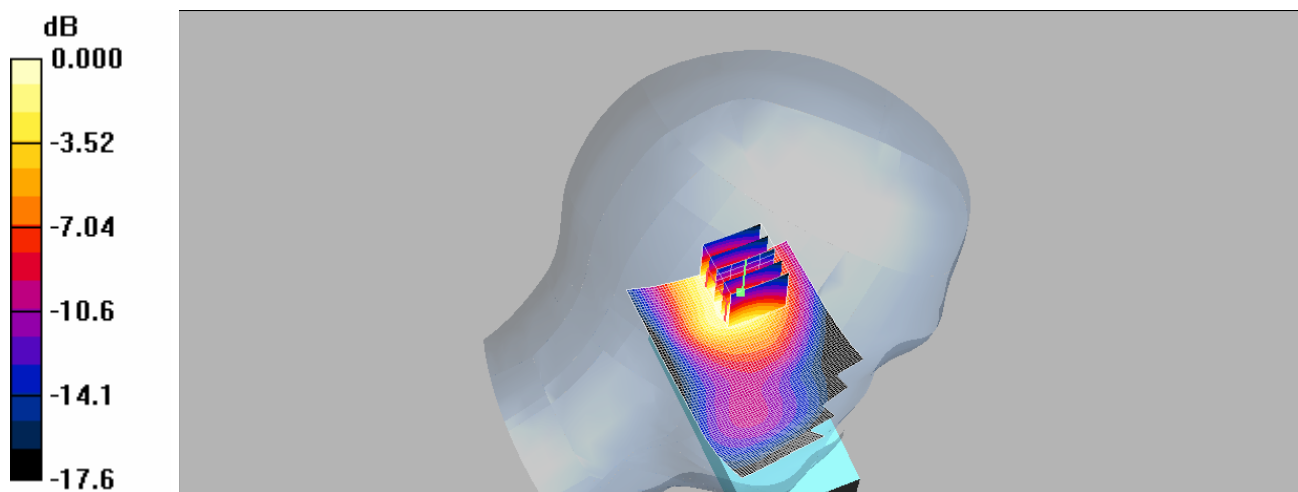

0 dB = 0.538mW/g