

RE_Tilt_CH661_Slider on

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.272 mW/g


RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.264 mW/g

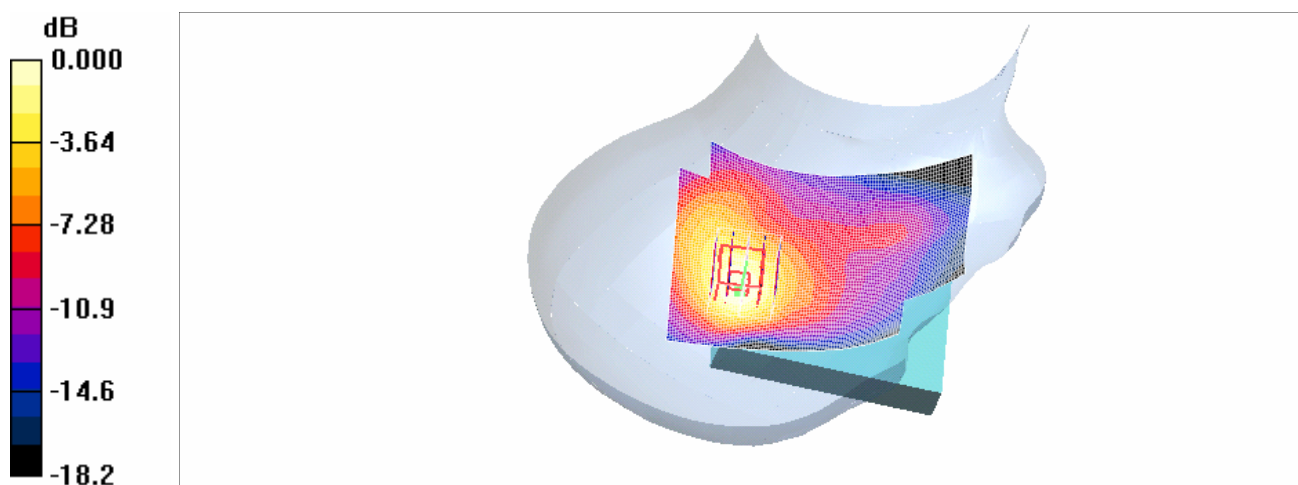

0 dB = 0.264mW/g

RE_Tilt_CH810_Slider on

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.271 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.6 V/m; Power Drift = -0.016 dB
Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.135 mW/g
Maximum value of SAR (measured) = 0.268 mW/g

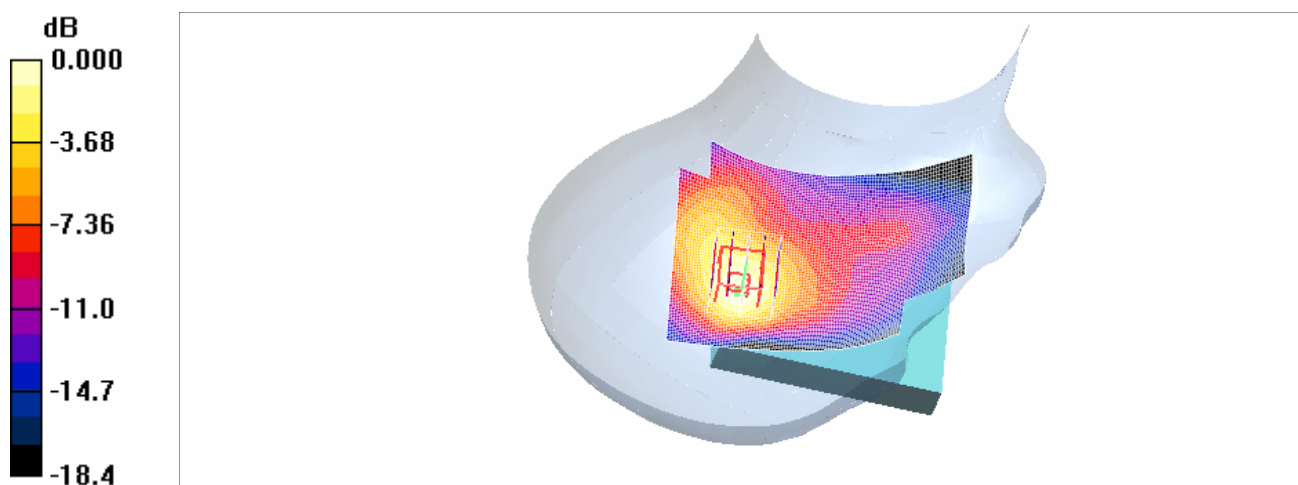

0 dB = 0.268mW/g

LE_Tilt_CH512_Slider on

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.257 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.4 V/m; Power Drift = 0.002 dB
Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.141 mW/g
Maximum value of SAR (measured) = 0.266 mW/g

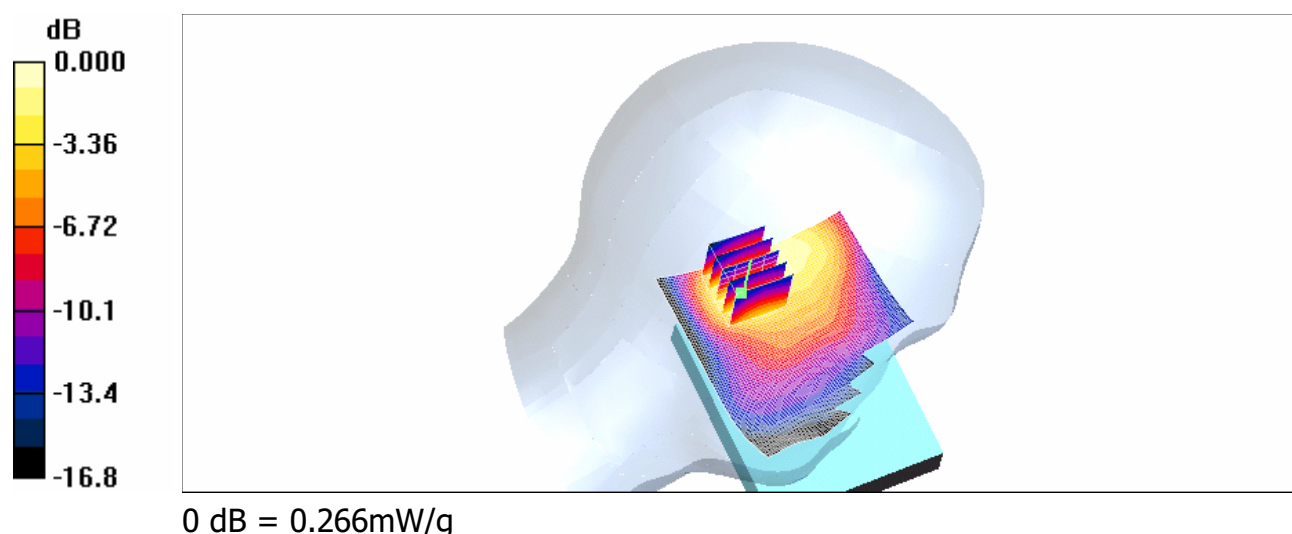

LE_Tilt_CH661_Slider on

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.272 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.8 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.148 mW/g
Maximum value of SAR (measured) = 0.280 mW/g

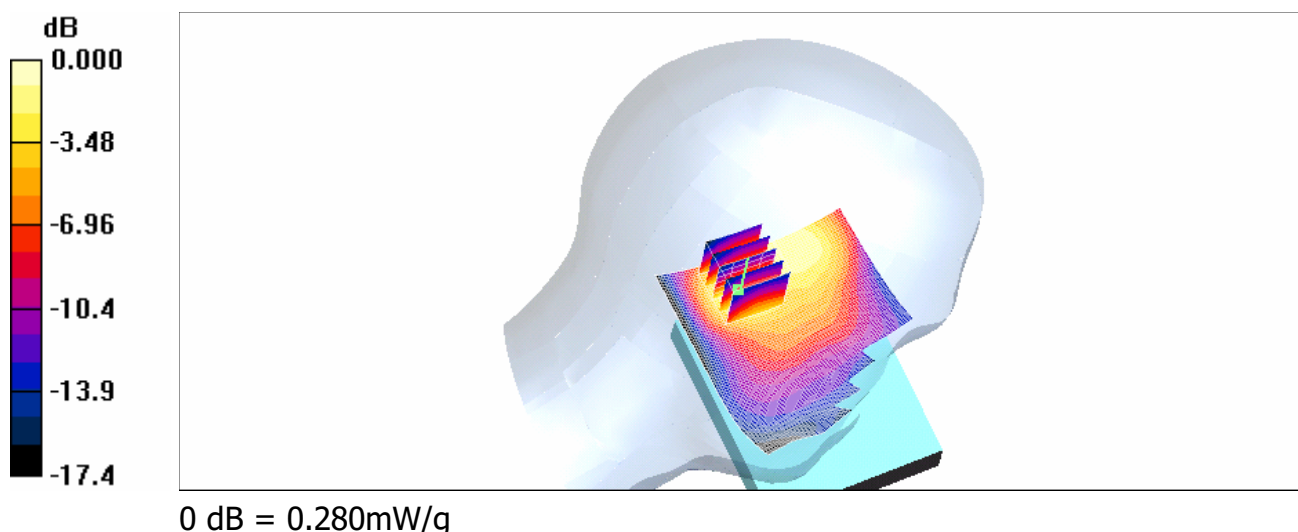

LE_Tilt_CH810_Slider on

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.254 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.3 V/m; Power Drift = -0.028 dB
Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.137 mW/g
Maximum value of SAR (measured) = 0.260 mW/g

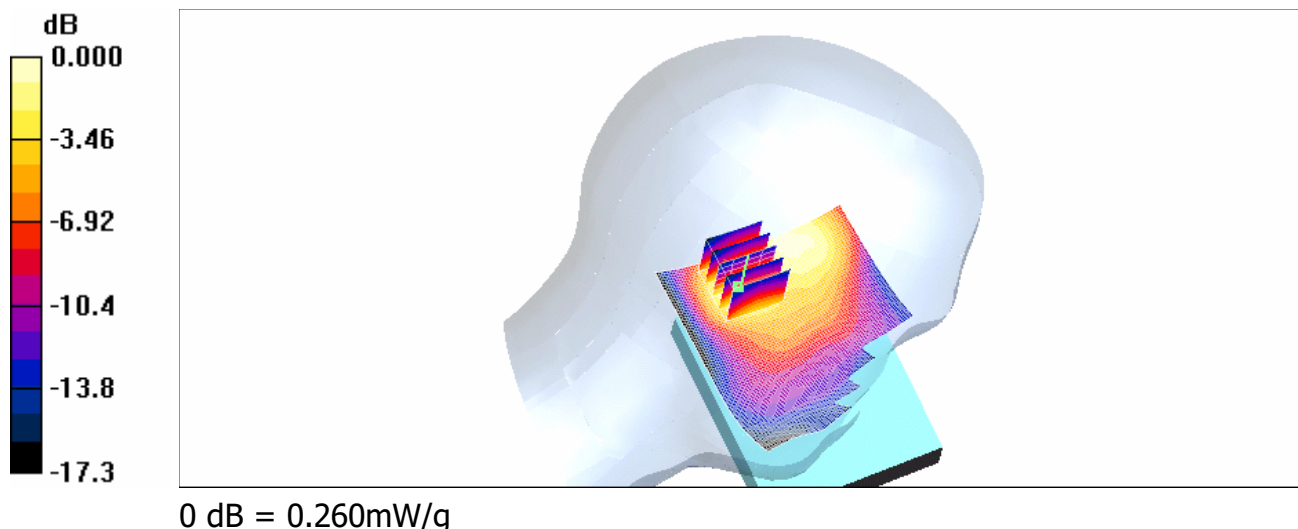

RE_Cheek_CH810_hold up

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.310 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.53 V/m; Power Drift = -0.119 dB
Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.147 mW/g
Maximum value of SAR (measured) = 0.300 mW/g

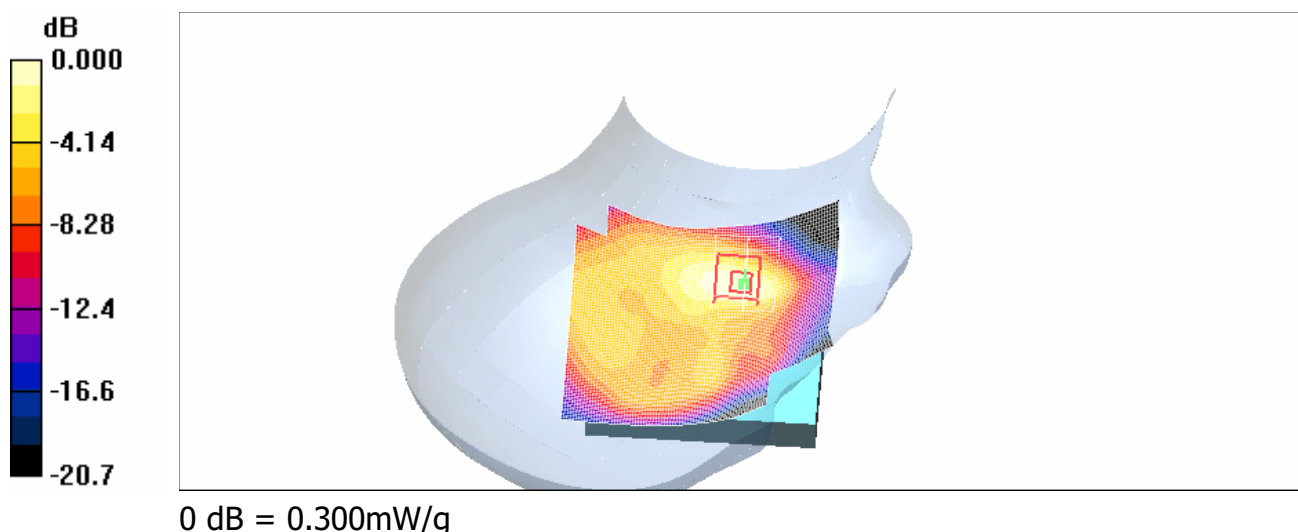

LE_Cheek_CH810_hold up

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.485 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.50 V/m; Power Drift = -0.194 dB
Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.224 mW/g
Maximum value of SAR (measured) = 0.468 mW/g

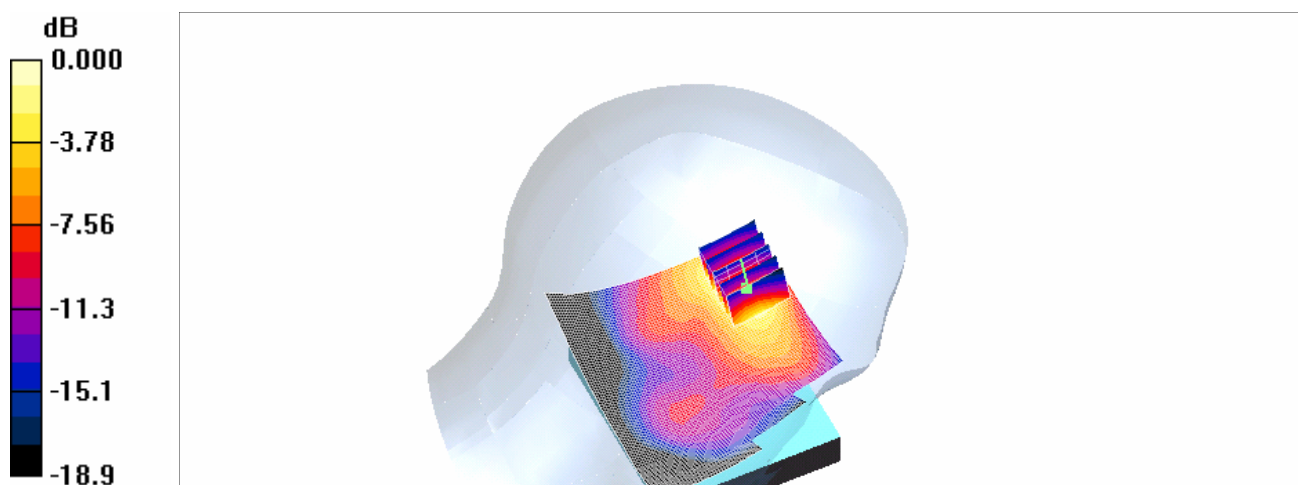

0 dB = 0.468mW/g

BODY_CH512

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.695 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.6 V/m; Power Drift = -0.196 dB
Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.397 mW/g
Maximum value of SAR (measured) = 0.687 mW/g

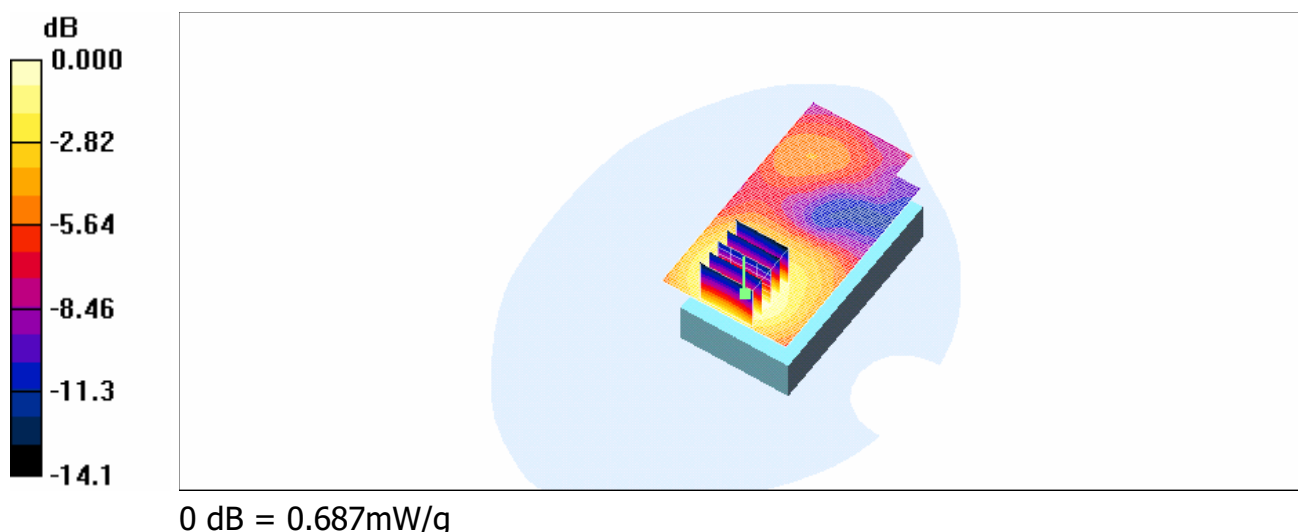

BODY_CH661

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.777 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.4 V/m; Power Drift = -0.100 dB
Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.709 mW/g; SAR(10 g) = 0.438 mW/g
Maximum value of SAR (measured) = 0.768 mW/g

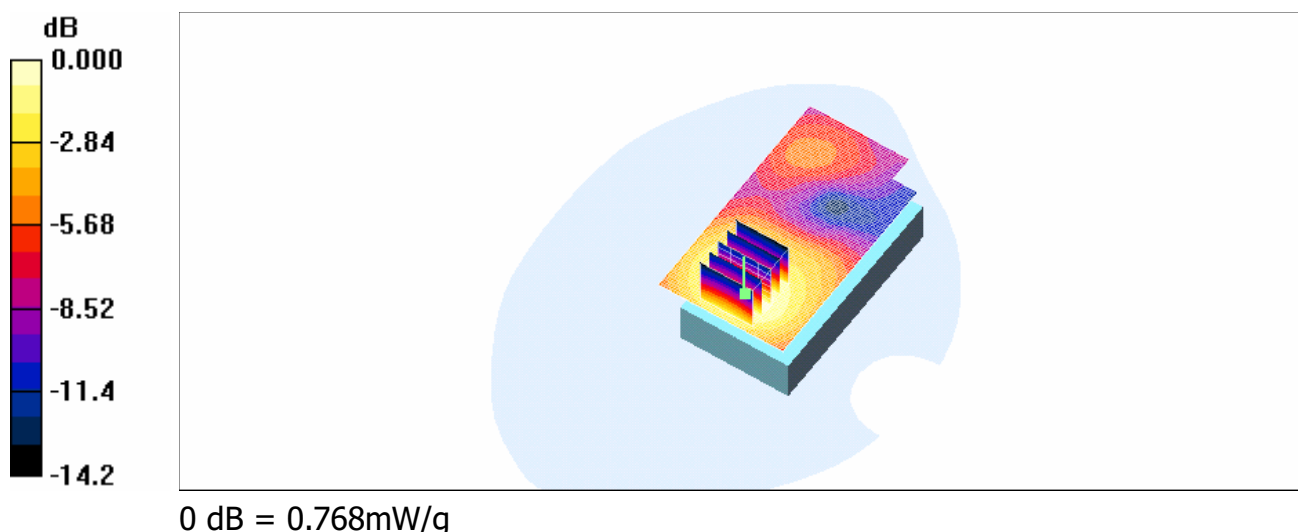

BODY_CH810

DUT: KAIS130; Type: GSM; IMEI: 355757000000022

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 50.8$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.720 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 20.7 V/m; Power Drift = 0.197 dB
Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.415 mW/g
Maximum value of SAR (measured) = 0.733 mW/g

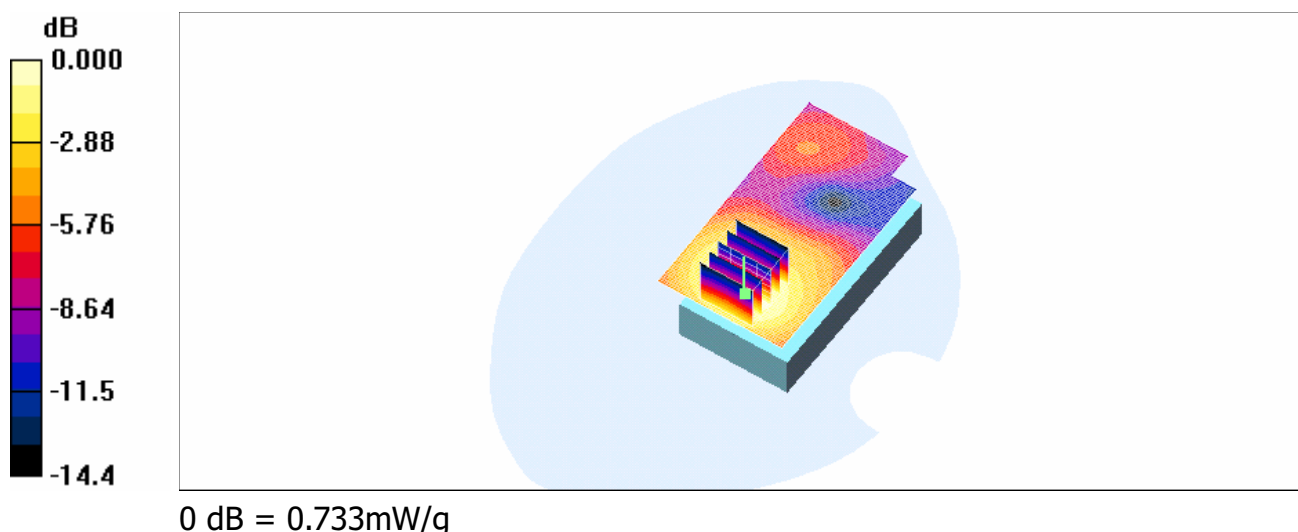

RE_Cheek_CH1_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.052 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.72 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.051 mW/g



0 dB = 0.051mW/g

RE_Cheek_CH6_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.062 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.62 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.099 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.062 mW/g

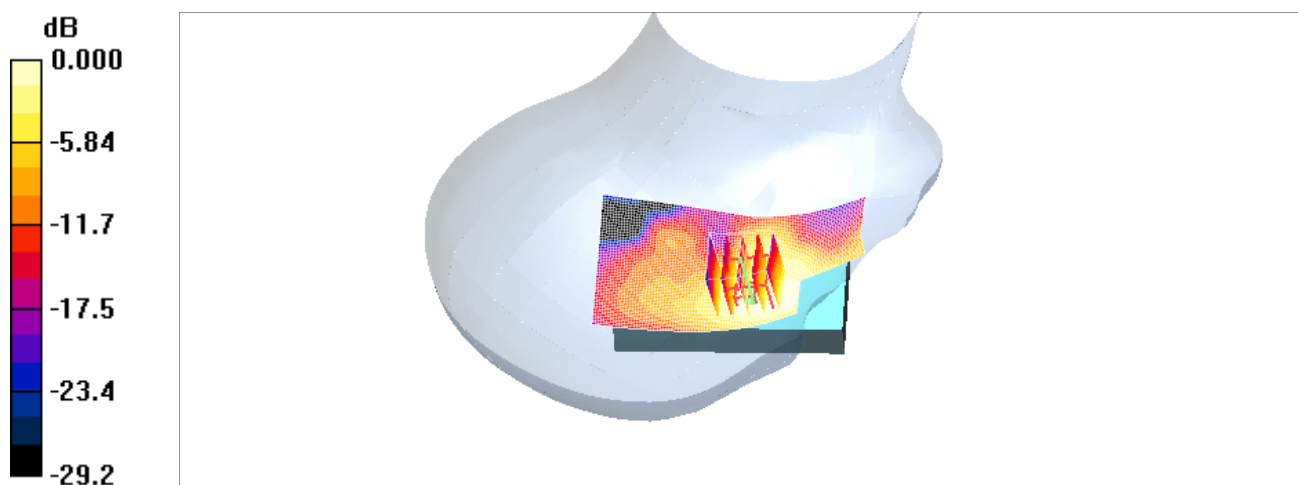

0 dB = 0.062mW/g

RE_Cheek_CH11_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.058 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.63 V/m; Power Drift = 0.022 dB
Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.028 mW/g
Maximum value of SAR (measured) = 0.056 mW/g

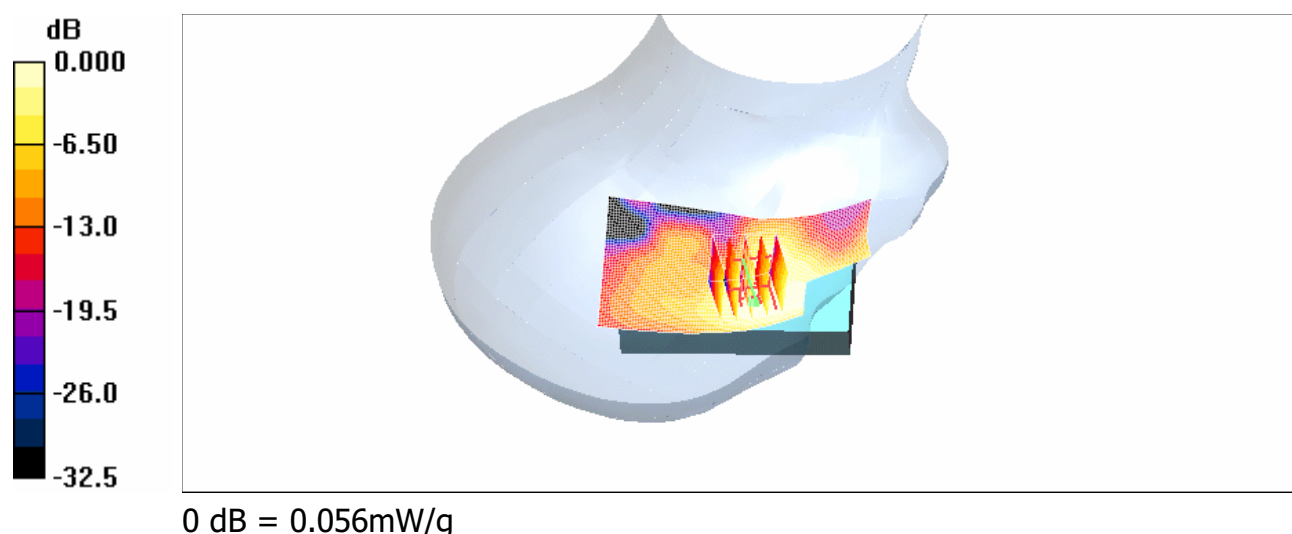

LE_Cheek_CH1_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.093 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.57 V/m; Power Drift = 0.160 dB
Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.043 mW/g
Maximum value of SAR (measured) = 0.088 mW/g

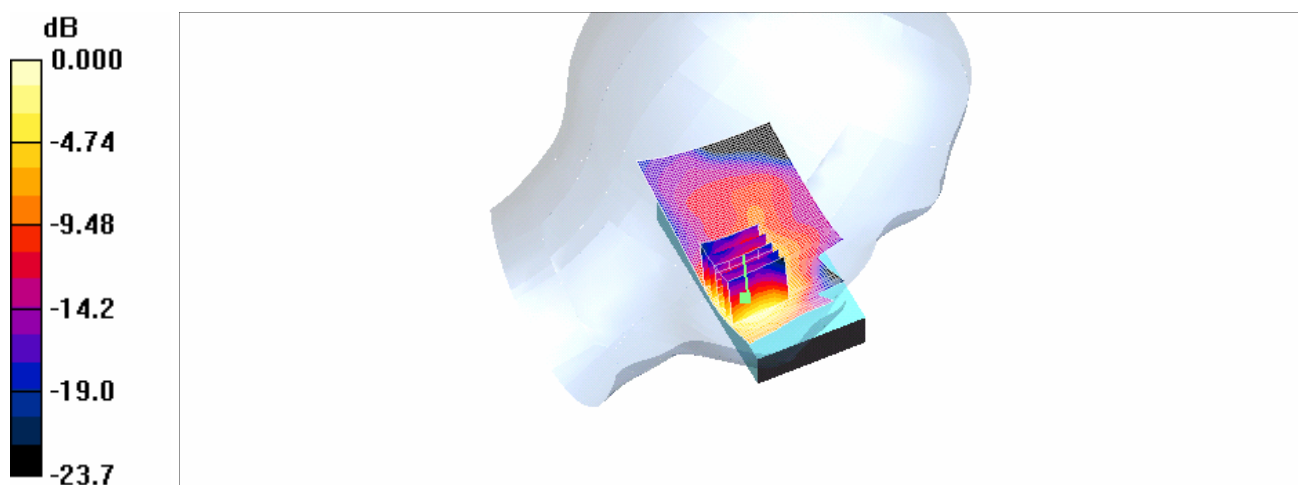

0 dB = 0.088mW/g

LE_Cheek_CH6_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.109 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.69 V/m; Power Drift = 0.149 dB
Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.050 mW/g
Maximum value of SAR (measured) = 0.101 mW/g

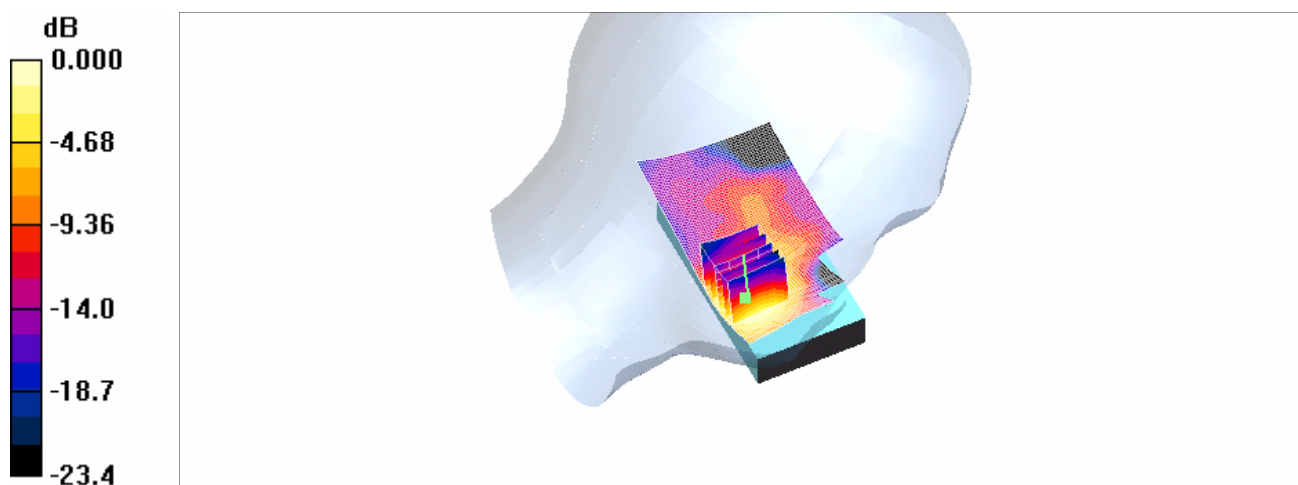

0 dB = 0.101mW/g

LE_Cheek_CH11_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.094 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.52 V/m; Power Drift = 0.138 dB
Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.089 mW/g

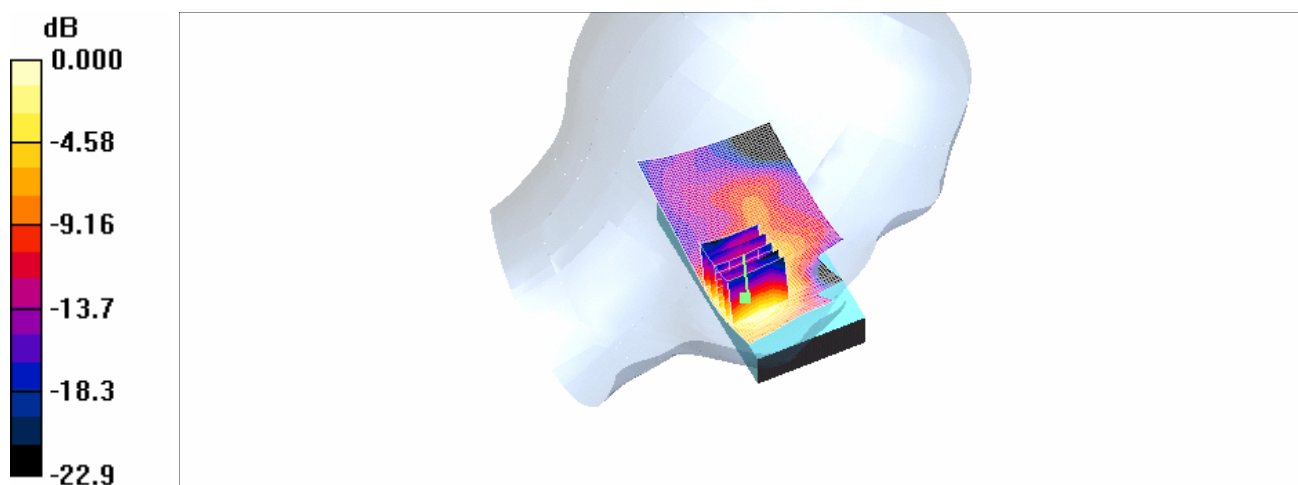

RE_Tilt_CH1_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.019 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.04 V/m; Power Drift = -0.193 dB
Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00905 mW/g
Maximum value of SAR (measured) = 0.019 mW/g

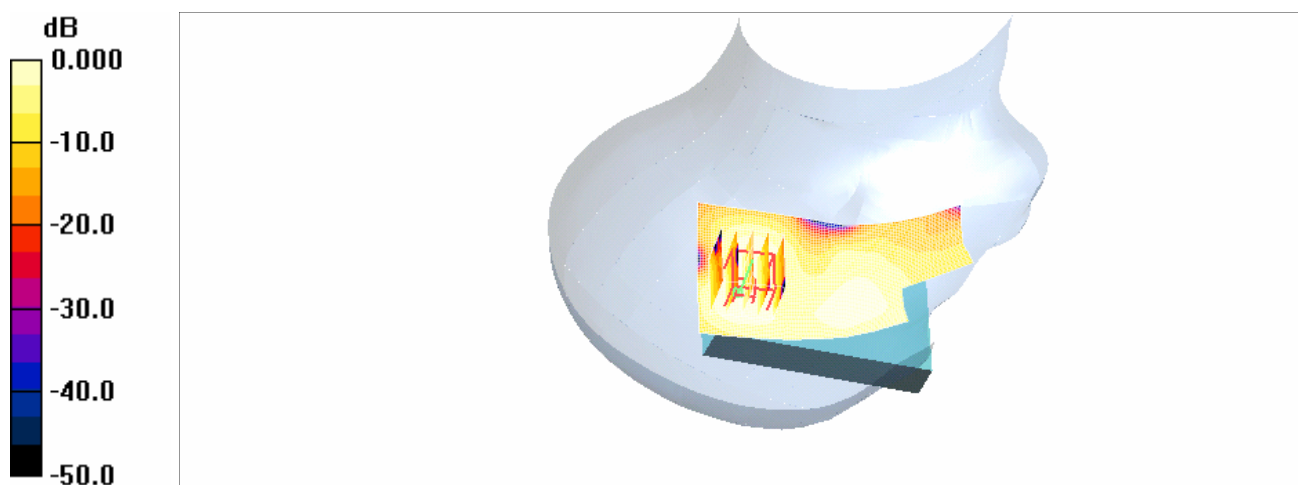

0 dB = 0.019mW/g

RE_Tilt_CH6_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.020 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.14 V/m; Power Drift = 0.173 dB
Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.010 mW/g
Maximum value of SAR (measured) = 0.022 mW/g

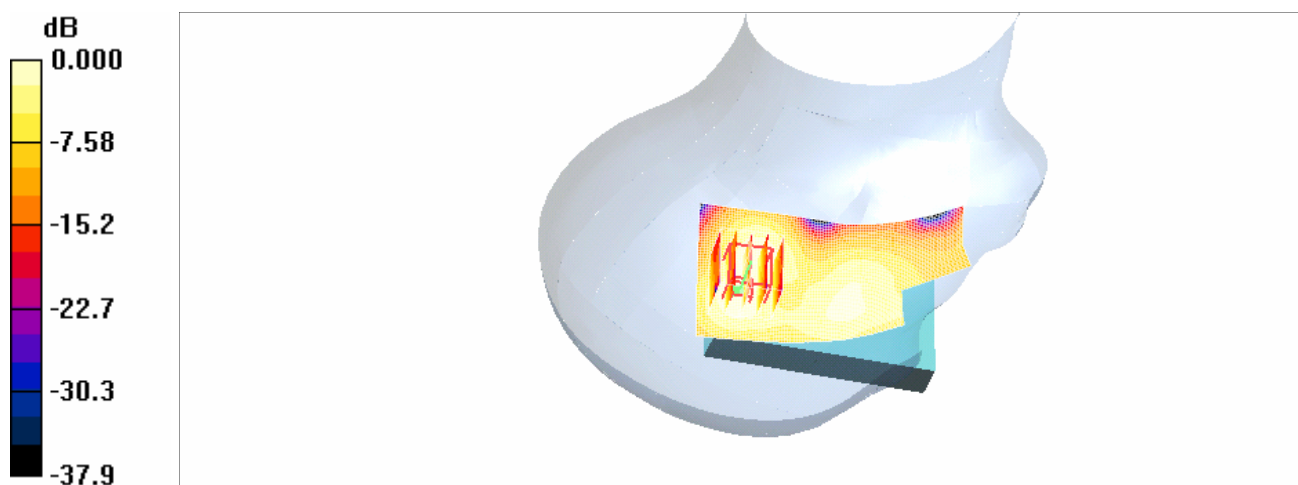

0 dB = 0.022mW/g

RE_Tilt_CH11_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.020 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.04 V/m; Power Drift = 0.084 dB
Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00913 mW/g
Maximum value of SAR (measured) = 0.018 mW/g

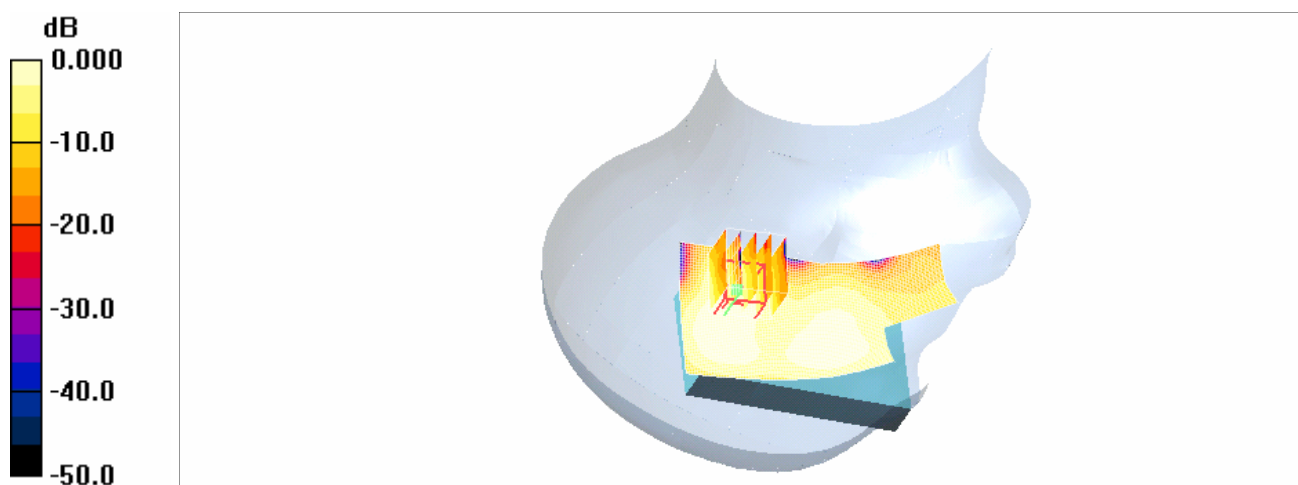

LE_Tilt_CH1_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.028 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.80 V/m; Power Drift = 0.051 dB
Peak SAR (extrapolated) = 0.051 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.029 mW/g

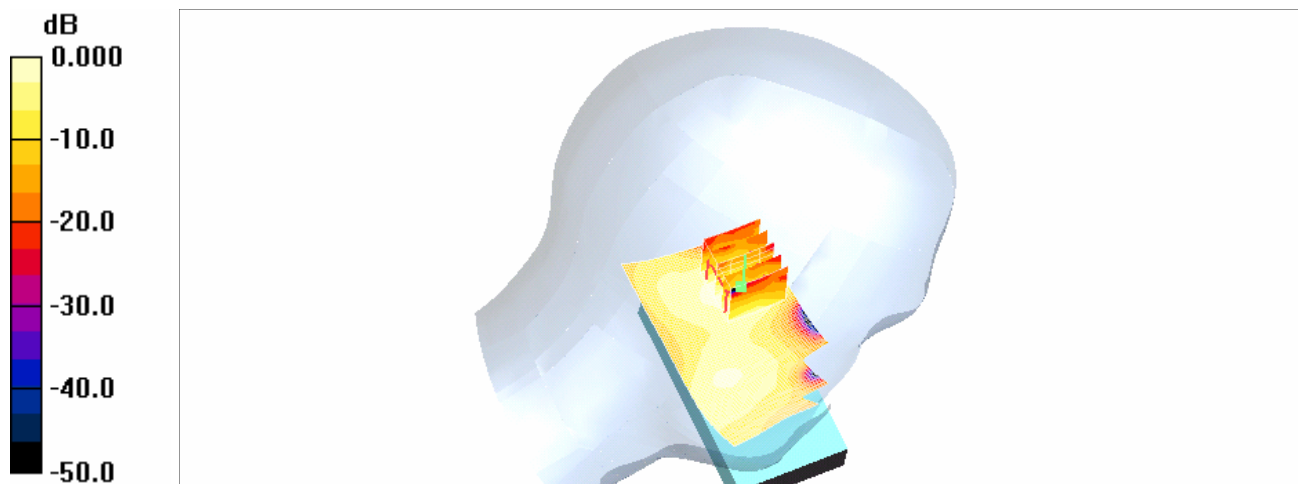

LE_Tilt_CH6_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.040 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.05 V/m; Power Drift = 0.164 dB
Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.036 mW/g

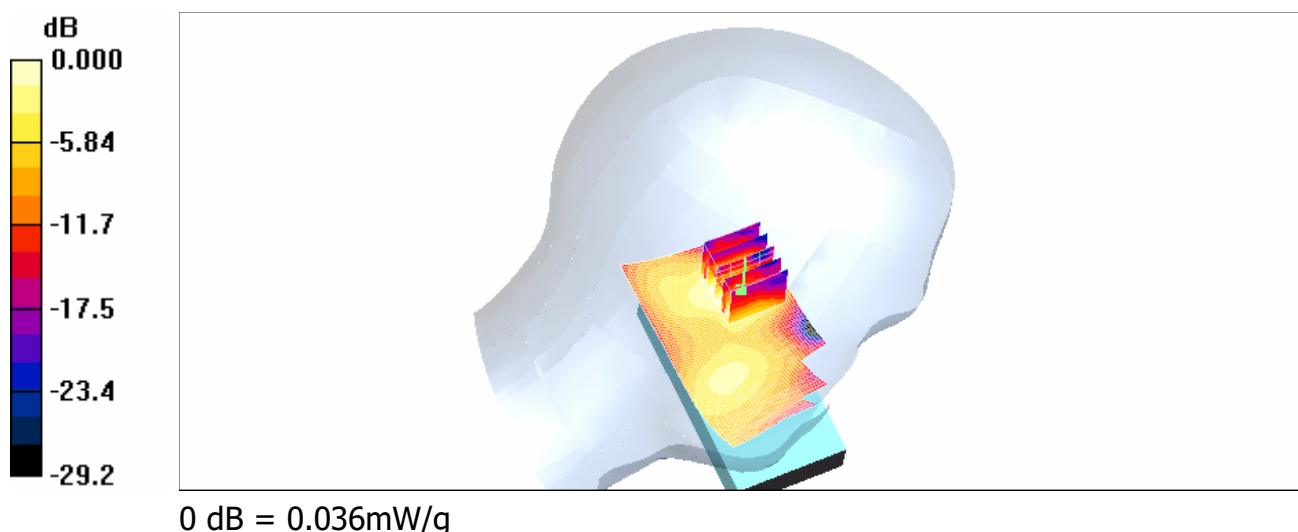

LE_Tilt_CH11_Slider off

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.037 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.04 V/m; Power Drift = -0.149 dB
Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.034 mW/g

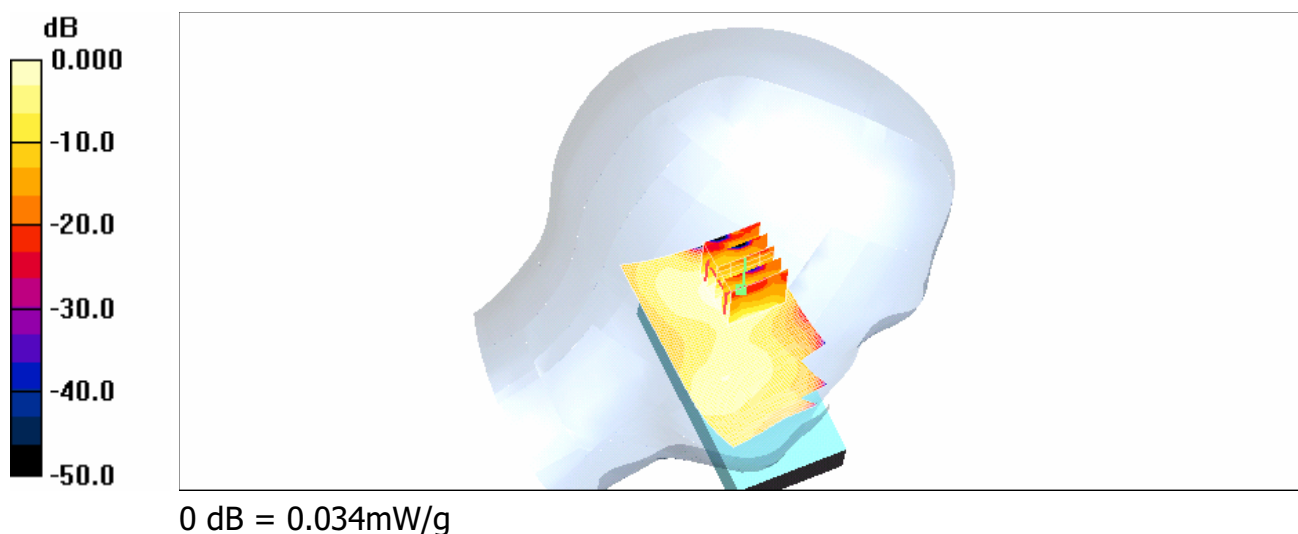

RE_Cheek_CH1_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.052 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.69 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

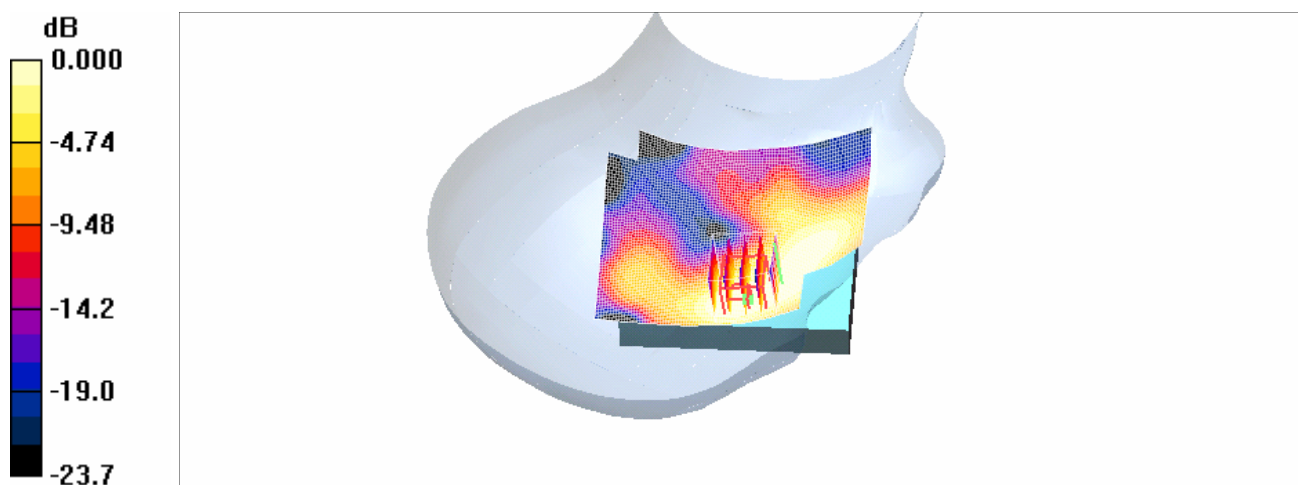

RE_Cheek_CH6_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.21 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.094 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

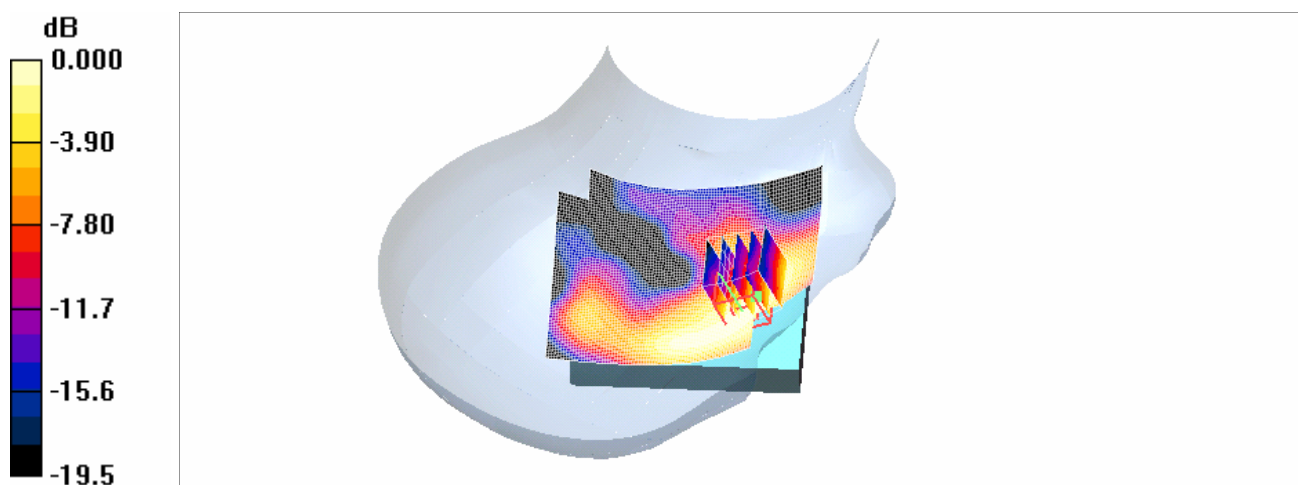

RE_Cheek_CH11_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.046 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.10 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

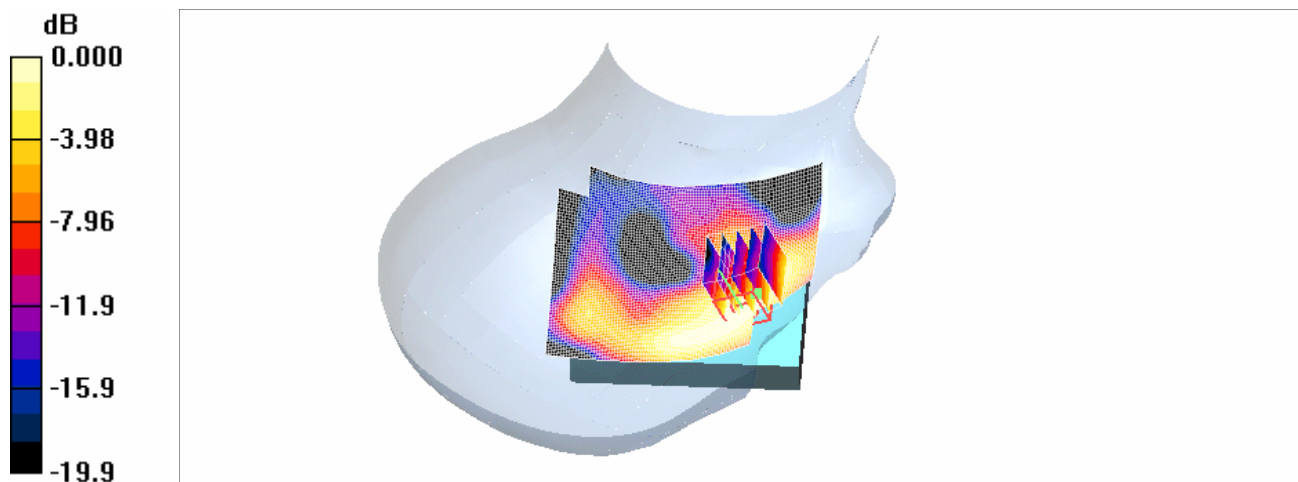

0 dB = 0.049mW/g

LE_Cheek_CH1_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.101 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.74 V/m; Power Drift = 0.108 dB
Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.097 mW/g

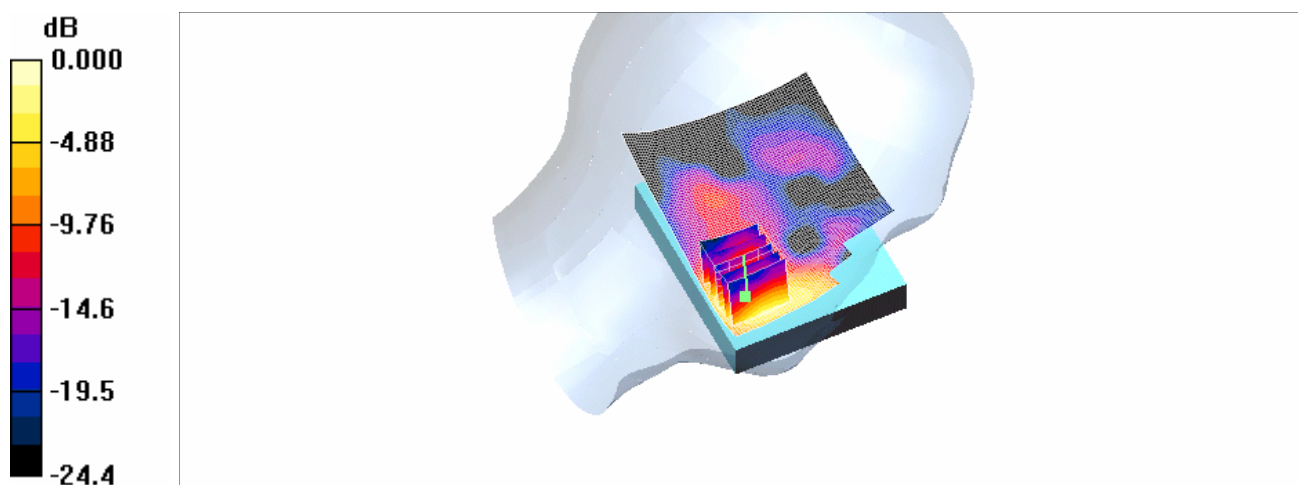

0 dB = 0.097mW/g

LE_Cheek_CH6_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.117 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.95 V/m; Power Drift = 0.168 dB
Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.114 mW/g

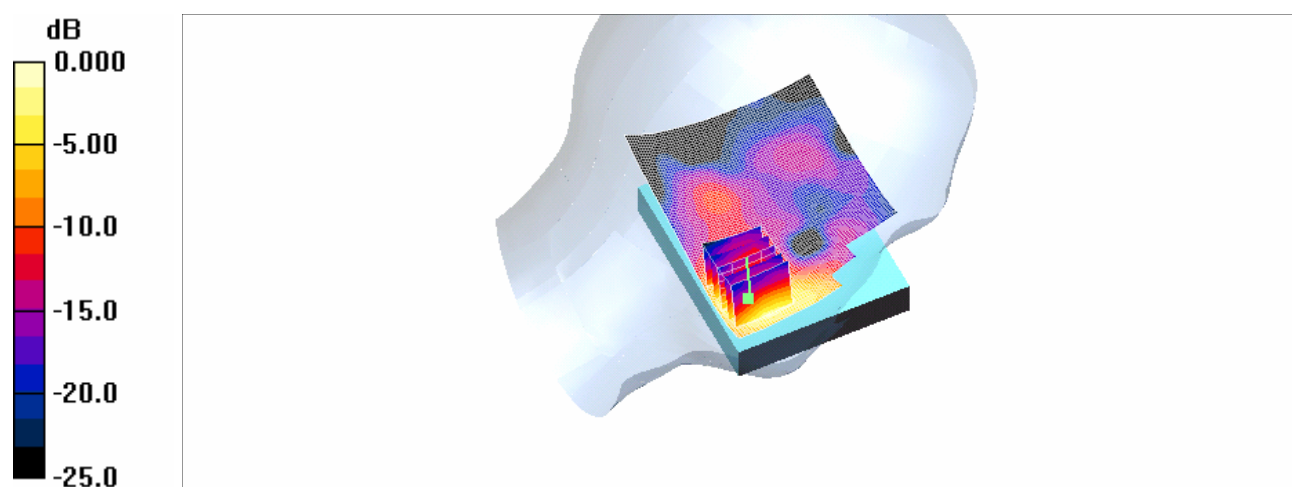

0 dB = 0.114mW/g

LE_Cheek_CH11_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.102 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.71 V/m; Power Drift = 0.179 dB
Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.043 mW/g
Maximum value of SAR (measured) = 0.096 mW/g

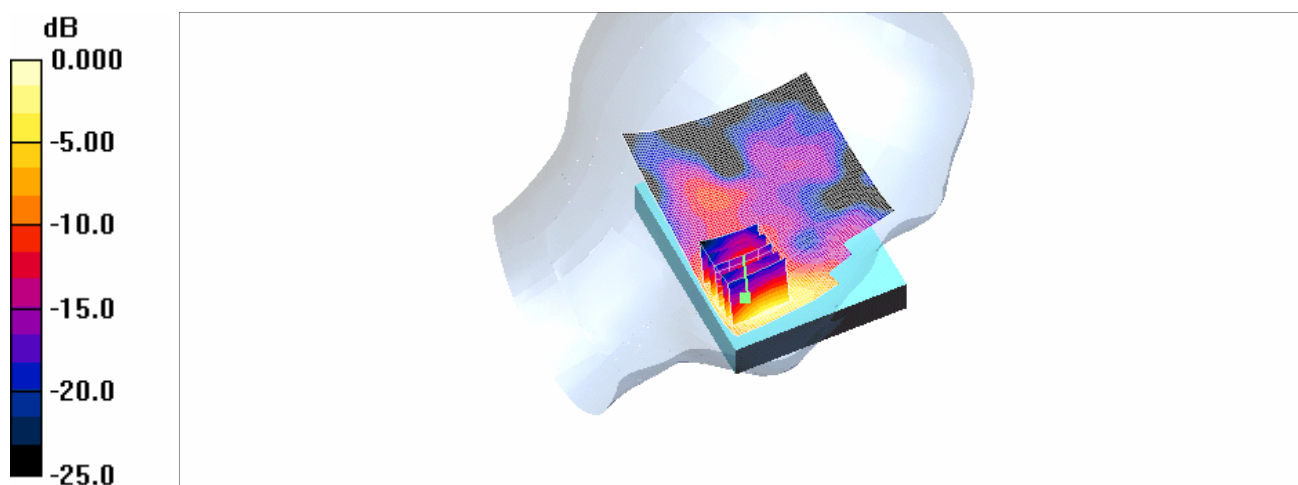

RE_Tilt_CH1_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.041 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.27 V/m; Power Drift = -0.136 dB
Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.040 mW/g

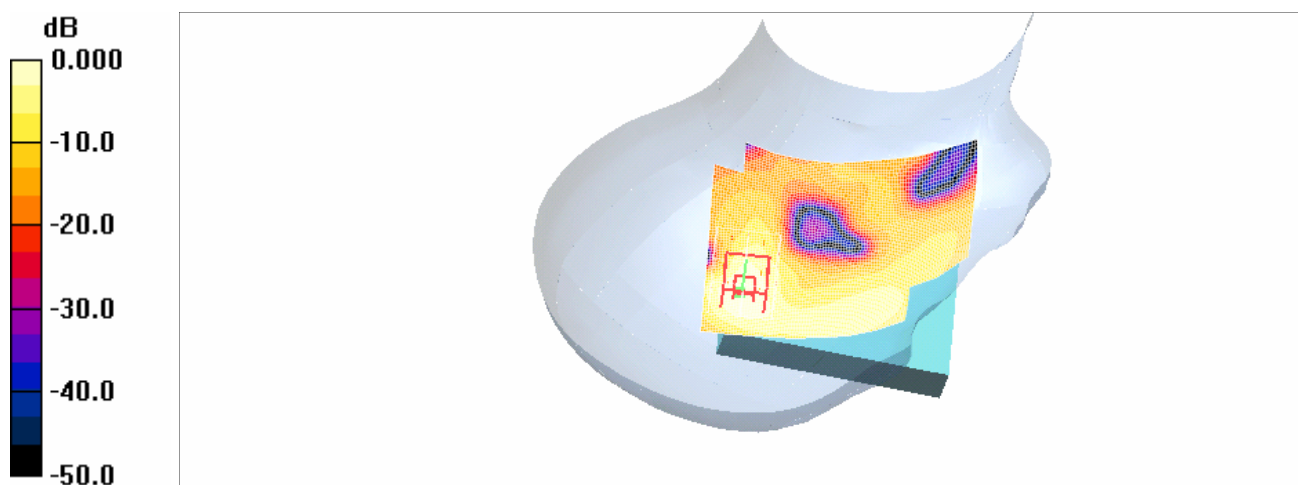

RE_Tilt_CH6_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.044 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.38 V/m; Power Drift = 0.048 dB
Peak SAR (extrapolated) = 0.076 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.043 mW/g

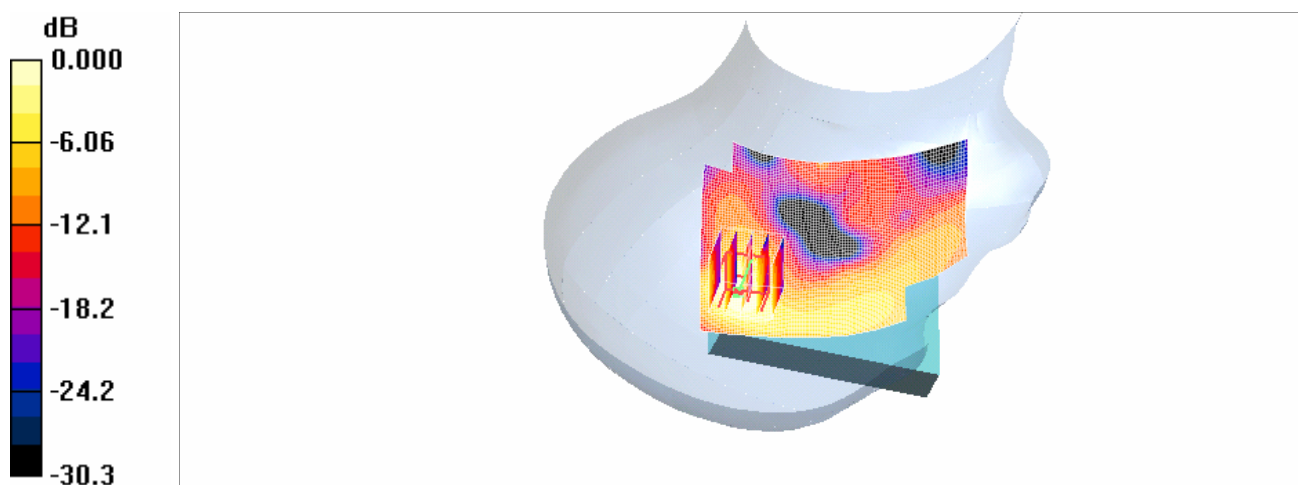

RE_Tilt_CH11_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 35575700000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.043 mW/g


RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

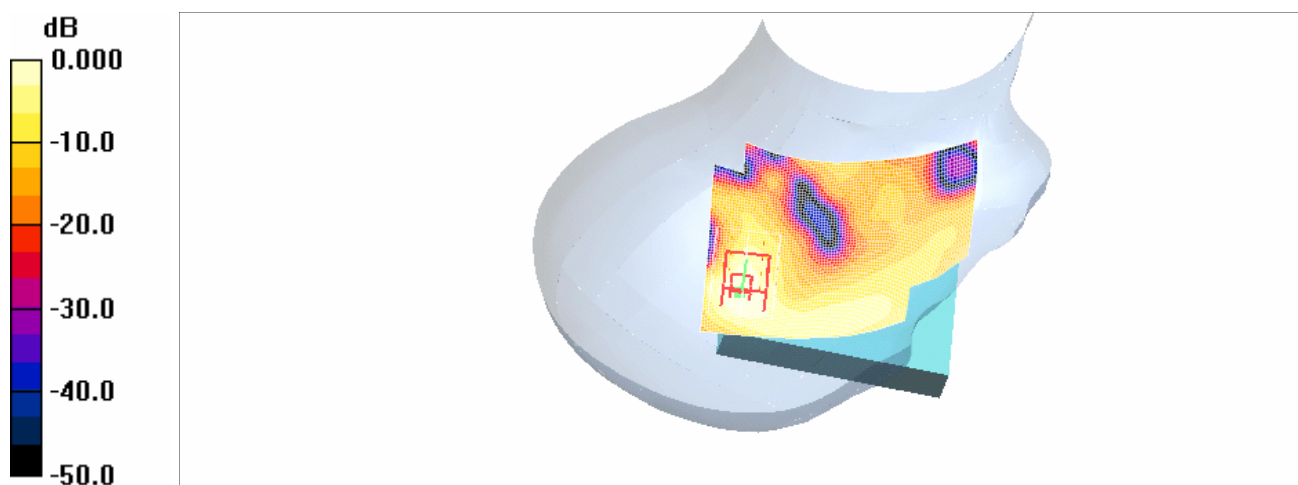

LE_Tilt_CH1_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.029 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.64 V/m; Power Drift = 0.040 dB
Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.030 mW/g

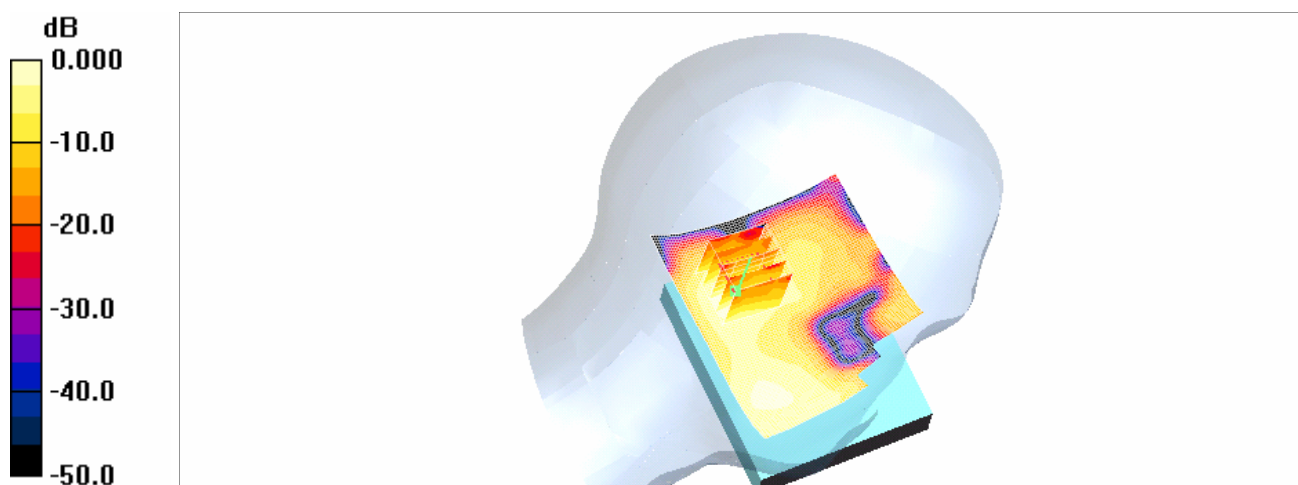

0 dB = 0.030mW/g

LE_Tilt_CH6_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.035 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.98 V/m; Power Drift = 0.104 dB
Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.038 mW/g

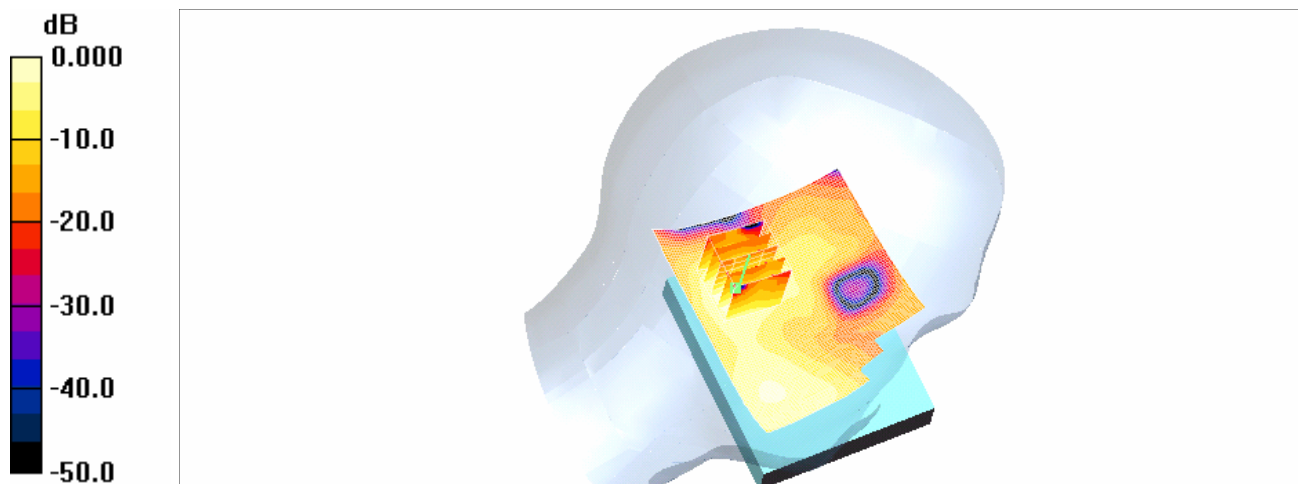

LE_Tilt_CH11_Slider on

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.032 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.74 V/m; Power Drift = -0.086 dB
Peak SAR (extrapolated) = 0.060 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.014 mW/g
Maximum value of SAR (measured) = 0.032 mW/g

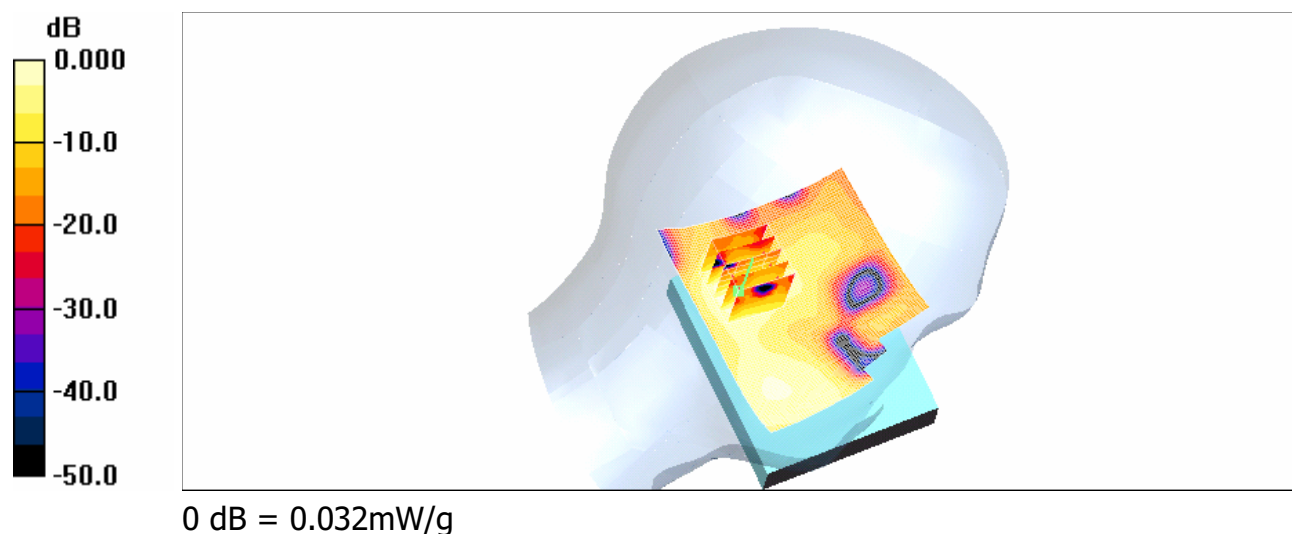

LE_Cheek_CH6_Slider on_repeated with Memory card

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.122 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.08 V/m; Power Drift = 0.179 dB
Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.122 mW/g

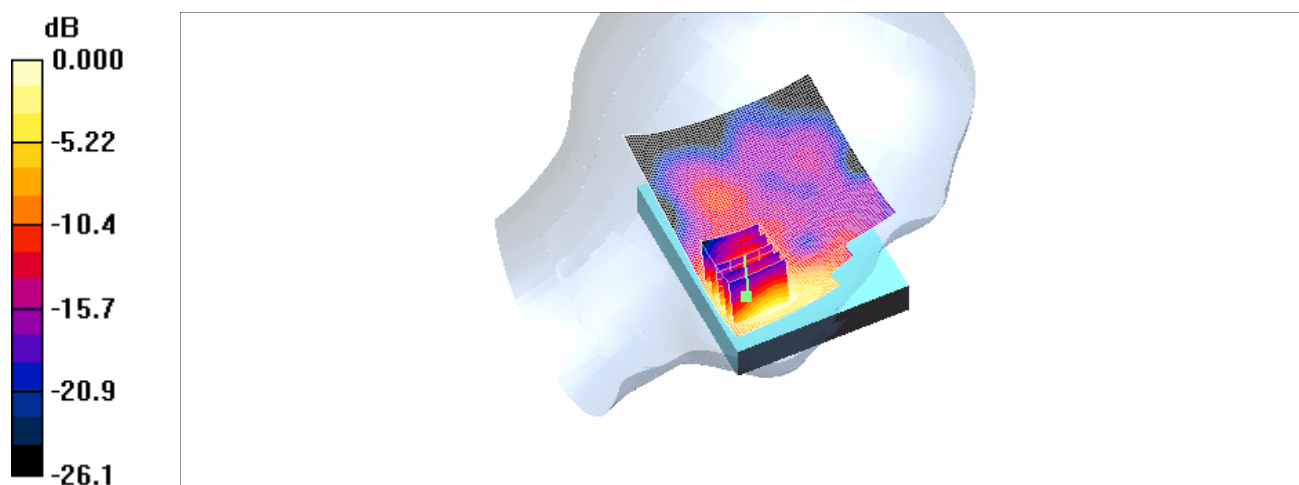

LE_Cheek_CH6_Slider on_repeated with Bluetooth active

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.129 mW/g


LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.30 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

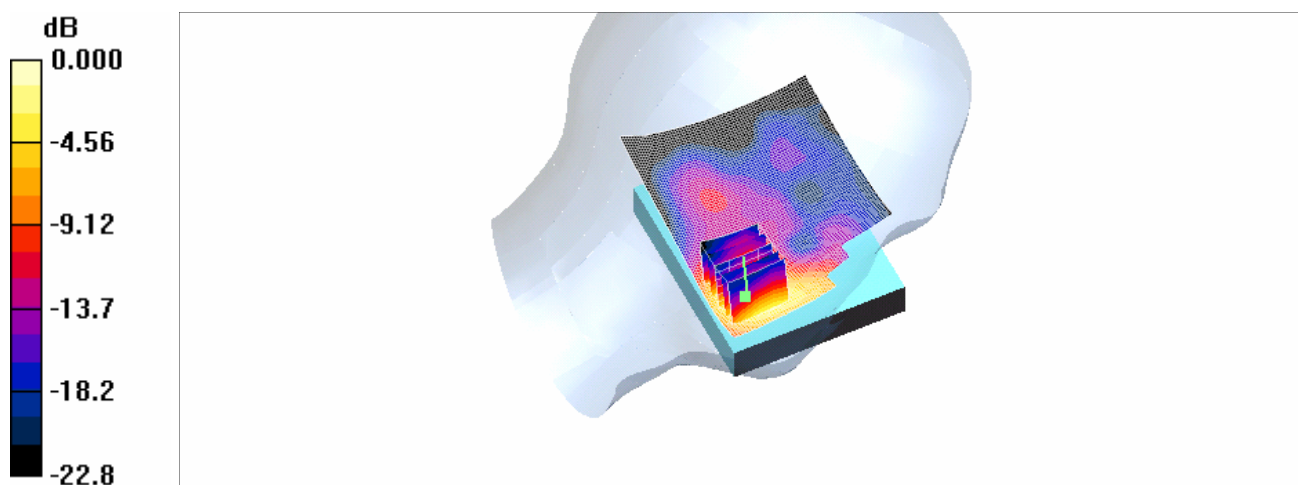

LE_Cheek_CH6_Slider on_repeated with Samsung battery

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 35575700000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.112 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.37 V/m; Power Drift = -0.126 dB
Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.121 mW/g

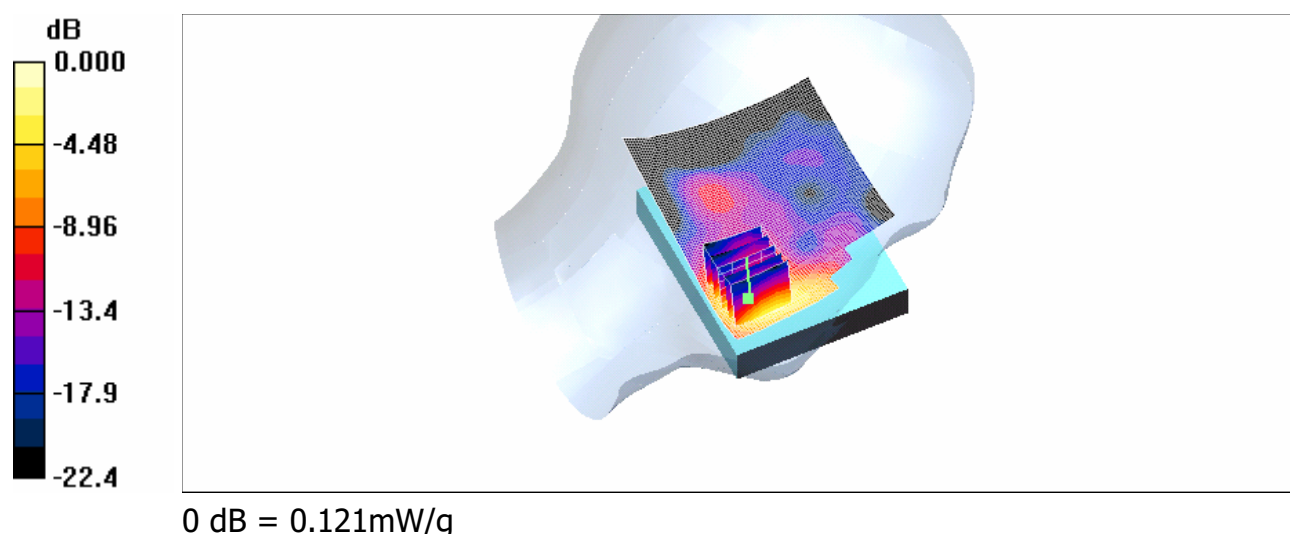

RE_Cheek_CH11_hold up

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.019 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.36 V/m; Power Drift = 0.189 dB
Peak SAR (extrapolated) = 0.038 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00926 mW/g
Maximum value of SAR (measured) = 0.020 mW/g

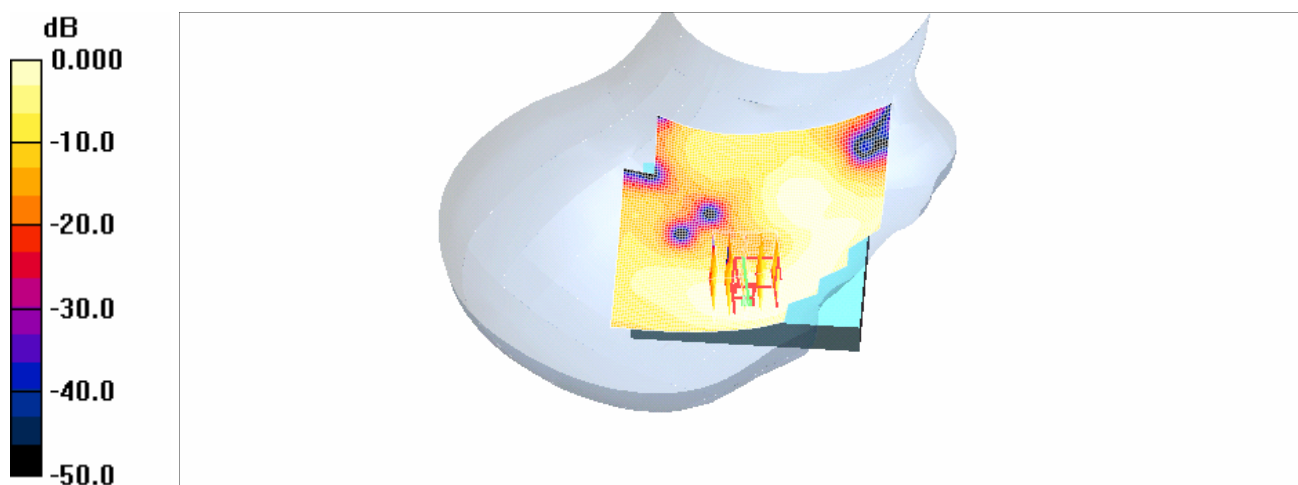

LE_Cheek_CH11_hold up

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.047 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.52 V/m; Power Drift = -0.095 dB
Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.041 mW/g

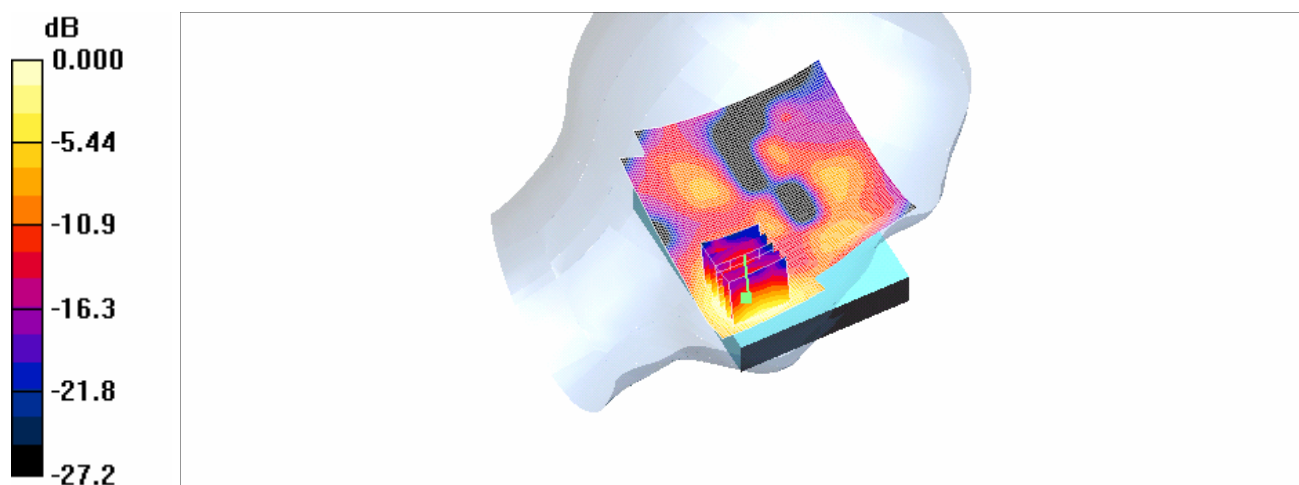

BODY_CH1

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 2.05$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.041 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.45 V/m; Power Drift = -0.192 dB
Peak SAR (extrapolated) = 0.065 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.041 mW/g

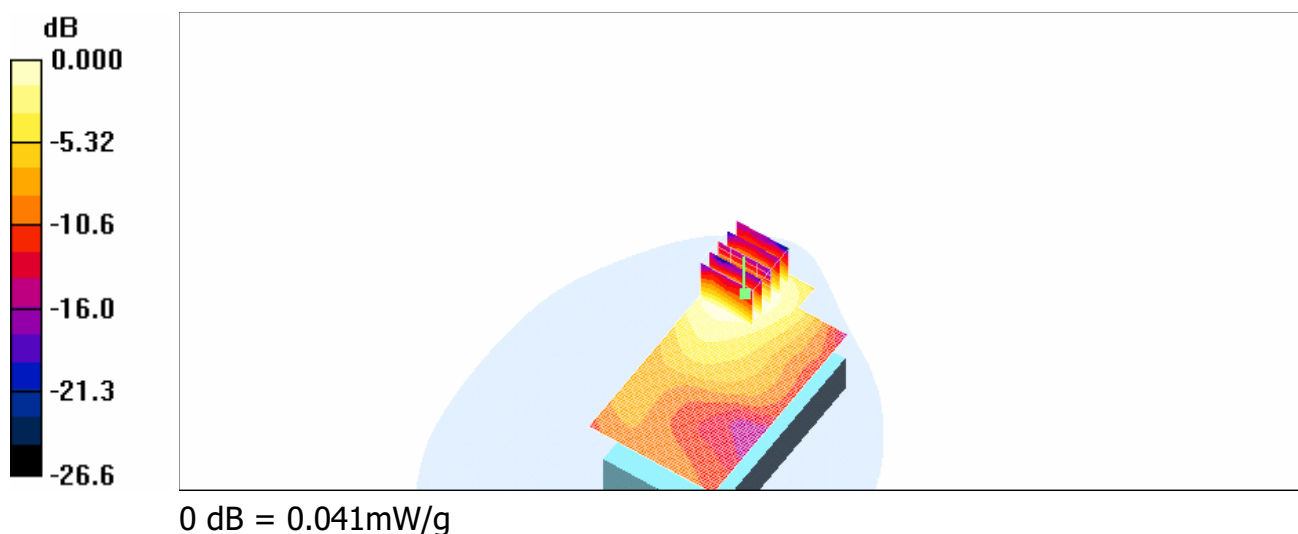

BODY_CH6

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.050 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.58 V/m; Power Drift = 0.176 dB
Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.026 mW/g
Maximum value of SAR (measured) = 0.049 mW/g

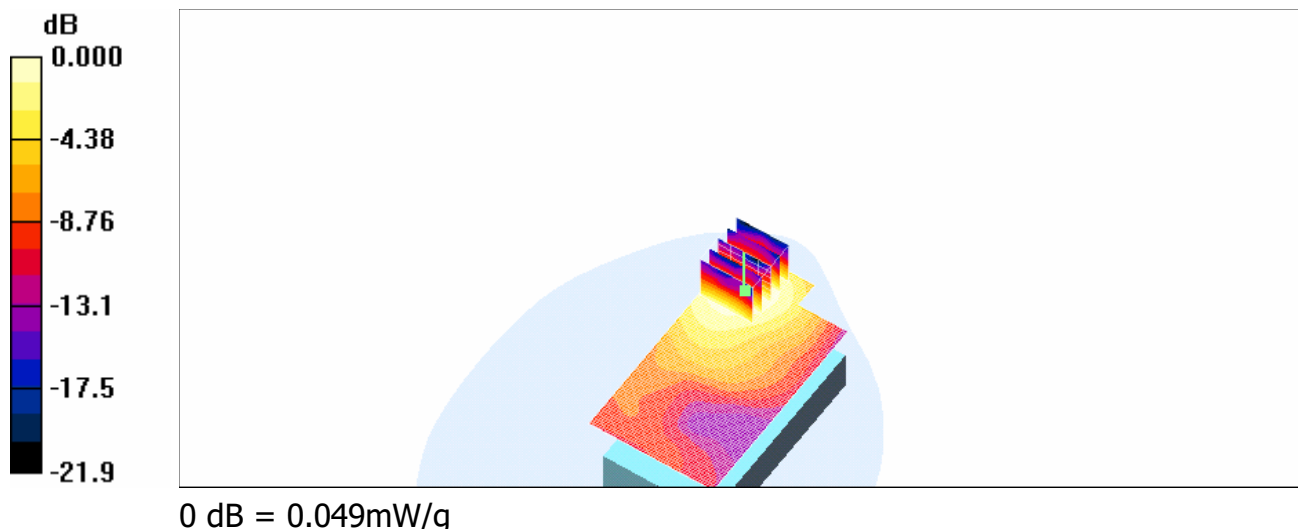

BODY_CH11

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.1$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.043 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.37 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.071 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.043 mW/g

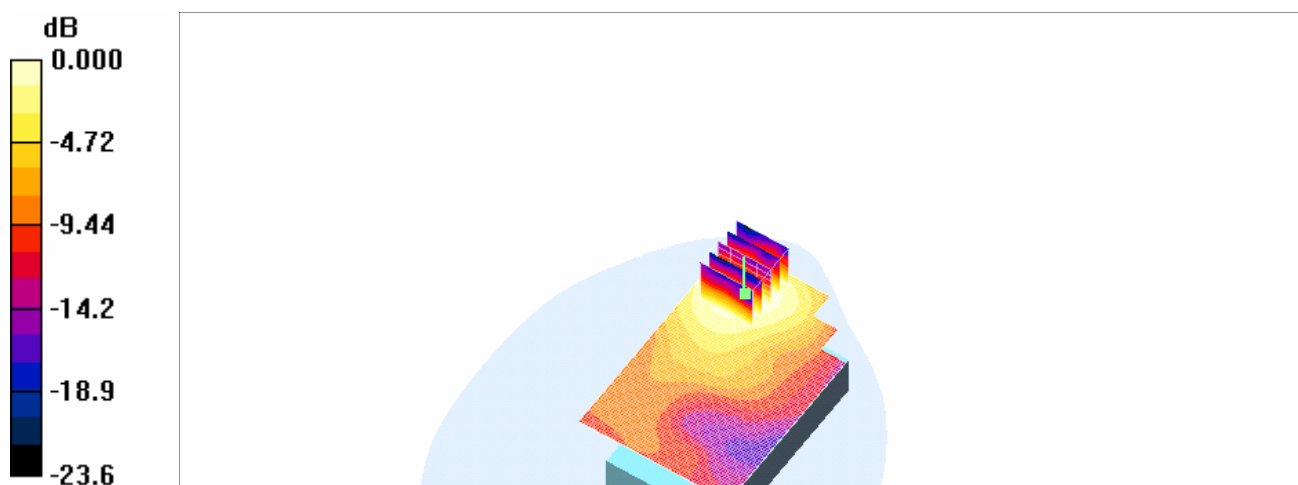

0 dB = 0.043mW/g

BODY_CH6_repeated for EUT front phantom

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.031 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.63 V/m; Power Drift = -0.090 dB
Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.031 mW/g

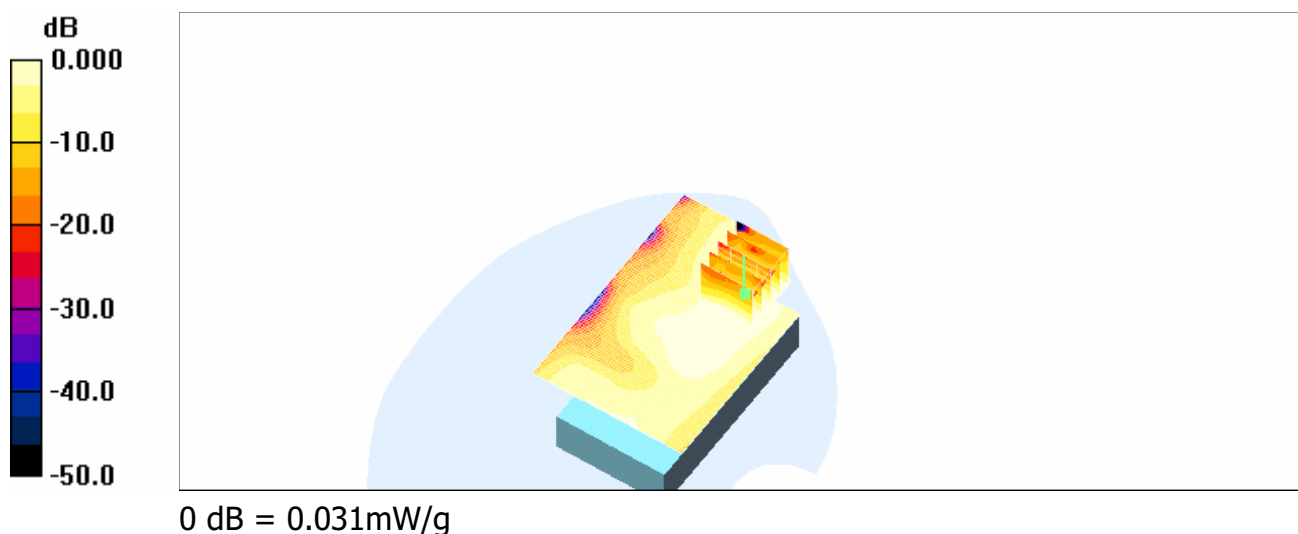

BODY_CH6_repeated with Memory card

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.050 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.50 V/m; Power Drift = 0.055 dB
Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.026 mW/g
Maximum value of SAR (measured) = 0.050 mW/g

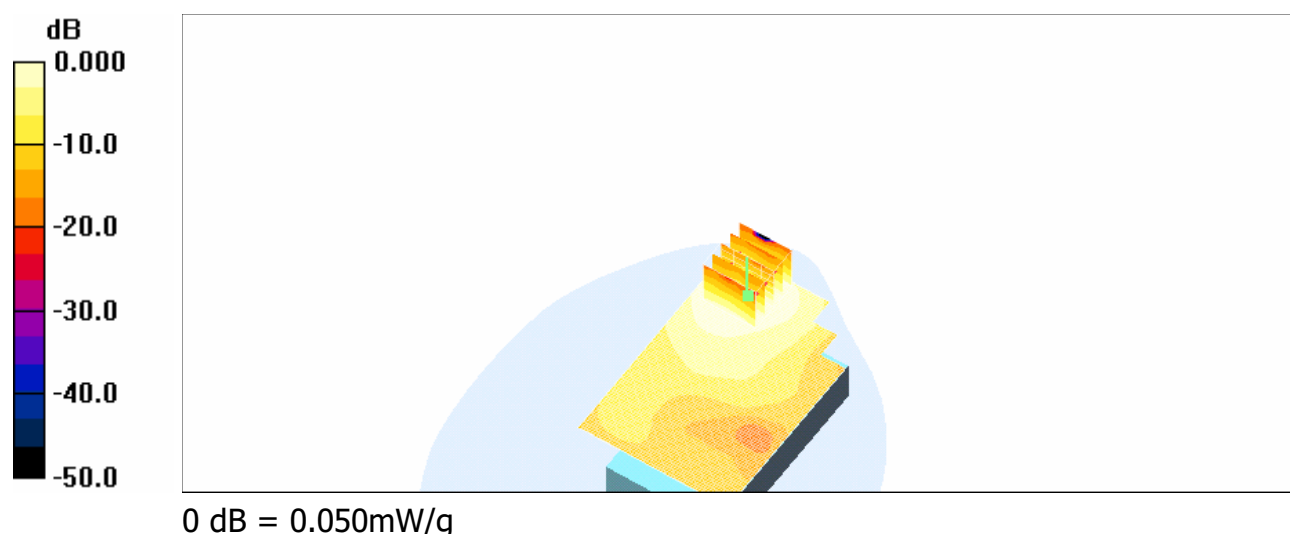

BODY_CH6_repeated with Bluetooth active

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.052 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.58 V/m; Power Drift = -0.035 dB
Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.027 mW/g
Maximum value of SAR (measured) = 0.052 mW/g

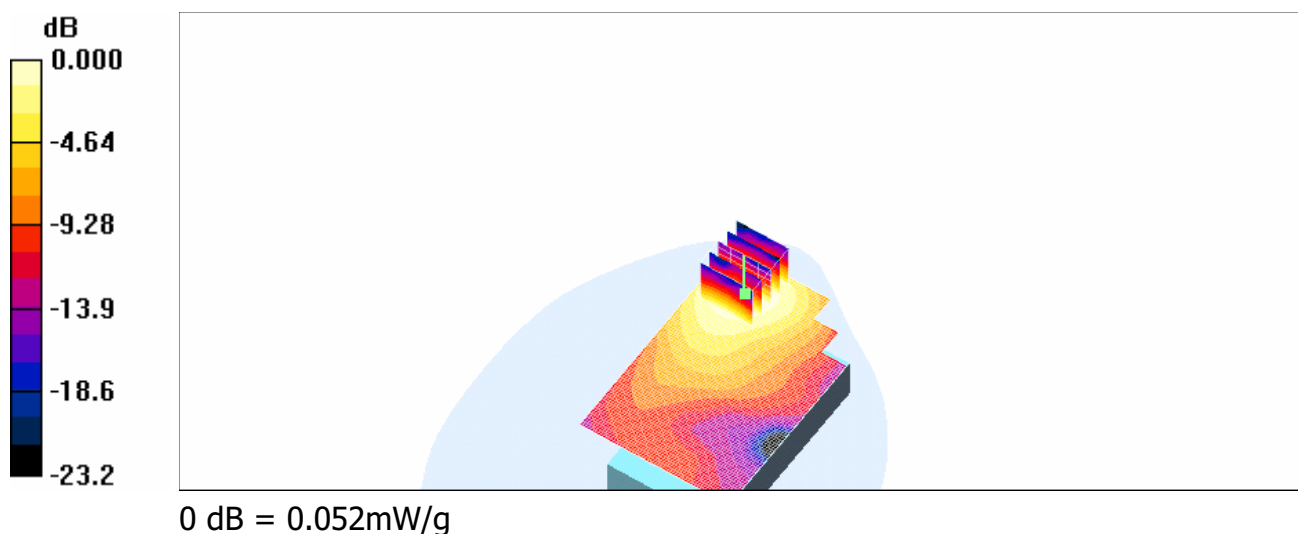

BODY_CH6_repeated with Samsung battery

DUT: KAIS130; Type: WLAN802.11 b; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

BODY/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.058 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.57 V/m; Power Drift = 0.048 dB
Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.029 mW/g
Maximum value of SAR (measured) = 0.057 mW/g

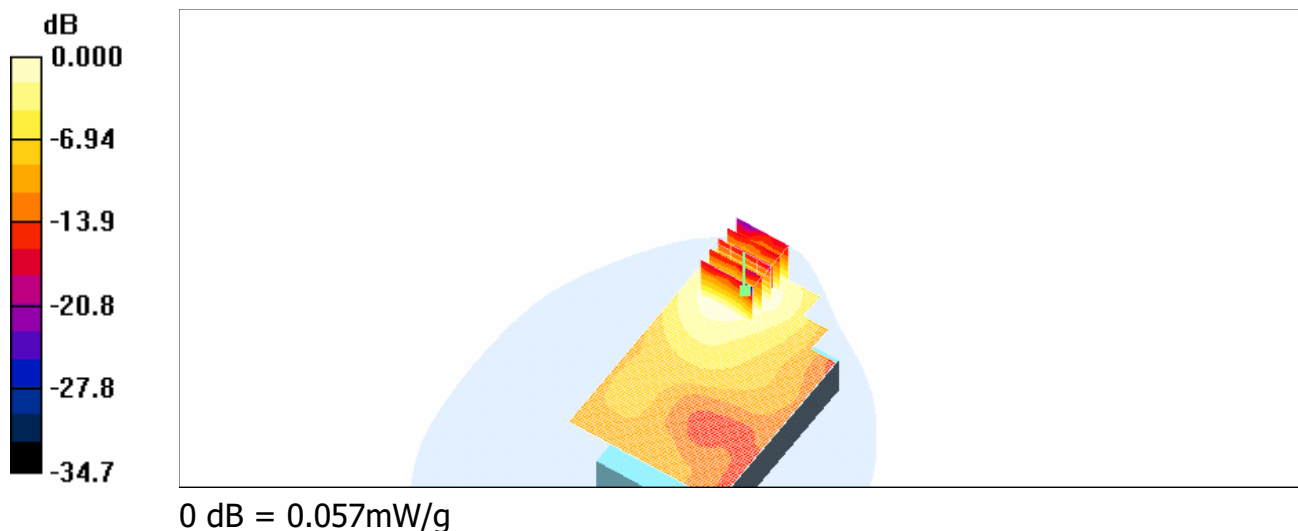

RE_Cheek_CH1_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.024 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.41 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.023 mW/g



0 dB = 0.023mW/g

RE_Cheek_CH6_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.028 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.23 V/m; Power Drift = 0.190 dB
Peak SAR (extrapolated) = 0.044 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.014 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

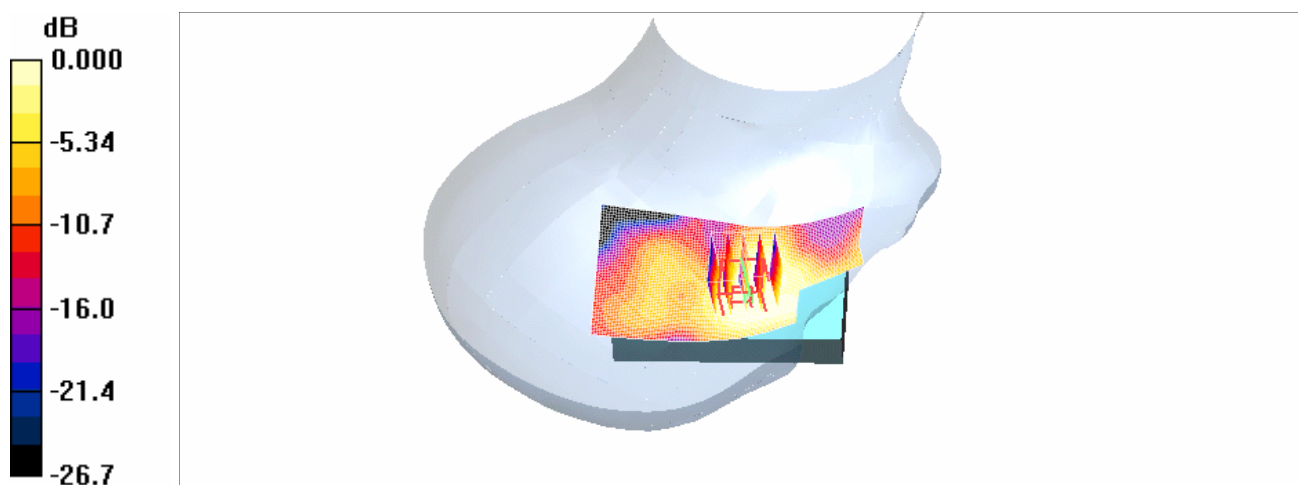

0 dB = 0.026mW/g

RE_Cheek_CH11_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.026 mW/g


RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.32 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

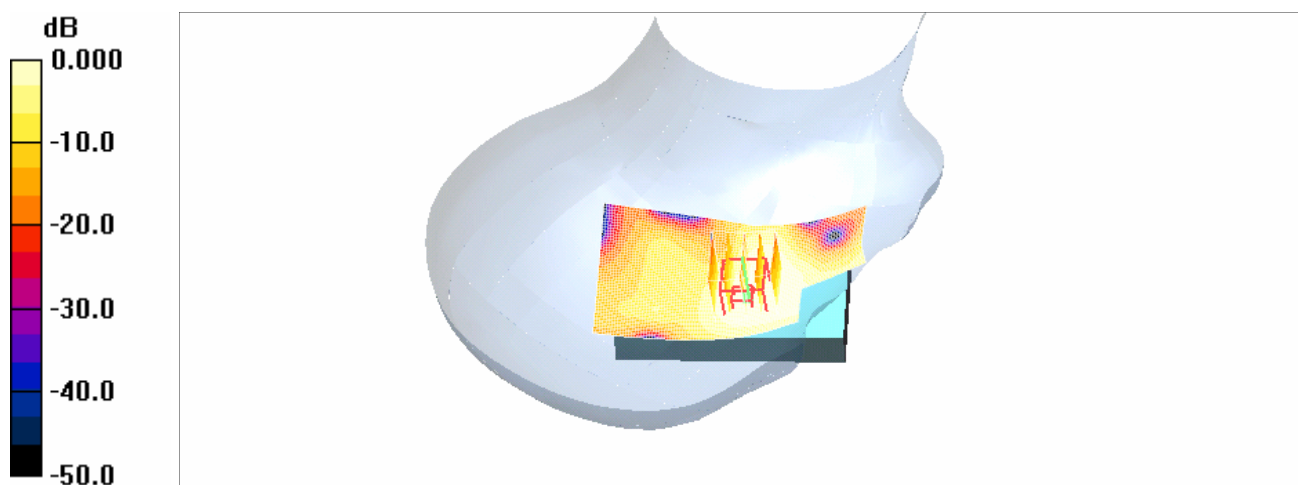

0 dB = 0.025mW/g

LE_Cheek_CH1_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.042 mW/g


LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.15 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.070 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

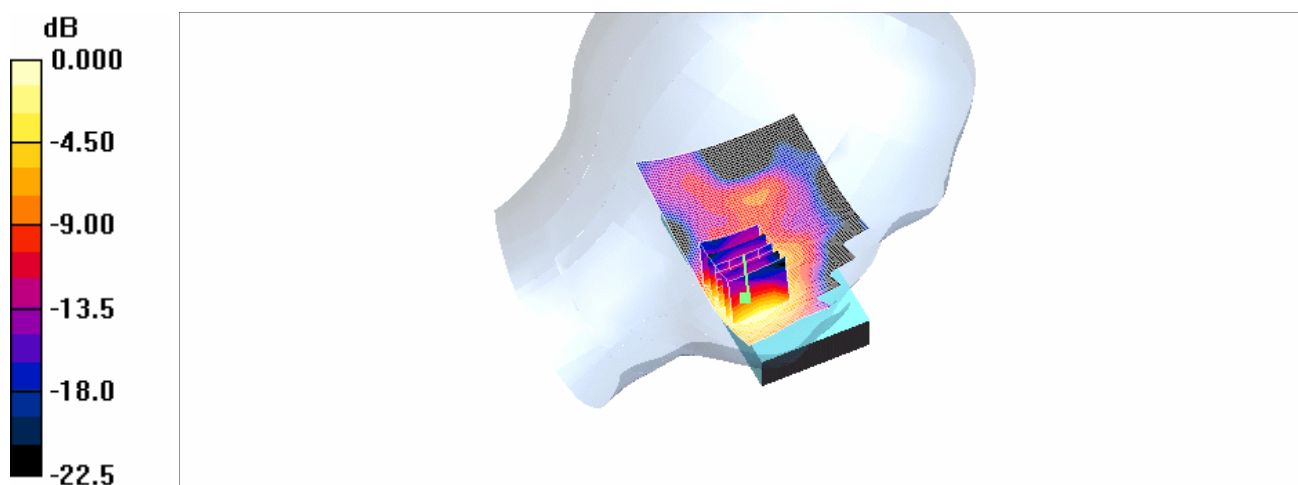

LE_Cheek_CH6_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.051 mW/g


LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.22 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

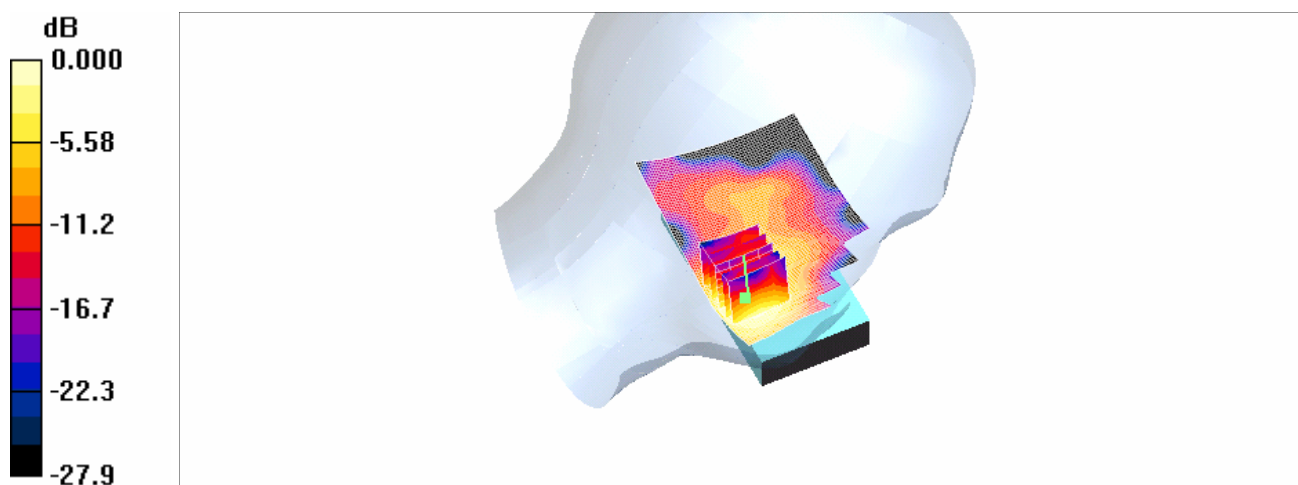

0 dB = 0.049mW/g

LE_Cheek_CH11_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.042 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.05 V/m; Power Drift = 0.159 dB
Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.021 mW/g
Maximum value of SAR (measured) = 0.044 mW/g

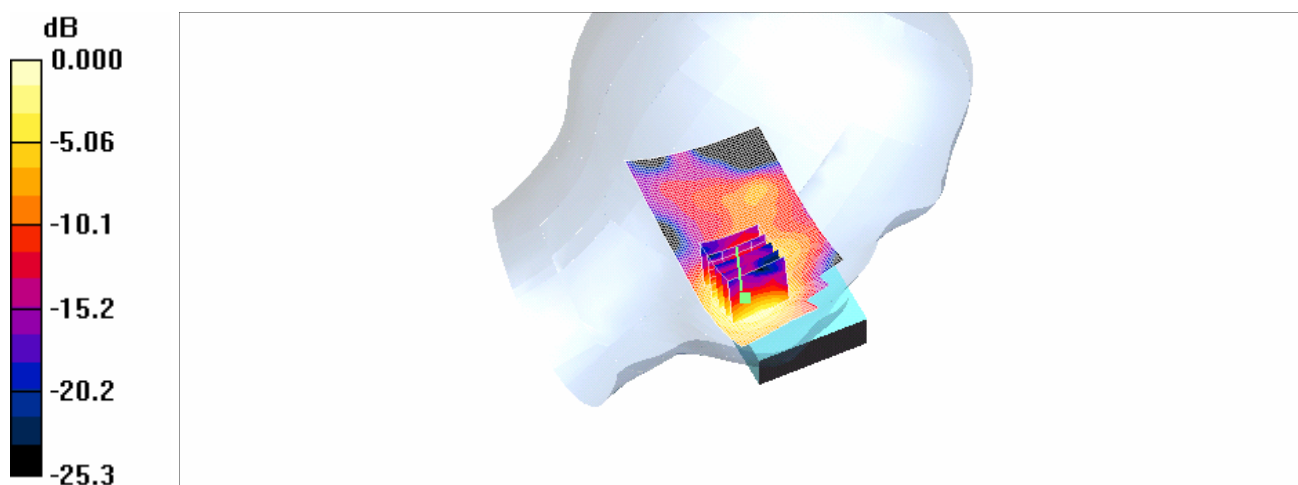

RE_Tilt_CH1_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.011 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.14 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.00951 mW/g; SAR(10 g) = 0.00519 mW/g
Maximum value of SAR (measured) = 0.010 mW/g

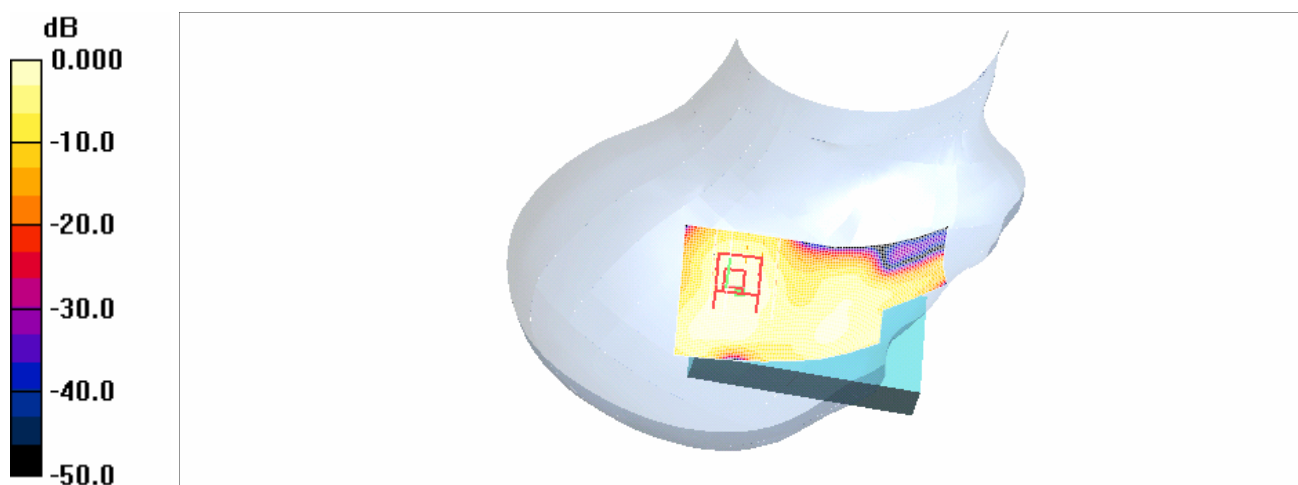

0 dB = 0.010mW/g

RE_Tilt_CH6_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.015 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.34 V/m; Power Drift = 0.191 dB
Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00646 mW/g
Maximum value of SAR (measured) = 0.013 mW/g

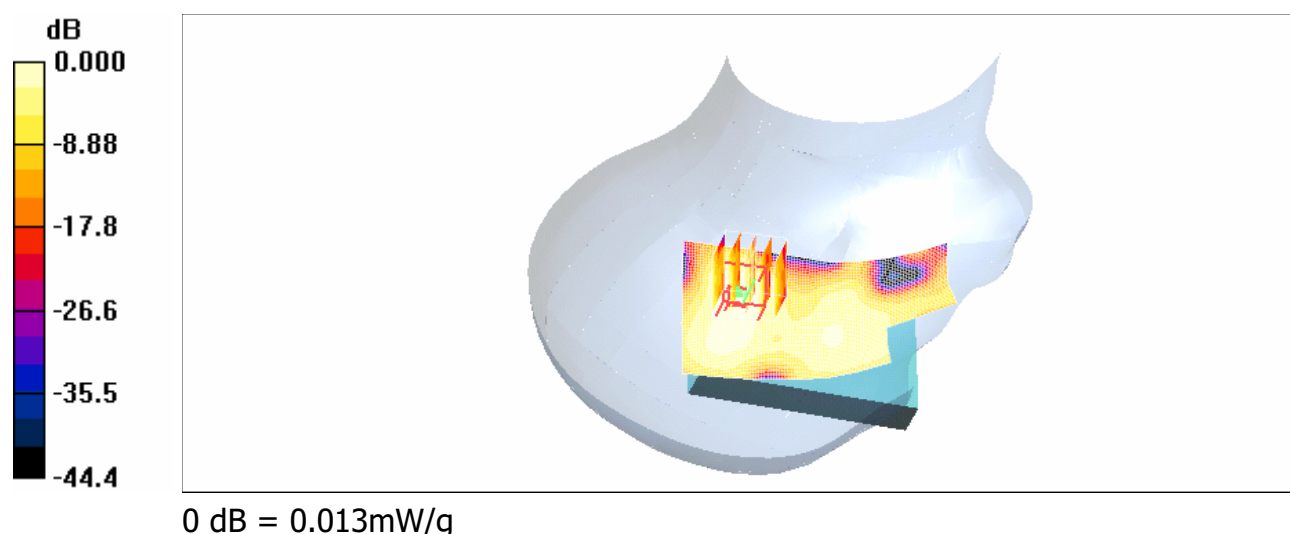

RE_Tilt_CH11_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.013 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.30 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00626 mW/g
Maximum value of SAR (measured) = 0.013 mW/g

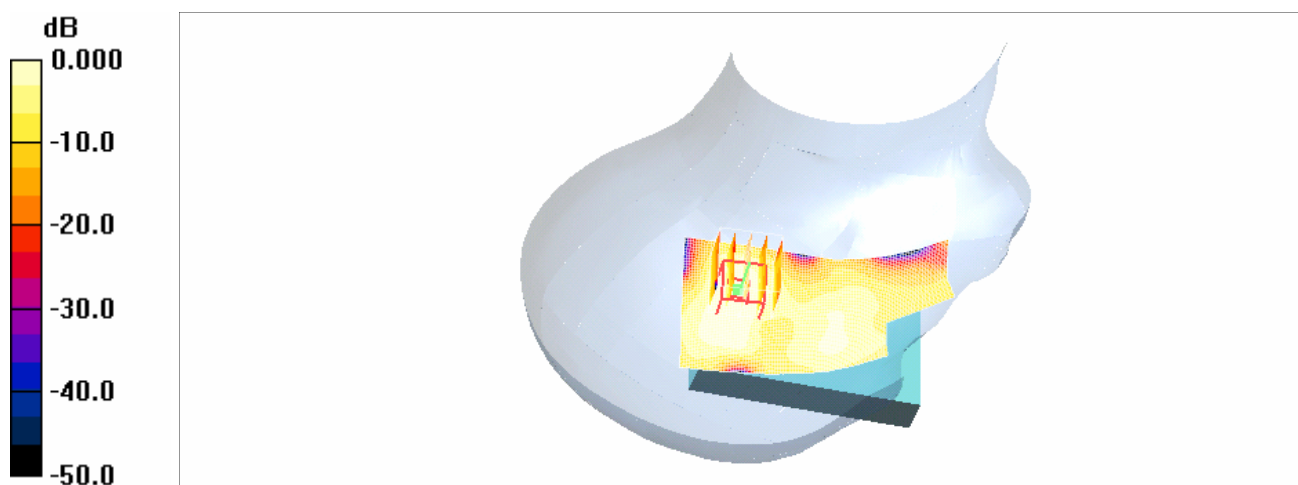

0 dB = 0.013mW/g

LE_Tilt_CH1_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.017 mW/g


LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.01 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.020 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00611 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

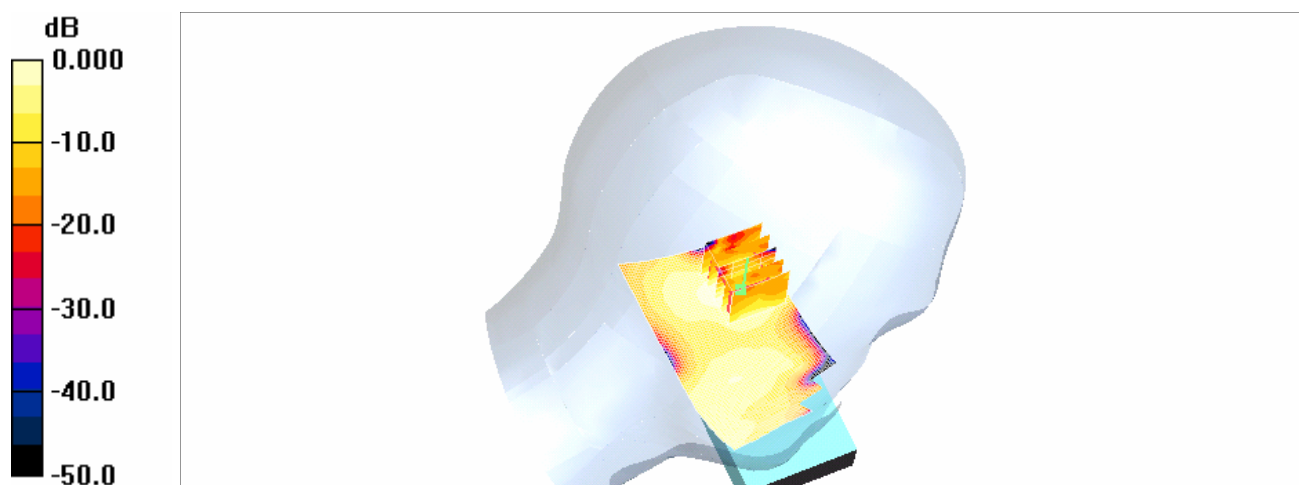

LE_Tilt_CH6_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.022 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.31 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00743 mW/g
Maximum value of SAR (measured) = 0.017 mW/g

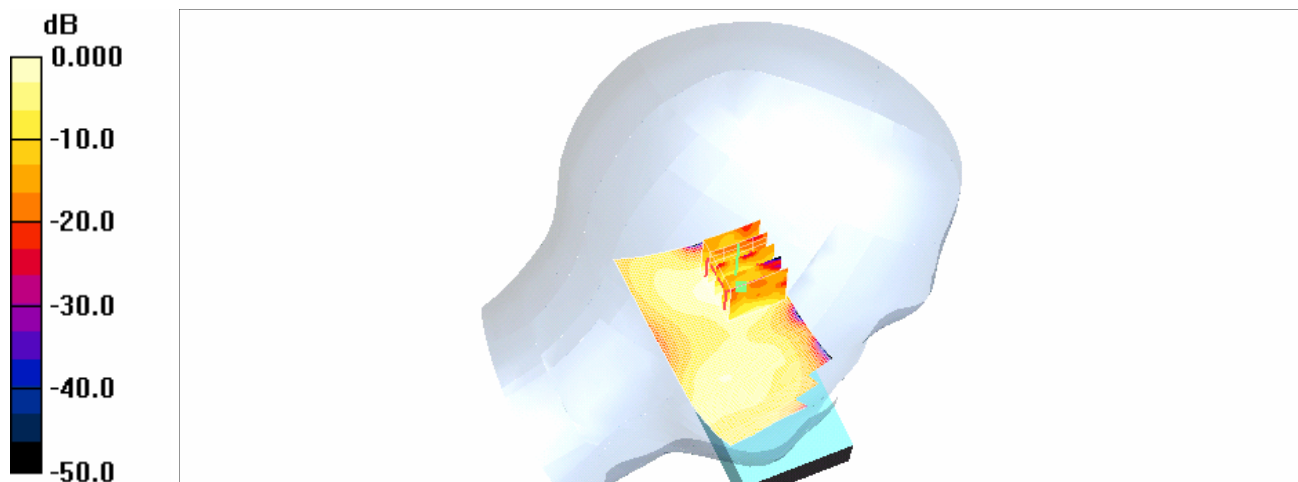

0 dB = 0.017mW/g

LE_Tilt_CH11_slider off

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

LE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.021 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.14 V/m; Power Drift = 0.103 dB
Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00738 mW/g
Maximum value of SAR (measured) = 0.017 mW/g

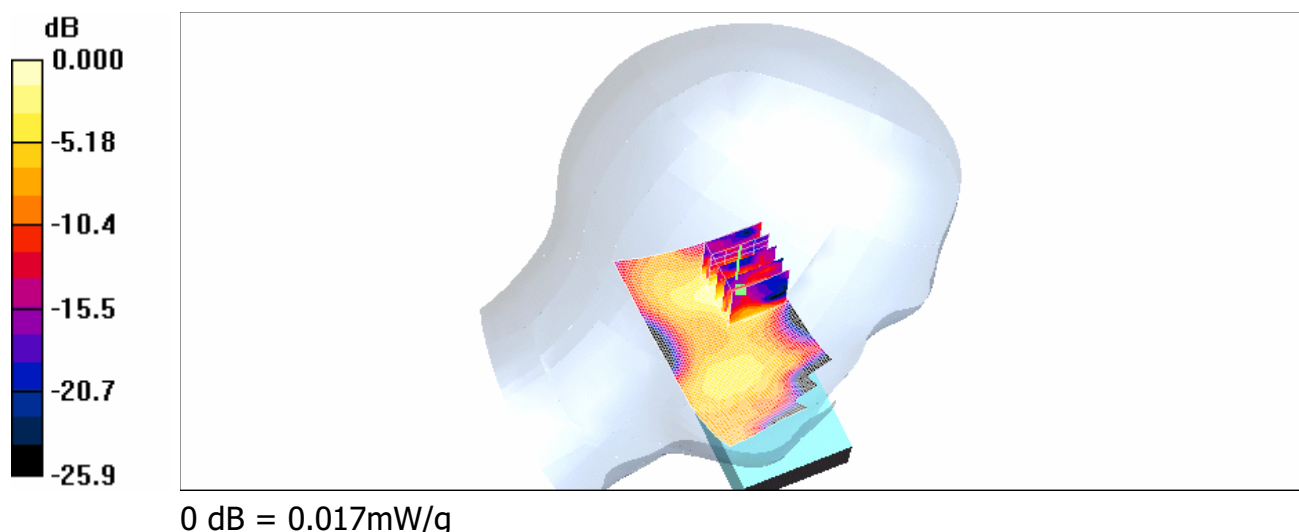

RE_Cheek_CH1_Slider on

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HEAD 2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.025 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.20 V/m; Power Drift = -0.166 dB
Peak SAR (extrapolated) = 0.040 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

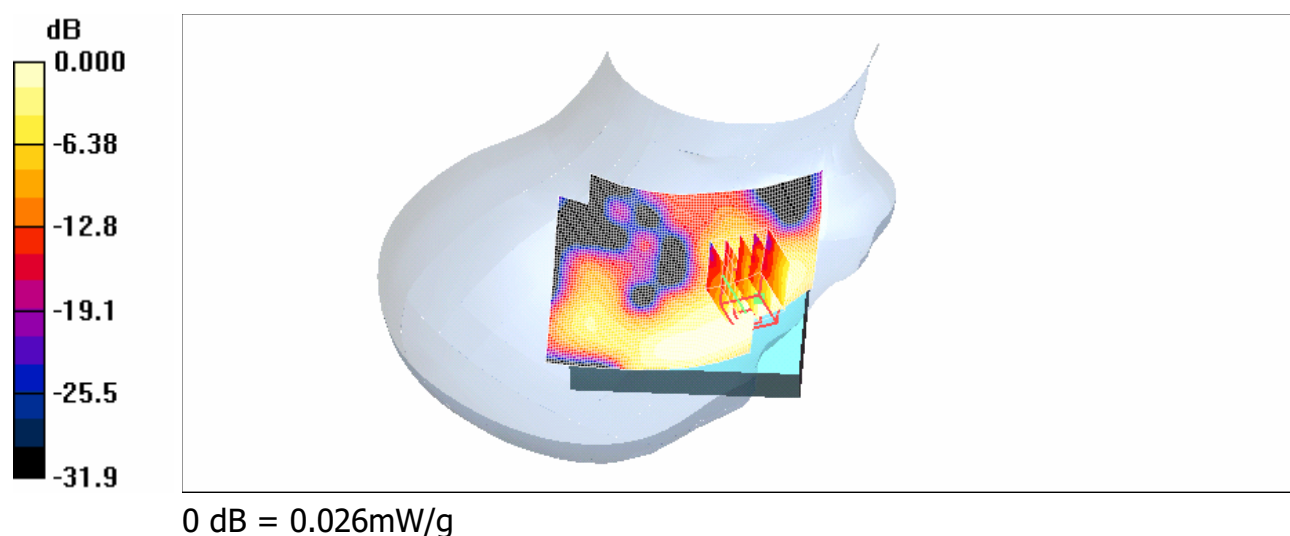

RE_Cheek_CH6_Slider on

DUT: KAIS130; Type: WLAN802.11 g; IMEI: 355757000000022

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HEAD 2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; Calibrated: 2007/8/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2007/4/20
- Phantom: SAM1; Type: SAM 4.0; Serial: TP:1419
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

RE_Cheek/Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.030 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.32 V/m; Power Drift = 0.177 dB
Peak SAR (extrapolated) = 0.054 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.032 mW/g

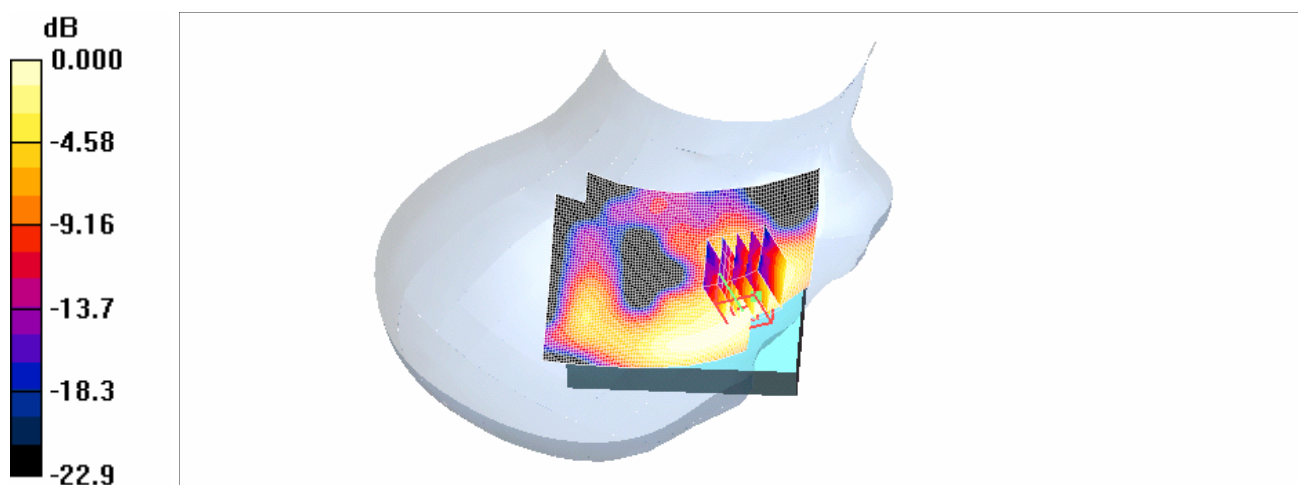

0 dB = 0.032mW/g