

Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 1 of 71

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: Smartphone

Brand Name: HTC

Model Name: PB99200

Model Different: N/A

FCC ID: NM8PB99200

Report No.: EH/2010/30026

Issue Date: Mar. 10, 2010

FCC Rule Part: §15.247, Cat: DTS

Prepared for: HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan

County 330, Taiwan.

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan





Testing Laboratory 0513 Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,所如生结里体影响就之样品色者,同時所撰品体保包包于。大都生主领大公司事而转行,不可驾码推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms.and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 **134** 號



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 2 of 71

VERIFICATION OF COMPLIANCE

Applicant: HTC Corporation

No. 23 Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

Smartphone **Equipment Under Test:**

Brand Name: HTC

PB99200 Model No.:

Model Difference: N/A

NM8PB99200 FCC ID: EH/2010/30026 File Number:

Mar. 04, 2010 ~ Mar. 09, 2010 Date of test:

Mar. 04, 2010 **Date of EUT Received:**

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Sky Wang	Date	Mar. 10, 2010	
	Sky Wang / Engineer			
Prepared By:	Gigi yeh	Date	Mar. 10, 2010	
_	Gigi Yeh / Clerk			
Approved By:	Timent Su	Date	Mar. 10, 2010	
_	Vincent Su / Manager			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 3 of 71

Version

Version No.	Date	Description
00	Mar. 10, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms.and.conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention
only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all
their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration for responsibility in the law of findings may be prosecuted to the fullest extent of the law. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 4 of 71

Table of Contents

1		EKAL INFUKNIATION	
	1.1	Product Description	
	1.2	Related Submittal(s) / Grant (s)	
	1.3	Test Methodology	9
	1.4	Test Facility	9
	1.5	Special Accessories	9
	1.6	Equipment Modifications	9
2	SYS	TEM TEST CONFIGURATION	10
	2.1	EUT Configuration	10
	2.2	EUT Exercise	10
	2.3	Test Procedure	10
	2.4	Configuration of Tested System	11
3	SUM	IMARY OF TEST RESULTS	12
4		CRIPTION OF TEST MODES	
5	CON	DUCTED EMISSION TEST	13
	5.1	Standard Applicable:	
	5.2	Measurement Equipment Used:	13
	5.3	EUT Setup:	13
	5.4	Measurement Procedure:	14
	5.5	Measurement Result:	14
6	PEA	K OUTPUT POWER MEASUREMENT	17
	6.1	Standard Applicable:	17
	6.2	Measurement Equipment Used:	18
	6.3	Test Set-up:	18
	6.4	Measurement Procedure:	18
	6.5	Measurement Result:	19
7	6dB	Bandwidth	24
	7.1	Standard Applicable:	24
	7.2	Measurement Equipment Used:	24
	7.3	Test Set-up:	24
	7.4	Measurement Procedure:	24
	7.5	Measurement Result:	25
8	100K	CHZ BANDWIDTH OF BAND EDGES MEASUREMENT	30
	8 1	Standard Applicable:	30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alterative foreact of the index expenses the response of this index may be prosecuted to the full set verset of the law. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 5 of 71

	8.2	Measurement Equipment Used:	30
	8.3	Test SET-UP:	31
	8.4	Measurement Procedure:	32
	8.5	Field Strength Calculation:	32
	8.6	Measurement Result:	32
9	SPUF	RIOUS RADIATED EMISSION TEST	39
	9.1	Standard Applicable	39
	9.2	Measurement Equipment Used:	39
	9.3	Test SET-UP:	39
	9.4	Measurement Procedure:	39
	9.5	Field Strength Calculation	40
	9.6	Measurement Result:	40
10	Peak	Power Spectral Density	65
	10.1	Standard Applicable:	
	10.2	Measurement Equipment Used:	65
	10.3	Test Set-up:	65
	10.4	Measurement Procedure:	65
	10.5	Measurement Result:	66
11	ANT	ENNA REQUIREMENT	7 1
	11.1	Standard Applicable:	
	11.2	Antenna Connected Construction:	71



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 6 of 71

GENERAL INFORMATION

1.1 **Product Description**

General:

general.			
Product Name	Smartphone		
Brand Name	HTC		
Model Name	PB99200		
Model Difference	N/A		
Data Cable (USB)	 Model No.: DC M410, Brand Name: MEC Model No.: DC M410, Brand Name: Foxlink 		
Simple Hands-free (SHF)	1 Model No : RC F160 Brand Name: Cotron		
LCD Panel:	Model No.: AMS369FG03-0, Brand Name: SMD		
Camera	 Model No.: 08PM15A, Brand Name: LITEON Model No.: CHT5A-007A, Brand Name: FOXCONN 		
	3.7 Vdc re-chargeable battery or 5Vdc by AC/DC power adapter		
	Battery: 1. Model No.: BB99100, Brand Name: Formosa 2. Model No.: BB99100, Brand Name: HT-Energy		
Power Supply	Adapter: 1. Model: TC X250 (X=C, U, E), Brand Name: Delta 2. Model: TC X250 (X=B, U, E), Brand Name: Emerson 3. Model: TC P300, Brand Name: Delta 4. Model: TC P300, Brand Name: Foxlink		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms.and.conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention
only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all
their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration for responsibility in the law of findings may be prosecuted to the fullest extent of the law. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 7 of 71

GSM and WCDMA:

	Operating Frequency			
	GSM/GPRS 850, Class 12	824.2 MHz- 848.8 MHz	33 dBm	
	GSM/GPRS 900, Class 12	880.2MHz – 914.8MHz	33 dBm	
	GSM/GPRS 1800, Class 12	1710.2MHz – 1784.8MHz	30 dBm	
Cellular Phone Standards	GSM/GPRS 1900, Class 12	1850.2MHz – 1909.8MHz	30 dBm	
Frequency Range and Power:	EDGE 850, Class 12 824.2 MHz– 848.8 MHz		27 dBm	
1 OWC1.	EDGE 900, Class 12	880.2MHz – 914.8MHz	27 dBm	
	EDGE 1800, Class 12	1710.2MHz – 1784.8MHz	26 dBm	
	EDGE 1900, Class 12	1850.2MHz – 1909.8MHz	26 dBm	
	WCDMA/HSUPA/HSDPA Band I	1922.4MHz –1977.6MHz	24 dBm	
	WCDMA/HSUPA/HSDPA Band VIII	882.4MHz –912.6MHz	24 dBm	
Hardware Version:	N/A			
Software Version:	N/A			
IMEI:	357841030038364			



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 8 of 71

WLAN: 802.11 b/g:

Frequency Range:	2412 – 2462 MHz
Channel number:	11 channels
Output Power:	802.11 b: 17.41dBm 802.11 g: 13.54dBm
Modulation Technology:	DSSS, OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation:	PIFA Antenna, 1.1dBi.

Bluetooth:

Bluetooth Version:	$V2.1 + EDR (GFSK + \pi/4DQPSK + 8DPSK)$
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Rated Power:	1.85 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	PIFA Antenna, 1.1dBi.

GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion oscillator	19.2MHz
Antenna Designation	PIFA Antenna

The EUT is compliance with Bluetooth 2.1 + EDR Standard.

This report applies for WLAN.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration for recovery at the first party of the fallow. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 9 of 71

Related Submittal(s) / Grant (s) 1.2

This submittal(s) (test report) is intended for FCC ID: NM8PB99200 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

1.3 **Test Methodology**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Test Facility 1.4

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5 **Special Accessories**

Not available for this EUT intended for grant.

Equipment Modifications 1.6

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 10 of 71

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 11 of 71

Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration

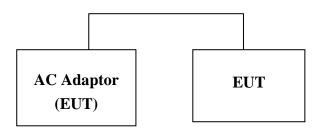


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration for recovery at the first party of the fallow. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 12 of 71

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)(c)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
	100 KHz Bandwidth Of	
§15.247(d)	Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 1Mbps highest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 6Mbps highest data rate are chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 13 of 71

CONDUCTED EMISSION TEST

Standard Applicable: 5.1

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Lir dB(nits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 **Measurement Equipment Used:**

7.2 Measurement Equipment Oscu.									
Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2009	09/14/2010				
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011				
LISN	FCC	FCC-LISN-50/250-2 5-2-01	04034	02/02/2010	02/01/2011				
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2009	11/27/2010				

5.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 14 of 71

5.4 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**


Humidity:

Air Pressure:

Page: 15 of 71

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	WIFI Mode			Test Date:	Mar. 05, 2010
Temperature:	23 °C	Humidity:	56%	Test By:	Sky

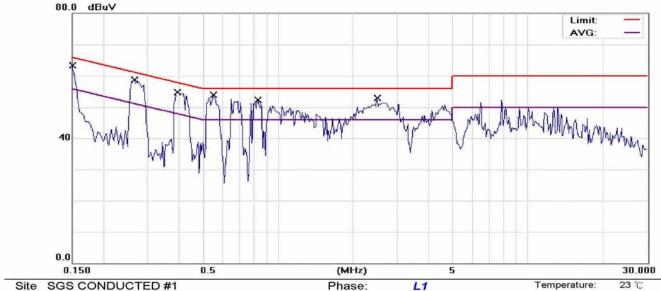

Power:

Distance:

AC 110V/60Hz

Limit: CNS 13438(QP)

EUT: HTC Desire3G無線藍牙手持式行動電話

M/N: A8181 Note: WLAN mode

No. Mk	. Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1507	53.36	0.17	53.53	65.96	-12.43	QP	
2	0.1507	32.98	0.17	33.15	55.96	-22.81	AVG	
3 *	0.2651	52.64	0.11	52.75	61.27	-8.52	QP	
4	0.2651	34.00	0.11	34.11	51.27	-17.16	AVG	
5	0.3945	48.65	0.08	48.73	57.97	-9.24	QP	
6	0.3945	27.42	0.08	27.50	47.97	-20.47	AVG	
7	0.5489	45.77	0.07	45.84	56.00	-10.16	QP	
8	0.5489	29.87	0.07	29.94	46.00	-16.06	AVG	
9	0.8276	43.41	0.08	43.49	56.00	-12.51	QP	
10	0.8276	27.60	0.08	27.68	46.00	-18.32	AVG	
11	2.4880	43.80	0.13	43.93	56.00	-12.07	QP	
12	2.4880	28.21	0.13	28.34	46.00	-17.66	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279




Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Humidity:

Air Pressure:

hpa

Page: 16 of 71

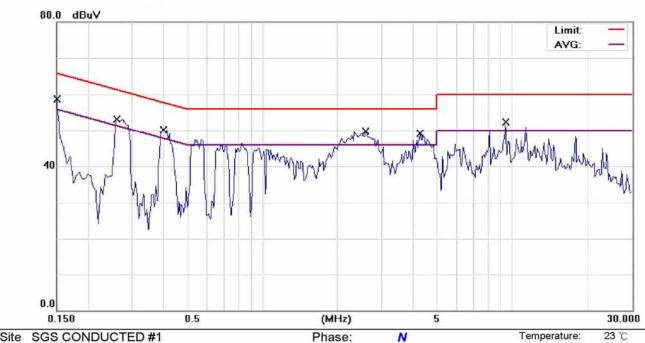

Power:

Distance:

AC 110V/60Hz

Site SGS CONDUCTED #1

Limit: CNS 13438(QP)

EUT: HTC Desire3G無線藍牙手持式行動電話

M/N: A8181

Note: WLAN mode

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1506	51.00	0.19	51.19	65.97	-14.78	QP	
2	0.1506	31.11	0.19	31.30	55.97	-24.67	AVG	
3 *	0.2603	49.03	0.13	49.16	61.42	-12.26	QP	
4	0.2603	30.22	0.13	30.35	51.42	-21.07	AVG	
5	0.3998	44.86	0.11	44.97	57.86	-12.89	QP	
6	0.3998	28.59	0.11	28.70	47.86	-19.16	AVG	
7	2.5877	42.22	0.16	42.38	56.00	-13.62	QP	
8	2.5877	23.79	0.16	23.95	46.00	-22.05	AVG	
9	4.2732	40.99	0.17	41.16	56.00	-14.84	QP	
10	4.2732	25.56	0.17	25.73	46.00	-20.27	AVG	
11	9.3916	37.74	0.41	38.15	60.00	-21.85	QP	
12	9.3916	26.10	0.41	26.51	50.00	-23.49	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms.and.conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention
only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all
their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration for responsibility in the law of findings may be prosecuted to the fullest extent of the law. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 17 of 71

PEAK OUTPUT POWER MEASUREMENT

Standard Applicable: 6.1

According to $\S15.247(a)(2)$, (b)

- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (c) Operation with directional antenna gains greater than 6 dBi.
- (1) Fixed point-to-point operation:
- (i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
- (ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 18 of 71

Measurement Equipment Used:

ivicusur cintere											
	Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010						
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011						
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010						
Low Loss Cable	s Cable HUBER+SUHNER		N/A	01/05/2010	01/04/2011						
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010						
Attenuator	Attenuator Mini-Circuit		001	07/05/2009	07/04/2010						
Attenuator	Attenuator Mini-Circuit		001	07/05/2009	07/04/2010						
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010						

6.3 **Test Set-up:**



Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz, Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 19 of 71

Measurement Result:

802.11b

	Cable loss = 0		Peak Power Output					
СН	Frequency (MHz)		Required Limit					
CII	Frequency (WIIIZ)	1	2	5.5	11	Required Emile		
1	2412	17.38	17.21	16.99	16.85	1 Watt = 30 dBm		
6	2437	17.23	17.19	16.96	16.86	1 Watt = 30 dBm		
11	2462	17.41	17.23	16.98	16.88	1 Watt = 30 dBm		

802.11g

Cal	ble loss = 0		Peak Power Output							
СН	Frequency		Data Rate							Required Limit
	(MHz)	6	9	12	18	24	36	48	54	Required Limit
1	2412	13.05	13.03	12.53	12.33	11.87	11.36	11.06	11.01	1 Watt = 30 dBm
6	2437	13.37	13.35	12.9	12.11	11.82	11.67	11.59	11.46	1 Watt = 30 dBm
11	2462	13.54	13.29	12.69	12.56	12.4	12.2	11.29	11.19	1 Watt = 30 dBm

*Note: Offset: 0.2dB


Note: Refer to next page for plots.




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 20 of 71

802.11b, 1Mbps Power Output Plot (CH Low)

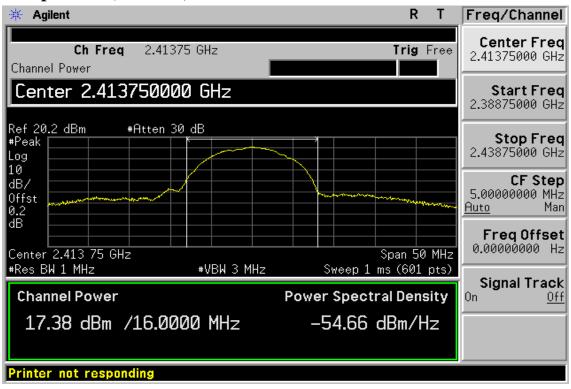

Power Output Plot (CH Mid)

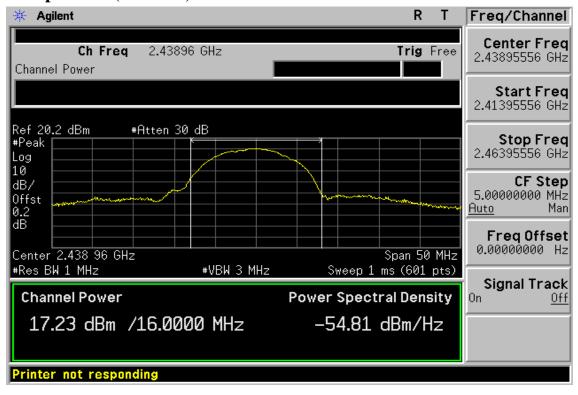

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 21 of 71

Power Output Plot (CH High)

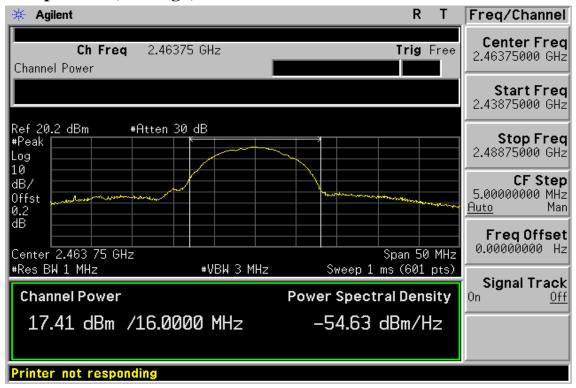

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 22 of 71

802.11g, 6Mbps Power Output Plot (CH Low)

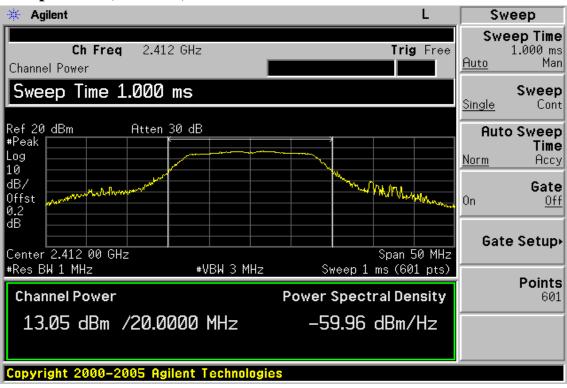

Power Output Plot (CH Mid)

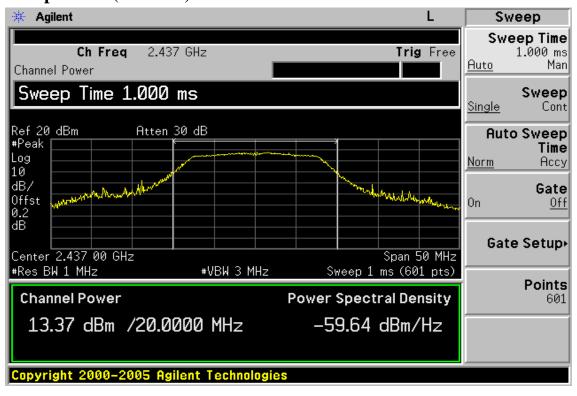

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 23 of 71

Power Output Plot (CH High)

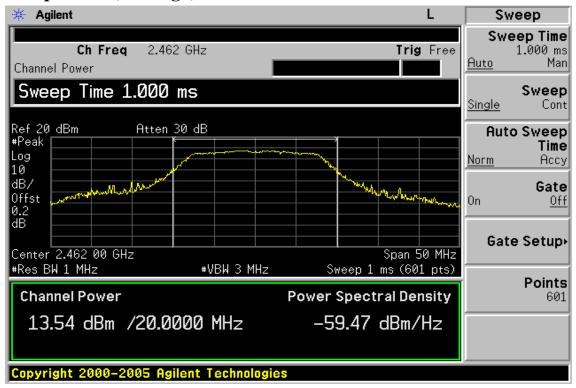

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 24 of 71

6dB Bandwidth

Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 **Test Set-up:**

Refer to section 6.3 for details.

7.4 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the 3.antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = 3*RBW, Span= 30M/50MHz, Sweep=auto
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 25 of 71

7.5 **Measurement Result:**

802.11b

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	7.122	> 500	PASS
2437	7.573	> 500	PASS
2462	7.075	> 500	PASS

^{*}Offset 0.6 dB

802.11g

002.11g			
Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	15.339	> 500	PASS
2437	15.079	> 500	PASS
2462	15.151	> 500	PASS

^{*}Offset:0.2dB

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 26 of 71

802.11b 6dB Band Width Test Data CH-Low

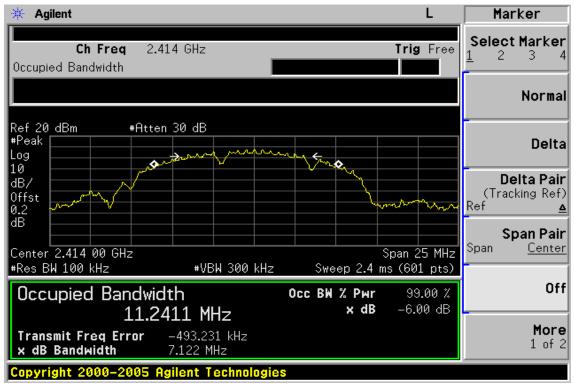

6dB Band Width Test Data CH-Mid

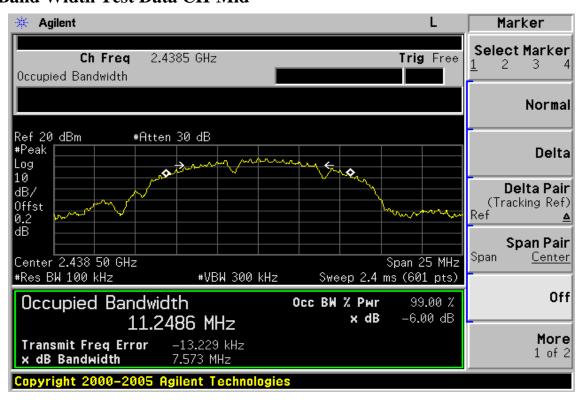

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 27 of 71

6dB Band Width Test Data CH-High

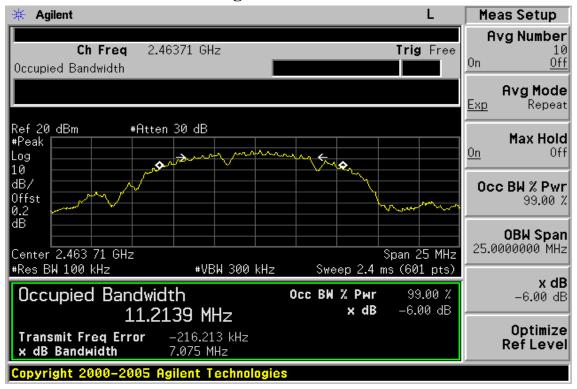

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and studied for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 28 of 71

802.11g 6dB Band Width Test Data CH-Low

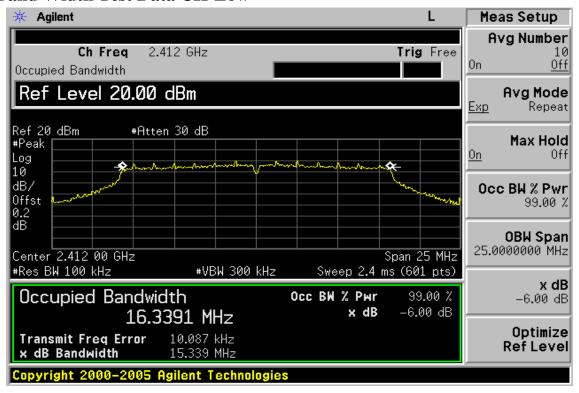

6dB Band Width Test Data CH-Mid

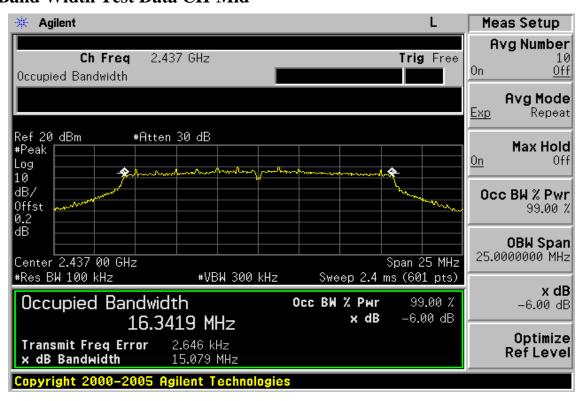

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (88


t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 29 of 71

6dB Band Width Test Data CH-High

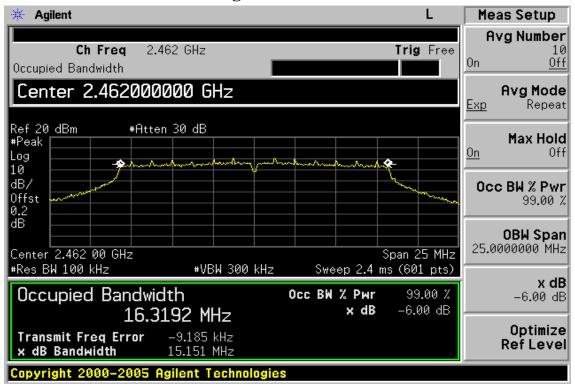

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 30 of 71

100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

Standard Applicable: 8.1

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

Measurement Equipment Used: 8.2

8.2.1 **Conducted Emission at antenna port:**

Refer to section 6.2 for details.

8.2.2 Radiated emission:

	90	66 Chamber			
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2009	07/07/2011
Bilog Antenna	SCHWAZBECK	VULB9160	3136	09/15/2009	09/14/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/27/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011
3m Site	SGS	966 chamber	N/A	11/08/2009	11/07/2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 31 of 71


8.3 **Test SET-UP:**

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

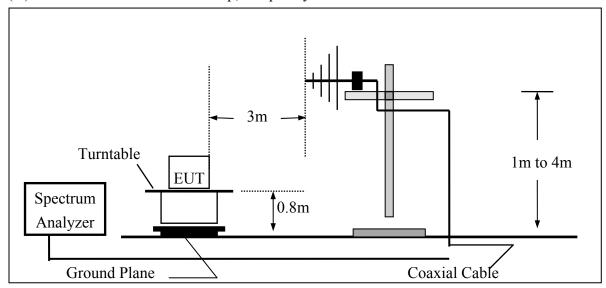

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

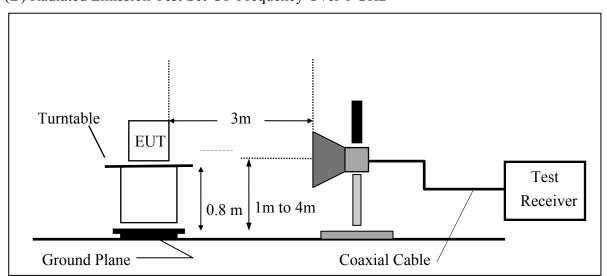

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this less report relear only to the samplets) tested and stock car samplets) are retained for 90 days only.
Mispara Bibly ,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration from the company of here the full well are presented to the full well are the full well are presented to the full tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 32 of 71

8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

wan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 33 of 71

802.11b Band Edges Test Data CH-Low

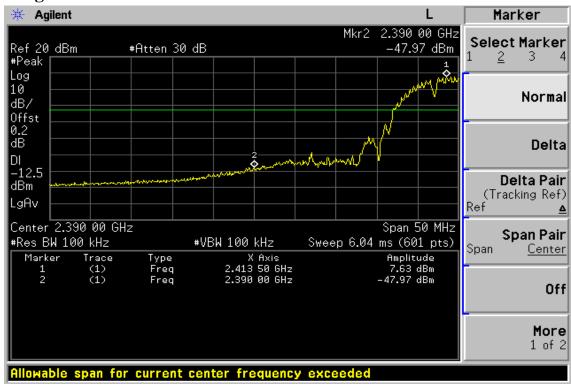

Band Edges Test Data CH-High

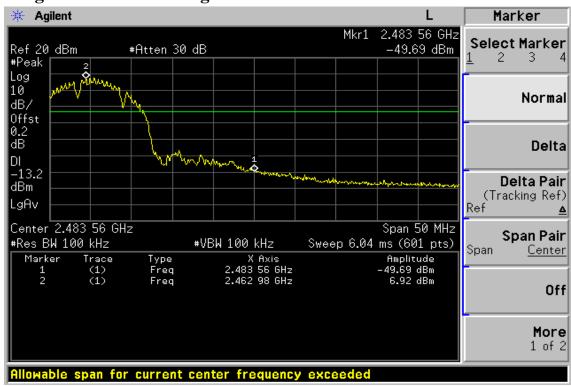

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 34 of 71

Radiated Emission: 802.11 b mode

Operation Mode TX CH Low Test Date Mar. 05, 2010

Fundamental Frequency 2412 MHz Test By Sky **Tmperature** Pol Ver. 25

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m	(dB)	
2390.00	48.97		-1.39	47.58		74.00	54.00	-6.42	Peak
Operation	Mode	TX (CH Low			Te	est Date	Mar. 05,	2010
Fundamen	tal Freque	ncy 2412	2 MHz			Te	est By	Sky	
Temperatu	ire	25				Po	ol	Hor.	
Humidity		65 %	,)						

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m)	(dB)	
2390.00	49.31		-1.39	47.92		74.00	54.00	-6.08	Peak

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 35 of 71

Radiated Emission: 802.11 b mode

Operation Mode TX CH High Test Date Mar. 05, 2010

Fundamental Frequency 2462 MHz Test By Sky Temperature Pol Ver. 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(d BuV/m)	(dBu V/m	(dB)	
2483.56	48.78		-0.92	47.86		74.00	54.00	-6.14	Peak
Operation	Mode	TX (CH High			Te	st Date	Mar. 05,	2010
Fundamen	tal Freque	ncy 2462	2 MHz			Te	st By	Sky	
Temperatu	ire	25				Po	1	Hor.	
Humidity		65 %	, D						

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m	(dB)	
2483.56	47.66		-0.92	43.31		74.00	54.00	-10.69	Peak

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 36 of 71

802.11g Band Edges Test Data CH-Low

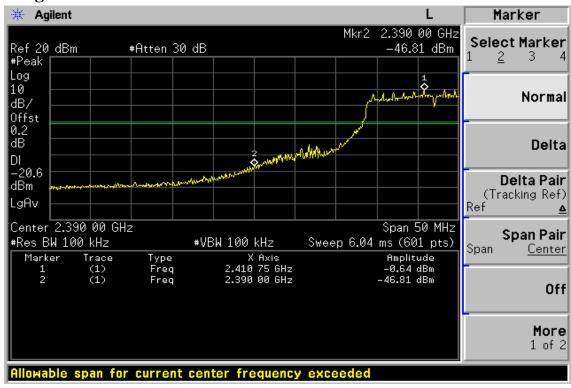

Band Edges Test Data CH-High

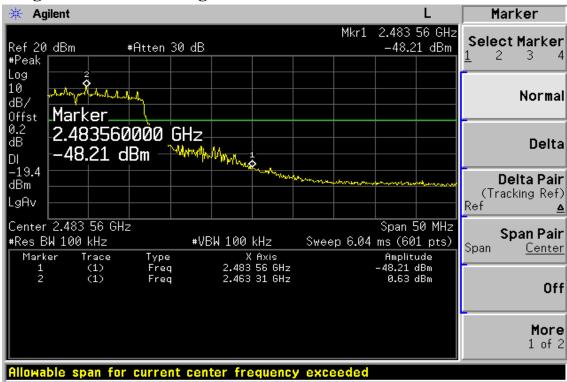

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 37 of 71

Radiated Emission: 802.11 g mode

Operation Mode TX CH Low Test Date Mar. 05, 2010

Fundamental Frequency 2412 MHz Test By Sky **Tmperature** Pol Ver. 25

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(d BuV/m)	dBu V/m	(dB)	
2390.00	49.49		-1.39	48.10		74.00	54.00	-5.90	Peak
Operation Fundamen Temperatu Humidity	tal Freque		CH Low MHz				st Date st By l	Mar. 05, Sky Hor.	2010

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m	(dB)	
2390.00	52.13		-1.39	50.74		74.00	54.00	-3.26	Peak

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized altera-



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 38 of 71

Radiated Emission: 802.11 g mode

Operation Mode TX CH High Test Date Mar. 05, 2010

Fundamental Frequency 2462 MHz Test By Sky Temperature Pol Ver. 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	alFS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m	(dB)	
2483.56	48.23		-0.92	47.31		74.00	54.00	-6.69	Peak
Operation Fundamen Temperatu Humidity	tal Freque		CH High C MHz				st Date st By l	Mar. 05, Sky Hor.	2010

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBu V/m	(dB)	
2483.50	48.74		-0.92	47.82		74.00	54.00	-6.18	Peak

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum Peak Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz-40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 39 of 71

SPURIOUS RADIATED EMISSION TEST

Standard Applicable 9.1

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 **Test SET-UP:**

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 40 of 71

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 41 of 71

Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz

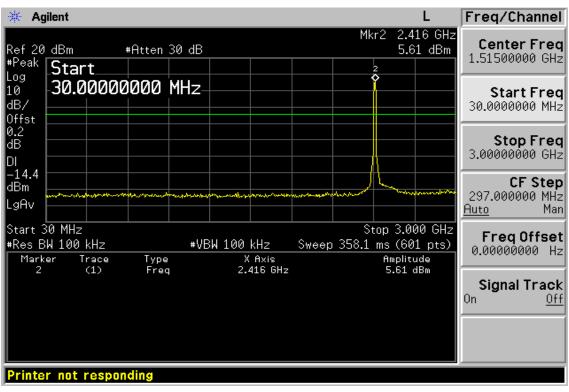

Ch Low 3GHz – 26.5GHz

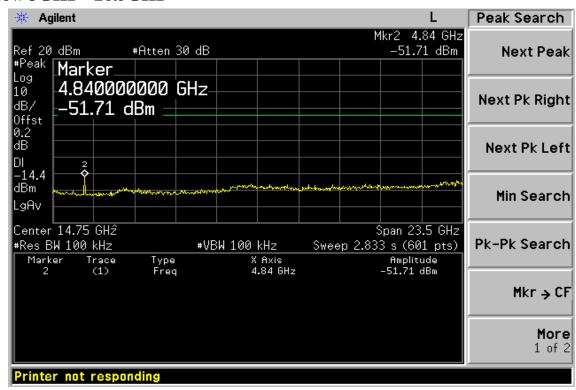

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 42 of 71

Ch Mid 30MHz - 3GHz

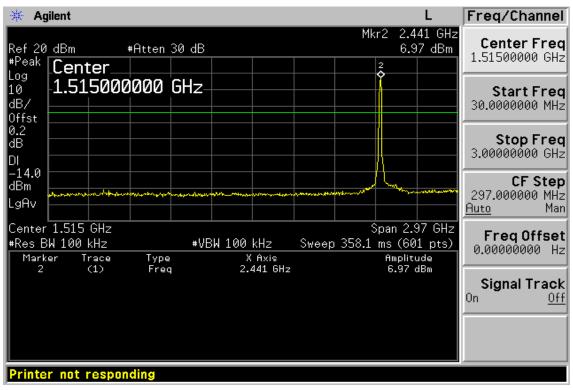

Ch Mid 3GHz – 26.5GHz

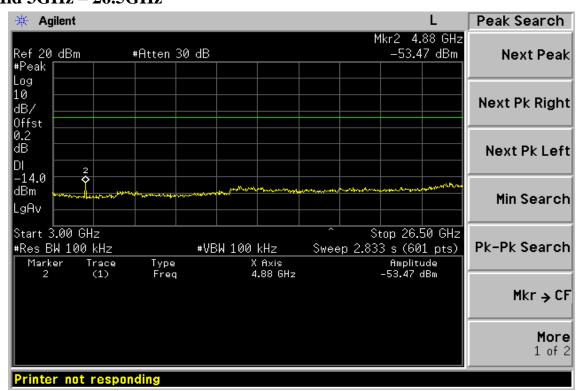

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to the sample (s) tested and such sample(s) are relative to the sample (s) tested and such sample (s) tested and such sample (s) tested and such sample (s) the sample (s) tested and such sample (s) the sample (s) the sample (s) tested and such sample (s) tested and suc nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 43 of 71

Ch High 30MHz – 3GHz

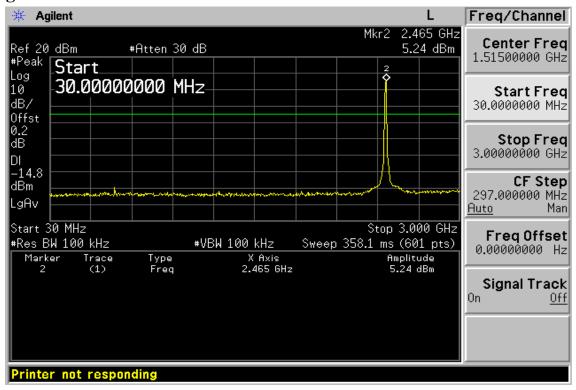

Ch High 3GHz – 26.5GHz

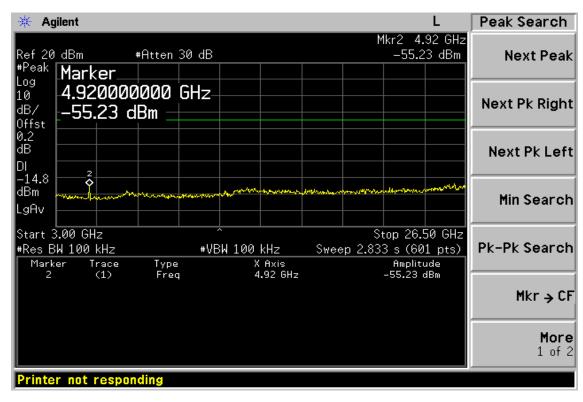

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 44 of 71

Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

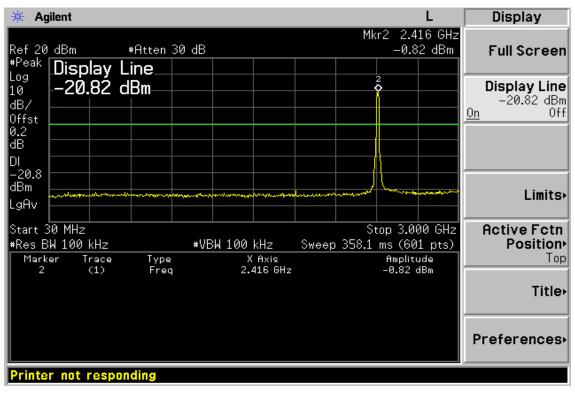

Ch Low 3GHz – 26.5GHz

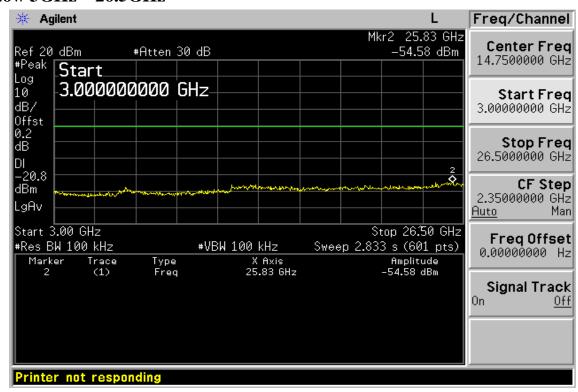

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 45 of 71

Ch Mid 30MHz - 3GHz

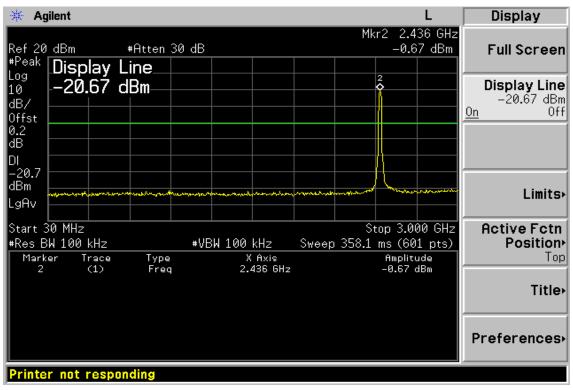

Ch Mid 3GHz – 26.5GHz

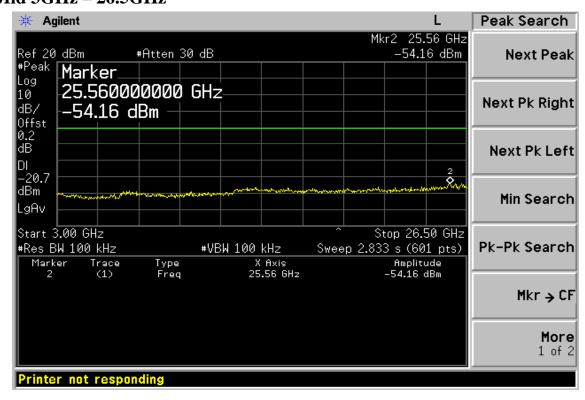

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to the sample (s) tested and such sample(s) are relative to the sample (s) tested and such sample (s) tested and such sample (s) tested and such sample (s) the sample (s) tested and such sample (s) the sample (s) the sample (s) tested and such sample (s) tested and suc nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd.

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 46 of 71

Ch High 30MHz - 3GHz

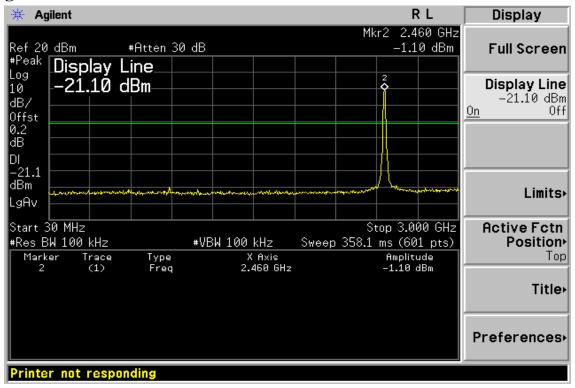

Ch High 3GHz – 26.5GHz

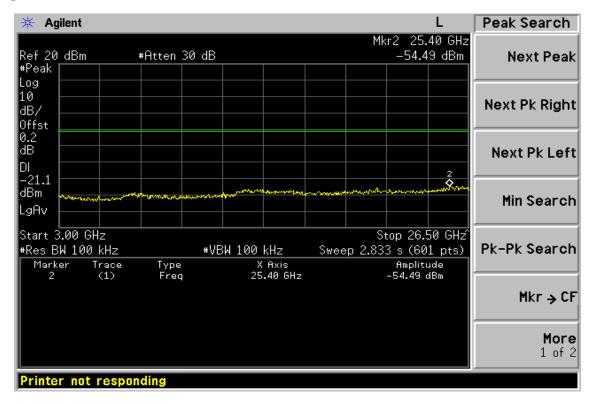

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 47 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low **Test Date** Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky

Temperature Pol Ver./Hor 25

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
56.18	V	Peak	43.10	-14.63	28.47	40.00	-11.53
92.08	V	Peak	50.38	-17.38	33.00	43.50	-10.50
153.19	V	Peak	32.31	-13.00	19.31	43.50	-24.19
419.94	V	Peak	32.09	-9.39	22.70	46.00	-23.30
649.83	V	Peak	31.98	-4.95	27.03	46.00	-18.97
837.04	V	Peak	31.96	-2.22	29.74	46.00	-16.26
38.73	Н	Peak	45.87	-13.84	32.03	40.00	-7.97
56.19	Н	Peak	42.57	-14.63	27.94	40.00	-12.06
94.99	Н	Peak	40.97	-17.26	23.71	43.50	-19.79
177.44	Н	Peak	34.65	-14.38	20.27	43.50	-23.23
358.83	Н	Peak	30.79	-11.43	19.36	46.00	-26.64
651.77	Н	Peak	31.50	-4.96	26.54	46.00	-19.46

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 Taiwan Ltd. www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 48 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid **Test Date** Mar. 05, 2010

Fundamental Frequency 2437MHz Test By Sky Temperature Pol Ver./Hor 25

65 % Humidity

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	36.79	V	Peak	46.12	-14.36	31.76	40.00	-8.24
	92.08	V	Peak	49.91	-17.38	32.53	43.50	-10.97
	153.19	V	Peak	33.10	-13.00	20.10	43.50	-23.40
	378.23	V	Peak	31.76	-10.79	20.97	46.00	-25.03
	507.24	V	Peak	31.93	-8.40	23.53	46.00	-22.47
	652.74	V	Peak	31.73	-4.96	26.77	46.00	-19.23
	38.73	Н	Peak	46.02	-13.84	32.18	40.00	-7.82
	56.19	Н	Peak	42.53	-14.63	27.90	40.00	-12.10
	92.08	Н	Peak	40.23	-17.38	22.85	43.50	-20.65
	159.98	Н	Peak	32.30	-13.40	18.90	43.50	-24.60
	177.44	Н	Peak	34.26	-14.38	19.88	43.50	-23.62
	431.58	Н	Peak	39.38	-9.09	30.29	46.00	-15.71

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd. www.tw.sgs.com



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 49 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode 802.11b TX CH High **Test Date** Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky

Temperature Pol Ver./Hor 25

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
36.79	V	Peak	45.68	-14.36	31.32	40.00	-8.68
93.05	V	Peak	48.20	-17.35	30.85	43.50	-12.65
153.19	V	Peak	32.49	-13.00	19.49	43.50	-24.01
318.09	V	Peak	32.45	-12.59	19.86	46.00	-26.14
611.03	V	Peak	32.94	-5.79	27.15	46.00	-18.85
848.68	V	Peak	32.00	-2.01	29.99	46.00	-16.01
38.73	Н	Peak	45.74	-13.84	31.90	40.00	-8.10
56.19	Н	Peak	40.75	-14.63	26.12	40.00	-13.88
94.99	Н	Peak	40.26	-17.26	23.00	43.50	-20.50
177.44	Н	Peak	33.37	-14.38	18.99	43.50	-24.51
415.09	Н	Peak	32.09	-9.51	22.58	46.00	-23.42
732.28	Н	Peak	32.17	-4.52	27.65	46.00	-18.35

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 Taiwan Ltd. www.tw.sgs.com



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 50 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low **Test Date** Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky Temperature Pol Ver./Hor 25

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
36.79	V	Peak	44.87	-14.36	30.51	40.00	-9.49
92.08	V	Peak	49.25	-17.38	31.87	43.50	-11.63
153.19	V	Peak	32.35	-13.00	19.35	43.50	-24.15
276.38	V	Peak	31.02	-13.48	17.54	46.00	-28.46
405.39	V	Peak	31.97	-9.86	22.11	46.00	-23.89
659.53	V	Peak	31.60	-4.99	26.61	46.00	-19.39
38.73	Н	Peak	45.65	-13.84	31.81	40.00	-8.19
56.19	Н	Peak	40.57	-14.63	25.94	40.00	-14.06
92.08	Н	Peak	38.77	-17.38	21.39	43.50	-22.11
159.98	Н	Peak	31.40	-13.40	18.00	43.50	-25.50
329.73	Н	Peak	31.26	-12.24	19.02	46.00	-26.98
424.79	Н	Peak	32.05	-9.27	22.78	46.00	-23.22

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd. 台灣檢驗科技股份有限公司 www.tw.sgs.com

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 51 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Mar. 05, 2010 Operation Mode 802.11g TX CH Mid **Test Date**

Fundamental Frequency 2437MHz Test By Sky Ver./Hor Temperature Pol 25

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
36.79	V	Peak	45.18	-14.36	30.82	40.00	-9.18
56.19	V	Peak	42.95	-14.63	28.32	40.00	-11.68
92.08	V	Peak	50.05	-17.38	32.67	43.50	-10.83
153.19	V	Peak	32.39	-13.00	19.39	43.50	-24.11
284.14	V	Peak	32.20	-13.28	18.92	46.00	-27.08
601.33	V	Peak	32.85	-5.98	26.87	46.00	-19.13
38.73	Н	Peak	45.79	-13.84	31.95	40.00	-8.05
56.19	Н	Peak	41.15	-14.63	26.52	40.00	-13.48
94.99	Н	Peak	39.69	-17.26	22.43	43.50	-21.07
159.98	Н	Peak	31.71	-13.40	18.31	43.50	-25.19
429.64	Н	Peak	31.33	- 9.14	22.19	46.00	-23.81
596.48	Н	Peak	31.99	-6.12	25.87	46.00	-20.13

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 Taiwan Ltd. www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 52 of 71

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode 802.11g TX CH High **Test Date** Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky Temperature Pol Ver./Hor 25

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
56.19	V	Peak	43.10	-14.63	28.47	40.00	-11.53
92.08	V	Peak	50.11	-17.38	32.73	43.50	-10.77
153.19	V	Peak	32.30	-13.00	19.30	43.50	-24.20
376.29	V	Peak	32.06	-10.86	21.20	46.00	-24.80
572.23	V	Peak	32.76	-6.92	25.84	46.00	-20.16
644.98	V	Peak	32.41	-5.10	27.31	46.00	-18.69
38.73	Н	Peak	45.78	-13.84	31.94	40.00	-8.06
70.74	Н	Peak	38.68	-16.27	22.41	40.00	-17.59
92.08	Н	Peak	39.66	-17.38	22.28	43.50	-21.22
150.28	Н	Peak	30.95	-12.83	18.12	43.50	-25.38
434.49	Н	Peak	31.69	-9.01	22.68	46.00	-23.32
618.79	Н	Peak	32.43	-5.64	26.79	46.00	-19.21

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz_o
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 53 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low Test Date Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky Temperature Pol Ver. 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1533.0	44.76		-5.76	39.00		74.00	54.00	-15.00	Peak
1988.0	44.54		-3.47	41.07		74.00	54.00	-12.93	Peak
4824.0	44.78		8.02	52.80		74.00	54.00	-1.20	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 54 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Low Test Date Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1533.0	48.10		-5.76	42.34		74.00	54.00	-11.66	Peak
1988.0	44.46		-3.47	40.99		74.00	54.00	-13.01	Peak
4824.0	43.02		6.02	49.04		74.00	54.00	-4.96	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 55 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid Test Date Mar. 05, 2010

Fundamental Frequency 2437MHz Test By Sky Temperature Pol Ver 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1663.0	46.42		-5.11	41.31		74.00	54.00	-12.69	Peak
1988.0	45.65		-3.47	42.18		74.00	54.00	-11.82	Peak
4874.0	42.74		6.17	48.91		74.00	54.00	-5.09	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 56 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH Mid Test Date Mar. 05, 2010

Fundamental Frequency 2437MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
47.07		-5.76	41.31		74.00	54.00	-12.69	Peak
41.57		6.17	47.74		74.00	54.00	-6.26	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 47.07 41.57	Reading Reading (dBuV) 47.07 41.57 <t< td=""><td>Reading Reading Ant./CL (dBuV) CF(dB) 47.07 -5.76 41.57 6.17 </td></t<> <td>Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) 47.07 -5.76 41.31 41.57 6.17 47.74 </td> <td>Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV 47.07 -5.76 41.31 41.57 6.17 47.74 </td> <td>Reading (dBuV) Ant./CL (dBuV)m Peak (dBuV)m AV Limit (dBuV)m 47.07 -5.76 41.31 74.00 41.57 6.17 47.74 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00</td> <td>Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Limit (dBuV) 47.07 -5.76 41.31 74.00 54.00 41.57 6.17 47.74 74.00 54.00 74.00 54.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00</td> <td>Reading (dBuV) Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV (dBuV/m) Limit (dBuV/m) Margin (dBuV/m) 47.07 -5.76 41.31 74.00 54.00 -12.69 41.57 6.17 47.74 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00</td>	Reading Reading Ant./CL (dBuV) CF(dB) 47.07 -5.76 41.57 6.17	Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) 47.07 -5.76 41.31 41.57 6.17 47.74	Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV 47.07 -5.76 41.31 41.57 6.17 47.74	Reading (dBuV) Ant./CL (dBuV)m Peak (dBuV)m AV Limit (dBuV)m 47.07 -5.76 41.31 74.00 41.57 6.17 47.74 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00	Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Limit (dBuV) 47.07 -5.76 41.31 74.00 54.00 41.57 6.17 47.74 74.00 54.00 74.00 54.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00	Reading (dBuV) Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV (dBuV/m) Limit (dBuV/m) Margin (dBuV/m) 47.07 -5.76 41.31 74.00 54.00 -12.69 41.57 6.17 47.74 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00 54.00 -6.26 74.00

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 57 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH High Test Date Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky Temperature Pol Ver 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1663.0	45.40		-5.11	40.29		74.00	54.00	-13.71	Peak
1988.0	45.82		-3.47	42.35		74.00	54.00	-11.65	Peak
4924.0	40.46		6.28	46.74		74.00	54.00	-7.26	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 58 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode 802.11b TX CH High Test Date Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1533.0	47.41		-5.76	41.65		74.00	54.00	-12.35	Peak
4924.0	39.89		6.28	46.17		74.00	54.00	-7.83	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 Taiwan Ltd. www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 59 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low Test Date Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky Temperature Pol Ver. 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	43.16		6.02	49.18		74.00	54.00	-4.82	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 60 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Low **Test Date** Mar. 05, 2010

Fundamental Frequency 2412MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1533.0	47.68		-5.76	41.92		74.00	54.00	-12.08	Peak
4824.0	42.32		6.02	48.34		74.00	54.00	-5.66	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 61 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Mid **Test Date** Mar. 05, 2010

Fundamental Frequency 2437MHz Test By Sky Temperature Pol Ver 25

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1825.5	45.01		-4.32	40.69		74.00	54.00	-13.31	Peak
4874.0	41.29		6.15	47.44		74.00	54.00	-6.56	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 62 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH Mid **Test Date** Mar. 05, 2010

Fundamental Frequency 2437MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
48.14		-5.76	42.38		74.00	54.00	-11.62	Peak
38.52		6.15	44.67		74.00	54.00	-9.33	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 48.14 38.52	Reading (dBuV) Reading (dBuV) 48.14 38.52	Reading Reading Ant./CL (dBuV) CF(dB) 48.14 -5.76 38.52 6.15 <td>Reading Ant./CL Peak (dBuV) CF(dB) (dBuV/m) 48.14 -5.76 42.38 38.52 6.15 44.67 </td> <td>Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV 48.14 -5.76 42.38 38.52 6.15 44.67 </td> <td>Reading (dBuV) Ant./CL (dBuV)m Peak (dBuV)m AV Limit (dBuV)m 48.14 -5.76 42.38 74.00 38.52 6.15 44.67 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00</td> <td>Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Limit (dBuV) 48.14 -5.76 42.38 74.00 54.00 38.52 6.15 44.67 74.00 54.00 74.00 54.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00</td> <td>Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Margin (dBuV) 48.14 (-5.76) 42.38 (74.00) 54.00 -11.62 38.52 (6.15) 44.67 (74.00) 54.00 -9.33 ((1.2)) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2)<!--</td--></td>	Reading Ant./CL Peak (dBuV) CF(dB) (dBuV/m) 48.14 -5.76 42.38 38.52 6.15 44.67	Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV 48.14 -5.76 42.38 38.52 6.15 44.67	Reading (dBuV) Ant./CL (dBuV)m Peak (dBuV)m AV Limit (dBuV)m 48.14 -5.76 42.38 74.00 38.52 6.15 44.67 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00	Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Limit (dBuV) 48.14 -5.76 42.38 74.00 54.00 38.52 6.15 44.67 74.00 54.00 74.00 54.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00	Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Margin (dBuV) 48.14 (-5.76) 42.38 (74.00) 54.00 -11.62 38.52 (6.15) 44.67 (74.00) 54.00 -9.33 ((1.2)) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) (1.2) </td

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 63 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH High **Test Date** Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky Temperature Pol Ver 25

65 % Humidity

Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
37.10		6.28	43.38		74.00	54.00	-10.62	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 37.10	Reading (dBuV) Reading (dBuV) 37.10	Reading (dBuV) Reading (dBuV) Ant./CL (cF(dB)) 37.10 6.28	Reading (dBuV) Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) 37.10 6.28 43.38 <	Reading (dBuV) Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV 37.10 6.28 43.38	Reading (dBuV) Reading (dBuV) Ant./CL (dBuV) Peak (dBuV/m) AV (dBuV/m) Limit (dBuV/m) 37.10 6.28 43.38 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00	Reading (dBuV) Ant./CL (dBuV/m) Peak (dBuV/m) AV (dBuV/m) Limit (dBuV/m) 54.00 54.00 54.00 100 54.	Reading (dBuV) Ant./CL (dBuV) Peak (dBuV) AV (dBuV) Limit (dBuV) Margin (dBuV) 37.10 6.28 43.38 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.00 -10.62 74.00 54.0

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 64 of 71

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode 802.11g TX CH High **Test Date** Mar. 05, 2010

Fundamental Frequency 2462MHz Test By Sky Temperature Pol Hor 25

65 % Humidity

		Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
	Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	1533.0	48.40		-5.76	42.64		74.00	54.00	-11.36	Peak
	4924.0	37.15		6.28	43.43		74.00	54.00	-10.57	Peak
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report refer only to the sample(s) tested and stock sample(s) tested and only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 65 of 71

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: EH/2010/30026 **Issue Date: Mar. 10, 2010**

Page: 66 of 71

10.5 Measurement Result:

802.11b

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-2.78	0.00	-2.78	8
2437	-3.40	0.00	-3.40	8
2462	-3.24	0.00	-3.24	8

^{*}Offset 0.6 dB

802.11g

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-10.53	0.00	-10.53	8 8
2437	-12.11	0.00	-12.11	8
2462	-17.83	0.00	-17.83	8

^{*}Offset 0.6 dB

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 67 of 71

802.11b Power Spectral Density Test Plot (CH-Low)

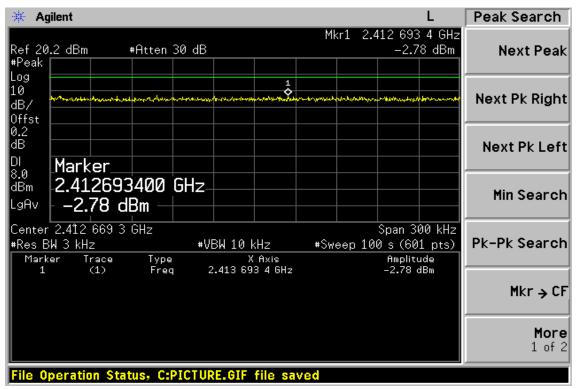

Power Spectral Density Test Plot (CH-Mid)

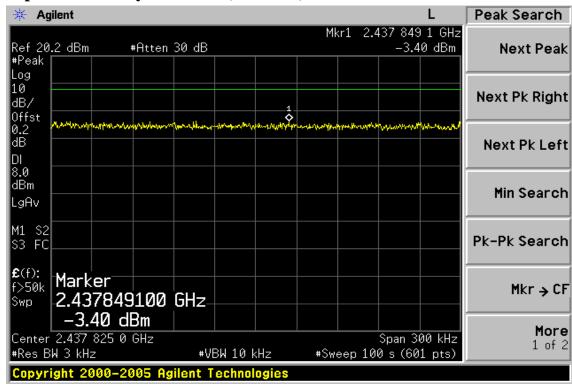

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 68 of 71

Power Spectral Density Test Plot (CH-High)

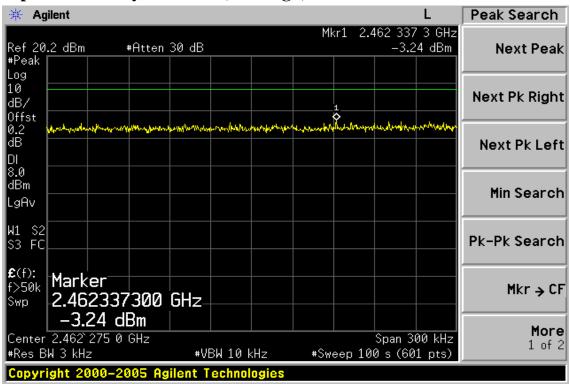

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and studied for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 69 of 71

802.11g Power Spectral Density Test Plot (CH-Low)

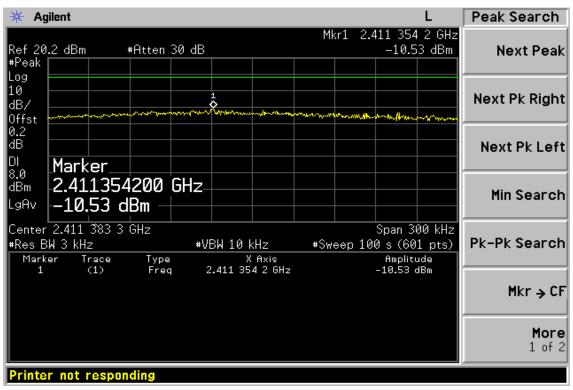

Power Spectral Density Test Plot (CH-Mid)

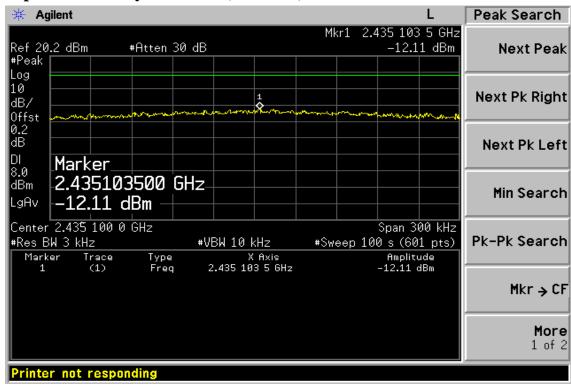

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 70 of 71

Power Spectral Density Test Plot (CH-High)

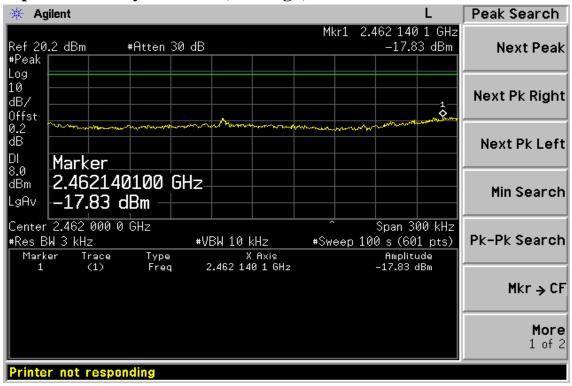

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and studied for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/30026 Issue Date: Mar. 10, 2010

Page: 71 of 71

11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction:

The directional gins of antenna used for transmitting is 1.1 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Member of SGS Group