

## FCC 47 CFR PART 27 SUBPART L

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade name : HTC  
Model No. : PC10100  
Test : FCC 47 CFR PART 27 SUBPART L: Oct. 2009  
Specification : ANSI/TIA-603-2007  
Issue Date : Jul. 20, 2010

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Jul. 20, 2010	Initial Issue	

## Verification of Compliance

Issued Date: 2010/07/20

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model No. : PC10100  
FCC ID : NM8PC10100  
EUT Rated Voltage : DC 5.0V, 1.0A  
Test Voltage : 120 Vac / 60 Hz  
Applicable : FCC 47 CFR PART 27 SUBPART L: Oct. 2009  
Standard : ANSI/TIA-603-2007  
Test Result : Complied  
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.

Tel : +886-3-2710188 / Fax : +886-3-2710190


Taiwan Accreditation Foundation accreditation number:  
1330


<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 27L.

The test results of this report relate only to the tested sample identified in this report

Approved By :   
(Manager) (Miller Lee )

Reviewed By :   
(Testing Engineer) (Gary Wu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information.....</b>	<b>6</b>
1.1.	EUT Description .....	6
1.2.	Mode of Operation .....	6
1.3.	EUT Exercise Software.....	7
1.4.	Configuration of Test System Details .....	7
1.5.	Test Site Environment.....	7
1.6.	Summary of Test Result.....	8
<b>2</b>	<b>RF Output Power Test.....</b>	<b>9</b>
2.1.	Limit .....	9
2.2.	Test Instruments.....	9
2.3.	Test Setup .....	9
2.4.	Test Procedure.....	9
2.5.	Uncertainty.....	11
2.6.	Test Result .....	11
<b>3</b>	<b>Effective Radiated Power / Equivalent Isotropic Radiated Power Test .....</b>	<b>13</b>
3.1.	Limit .....	13
3.2.	Test Instruments.....	13
3.3.	Test Setup .....	14
3.4.	Test Procedure.....	14
3.5.	Uncertainty.....	17
3.6.	Test Result .....	17
<b>4</b>	<b>Occupied Bandwidth Test .....</b>	<b>18</b>
4.1.	Limit .....	18
4.2.	Test Instruments.....	18
4.3.	Setup.....	18
4.4.	Test Procedure.....	19
4.5.	Uncertainty.....	19
4.6.	Test Result .....	19
<b>5</b>	<b>Conducted Emission Test .....</b>	<b>22</b>
5.1.	Limit .....	22
5.2.	Test Instruments.....	22
5.3.	Setup.....	22
5.4.	Test Procedure.....	23
5.5.	Uncertainty.....	23
5.6.	Test Result .....	23

<b>6</b>	<b>Field Strength of Spurious Radiation Test .....</b>	<b>39</b>
6.1.	Limit .....	39
6.2.	Test Instruments.....	39
6.3.	Setup.....	39
6.4.	Test Procedure.....	40
6.5.	Uncertainty.....	40
6.6.	Test Result .....	41
<b>7</b>	<b>Frequency Stability (Temperature Variation) Test .....</b>	<b>44</b>
7.1.	Limit .....	44
7.2.	Test Instruments.....	44
7.3.	Setup.....	44
7.4.	Test Procedure.....	44
7.5.	Uncertainty.....	45
7.6.	Test Result .....	45
<b>8</b>	<b>Frequency Stability (Voltage Variation) Test .....</b>	<b>46</b>
8.1.	Limit .....	46
8.2.	Test Instruments.....	46
8.3.	Setup.....	46
8.4.	Test Procedure.....	46
8.5.	Uncertainty.....	46
8.6.	Test Result .....	47
<b>9</b>	<b>AC Power Conducted Emissions Test .....</b>	<b>48</b>
9.1.	Limit .....	48
9.2.	Test Instruments.....	48
9.3.	Setup.....	48
9.4.	Test Procedure.....	49
9.5.	Uncertainty.....	49
9.6.	Test Result .....	49

## 1 General Information

### 1.1. EUT Description

Applicant		HTC Corporation			
Applicant Address		No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan			
Manufacturer		HTC Corporation			
Manufacturer Address		No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan			
Product Type		Smartphone			
Trade Name		HTC			
Model Number		PC10100			
FCC ID		NM8PC10100			
Mode	WCDMA, HSDPA HSUPA, HSPA+	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		IV	1712.4 ~ 1752.6	2112.4 ~ 2152.6	QPSK
Type of Antenna		PIFA Type			
Antenna Gain (dBi)		2.82 dBi			
Max. RF Output Power		27.73 dBm / 0.593 W			
Max. EIRP		29.97 dBm / 0.993 W			
Emission Designator		4M15F9W			

### 1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

<b>Test Mode</b>
Mode 1: IDLE Mode
Mode 2: WCDMA Band IV Link

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

#### Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	<b>Product</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Power Cord</b>
1.	Universal Radio Communication Tester	R&S	CMU200	109369	N/A

### 1.3. EUT Exercise Software

1.	Setup the EUT and Base Station (CMU200) as shown on 1.4.
2.	Turn on the power of all equipment.
3.	EUT run test program HTC SSD Test.

### 1.4. Configuration of Test System Details

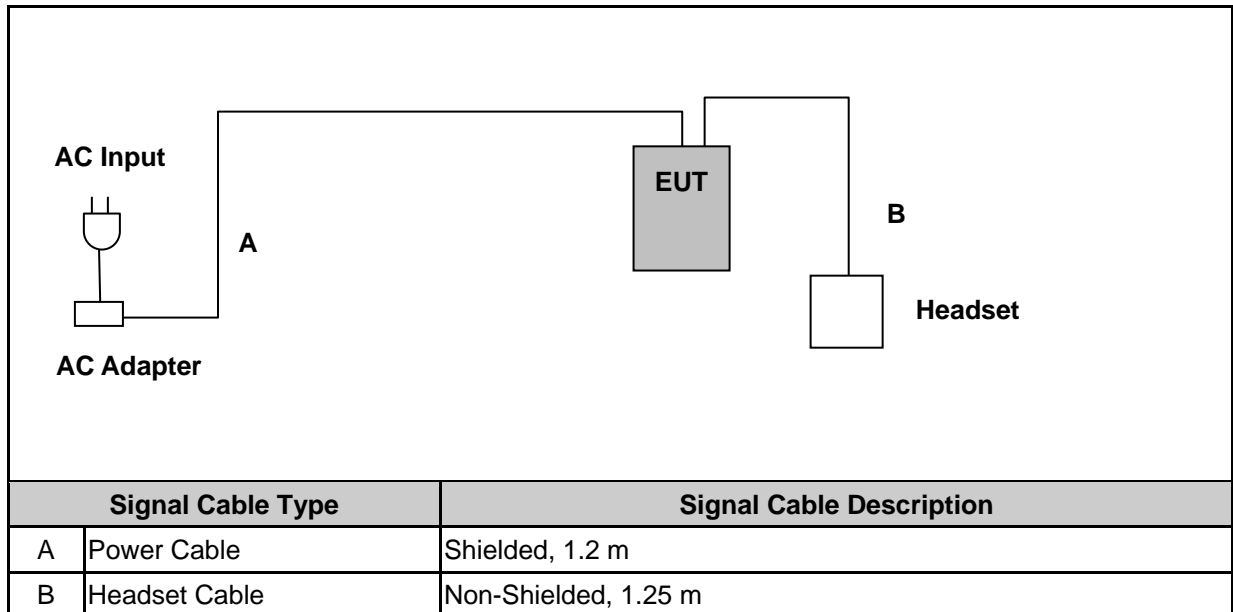

### 1.5. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	25
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950

## 1.6. Summary of Test Result

Description	FCC Rule	IC Rule	Limit	Result
Conducted Output Power	§2.1046	N/A	N/A	Pass
Equivalent Isotropic Radiated Power	§27.50(d)(2)	RSS-139 (6.4) SRSP-513(5.1.2)	< 1 Watts	Pass
Occupied Bandwidth	§2.1049 §27.53(g)	N/A	N/A	Pass
Band Edge Measurement	§2.1051 §27.53(g)	RSS-139 (6.5)	$< 43 + 10\log_{10}(P[\text{Watts}])$	Pass
Conducted Emission	§2.1051 §27.53(g)	RSS-139 (6.5)	$< 43 + 10\log_{10}(P[\text{Watts}])$	Pass
Field Strength of Spurious Radiation	§2.1053 §27.53(g)	RSS-139 (6.5)	$< 43 + 10\log_{10}(P[\text{Watts}])$	Pass
Frequency Stability for Temperature & Voltage	§2.1055 §27.54	RSS-139(6.3)	< 2.5 ppm	Pass



## 2 RF Output Power Test

### 2.1. Limit

N/A


### 2.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Single Channel PK Power Sensor	Agilent	N1911A	MY15101619	07/14/2009	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/25/2009	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 2.3. Test Setup

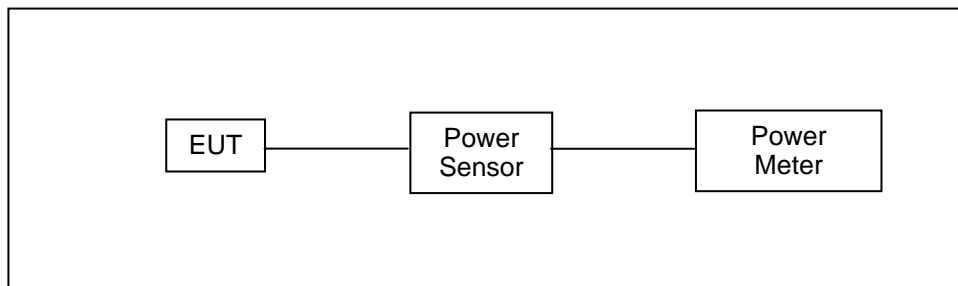

### 2.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

1. The transmitter output was connected to power meter and base station through power divider.
2. Set base station for EUT at WCDMA Band IV, power level was set to maximum.
3. Select lowest, middle, and highest channels for each band.

**HSDPA Date Devices setup**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1,2)}$	CM (dB) <sup>(3)</sup>	MRP (dB) <sup>(3)</sup>
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	12/15 <sup>(4)</sup>	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

**Note**

1.  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
2. For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1A and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$  and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$
3. CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
4. For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Table 1. Setup for Release 5 HSDPA**
**HSPA/HSPA+ Date Devices setup**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	Bed (SF)	Bed (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E- TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

**Table 2. Setup for Release 6 HSPA and Release 7 HSPA+**

## 2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

## 2.6. Test Result

Product		Smartphone				
Test Item		RF Output Power				
Date of Test		05/18/2010		Test Site		TE02
Bands	Sub-Test	Frequency (MHz)	Burst-Average Power		Peak Power	
			(dBm)	(W)	(dBm)	(W)
WCDMA IV (RMC 12.2K)	-----	1712.4	24.30	0.269	27.55	0.569
		1740.0	24.35	0.272	<b>27.73</b>	<b>0.593</b>
		1752.6	24.14	0.259	27.24	0.530
HSDPA IV	1	1712.4	24.20	0.263	27.45	0.556
		1740.0	24.24	0.265	27.62	0.578
		1752.6	24.08	0.256	27.18	0.522
	2	1712.4	24.22	0.264	27.48	0.560
		1740.0	24.21	0.264	27.58	0.573
		1752.6	24.03	0.253	27.10	0.513
	3	1712.4	23.72	0.236	26.96	0.497
		1740.0	23.77	0.238	27.14	0.518
		1752.6	23.58	0.228	26.69	0.467
	4	1712.4	23.74	0.237	26.99	0.500
		1740.0	23.70	0.234	27.06	0.508
		1752.6	23.52	0.225	26.60	0.457
HSUPA IV	1	1712.4	23.25	0.211	26.50	0.447
		1740.0	23.17	0.207	26.55	0.452
		1752.6	23.37	0.217	26.45	0.442
	2	1712.4	21.16	0.131	24.43	0.277
		1740.0	21.18	0.131	24.57	0.286
		1752.6	21.35	0.136	24.42	0.277
	3	1712.4	22.33	0.171	25.55	0.359
		1740.0	22.20	0.166	25.58	0.361
		1752.6	22.28	0.169	25.36	0.344
	4	1712.4	21.34	0.136	24.58	0.287
		1740.0	21.24	0.133	24.60	0.288
		1752.6	21.41	0.138	24.50	0.282
	5	1712.4	23.26	0.212	26.51	0.448
		1740.0	23.15	0.207	26.53	0.450
		1752.6	23.34	0.216	26.47	0.444

Note: The testing result was used peak detector.

<b>Product</b>	Smartphone					
<b>Test Item</b>	RF Output Power					
<b>Date of Test</b>	07/19/2010			<b>Test Site</b>	TE02	
Bands	Sub-Test	Frequency (MHz)	Burst-Average Power		Peak Power	
			(dBm)	(W)	(dBm)	(W)
HSPA+ IV (uplink QPSK)	1	1712.4	23.22	0.210	26.48	0.445
		1740.0	23.14	0.206	26.52	0.449
		1752.6	23.36	0.217	26.43	0.440
	2	1712.4	21.14	0.130	24.41	0.276
		1740.0	21.15	0.130	24.56	0.286
		1752.6	21.33	0.136	24.40	0.275
	3	1712.4	22.32	0.171	25.52	0.356
		1740.0	22.18	0.165	25.57	0.361
		1752.6	22.27	0.169	25.34	0.342
	4	1712.4	21.31	0.135	24.56	0.286
		1740.0	21.23	0.133	24.57	0.286
		1752.6	21.39	0.138	24.48	0.281
	5	1712.4	23.24	0.211	26.48	0.445
		1740.0	23.13	0.206	26.50	0.447
		1752.6	23.32	0.215	26.44	0.441

Note: The testing result was used peak detector.

### 3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

#### 3.1. Limit

For FCC Part 27.50(d)(2): The EIRP of mobile transmitters are limited to 1 watt for 1710~1755 MHz.


#### 3.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/22/2008	(2)
Loop Dipole	ETS-Lindgren	3127-1880	00064239	02/05/2009	(2)
Loop Dipole	ETS-Lindgren	3127-836	00064352	02/19/2009	(2)
Sleeve Dipole	ETS-Lindgren	3126-1845	00083335	03/18/2009	(2)
Sleeve Dipole	ETS-Lindgren	3126-880	00052705	11/05/2009	(2)
Circularly Polarized Communication Antennas	EMCO	3102	00051714	NCR	-----
Antenna Positioner Controller	EMCO	2090	00052447	NCR	-----
MAPS Positioner	EMCO	2010/2015	NA	NCR	-----
Pattern Measurement Software	ETS-Lindgren	EMQuest™ EMQ-100	NA	NCR	-----
Desktop Computer with Windows XP	DELL	Dell Computers	NA	NCR	-----
Anechoic Chamber	ETS-Lindgren	AMS 8500	102165	NCR	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 3.3. Test Setup

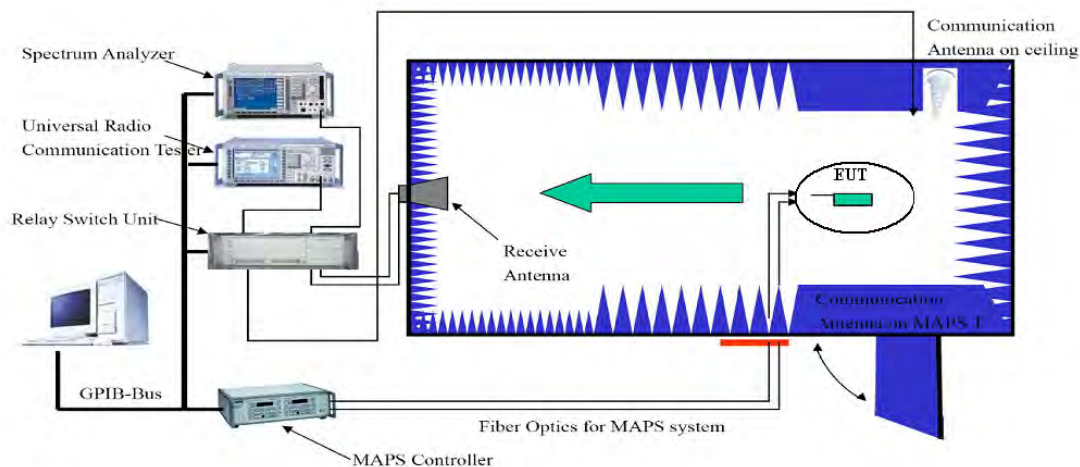


### 3.4. Test Procedure

The phone was tested in an anechoic chamber with a 3-axis position system that permits taking complete spherical scans of the EUT's 3-axis radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for WCDMA IV three frequencies (1712.4, 1740.0 and 1752.6MHz) .

The measurements were made with the phone placed in a call using the CMU200 mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode.

The radiated power was measured using ETS-LINDGREN OTA Chamber in "Peak" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data.

Each individual data point in a radiated power or sensitivity measurement is referred to as the effective isotropic radiated power or effective isotropic sensitivity. That is, the desired information is how the measured quantity relates to the same quantity from an isotropic radiator. Thus, the reference measurement must relate the power received or transmitted at the EUT test equipment (spectrum analyzer or communication tester) back to the power transmitted or received at a theoretical isotropic radiator. The total path loss then, is just the difference in dB between the power transmitted or received at the isotropic radiator and that seen at the test equipment (see follow Figure 1).

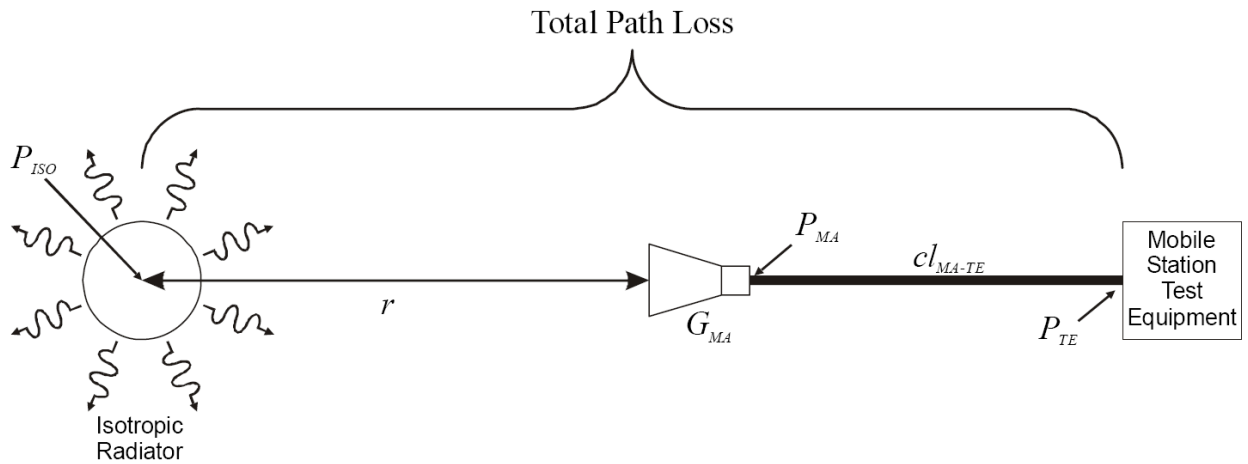

**Figure 1. THEORETICAL CASE FOR DETERMINING PATH LOSS**

In equation form, this becomes:

Equation 1

$$PL = P_{ISO} - P_{TE},$$

where PL is the total path loss,  $P_{ISO}$  is the power radiated by the theoretical isotropic radiator, and  $P_{TE}$  is the power received at the test equipment port. As can be seen in Figure 1, this quantity includes the range path loss due to the range length  $r$ , the gain of the measurement antenna, and any loss terms associated with the cabling, connections, amplifiers, splitters, etc. between the measurement antenna and the test equipment port.

Figure 2 shows a typical real world configuration for measuring the path loss. In this case, a reference antenna with known gain is used in place of the theoretical isotropic source. The path loss may then be determined from the power into the reference antenna by adding the gain of the reference antenna.

That is:


Equation 2

$$P_{ISO} = P_{RA} + G_{RA},$$

where  $P_{RA}$  is the power radiated by reference antenna, and  $G_{RA}$  is the gain of the reference antenna, so that:

Equation 3

$$PL = P_{RA} + G_{RA} - P_{TE},$$

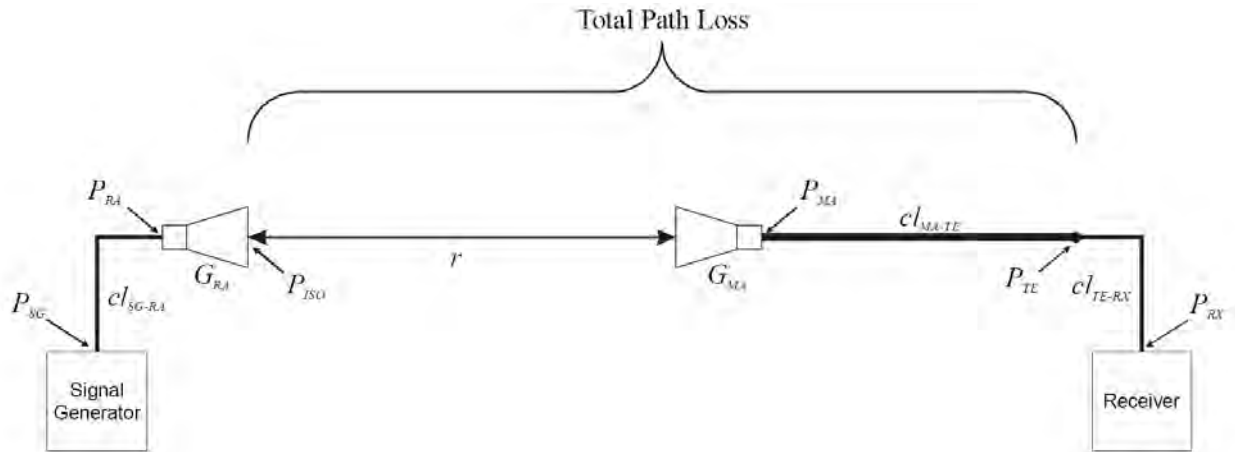


**Figure 2. TYPICAL CONFIGURATION FOR MEASURING PATH LOSS**

In order to determine  $P_{RA}$ , it is necessary to perform a cable reference measurement to remove the effects of the cable loss between signal generator and reference antenna, and between the test equipment port and the receiver. This establishes a reference point at the input to the reference antenna. Figure 3 illustrates the cable reference measurement configuration. Assuming the power level at the signal generator is fixed, it is easy to show that the difference between  $P_{RA}$  and  $P_{TE}$  in Figure 2 is given by:

Equation 4

$$P_{RA} - P_{TE} = P_{RX}' - P_{RX},$$

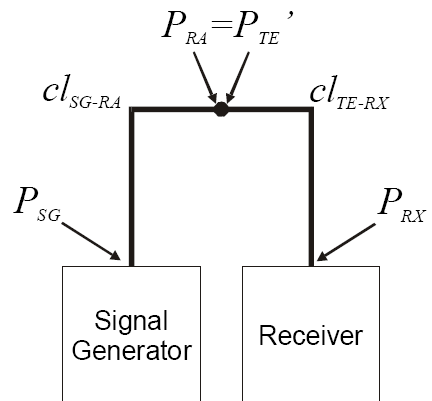

**Figure 3. CABLE REFERENCE CALIBRATION CONFIGURATION**



Where  $P_{RX'}$  is the power measured at the receiver during the cable reference test, and  $P_{RX}$  is the power measured at the receiver during the range path loss measurement in Figure 2. Thus, the path loss is then just given by:

Equation 5

$$PL = G_{RA} + P_{RX'} - P_{RX}$$

$$EIRP = P_t + P_L$$

$P_t$  = Often referred to as antenna output power

### 3.5. Uncertainty

The measurement uncertainty is defined as for Radiated Power measurement list below:

Band	Uncertainty
PCS	1.42 dB

### 3.6. Test Result

<b>Product</b>	Smartphone						
<b>Test Item</b>	EIRP						
<b>Date of Test</b>	05/28/2010			<b>Test Site</b>	TC03		
Bands	Frequency (MHz)	Read Level (dBm)	Correction factor (dBm)	EIRP		Limit (W)	Result
				(dBm)	(W)		
WCDMA IV (RMC 12.2K)	1712.4	85.14	-55.40	29.74	0.942	1	Pass
	1740.0	85.30	-55.60	29.70	0.933	1	Pass
	1752.6	85.67	-55.70	29.97	0.993	1	Pass

Note: 1. EIRP = Read Level + Correction factor.

2. For WCDMA signals, a peak detector is used with RBW = VBW = 5MHz.

## 4 Occupied Bandwidth Test

### 4.1. Limit

**The Occupied Bandwidth Limit:**

N/A.

**The Band Edge Limit:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.


### 4.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	(2)
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Setup

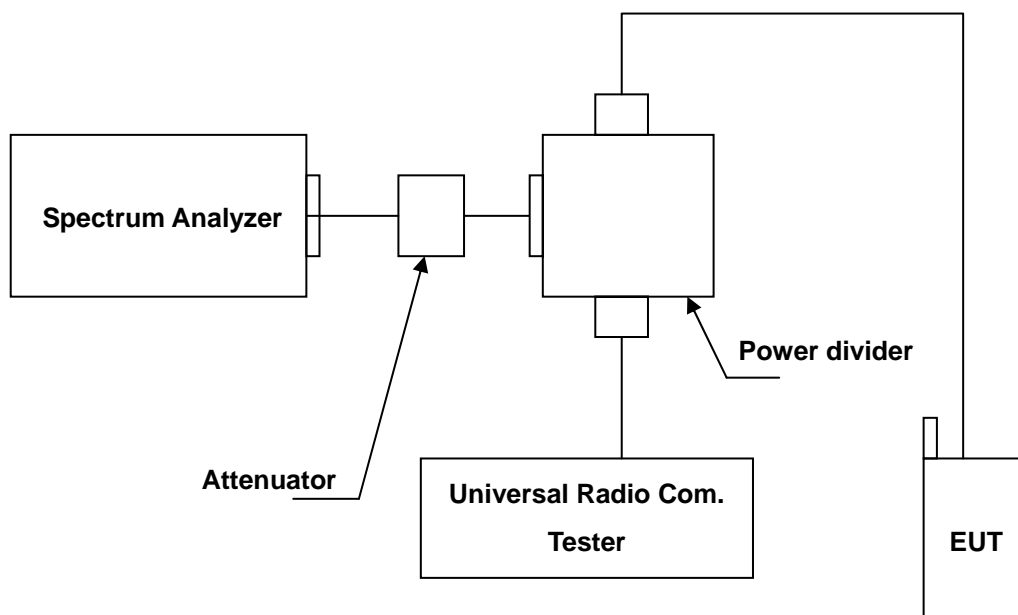

#### 4.4. Test Procedure

The measurement is made according to FCC rules part 27:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.
3. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
4. The band edge setting:RB=47 kHz; VB=150 kHz for WCDMA Band IV.

#### 4.5. Uncertainty

The measurement uncertainty is defined as  $\pm 10\text{Hz}$


#### 4.6. Test Result

##### 99% Occupied Bandwidth


<b>Product</b>	Smartphone				
<b>Test Item</b>	Occupied Bandwidth				
<b>Test Mode</b>	Mode 2: WCDMA Band IV Link				
<b>Date of Test</b>	05/26/2010		<b>Test Site</b>	TE02	
<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>99 % Bandwidth (kHz)</b>	<b>Limit</b>	<b>Result</b>	<b>Note</b>
1312	1712.4	4138.9	N/A	-----	RBW:47kHz , VBW:150kHz
1450	1740.0	4145.8	N/A	-----	RBW:47kHz , VBW:150kHz
1513	1752.6	4146.1	N/A	-----	RBW:47kHz , VBW:150kHz

**99% Occupied Bandwidth**


CH 1312

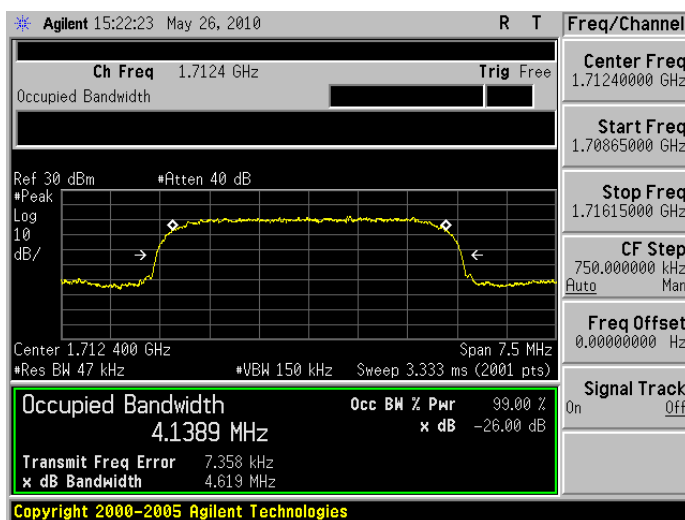

CH1450

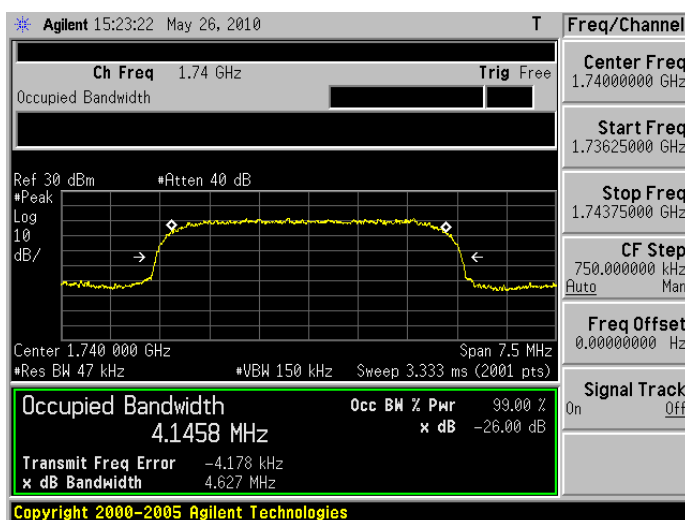


CH1513

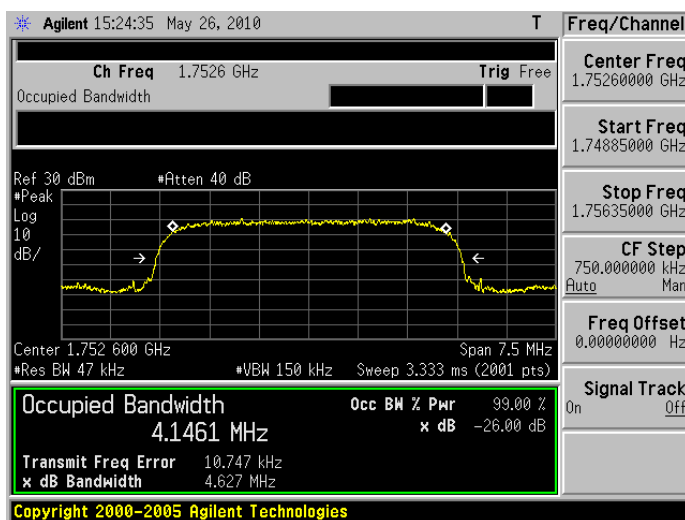


### Band Edge

<b>Product</b>	Smartphone				
<b>Test Item</b>	Band Edge				
<b>Test Mode</b>	Mode 2: WCDMA Band IV Link				
<b>Date of Test</b>	05/29/2010		<b>Test Site</b>	TE02	
<b>Band</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Band Edge (dBm)</b>	<b>Limit (dBm)</b>	<b>Result</b>
Lower	1312	1710.00	-37.56	-13	Pass
Higher	1513	1755.00	-37.45	-13	Pass

Lower Band

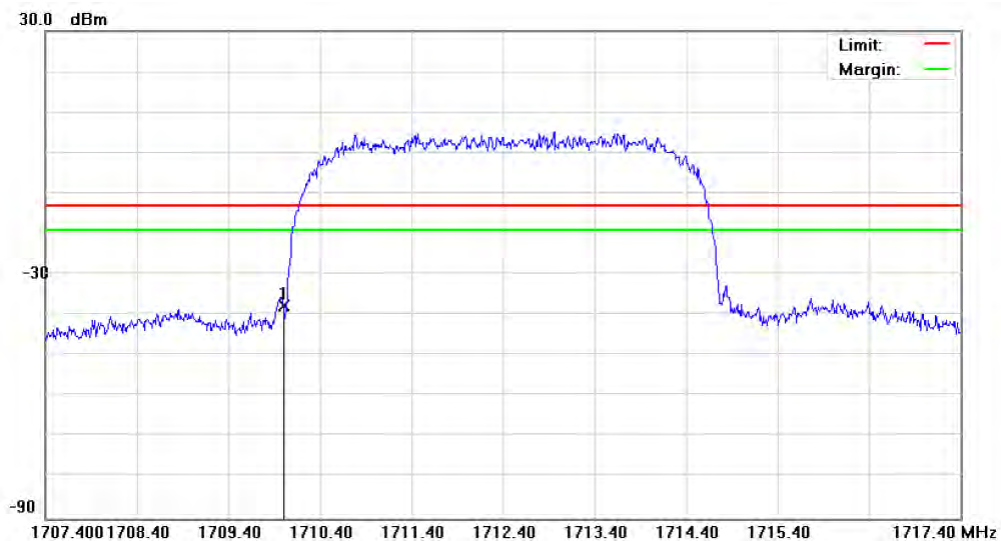

Higher Band

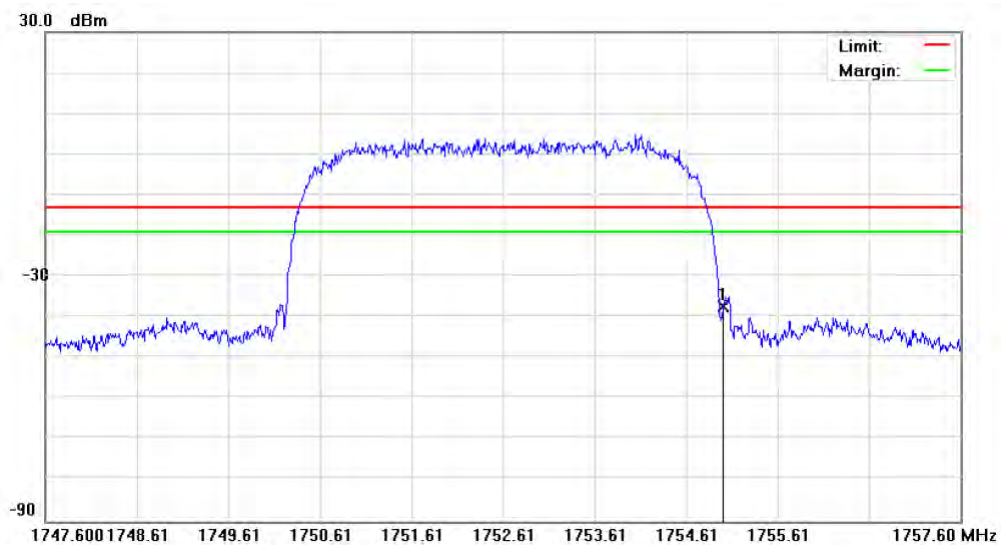

## 5 Conducted Emission Test

### 5.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### 5.2. Test Instruments


Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	(2)
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

**Below 2.8GHz**

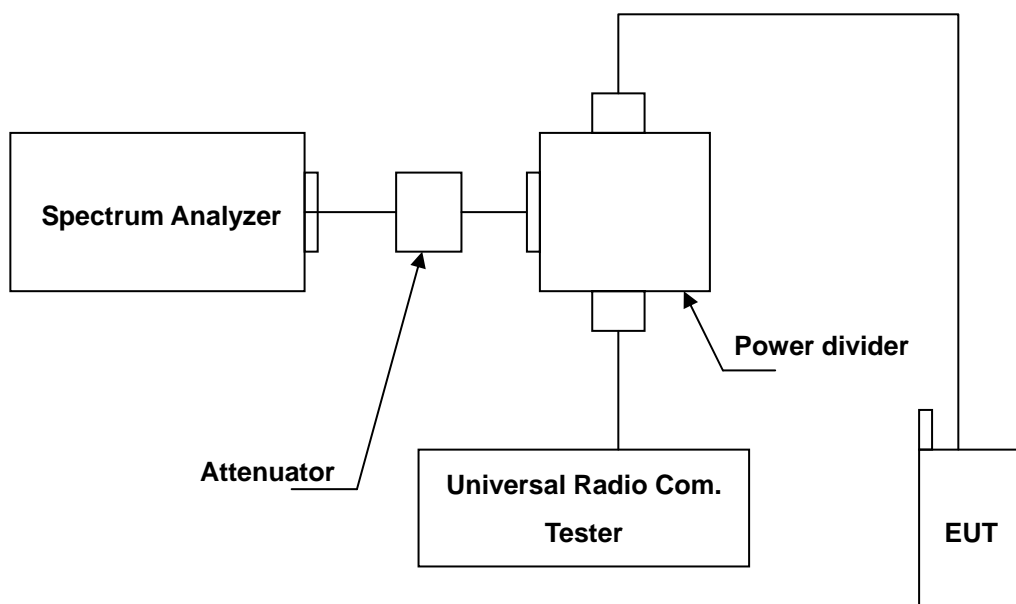

Above 2.8GHz

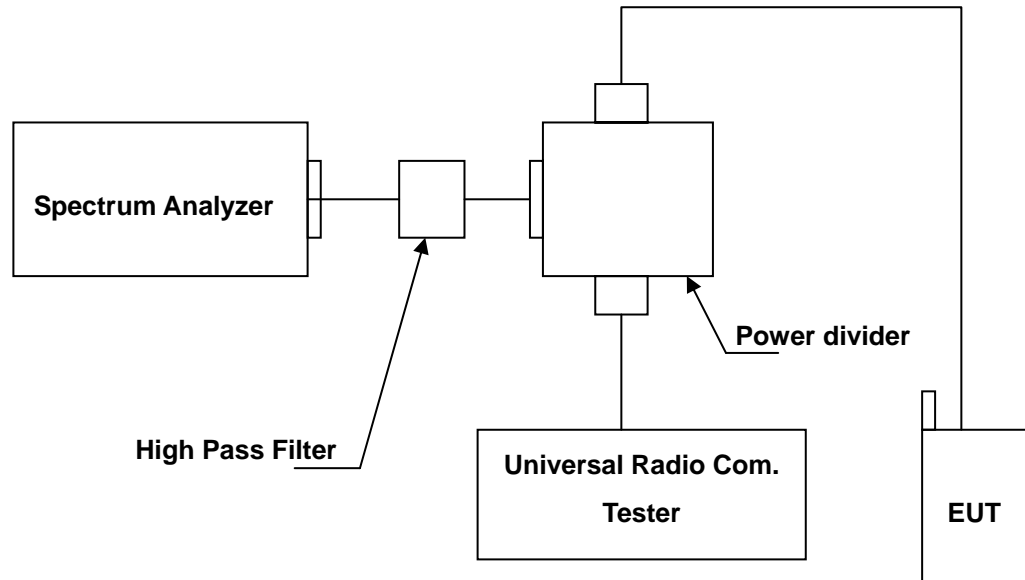

#### 5.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. Test setting at WCDMA Band IV RB=1MHz, VB=3MHz.

#### 5.5. Uncertainty

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### 5.6. Test Result


<b>Product</b>	Smartphone		
<b>Test Item</b>	Conducted Emission		
<b>Mode</b>	Mode 2: WCDMA Band IV Link		
<b>Date of Test</b>	05/29/2010	<b>Test Site</b>	TE02
Note: The test results see next page.			

File:PC10100(CH1312)

Data :#1

Date: 2010/5/29

Time: PM 04:07:30

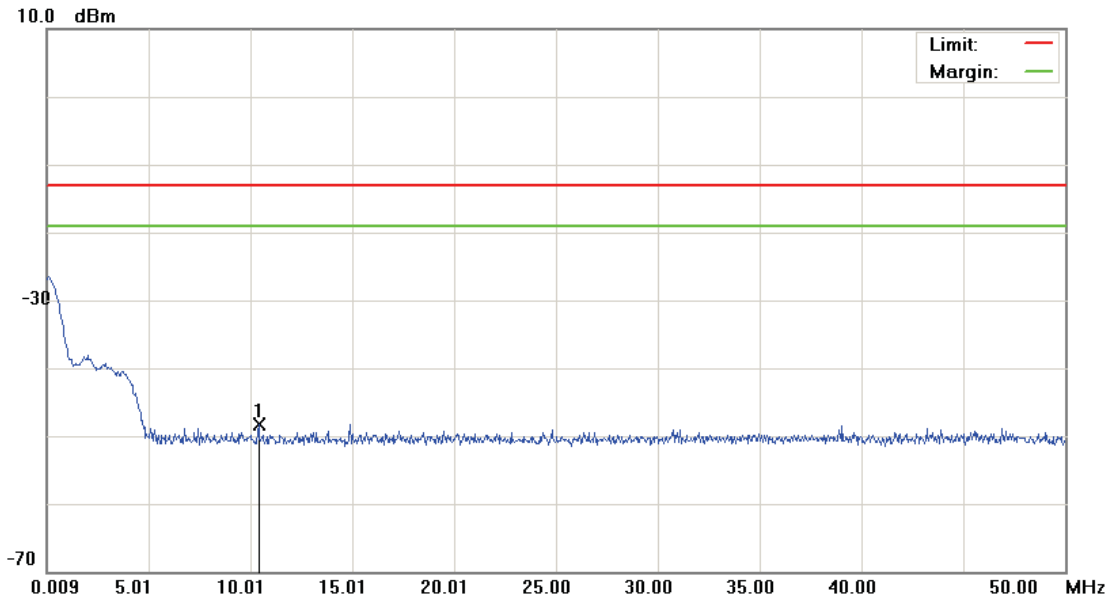

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PC10100

Mode: BAND VI

Note: CH1312(1712.4MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	10.4071	-61.63	13.30	-48.33	-13.00	-35.33	peak			

\*:Maximum data    x:Over limit    !:over margin




File:PC10100(CH1312)

Data :#2

Date: 2010/5/29

Time: PM 04:07:54

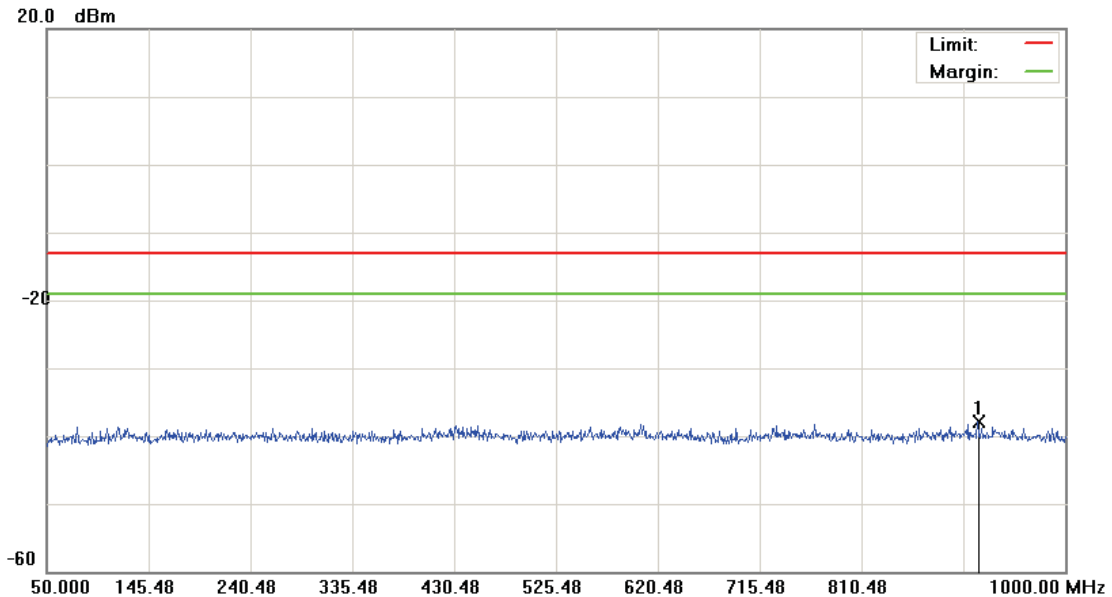

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:


M/N: PC10100

Mode: BAND VI

Note: CH1312(1712.4MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	918.7750	-51.04	13.20	-37.84	-13.00	-24.84	peak		

\*:Maximum data x:Over limit !:over margin

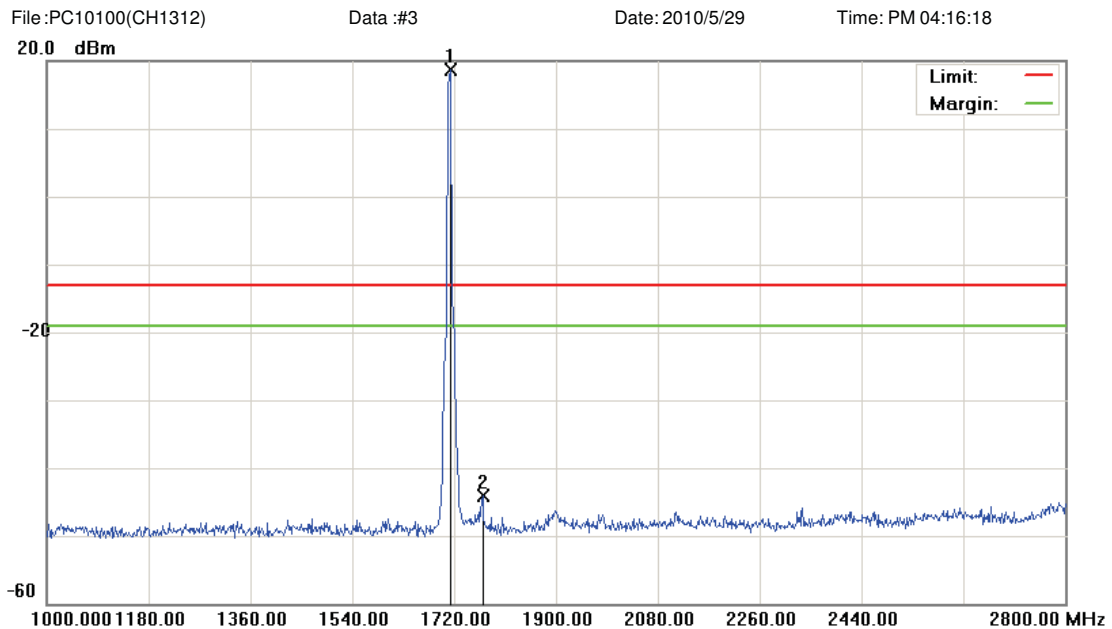

Site: : RF Conducted Polarization: *Conducted po* Temperature: 26 °C  
 Limit: FCC Part 27 conducted(9k-12.75G) Power: AC 110V/60Hz Humidity: 55 %  
 EUT: Smartphone Distance:  
 M/N: PC10100  
 Mode: BAND VI  
 Note: CH1312(1712.4MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1713.700	14.28	4.36	18.64	-13.00	31.64	peak			Tx
2		1770.400	-48.54	4.44	-44.10	-13.00	-31.10	peak			


\*:Maximum data x:Over limit !:over margin

File:PC10100(CH1312)

Data :#4

Date:2010/5/29

Time: PM 04:19:18

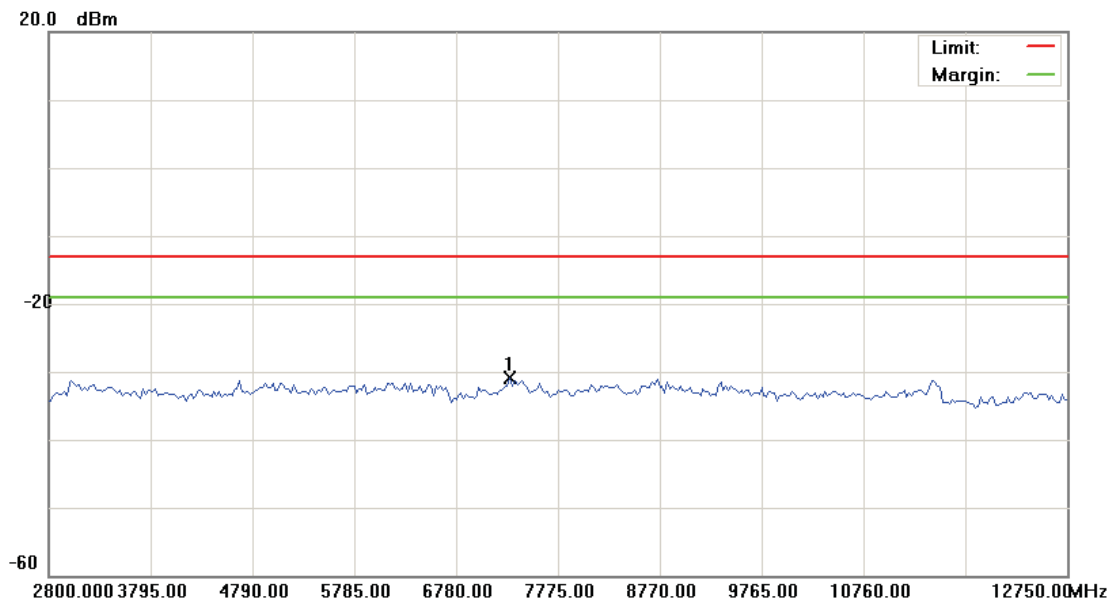

Site : RF Conducted

Phase: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PC10100

Mode: BAND VI

Note: CH1312(1712.4MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	7302.375	-36.13	5.22	-30.91	-13.00	-17.91	peak	


\*:Maximum data    x:Over limit    !:over margin

File:PC10100(CH1312)

Data :#5

Date:2010/5/29

Time: PM 04:19:30

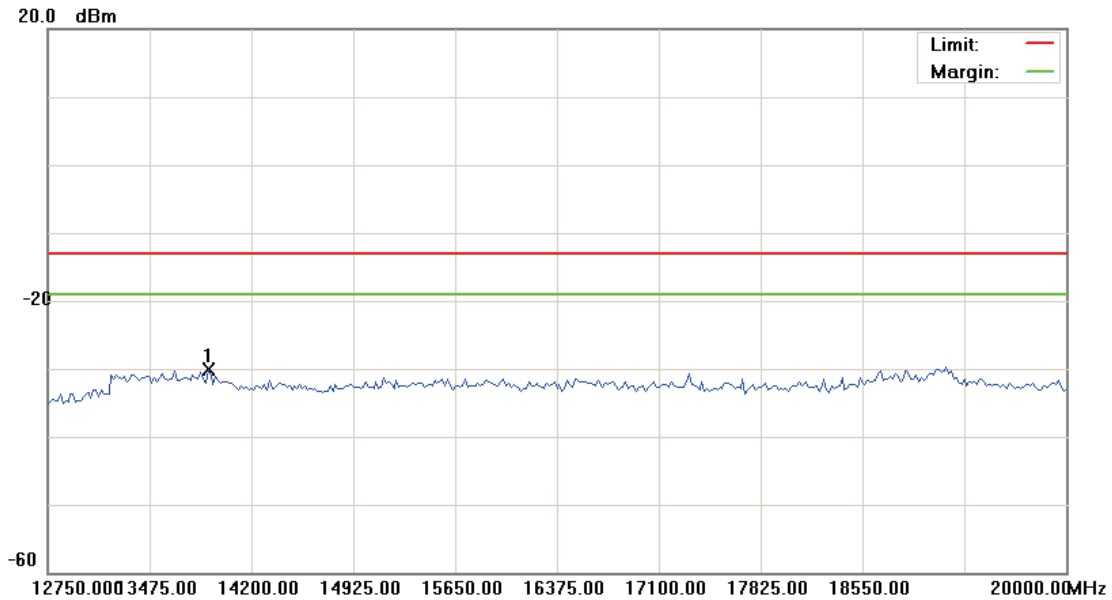

Site : RF Conducted

Phase: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PC10100

Mode: BAND VI

Note: CH1312(1712.4MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	13891.87	-35.78	5.70	-30.08	-13.00	-17.08	peak	

\*:Maximum data    x:Over limit    !:over margin


File:PC10100(CH1450)

Data :#1

Date: 2010/5/29

Time: PM 04:09:08

10.0 dBm

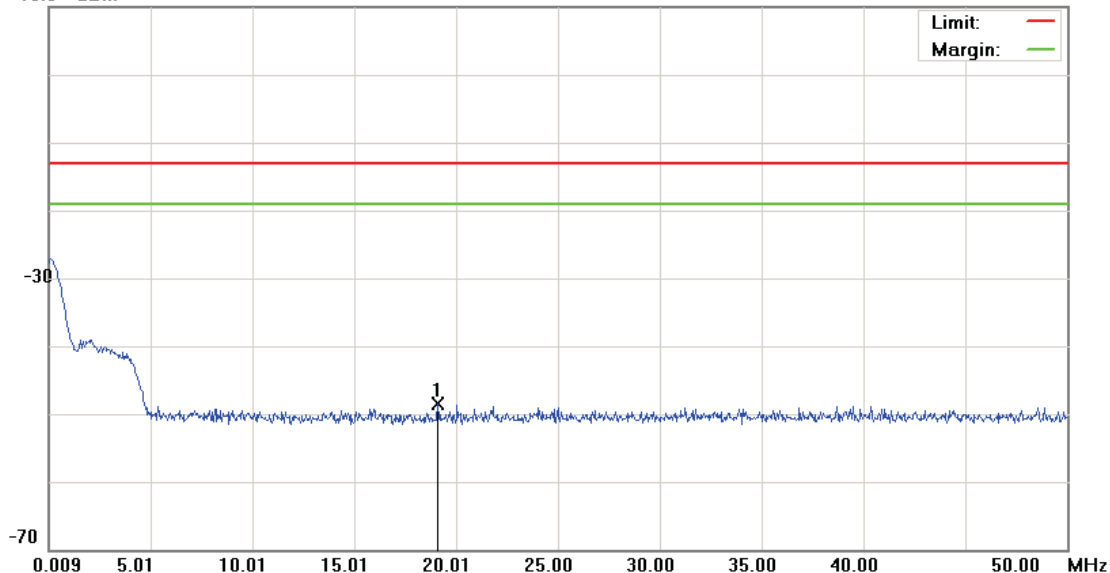

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PC10100

Mode: BAND VI

Note: CH1450(1740MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	19.1056	-61.85	13.28	-48.57	-13.00	-35.57	peak			

\*:Maximum data x:Over limit !:over margin


File:PC10100(CH1450)

Data :#2

Date: 2010/5/29

Time: PM 04:09:32

20.0 dBm

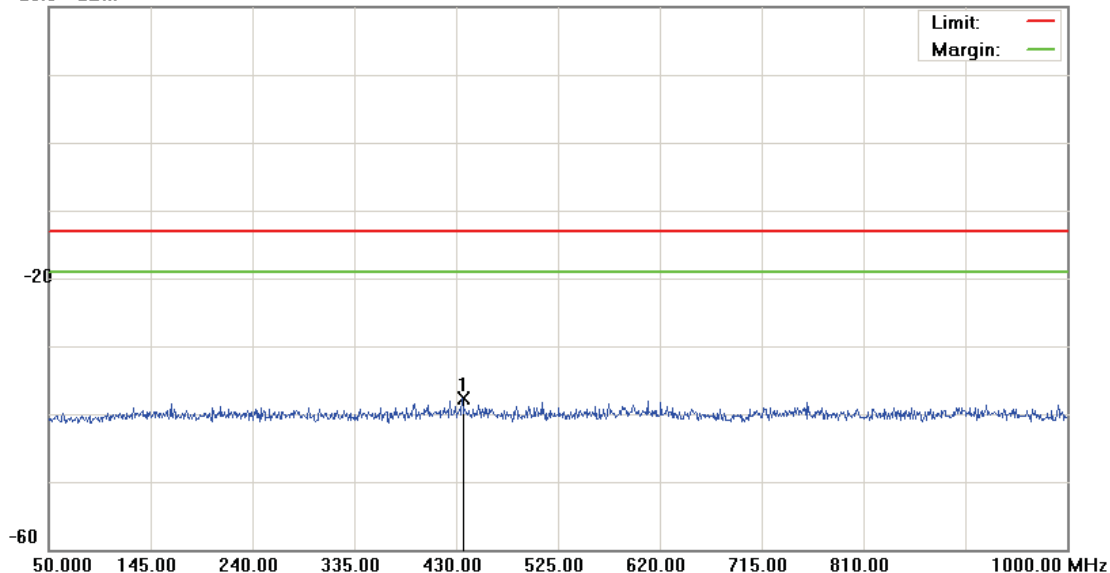

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:


M/N: PC10100

Mode: BAND VI

Note: CH1450(1740MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	436.1750	-50.98	13.24	-37.74	-13.00	-24.74	peak		

\*:Maximum data    x:Over limit    !:over margin

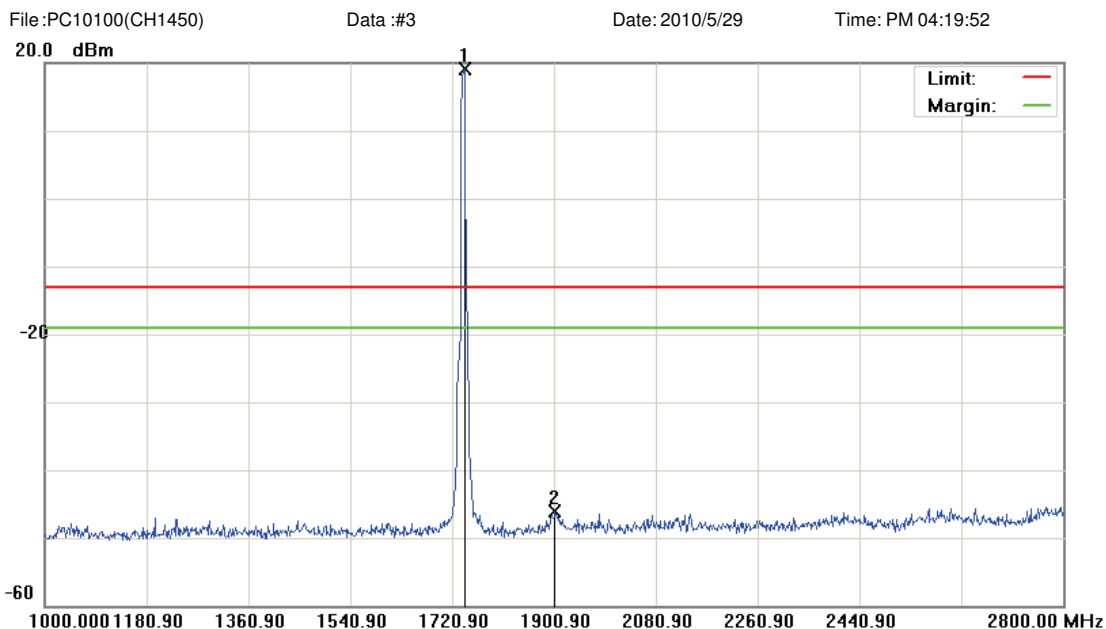

Site: : RF Conducted Polarization: *Conducted po* Temperature: 26 °C  
 Limit: FCC Part 27 conducted(9k-12.75G) Power: AC 110V/60Hz Humidity: 55 %  
 EUT: Smartphone Distance:  
 M/N: PC10100  
 Mode: BAND VI  
 Note: CH1450(1740MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1741.600	14.50	4.67	19.17	-13.00	32.17	peak			Tx
2		1901.800	-52.49	6.46	-46.03	-13.00	-33.03	peak			


\*:Maximum data x:Over limit !:over margin

File:PC10100(CH1450)

Data :#4

Date:2010/5/29

Time: PM 04:24:52

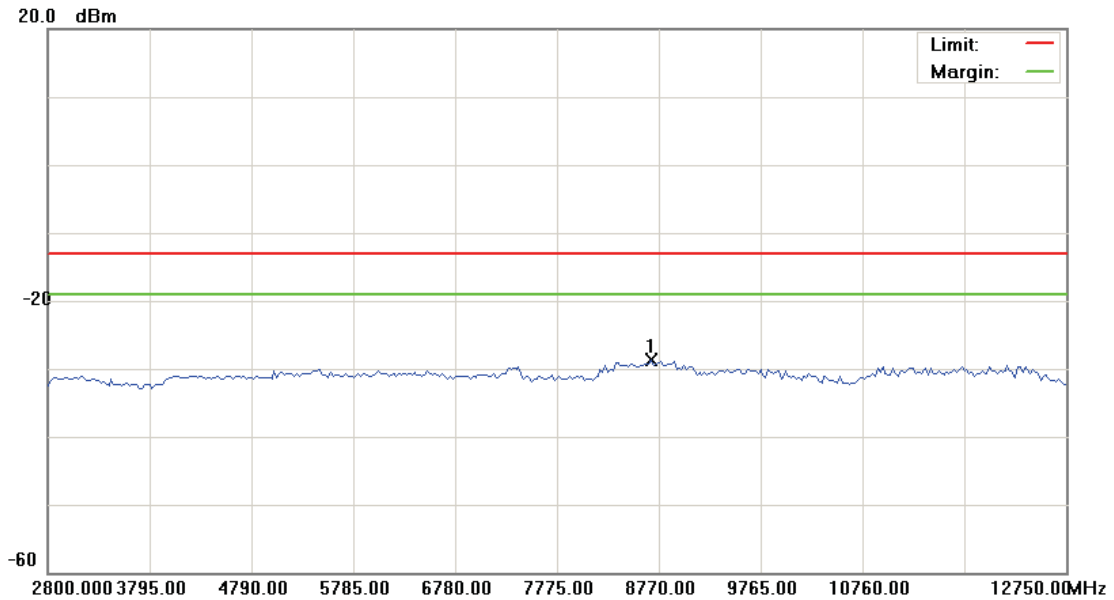

Site : RF Conducted

Phase: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PC10100

Mode: BAND VI

Note: CH1450(1740MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	8695.375	-34.15	5.37	-28.78	-13.00	-15.78	peak	

\*:Maximum data    x:Over limit    !:over margin




File:PC10100(CH1450)

Data :#5

Date:2010/5/29

Time: PM 04:25:27

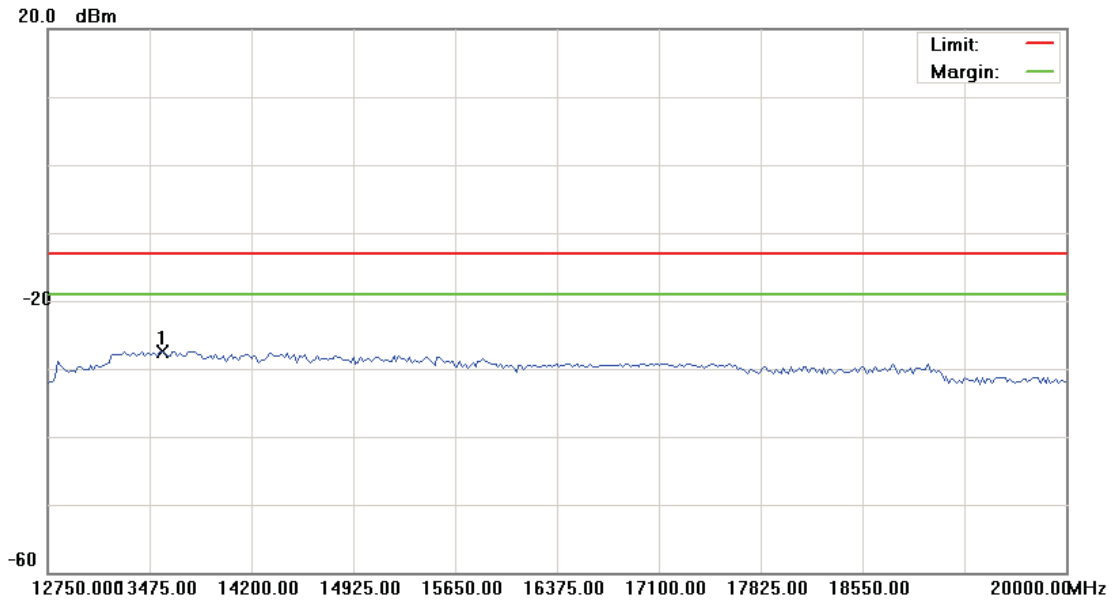

Site : RF Conducted

Phase: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PC10100

Mode: BAND VI

Note: CH1450(1740MHz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	13565.62	-33.01	5.60	-27.41	-13.00	-14.41	peak	

\*:Maximum data    x:Over limit    !:over margin


File:PC10100(CH1513)

Data :#1

Date: 2010/5/29

Time: PM 04:10:45

10.0 dBm

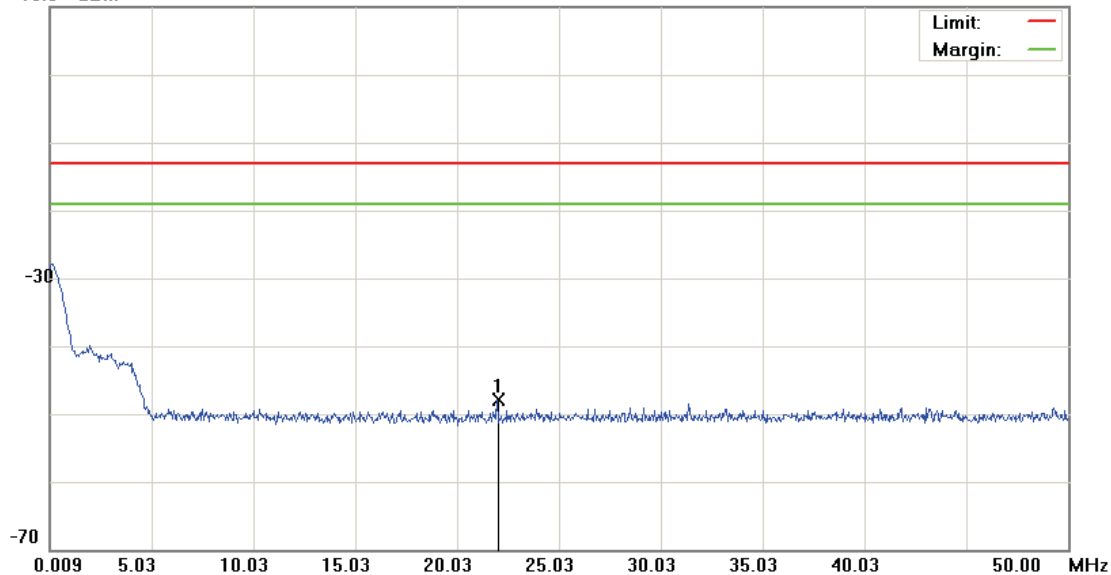

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PC10100

Mode: BAND VI

Note: CH1513(1752.6MHz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	21.9800	-61.24	13.29	-47.95	-13.00	-34.95	peak		

\*:Maximum data    x:Over limit    !:over margin


File:PC10100(CH1513)

Data :#2

Date: 2010/5/29

Time: PM 04:11:09

20.0 dBm

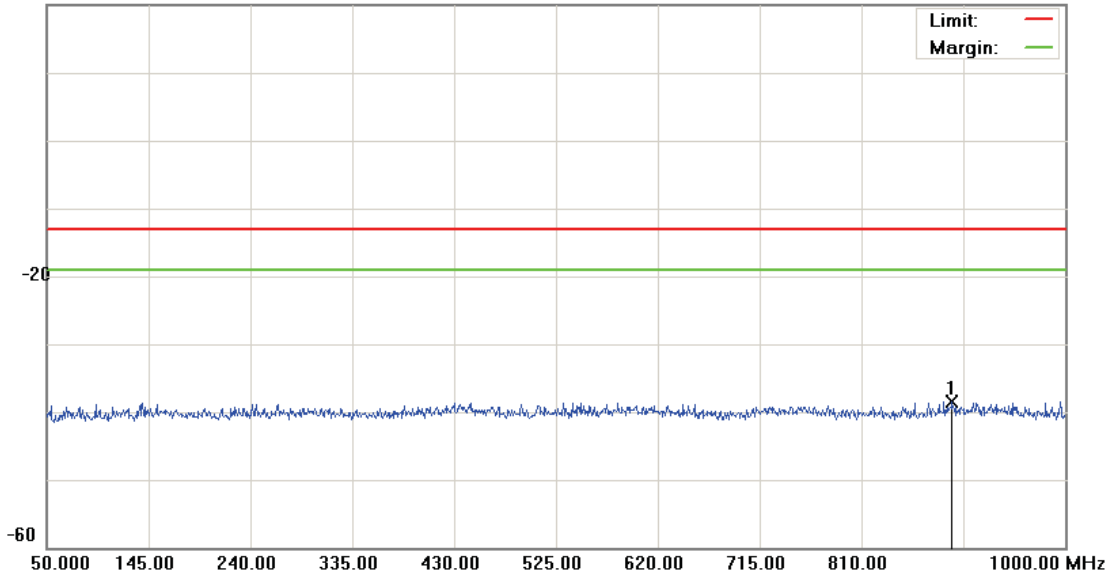

Site: : RF Conducted

Polarization: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:


M/N: PC10100

Mode: BAND VI

Note: CH1513(1752.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	894.5500	-51.73	13.24	-38.49	-13.00	-25.49	peak			


\*:Maximum data    x:Over limit    !:over margin

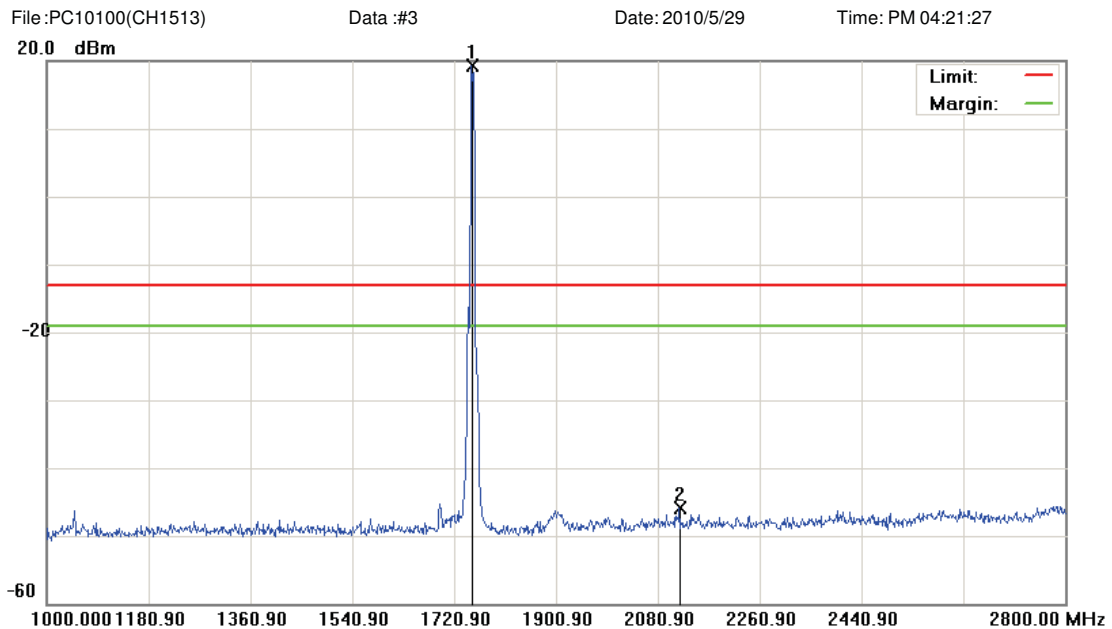

Site: : RF Conducted Polarization: *Conducted po* Temperature: 26 °C  
 Limit: FCC Part 27 conducted(9k-12.75G) Power: AC 110V/60Hz Humidity: 55 %  
 EUT: Smartphone Distance:  
 M/N: PC10100  
 Mode: BAND VI  
 Note: CH1513(1752.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1751.500	14.67	4.63	19.30	-13.00	32.30	peak			Tx
2		2118.700	-50.73	4.74	-45.99	-13.00	-32.99	peak			

\*:Maximum data x:Over limit !:over margin

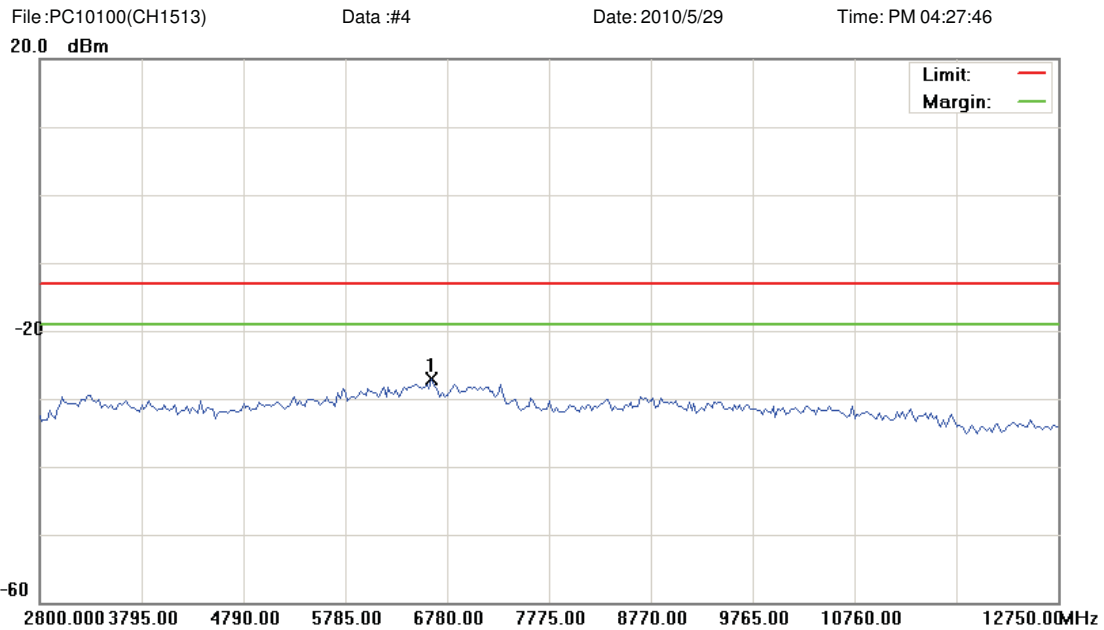

Site : RF Conducted Phase: **Conducted po** Temperature: 26 °C  
 Limit: FCC Part 27 conducted(9k-12.75G) Power: AC 110V/60Hz Humidity: 55 %  
 EUT: Smartphone  
 M/N: PC10100  
 Mode: BAND VI  
 Note: CH1513(1752.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6630.750	-32.20	5.08	-27.12	-13.00	-14.12	peak	


\*:Maximum data x:Over limit !:over margin

File:PC10100(CH1513)

Data :#5

Date:2010/5/29

Time: PM 04:28:15

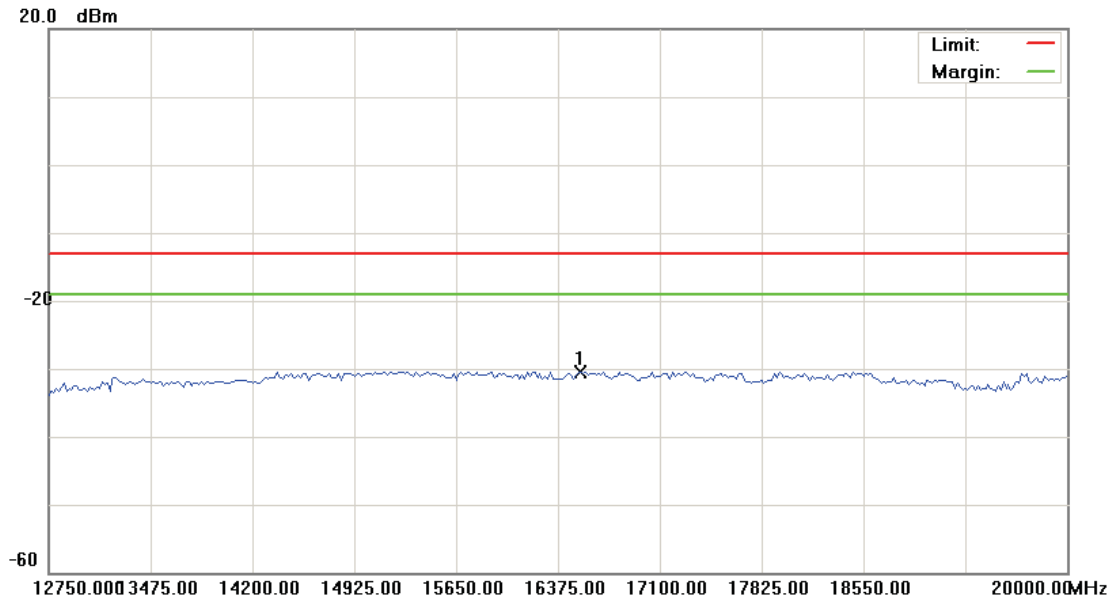

Site : RF Conducted

Phase: *Conducted po*

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-12.75G)

Power: AC 110V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PC10100

Mode: BAND VI

Note: CH1513(1752.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	16538.12	-36.86	6.45	-30.41	-13.00	-17.41	peak	

\*:Maximum data    x:Over limit    !:over margin

## 6 Field Strength of Spurious Radiation Test

### 6.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 6.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/27/2009	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/20/2009	(2)
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009	(1)
Pre Amplifier	Agilent	8447D	2944A10961	06/30/2009	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/23/2009	(2)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	07/01/2009	(2)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/30/2009	(2)
Test Site	ATL	TE01	TE01	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.3. Setup

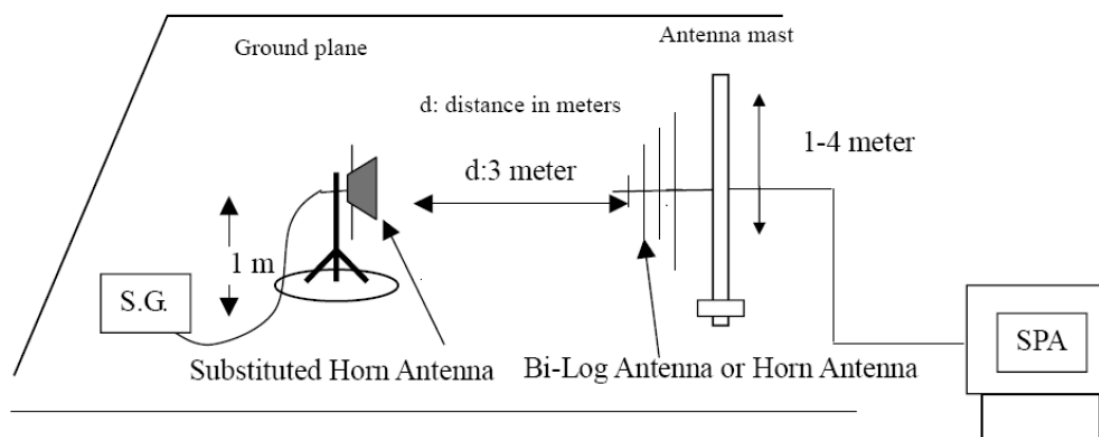

#### 6.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Resolution Bandwidth	1 MHz
Video Bandwidth	Auto
Sweep Time	Auto

#### 6.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is  $\pm 3.072$  dB.



## 6.6. Test Result

<b>Standard:</b>	<b>FCC Part 27</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiated Emission</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Model:</b>	<b>PC10100</b>	<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>
<b>Mode:</b>	<b>Mode 2</b>	<b>Date:</b>	<b>2010/06/03</b>
<b>Frequency:</b>	<b>1712.4 MHz</b>	<b>Test By:</b>	<b>Gary Wu</b>

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
1	41.0000	-81.45	12.14	-69.31	-13.00	-56.31	peak	H
2	91.0000	-81.05	1.25	-79.80	-13.00	-66.80	peak	H
3	231.0000	-77.03	-5.41	-82.44	-13.00	-69.44	peak	H
4	483.5000	-78.82	11.57	-67.25	-13.00	-54.25	peak	H
5	691.5000	-78.23	2.60	-75.63	-13.00	-62.63	peak	H
6	749.0000	-78.59	4.52	-74.07	-13.00	-61.07	peak	H
7	2240.000	-39.31	11.18	-28.13	-13.00	-15.13	peak	H
8	3430.000	-60.96	15.06	-45.90	-13.00	-32.90	peak	H
9	8430.000	-64.63	28.83	-35.80	-13.00	-22.80	peak	H
1	98.0000	-80.24	-3.65	-83.89	-13.00	-70.89	peak	V
2	173.0000	-79.32	-2.08	-81.40	-13.00	-68.40	peak	V
3	266.0000	-79.15	5.88	-73.27	-13.00	-60.27	peak	V
4	361.0000	-79.17	2.67	-76.50	-13.00	-63.50	peak	V
5	679.5000	-78.91	9.17	-69.74	-13.00	-56.74	peak	V
6	760.5000	-79.17	9.04	-70.13	-13.00	-57.13	peak	V
7	2412.000	-39.70	11.65	-28.05	-13.00	-15.05	peak	V
8	3430.000	-58.62	18.87	-39.75	-13.00	-26.75	peak	V
9	7060.000	-63.72	25.70	-38.02	-13.00	-25.02	peak	V

<b>Standard:</b>	<b>FCC Part 27</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiated Emission</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Model:</b>	<b>PC10100</b>	<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>
<b>Mode:</b>	<b>Mode 2</b>	<b>Date:</b>	<b>2010/06/03</b>
<b>Frequency:</b>	<b>1740.0 MHz</b>	<b>Test By:</b>	<b>Gary Wu</b>

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
1	41.5000	-81.00	12.09	-68.91	-13.00	-55.91	peak	H
2	94.5000	-79.76	0.92	-78.84	-13.00	-65.84	peak	H
3	228.0000	-78.06	-5.69	-83.75	-13.00	-70.75	peak	H
4	482.0000	-79.77	11.62	-68.15	-13.00	-55.15	peak	H
5	583.5000	-78.19	3.86	-74.33	-13.00	-61.33	peak	H
6	902.5000	-80.90	16.72	-64.18	-13.00	-51.18	peak	H
7	2526.000	-39.93	12.09	-27.84	-13.00	-14.84	peak	H
8	3480.000	-57.87	15.23	-42.64	-13.00	-29.64	peak	H
1	108.5000	-80.61	-3.14	-83.75	-13.00	-70.75	peak	V
2	233.0000	-77.85	1.08	-76.77	-13.00	-63.77	peak	V
3	282.0000	-78.92	6.23	-72.69	-13.00	-59.69	peak	V
4	630.0000	-78.41	6.90	-71.51	-13.00	-58.51	peak	V
5	755.0000	-79.16	9.16	-70.00	-13.00	-57.00	peak	V
6	879.0000	-79.76	8.16	-71.60	-13.00	-58.60	peak	V
7	2566.000	-39.95	12.66	-27.29	-13.00	-14.29	peak	V
8	3480.000	-53.11	19.18	-33.93	-13.00	-20.93	peak	V

<b>Standard:</b>	<b>FCC Part 27</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiated Emission</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Model:</b>	<b>PC10100</b>	<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>
<b>Mode:</b>	<b>Mode 2</b>	<b>Date:</b>	<b>2010/06/03</b>
<b>Frequency:</b>	<b>1752.6 MHz</b>	<b>Test By:</b>	<b>Gary Wu</b>

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
1	35.500	-81.12	12.55	-68.57	-13.00	-55.57	peak	H
2	99.500	-80.18	0.48	-79.70	-13.00	-66.70	peak	H
3	274.500	-77.67	-4.61	-82.28	-13.00	-69.28	peak	H
4	337.500	-79.55	-1.44	-80.99	-13.00	-67.99	peak	H
5	484.500	-79.69	11.52	-68.17	-13.00	-55.17	peak	H
6	904.500	-80.15	16.66	-63.49	-13.00	-50.49	peak	H
7	2538.000	-38.82	12.12	-26.70	-13.00	-13.70	peak	H
8	3510.000	-55.48	15.31	-40.17	-13.00	-27.17	peak	H
9	5580.000	-66.08	21.89	-44.19	-13.00	-31.19	peak	H
10	6870.000	-63.42	27.24	-36.18	-13.00	-23.18	peak	H
1	178.000	-79.46	-1.79	-81.25	-13.00	-68.25	peak	V
2	266.500	-78.74	5.90	-72.84	-13.00	-59.84	peak	V
3	376.500	-79.07	1.34	-77.73	-13.00	-64.73	peak	V
4	739.000	-79.83	9.41	-70.42	-13.00	-57.42	peak	V
5	777.500	-78.90	8.46	-70.44	-13.00	-57.44	peak	V
6	916.500	-79.80	9.02	-70.78	-13.00	-57.78	peak	V
7	2352.000	-40.16	11.33	-28.83	-13.00	-15.83	peak	V
8	3510.000	-53.01	19.34	-33.67	-13.00	-20.67	peak	V
9	7620.000	-64.45	26.44	-38.01	-13.00	-25.01	peak	V

## 7 Frequency Stability (Temperature Variation) Test

### 7.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.


### 7.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	08/26/2009	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.3. Setup

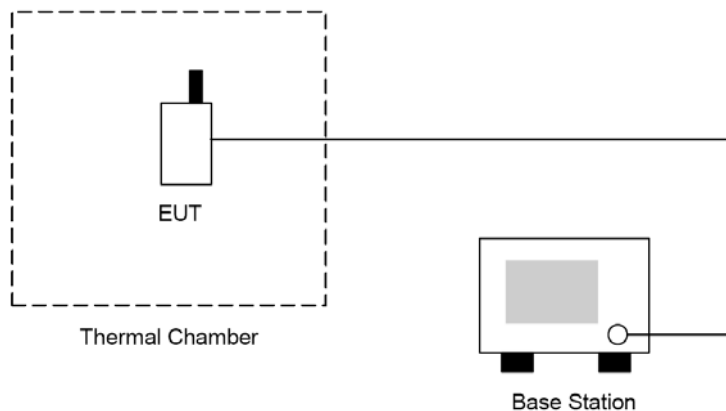

### 7.4. Test Procedure

The measurement is made according to FCC rules part 27:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

## 7.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is  $\pm 10\text{Hz}$ .

## 7.6. Test Result

<b>Product</b>	Smartphone			
<b>Test Item</b>	Frequency Stability (Temperature Variation)			
<b>Test Mode</b>	Mode 2: WCDMA Band IV Link			
<b>Date of Test</b>	06/01/2010		<b>Test Site</b>	TE02
Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
-30	24.12	0.014	$\pm 2.5$	Pass
-20	23.27	0.013	$\pm 2.5$	Pass
-10	21.42	0.012	$\pm 2.5$	Pass
0	22.44	0.013	$\pm 2.5$	Pass
10	20.57	0.012	$\pm 2.5$	Pass
20	21.38	0.012	$\pm 2.5$	Pass
30	22.47	0.013	$\pm 2.5$	Pass
40	21.44	0.012	$\pm 2.5$	Pass
50	20.93	0.012	$\pm 2.5$	Pass

## 8 Frequency Stability (Voltage Variation) Test

### 8.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.


### 8.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009	(2)
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	08/26/2009	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.3. Setup

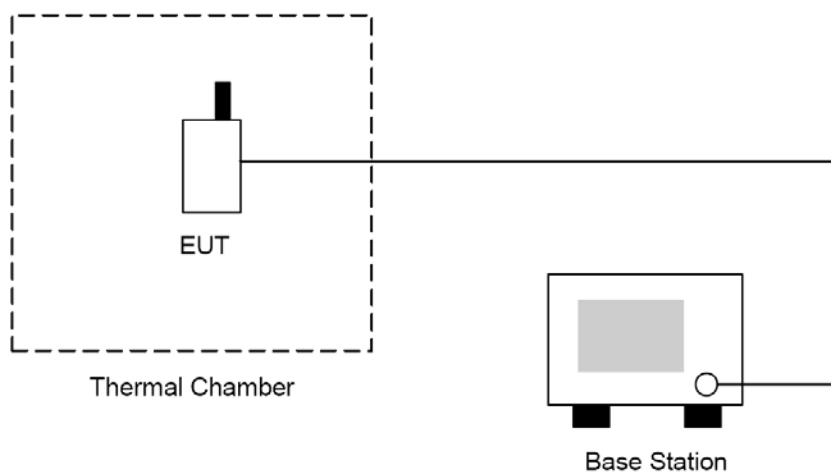

### 8.4. Test Procedure

1. The EUT was placed in a temperature chamber at  $25 \pm 5^\circ\text{C}$  and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 8.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Voltage Variation) measurement is  $\pm 10\text{Hz}$ .

## 8.6. Test Result

<b>Product</b>	Smartphone				
<b>Test Item</b>	Frequency Stability (Voltage Variation)				
<b>Test Mode</b>	Mode 2: WCDMA Band IV Link				
<b>Date of Test</b>	06/01/2010		<b>Test Site</b>	TE02	
<b>Level</b>	<b>Voltage [V]</b>	<b>Deviation [Hz]</b>	<b>Deviation [ppm]</b>	<b>Limit [ppm]</b>	<b>Result</b>
Battery full point	4.20	20.47	0.012	±2.5	Pass
Normal	3.70	22.19	0.013	±2.5	Pass
Battery cut-off point	3.40	23.24	0.013	±2.5	Pass

## 9 AC Power Conducted Emissions Test

### 9.1. Limit

Frequency range (MHz)	Limits (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50


### 9.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	07/01/2009	(1)
LISN	R&S	ENV216	101040	03/02/2010	(1)
LISN	R&S	ENV216	101041	03/02/2010	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.3. Setup

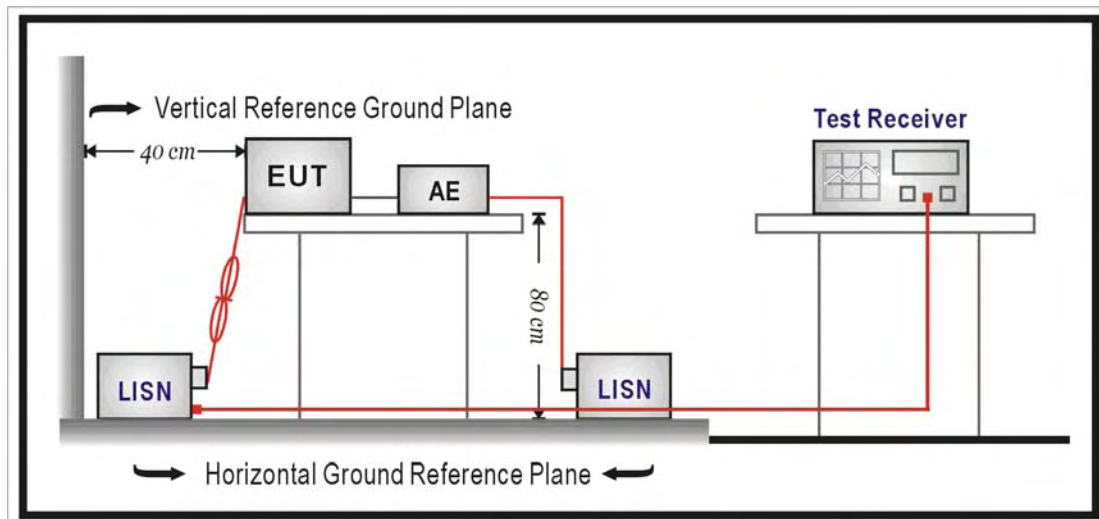



#### 9.4. Test Procedure

The measurement is made according to FCC rules 15.207:

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in section 10.6.

#### 9.5. Uncertainty


The measurement uncertainty is defined as for AC power conducted emission measurement is  $\pm 2.24$  dB.

#### 9.6. Test Result

<b>Product</b>	Smartphone		
<b>Test Item</b>	Frequency Stability		
<b>Test Mode</b>	Mode 1: IDLE Mode Mode 2: WCDMA Band IV Link		
<b>Date of Test</b>	05/18 ~ 05/31/2010	<b>Test Site</b>	TE02
Note: The test results see next page.			

Job No.:	File :10-0196-SE	Date: 2010/5/18
Standard:	CISPR 22 Class B Conduction(QP)	Time: PM 03:45:00
Test item:	Conduction Test	Temp.(°C)/Hum.(%): 26 °C / 60 %
Line :	L1	Test By : Gary Wu
Model:	PC10100	Test Voltage AC 120V/60Hz

Description: Mode 1

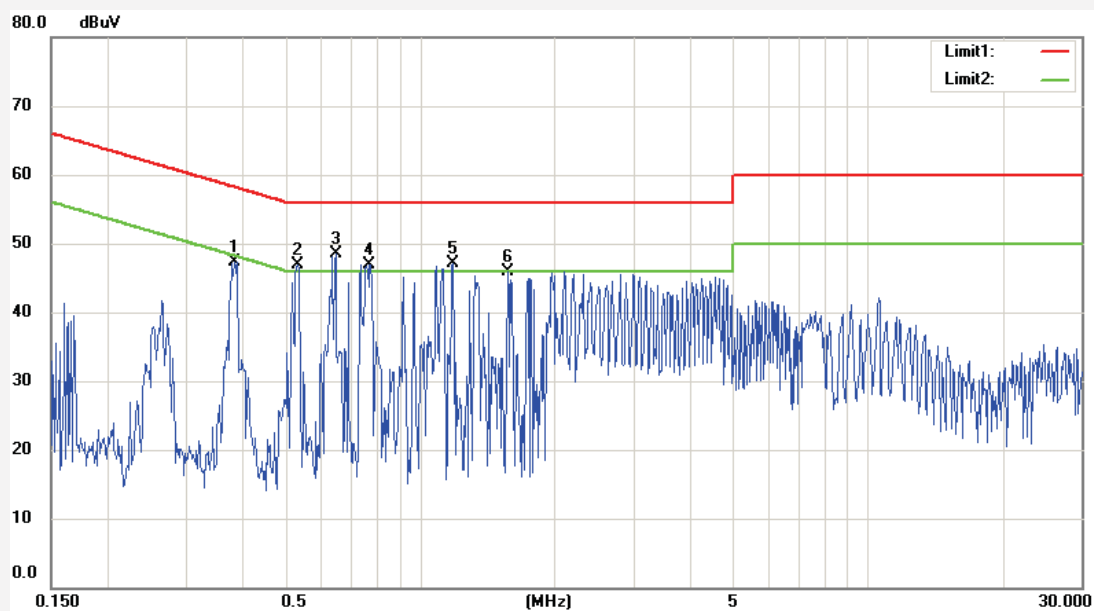


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.3852	33.81	14.42	10.01	43.82	24.43	58.17	48.17	-14.35	-23.74	
2	0.5322	32.55	11.30	9.94	42.49	21.24	56.00	46.00	-13.51	-24.76	
3	0.6474	33.29	11.75	9.89	43.18	21.64	56.00	46.00	-12.82	-24.36	*
4	0.7711	32.65	11.70	9.85	42.50	21.55	56.00	46.00	-13.50	-24.45	
5	1.1844	30.53	8.40	9.68	40.21	18.08	56.00	46.00	-15.79	-27.92	
6	1.5684	28.72	7.52	9.69	38.41	17.21	56.00	46.00	-17.59	-28.79	

Remark: "\*" Maximum data

Job No.:	File :10-0196-SE	Date: 2010/5/18
Standard:	CISPR 22 Class B Conduction(QP)	Time: PM 03:47:43
Test item:	Conduction Test	Temp.(°C)/Hum.(%): 26 °C / 60 %
Line :	N	Test By : Gary Wu
Model:	PC10100	Test Voltage AC 120V/60Hz

Description: Mode 1

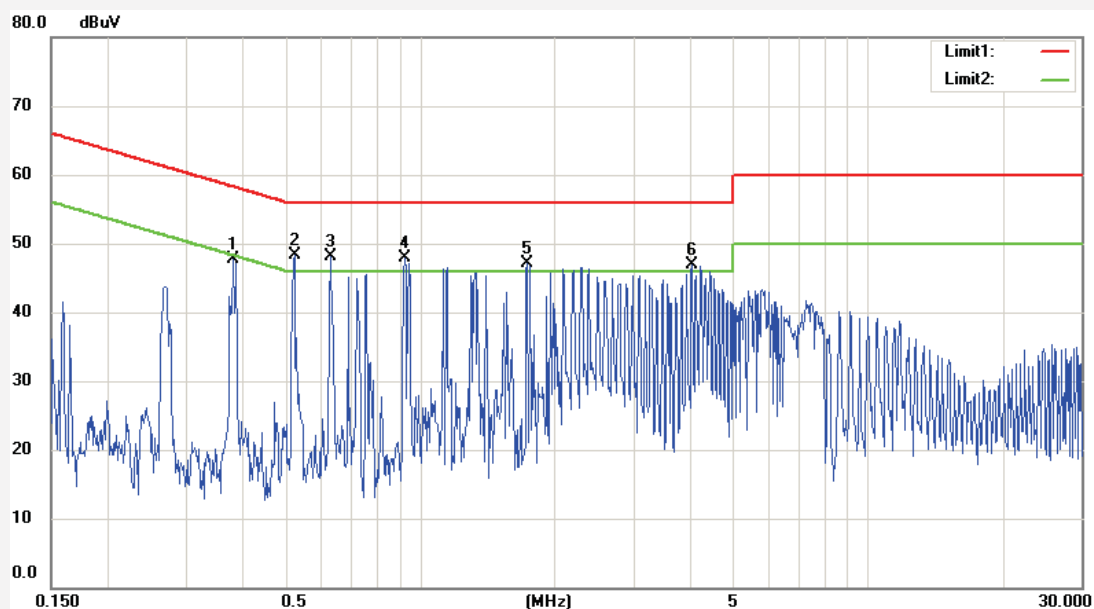


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.3832	34.29	11.97	10.01	44.30	21.98	58.21	48.21	-13.91	-26.23	
2	0.5237	33.41	10.50	9.95	43.36	20.45	56.00	46.00	-12.64	-25.55	*
3	0.6305	33.18	9.40	9.90	43.08	19.30	56.00	46.00	-12.92	-26.70	
4	0.9233	31.69	8.41	9.78	41.47	18.19	56.00	46.00	-14.53	-27.81	
5	1.7345	30.25	8.58	9.66	39.91	18.24	56.00	46.00	-16.09	-27.76	
6	4.0490	28.17	8.64	9.84	38.01	18.48	56.00	46.00	-17.99	-27.52	

Remark: "\*" Maximum data

Job No.:	File :10-0196-SE	Date: 2010/5/31
Standard:	CISPR 22 Class B Conduction(QP)	Time: PM 06:20:29
Test item:	Conduction Test	Temp.(°C)/Hum.(%): 26 °C / 60 %
Line :	L1	Test By : Gary Wu
Model:	PC10100	Test Voltage AC 120V/60Hz

Description: Mode 2

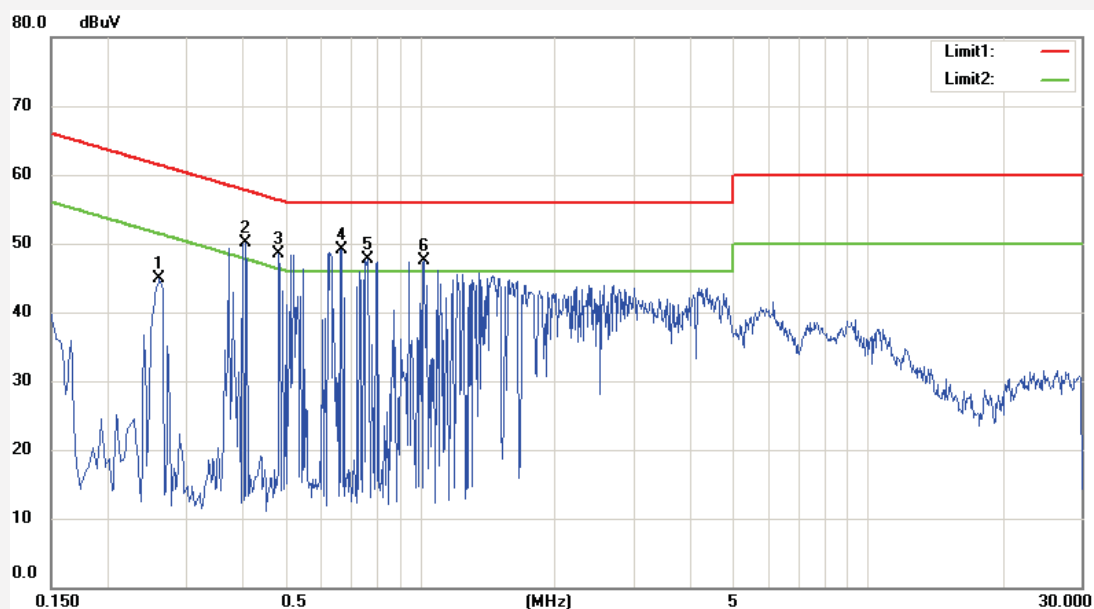


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2620	30.79	13.06	10.06	40.85	23.12	61.37	51.37	-20.52	-28.25	
2	0.4100	34.85	8.84	10.00	44.85	18.84	57.65	47.65	-12.80	-28.81	
3	0.4860	34.13	9.84	9.97	44.10	19.81	56.24	46.24	-12.14	-26.43	*
4	0.6700	33.92	9.15	9.88	43.80	19.03	56.00	46.00	-12.20	-26.97	
5	0.7660	32.60	9.59	9.85	42.45	19.44	56.00	46.00	-13.55	-26.56	
6	1.0260	31.77	8.47	9.75	41.52	18.22	56.00	46.00	-14.48	-27.78	

Remark: "\*" Maximum data

Job No.:	File :10-0196-SE	Date: 2010/5/31
Standard:	CISPR 22 Class B Conduction(QP)	Time: PM 06:22:37
Test item:	Conduction Test	Temp.(°C)/Hum.(%): 26 °C / 60 %
Line :	N	Test By : Gary Wu
Model:	PC10100	Test Voltage AC 120V/60Hz

Description: Mode 2

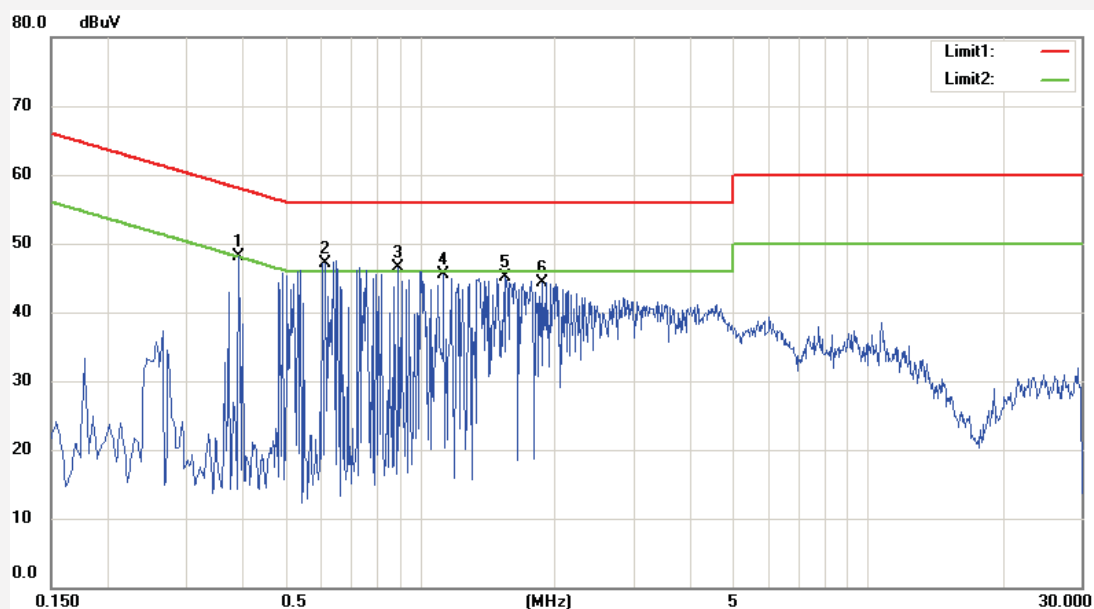

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.3940	33.53	13.52	10.00	43.53	23.52	57.98	47.98	-14.45	-24.46	
2	0.6140	32.65	13.98	9.90	42.55	23.88	56.00	46.00	-13.45	-22.12	*
3	0.8980	31.49	7.45	9.79	41.28	17.24	56.00	46.00	-14.72	-28.76	
4	1.1300	30.72	10.33	9.70	40.42	20.03	56.00	46.00	-15.58	-25.97	
5	1.5540	28.85	9.89	9.68	38.53	19.57	56.00	46.00	-17.47	-26.43	
6	1.8860	28.96	10.36	9.69	38.65	20.05	56.00	46.00	-17.35	-25.95	

Remark: "\*" Maximum data