

#01 CDMA2000 BC0_RC3_SO55_Right Cheek_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: HSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.301 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.72 V/m; Power Drift = 0.00441 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

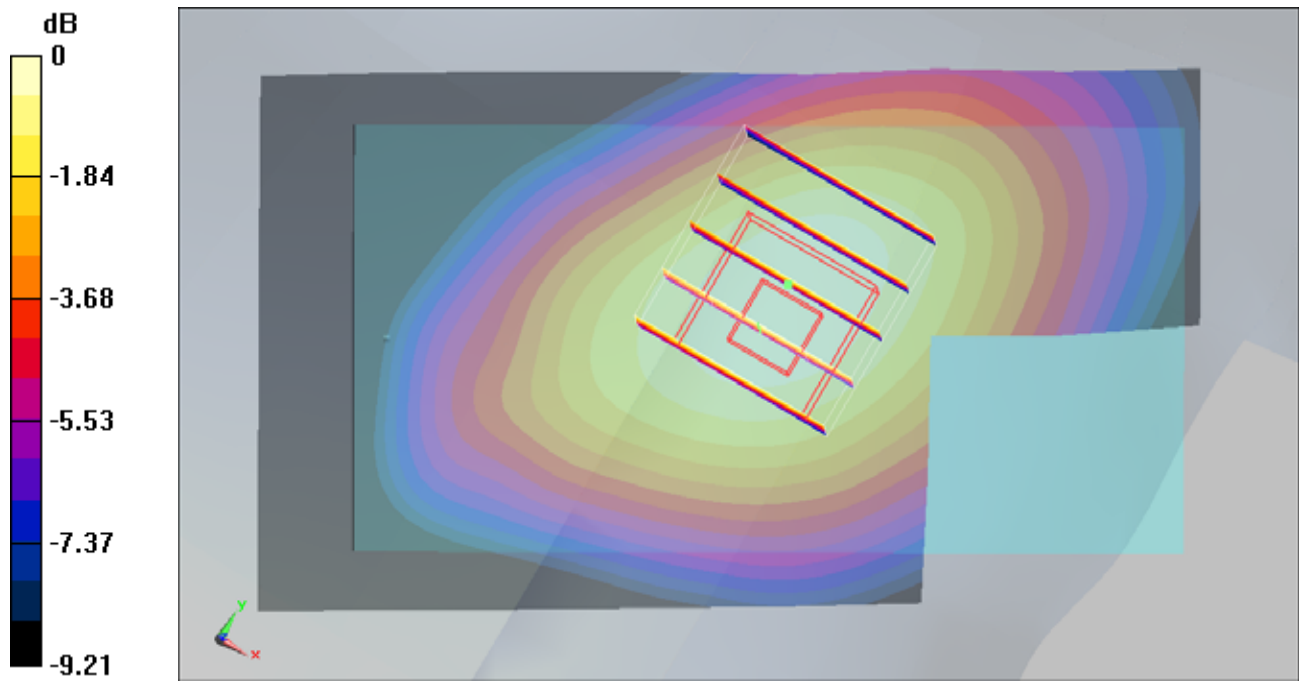

0 dB = 0.299mW/g

#02 CDMA2000 BC0_RC3_SO55_Right Tilted_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: HSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn778; Calibrated: 2009/9/18

- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.257 mW/g

Ch1013/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.183 mW/g


Maximum value of SAR (measured) = 0.250 mW/g

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.151 mW/g

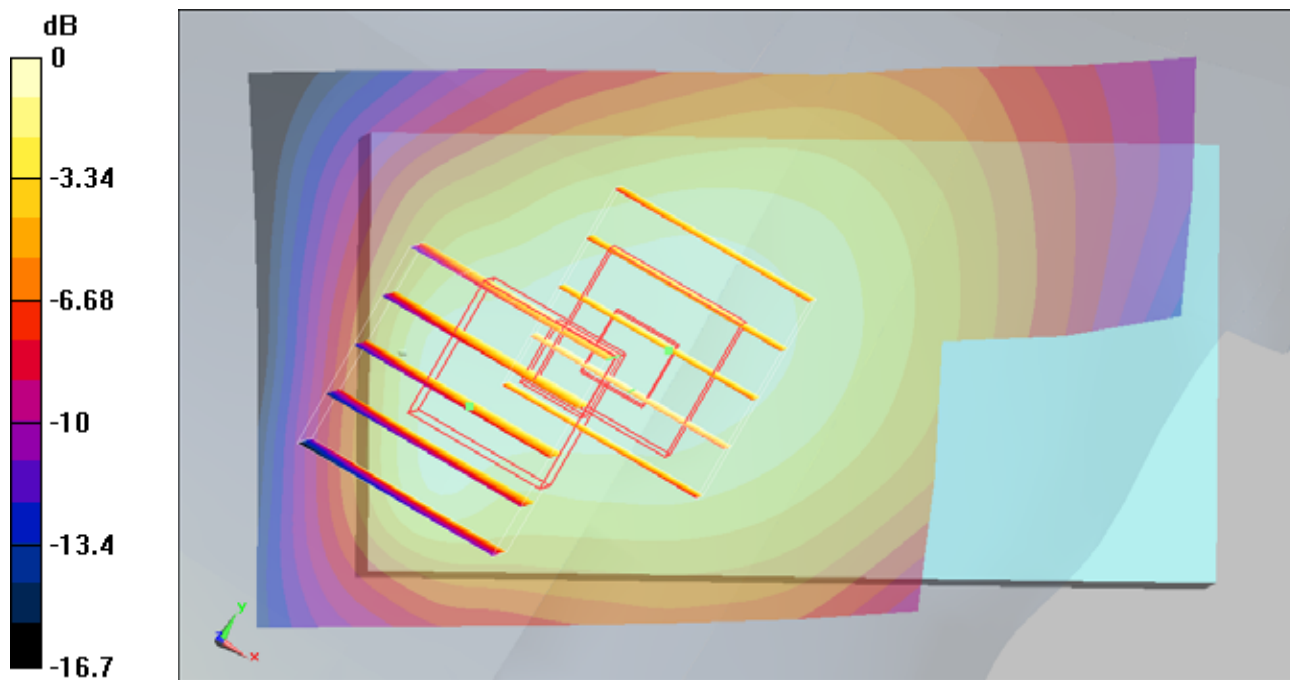

0 dB = 0.250mW/g

#03 CDMA2000 BC0_RC3_SO55_Left Cheek_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: HSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.393 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.43 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

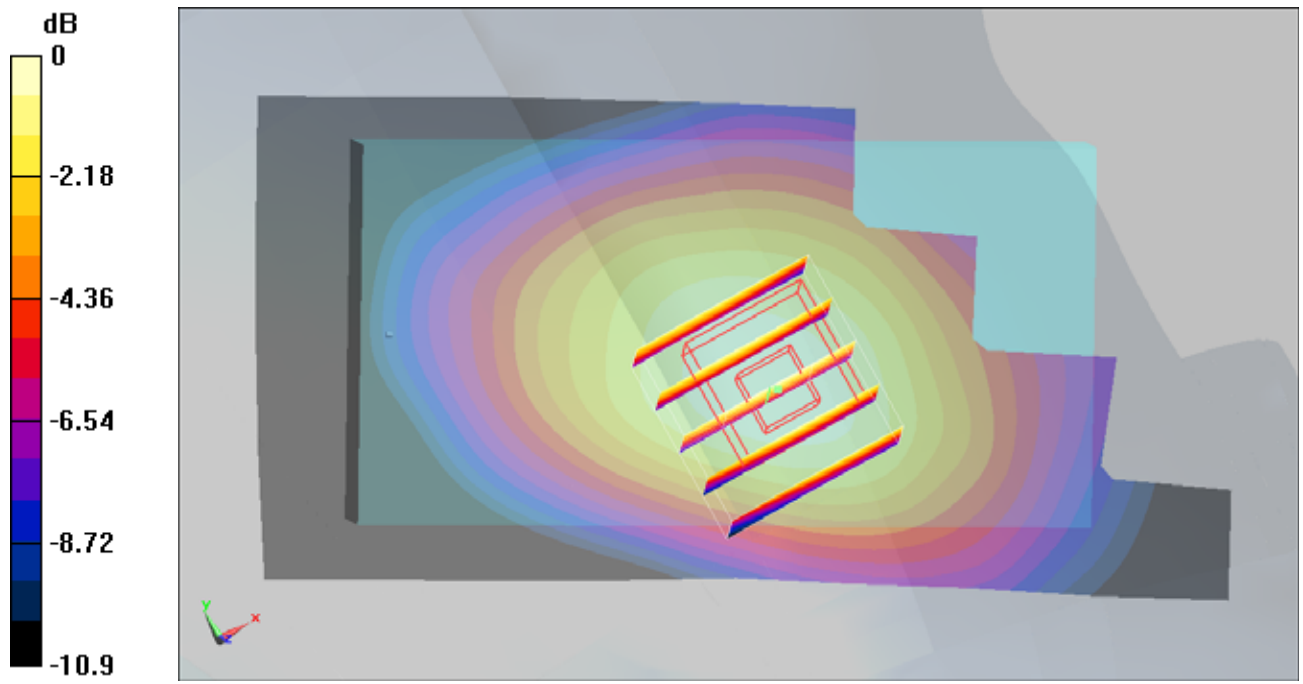

0 dB = 0.401mW/g

#03 CDMA2000 BC0_RC3_SO55_Left Cheek_Ch1013_Slide Off_PDA 1_Battery 1_2D

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz;Duty Cycle: 1:1

Medium: HSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.393 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.43 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

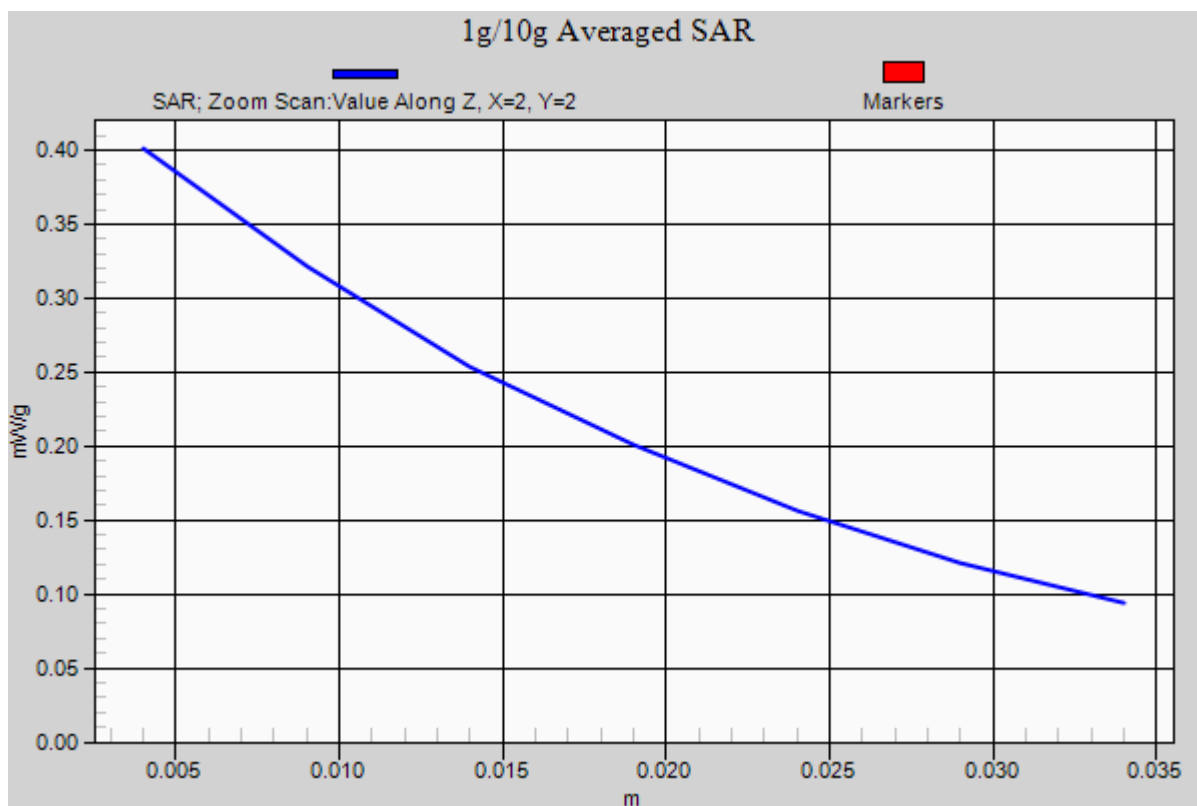

#04 CDMA2000 BC0_RC3_SO55_Left Tilted_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: HSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.284 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.289 mW/g

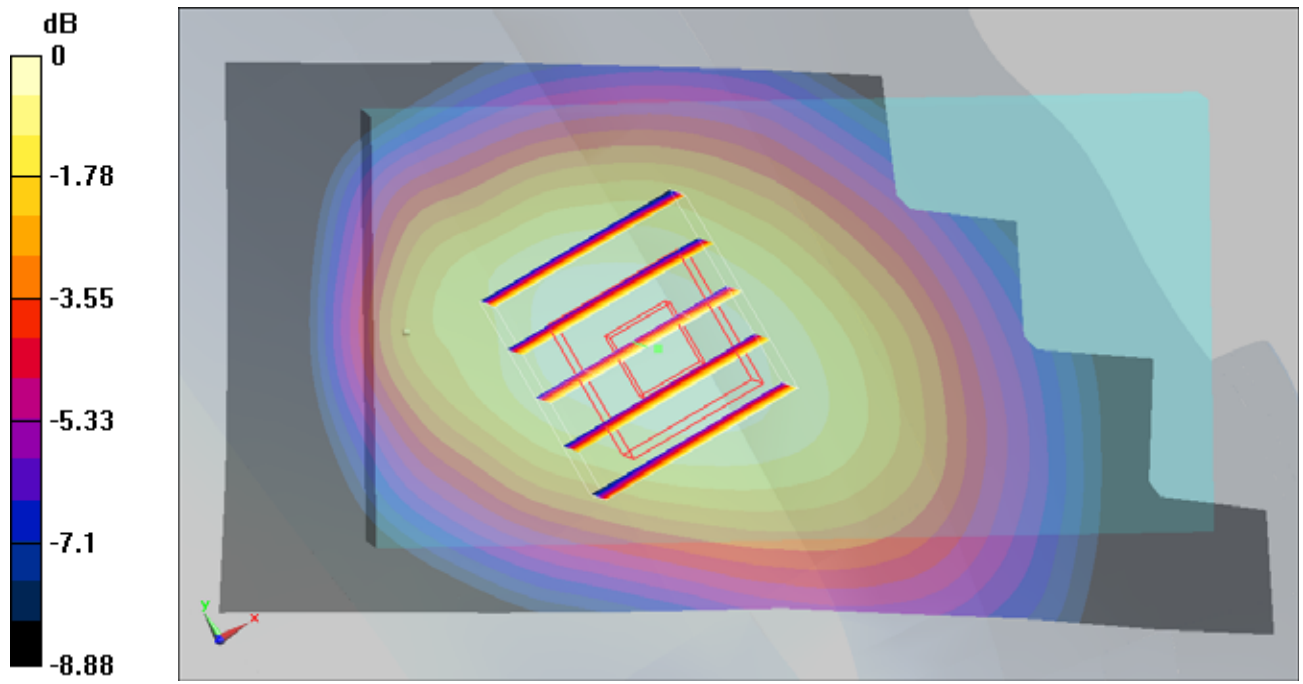

0 dB = 0.289mW/g

#11 CDMA2000 BC1_RC3_SO55_Right Cheek_Ch25_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: HSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r =$

38.3 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.09, 5.09, 5.09); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.571 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.644 mW/g

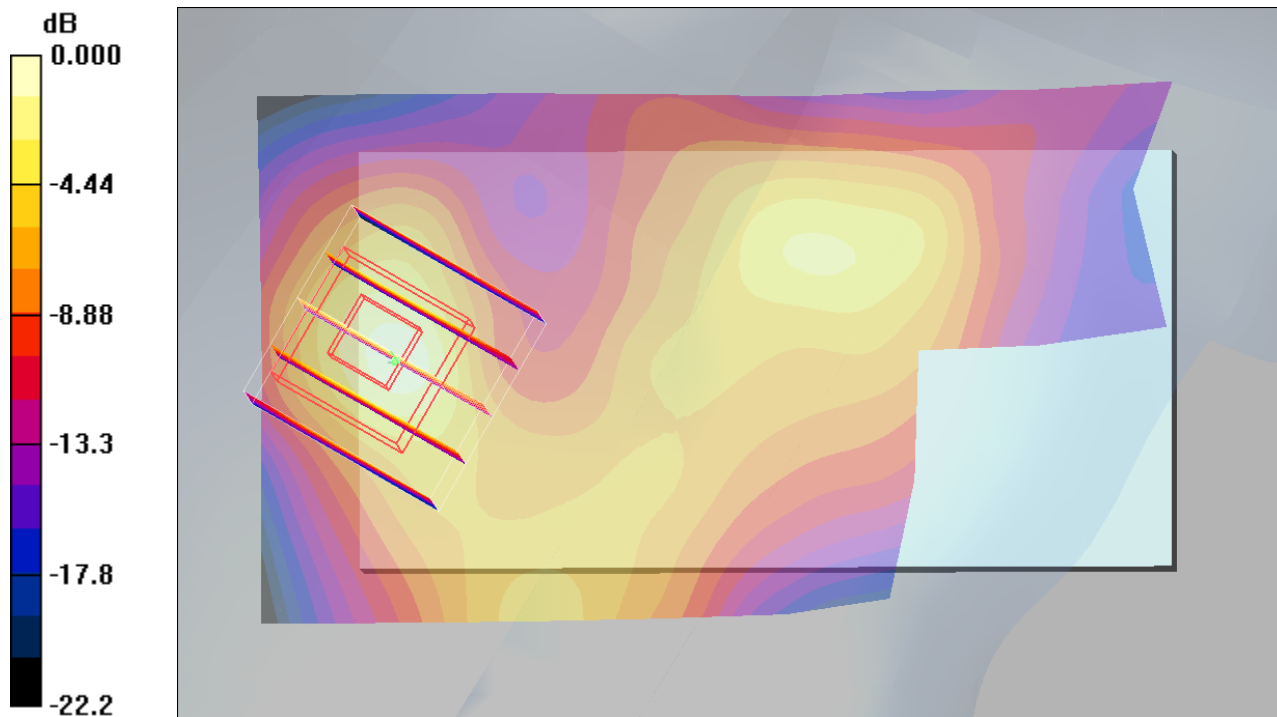

0 dB = 0.644mW/g

#15 CDMA2000 BC1_RC3_SO55_Right Tilted_Ch25_Slide Off_PDA 2_Battery 2

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: HSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r =$

38.3 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.09, 5.09, 5.09); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.880 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

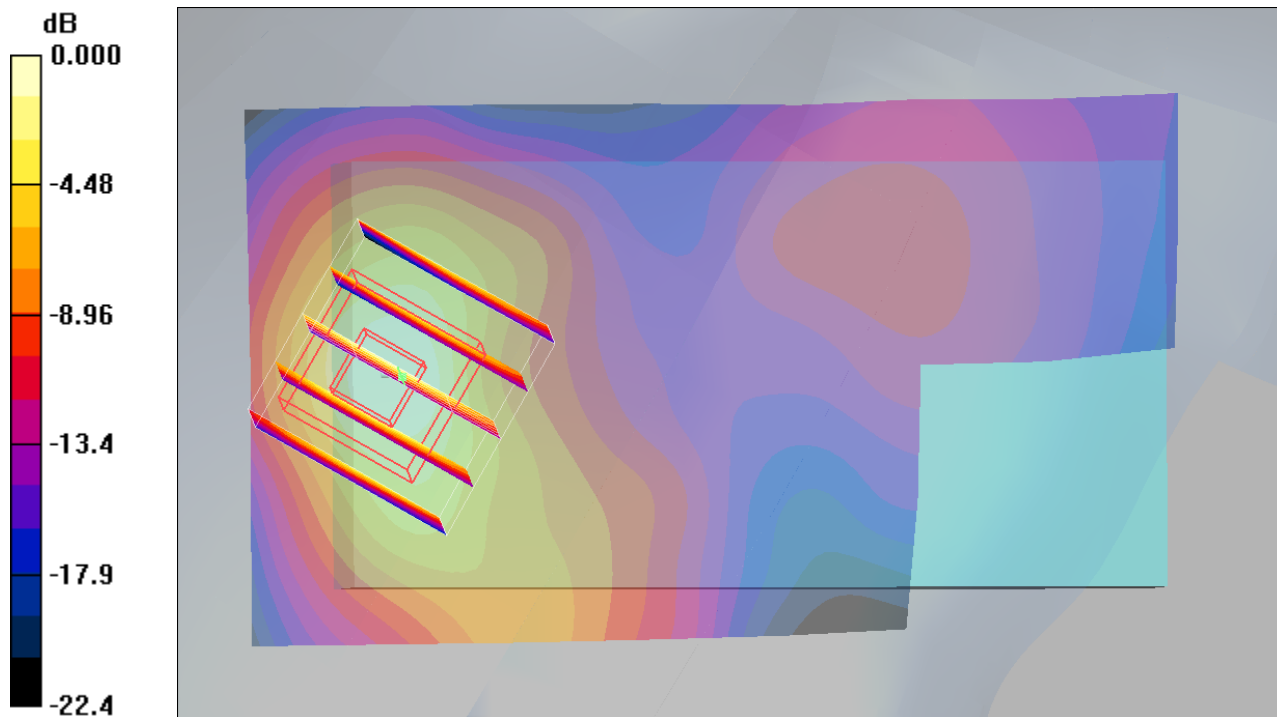

0 dB = 0.805mW/g

#15 CDMA2000 BC1_RC3_SO55_Right Tilted_Ch25_Slide Off_PDA 2_Battery 2_2D

DUT: 072126


Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: HSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.09, 5.09, 5.09); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.880 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.0 V/m; Power Drift = 0.073 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.345 mW/g
Maximum value of SAR (measured) = 0.805 mW/g

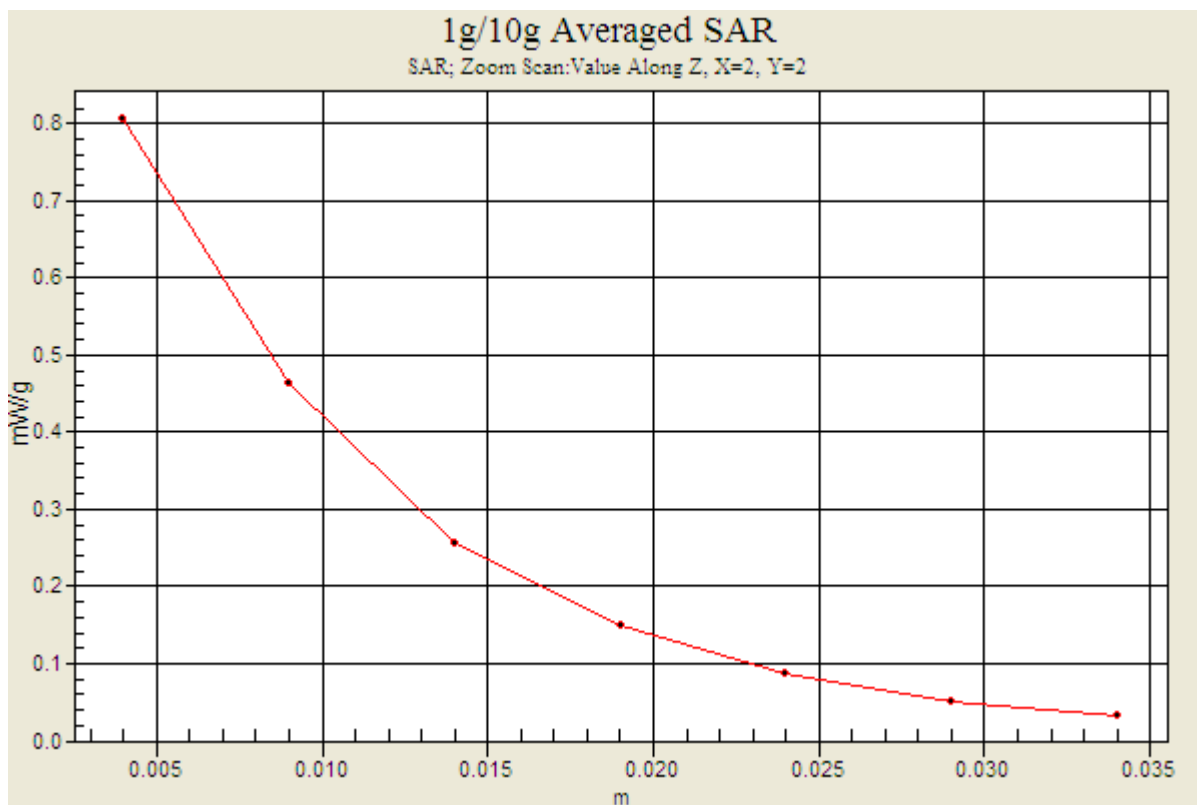

#13 CDMA2000 BC1_RC3_SO55_Left Cheek_Ch25_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r =$

38.3 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.09, 5.09, 5.09); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.702 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.691 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.774 mW/g

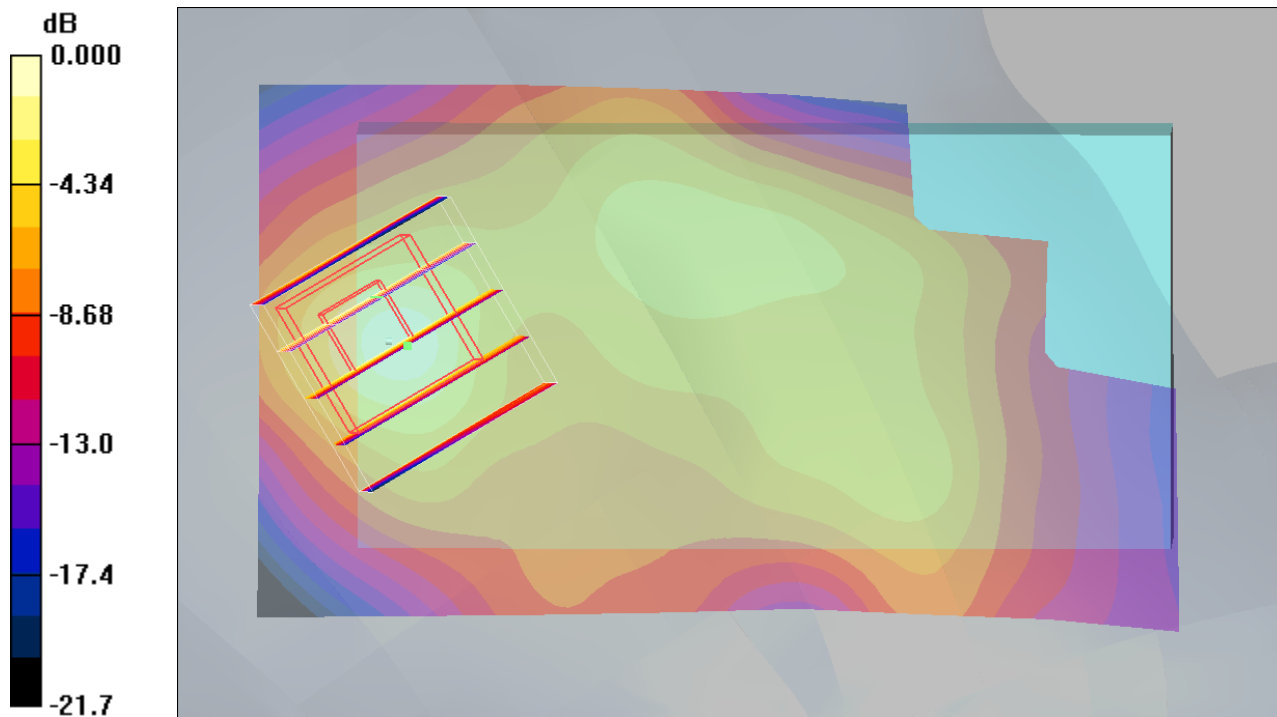

0 dB = 0.774mW/g

#14 CDMA2000 BC1_RC3_SO55_Left Tilted_Ch25_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r =$

38.3 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.09, 5.09, 5.09); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.750 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = 0.096 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.830 mW/g

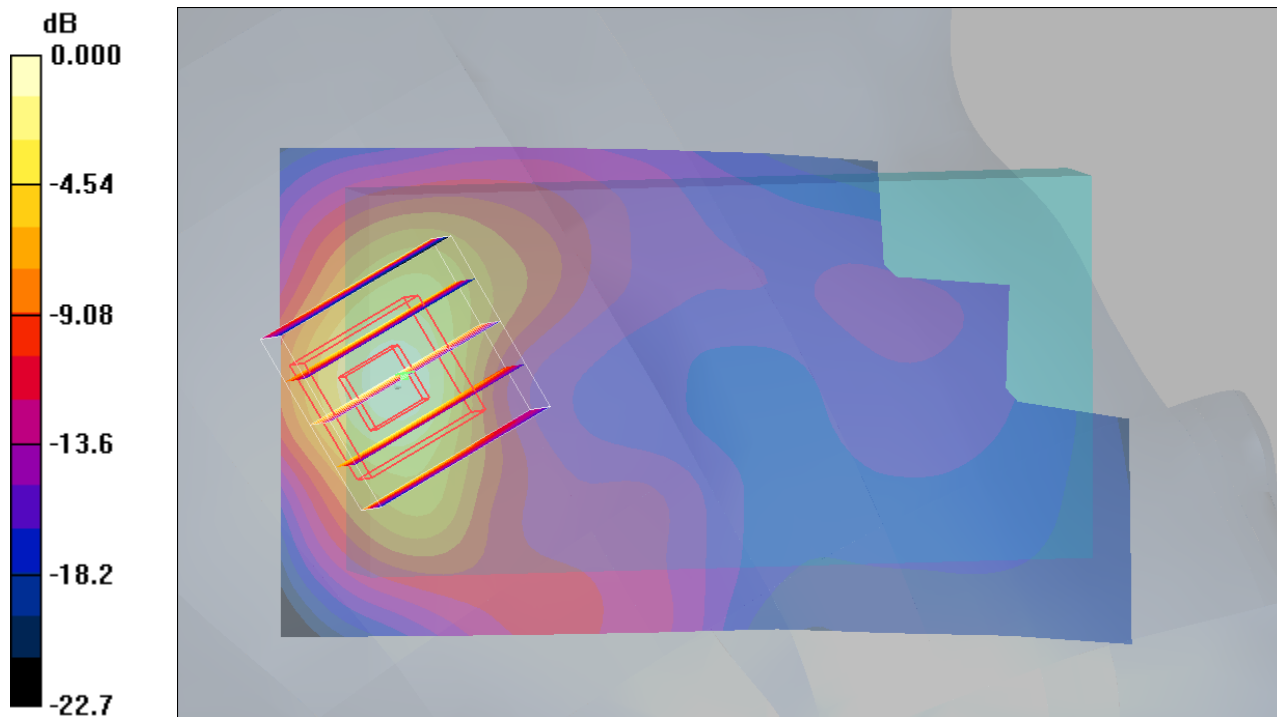

0 dB = 0.830mW/g

#07 CDMA2000 BC0_RC3_SO32_Face_1.5cm_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1013/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.332 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.337 mW/g

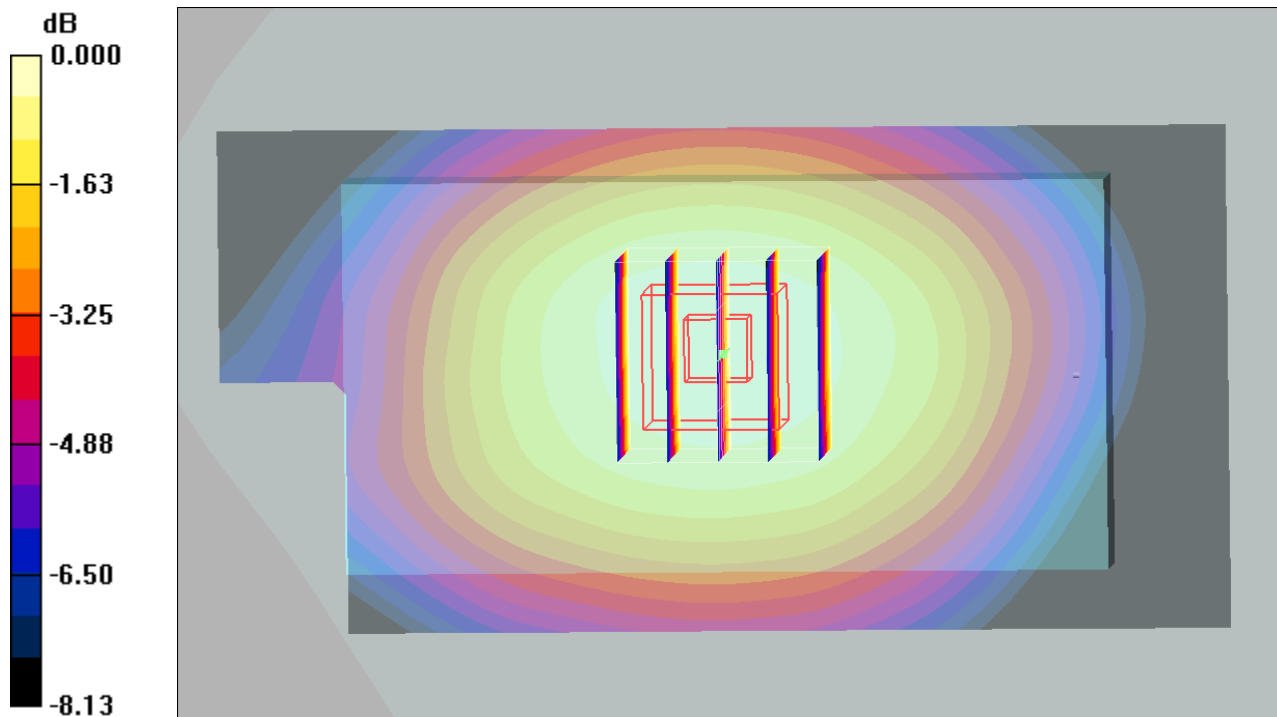

0 dB = 0.337mW/g

#08 CDMA2000 BC0_RC3_SO32_Bottom_1.5cm_Ch1013_Slide Off_PDA 1_Battery 1

DUT: 072126


Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium: MSL_850_100804 Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.957 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1013/Area Scan (41x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (interpolated) = 0.437 mW/g

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.4 V/m; Power Drift = 0.128 dB
Peak SAR (extrapolated) = 0.830 W/kg
SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.334 mW/g
Maximum value of SAR (measured) = 0.464 mW/g

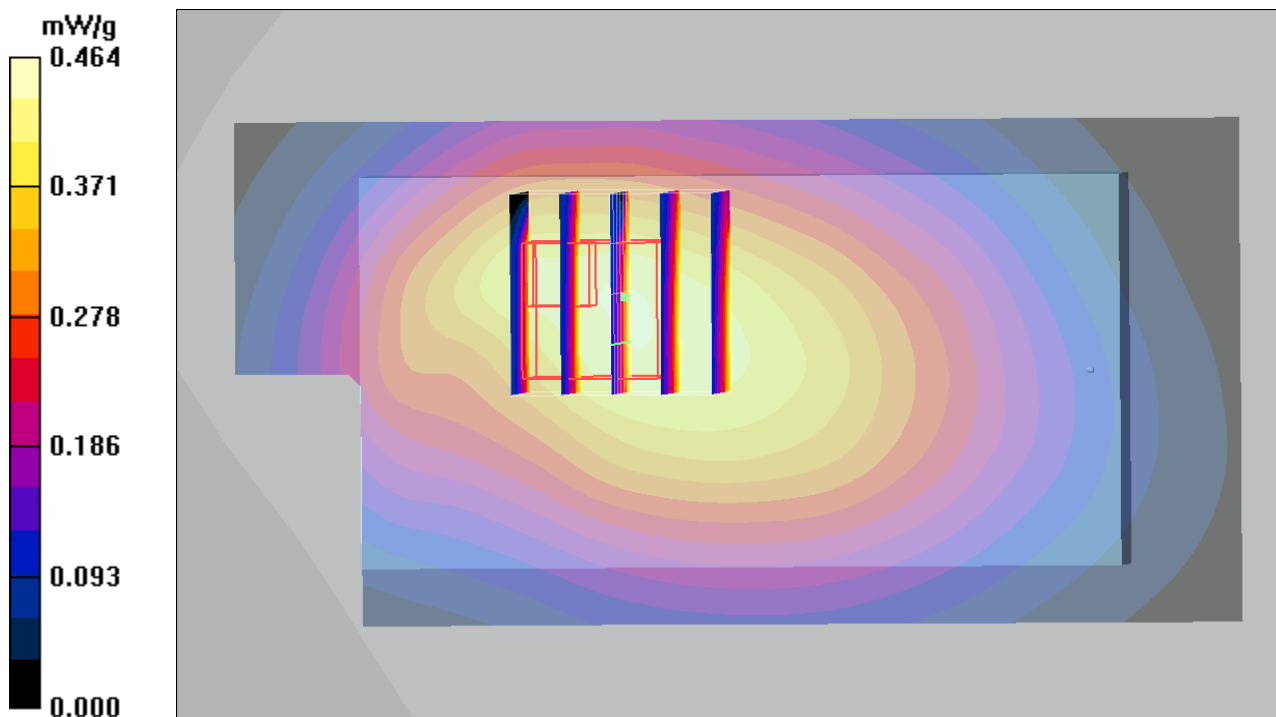

#08 CDMA2000 BC0_RC3_SO32_Bottom_1.5cm_Ch1013_Slide Off_PDA 1_Battery 1_2D

DUT: 072126


Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium: MSL_850_100804 Medium parameters used: $f = 825$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1013/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.437 mW/g

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.4 V/m; Power Drift = 0.128 dB
Peak SAR (extrapolated) = 0.830 W/kg
SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.334 mW/g
Maximum value of SAR (measured) = 0.464 mW/g

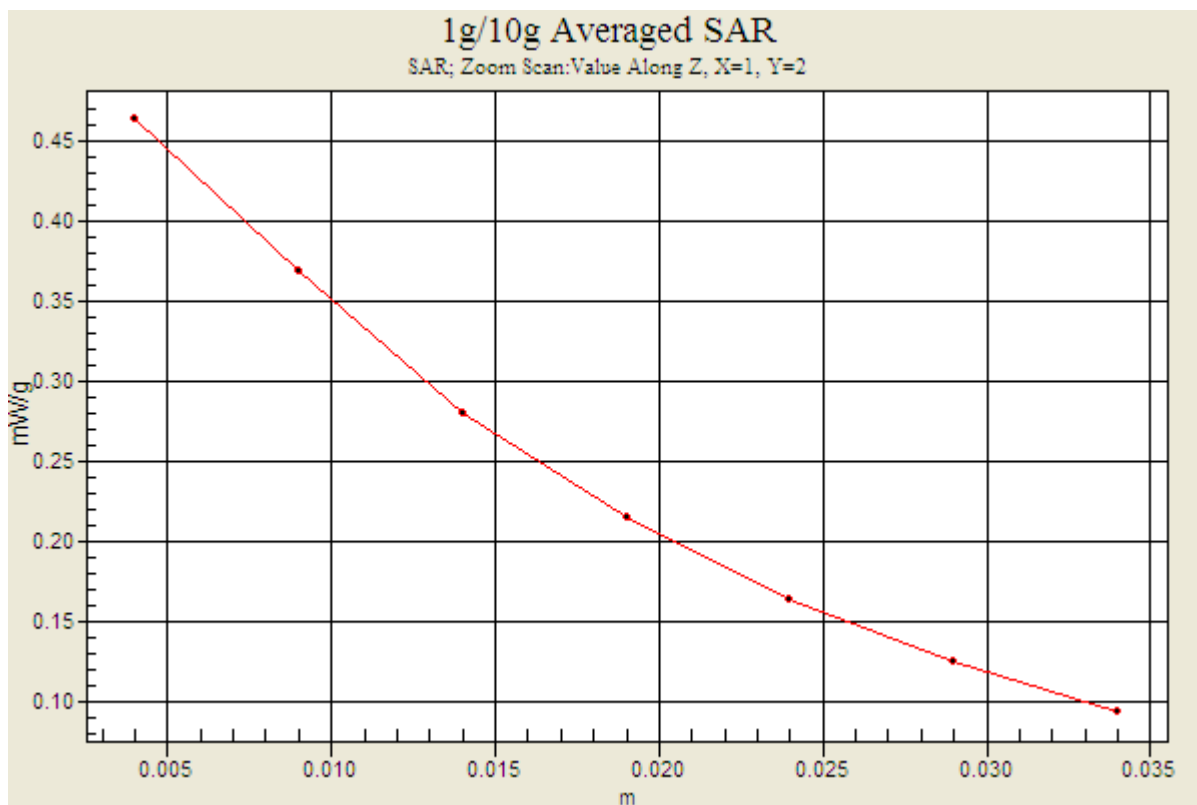

#17 CDMA2000 BC1_RC3_SO32_Face_1.5cm_Ch25_Slide Off_PDA 1_Battery 1

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: MSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.47, 4.47, 4.47); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.242 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.38 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.247 mW/g



Ch25/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.38 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.160 mW/g

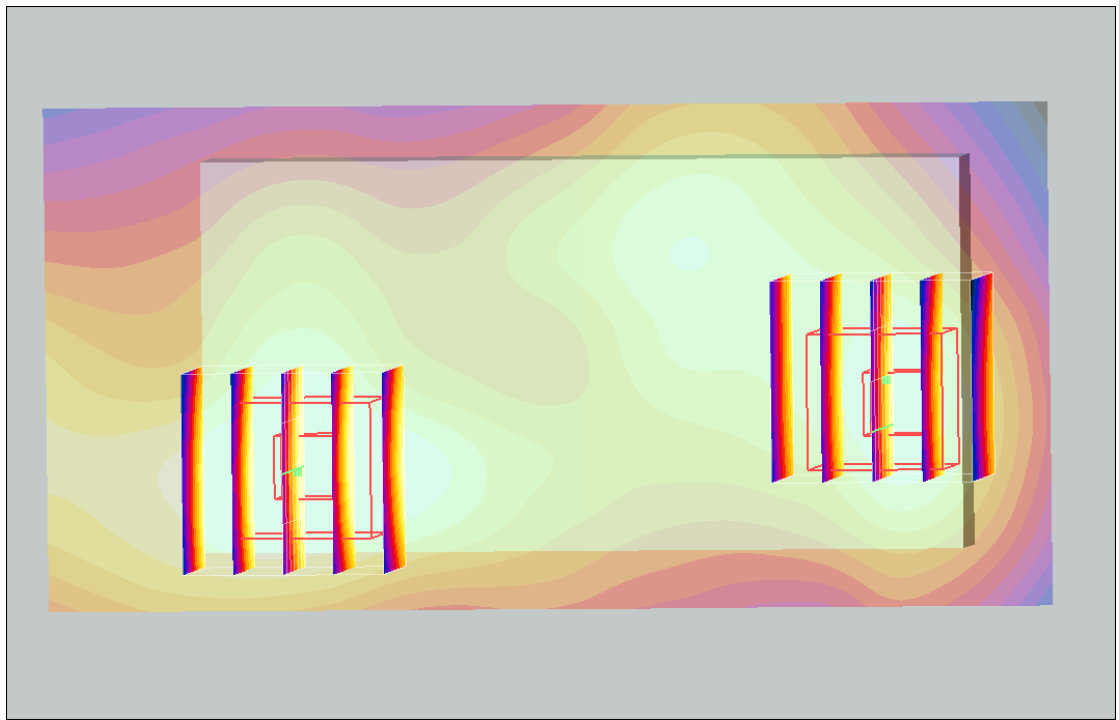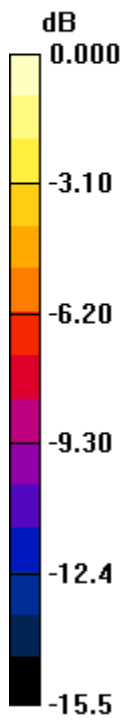

0 dB = 0.160mW/g

#20 CDMA2000 BC1_RC3_SO32_Bottom_1.5cm_Ch25_Slide Right_PDA 1_Battery 1

DUT: 072126


Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium: MSL_1900_100804 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.47, 4.47, 4.47); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.542 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.79 V/m; Power Drift = -0.179 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.294 mW/g
Maximum value of SAR (measured) = 0.528 mW/g

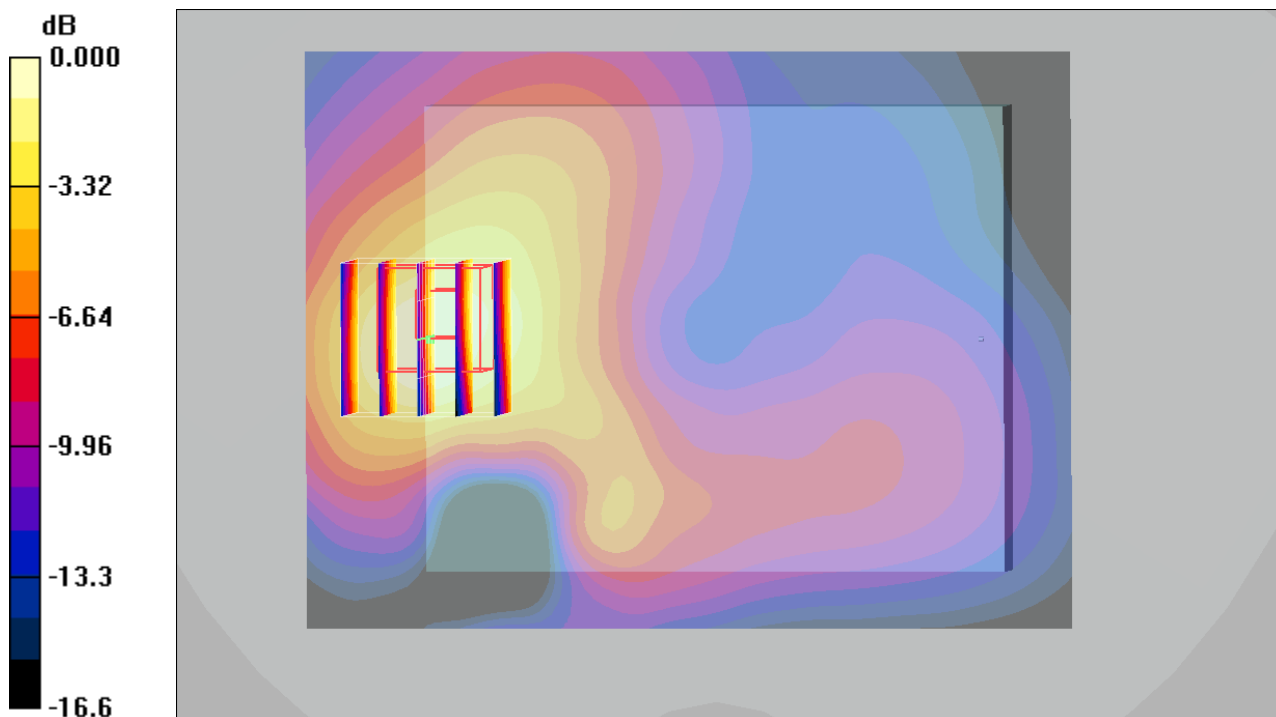

0 dB = 0.528mW/g

#20 CDMA2000 BC1_RC3_SO32_Bottom_1.5cm_Ch25_Slide Right_PDA 1_Battery 1_2D

DUT: 072126

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: MSL_1900_100804 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.47, 4.47, 4.47); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch25/Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.542 mW/g

Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.79 V/m; Power Drift = -0.179 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.294 mW/g
Maximum value of SAR (measured) = 0.528 mW/g

