



SAR TEST REPORT

(Mobile Phone)

REPORT NO.: SA110418C16-1

MODEL NO.: PG86310

FCC ID: NM8PG86310

RECEIVED: Apr. 18, 2011

TESTED: May 15 ~ May 18, 2011

ISSUED: Jun. 09, 2011

APPLICANT: HTC Corporation

ADDRESS: No. 23, Xinghua Rd., Taoyuan City, Taoyuan, 330
Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 42 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT.....	5
2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	8
2.3 GENERAL INFORMATION OF THE SAR SYSTEM	9
2.4 TEST EQUIPMENT	12
2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	13
2.6 DESCRIPTION OF SUPPORT UNITS.....	16
3. DESCRIPTION OF ANTENNA LOCATION.....	17
4. DESCRIPTION OF TEST POSITION.....	18
4.1 DESCRIPTION OF TEST POSITION.....	18
4.1.1 TOUCH/CHEEK TEST POSITION.....	19
4.1.2 TILT TEST POSITION.....	20
4.1.3 BODY-WORN CONFIGURATION.....	20
5. RECIPES FOR TISSUE SIMULATING LIQUIDS	21
6. SYSTEM VALIDATION.....	25
6.1 TEST PROCEDURE	25
6.2 VALIDATION RESULTS	27
6.3 SYSTEM VALIDATION UNCERTAINTIES	28
7. TEST RESULTS	29
7.1 TEST PROCEDURES.....	29
7.2 DESCRIPTION OF TEST CONDITION.....	30
7.3 MEASURED SAR RESULTS	31
7.4 POWER DRIFT TABLE	34
7.5 NO SIMULTANEOUS SAR JUSTIFICATION	40
7.6 SAR LIMITS	41
8. INFORMATION ON THE TESTING LABORATORIES.....	42
APPENDIX A: TEST DATA	
APPENDIX B: ADT SAR MEASUREMENT SYSTEM	
APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION	
APPENDIX E: TEST CONFIGURATIONS	



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Jun. 09, 2011



A D T

1. CERTIFICATION

PRODUCT: Smart Phone
MODEL NO.: PG86310
BRAND: hTC
APPLICANT: HTC Corporation
TESTED: May 15 ~ May 18, 2011
TEST SAMPLE: Production Unit
STANDARDS: **FCC Part 2 (Section 2.1093)**
FCC OET Bulletin 65, Supplement C (01-01)
RSS-102 Issue 4 (2010-03)

The above equipment (model: PG86310) have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , DATE: Jun. 09, 2011
Andrea Hsia / Specialist

APPROVED BY : Gary Chang , DATE: Jun. 09, 2011
Gary Chang / Assistant Manager



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	Smart Phone	
MODEL NO.	PG86310	
FCC ID	NM8PG86310	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.7Vdc (battery)	
CLASSIFICATION	Portable device, production unit	
MODULATION TYPE	GSM, GPRS, E-GPRS	GMSK, 8PSK
	WCDMA	BPSK
FREQUENCY RANGE	GSM, GPRS, E-GPRS	824.2MHz ~ 848.8MHz 1850.2MHz ~ 1909.8MHz
	WCDMA	826.4MHz ~ 846.6MHz 1852.4MHz ~ 1907.6MHz
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	Refer to note as below	
MAX. AVERAGE SAR (1g)	850MHz	HEAD: 0.729mW/g BODY: 0.891mW/g
	1900MHz	HEAD: 0.710mW/g BODY: 0.823mW/g
ANTENNA TYPE	Fixed internal antenna	
MAX. ANTENNA GAIN	850MHz: -0.6dBi	1900MHz: -1.8dBi
MOBILE STATION CLASS	CLASS B (DTM is not supported)	
DATA CABLE	Refer to Note as below	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Refer to Note as below	

NOTE:

- The EUT is a Smart Phone. The test data are separated into following test reports:

	REFERENCE REPORT
WLAN 802.11b/g/n	SA110418C16
GSM / GPRS/ E-GPRS/ WCDMA 850	SA110418C16-1
GSM / GPRS/ E-GPRS/ WCDMA 1900	
RF Exposure (For Bluetooth)	SA110418C16-2



2. The communicated functions of EUT listed as below:

		850MHz	1900MHz	With 802.11b/g/n + Bluetooth
2G	GSM	√	√	
	GPRS	√	√	
	E-GPRS	√	√	
3G	WCDMA	√	√	
	HSDPA	√	√	
	HSUPA	√	√	

3. IMEI Code: 35719704*****

4. The EUT has following accessories.

NO.	PRODUCT	BRAND	MODEL	DESCRIPTION
1	Power Adapter	hTC	TC X250 (X= U, B, E, C, A) (For test : TC U250)	I/P: 100-240Vac, 50-60Hz, 200mA O/P: 5Vdc, 1A 1.25m non-shielded cable without core Manufacturer: Emerson
2				I/P: 100-240Vac, 50-60Hz, 200mA O/P: 5Vdc, 1A 1.25m non-shielded cable without core Manufacturer: Delta
3				I/P: 100-240Vac, 50-60Hz, 200mA O/P: 5Vdc, 1A 1.25m non-shielded cable without core Manufacturer: Phihong
4	Battery	hTC	BG86100	Rating: 3.8Vdc, 1730mAh, 6.57Whr Manufacturer: HT ENERGY
5				Rating: 3.7Vdc, 1730mAh, 6.40Whr Manufacturer: HT ENERGY
6	USB cable	Chant Sincere Co., LTD (COXOC)	DC M410	1.30m shielded cable without core
7		Foxlink		1.25m shielded cable without core
8		MEC		1.27m shielded cable without core
9		Chant Sincere Co., LTD (COXOC)		1.27m shielded cable without core
10	Earphone	Cotron	RC E160	1.23m non-shielded cable without core



5. The EUT Average conducted power(dBm) listed as below:

CH	FREQ.	GSM 850	GPRS 850		E-GPRS 850	
			TS1	TS2	TS1	TS2
128	824.2MHz	33.18	33.06	32.54	26.62	25.57
190	836.6MHz	33.23	33.14	32.63	26.78	25.61
251	848.8MHz	33.13	33.09	32.56	26.66	25.59
CH	FREQ.	PCS 1900	GPRS 1900		E-GPRS 1800	
			TS1	TS2	TS1	TS2
512	1850.2MHz	29.61	29.59	28.46	24.61	23.46
661	1880.0MHz	29.55	29.53	28.42	24.45	23.29
810	1909.8MHz	29.54	29.50	28.38	24.43	23.25

CH	FREQ.	WCDMA850		HSDPA			
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4
4132	826.4MHz	24.62	24.52	24.15	23.65	23.62	23.68
4183	836.6MHz	24.71	24.63	24.23	23.75	23.76	23.77
4233	846.6MHz	24.61	24.54	24.10	23.73	23.74	23.78
CH	FREQ.	HSUPA					
		Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5	
4132	826.4MHz	24.02	22.8	23.17	22.92	23.82	
4183	836.6MHz	24.11	22.8	23.19	22.89	24.01	
4233	846.6MHz	24.06	22.91	23.2	22.91	23.93	

CH	FREQ.	WCDMA1900		HSDPA			
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4
9262	1852.4MHz	24.21	24.07	22.12	22.15	22.16	22.13
9400	1880.0MHz	24.28	24.10	22.32	22.26	22.35	22.37
9538	1907.6MHz	23.81	23.71	21.95	22.10	22.04	22.02
CH	FREQ.	HSUPA					
		Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5	
9262	1852.4MHz	22.05	20.9	21.19	20.92	21.95	
9400	1880.0MHz	22.15	21.03	21.23	20.98	22.25	
9538	1907.6MHz	21.85	20.63	20.89	20.62	21.7	

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC 47 CFR Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01- 01)

RSS-102 Issue 4 (2010-03)

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.



2.3 GENERAL INFORMATION OF THE SAR SYSTEM

DASY4 (software 4.7 Build 80) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4 software defined. The DASY4 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV4 ISOTROPIC E-FIELD PROBE

CONSTRUCTION	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
FREQUENCY	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
DIRECTIVITY	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
DYNAMIC RANGE	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
DIMENSIONS	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
APPLICATION	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



A D T

TWIN SAM V4.0

CONSTRUCTION The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

SHELL THICKNESS 2 ± 0.2 mm

FILLING VOLUME Approx. 25 liters

DIMENSIONS Height: 810 mm; Length: 1000 mm; Width: 500 mm

SYSTEM VALIDATION KITS:

CONSTRUCTION Symmetrical dipole with 1/4 balun
Enables measurement of feedpoint impedance with NWA
Matched for use near flat phantoms filled with brain simulating solutions
Includes distance holder and tripod adaptor

CALIBRATION Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions

FREQUENCY 835, 1900

RETURN LOSS > 20 dB at specified validation position

POWER CAPABILITY > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

OPTIONS Dipoles for other frequencies or solutions and other calibration conditions upon request

DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION The device holder for the GSM900/DCS1800/PCS1900 GSM/GPRS/CDMA Mobile Phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\tan \delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



A D T

2.4 TEST EQUIPMENT

FOR SAR MEASUREMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1202	NA	NA
2	Signal Generator	Agilent	E8257C	MY43320668	Dec. 27, 2010	Dec. 26, 2011
3	E-Field Probe	S & P	EX3DV4	3590	Feb. 25, 2011	Feb. 24, 2012
4	DAE	S & P	DAE 3	579	Sep. 20, 2010	Sep. 19, 2011
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D835V2	4d021	Mar. 23, 2011	Mar. 22, 2012
			D1900V2	5d022	Jan. 26, 2011	Jan. 25, 2012

NOTE: Before starting the measurement, all test equipment shall be warmed up for 30min.

FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E8358A	US41480538	Dec. 30, 2010	Dec. 29, 2011
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance ($k=1$) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually $\pm 2.5\%$ and $\pm 5\%$ for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than $\pm 2.5\%$ ($k=1$). It can be substantially smaller if more accurate methods are applied.

2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	
	- Density	

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V _i	=compensated signal of channel i	(i = x, y, z)
U _i	=input signal of channel i	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp _i	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

- V_i = compensated signal of channel i ($i = x, y, z$)
- Norm_i = sensor sensitivity of channel i $\mu\text{V}/(\text{V/m})^2$ for ($i = x, y, z$)
E-field Probes
- ConvF = sensitivity enhancement in solution
- a_{ij} = sensor sensitivity factors for H-field probes
- f = carrier frequency [GHz]
- E_i = electric field strength of channel i in V/m
- H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

- SAR = local specific absorption rate in mW/g
- E_{tot} = total field strength in V/m
- = conductivity in [mho/m] or [Siemens/m]
- = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.



The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

2.6 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	101372

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3. DESCRIPTION OF ANTENNA LOCATION

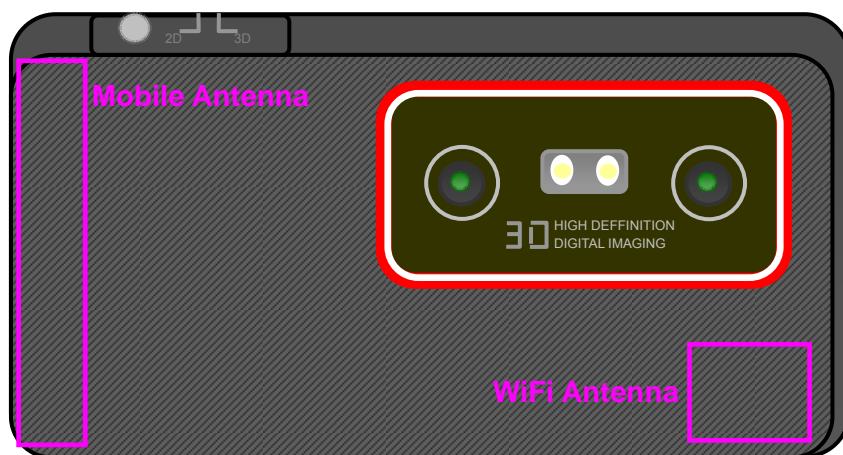

Note: The EUT size is 12.6cm *6.5cm*1.205cm > 9 cm * 5cm, therefore 10 mm is used to be test distance for body SAR evaluation. Top edge side is not tested since the distance between Mobile antenna and top edge is > 2.5 cm.

4. DESCRIPTION OF TEST POSITION

4.1 DESCRIPTION OF TEST POSITION

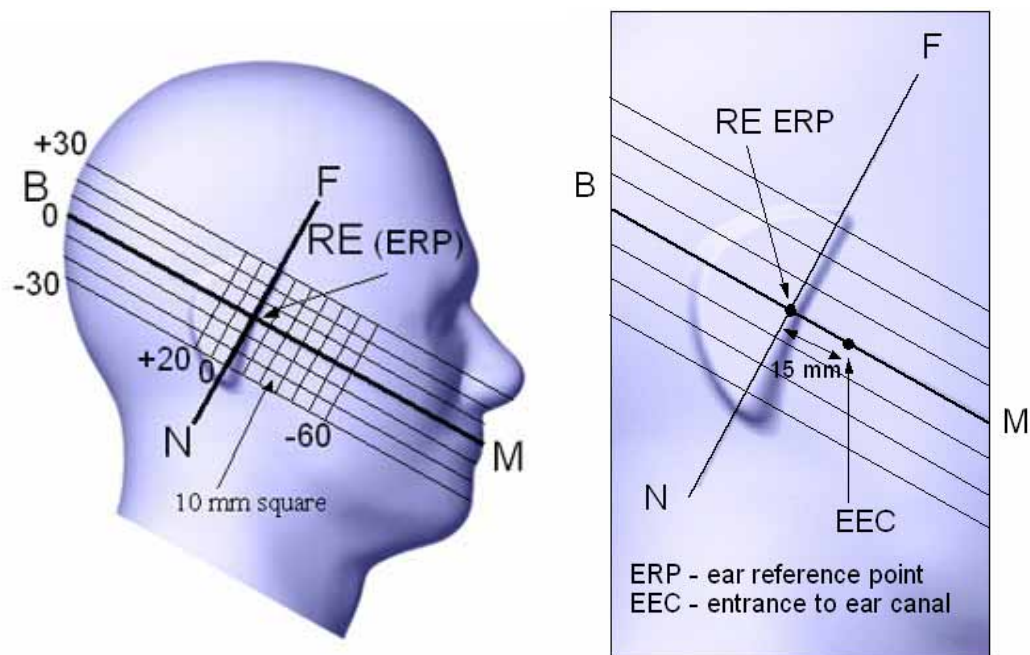


FIGURE 3.1

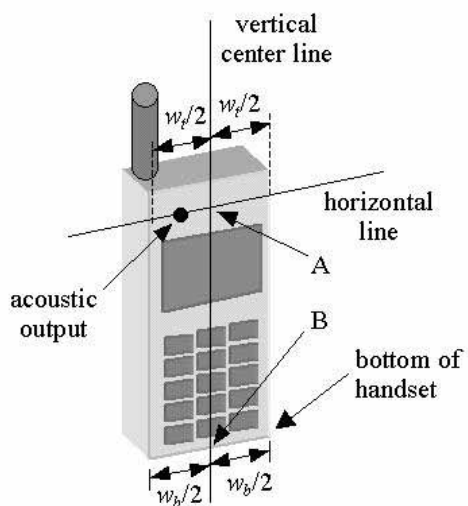


FIGURE 3.1a


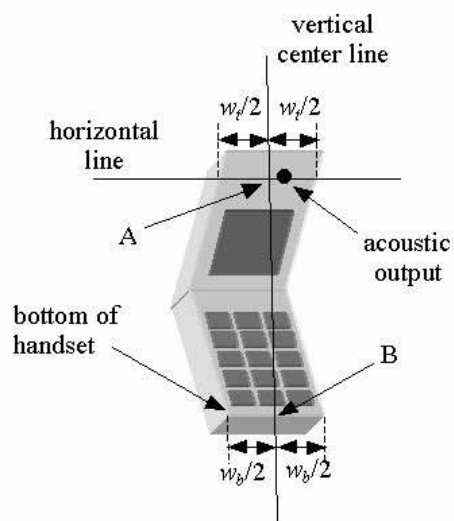


FIGURE 3.1b

4.1.1 TOUCH/CHEEK TEST POSITION


The head position in Figure 3.1, the ear reference points ERP are 15mm above entrance to ear canal along the B-M line. The line N-F (Neck-Front) is perpendicular to the B-M (Back Mouth) line. The handset device in Figure 3.1a and 3.1b, The vertical centerline pass through two points on the front side of handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A) and the midpoint of the width w_b of the bottom of the handset (point B). The vertical centerline is perpendicular to the horizontal line and pass through the center of the acoustic output. The point A touches the ERP and the vertical centerline of the handset is parallel to the B-M line. While maintaining the point A contact with the ear(ERP), rotate the handset about the line NF until any point on handset is in contact with the cheek of the phantom

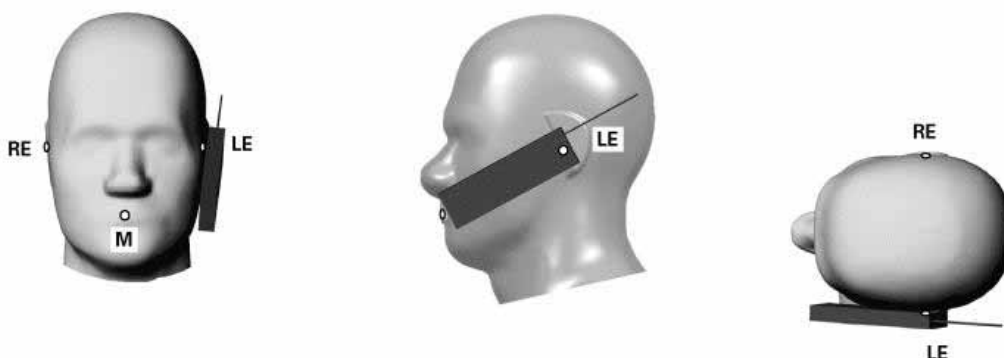

TOUCH/CHEEK POSITION FIGURE

4.1.2 TILT TEST POSITION

Adjust the device in the cheek position. While maintaining a point of the handset contact in the ear, move the bottom of the handset away from the mouth by an angle of 15 degrees.

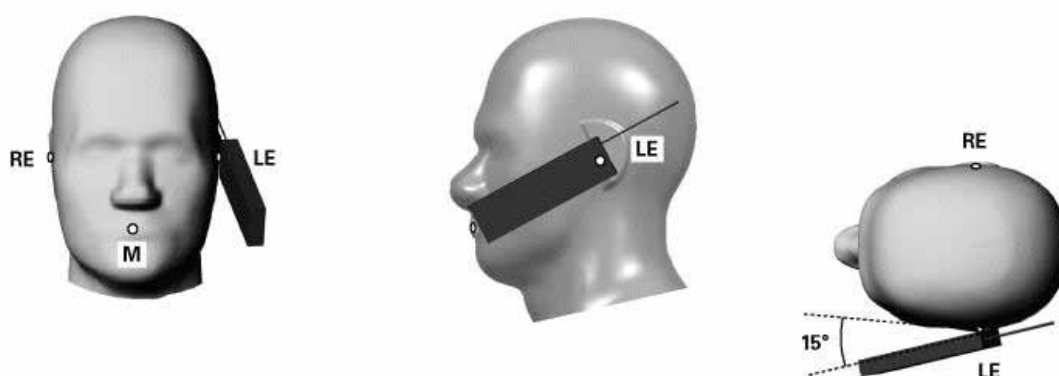

TILT POSITION FIGURE

4.1.3 BODY-WORN CONFIGURATION

The handset device attached the belt clip or the holster. The keypad face of the handset is against with the bottom of the flat phantom face and the bottom of the keypad face contact to the bottom of the flat phantom.

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only accessory that dictates the closest spacing to the body must be tested.

5. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 liters of tissue simulation liquid.

The following ingredients are used :

- **WATER-** Deionized water (pure H₂O), resistivity ≈ 16 M - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20_C),
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventtol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Dielectric Parameters at 22	f = 835MHz $\epsilon = 41.5 \pm 5\%$ $\sigma = 0.9 \pm 5\%$ S/m	f = 835MHz $\epsilon = 55.2 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ S/m

THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22	f= 1900MHz $\epsilon = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\% \text{ S/m}$	f= 1900MHz $\epsilon = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\% \text{ S/m}$

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30 min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with >8mm thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' ; ± 0.1 for ϵ'').
7. Conductivity can be calculated from ϵ'' by $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$.
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button.

Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).



A D T

FOR SIMULATING LIQUID

LIQUID TYPE		HSL-835		
SIMULATING LIQUID TEMP.		21.2		
TEST DATE		May 15, 2011		
TESTED BY		Morrison Huang		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
824.2	Permittivity ()	41.56	42.75	2.86
835.0		41.50	42.64	2.75
836.6		41.50	42.57	2.58
848.8		41.50	42.45	2.29
824.2	Conductivity () S/m	0.90	0.91	1.11
835.0		0.90	0.92	2.22
836.6		0.90	0.93	3.33
848.8		0.91	0.94	3.30

LIQUID TYPE		MSL-835		
SIMULATING LIQUID TEMP.		21.5		
TEST DATE		May 16, 2011		
TESTED BY		Morrison Huang		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
824.2	Permittivity ()	55.24	56.71	2.66
835.0		55.20	56.48	2.32
836.6		55.20	56.41	2.19
848.8		55.16	56.29	2.05
824.2	Conductivity () S/m	0.97	0.99	2.06
835.0		0.97	1.00	3.09
836.6		0.97	1.00	3.09
848.8		0.99	1.01	2.02



A D T

LIQUID TYPE		HSL-1900		
SIMULATING LIQUID TEMP.		21.3		
TEST DATE		May 17, 2011		
TESTED BY		Morrison Huang		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
1850.2	Permittivity ()	40.00	40.42	1.05
1880.0		40.00	40.35	0.88
1900.0		40.00	40.30	0.75
1909.8		40.00	40.26	0.65
1850.2	Conductivity () S/m	1.40	1.38	-1.43
1880.0		1.40	1.41	0.71
1900.0		1.40	1.42	1.43
1909.8		1.40	1.44	2.86

LIQUID TYPE		MSL-1900		
SIMULATING LIQUID TEMP.		21.2		
TEST DATE		May 18, 2011		
TESTED BY		Morrison Huang		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
1850.2	Permittivity ()	53.30	54.43	2.12
1880.0		53.30	54.29	1.86
1900.0		53.30	54.23	1.74
1909.8		53.30	54.08	1.46
1850.2	Conductivity () S/m	1.52	1.49	-1.97
1880.0		1.52	1.52	0.00
1900.0		1.52	1.53	0.66
1909.8		1.52	1.55	1.97

6. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

6.1 TEST PROCEDURE

Before you start the system performance check, need only to tell the system with which components (probe, medium, and device) are performing the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat phantom section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for the EUT can be left in place but should be rotated away from the dipole.

1.The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.

2.The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid.

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY4 system is less than $\pm 0.1\text{mm}$.

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance $SAR_{tolerance}[\%]$ is <2%.

6.2 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
HSL 835	2.40 (1g)	2.30	-4.17	15mm	May 15, 2011
MSL 835	2.56 (1g)	2.37	-7.42	15mm	May 16, 2011
HSL 1900	10.40 (1g)	9.78	-5.96	10mm	May 17, 2011
MSL 1900	10.40 (1g)	9.95	-4.33	10mm	May 18, 2011
TESTED BY	Morrison Huang				

NOTE: Please see Appendix for the photo of system validation test.

6.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement System								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	
Axial Isotropy	0.25	Rectangular	3	0.7	0.7	0.10	0.10	
Hemispherical Isotropy	1.30	Rectangular	3	0.7	0.7	0.53	0.53	
Boundary effects	1.00	Rectangular	3	1	1	0.58	0.58	
Linearity	0.30	Rectangular	3	1	1	0.17	0.17	
System Detection Limits	1.00	Rectangular	3	1	1	0.58	0.58	
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	
Response Time	0.80	Rectangular	3	1	1	0.46	0.46	
Integration Time	2.60	Rectangular	3	1	1	1.50	1.50	
RF Ambient Noise	3.00	Rectangular	3	1	1	1.73	1.73	9
RF Ambient Reflections	3.00	Rectangular	3	1	1	1.73	1.73	9
Probe Positioner	0.40	Rectangular	3	1	1	0.23	0.23	
Probe Positioning	2.90	Rectangular	3	1	1	1.67	1.67	
Max. SAR Eval.	1.00	Rectangular	3	1	1	0.58	0.58	
Test sample related								
Sample positioning	1.90	Normal	1	1	1	1.90	1.90	4
Device holder uncertainty	2.80	Normal	1	1	1	2.80	2.80	4
Output power variation-SAR drift measurement	4.50	Rectangular	3	1	1	2.60	2.60	1
Dipole Related								
Dipole Axis to Liquid Distance	1.60	Rectangular	3	1	1	0.92	0.92	4
Input Power Drift	1.62	Rectangular	3	1	1	0.94	0.94	1
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	3	1	1	2.31	2.31	
Liquid Conductivity (target)	5.00	Rectangular	3	0.64	0.43	1.85	1.24	
Liquid Conductivity (measurement)	3.33	Normal	1	0.64	0.43	2.13	1.43	9
Liquid Permittivity (target)	5.00	Rectangular	3	0.6	0.49	1.73	1.41	
Liquid Permittivity (measurement)	2.86	Normal	1	0.6	0.49	1.72	1.40	9
Combined Standard Uncertainty						9.06	8.71	
Coverage Factor for 95%						Kp=2		
Expanded Uncertainty (K=2)						18.13	17.41	

7. TEST RESULTS

7.1 TEST PROCEDURES

The EUT (Smart Phone) makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY4 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 50361, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 2.0 mm and maintained at a constant distance of ± 1.0 mm during a zoom scan to determine peak SAR locations. The distance is 2mm between the first measurement point and the bottom surface of the phantom.

The measurement time is 0.5 s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 2mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.

7.2 DESCRIPTION OF TEST CONDITION

TEST DATE	TEMPERATURE(°C)		HUMIDITY(%RH)	TESTED BY
	AIRBENT	LIQUID		
May 15, 2011	22.3	21.2	57	Morrison Huang
May 16, 2011	22.8	21.5	59	Morrison Huang
May 17, 2011	22.5	21.3	58	Morrison Huang
May 18, 2011	22.3	21.2	60	Morrison Huang



A D T

7.3 MEASURED SAR RESULTS

Battery	HT ENERGY, Rating: 3.8Vdc			
POSITION	RIGHT		LEFT	
	CHEEK	TILT	CHEEK	TILT
GSM 850				
CH190: 836.6MHz	0.531	0.372	0.729	0.405
WCDMA 850				
CH4183: 836.6MHz	0.298	0.212	0.382	0.216
PCS1900				
CH661: 1880.0MHz	0.316	0.214	0.283	0.296
WCDMA 1900				
CH9400:1880.0MHz	0.526	0.338	0.388	0.041

Battery	HT ENERGY, Rating: 3.7Vdc			
POSITION	RIGHT		LEFT	
	CHEEK	TILT	CHEEK	TILT
GSM 850				
CH190: 836.6MHz	0.558	0.408	0.547	0.312
WCDMA 850				
CH4183: 836.6MHz	0.315	0.224	0.411	0.223
PCS1900				
CH661: 1880.0MHz	0.470	0.315	0.415	0.303
WCDMA 1900				
CH9400:1880.0MHz	0.710	0.435	0.702	0.439

NOTE:

1. In this testing, the limit for General Population Spatial Peak averaged over **1g, 1.6W/kg**, is applied.
2. Please see the Appendix A for the data.
3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
4. Temperature of Liquid is 22±1°C
5. Body SAR is not required for handsets with HSDPA capabilities since the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75% of the SAR limit.



A D T

Battery	Manufacture: HT ENERGY, Rating: 3.8Vdc					Manufacture: HT ENERGY, Rating: 3.7Vdc				
Earphone	Manufacturer: Cotron					Manufacturer: Cotron				
EUT to phantom	Body 10mm									
Position	Bottom	Front	Right Edge	Left Edge	Back Edge	Bottom	Front	Right Edge	Left Edge	Back Edge
GSM 850										
CH128: 824.2MHz	0.865	-	-	-	-	0.846	-	-	-	-
CH190: 836.6MHz	0.890	0.558	0.3	0.35	0.239	0.891	0.411	0.3	0.35	0.277
CH251: 848.8MHz	0.778	-	-	-	-	0.713	-	-	-	-
GPRS 850 TS1										
CH128: 824.2MHz	-	-	-	-	-	0.763	-	-	-	-
CH190: 836.6MHz	0.199	0.428	-	-	-	0.806	0.389	-	-	-
CH251: 848.8MHz	-	-	-	-	-	0.615	-	-	-	-
GPRS 850 TS2										
CH190: 836.6MHz	0.312	0.471	0.333	0.334	0.26	0.799	0.444	0.242	0.392	0.273
E-GPRS 850 TS1										
CH190: 836.6MHz	0.216	0.167	-	-	-	0.188	0.122	-	-	-
E-GPRS 850 TS2										
CH190: 836.6MHz	0.331	0.329	-	-	-	0.368	0.236	-	-	-
WCDMA 850										
CH 4183: 836.6MHz	0.550	0.275	0.242	0.343	0.114	0.628	0.265	0.215	0.329	0.15

NOTE:

1. In this testing, the limit for General Population Spatial Peak averaged over **1g, 1.6W/kg**, is applied.
2. Please see the Appendix A for the data.
3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
4. Temperature of Liquid is 22±1°C
5. Body SAR is not required for handsets with HSDPA capabilities since the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75% of the SAR limit.



A D T

Battery	Manufacture: HT ENERGY, Rating: 3.8Vdc					Manufacture: HT ENERGY, Rating: 3.7Vdc				
Earphone	Manufacturer: Cotron					Manufacturer: Cotron				
EUT to phantom	Body 10mm									
Position	Bottom	Front	Right Edge	Left Edge	Back Edge	Bottom	Front	Right Edge	Left Edge	Back Edge
PCS 1900										
CH661: 1880.0MHz	0.389	0.399	0.153	0.078	0.257	0.481	0.328	0.13	0.071	0.247
GPRS 1900 TS1										
CH661: 1880.0MHz	0.363	0.364	-	-	-	0.460	0.301	-	-	-
GPRS 1900 TS2										
CH512: 1850.2MHz	-	-	-	-	-	0.583	-	-	-	-
CH661: 1880.0MHz	0.628	0.611	0.237	0.122	0.410	0.823	0.569	0.220	0.120	0.415
CH810: 1909.8MHz	-	-	-	-	-	0.665	-	-	-	-
E-GPRS 1900 TS1										
CH661: 1880.0MHz	0.133	0.129	-	-	-	0.169	0.121	-	-	-
E-GPRS 1900 TS1										
CH661: 1880.0MHz	0.239	0.235	-	-	-	0.309	0.232	-	-	-
WCDMA 1900										
CH 9400: 1880.0MHz	0.637	0.512	0.327	0.120	0.389	0.604	0.538	0.286	0.154	0.407

NOTE:

6. In this testing, the limit for General Population Spatial Peak averaged over **1g, 1.6W/kg**, is applied.
7. Please see the Appendix A for the data.
8. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
9. Temperature of Liquid is 22±1°C
10. Body SAR is not required for handsets with HSDPA capabilities since the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75% of the SAR limit.



A D T

7.4 POWER DRIFT TABLE

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)		
						Begin	After			
1	HT ENERGY Battery (3.8Vdc)	Right Head Cheek	GSM850	190	836.6	33.23	33.22	-0.23		
2		Right Head Tilt				33.23	33.21	-0.46		
3		Left Head Cheek				33.23	33.20	-0.69		
4		Left Head Tilt				33.23	33.19	-0.92		
5	HT ENERGY Battery (3.7Vdc)	Right Head Cheek				33.23	33.18	-1.14		
6		Right Head Tilt				33.23	33.17	-1.37		
7		Left Head Cheek				33.23	33.16	-1.60		
8		Left Head Tilt				33.23	33.15	-1.83		
9	HT ENERGY Battery (3.8Vdc)	Right Head Cheek	WCDMA850	4183	836.6	24.71	24.62	-2.05		
10		Right Head Tilt				24.71	24.61	-2.28		
11		Left Head Cheek				24.71	24.60	-2.50		
12		Left Head Tilt				24.71	24.59	-2.73		
13	HT ENERGY Battery (3.7Vdc)	Right Head Cheek				24.71	24.58	-2.95		
14		Right Head Tilt				24.71	24.57	-3.17		
15		Left Head Cheek				24.71	24.56	-3.39		
16		Left Head Tilt				24.71	24.55	-3.62		
17	HT ENERGY Battery (3.8Vdc) with Earphone	Bottom 10mm	GSM850	128	824.2	33.18	33.01	-3.84		
				190	836.6	33.23	33.05	-4.06		
				251	848.8	33.13	32.94	-4.28		
18			GPRS850 TS1	190	836.6	33.14	32.94	-4.50		
19						GPRS850 TS2	32.63	32.62	-0.23	
20						E-GPRS850 TS1	26.78	26.76	-0.46	
21	E-GPRS850 TS2	25.61				25.58	-0.69			
22	HT ENERGY Battery (3.7Vdc) with Earphone	Bottom 10mm	GSM850	128	824.2	33.18	33.14	-0.92		
				190	836.6	33.23	33.18	-1.14		
				251	848.8	33.13	33.07	-1.37		
23			GPRS850 TS1	190	836.6	128	824.2	33.06	32.99	-1.60
24						190	836.6	33.14	33.06	-1.83
25						251	848.8	33.09	33.00	-2.05
26			GPRS850 TS2	190	836.6	32.63	32.53	-2.28		
26						E-GPRS850 TS1	26.78	26.67	-2.50	
26						E-GPRS850 TS2	25.61	25.49	-2.73	



A D T

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)
						Begin	After	
27	HT ENERGY Battery (3.8Vdc) with Earphone	Front 10mm	GSM850	190	836.6	33.23	33.10	-2.95
28			GPRS850 TS1			33.14	33.00	-3.17
29			GPRS850 TS2			32.63	32.48	-3.39
30			E-GPRS850 TS1			26.78	26.62	-3.62
31			E-GPRS850 TS2			25.61	25.44	-3.84
32	HT ENERGY Battery (3.7Vdc) with Earphone	Front 10mm	GSM850	190	836.6	33.23	33.05	-4.06
33			GPRS850 TS1			33.14	32.95	-4.28
34			GPRS850 TS2			32.63	32.43	-4.50
35			E-GPRS850 TS1			26.78	26.77	-0.23
36			E-GPRS850 TS2			25.61	25.59	-0.46
37	HT ENERGY Battery (3.8Vdc) with Earphone	Right Edge 10mm	GSM850	190	836.6	33.23	33.20	-0.69
38			GPRS850 TS2			32.63	32.59	-0.92
39	HT ENERGY Battery (3.7Vdc) with Earphone	Right Edge 10mm	GSM850			33.23	33.18	-1.14
40			GPRS850 TS2			32.63	32.57	-1.37
41	HT ENERGY Battery (3.8Vdc) with Earphone	Left Edge 10mm	GSM50			33.23	33.16	-1.60
42			GPRS850 TS2			32.63	32.55	-1.83
43	HT ENERGY Battery (3.7Vdc) with Earphone	Left Edge 10mm	GSM850			33.23	33.14	-2.05
44			GPRS850 TS2			32.63	32.53	-2.28
45	HT ENERGY Battery (3.8Vdc) with Earphone	Back Edge 10mm	GSM850			33.23	33.12	-2.50
46			GPRS850 TS2			32.63	32.51	-2.73
47	HT ENERGY Battery (3.7Vdc) with Earphone	Back Edge 10mm	GSM850			33.23	33.10	-2.95
48			GPRS850 TS2			32.63	32.49	-3.17



A D T

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)
						Begin	After	
49	HT ENERGY Battery (3.8Vdc) with Earphone	Bottom 10mm	WCDMA850	4183	836.6	24.71	24.56	-3.39
50	HT ENERGY Battery (3.7Vdc) with Earphone					24.71	24.55	-3.62
51	HT ENERGY Battery (3.8Vdc) with Earphone	Front 10mm	WCDMA850			24.71	24.54	-3.84
52	HT ENERGY Battery (3.7Vdc) with Earphone					24.71	24.53	-4.06
53	HT ENERGY Battery (3.8Vdc) with Earphone	Right Edge 10mm	WCDMA850			24.71	24.52	-4.28
54	HT ENERGY Battery (3.7Vdc) with Earphone					24.71	24.51	-4.50
55	HT ENERGY Battery (3.8Vdc) with Earphone	Left Edge 10mm	WCDMA850			24.71	24.70	-0.23
56	HT ENERGY Battery (3.7Vdc) with Earphone					24.71	24.69	-0.46
57	HT ENERGY Battery (3.8Vdc) with Earphone	Back Edge 10mm	WCDMA850			24.71	24.68	-0.69
58	HT ENERGY Battery (3.7Vdc) with Earphone					24.71	24.67	-0.92



A D T

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)
						Begin	After	
50	HT ENERGY Battery (3.8Vdc)	Right Head Cheek	PCS1900	661	1880.0	29.55	29.50	-1.14
60		Right Head Tilt				29.55	29.49	-1.37
61		Left Head Cheek				29.55	29.48	-1.60
62		Left Head Tilt				29.55	29.47	-1.83
63	HT ENERGY Battery (3.7Vdc)	Right Head Cheek				29.55	29.46	-2.05
64		Right Head Tilt				29.55	29.45	-2.28
65		Left Head Cheek				29.55	29.44	-2.50
66		Left Head Tilt				29.55	29.43	-2.73
67	HT ENERGY Battery (3.8Vdc)	Right Head Cheek	WCDMA1900	9400	1880.0	24.28	24.15	-2.95
68		Right Head Tilt				24.28	24.14	-3.17
69		Left Head Cheek				24.28	24.13	-3.39
70		Left Head Tilt				24.28	24.12	-3.62
71	HT ENERGY Battery (3.7Vdc)	Right Head Cheek				24.28	24.11	-3.84
72		Right Head Tilt				24.28	24.10	-4.06
73		Left Head Cheek				24.28	24.09	-4.28
74		Left Head Tilt				24.28	24.08	-4.50
75	HT ENERGY Battery (3.8Vdc) with Earphone	Bottom 10mm	PCS1900	661	1880.0	29.55	29.54	-0.23
76			GPRS1900 TS1			29.53	29.51	-0.46
77			GPRS1900 TS2			28.42	28.39	-0.69
78			E-GPRS1900 TS1			24.45	24.41	-0.92
79			E-GPRS1900 TS2			23.29	23.24	-1.14
80	HT ENERGY Battery (3.7Vdc) with Earphone	Bottom 10mm	PCS1900	661	1880.0	29.55	29.49	-1.37
81			GPRS1900 TS1			29.53	29.46	-1.60
82			GPRS1900 TS2	512	1850.2	28.46	28.38	-1.83
				661	1880.0	28.42	28.33	-2.05
				810	1909.8	28.38	28.28	-2.28
83			E-GPRS1900 TS1	661	1880.0	24.45	24.34	-2.50
84	E-GPRS1900 TS2	23.29	23.17			-2.73		



A D T

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)
						Begin	After	
85	HT ENERGY Battery (3.8Vdc) with Earphone	Front 10mm	PCS1900	661	1880.0	29.55	29.42	-2.95
86			GPRS1900 TS1			29.53	29.39	-3.17
87			GPRS1900 TS2			28.42	28.27	-3.39
88			E-GPRS1900 TS1			24.45	24.29	-3.62
89			E-GPRS1900 TS2			23.29	23.12	-3.84
90	HT ENERGY Battery (3.7Vdc) with Earphone	Front 10mm	PCS1900	661	1880.0	29.55	29.37	-4.06
91			GPRS1900 TS1			29.53	29.34	-4.28
92			GPRS1900 TS2			28.42	28.22	-4.50
93			E-GPRS1900 TS1			24.45	24.44	-0.23
94			E-GPRS1900 TS2			23.29	23.27	-0.46
95	HT ENERGY Battery (3.8Vdc) with Earphone	Right Edge 10mm	PCS1900	661	1880.0	29.55	29.52	-0.69
96			GPRS1900 TS2			28.42	28.38	-0.92
97	HT ENERGY Battery (3.7Vdc) with Earphone	Right Edge 10mm	PCS1900			29.55	29.50	-1.14
98			GPRS1900 TS2			28.42	28.36	-1.37
99	HT ENERGY Battery (3.8Vdc) with Earphone	Left Edge 10mm	PCS1900			29.55	29.48	-1.60
100			GPRS1900 TS2			28.42	28.34	-1.83
101	HT ENERGY Battery (3.7Vdc) with Earphone	Left Edge 10mm	PCS1900			29.55	29.46	-2.05
102			GPRS1900 TS2			28.42	28.32	-2.28
103	HT ENERGY Battery (3.8Vdc) with Earphone	Back Edge 10mm	PCS1900			29.55	29.44	-2.50
104			GPRS1900 TS2			28.42	28.30	-2.73
105	HT ENERGY Battery (3.7Vdc) with Earphone	Back Edge 10mm	PCS1900			29.55	29.42	-2.95
106			GPRS1900 TS2			28.42	28.28	-3.17



A D T

Test Mode	Configuration	Test Position	Communication Mode	Test Channel	Test Frequency (MHz)	Power (dBm)		Power Drift (%)
						Begin	After	
107	HT ENERGY Battery (3.8Vdc) with Earphone	Bottom 10mm	WCDMA1900	9400	1800.0	24.28	24.13	-3.39
108	HT ENERGY Battery (3.7Vdc) with Earphone					24.28	24.12	-3.62
109	HT ENERGY Battery (3.8Vdc) with Earphone	Front 10mm	WCDMA1900			24.28	24.11	-3.84
110	HT ENERGY Battery (3.7Vdc) with Earphone					24.28	24.10	-4.06
111	HT ENERGY Battery (3.8Vdc) with Earphone	Right Edge 10mm	WCDMA1900			24.28	24.09	-4.28
112	HT ENERGY Battery (3.7Vdc) with Earphone					24.28	24.08	-4.50
113	HT ENERGY Battery (3.8Vdc) with Earphone	Left Edge 10mm	WCDMA1900			24.28	24.27	-0.23
114	HT ENERGY Battery (3.7Vdc) with Earphone					24.28	24.26	-0.46
115	HT ENERGY Battery (3.8Vdc) with Earphone	Back Edge 10mm	WCDMA1900			24.28	24.25	-0.69
116	HT ENERGY Battery (3.7Vdc) with Earphone					24.28	24.24	-0.92

7.5 NO SIMULTANEOUS SAR JUSTIFICATION

The device has mobile (GSM / WCDMA), Wi-Fi and Bluetooth function. 850 and 1900MHz band can not be used at the same time. GSM and WCDMA can not transmit simultaneously. Wi-Fi and Bluetooth use same antenna but both functions will not work in the same time since time-sharing technology is used..

SAR evaluation for Transmitter

Since the output power $> 60/f(\text{GHz})$, SAR is necessary for mobile and Wi-Fi function. The max output power of Bluetooth is $1.4\text{mW} < 24\text{mW} (2.P_{\text{Ref}})$ and antenna separation between mobile and Bluetooth is $10.15\text{cm} > 5\text{cm}$. Therefore, SAR evaluation is not necessary.

Max SAR value of each band

Frequency band (MHz)	SAR value (W/kg)	
	Head	Body
850	0.729	0.891
1900	0.710	0.823
2450	0.521	0.147
Max sum of SAR	1.25	1.038

Note: 1. Max SAR value of 2.4GHz is shown on Report No.: SA110418C06

Hot spot function

DTM is not supported for the device. Hot spot function supports simultaneous transmission mode as below

Configuration	GSM voice	GSM data	WCDMA	WIFI	BT
1	X	O	X	O	O
2	X	X	O	O	O

Note: GSM and WCDMA can not transmit simultaneously. 850 and 1900MHz band can not be used at the same time

Antenna separation distance (cm)

	Mobile	Wi-Fi	Bluetooth
Mobile		10.15	10.15
Wi-Fi	10.15		0
Bluetooth	10.15	0	

Note: Wi-Fi and Bluetooth use same antenna but can not work at the same time.

Conclusion

- 1) Antenna separation distance for each transmission simultaneous pair is $> 5\text{cm}$
- 2) Sum of SAR is $1.25 < 1.6\text{ W/ kg}$

Accordingly, simultaneous Transmission SAR is not required for this device.



7.6 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / controlled Exposure Environment)
Spatial Average (whole body)	0.08	0.4
Spatial Peak (averaged over 1 g)	1.6	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

NOTE: This limits accord to 47 CFR 2.1093 – Safety Limit.



8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



香港商立德國際商品試驗有限公司桃園分公司

Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch


A D T

APPENDIX A : TEST DATA

Product Name: Smart Phone ; Type: PG86310

Liquid Level Photo

Tissue 835MHz D=150mm

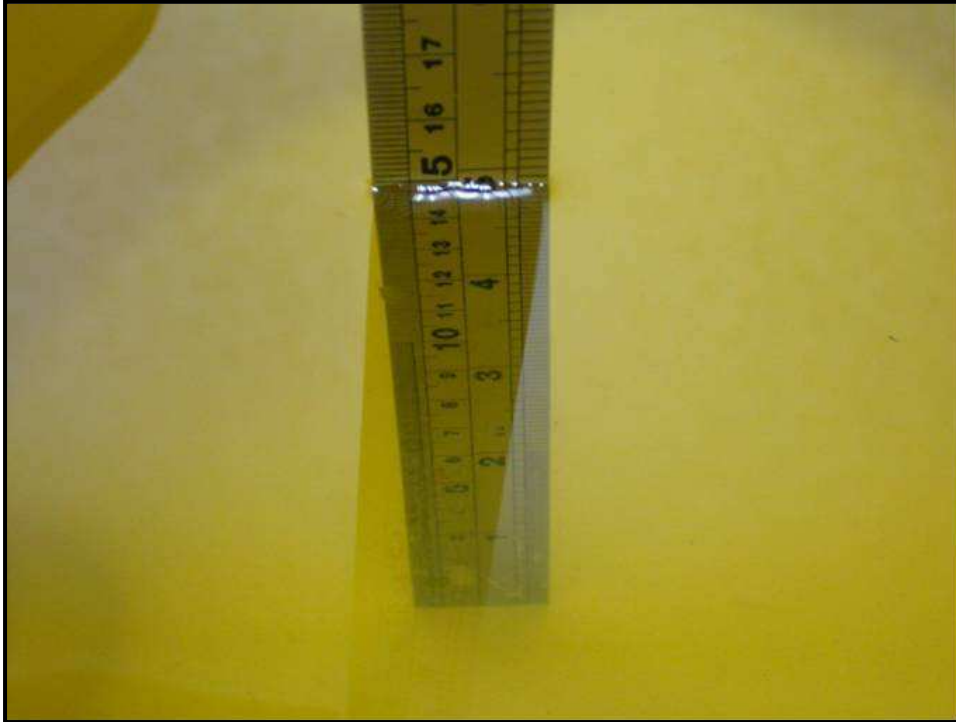

Tissue 1900MHz D=150mm



M01-Right Head-Cheek-GSM850-Ch190 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.571 mW/g


Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.401 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

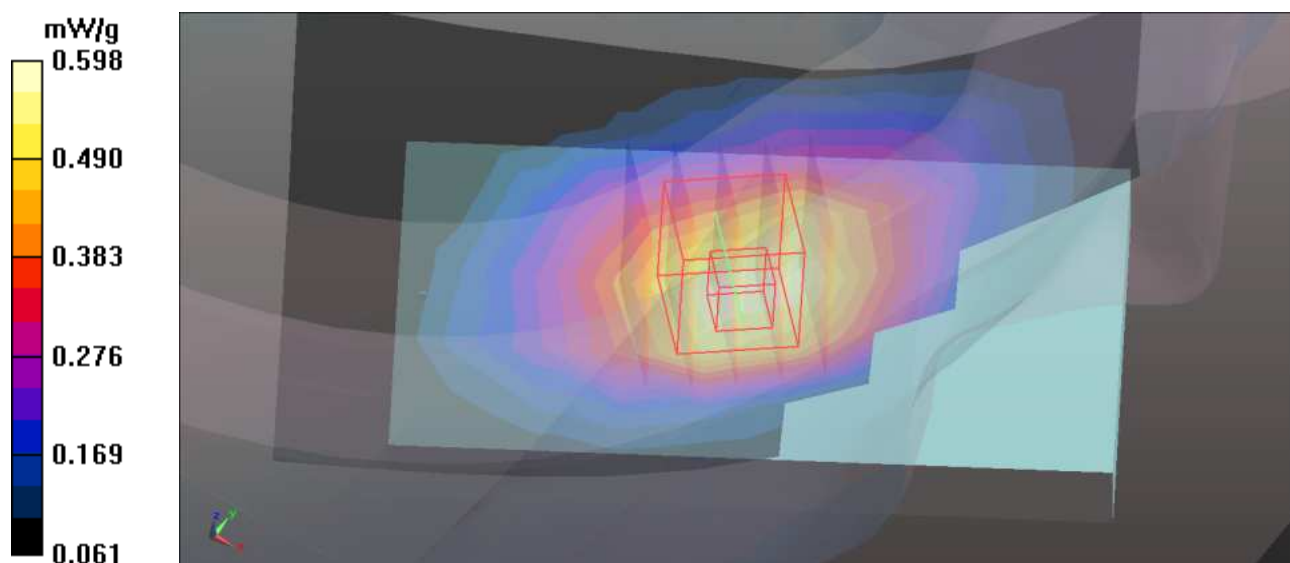

M02-Right Head-Tilt-GSM850-Ch190 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.432 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.722 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.423 mW/g

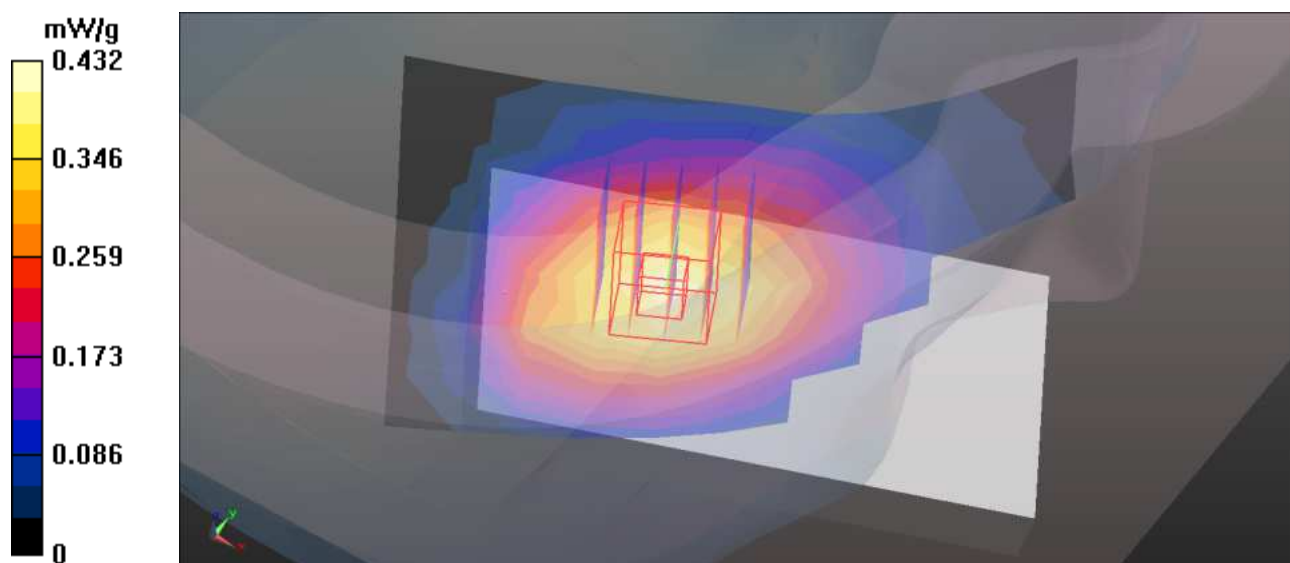

M03-Left Head-Cheek-GSM850-Ch190 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.841 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.262 V/m; Power Drift = -0.0077 dB

Peak SAR (extrapolated) = 1.037 W/kg

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.514 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

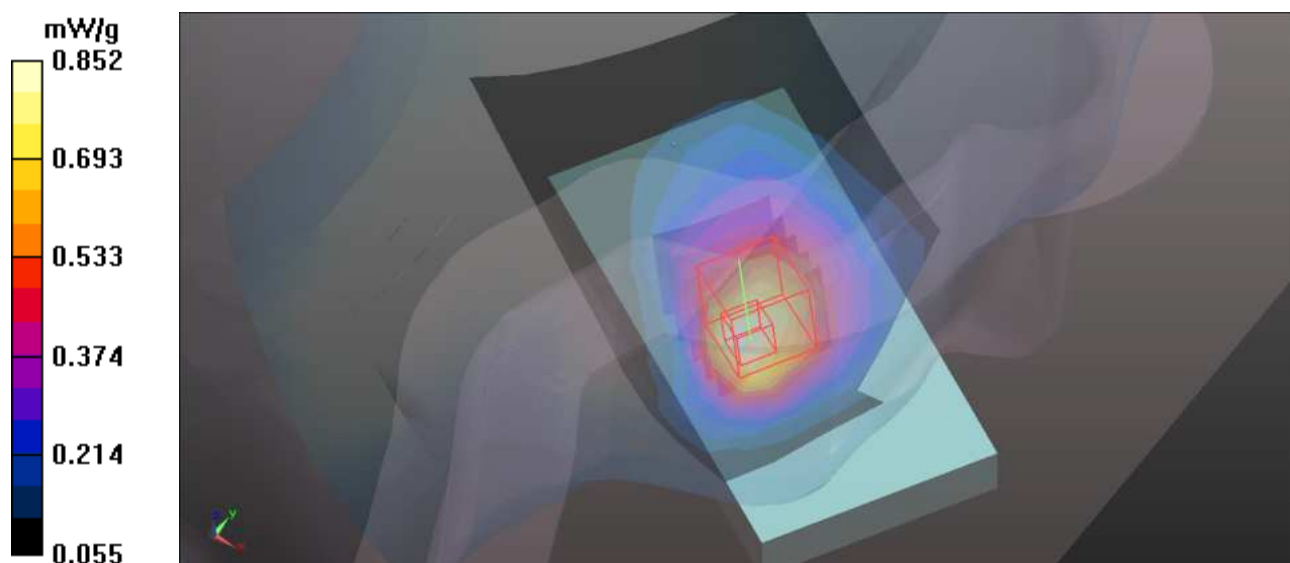

M04-Left Head-Tilt-GSM850-Ch190 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3
 Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.461 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.312 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:



$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.312 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

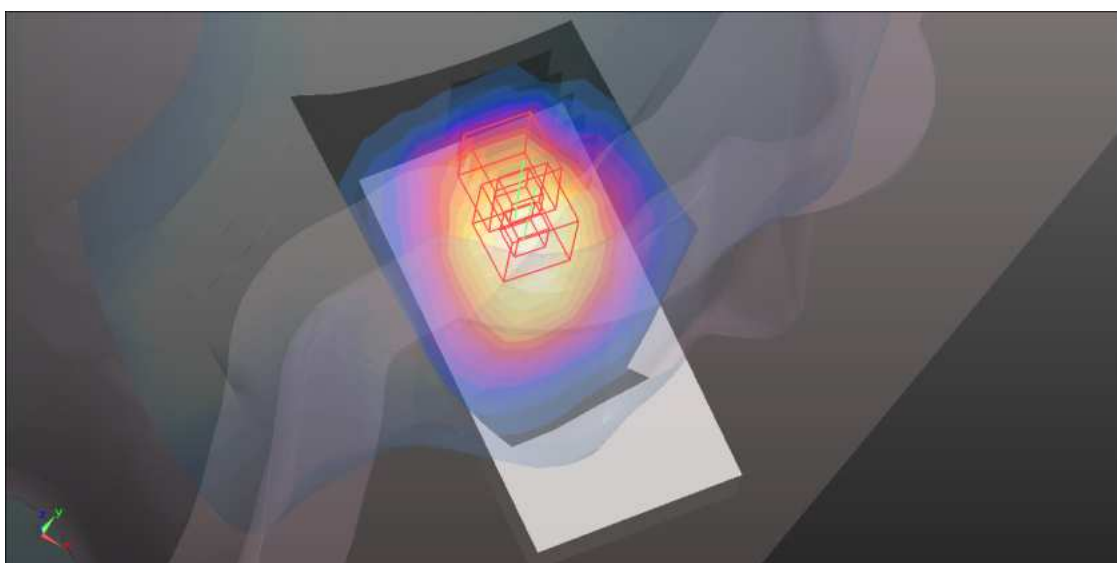

M05-Right Head-Cheek-GSM850-Ch190 / HT_3.7VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.622 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.413 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.412 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

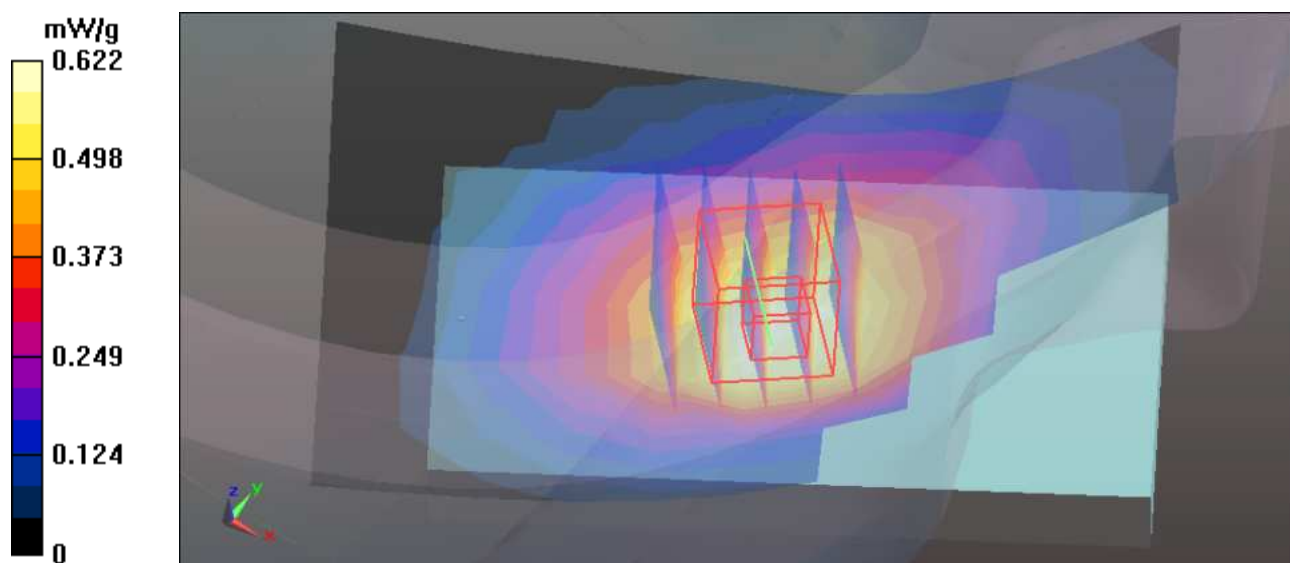

M06-Right Head-Tilt-GSM850-Ch190 / HT_3.7VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.469 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.018 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

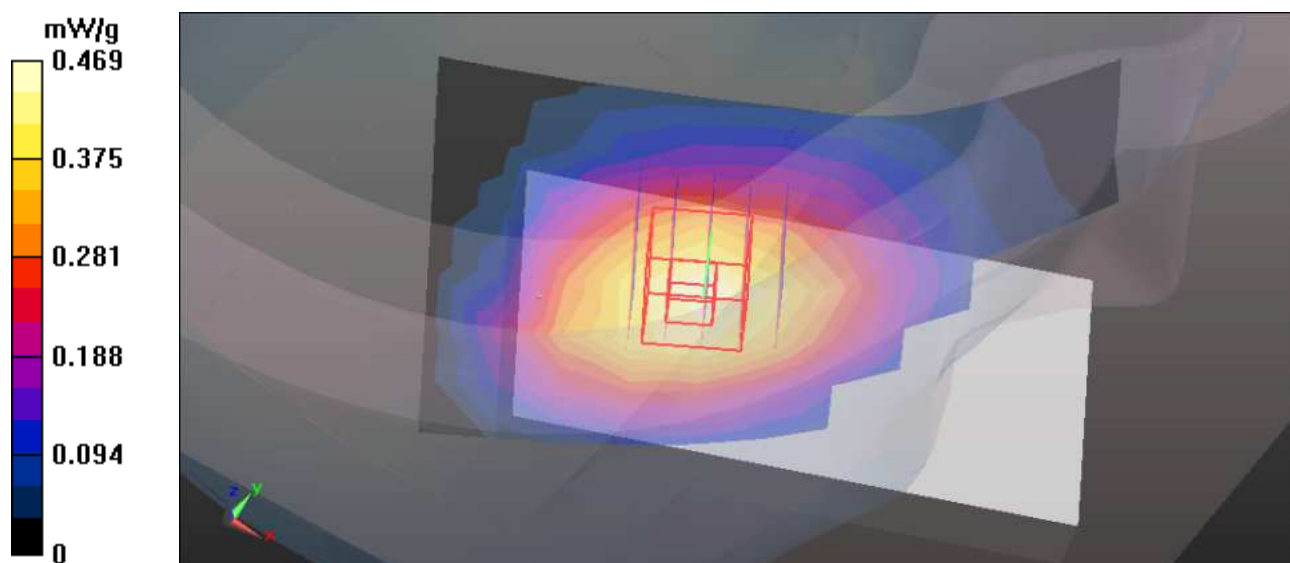

M07-Left Head-Cheek-GSM850-Ch190 / HT_3.7VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.641 mW/g

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.223 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.638 mW/g

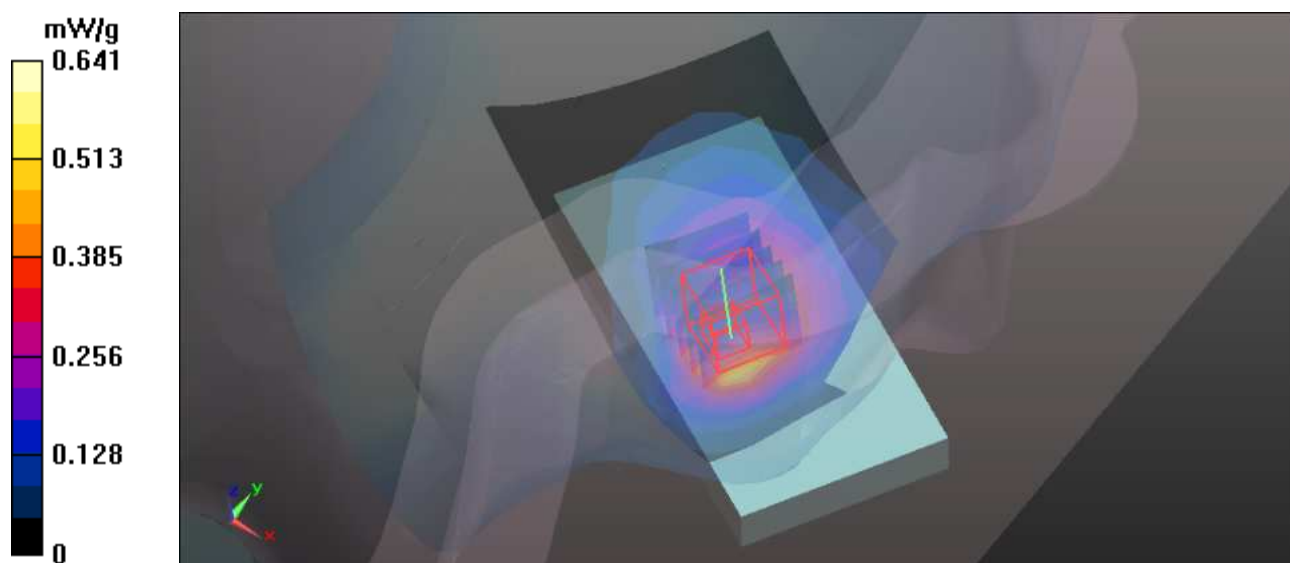

M08-Left Head-Tilt-GSM850-Ch190 / HT_3.7VDC

Communication System: Generic GSM ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 42.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.360 mW/g


Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.460 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.358 mW/g

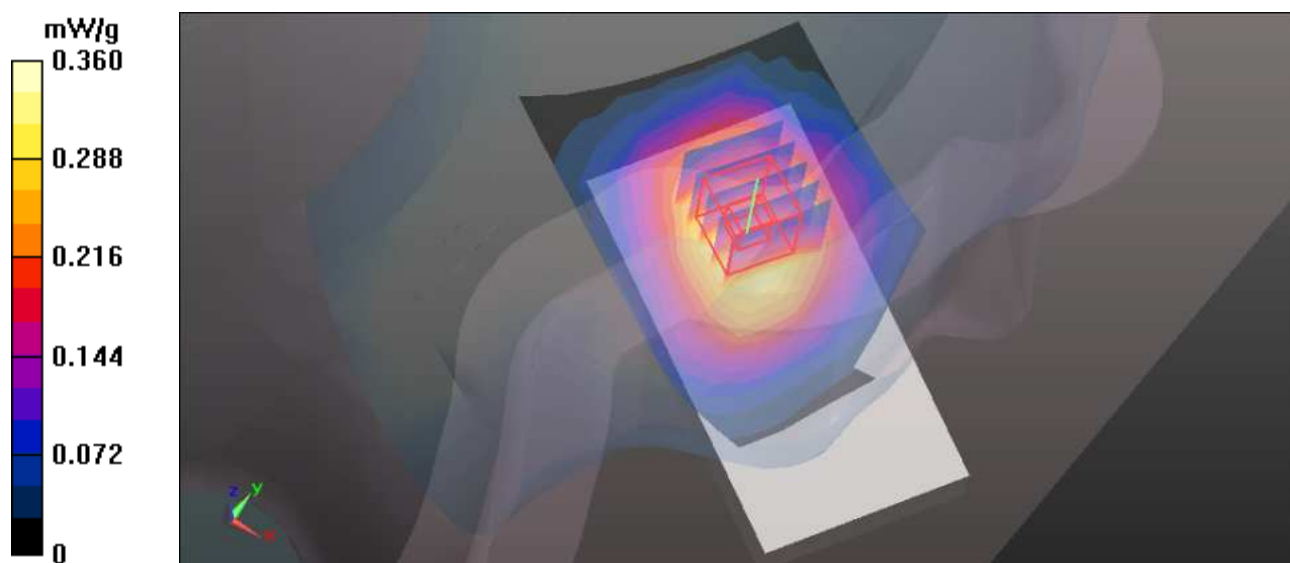

M09-Right Head-Cheek-WCDMA 850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 42.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.325 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.727 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.336 mW/g

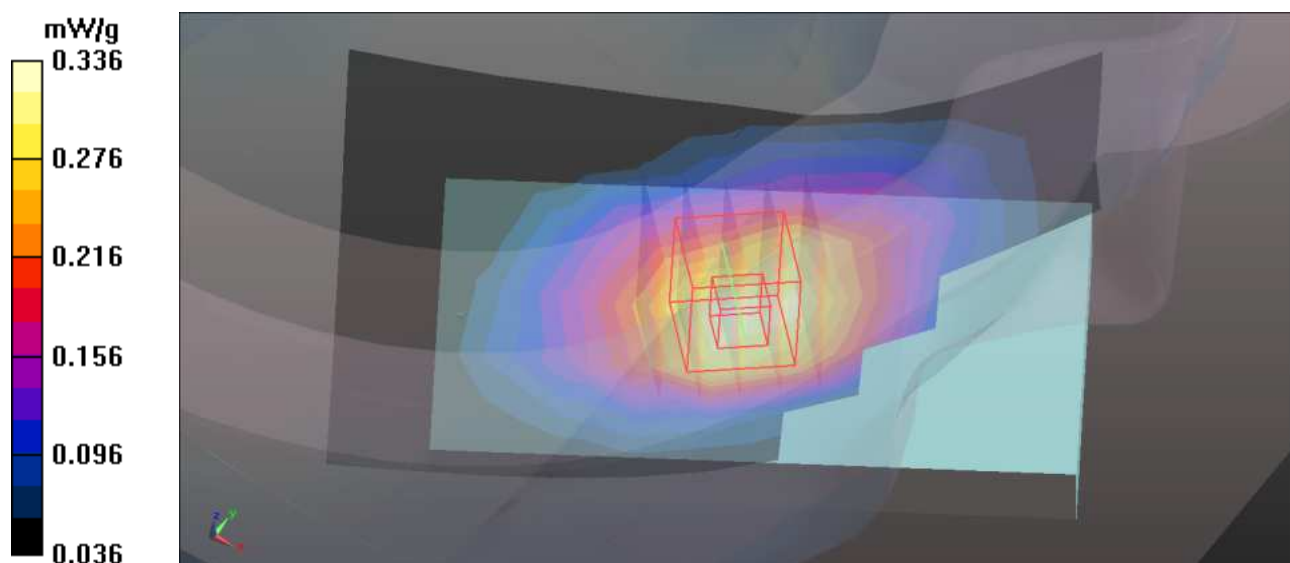

M10-Right Head-Tilt-WCDMA 850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.234 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.582 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

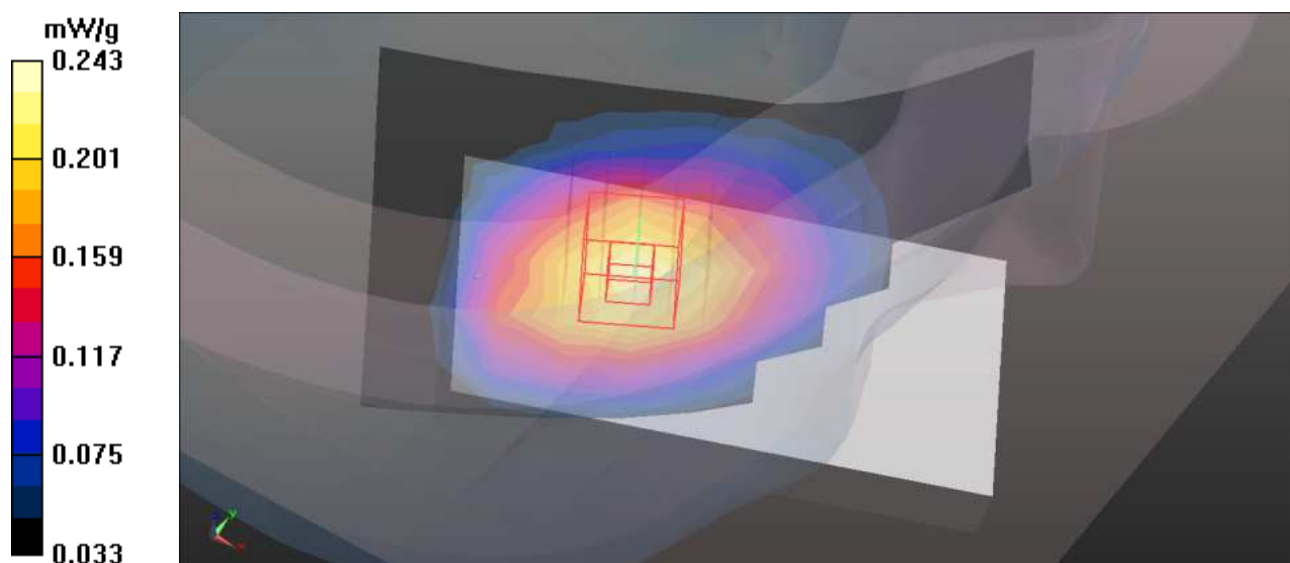

M11-Left Head-Cheek-WCDMA 850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.444 mW/g

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.751 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

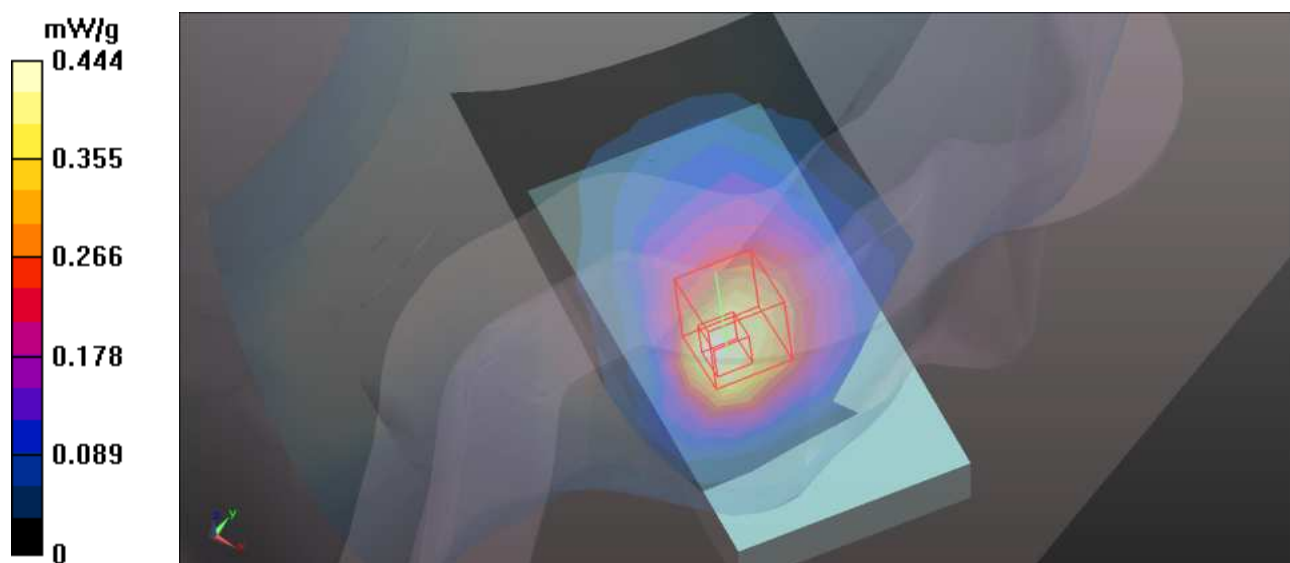

M12-Left Head-Tilt-WCDMA 850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.245 mW/g

Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.538 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.166 mW/g

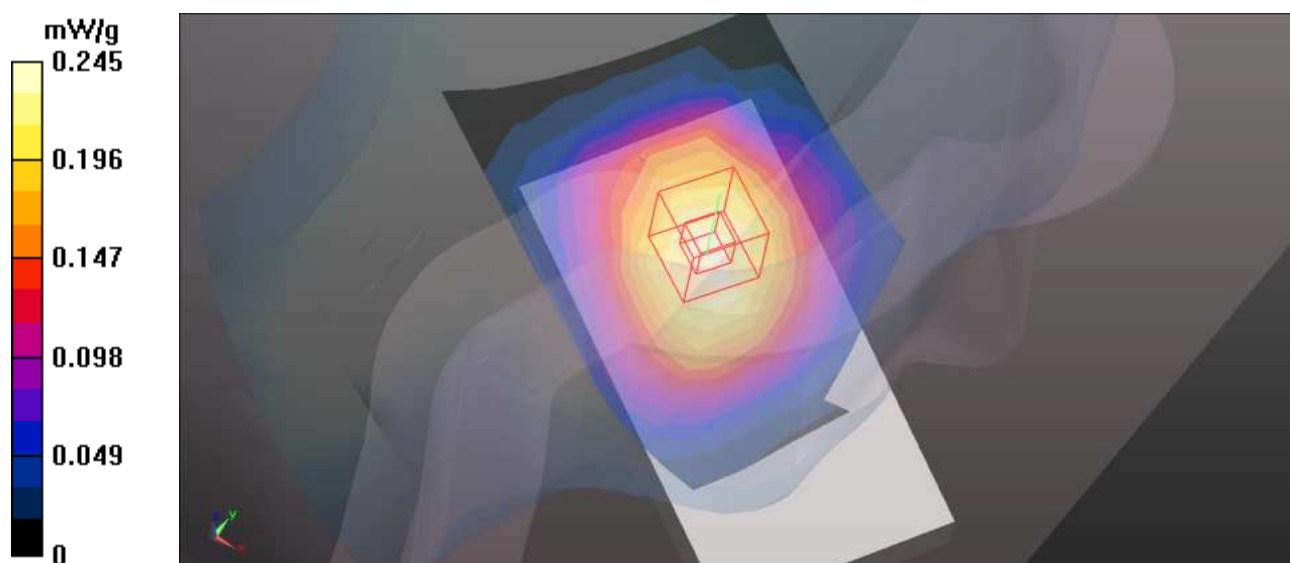

M13-Right Head-Cheek-WCDMA 850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.348 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.091 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

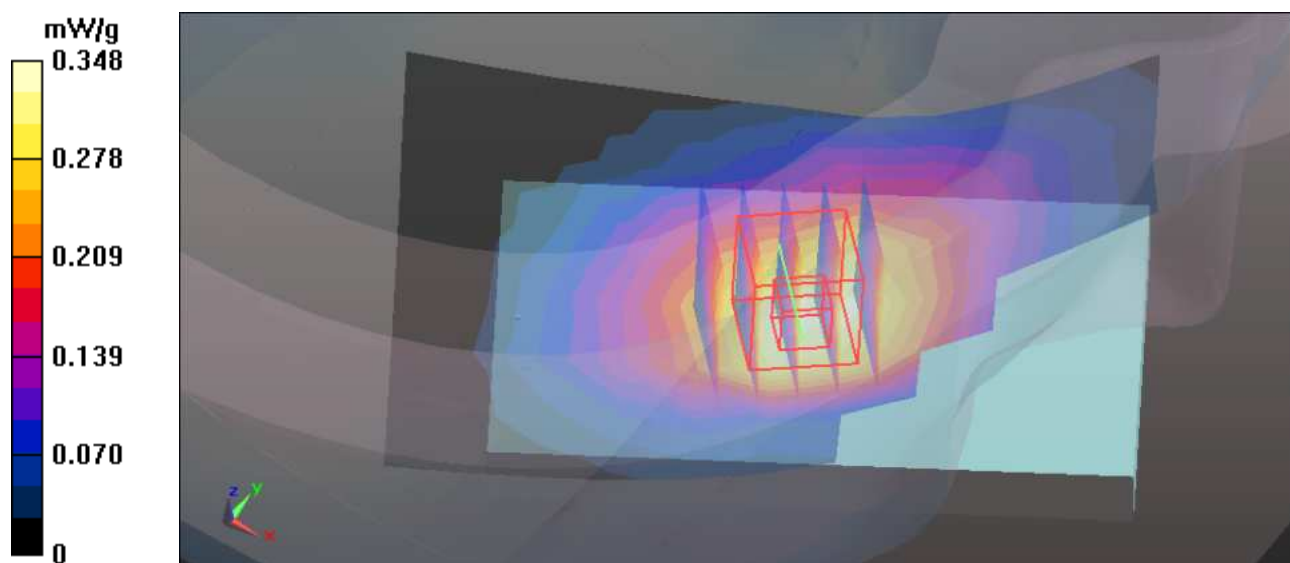

M14-Right Head-Tilt-WCDMA 850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 42.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x1x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.261 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.665 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

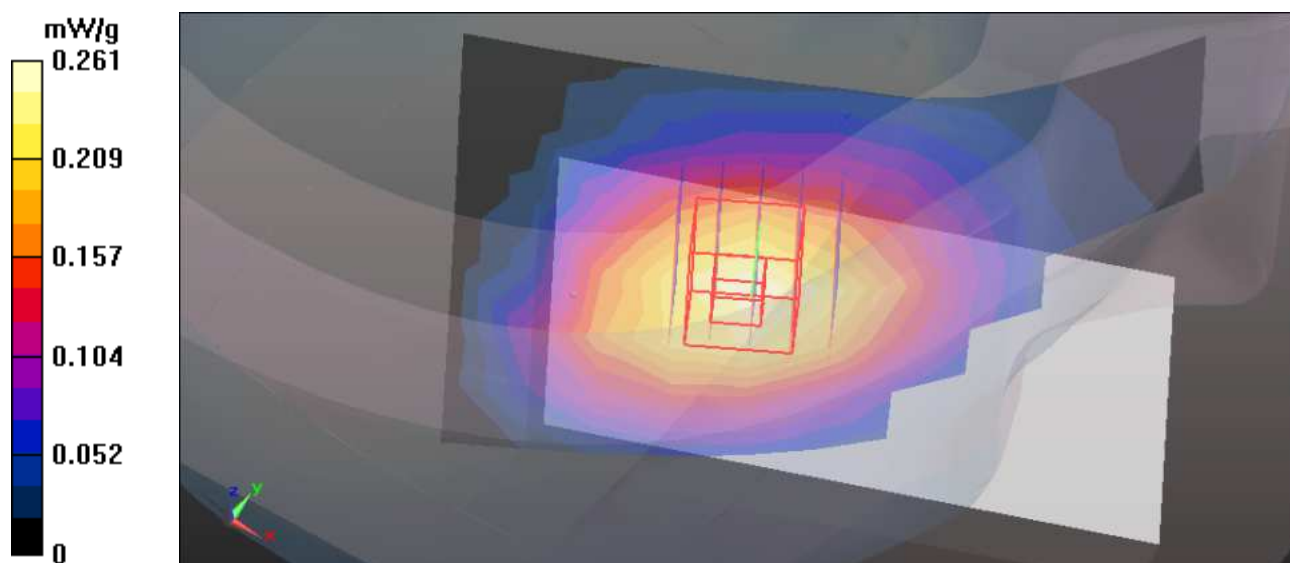

M15-Left Head-Cheek-WCDMA 850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.484 mW/g

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.240 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

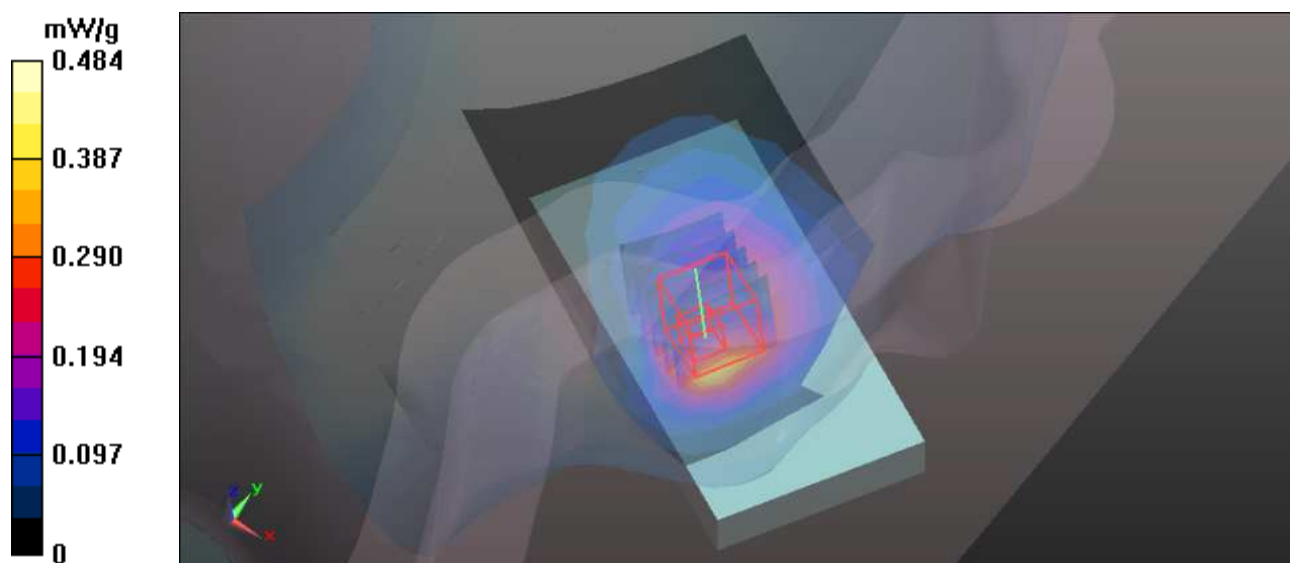

M16-Left Head-Tilt-WCDMA 850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.248 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.257 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

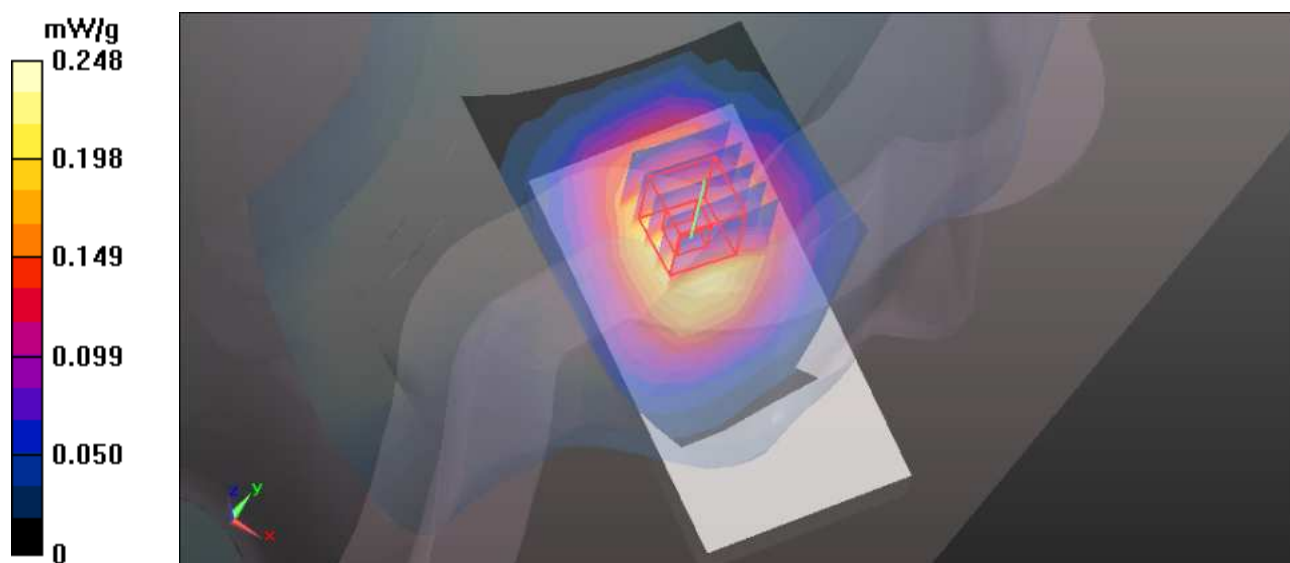

M17-Bottom-GSM850-Ch128 / HT_3.8VDC Cotron

Communication System: Generic GSM850 ; Frequency: 824.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 56.71$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.112 mW/g

Flat-Section MSL/Flat Section 10mm Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.129 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.485 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.493 mW/g

Maximum value of SAR (measured) = 1.169 mW/g



Flat-Section MSL/Flat Section 10mm Low/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.129 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.121 W/kg

SAR(1 g) = 0.865 mW/g; SAR(10 g) = 0.636 mW/g

Maximum value of SAR (measured) = 1.004 mW/g

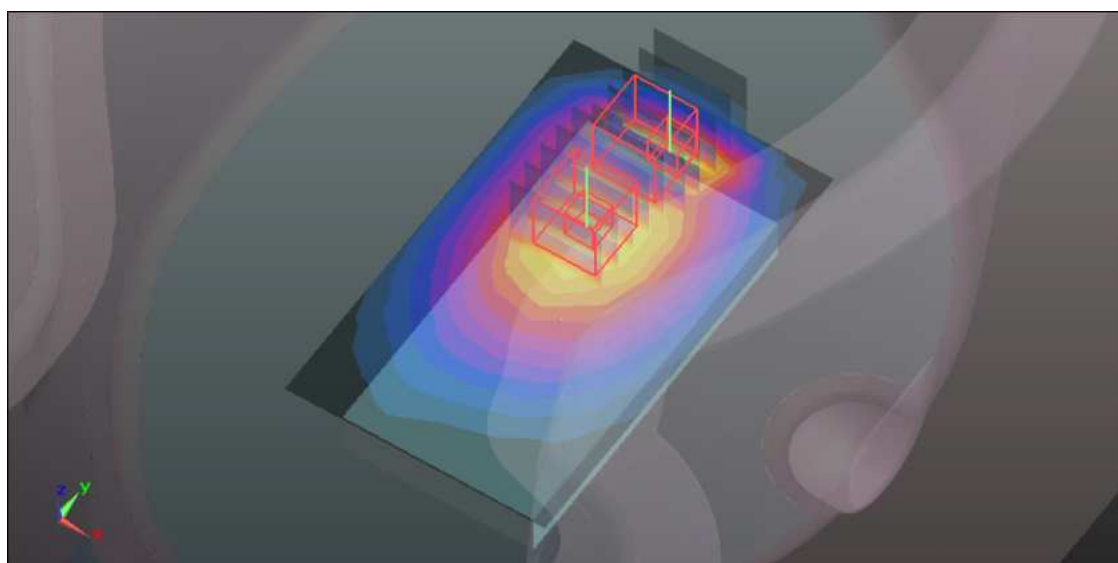

M17-Bottom-GSM850-Ch190 / HT_3.8VDC Cotron

Communication System: Generic GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.198 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.315 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.526 W/kg

SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 1.132 mW/g



Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.315 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.173 W/kg

SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.649 mW/g

Maximum value of SAR (measured) = 1.048 mW/g

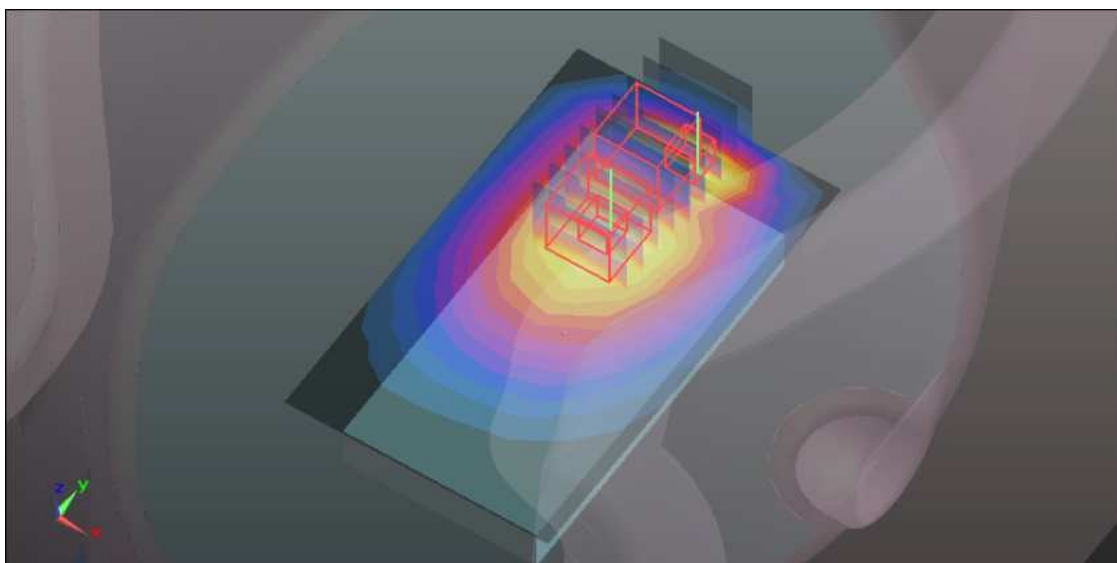

M17-Bottom-GSM850-Ch251 / HT_3.8VDC Cotron

Communication System: Generic GSM850 ; Frequency: 848.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm High/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.130 mW/g

Flat-Section MSL/Flat Section 10mm High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.486 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.428 W/kg

SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.437 mW/g

Maximum value of SAR (measured) = 1.051 mW/g



Flat-Section MSL/Flat Section 10mm High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.486 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.024 W/kg

SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 0.911 mW/g

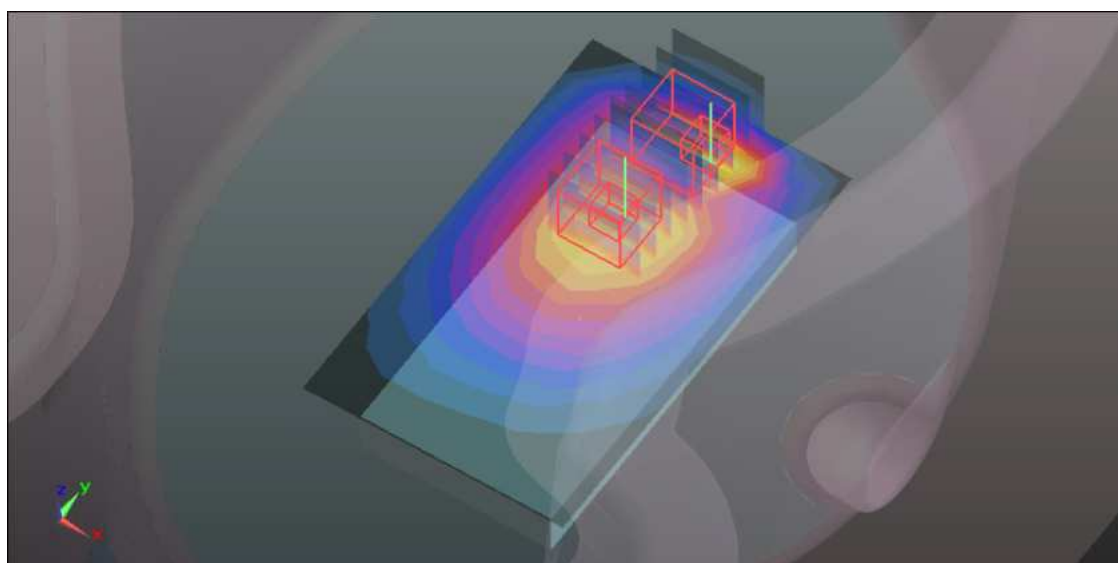

M18-Bottom-GPRS850 TS1-Ch190 / HT_3.8VDC Cotron

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.271 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.574 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.289 mW/g



Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.574 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

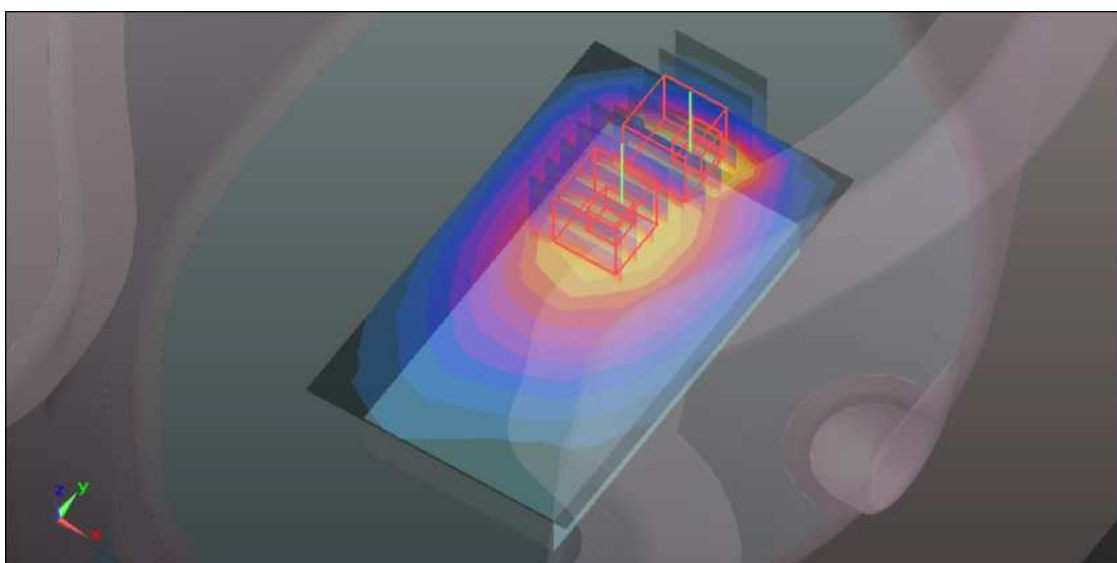



M19-Bottom-GPRS850 TS2-Ch190 / HT_3.8VDC Cotron

Communication System:GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type:GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.437 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.103 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.456 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:



$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.103 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

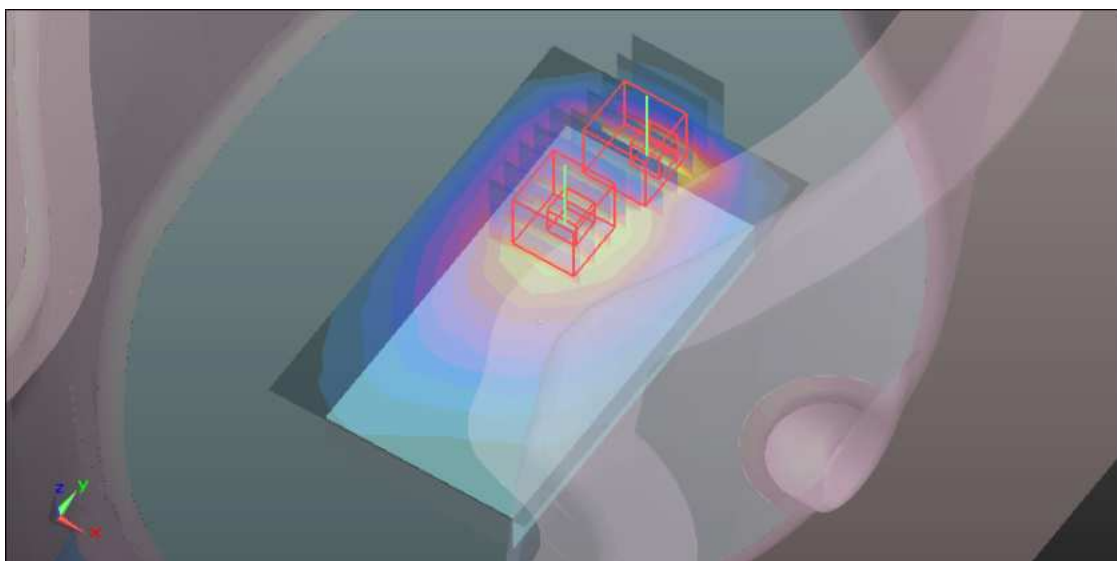

M20-Bottom-E-GPRS850 TS1-Ch190 / HT_3.8VDC Cotron

Communication System: E-GPRS850850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.062 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.263 mW/g



Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.062 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

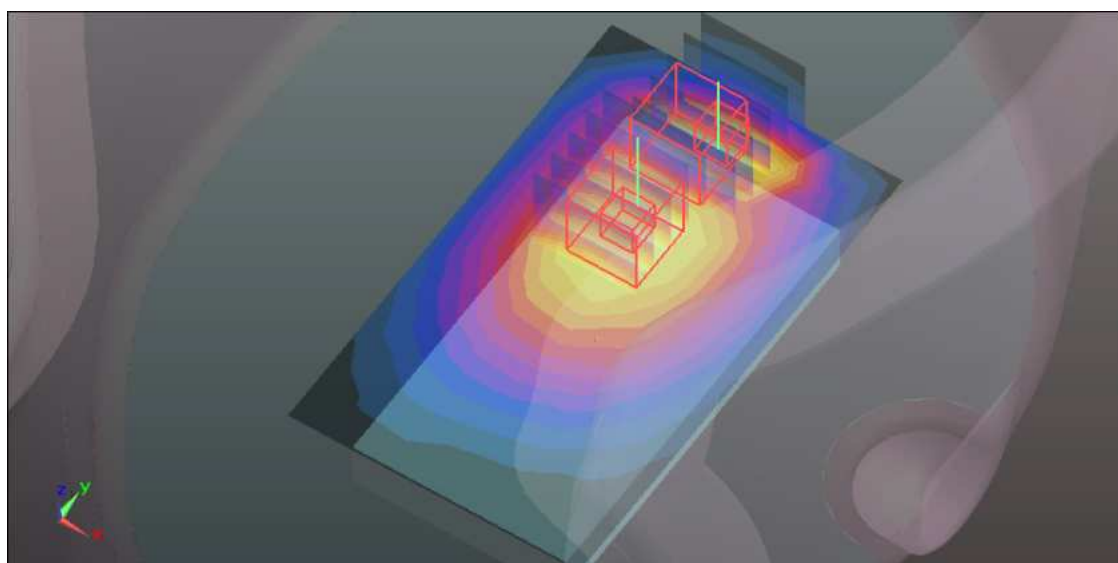

M21-Bottom-E-GPRS850 TS2-Ch190 / HT_3.8VDC Cotron

Communication System: E-GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.437 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.423 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.413 mW/g



Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.423 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.385 mW/g

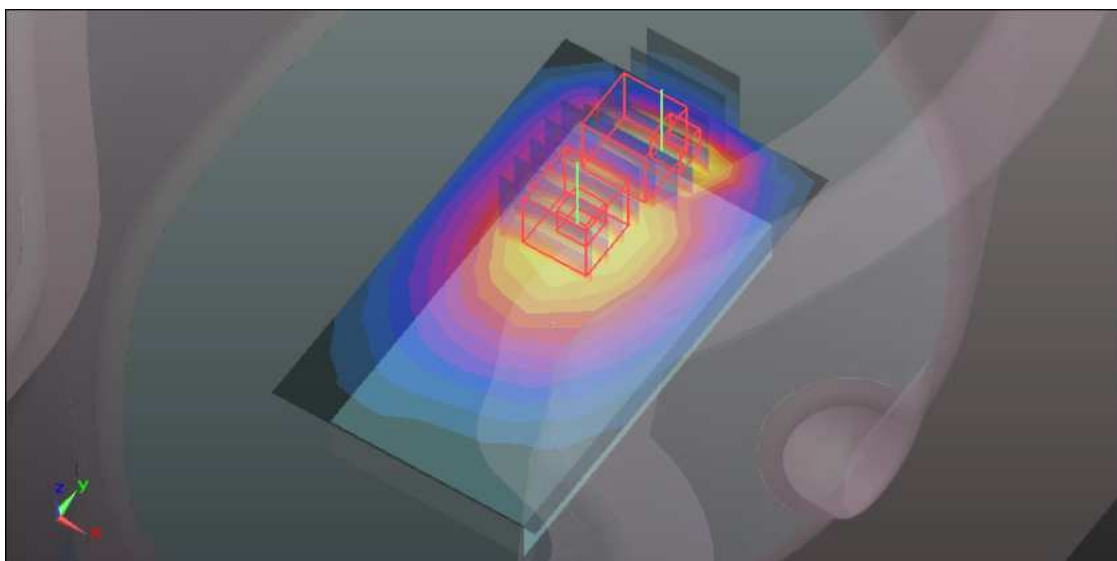



M22-Bottom-GSM S850-Ch128 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 824.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 56.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Low/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.016 mW/g

Body Position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.553 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.105 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.623 mW/g

Maximum value of SAR (measured) = 0.985 mW/g


Body Position - Low/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.553 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.062 W/kg

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.900 mW/g

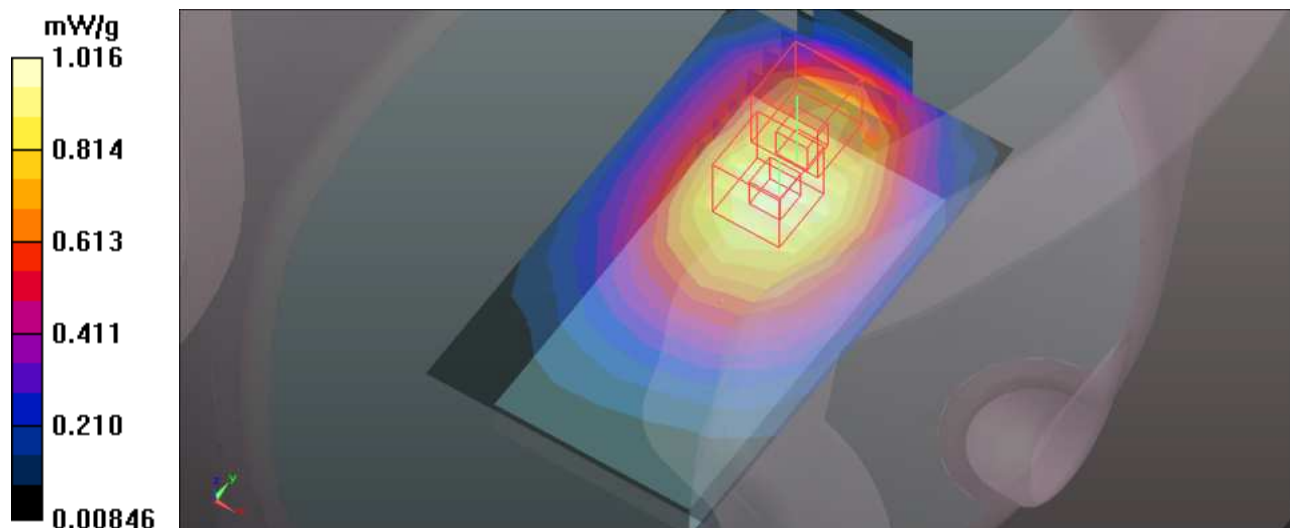

M22-Bottom-GSM S850-Ch190 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.066 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.620 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.178 W/kg

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.654 mW/g

Maximum value of SAR (measured) = 1.053 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.620 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.171 W/kg

SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.931 mW/g

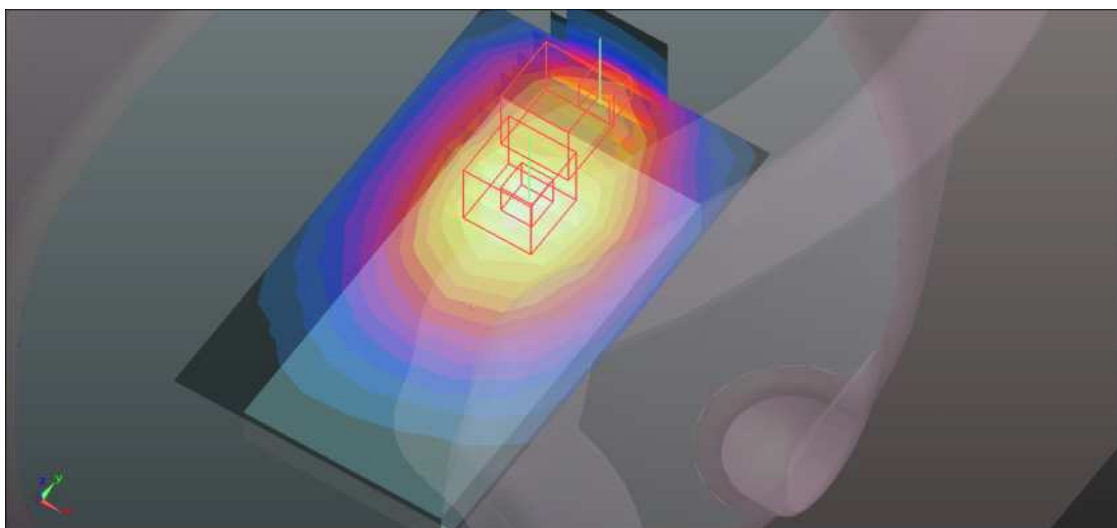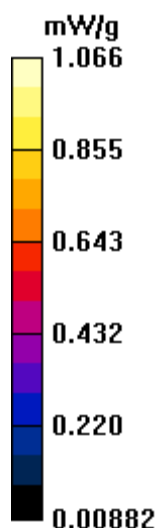

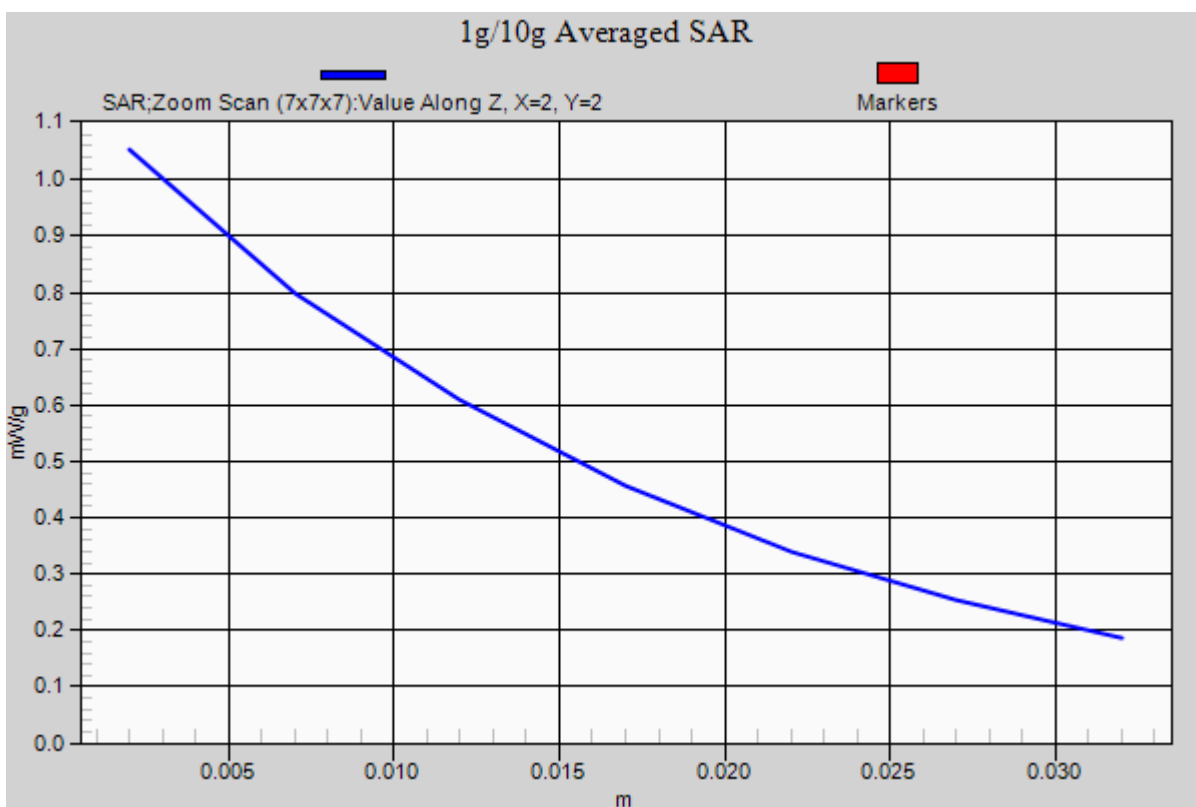

M22-Bottom-GSM S850-Ch251 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 848.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - High/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.846 mW/g

Body Position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.326 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.525 mW/g



Maximum value of SAR (measured) = 0.831 mW/g

Body Position - High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.326 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.042 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.345 mW/g

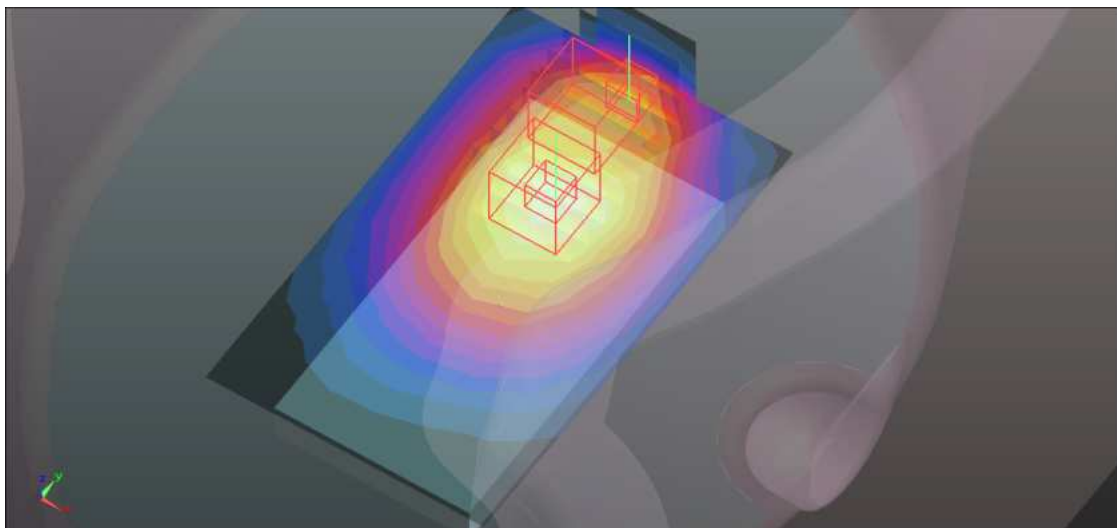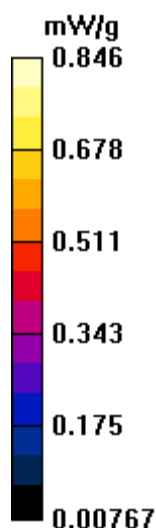

M23-Bottom-GPRS850 TS1-Ch128 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 824.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 56.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Low/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.908 mW/g

Body Position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.877 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.002 W/kg

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 0.901 mW/g


Body Position - Low/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.877 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.802 mW/g

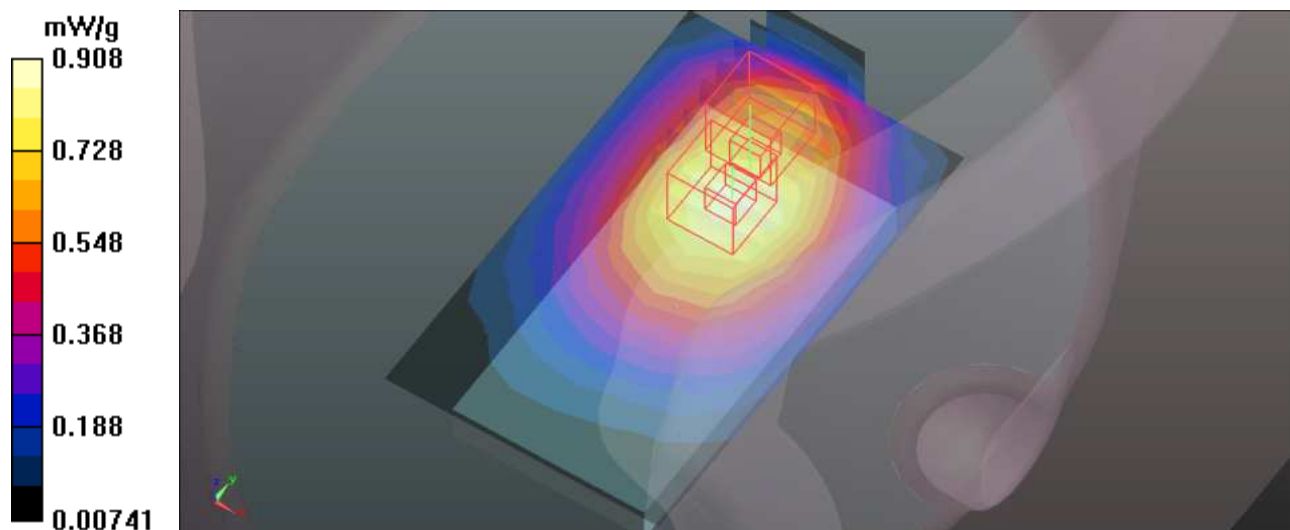

M23-Bottom-GPRS850 TS1-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.957 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.896 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.058 W/kg

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 0.946 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.896 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.074 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

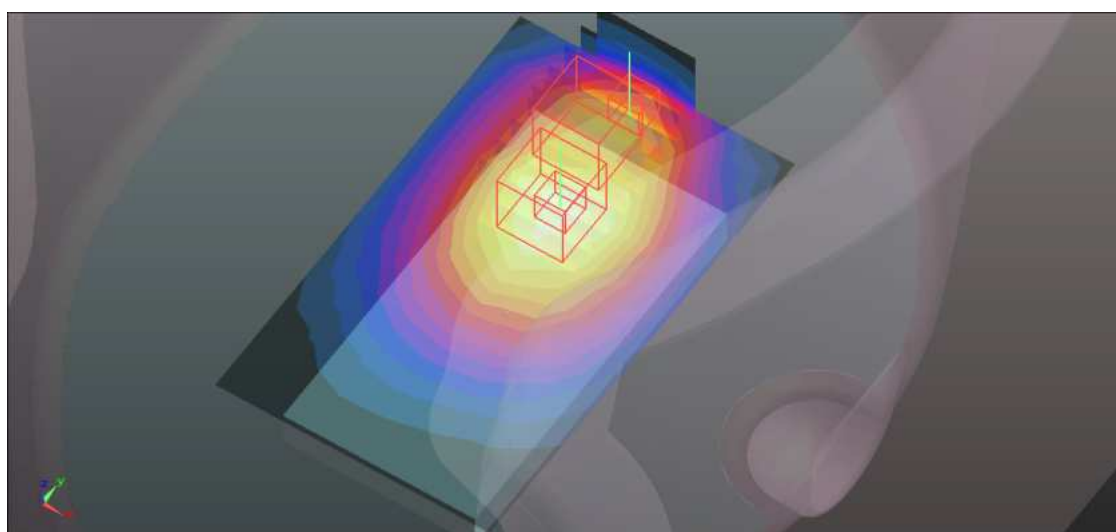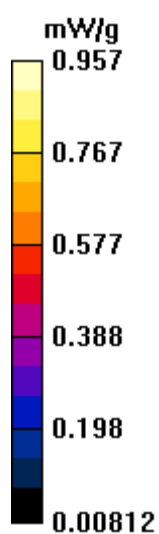

M23-Bottom-GPRS850 TS1-Ch251 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 848.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 56.29$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position -High/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.724 mW/g

Body Position -High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.114 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.615 mW/g; SAR(10 g) = 0.452 mW/g

Maximum value of SAR (measured) = 0.726 mW/g


Body Position -High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.114 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

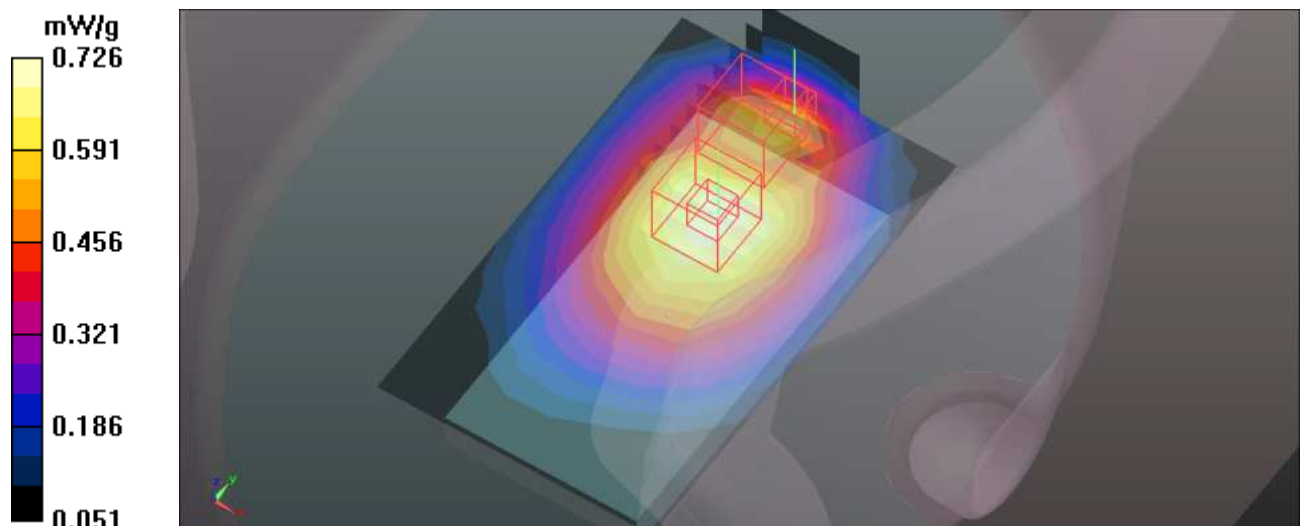

M24-Bottom-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid GPRS850/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.945 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.350 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.065 W/kg

SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.582 mW/g

Maximum value of SAR (measured) = 0.943 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.350 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.359 mW/g

Maximum value of SAR (measured) = 0.749 mW/g

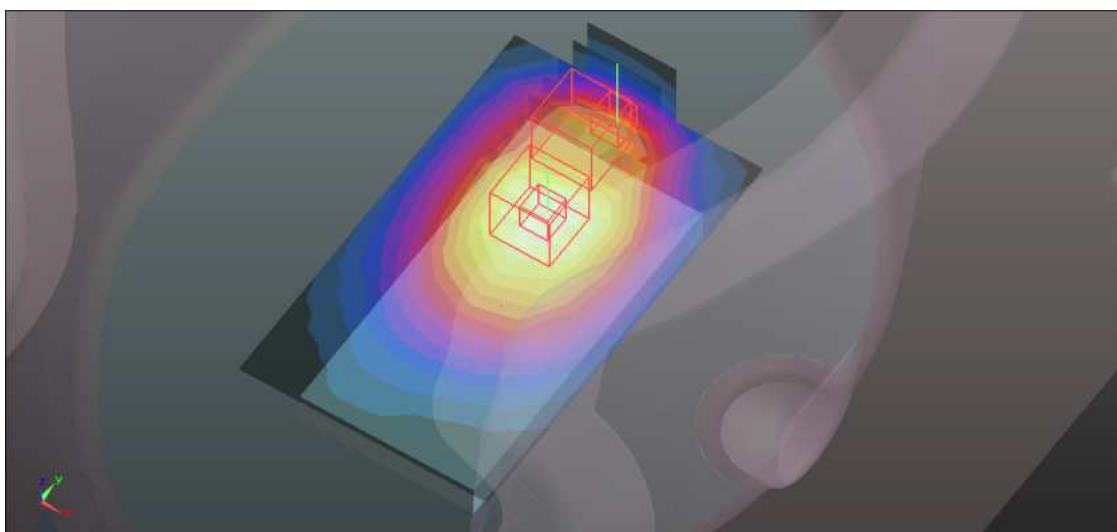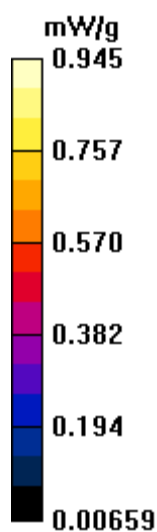

M25-Bottom-E-GPRS850 TS1-Ch190 / HT_3.7VDC

Communication System: E-GPRS850850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 mW/g

Body Position - Mid /Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.526 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.221 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.526 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

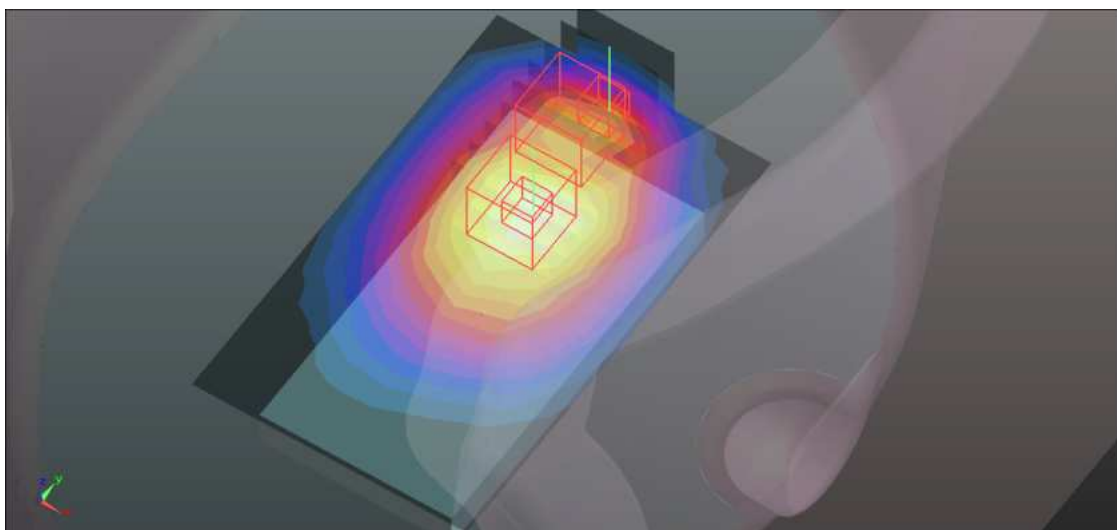

M26-Bottom-E-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: E-GPRS850850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.427 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.589 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.435 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.589 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

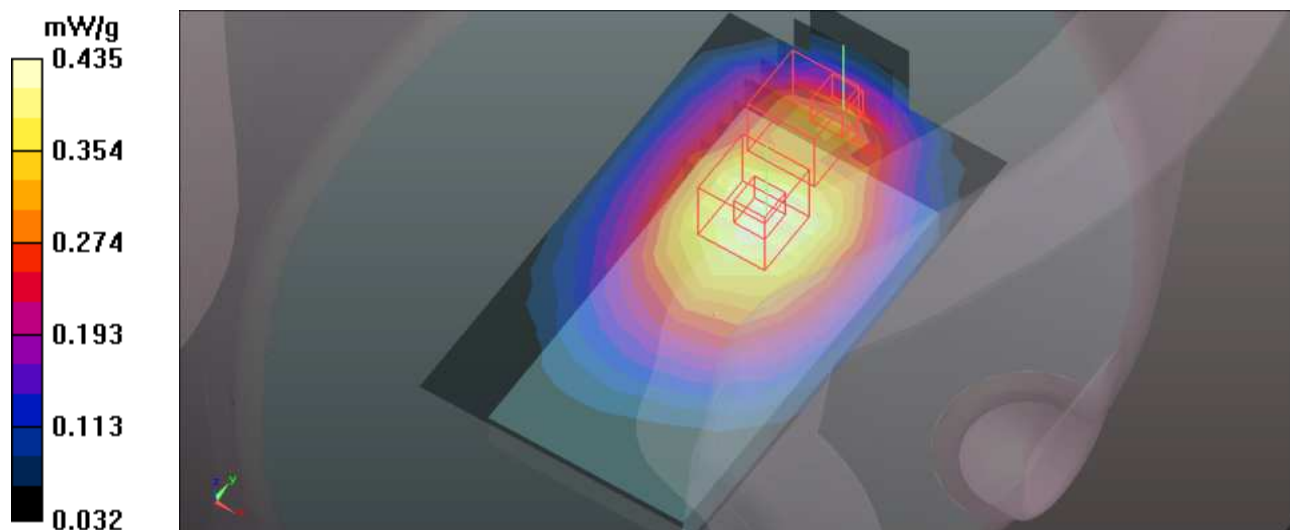

M27-Front-GSM850-Ch190 / HT_3.8VDC Cotron

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.655 mW/g


Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.271 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.642 mW/g

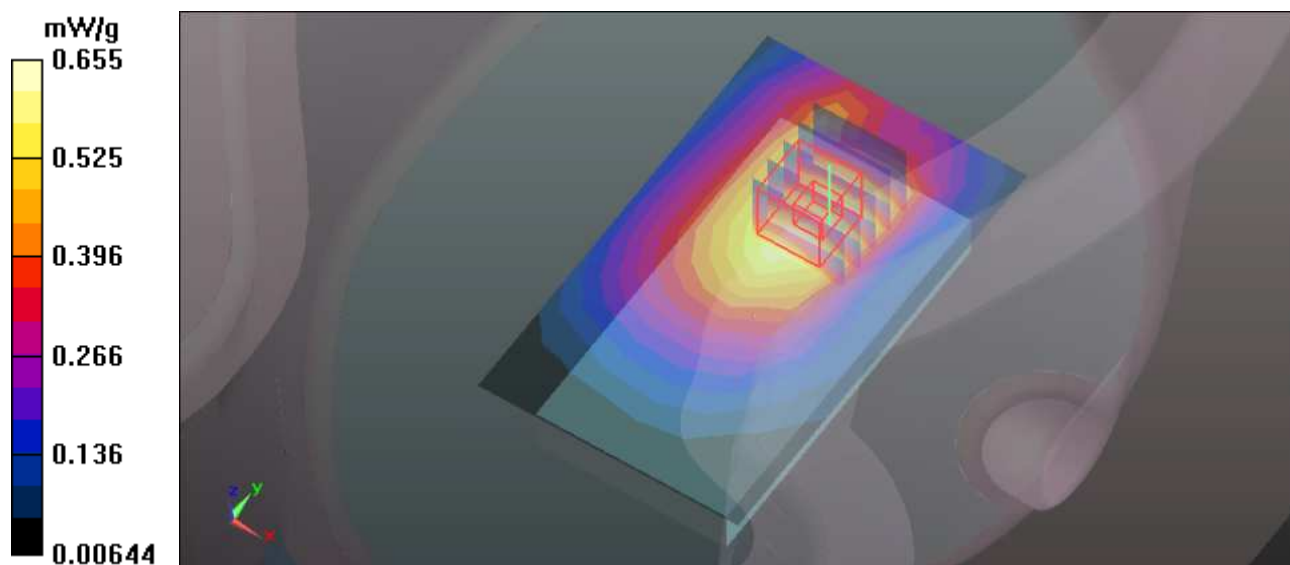

M28-Front-GPRS850 TS1-Ch190 / HT_3.8VDC Cotron

Communication System:GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid /Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.500 mW/g


Flat-Section MSL/Flat Section 10mm Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.321 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.495 mW/g

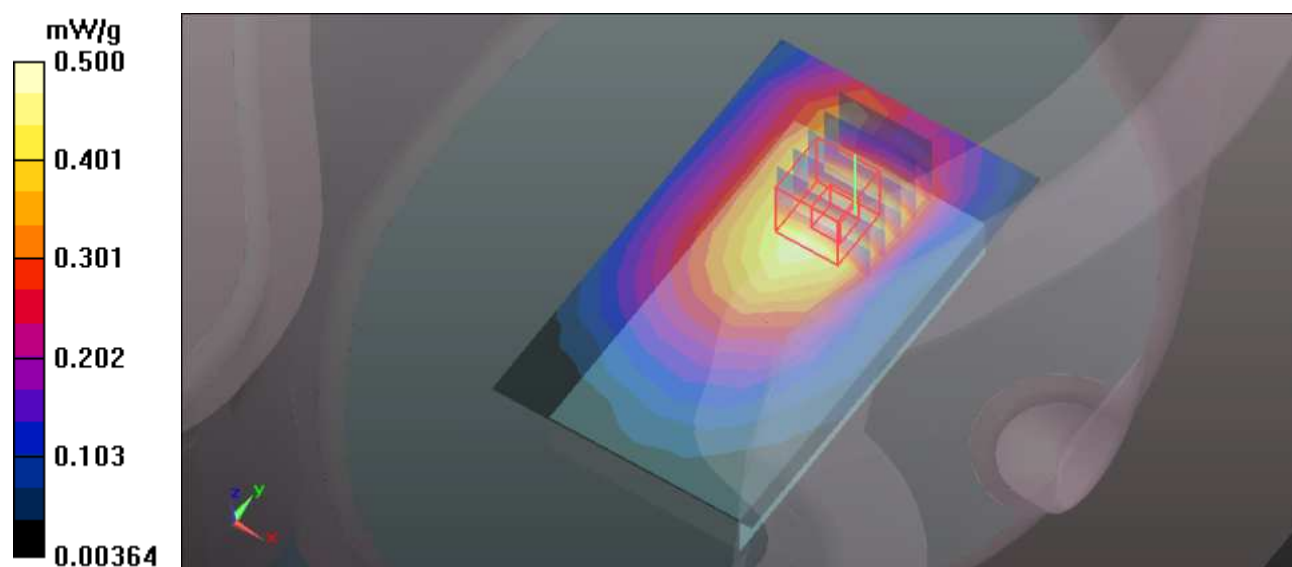

M29-Front-GPRS850 TS2-Ch190 / HT_3.8VDC Cotron

Communication System: Generic GPRS ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid /Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.544 mW/g


Flat-Section MSL/Flat Section 10mm Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.342 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

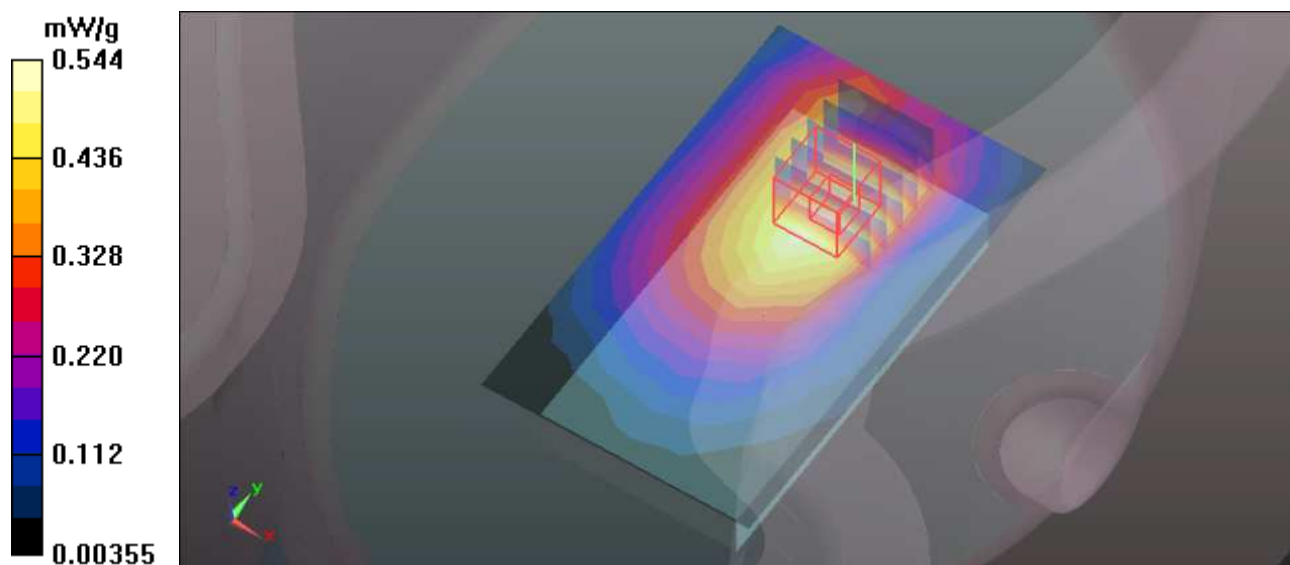

M30-Front-EGPRS850 TS1-Ch190 / HT_3.8VDC Cotron

Communication System: E-GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid /Area Scan (7x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.193 mW/g


Flat-Section MSL/Flat Section 10mm Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.937 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

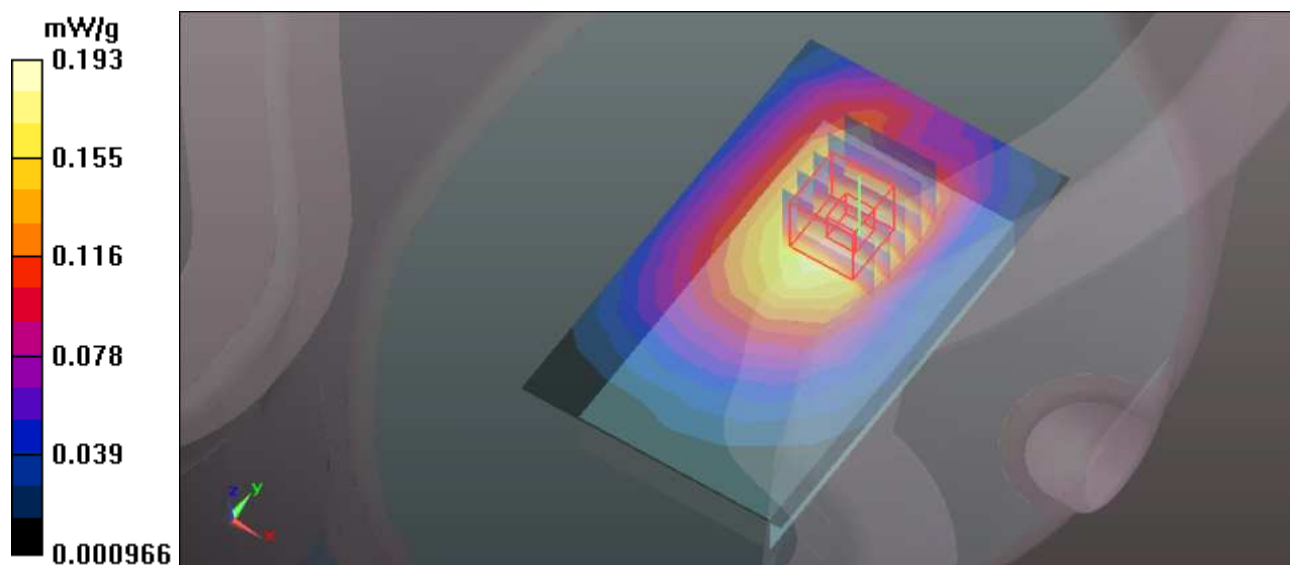

M31-Front-EGPRS850 TS2-Ch190 / HT_3.8VDC Cotron

Communication System: E-GPRS850850; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.389 mW/g


Flat-Section MSL/Flat Section 10mm Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.747 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

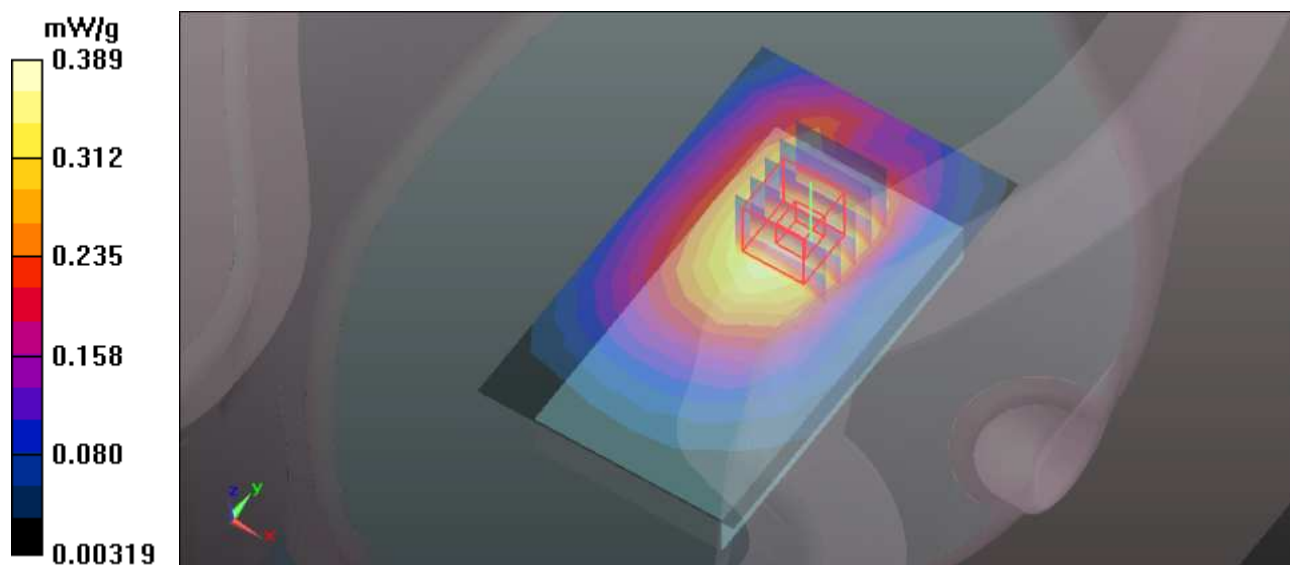

M32-Front-GSM S850-Ch190 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.473 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.769 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = **0.411** mW/g; SAR(10 g) = 0.305 mW/g

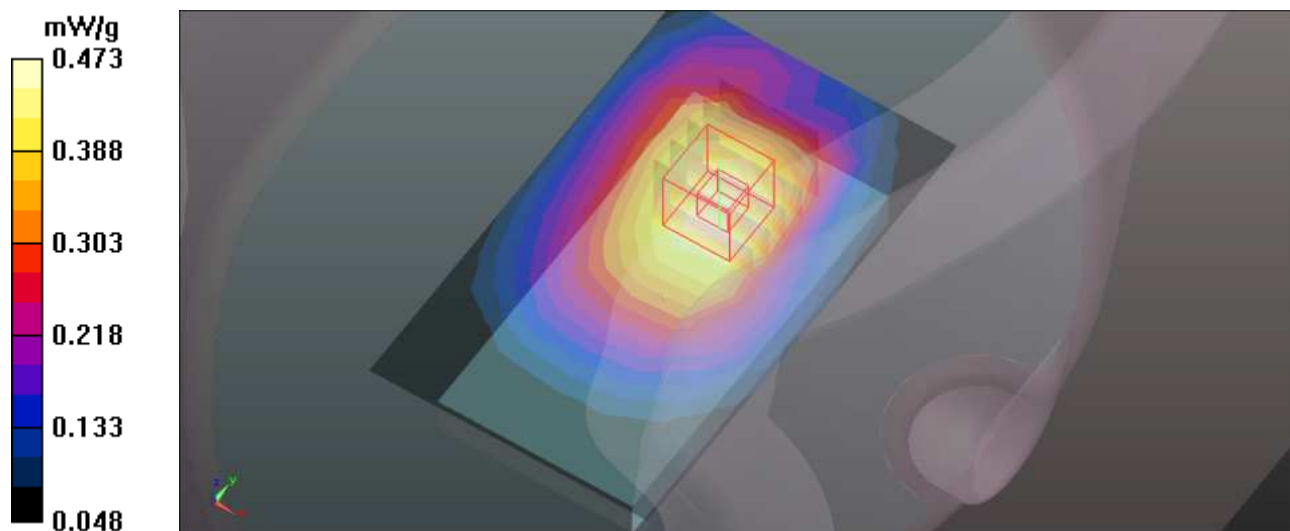

M33-Front-GPRS850 TS1-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.447 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.841 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

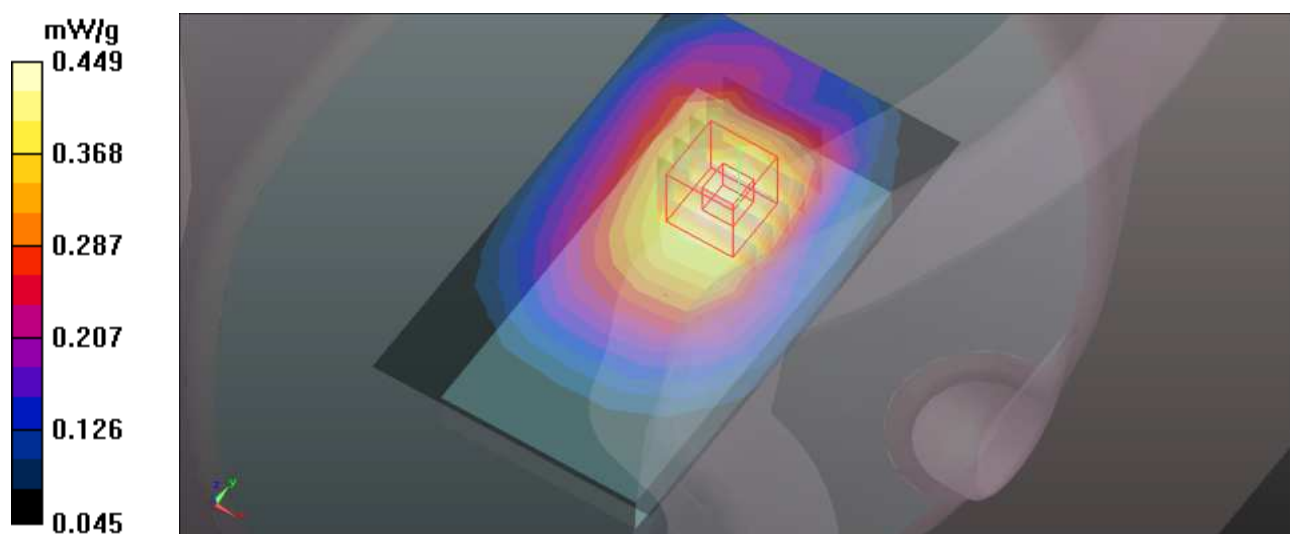

M34-Front-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.510 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.425 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

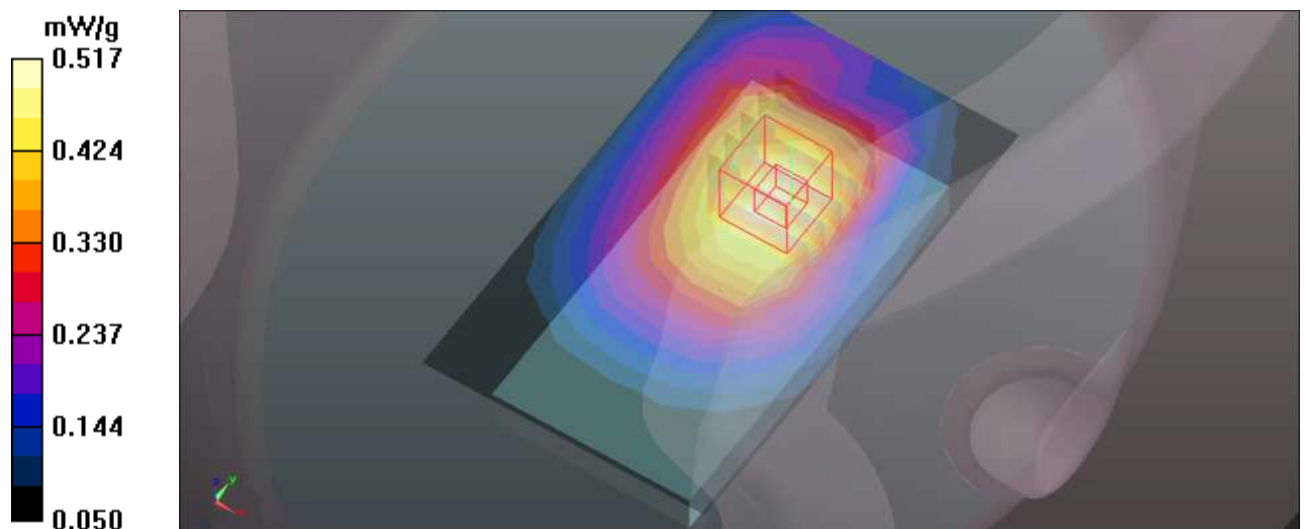

M35-Front-E-GPRS850 TS1-Ch190 / HT_3.7VDC

Communication System: E-GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.136 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.708 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.141 mW/g

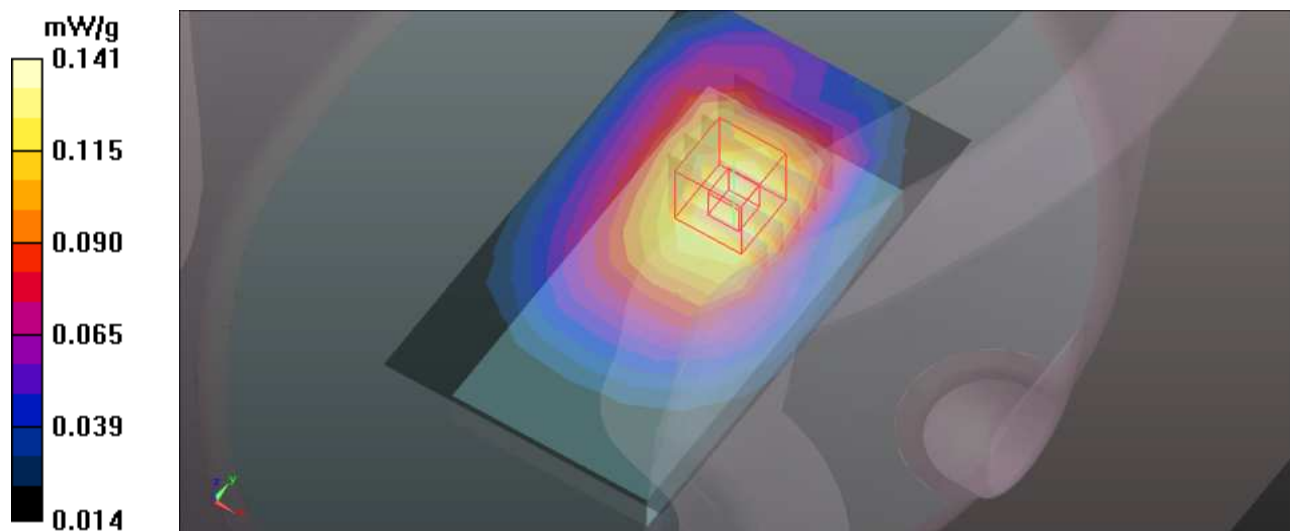

M36-Front-E-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: EGPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.272 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.584 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

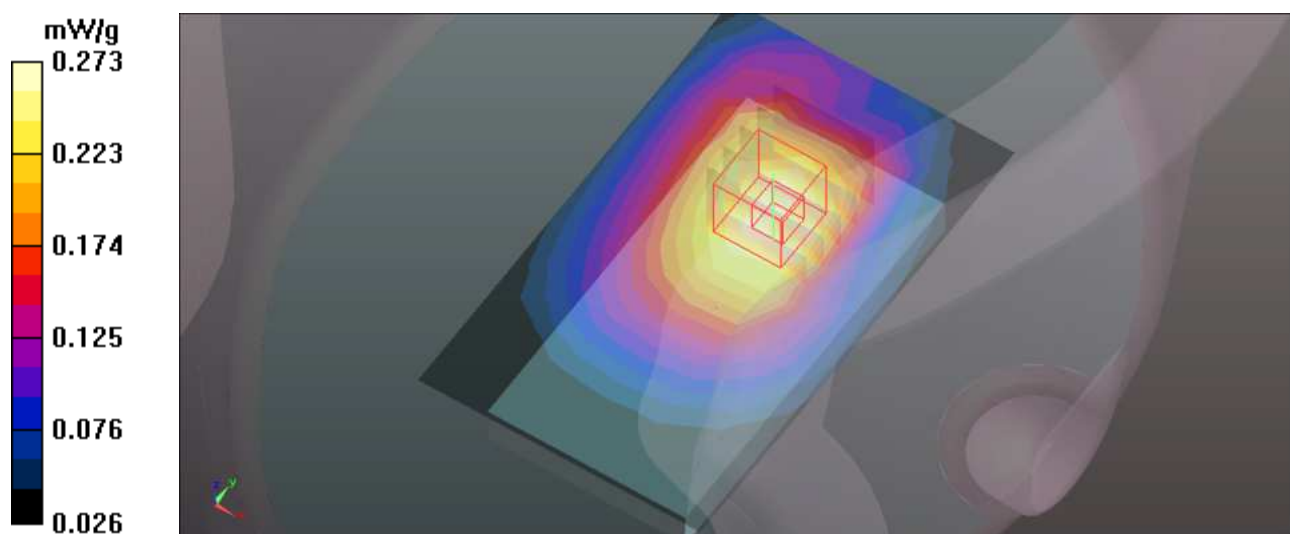

M37-Right-GSM850-Ch190 / HT_3.8VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (5x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.367 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.614 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

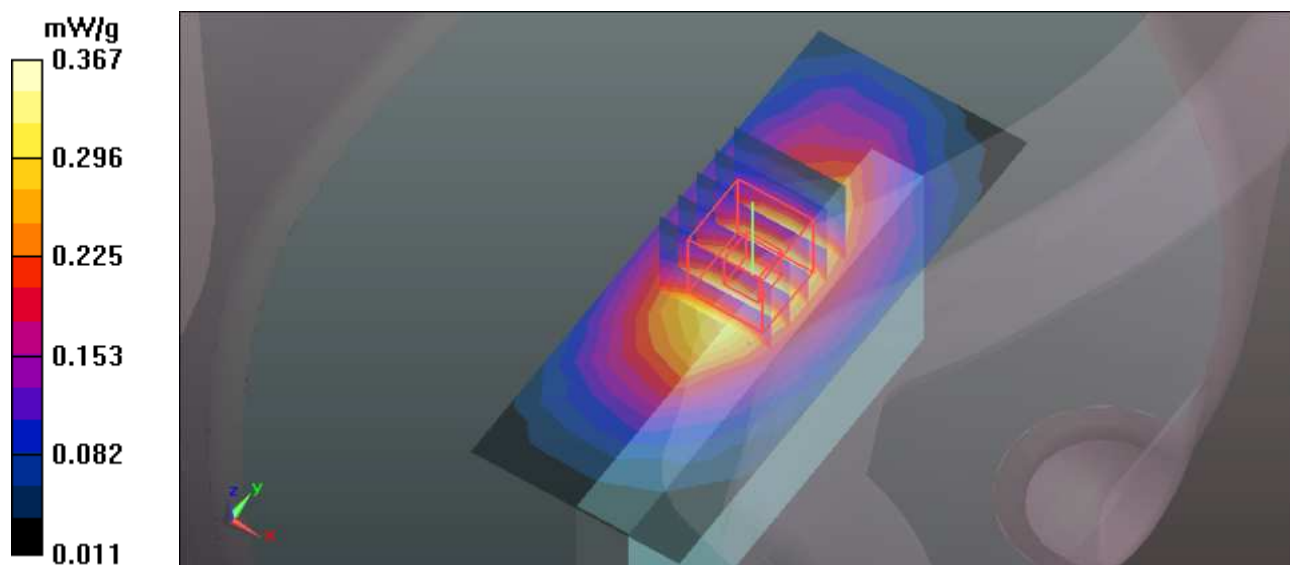

M38-Right-GPRS850 TS2-Ch190 / HT_3.8VDC Cotron

Communication System:GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section MSL/Flat Section 10mm Mid/Area Scan (5x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.414 mW/g

Flat-Section MSL/Flat Section 10mm Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.803 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

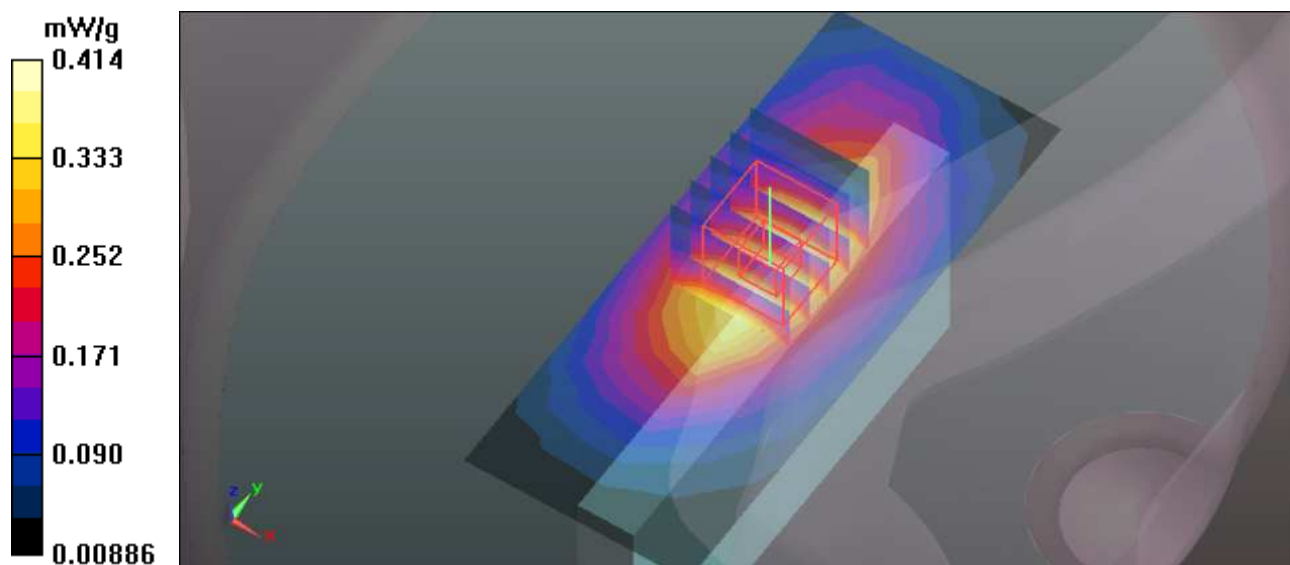

M39-Right edge-GSM850-Ch190 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.368 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.508 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

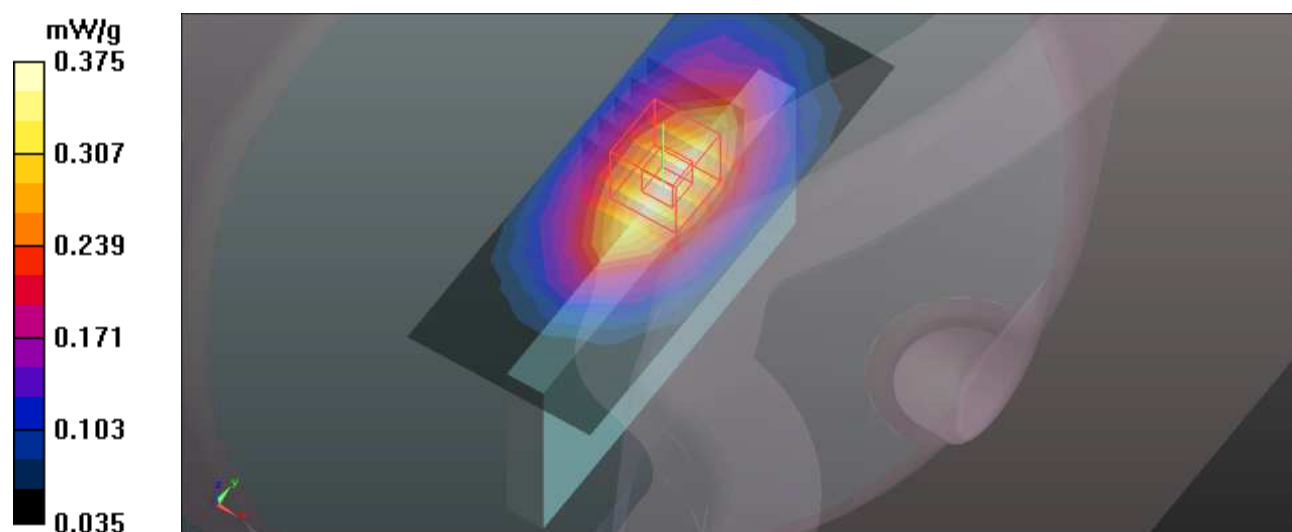

M40-Right edge-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.282 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.371 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

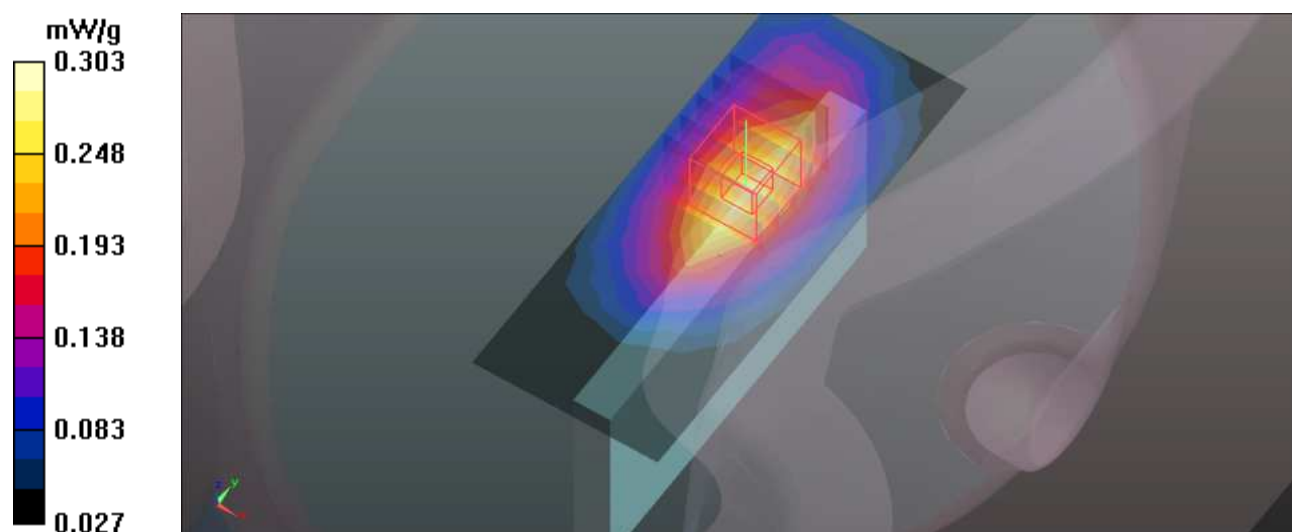

M41-Left edge-GSM850-Ch190 / HT_3.8VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.419 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.660 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

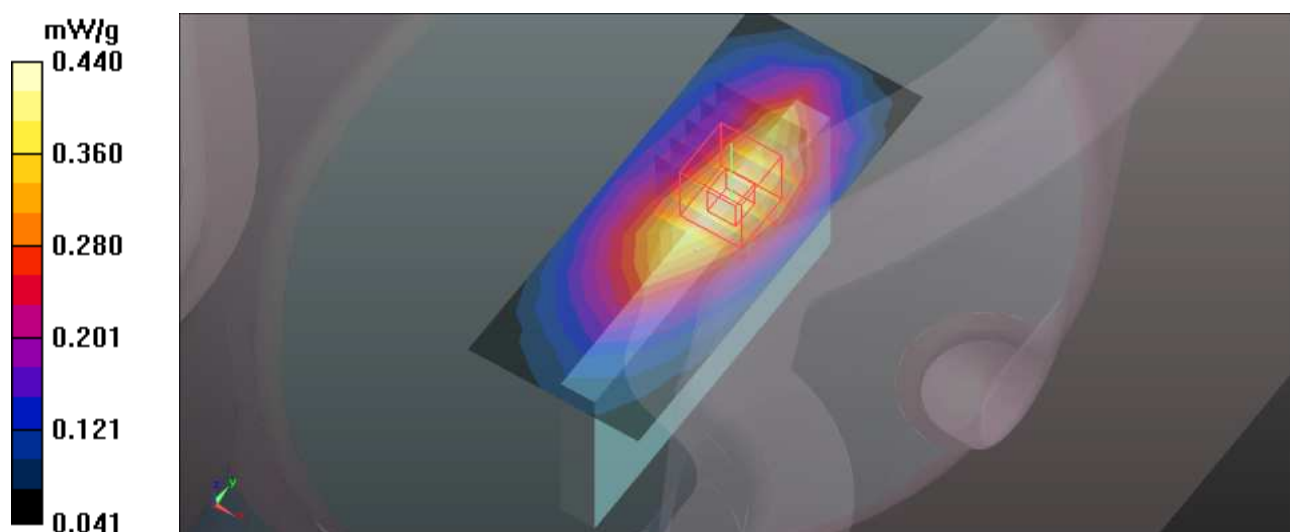

M42-Left edge-GPRS850 TS2-Ch190 / HT_3.8VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.403 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.452 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

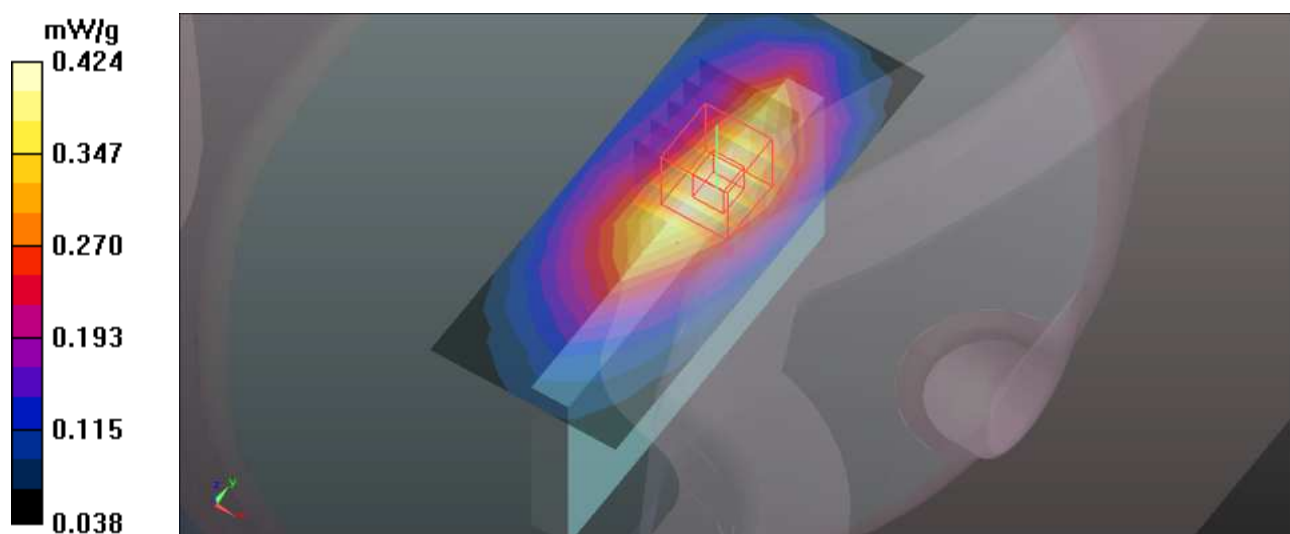

M43-Left edge-GSM850-Ch190 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.419 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.660 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

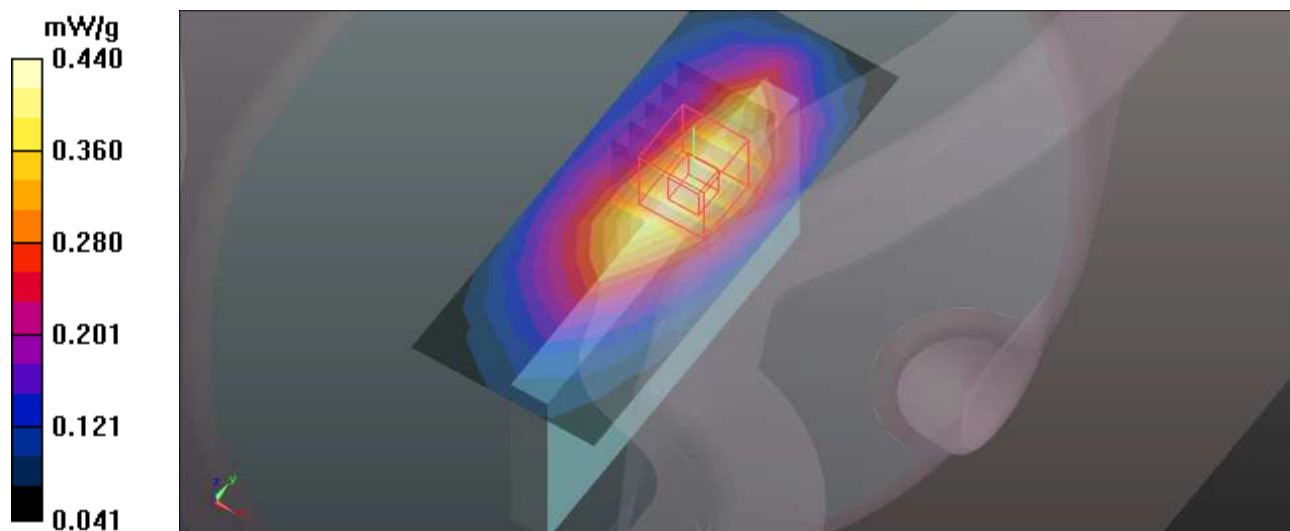

M44-Left edge-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.489 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.003 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

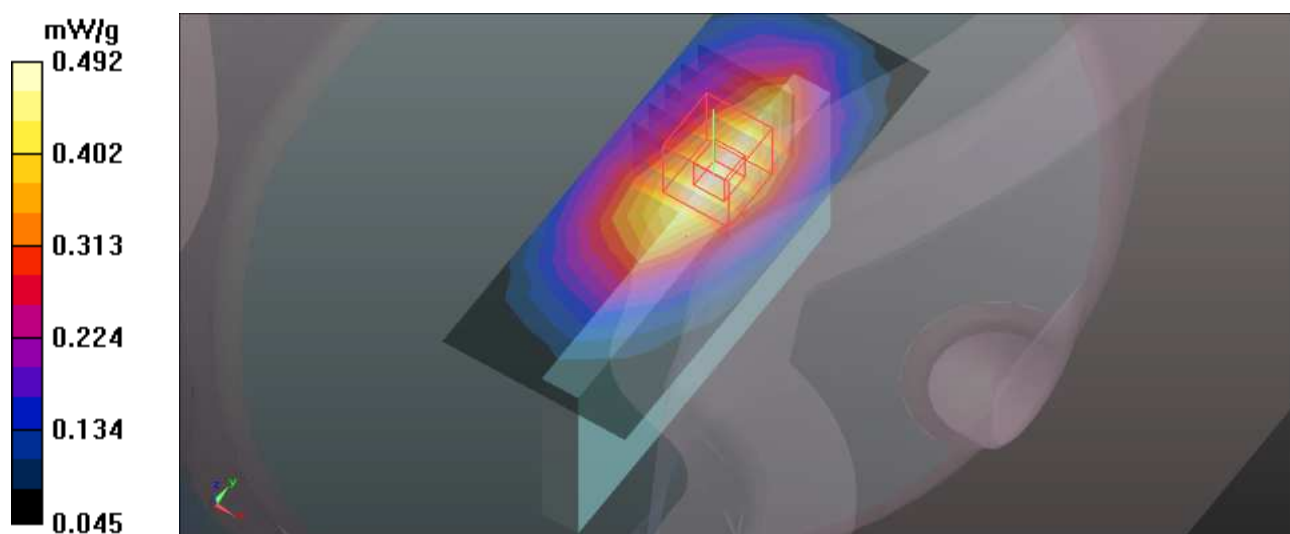

M45-Back edge-GSM850-Ch190 / HT_3.8VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.311 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.446 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.323 mW/g

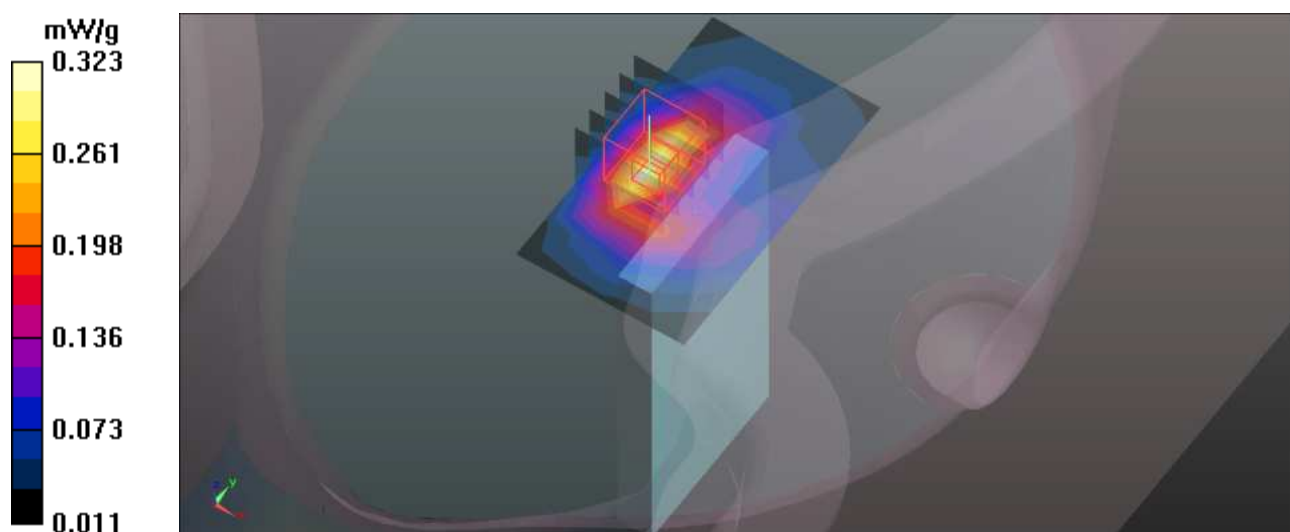

M46-Back edge-GPRS850 TS2-Ch190 / HT_3.8VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.341 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.823 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

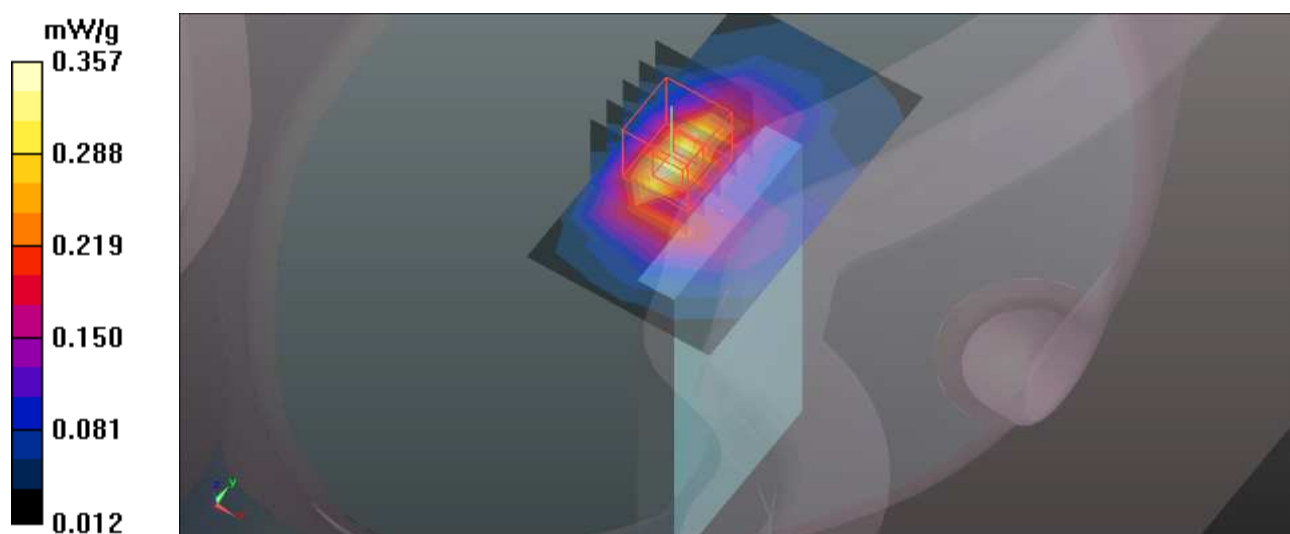

M47-Back edge-GSM850-Ch190 / HT_3.7VDC

Communication System: GSM850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.351 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.879 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.371 mW/g

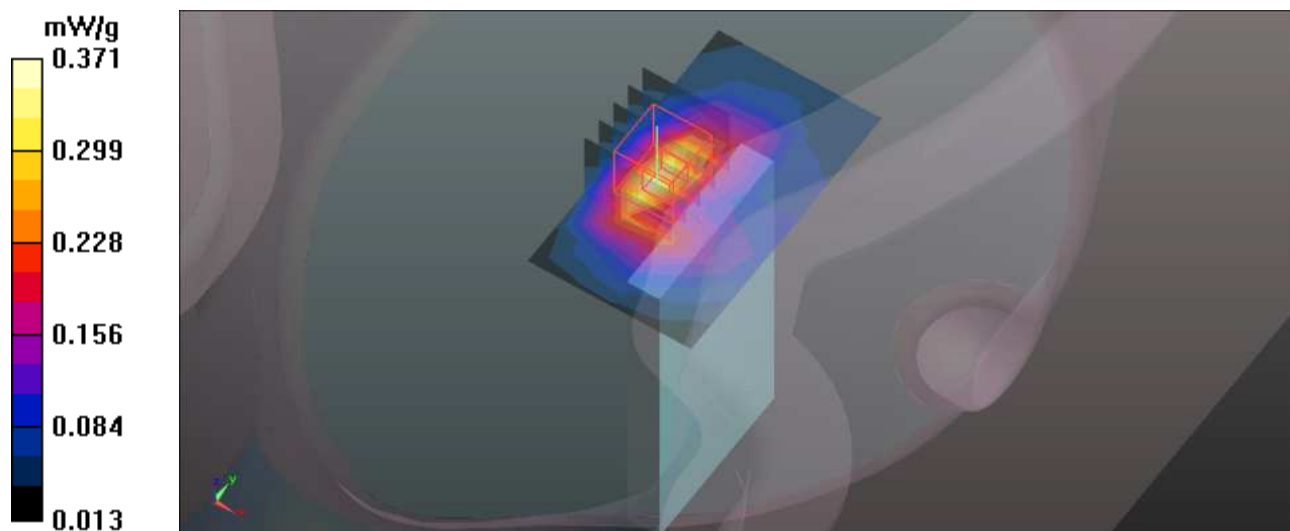

M48-Back edge-GPRS850 TS2-Ch190 / HT_3.7VDC

Communication System: GPRS850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.351 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.930 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.367 mW/g

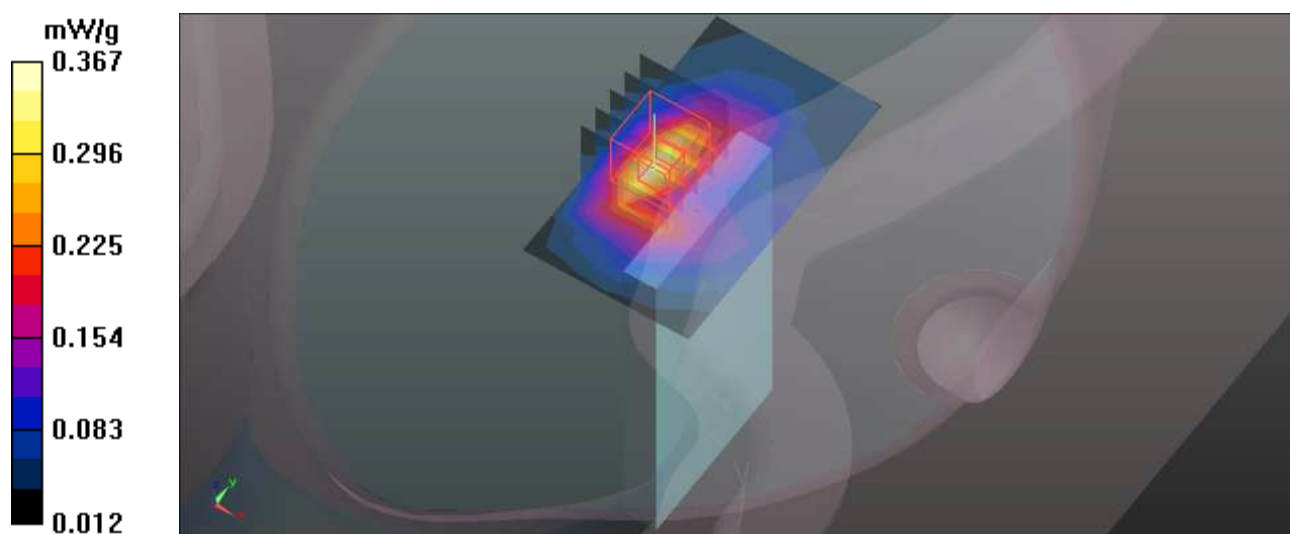

M49-Bottom-WCDMA850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.634 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.626 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.405 mW/g

Maximum value of SAR (measured) = 0.646 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.626 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

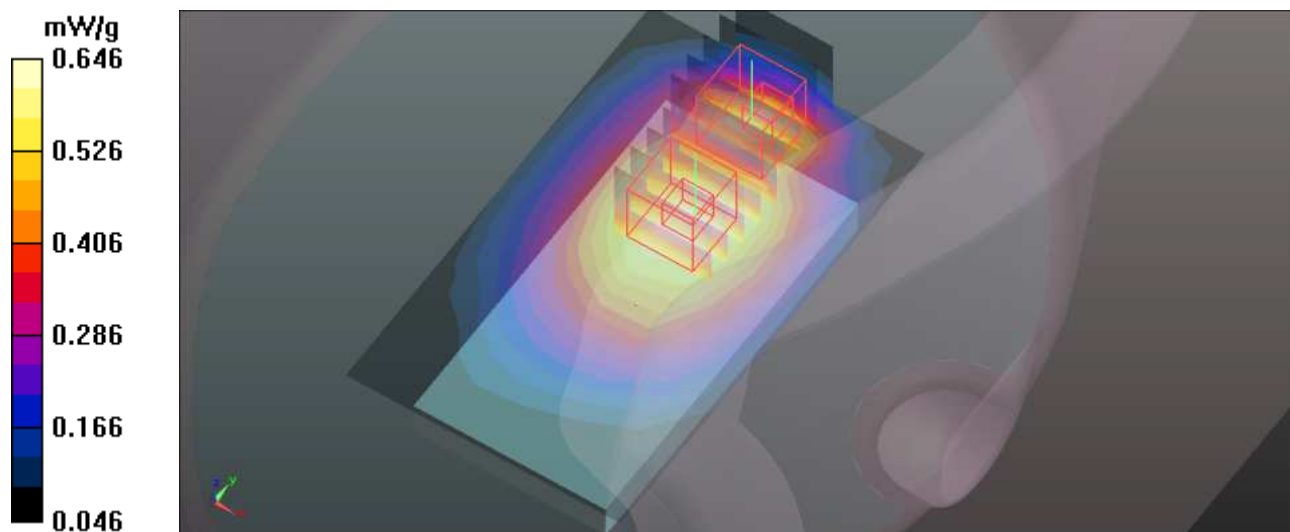

M50-Bottom-WCDMA850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.636 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.289 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.462 mW/g

Maximum value of SAR (measured) = 0.732 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.289 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.011 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.788 mW/g

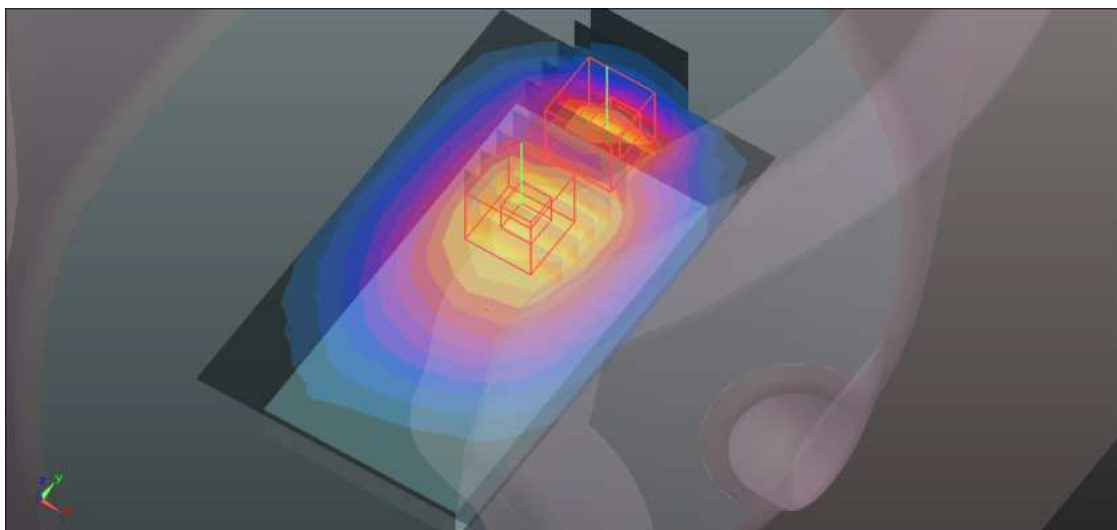

M51-Front-WCDMA850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.305 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.749 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

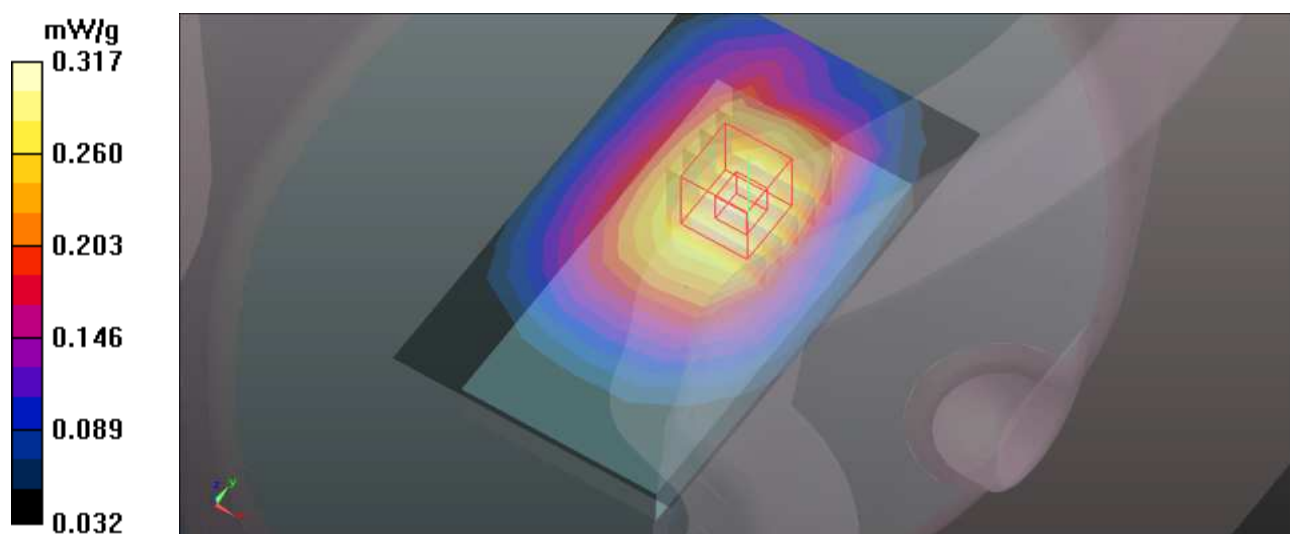

M52-Front-WCDMA850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.296 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.642 V/m; Power Drift = -0.0083 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

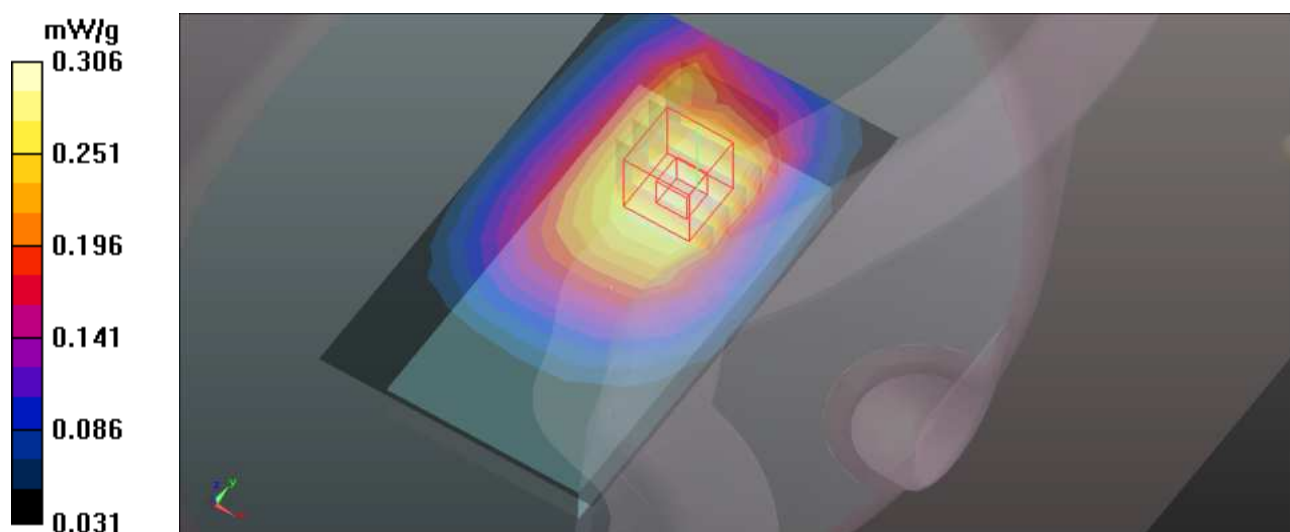

M53-Right edge-WCDMA850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.308 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.564 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.302 mW/g

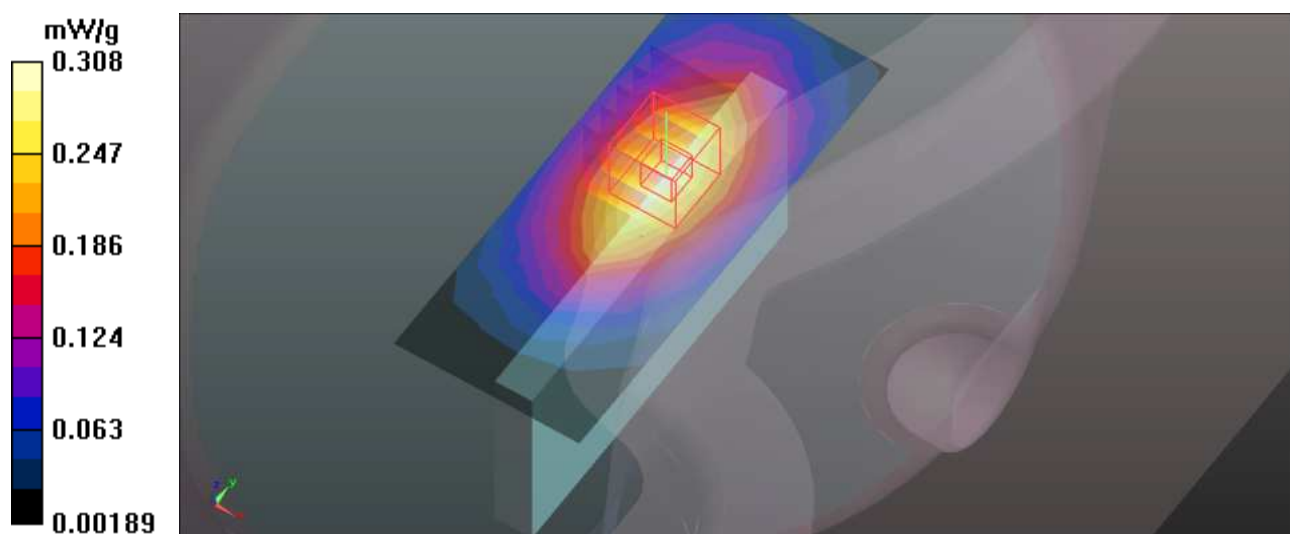

M54-Right edge-WCDMA850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.256 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.916 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

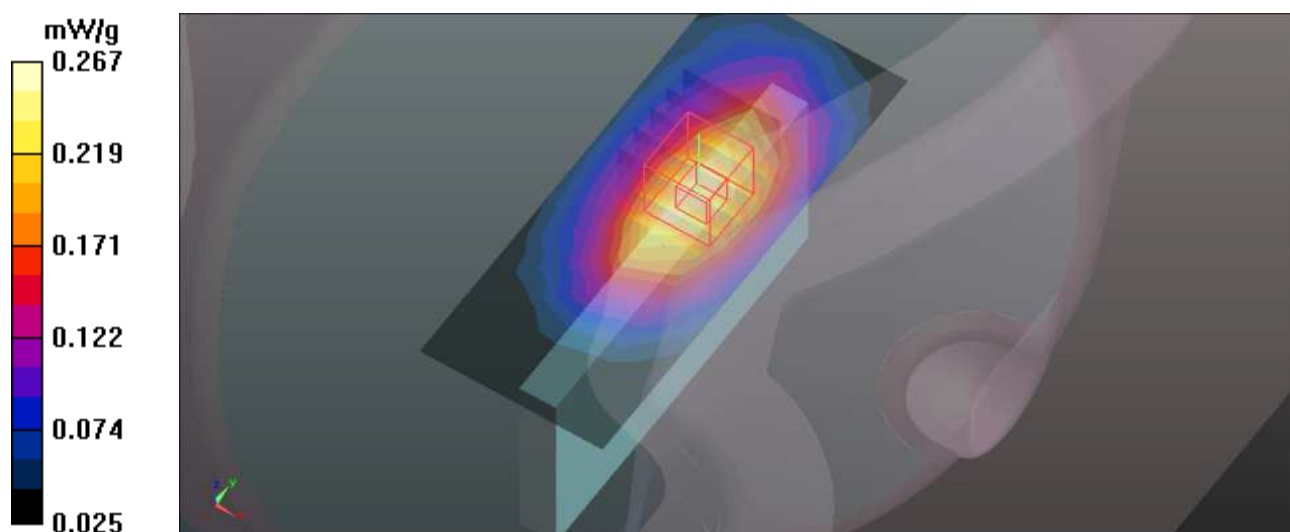

M55-Left edge-WCDMA850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.411 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.362 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

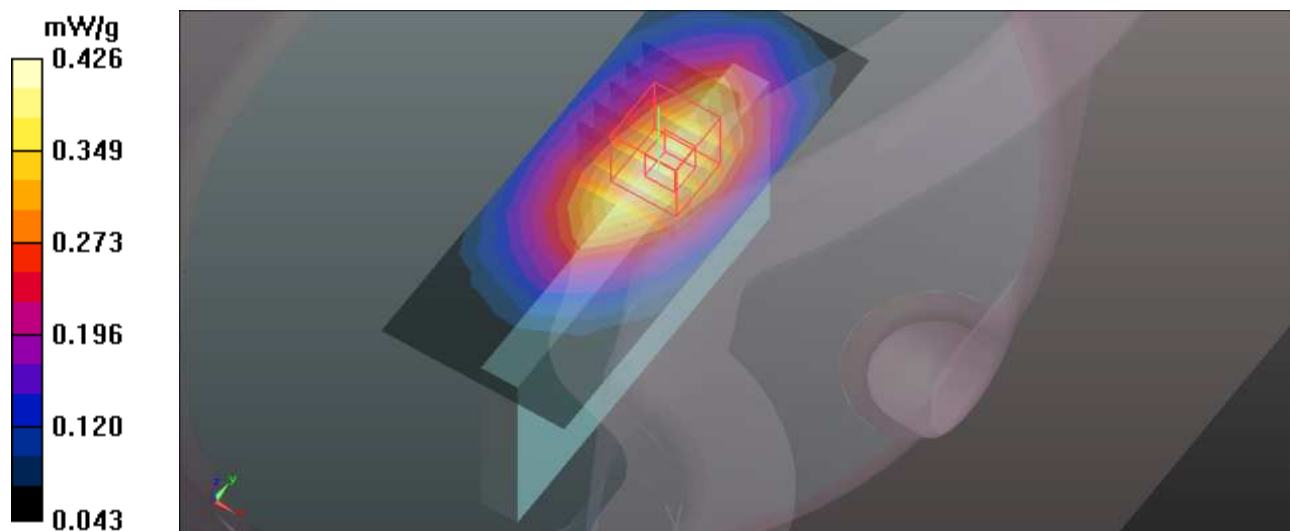

M56-Left edge-WCDMA850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid Cotron/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.381 mW/g


Body Position - Mid Cotron/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.714 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

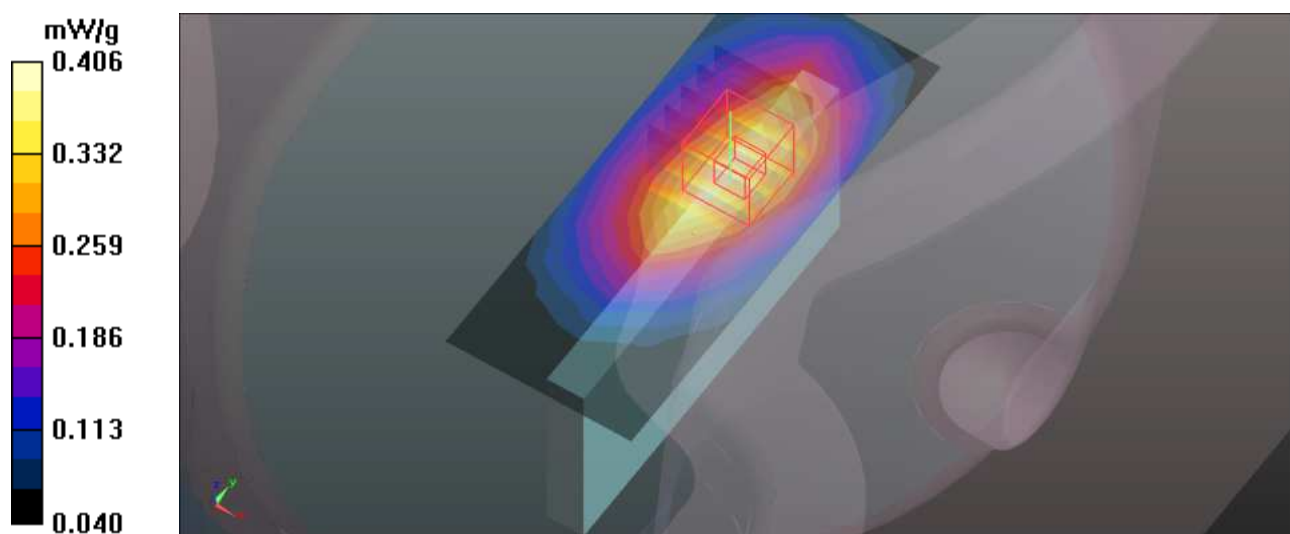

M57-Back edge-WCDMA850-Ch4183 / HT_3.8VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.157 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.659 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.156 mW/g

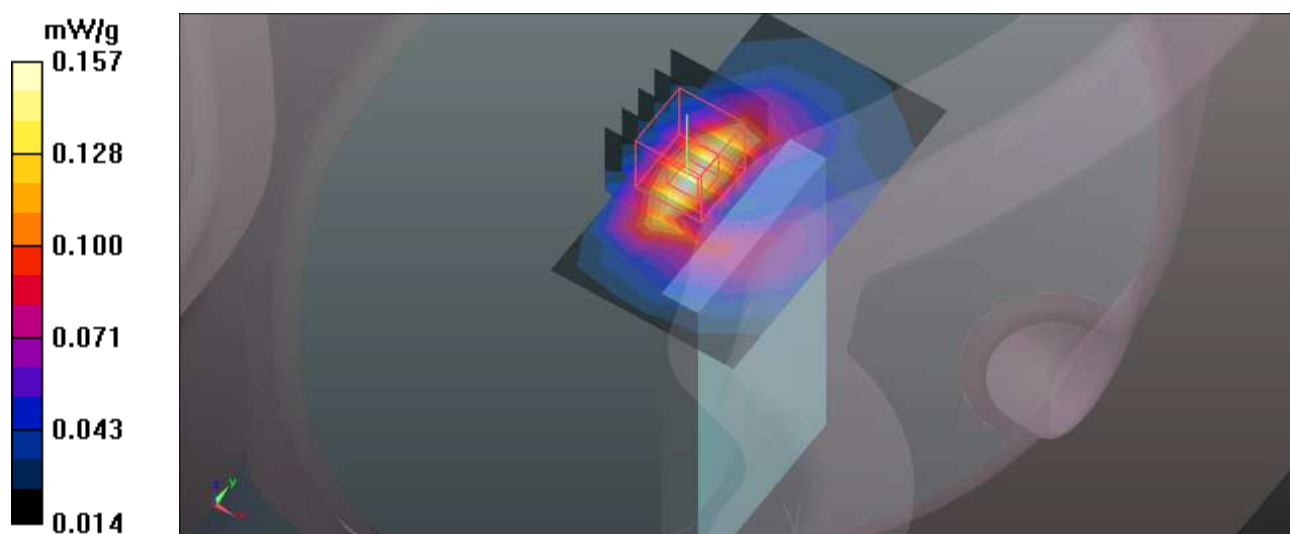

M58-Back edge-WCDMA850-Ch4183 / HT_3.7VDC

Communication System: WCDMA850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.175 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.079 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

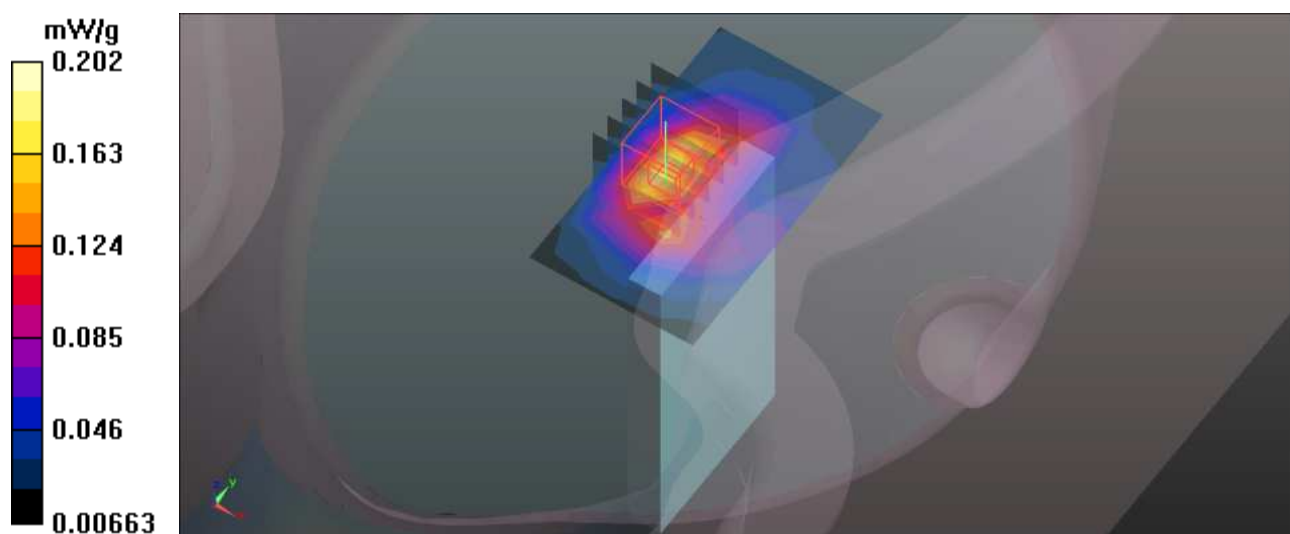

M59-Right Head-Cheek-PCS1900-Ch661 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.35$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.394 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.458 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.390 mW/g


Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.458 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

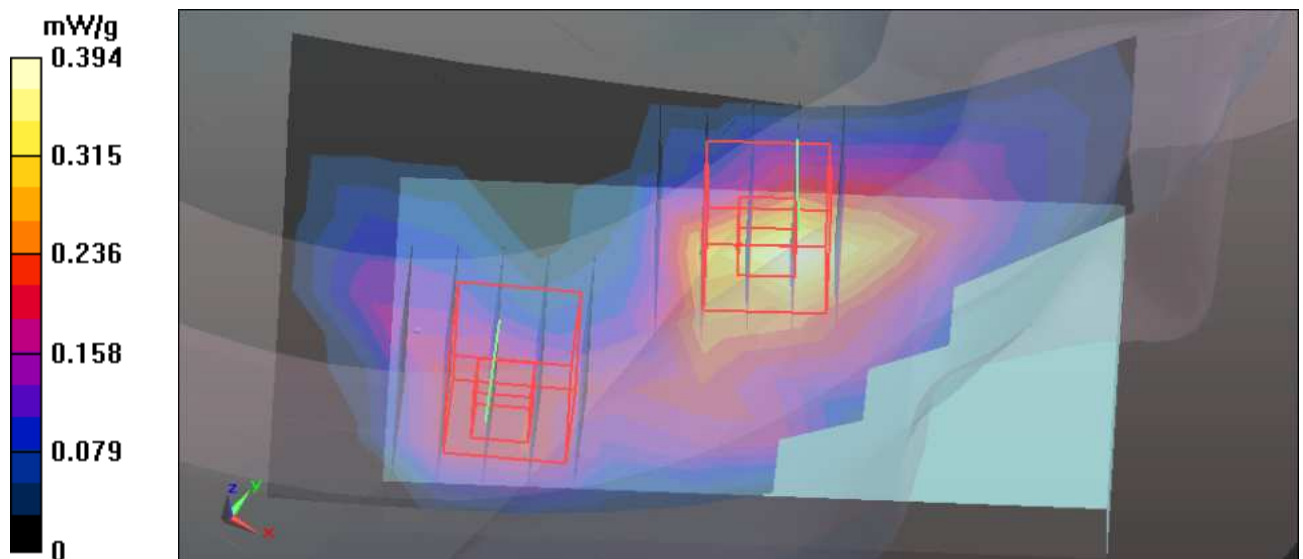



M60-Right Head-Tilt-PCS1900-Ch661 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.282 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.769 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.292 mW/g



Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.769 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

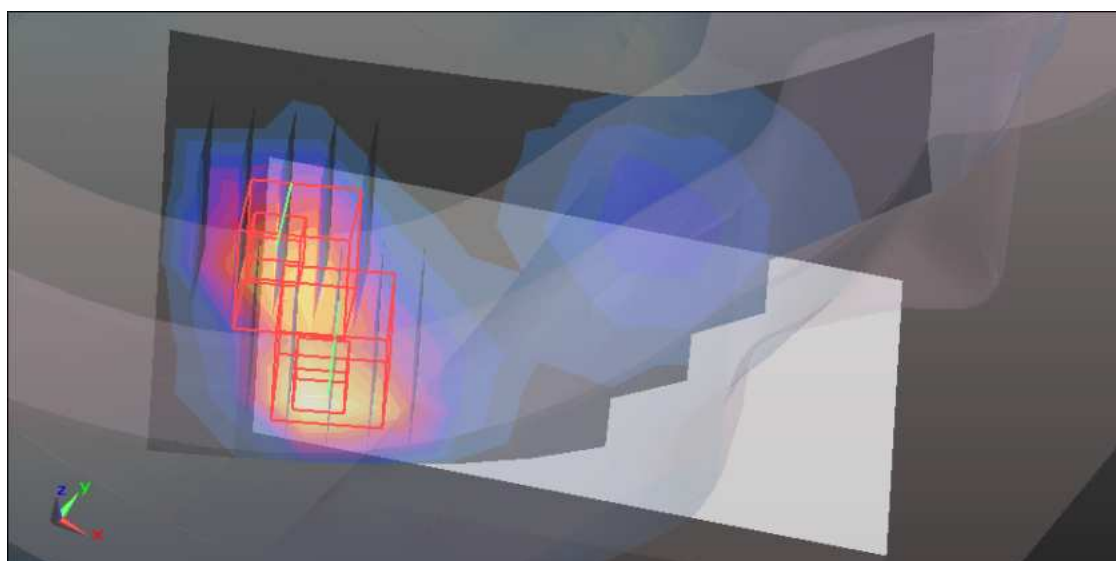

M61-Left Head-Cheek-PCS1900-Ch661 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3
 Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.35$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.337 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.400 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.345 mW/g



Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.400 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

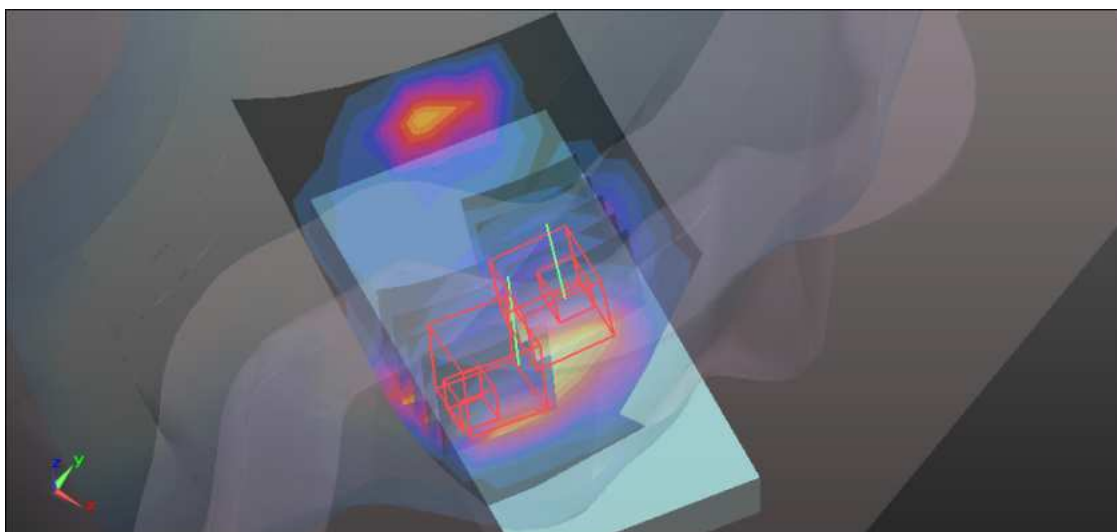

M62-Left Head-Tilt-PCS1900-Ch661 / HT_3.8VDC

Communication System: Generic GSM ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.291 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.399 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.470 mW/g

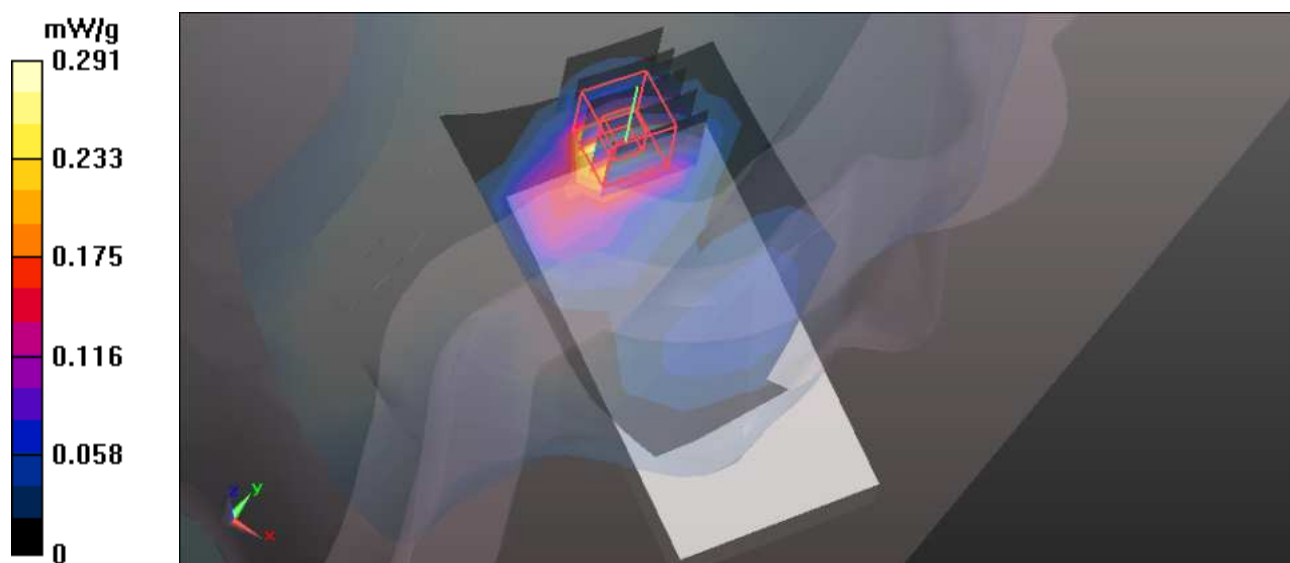

M63-Right Head-Cheek-PCS1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.583 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.354 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.580 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.354 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.481 mW/g

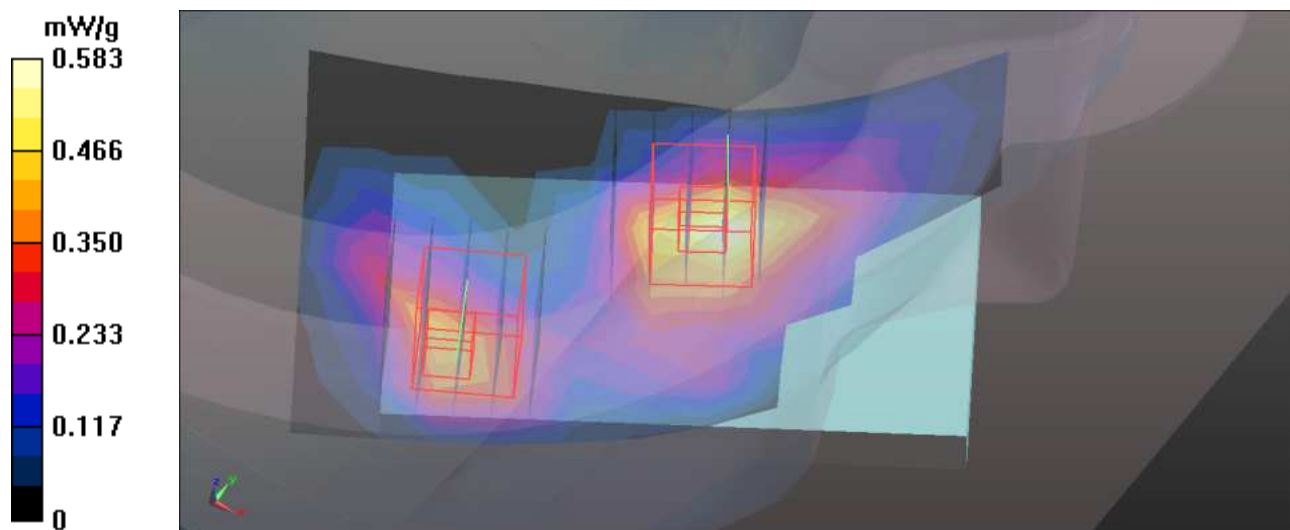

M64-Right Head-Tilt-PCS1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.856 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.406 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.856 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

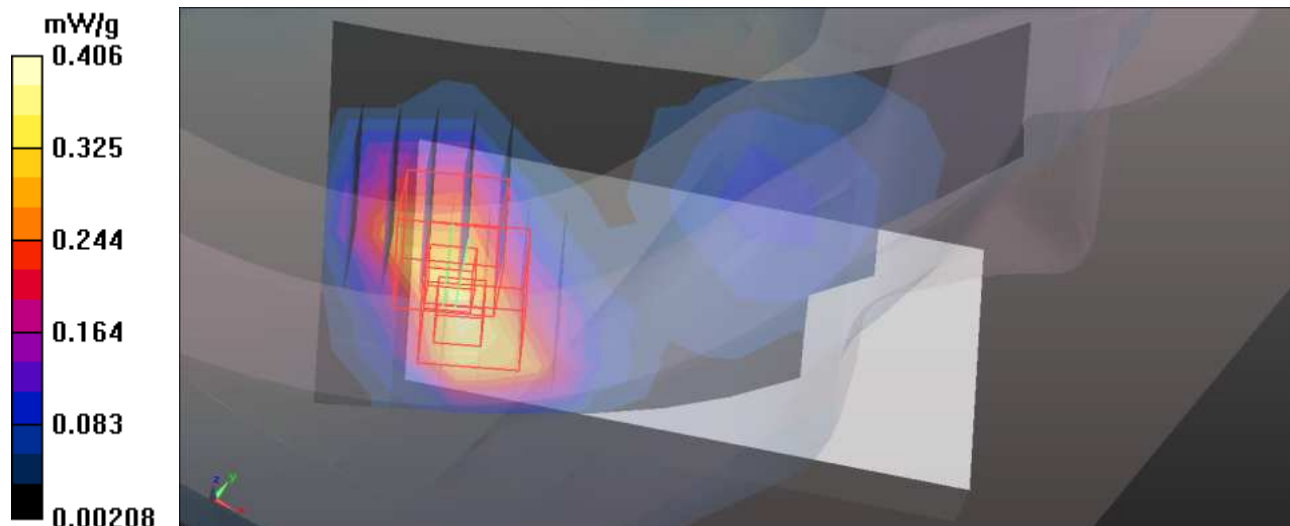

M65-Left Head-Cheek-PCS1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.484 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.343 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.534 mW/g

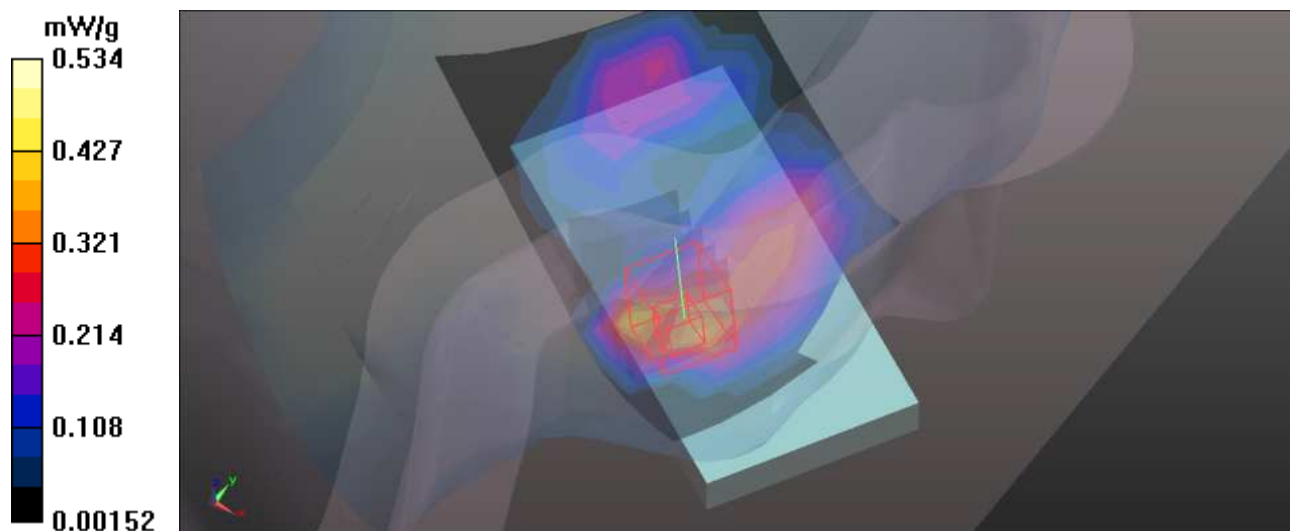

M66-Left Head-Tilt-PCS1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³


Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.312 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.734 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.616 W/kg
SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.157 mW/g
Maximum value of SAR (measured) = 0.458 mW/g

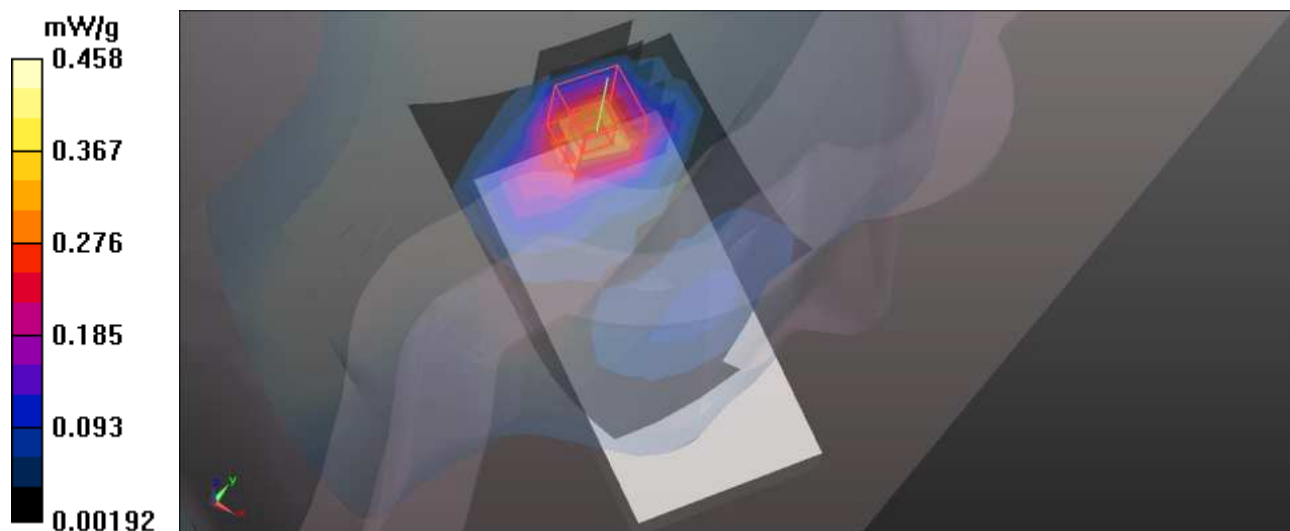

M67-Right Head-Cheek-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.35$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.614 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.734 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.650 mW/g


Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.734 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

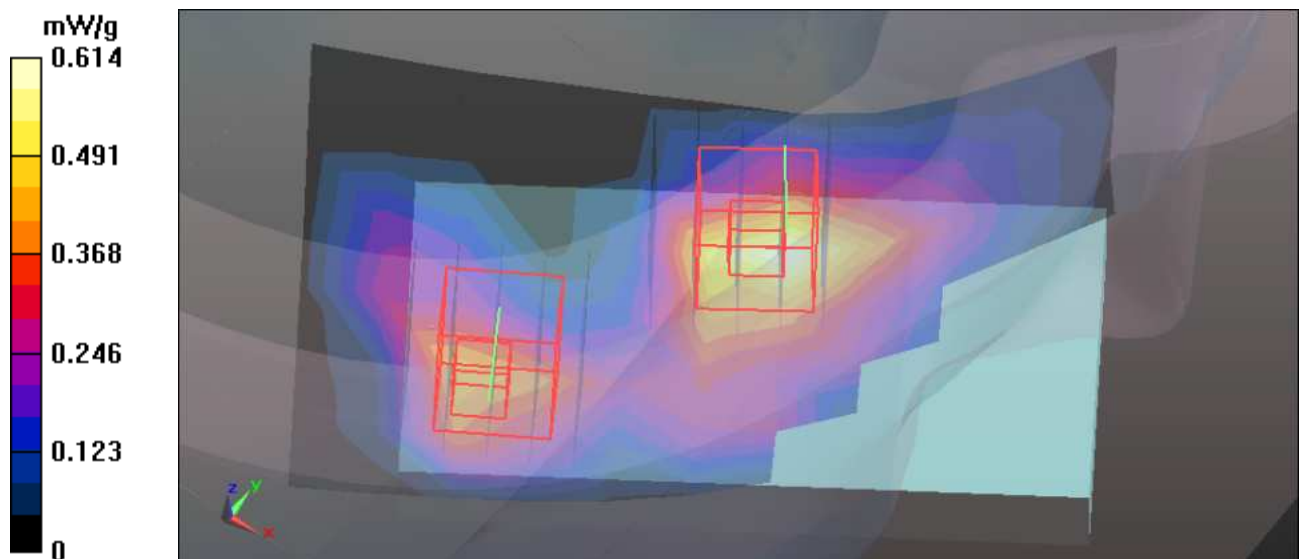

M68-Right Head-Tilt-WCDMA 1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.447 mW/g

Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.837 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.448 mW/g



Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.837 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.432 mW/g

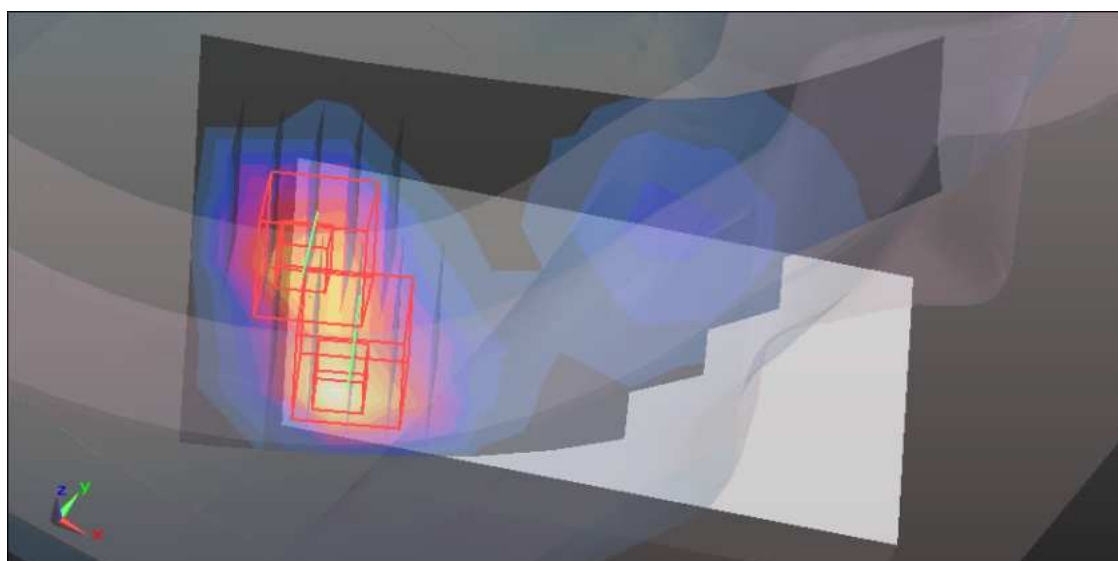

M69-Left Head-Cheek-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1
 Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.35$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK
 DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (7x11x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.426 mW/g

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.081 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.491 mW/g



Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.081 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.600 mW/g

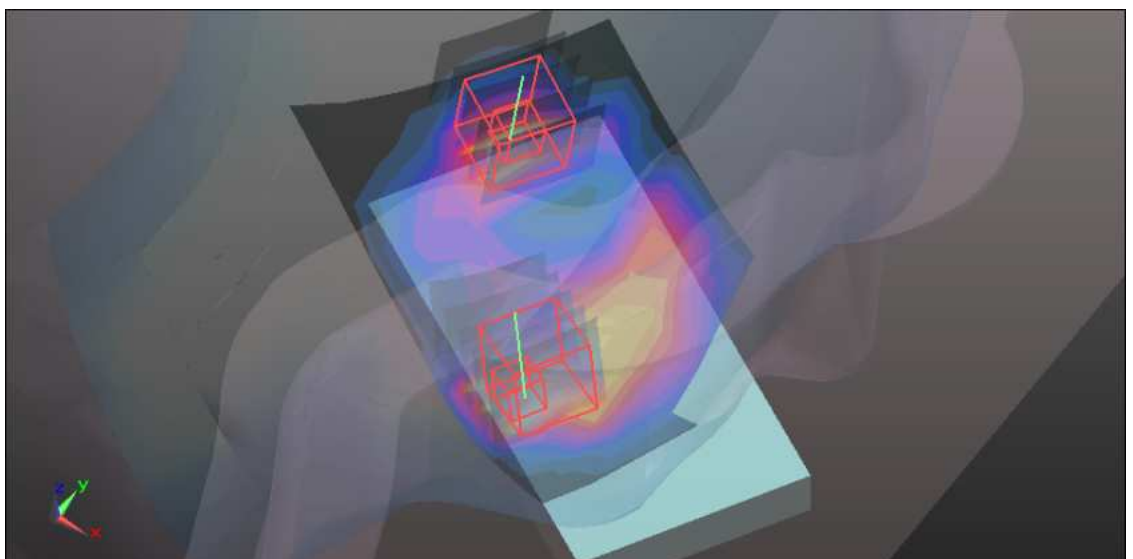

M70-Left Head-Tilt-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left-Hand-Side HSL/Tilt Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.052 mW/g

Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.059 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.062 W/kg

SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.027 mW/g


Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.059 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.039 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

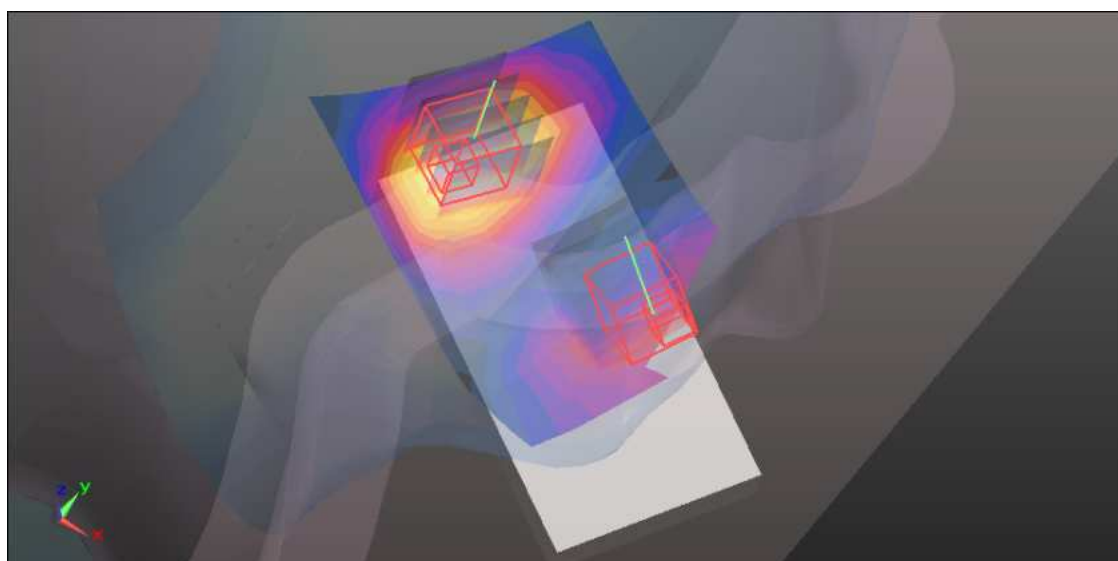

M71-Right Head-Cheek-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.893 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.633 V/m; Power Drift = -0.0066 dB

Peak SAR (extrapolated) = 1.117 W/kg

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.418 mW/g

Maximum value of SAR (measured) = 0.876 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.633 V/m; Power Drift = -0.0066 dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.657 mW/g

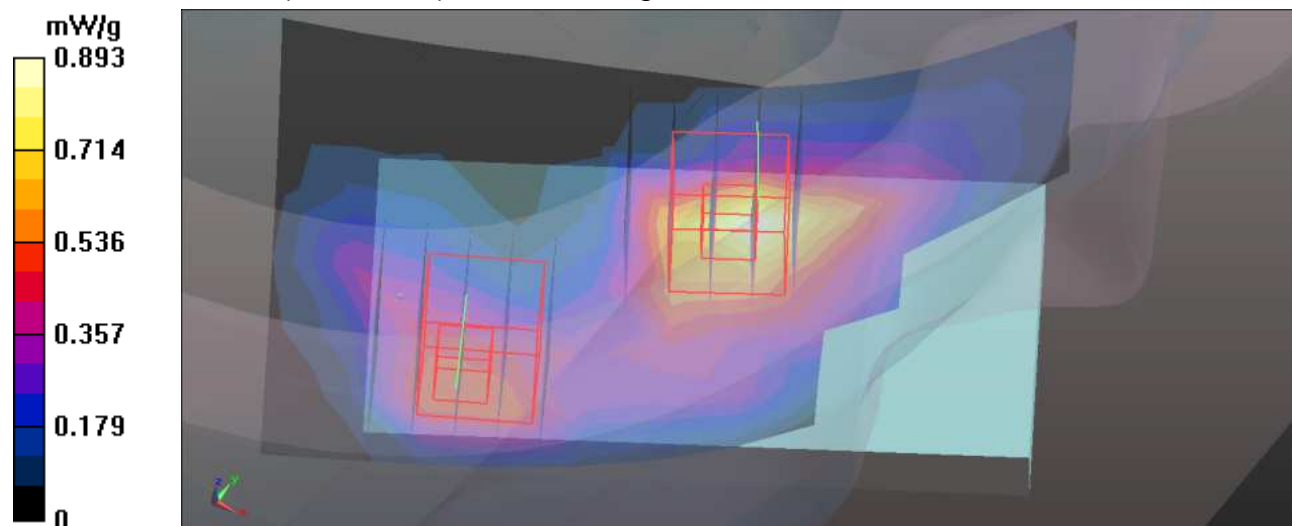

M72-Right Head-Tilt-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1
 Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.35$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.517 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.012 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.598 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.012 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.248 mW/g

Maximum value of SAR (measured) = 0.572 mW/g

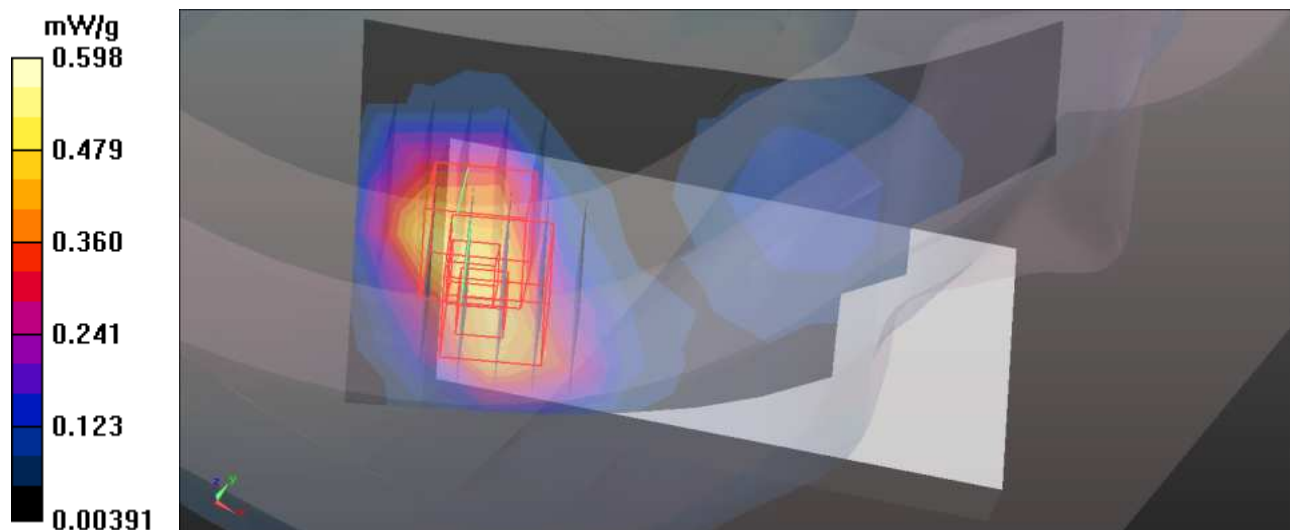

M73-Left Head-Cheek-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.788 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.397 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.245 W/kg

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.866 mW/g

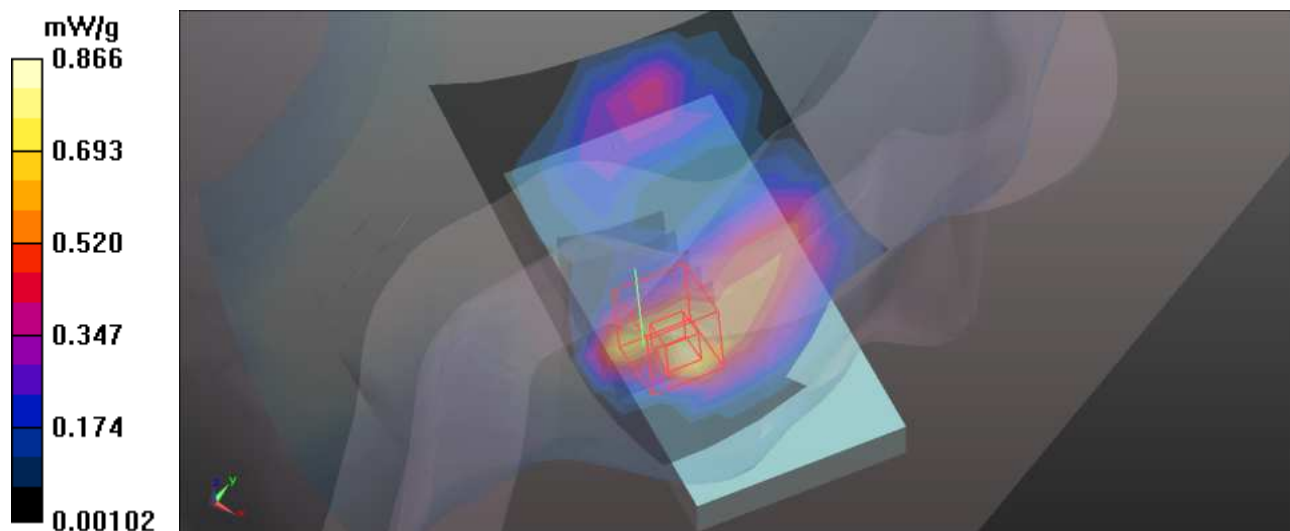

M74-Left Head-Tilt-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.455 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.281 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.664 mW/g

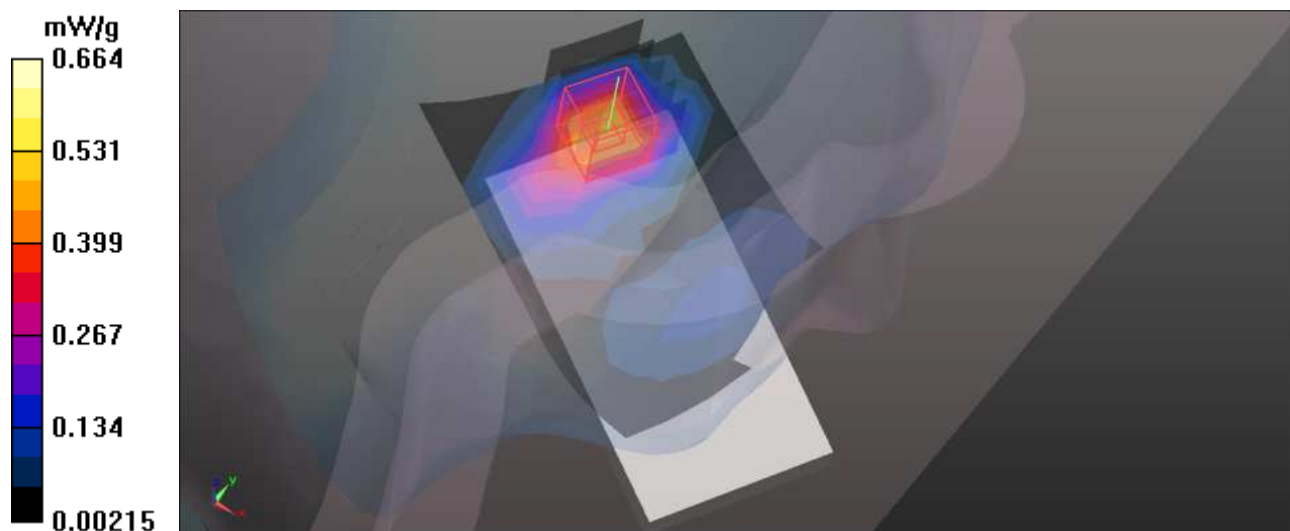

M75-Bottom-GSM1900-Ch661 / HT_3.8VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.490 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.667 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

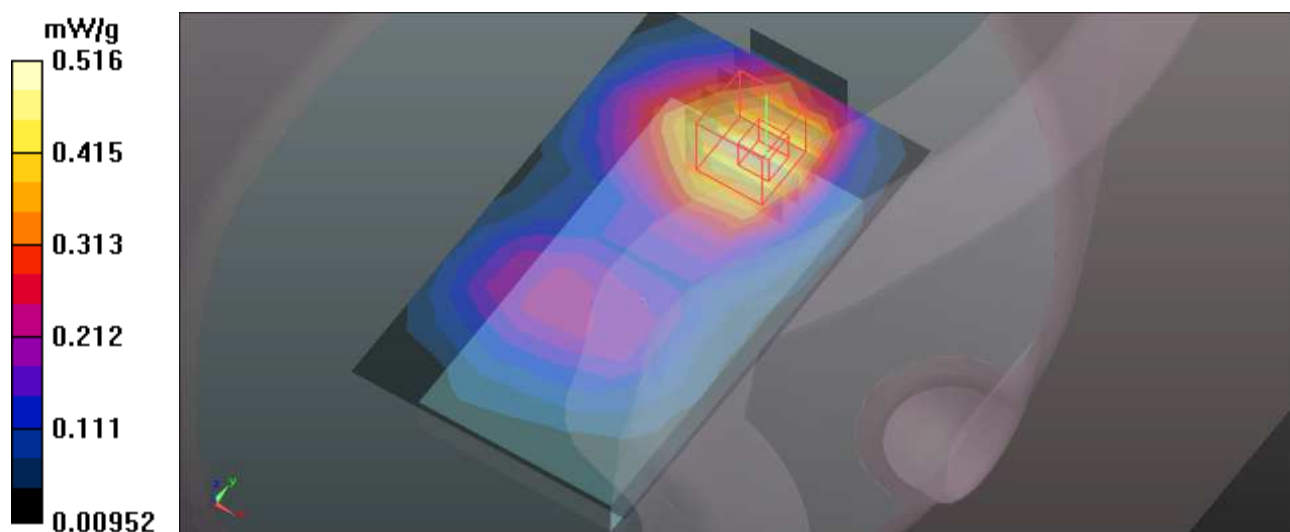

M76-Bottom-GPRS1900 TS1-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.454 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.400 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

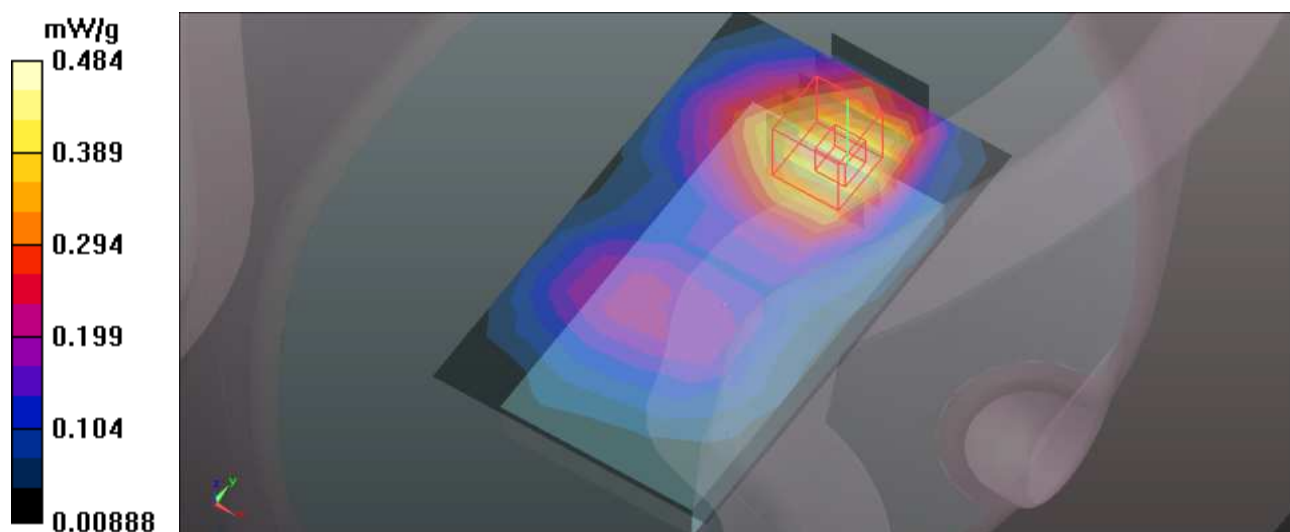



M77-Bottom-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.796 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.605 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.050 W/kg

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.841 mW/g

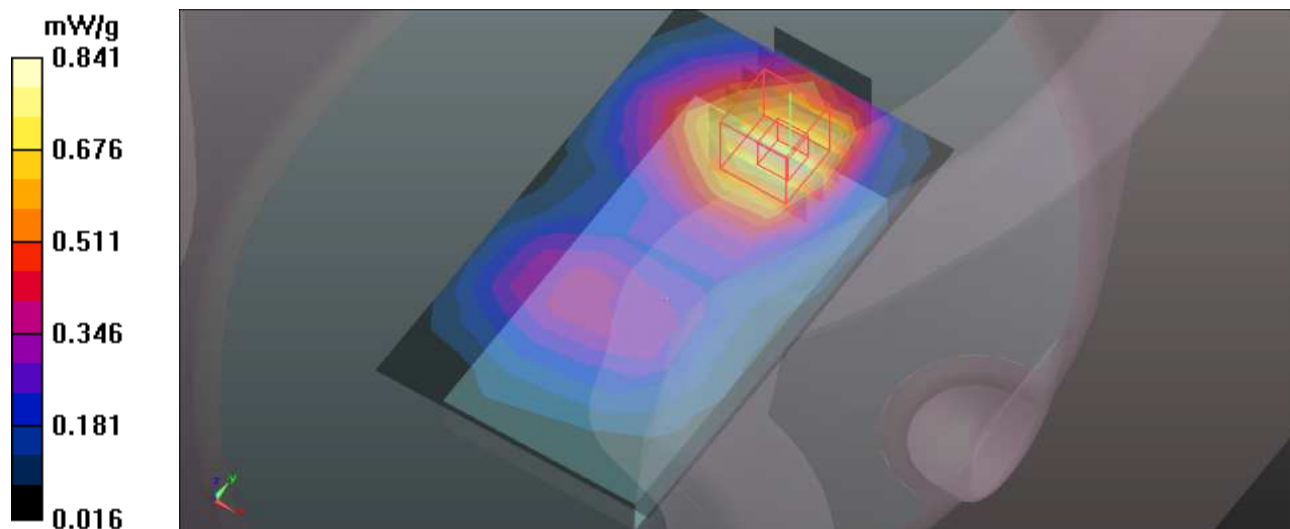

M78-Bottom-E-GPRS1900 TS1-Ch661 / HT_3.8VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.413 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

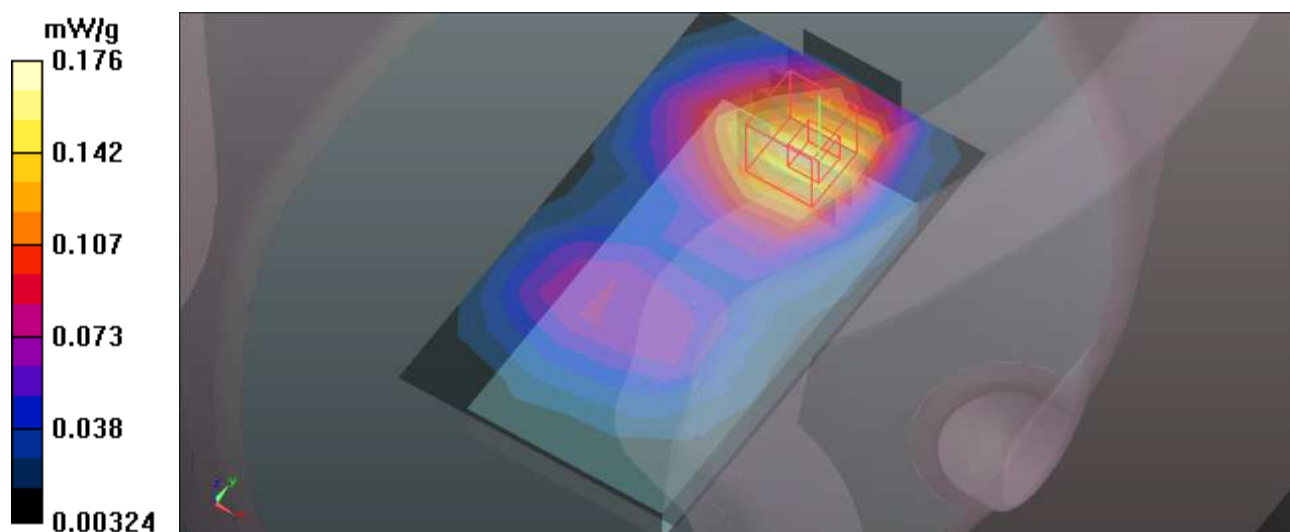

M79-Bottom-E-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.297 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.554 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.320 mW/g

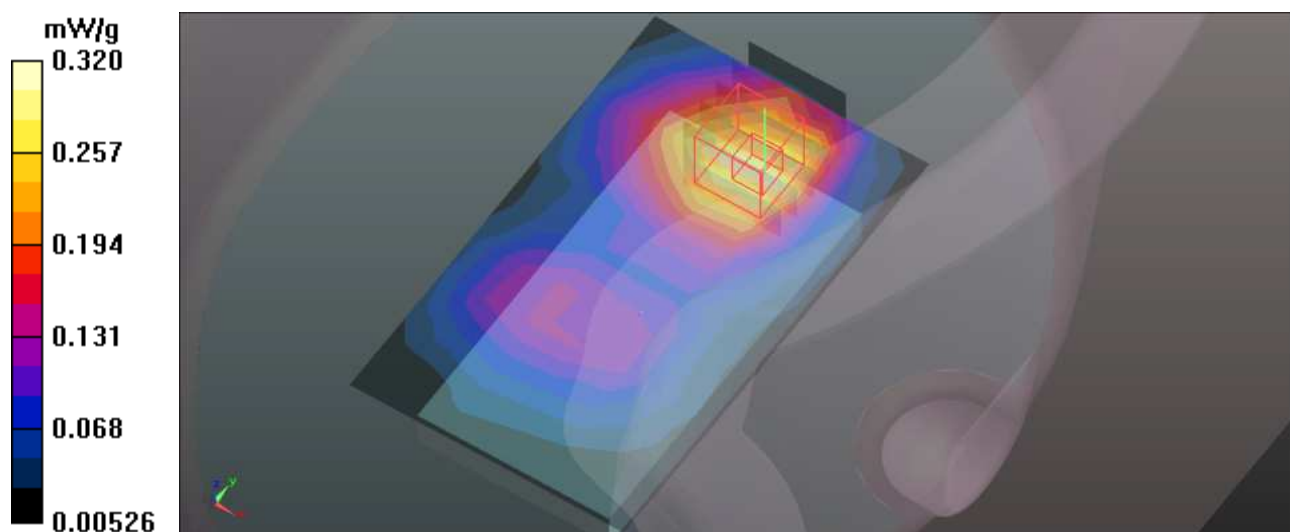



M80-Bottom-GSM1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.599 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.022 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

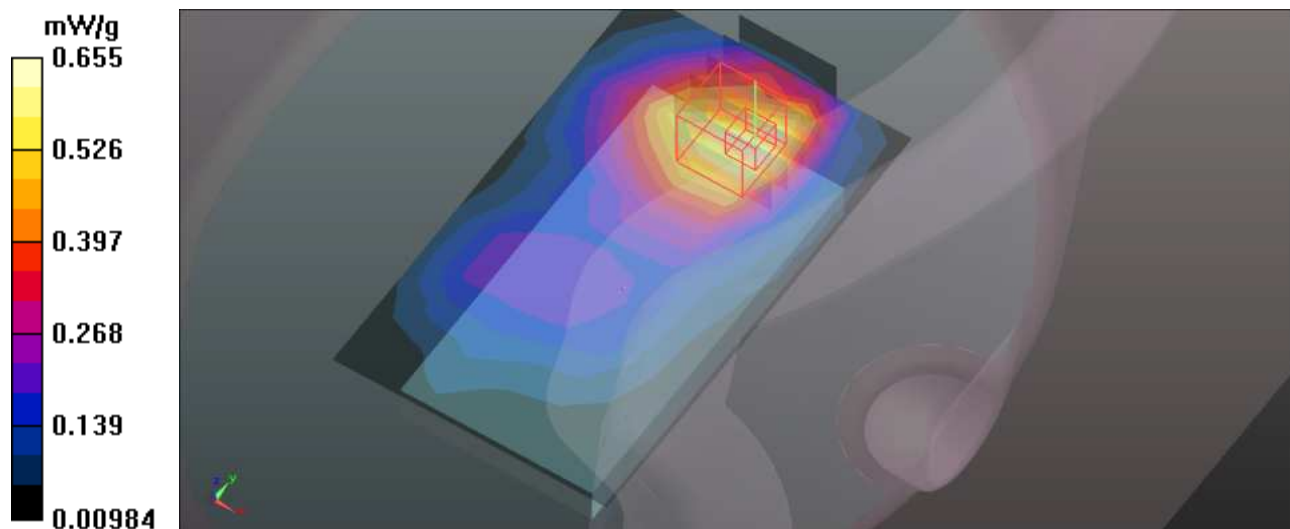

M81-Bottom-GPRS1900 TS1-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.579 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.424 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

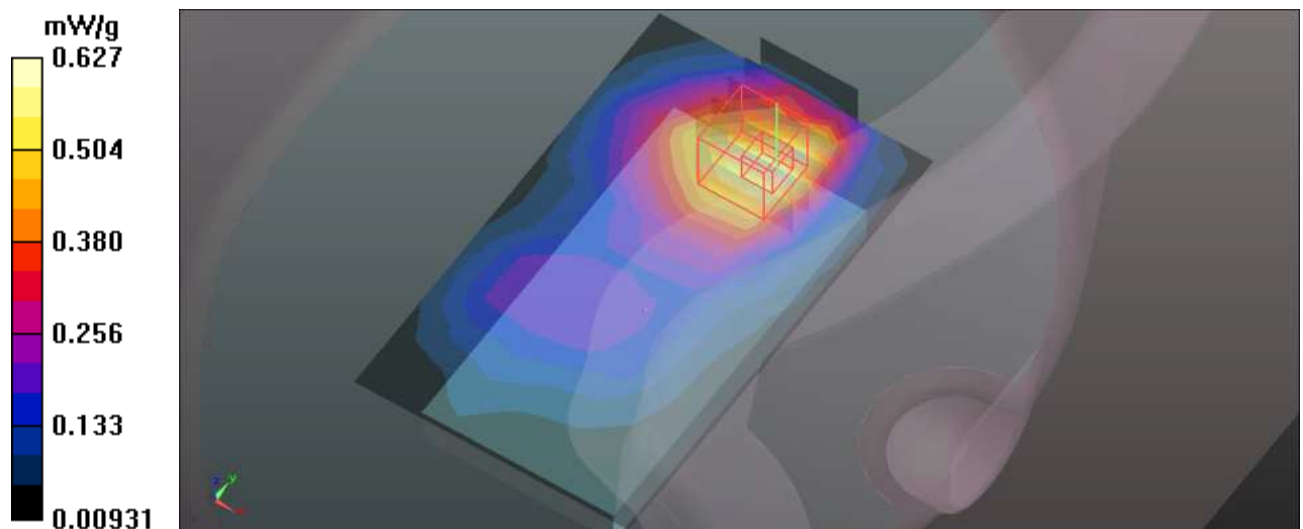

M82-Bottom-GPRS1900 TS2-Ch512 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1850.2 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Low /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 mW/g


Body Position - Low /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.321 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.005 W/kg

SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

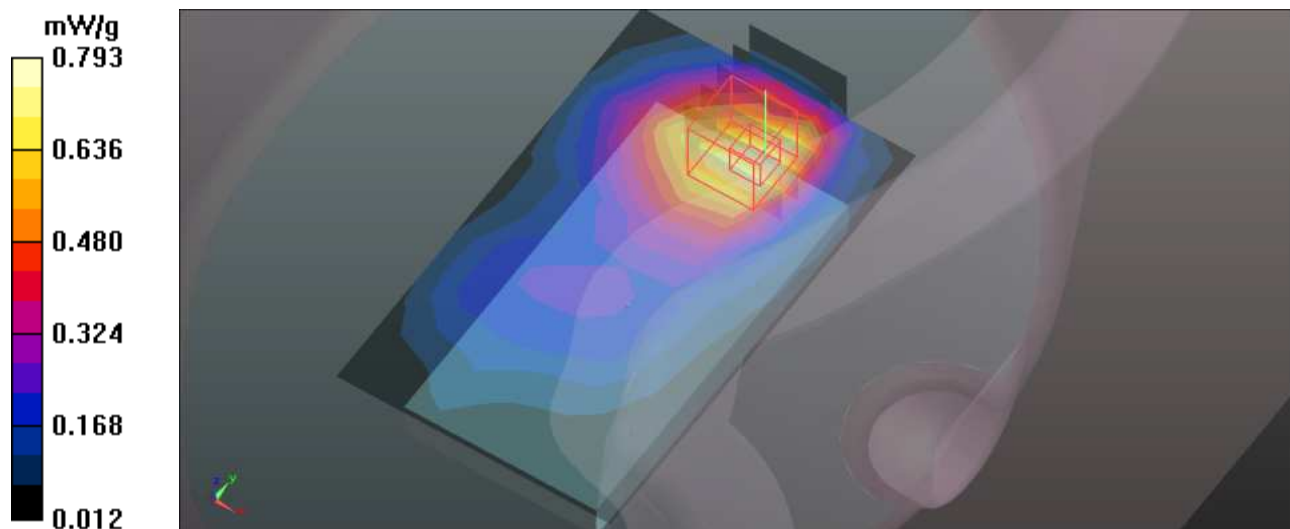

M82-Bottom-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.069 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.455 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.436 W/kg

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 1.136 mW/g

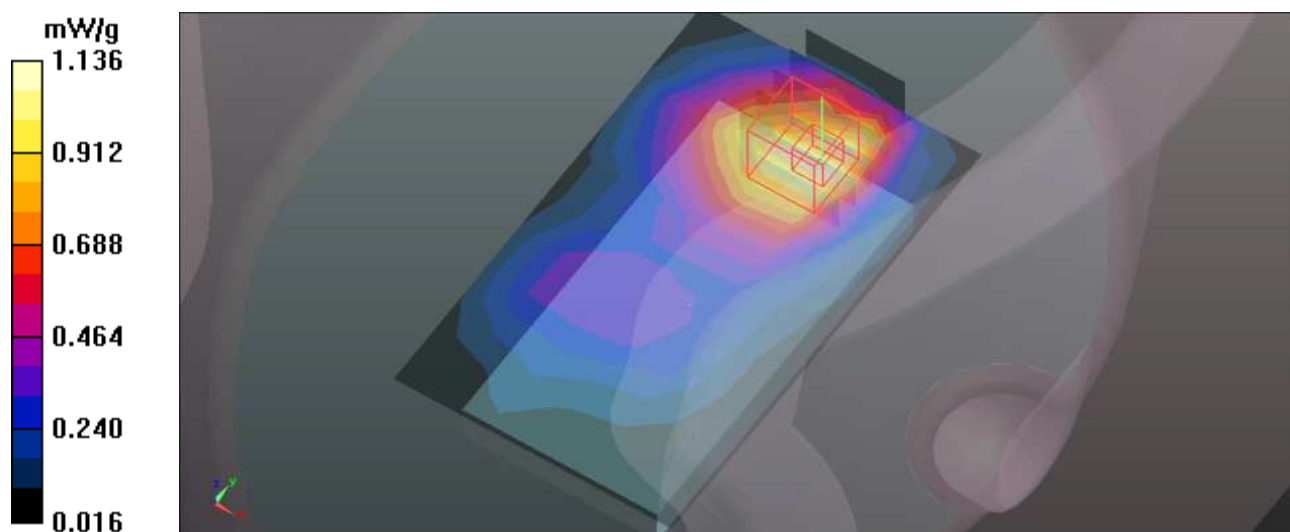

M82-Bottom-GPRS1900 TS2-Ch810 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1909.8 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54.08$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - High /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.833 mW/g


Body Position - High /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.938 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.142 W/kg

SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.896 mW/g

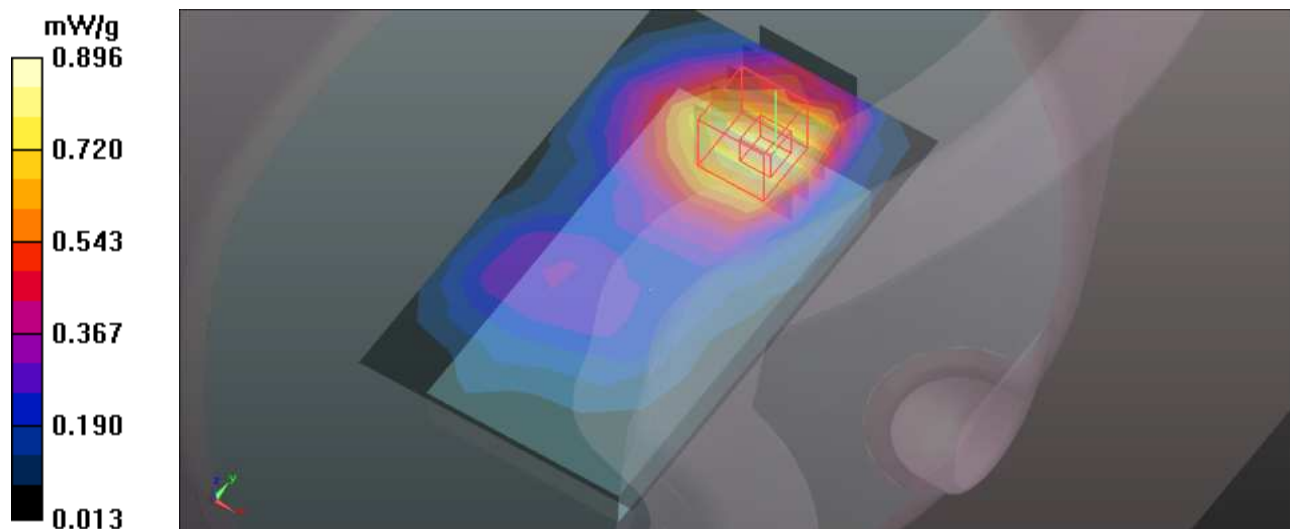

M83-Bottom-E-GPRS1900 TS1-Ch661 / HT_3.7VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.950 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

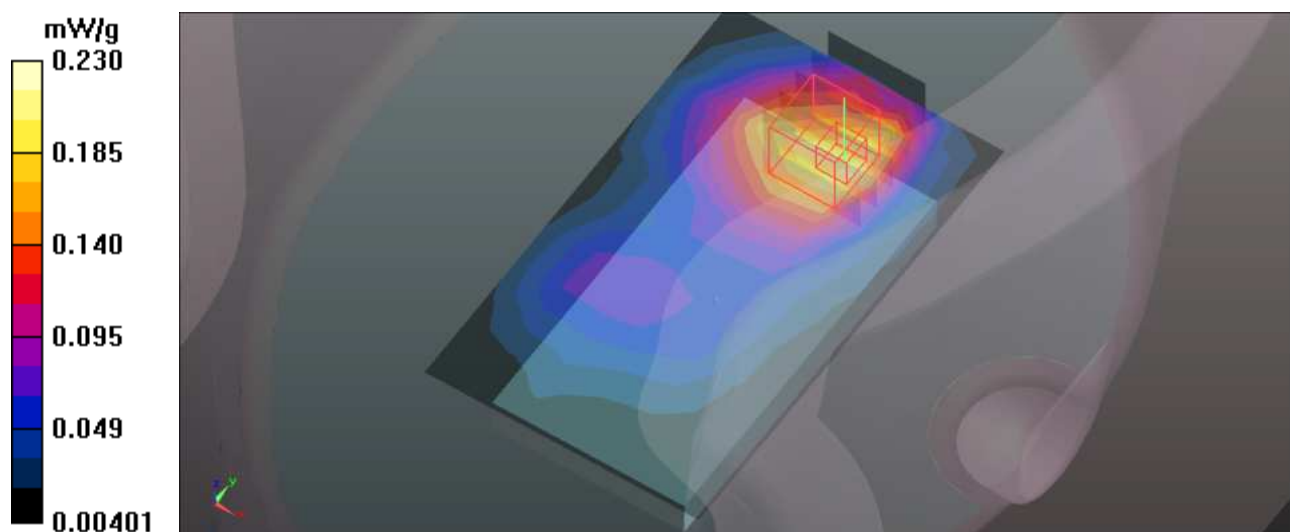

M84-Bottom-E-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.377 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.621 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.420 mW/g

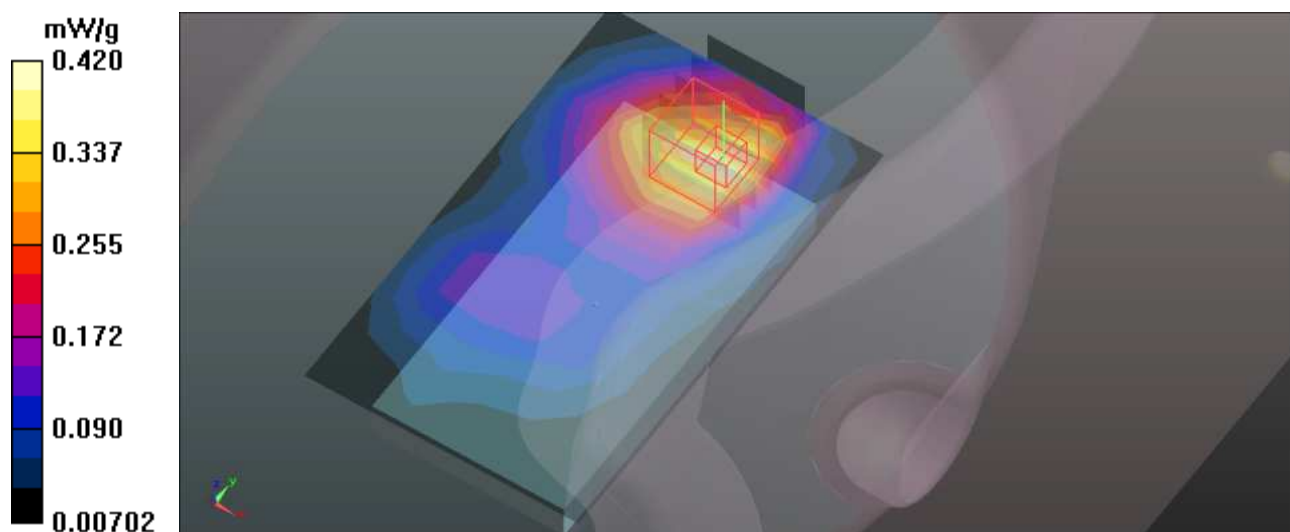

M85-Front-GSM1900-Ch661 / HT_3.8VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.539 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.693 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.399 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.531 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.693 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.497 mW/g

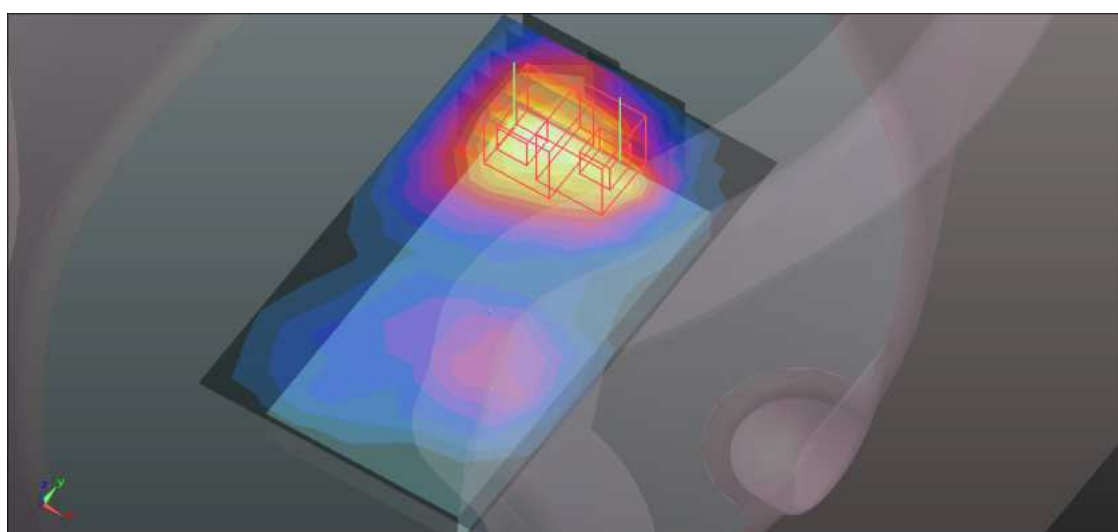

M86-Front-GPRS1900 TS1-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.496 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.433 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.491 mW/g

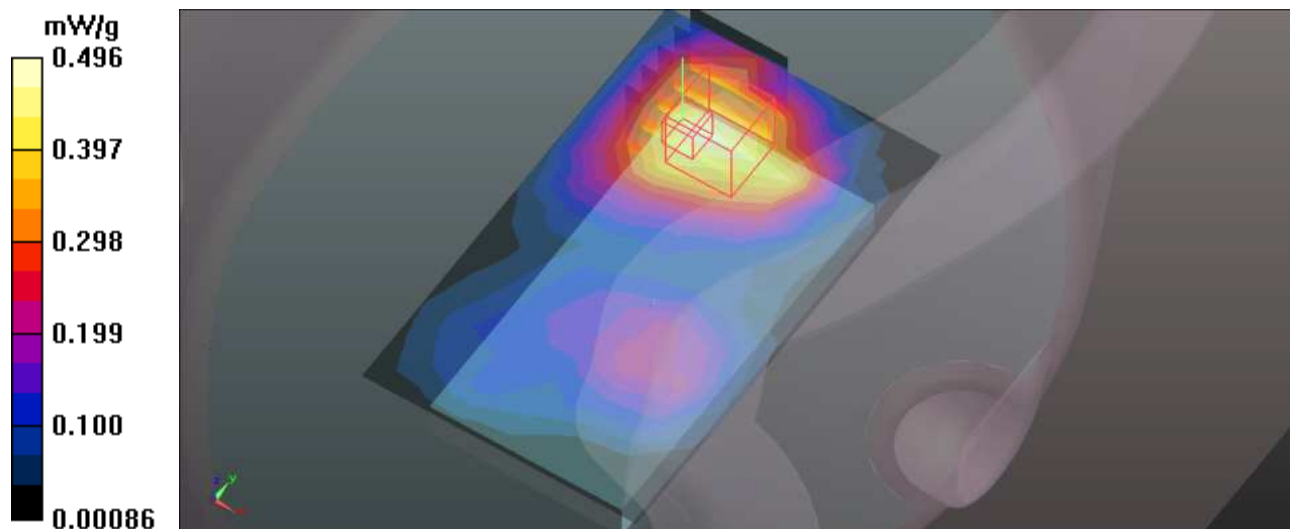

M87-Front-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 1 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.817 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.612 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.052 W/kg

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.366 mW/g

Maximum value of SAR (measured) = 0.829 mW/g

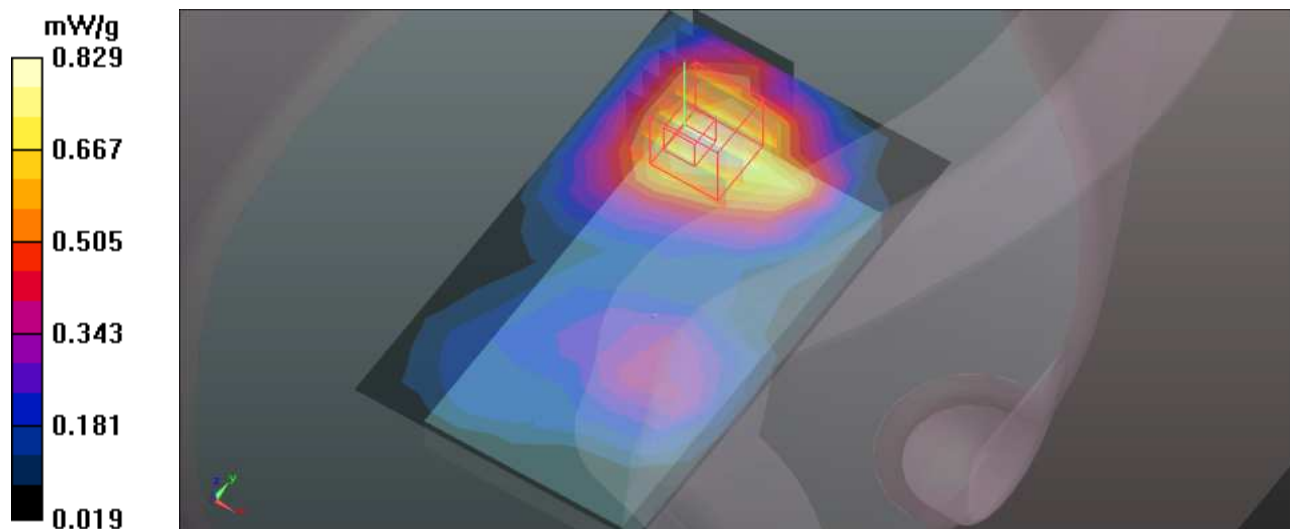



M88-Front-E-GPRS1900TS1-Ch661 / HT_3.8VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.166 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.101 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

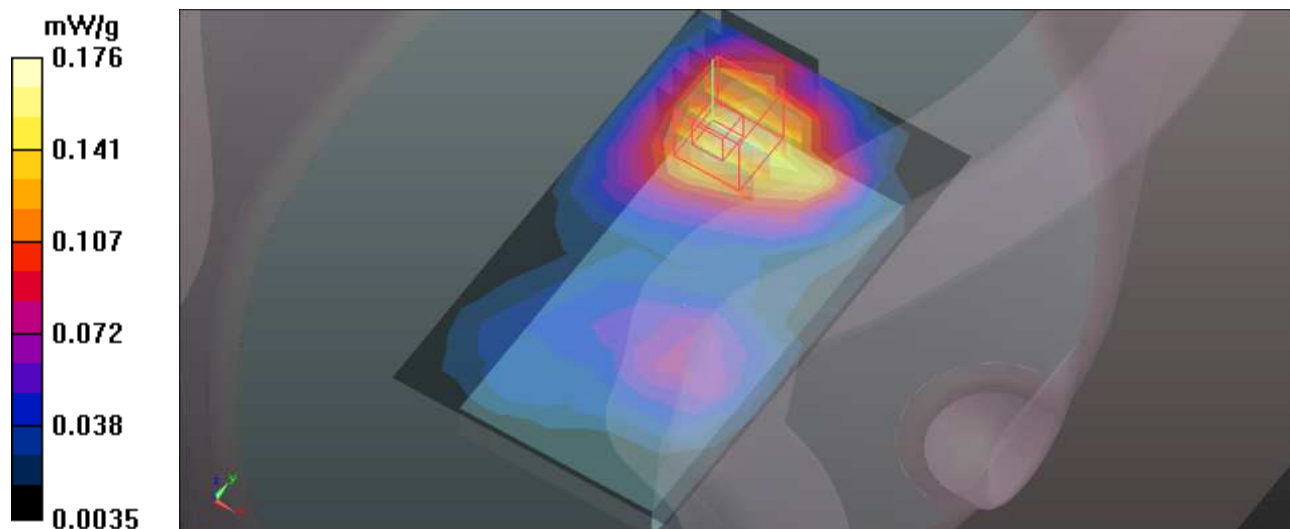

M89-Front-E-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.316 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.979 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.141 mW/g

Maximum value of SAR (measured) = 0.318 mW/g

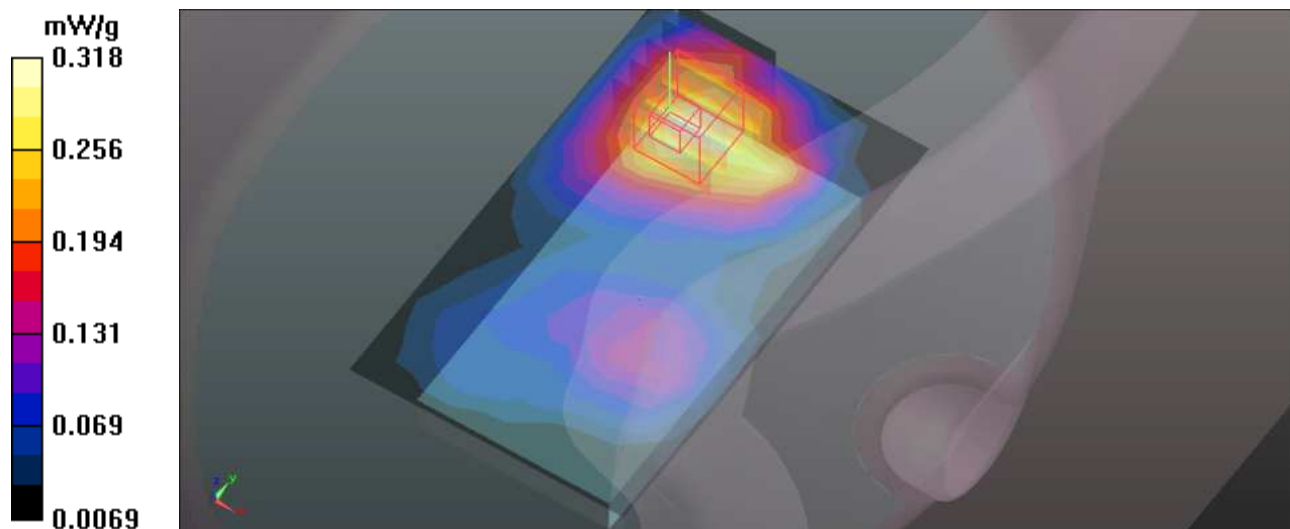

M90-Front-GSM1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.413 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.453 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.443 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.453 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

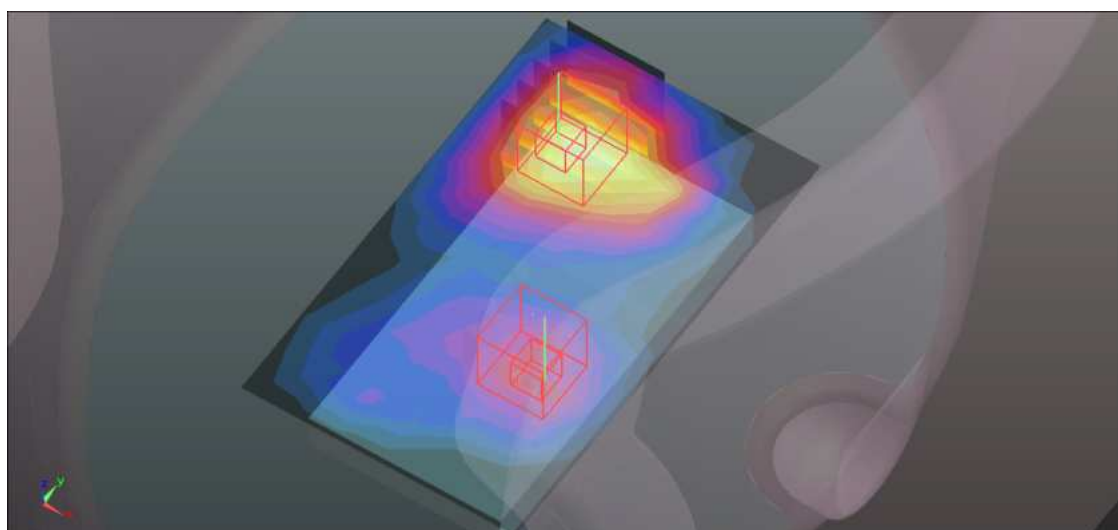

M91-Front-GPRS1900 TS1-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.385 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.142 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.358 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.142 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.393 mW/g

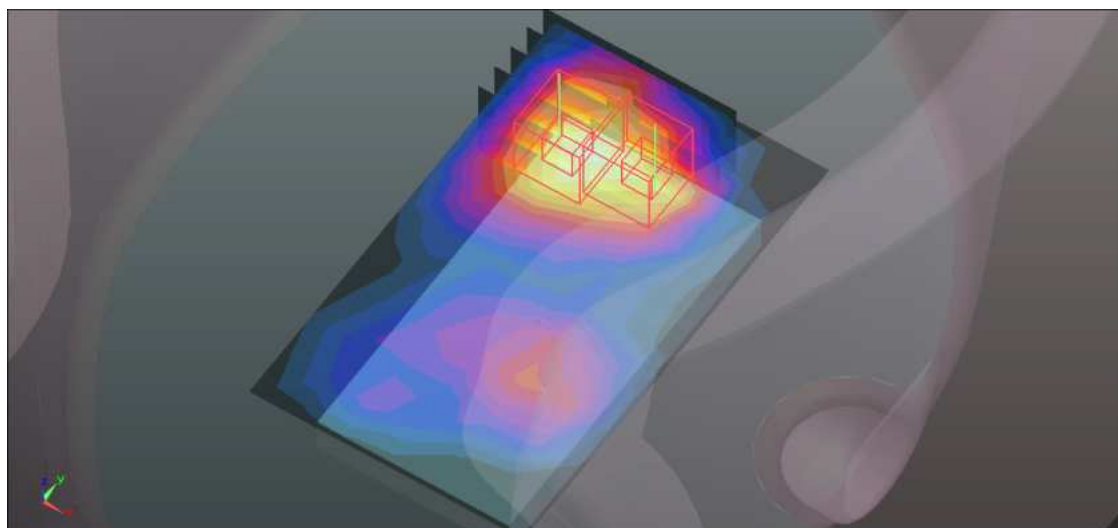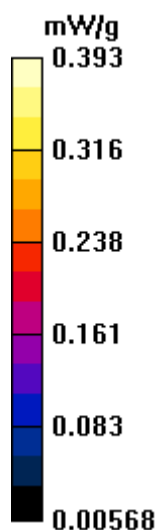

M92-Front-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.795 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.747 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.762 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.747 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.654 mW/g

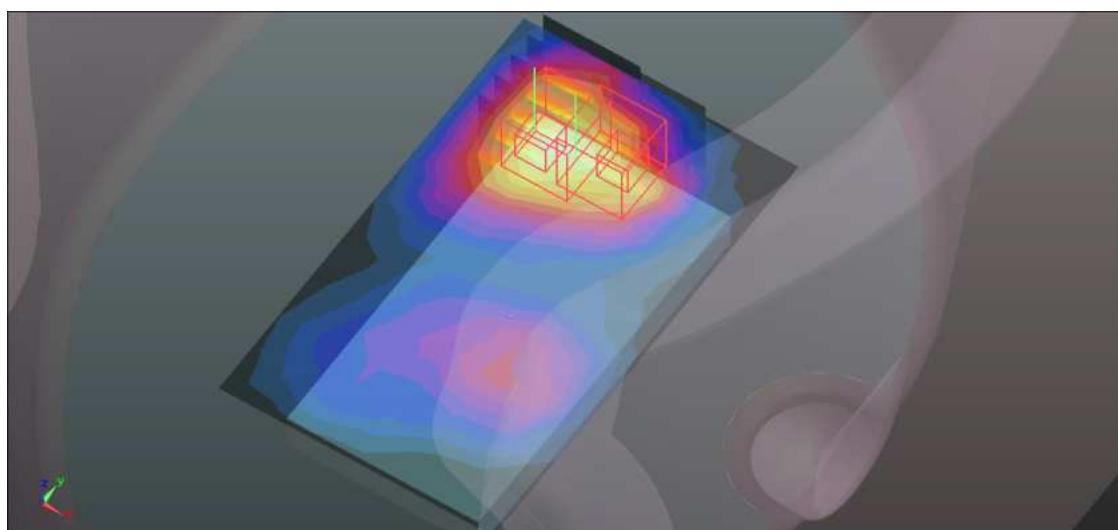

M93-Front-E-GPRS1900 TS1-Ch661 / HT_3.7VDC

Communication System: E-GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: 8PSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.920 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.161 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.920 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

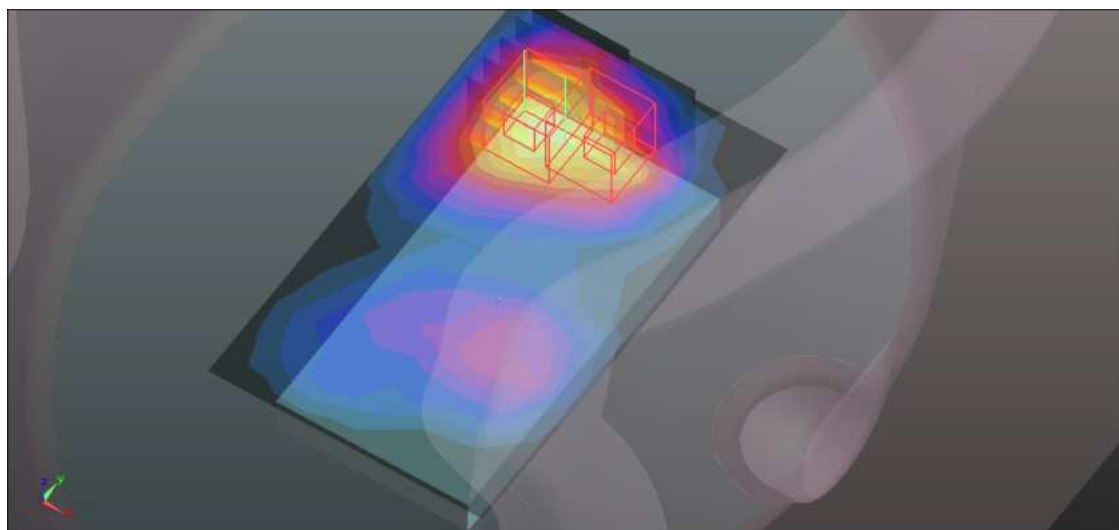

M94-Front-E-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: E-GPRS8501900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: 8PSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.316 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.354 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

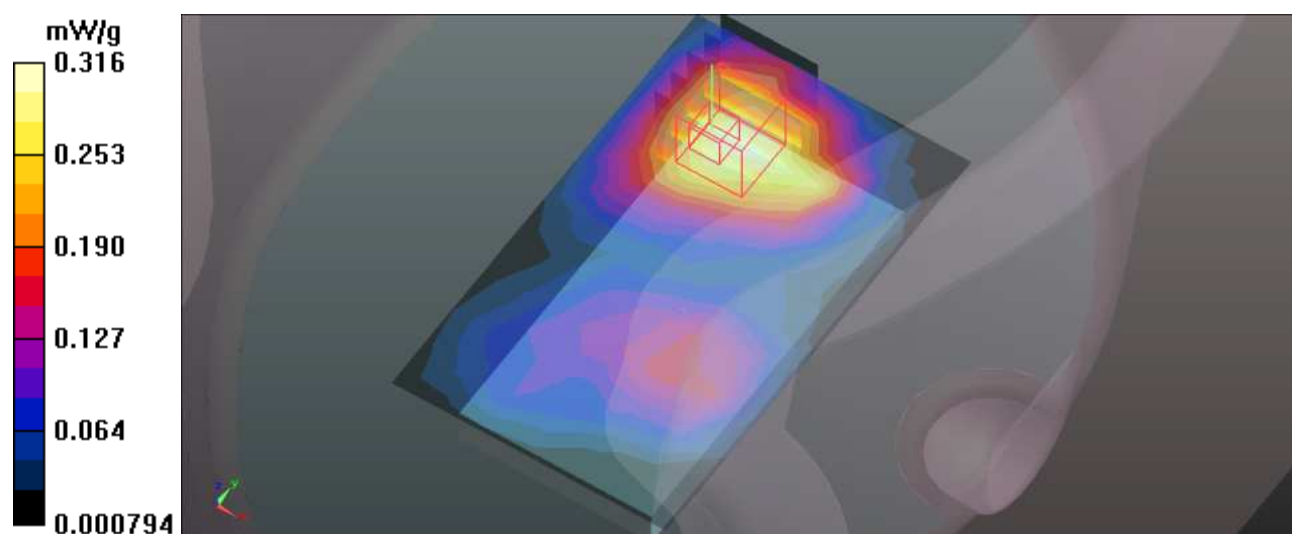

M95-Right edge-PCS1900-Ch661 / HT_3.8VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.654 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.206 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.654 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.166 mW/g

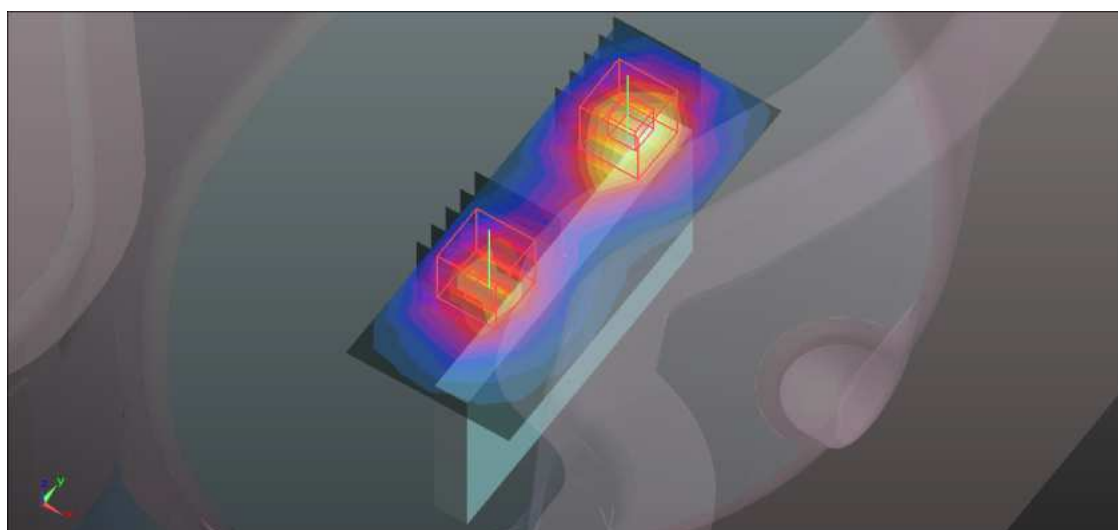

M96-Right edge-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.516 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.321 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.516 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

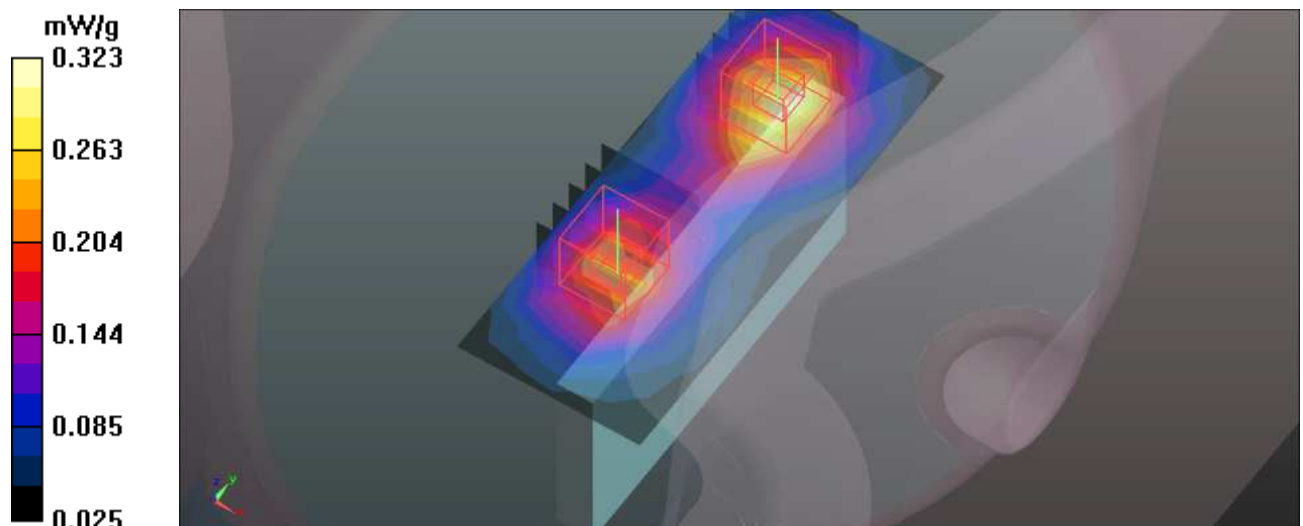

M97-Right edge-PCS1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.177 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.037 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.176 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.037 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

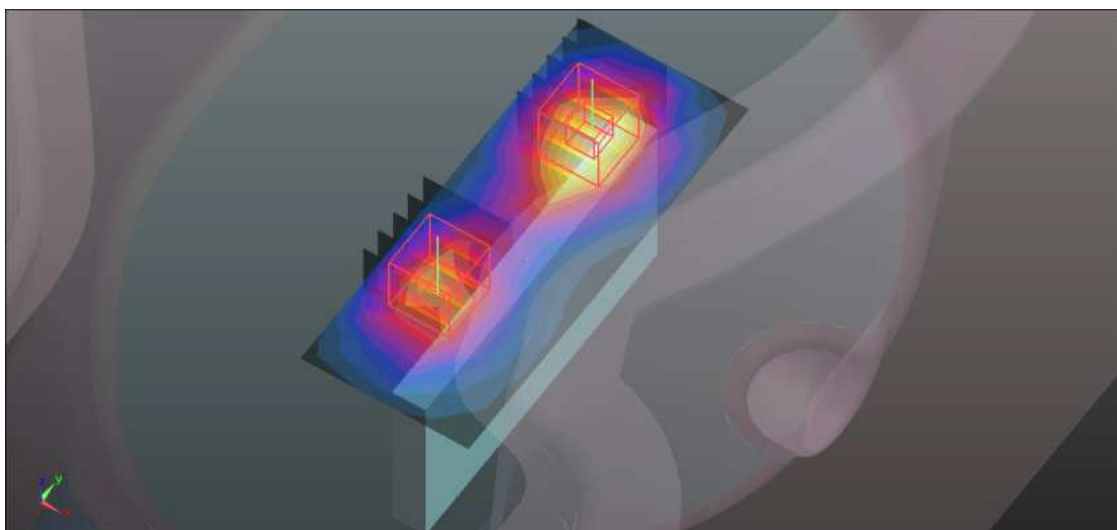

M98-Right edge-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.301 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.382 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.128 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.382 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

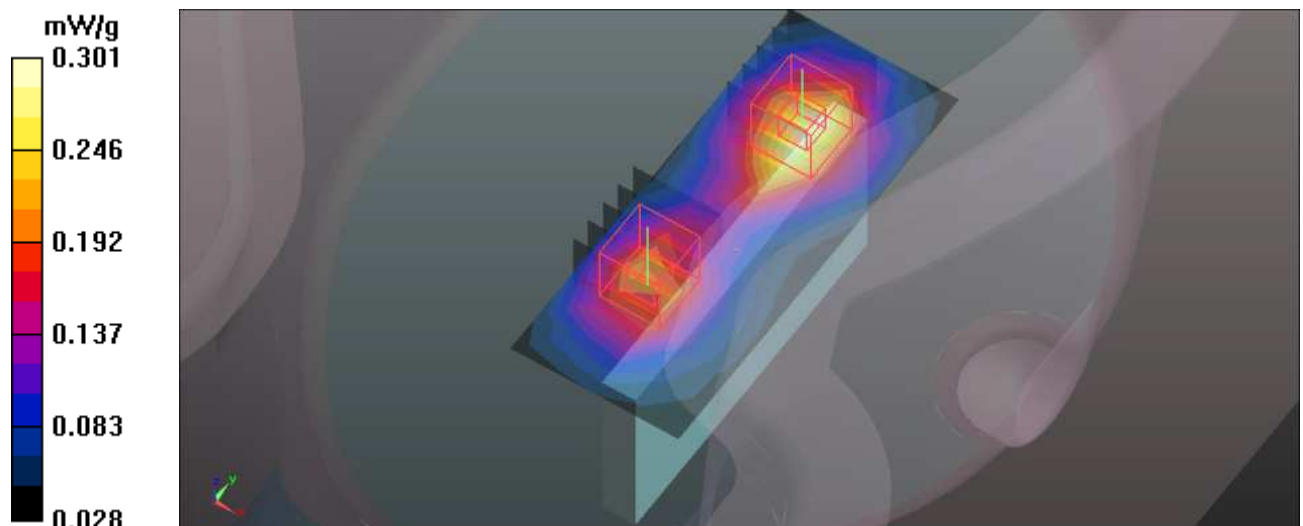

M99-Left edge-GSM1900-Ch661 / HT_3.8VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.096 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.189 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.102 mW/g


Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.189 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

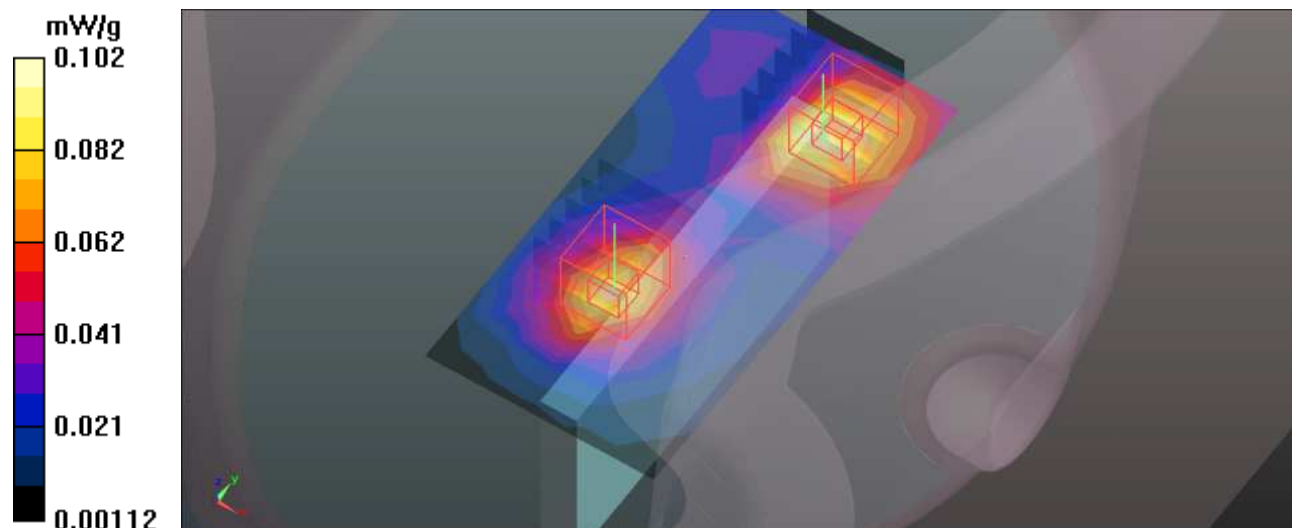

M100-Left edge-GPRS1900 TS2-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.092 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.020 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.070 mW/g



Maximum value of SAR (measured) = 0.168 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.020 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.069 mW/g

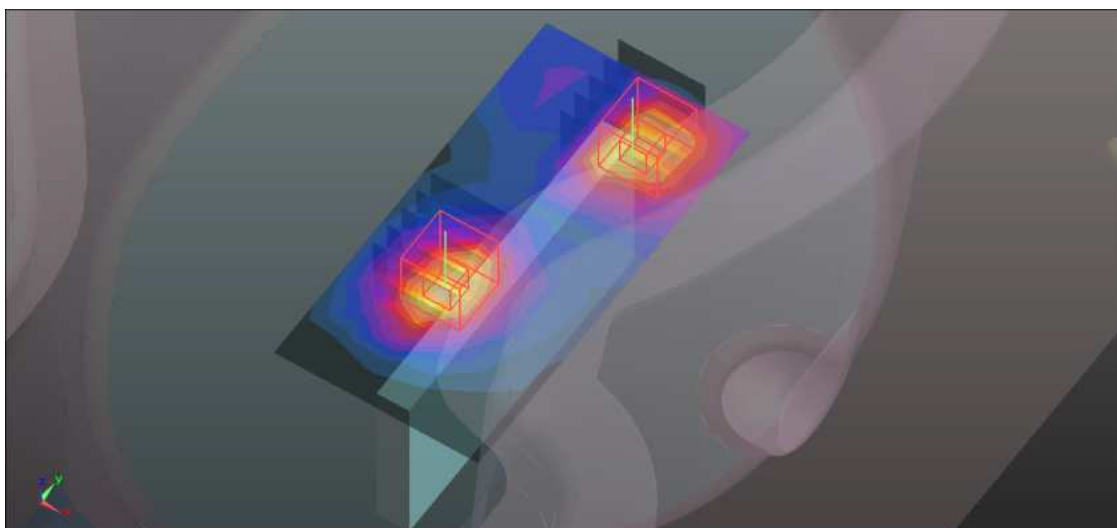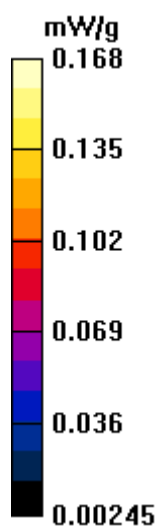

M101-Left edge-GSM1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.090 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.180 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.095 mW/g



Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.180 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

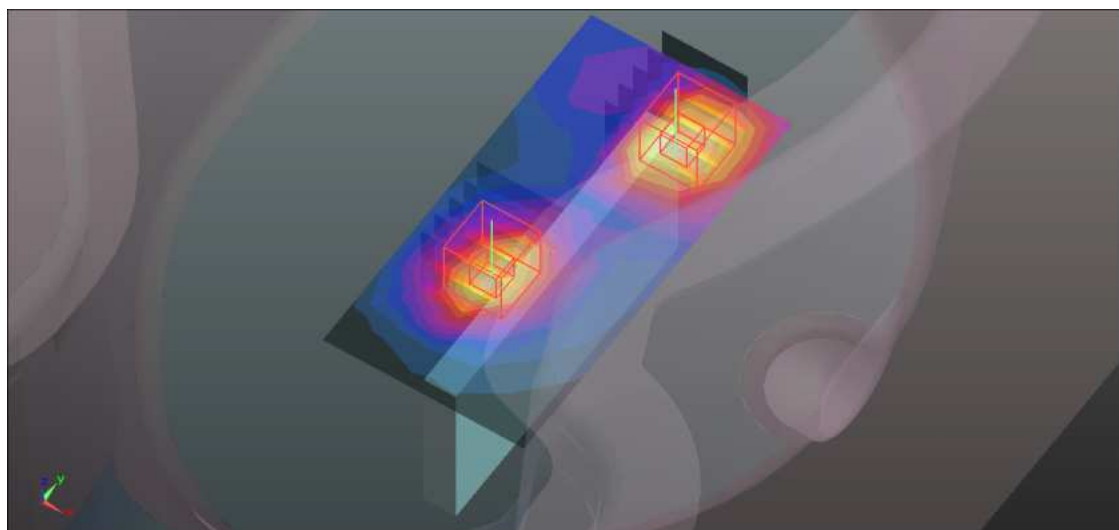

M102-Left edge-GPRS1900 TS2-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK / UL 2 time slots

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid /Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 mW/g

Body Position - Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.188 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.157 mW/g



Body Position - Mid /Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.188 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

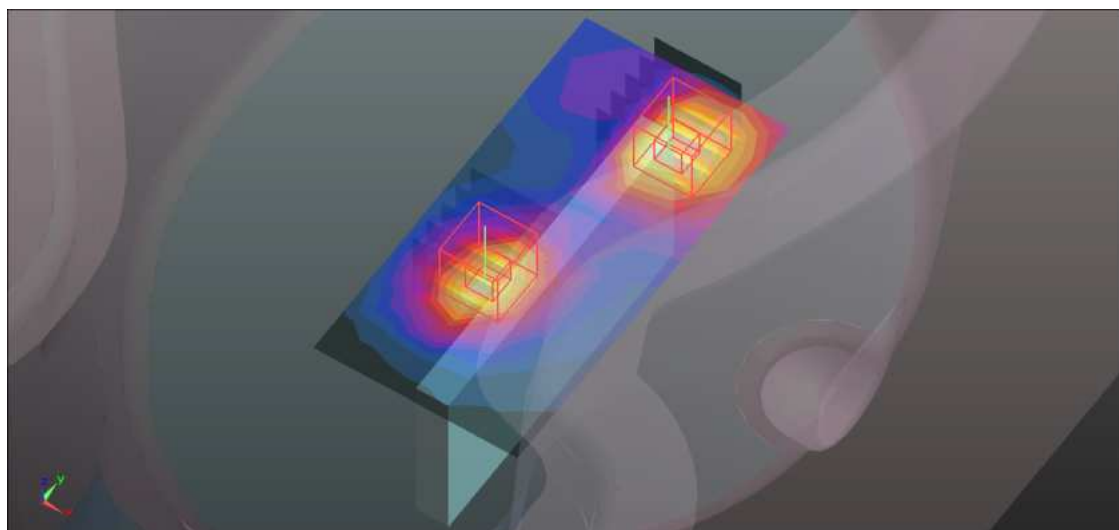

M103-Back edge-GSM1900-Ch661 / HT_3.8VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.349 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.869 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.139 mW/g

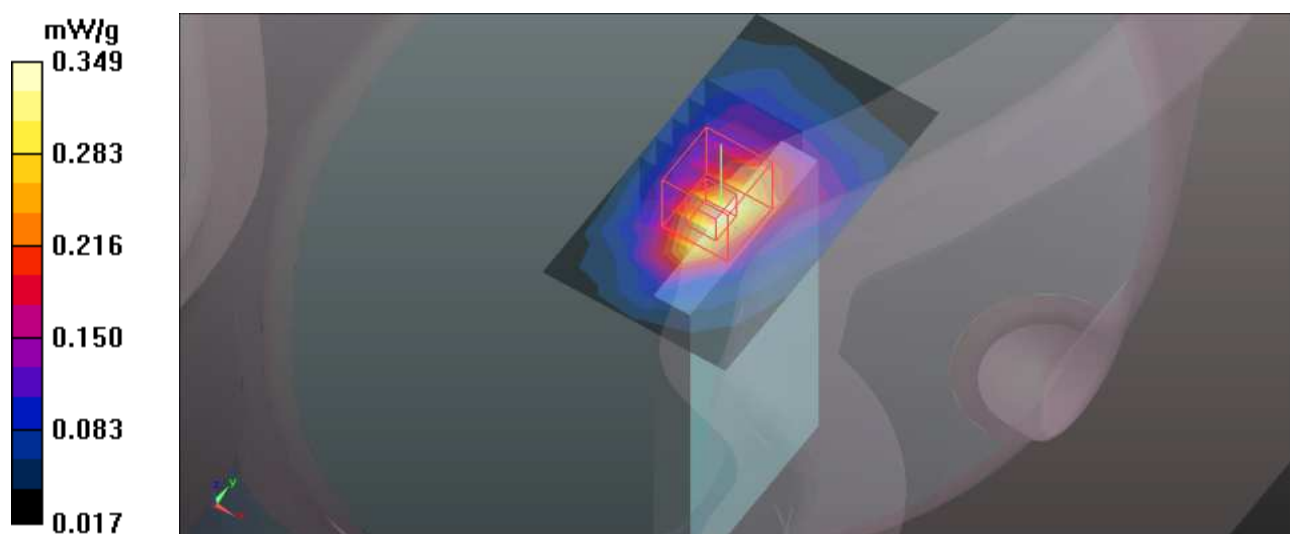

M104-Back edge-GPRS1900 TS1-Ch661 / HT_3.8VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.245 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.41 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.558 mW/g

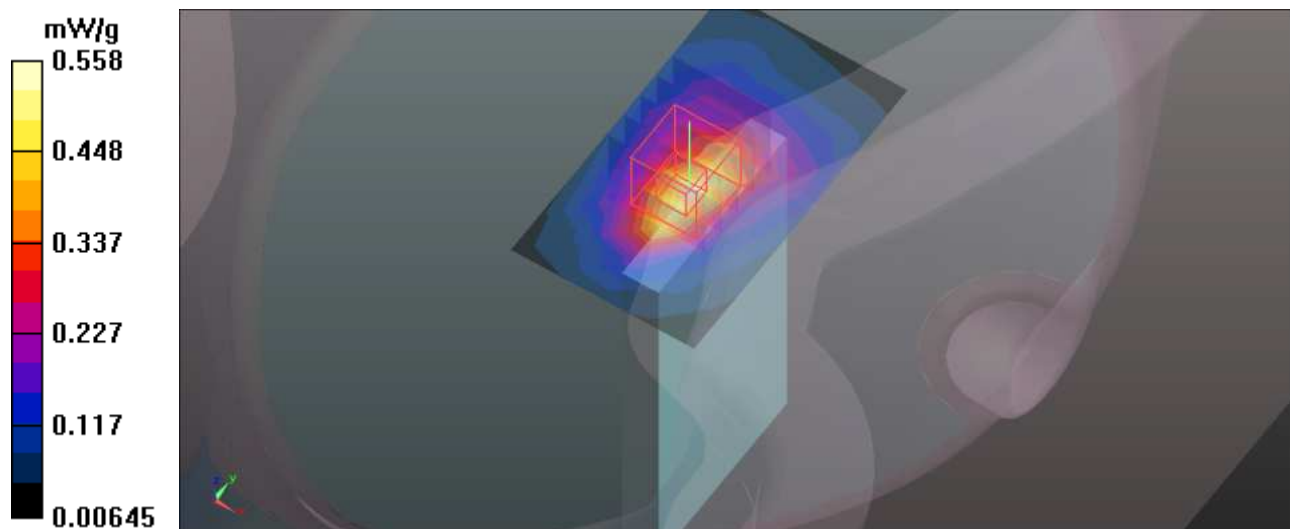

M105-Back edge-GSM1900-Ch661 / HT_3.7VDC

Communication System: GSM1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.654 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

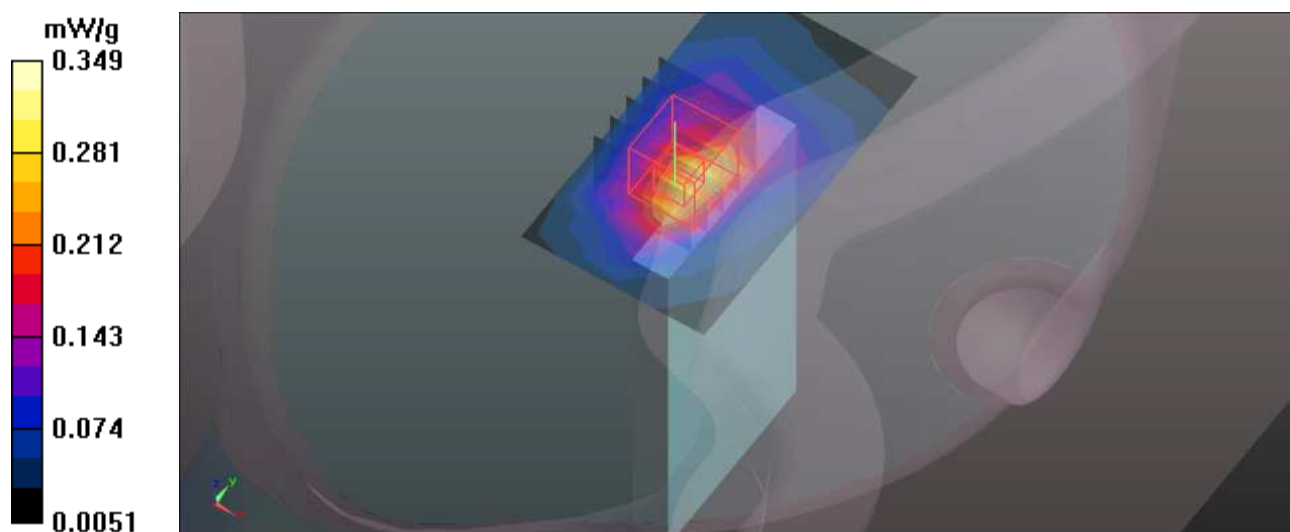



M106-Back edge-GPRS1900 TS1-Ch661 / HT_3.7VDC

Communication System: GPRS1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.515 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.764 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.575 mW/g

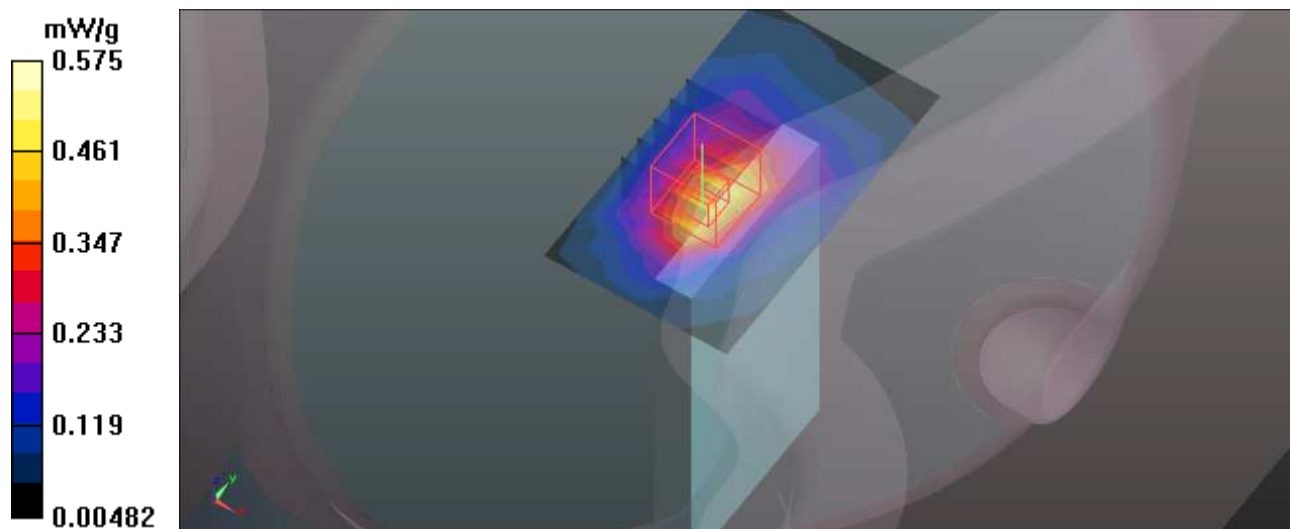

M107-Bottom-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.829 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.608 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.078 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.381 mW/g

Maximum value of SAR (measured) = 0.854 mW/g

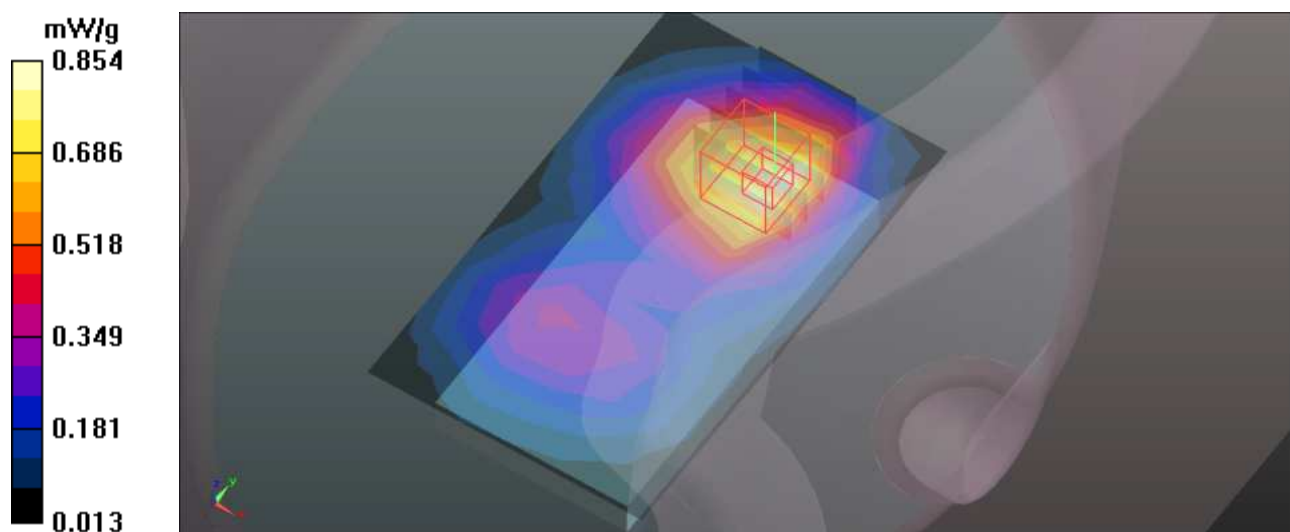

M108-Bottom-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type:BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.826 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.338 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.023 W/kg

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.815 mW/g

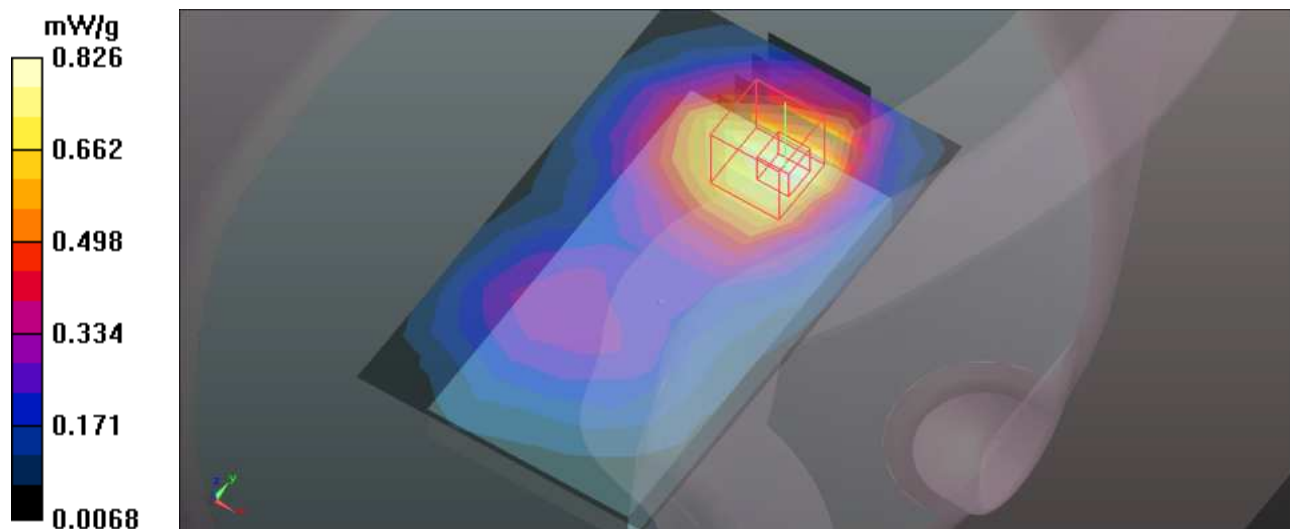

M109-Front-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.632 mW/g

Body Position - Mid/Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.335 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.314 mW/g

Maximum value of SAR (measured) = 0.628 mW/g



Body Position - Mid/Zoom Scan(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.335 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.689 mW/g

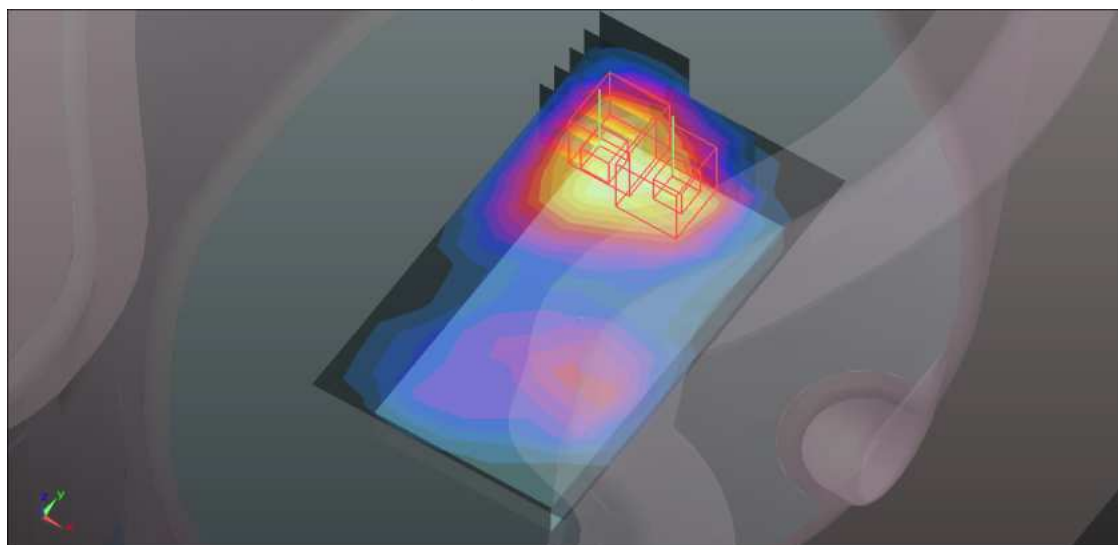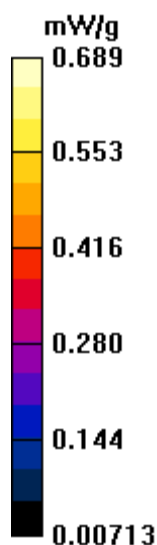

M110-Front-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.657 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.843 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.692 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.843 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.708 mW/g

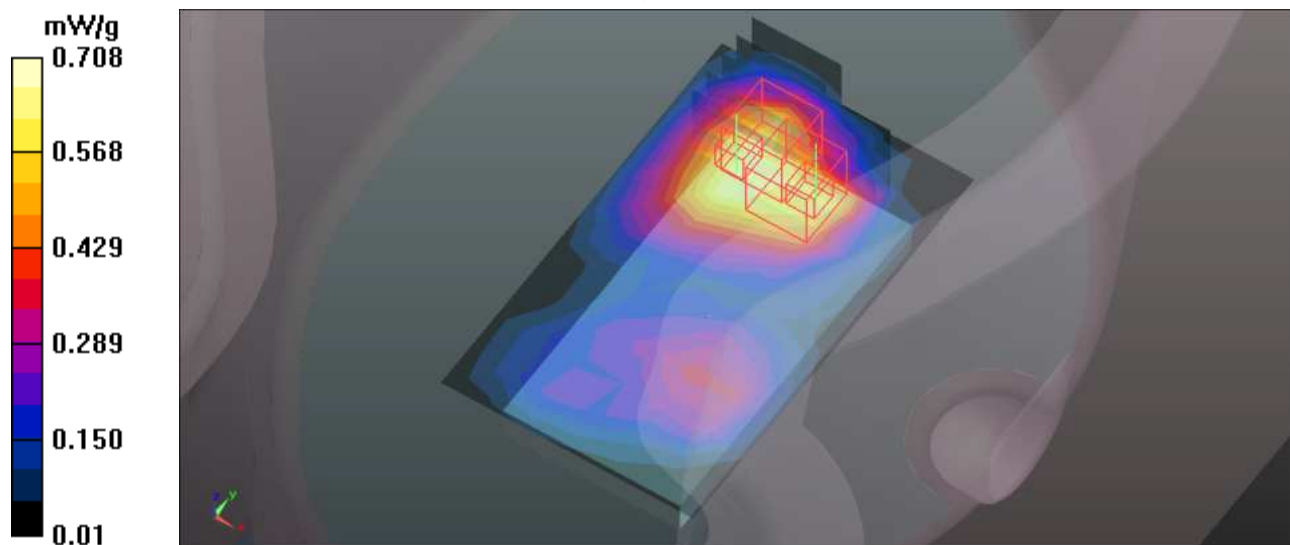

M111-Right edge-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.438 mW/g

Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.392 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.455 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.392 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.348 mW/g

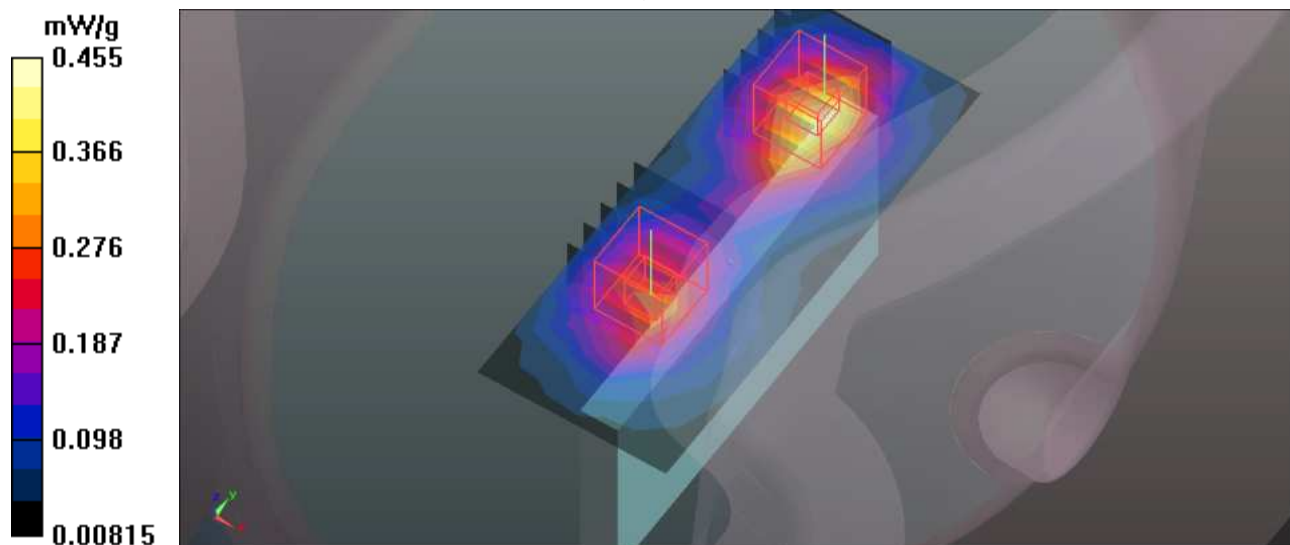

M112-Right edge-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The right edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.389 mW/g

Body Position - Mid/Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.124 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.391 mW/g


Body Position - Mid/Zoom Scan(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.124 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.312 mW/g

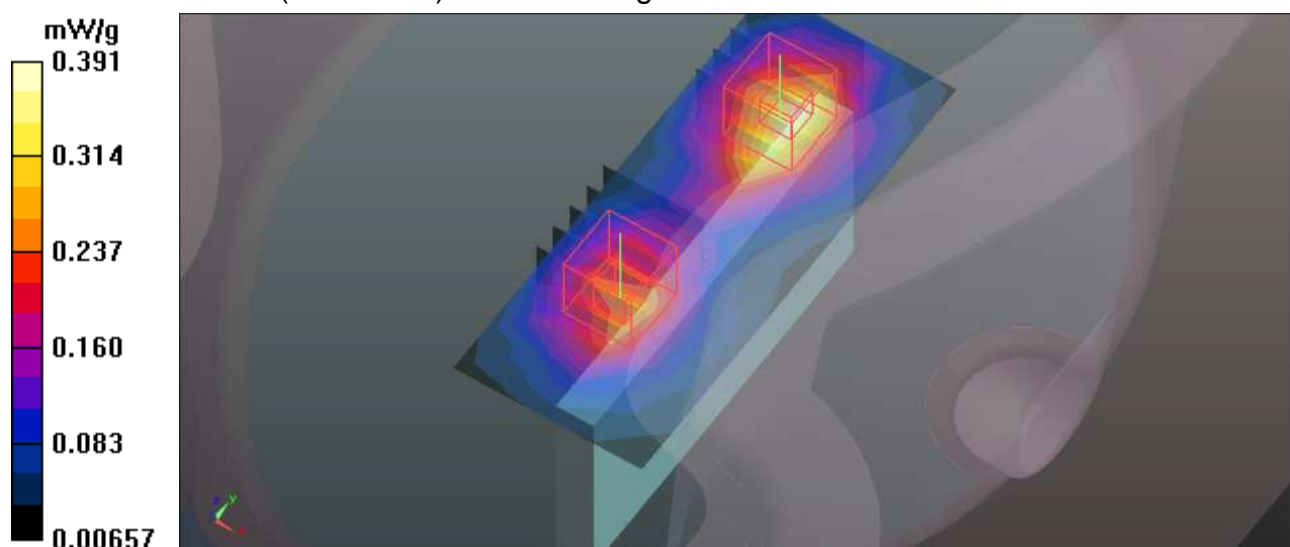

M113-Left edge-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.141 mW/g

Body Position - Mid/Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.043 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.155 mW/g


Body Position - Mid/Zoom Scan(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.043 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.149 mW/g

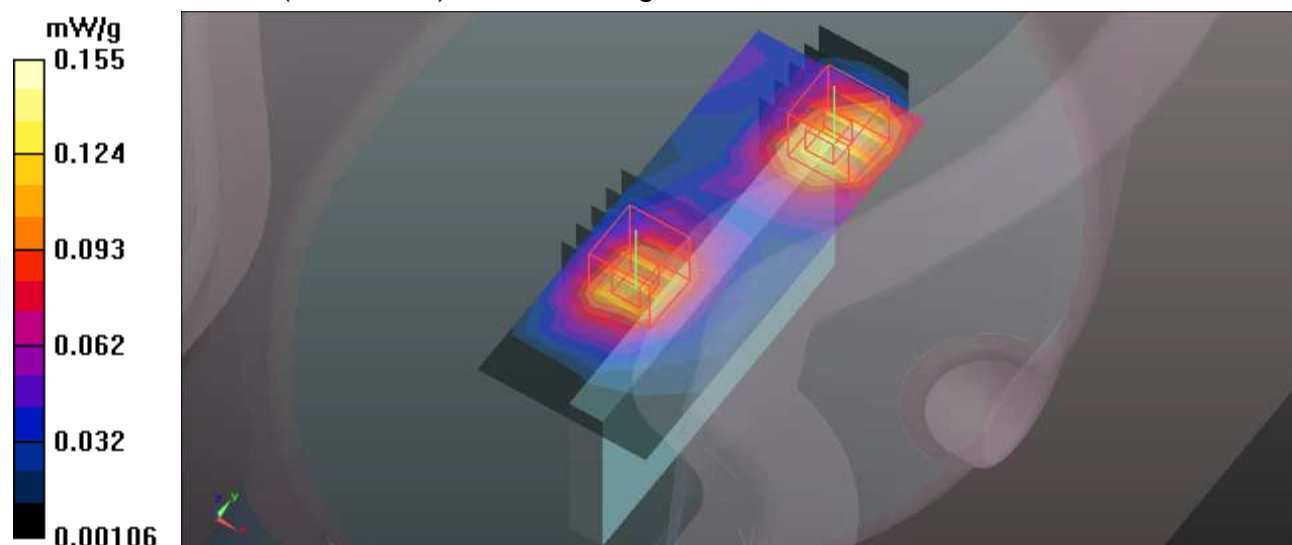

M114-Left edge-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The left edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.176 mW/g

Body Position - Mid/Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.442 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.211 mW/g


Body Position - Mid/Zoom Scan(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.442 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

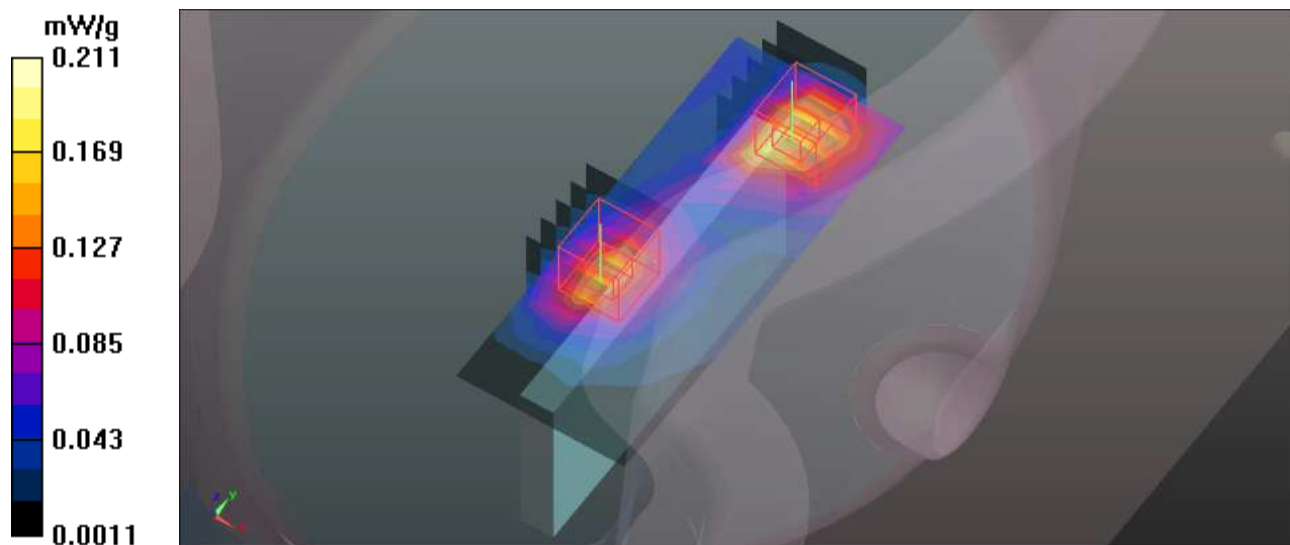

M115-Back edge-WCDMA1900-Ch9400 / HT_3.8VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.501 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.784 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.548 mW/g

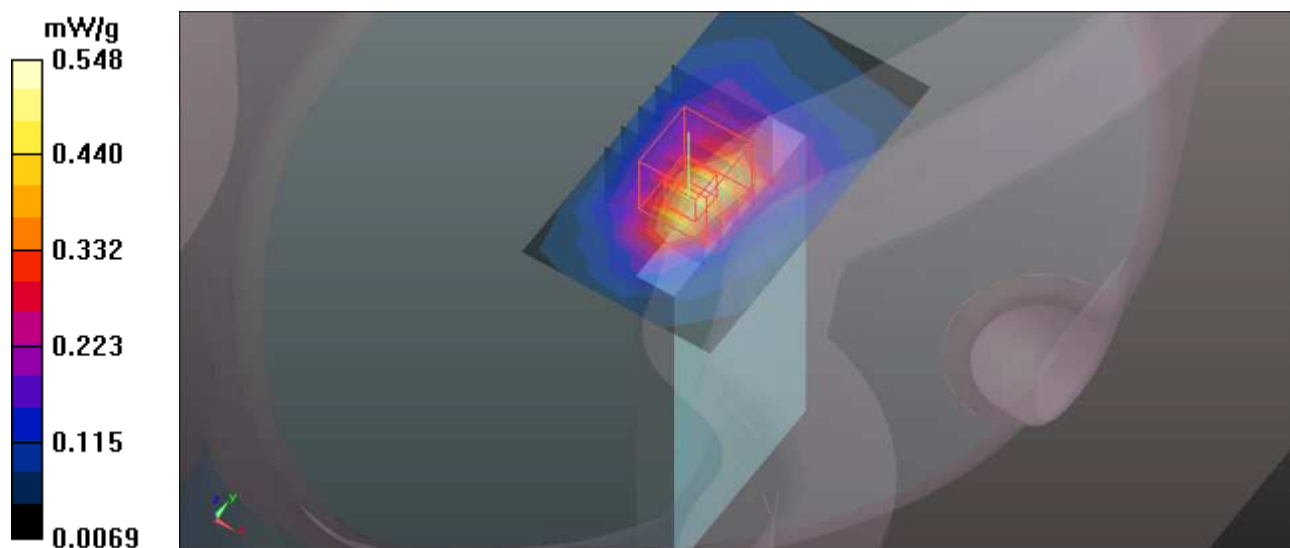

M116-Back edge-WCDMA1900-Ch9400 / HT_3.7VDC

Communication System: WCDMA1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 10 mm (The back edge side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.552 mW/g


Body Position - Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.578 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

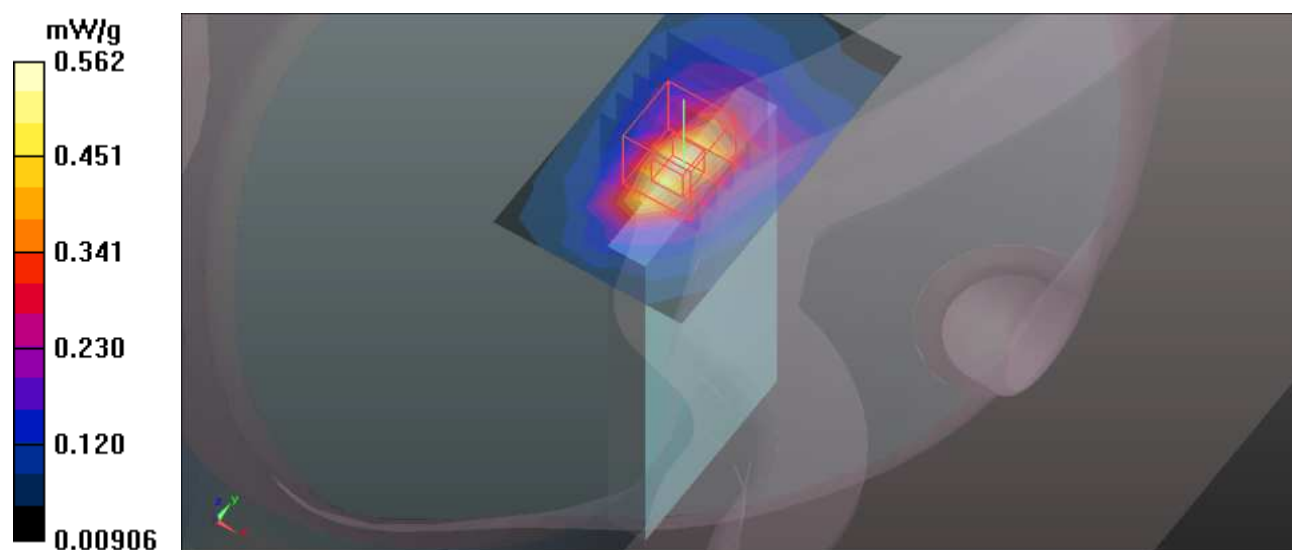

System Performance Check-D835V2-HSL835 MHz

DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: D835V2 - SN:4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 42.64$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feet point of the dipole to the Phantom) Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.832 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.600 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.508 W/kg

SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.50 mW/g

Maximum value of SAR (measured) = 2.488 mW/g

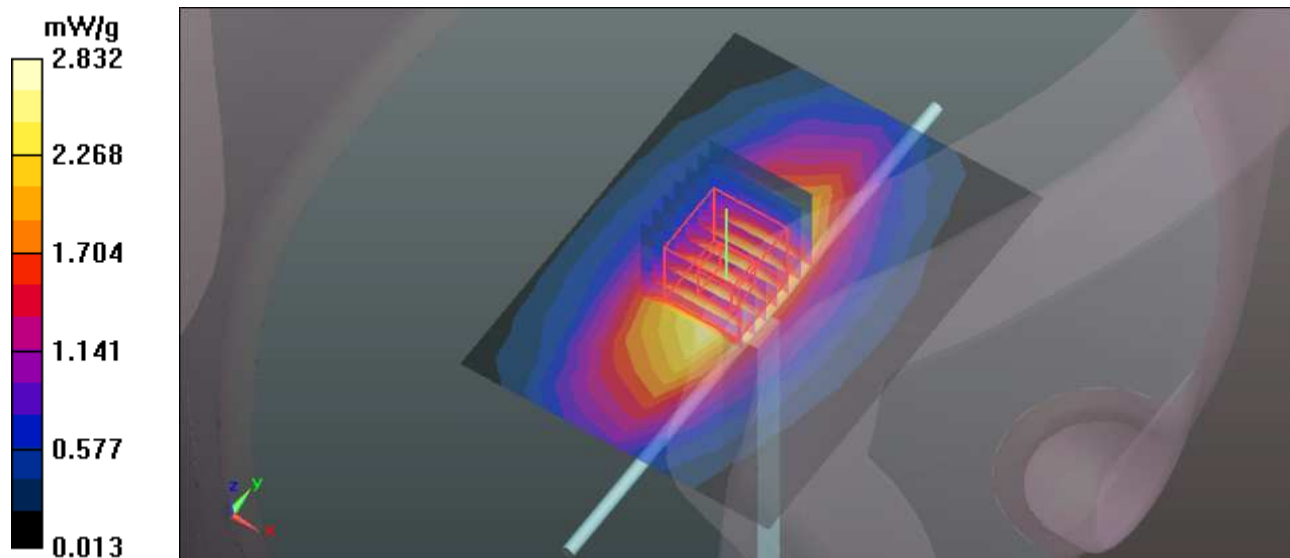

System Performance Check-D835V2-MSL835 MHz

DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: D835V2 - SN:4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 56.48$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feet point of the dipole to the Phantom) Air temp. : 22.8 degrees ; Liquid temp. : 21.5 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 3.032 mW/g

d=15mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.513 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.54 mW/g

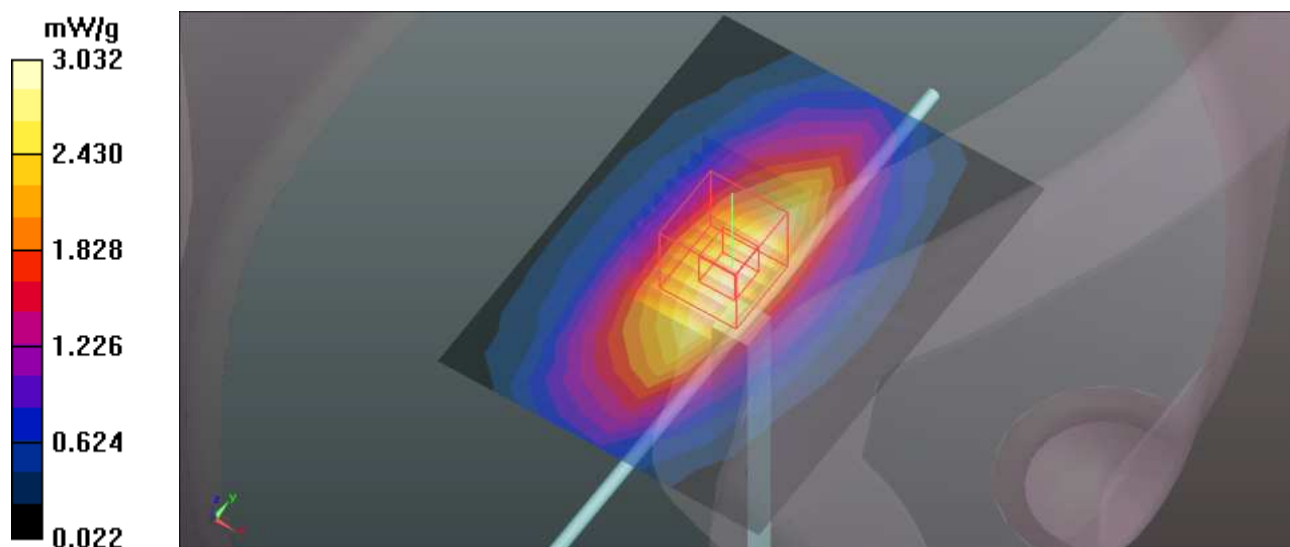

SystemPerformanceCheck-D1900V2-HSL1900 MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: D1900V2 - SN:5d022 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL1900;Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feet point of the dipole to the Phantom)Air temp. : 22.5 degrees ; Liquid temp. : 21.3 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 14.284 mW/g


d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.1 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 18.768 W/kg

SAR(1 g) = 9.78 mW/g; SAR(10 g) = 4.96 mW/g

Maximum value of SAR (measured) = 14.388 mW/g

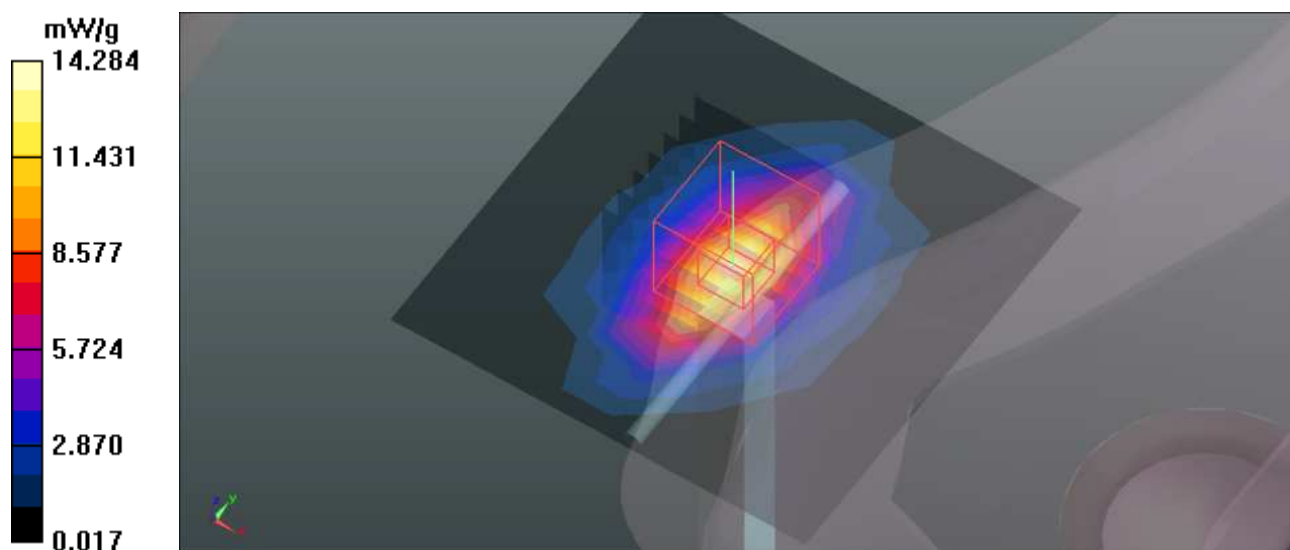

System Performance Check-D1900V2-MSL1900 MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: D1900V2 - SN:5d022 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 54.23$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feet point of the dipole to the Phantom) Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP-1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 14.352 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.1 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 18.595 W/kg

SAR(1 g) = 9.95 mW/g; SAR(10 g) = 5.18 mW/g


Maximum value of SAR (measured) = 14.463 mW/g

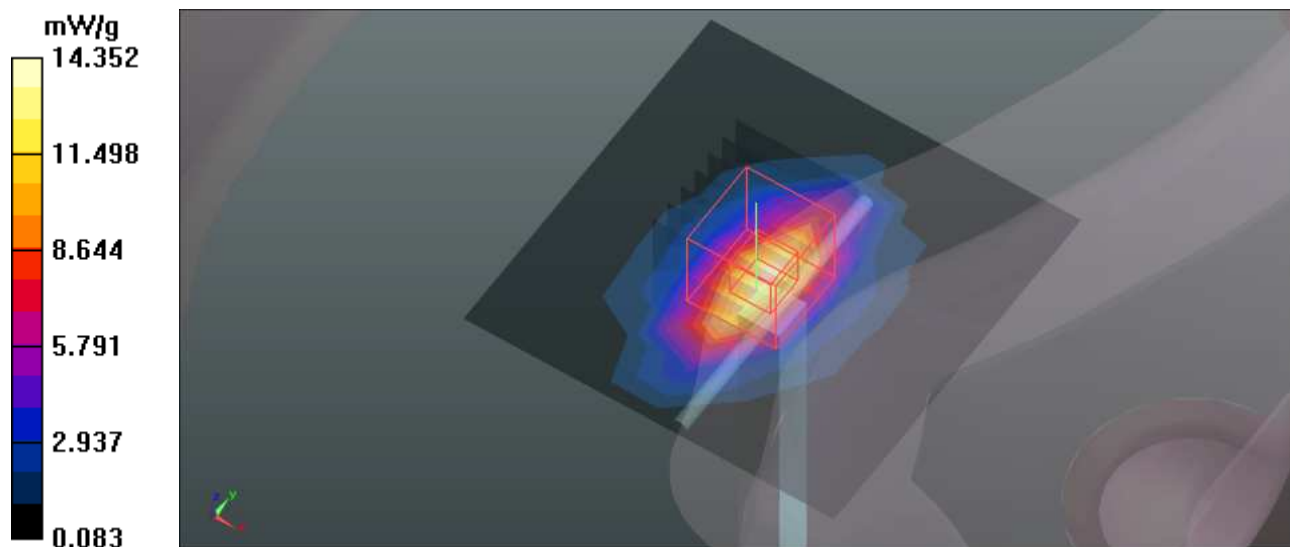

APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM



APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION

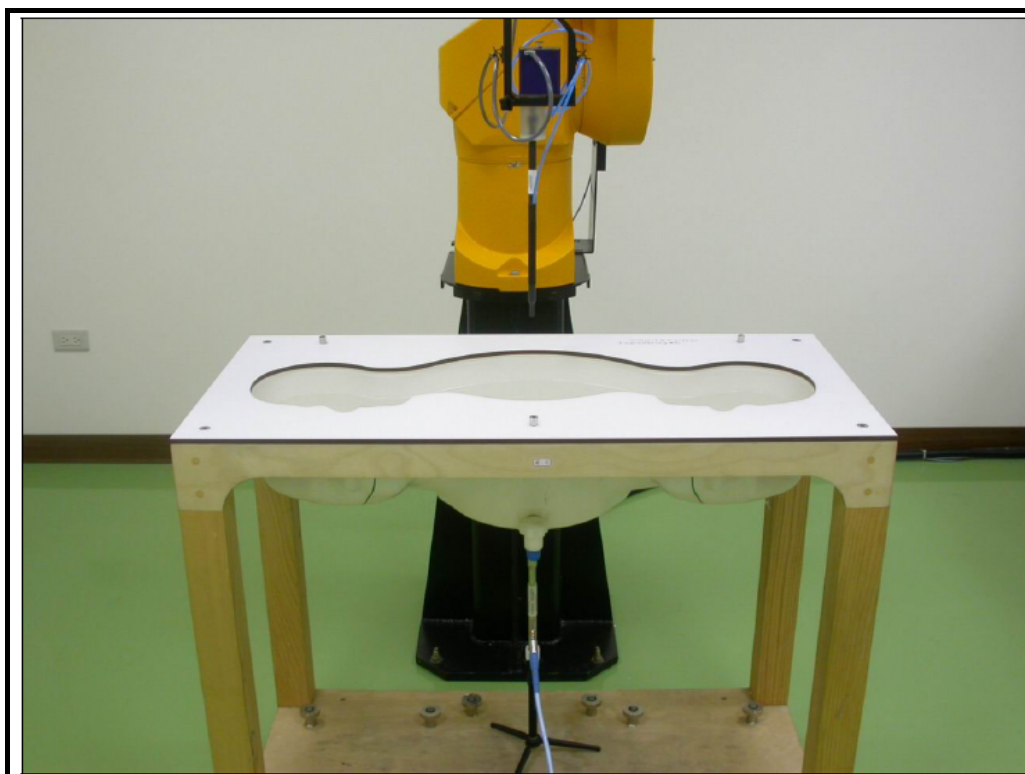



APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION

D1: SAM PHANTOM

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

F. Bumbult

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Johannes Kappeler



D2: DOSIMETRIC E-FIELD PROBE



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BV ADT (Auden)**

Certificate No: **EX3-3590_Feb11**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3590**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **February 25, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: February 25, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}** are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3590

Manufactured: March 23, 2009
Calibrated: February 25, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.51	0.48	0.51	$\pm 10.1 \%$
DCP (mV) ^B	94.6	95.5	92.8	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	119.0	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	141.4	
			Z	0.00	0.00	1.00	115.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	10.21	10.21	10.21	0.56	0.68	± 12.0 %
1640	40.3	1.29	9.25	9.25	9.25	0.68	0.60	± 12.0 %
1750	40.1	1.37	9.03	9.03	9.03	0.79	0.58	± 12.0 %
1950	40.0	1.40	8.45	8.45	8.45	0.55	0.66	± 12.0 %
2300	39.5	1.67	8.14	8.14	8.14	0.40	0.80	± 12.0 %
2450	39.2	1.80	7.73	7.73	7.73	0.29	1.00	± 12.0 %
2600	39.0	1.96	7.53	7.53	7.53	0.28	1.06	± 12.0 %
3500	37.9	2.91	7.55	7.55	7.55	0.36	1.03	± 13.1 %
5200	36.0	4.66	5.51	5.51	5.51	0.30	1.80	± 13.1 %
5300	35.9	4.76	5.17	5.17	5.17	0.30	1.80	± 13.1 %
5500	35.6	4.96	5.00	5.00	5.00	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.52	4.52	4.52	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.53	4.53	4.53	0.50	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3590

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	10.32	10.32	10.32	0.38	0.82	± 12.0 %
1640	53.8	1.40	9.72	9.72	9.72	0.51	0.79	± 12.0 %
1750	53.4	1.49	8.77	8.77	8.77	0.37	0.92	± 12.0 %
1950	53.3	1.52	8.49	8.49	8.49	0.60	0.67	± 12.0 %
2300	52.9	1.81	8.08	8.08	8.08	0.30	1.00	± 12.0 %
2450	52.7	1.95	7.91	7.91	7.91	0.42	0.82	± 12.0 %
2600	52.5	2.16	7.78	7.78	7.78	0.25	1.17	± 12.0 %
3500	51.3	3.31	7.14	7.14	7.14	0.43	0.96	± 13.1 %
5200	49.0	5.30	4.81	4.81	4.81	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.56	4.56	4.56	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.32	4.32	4.32	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.01	4.01	4.01	0.60	1.90	± 13.1 %
5800	48.2	6.00	4.55	4.55	4.55	0.50	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

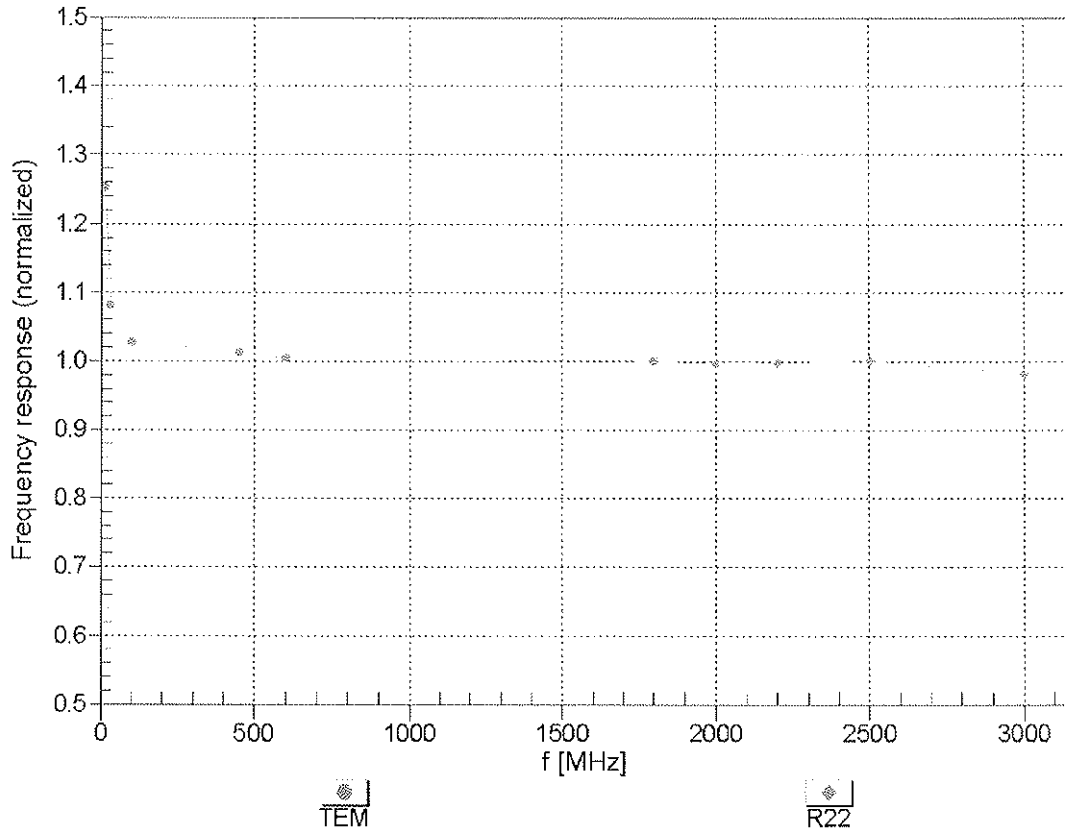



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


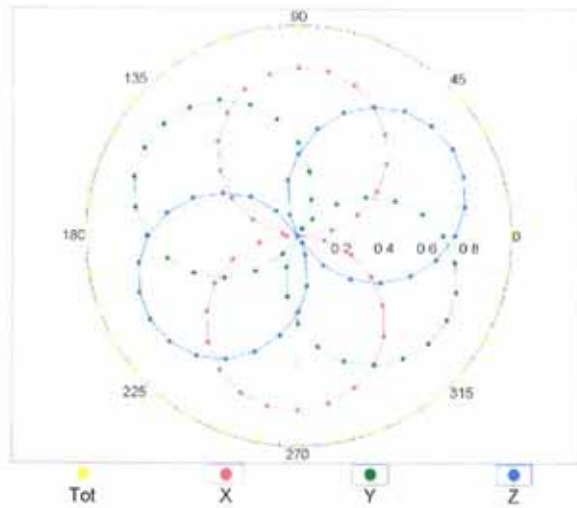


f=1800 MHz, R22

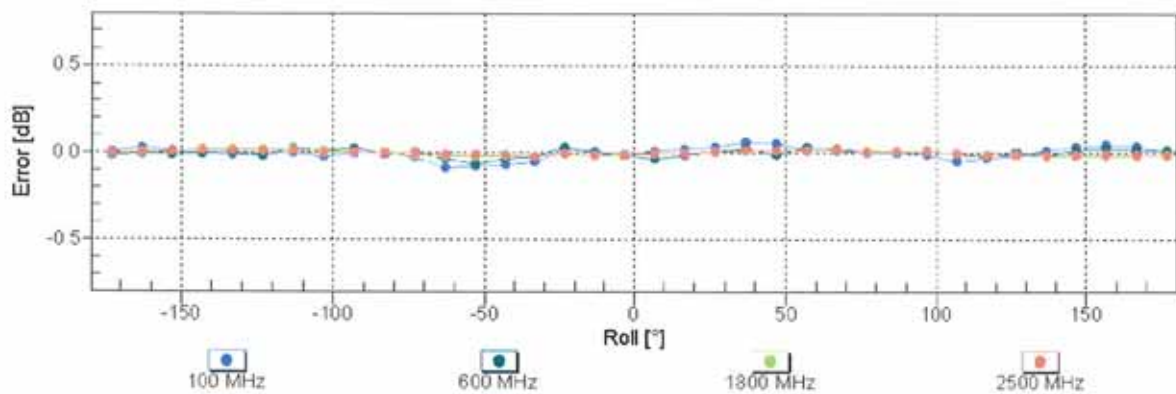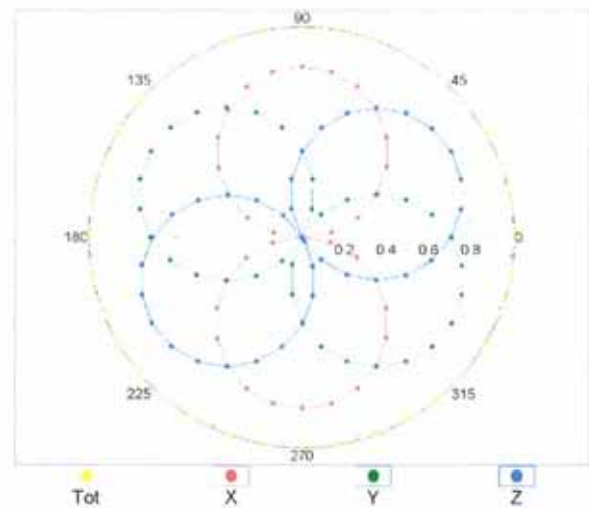


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

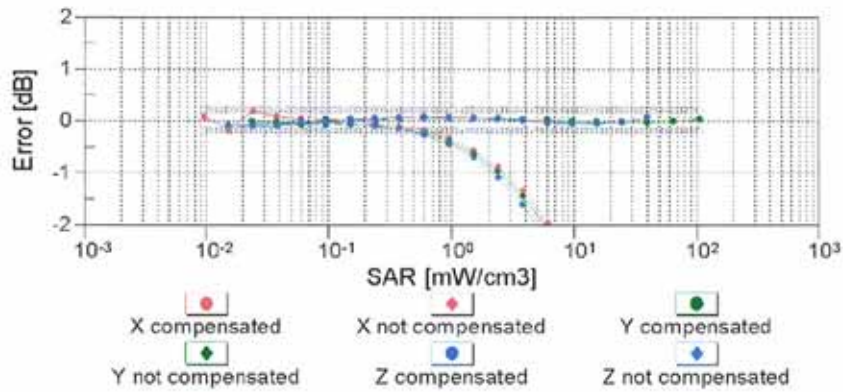
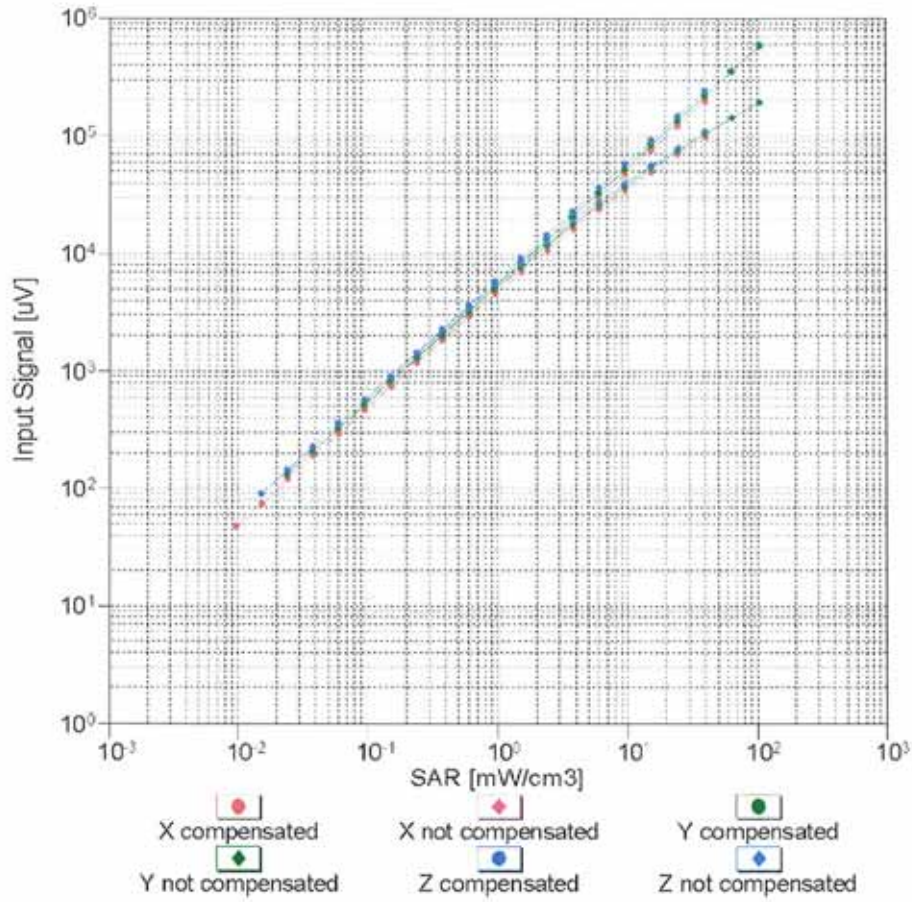


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

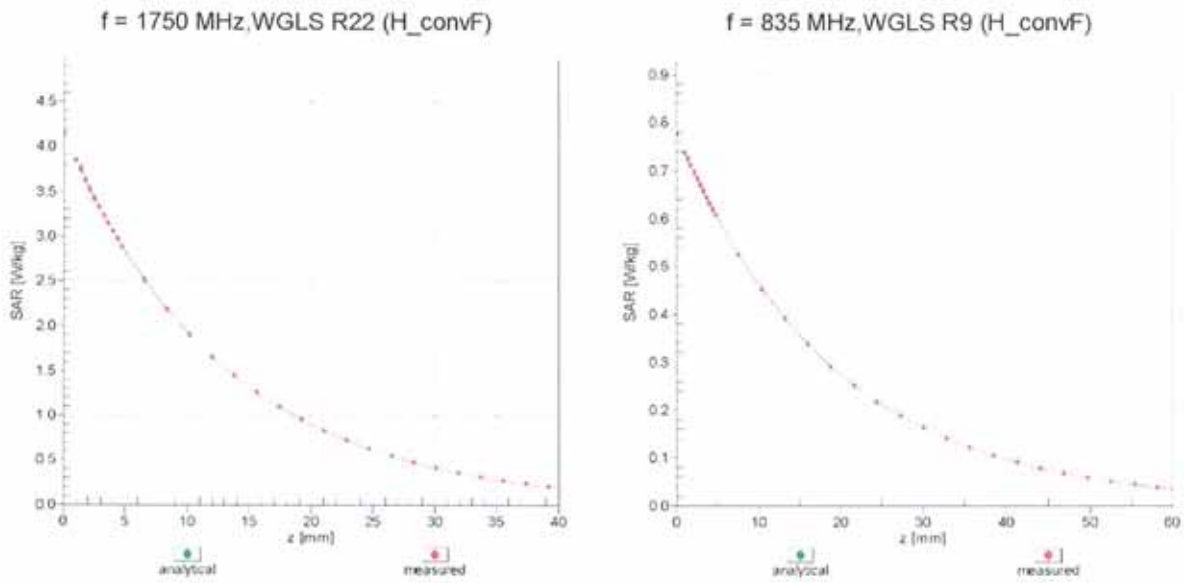

Deviation from Isotropy in Air Error (ϕ, ϑ), f = 900 MHz

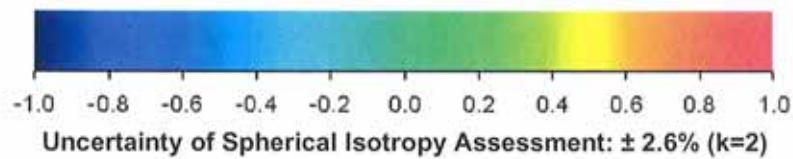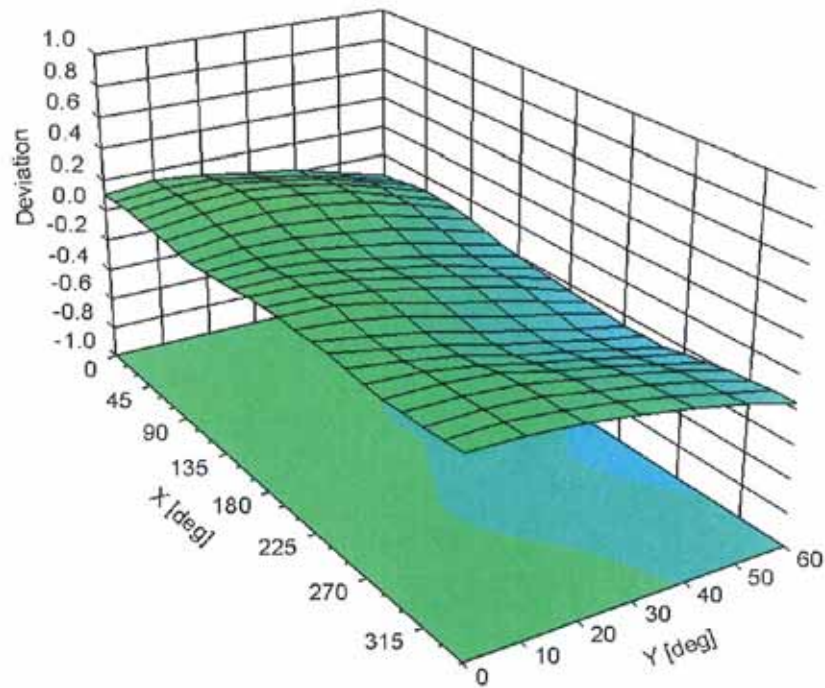

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



D3: DAE

IMPORTANT NOTICE

USAGE OF THE DAE 3

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE3 unit is connected to a fragile 3-pin battery connector. Customer is responsible to apply utmost caution not to bend or damage the connector when changing batteries.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration the customer shall remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, Customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BV-ADT (Auden)**

Certificate No: **DAE3-579_Sep10**

CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 579**

Calibration procedure(s) **QA CAL-06.v22
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **September 20, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	1-Oct-09 (No: 9055)	Oct-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bomholt	R&D Director	

Issued: September 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.327 \pm 0.1% (k=2)	404.379 \pm 0.1% (k=2)	404.160 \pm 0.1% (k=2)
Low Range	3.98675 \pm 0.7% (k=2)	3.99301 \pm 0.7% (k=2)	3.94834 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	358.0 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------

Appendix

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	200003.9	0.96	0.00
Channel X	+ Input	20003.19	3.09	0.02
Channel X	- Input	-19994.55	4.75	-0.02
Channel Y	+ Input	199992.4	-0.09	-0.00
Channel Y	+ Input	19999.51	0.41	0.00
Channel Y	- Input	-19997.22	3.18	-0.02
Channel Z	+ Input	200002.0	0.91	0.00
Channel Z	+ Input	20001.93	2.03	0.01
Channel Z	- Input	-19997.58	2.82	-0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2000.0	0.02	0.00
Channel X	+ Input	199.82	0.12	0.06
Channel X	- Input	-200.46	-0.56	0.28
Channel Y	+ Input	2000.3	0.47	0.02
Channel Y	+ Input	199.12	-0.78	-0.39
Channel Y	- Input	-201.36	-1.16	0.58
Channel Z	+ Input	1999.9	-0.07	-0.00
Channel Z	+ Input	199.18	-0.72	-0.36
Channel Z	- Input	-201.47	-1.47	0.73

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	7.07	5.75
	- 200	-4.60	-6.25
Channel Y	200	9.48	9.62
	- 200	-10.39	-10.96
Channel Z	200	8.79	8.42
	- 200	-9.64	-9.80

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	0.03	0.35
Channel Y	200	1.14	-	2.31
Channel Z	200	2.01	0.80	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16343	16314
Channel Y	16194	16427
Channel Z	15816	16265

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.70	-1.94	0.80	0.49
Channel Y	-1.55	-2.12	-0.66	0.27
Channel Z	0.57	-0.11	5.61	0.62

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



D4: SYSTEM VALIDATION DIPOLE



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D835V2-4d021_Mar11**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d021**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **March 23, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Dimce Iliev** Name: **Dimce Iliev** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Issued: March 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.0 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature during test	(21.8 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 mW / g
SAR normalized	normalized to 1W	9.60 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.65 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.57 mW / g
SAR normalized	normalized to 1W	6.28 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.31 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.3 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(21.7 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.56 mW / g
SAR normalized	normalized to 1W	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	10.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.68 mW / g
SAR normalized	normalized to 1W	6.72 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.63 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.0 Ω - 2.0 j Ω
Return Loss	- 31.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.9 Ω - 4.2 j Ω
Return Loss	- 26.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.393 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Design Modification by End User

The dipole has been modified with Teflon Rings (TR) placed within identified markings close to the end of each dipole arm. Calibration has been performed with TR attached to the dipole.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 22, 2004

DASY5 Validation Report for Head TSL

Date/Time: 18.03.2011 11:51:13

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.571 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.583 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.792 mW/g

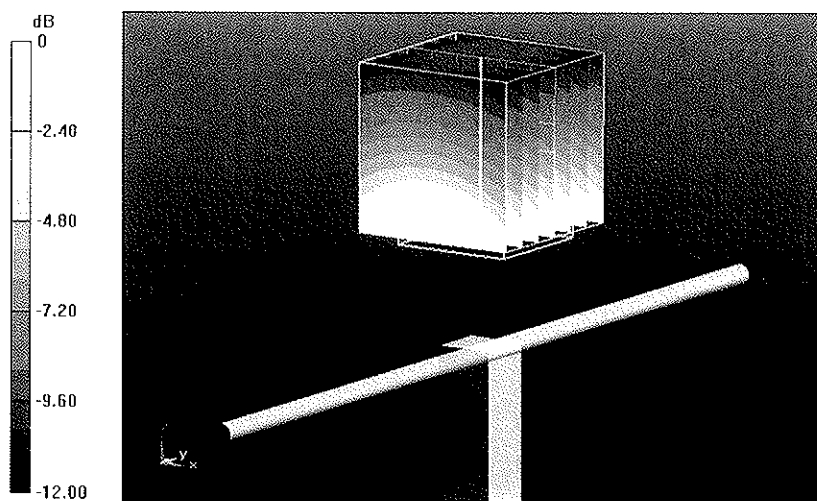


0 dB = 2.790mW/g

Impedance Measurement Plot for Head TSL

18 Mar 2011 10:32:43
S11 1 U FS 1: 51.996 ω -2.0469 ω 93.120 μ F 835.000 000 MHz

8
De1
Cor



avg
1.6

↑

CH2 S11 L06 5 dB/REF -20 dB 1: -31.025 dB 835.000 000 MHz

Cor

avg
1.6

↑

START 835.000 000 MHz

STOP 1.188.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 23.03.2011 10:45:49

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.615 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.794 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.981 mW/g

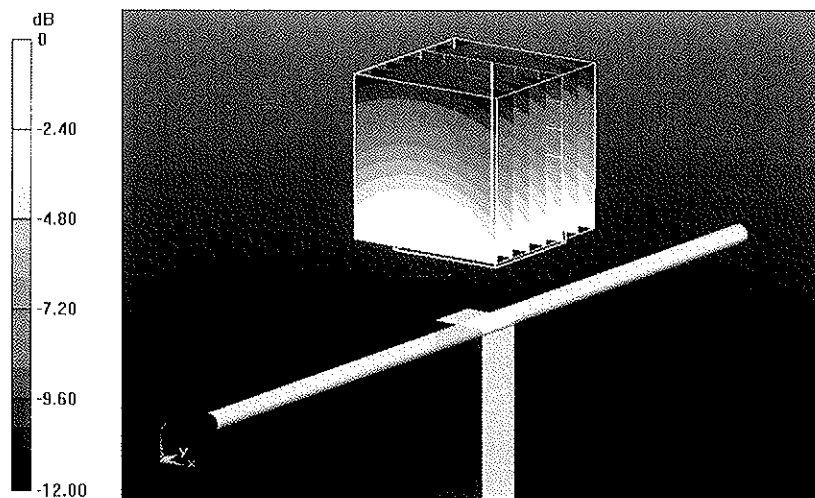

0 dB = 2.980mW/g

Impedance Measurement Plot for Body TSL


23 Mar 2011 10:18:11
[CH1] S11 1 U FS 1: 47.865 Ω -4.1953 Ω 45.433 pF 835.000 000 MHz

*
De1

Cor

Avg
16

↑




CH2 S11 L06 5 dB/REF -20 dB 1: -25.372 dB 835.000 000 MHz

Cor

Avg
16

↑

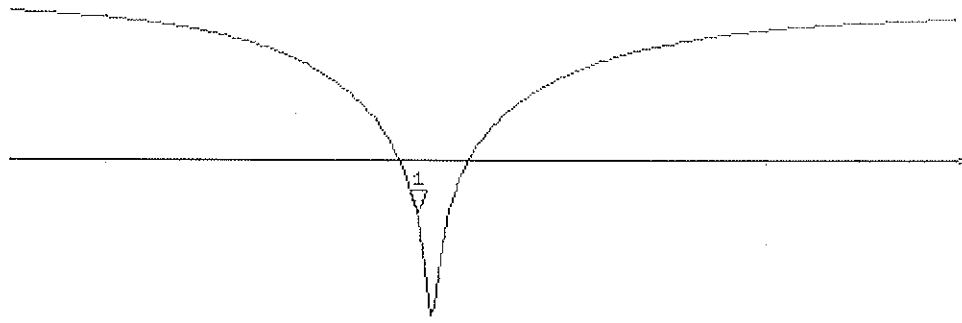

START 635.000 000 MHz

STOP 1 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D1900V2-5d022_Jan11**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d022**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **January 26, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Name** Dimce Iliev **Function** Laboratory Technician **Signature**

Approved by: **Name** Katja Pokovic **Function** Technical Manager **Signature**

Issued: January 27, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.5 \pm 6 %	1.43 mho/m \pm 6 %
Head TSL temperature during test	(20.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.4 mW / g
SAR normalized	normalized to 1W	41.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	40.9 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.37 mW / g
SAR normalized	normalized to 1W	21.5 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.3 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.56 mho/m ± 6 %
Body TSL temperature during test	(20.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.4 mW / g
SAR normalized	normalized to 1W	41.6 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.9 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.48 mW / g
SAR normalized	normalized to 1W	21.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.7 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.5 Ω + 4.0 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2 Ω + 4.0 j Ω
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.193 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 29, 2002

DASY5 Validation Report for Head TSL

Date/Time: 24.01.2011 11:20:43

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.002 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 19.131 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.37 mW/g

Maximum value of SAR (measured) = 12.963 mW/g

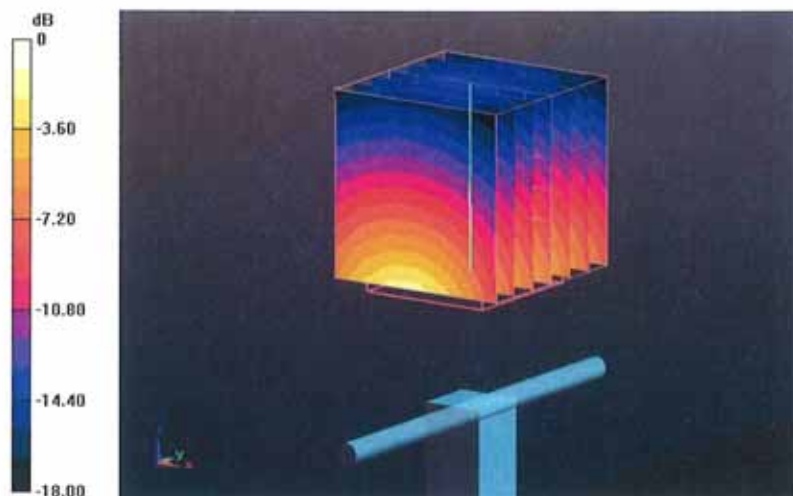

Impedance Measurement Plot for Head TSL


24 Jan 2011 10:16:09

CH1 S11 1 U FS 2: 51.539 Ω 3.9668 Ω 332.28 μH 1 900.000 000 MHz

De 1
CA

Avg
16

↑

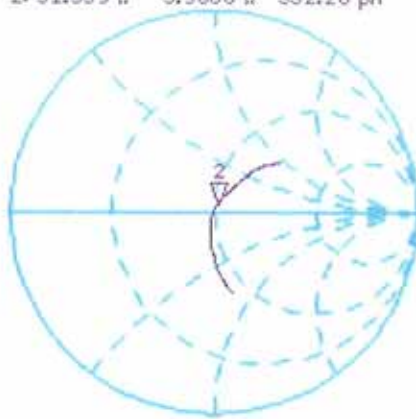


CH2 S11 LOG 5 dB/REF -20 dB 2:-27.558 dB 1 900.000 000 MHz

CA

Avg
16

↑

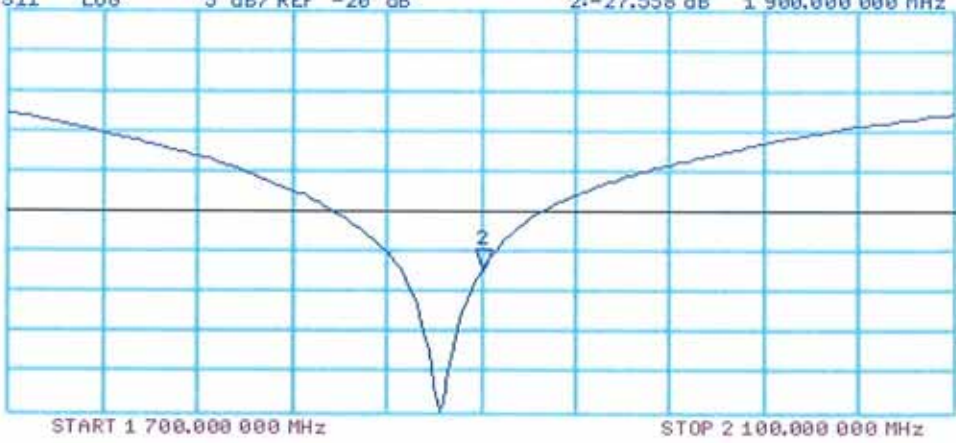

DASY5 Validation Report for Body TSL

Date/Time: 26.01.2011 12:06:07

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.936 V/m; Power Drift = -0.0021 dB

Peak SAR (extrapolated) = 17.774 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.48 mW/g

Maximum value of SAR (measured) = 13.186 mW/g

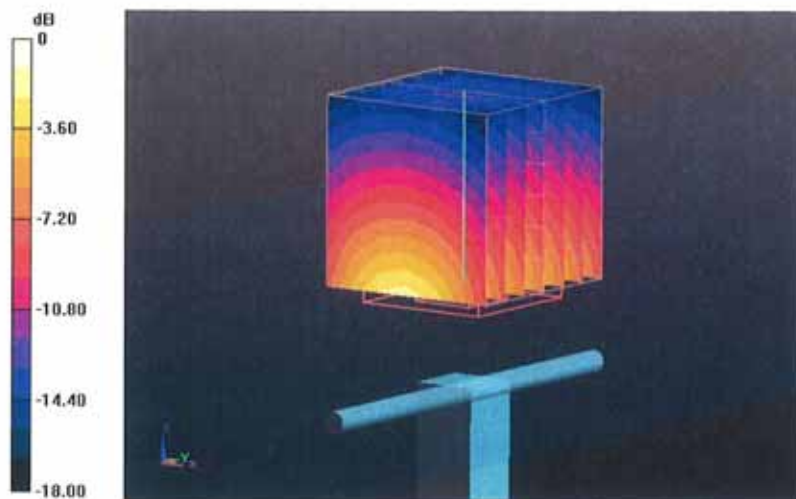

Impedance Measurement Plot for Body TSL

26 Jan 2011 10:44:12


CH1 S11 1 U FS 2: 46.244 Ω 4.0215 Ω 336.86 pF 1 900.000 000 MHz

De1

CA

avg
16

↑

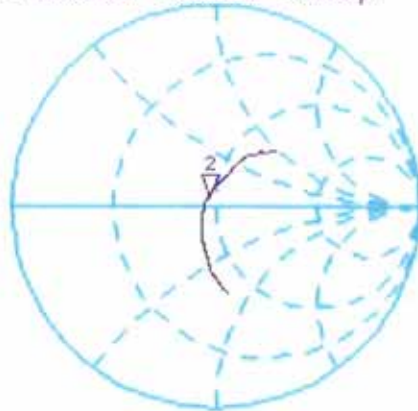


CH2 S11 LOG 5 dB/REF -20 dB 2:-24.853 dB 1 900.000 000 MHz

CA

avg
16

↑

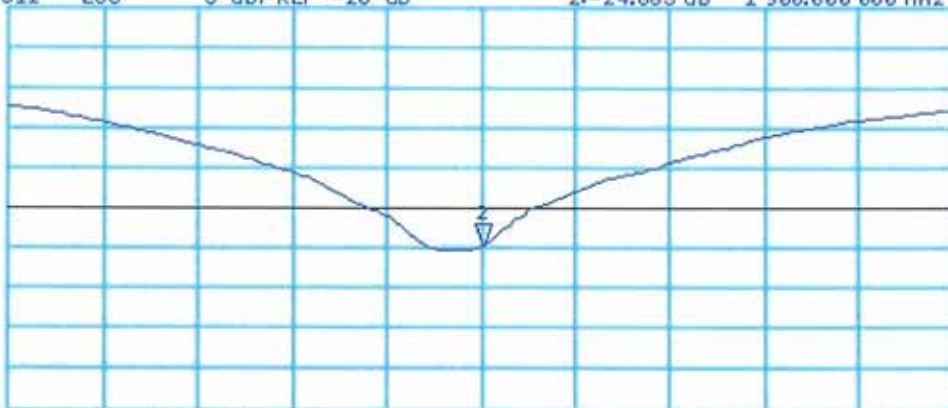

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz