

Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 1 of 129

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

0F

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT **AND INDUSTRY CANADA RSS 210**

	Or		
Product Name:	Smartphone		
Brand Name:	HTC		
Model Name:	РН06130		
Model Difference:	N/A		
FCC ID:	NM8PH06130		
IC:	4115B-PH06130		
Report No.:	EH/2011/40028		
Issue Date:	Apr. 26, 2011		
FCC Rule Part:	§15.247		
IC Rule Part:	RSS-210 issue 8 :2010, Annex 8		
	HTC Corporation		
Prepared for:	No.23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan		
	SGS Taiwan Ltd.		
Prepared by:	Electronics & Communication Laboratory		
	No. 134, Wu Kung Rd., Wuku Industrial		
	Zone, Taipei County, Taiwan.		
	<i>Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This</i>		
IC-MRA	document may be altered or revised by SGS Taiwan Ltd.		
Testing Laboratory 0513	personnel only, and shall be noted in the revision section of		
adulator.	the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan I td



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 2 of 129

VERIFICATION OF COMPLIANCE

Applicant:	HTC Corporation
	No.23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Product Name:	Smartphone
Brand Name:	HTC
FCC ID:	NM8PH06130
IC:	4115B-PH06130
Model No.:	PH06130
Model Difference:	N/A
File Number:	EH/2011/40028
Date of test:	Apr. 13, 2011 ~ Apr. 25, 2011
Date of EUT Received:	Apr. 13, 2011

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and RSS-Gen. issue 3 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 and IC RSS 210 issue 8: 2010 Annex 8. The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Jin	Date	Apr. 26, 2011	
_	Bondi Liu / Engineer			
Prepared By:	Celine Chou	Date	Apr. 26, 2011	
_	Celine Chou / Clerk			
Approved By:	Jim Chang	Date	Apr. 26, 2011	

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488



Version

Version No.	Date	Description
00	Apr. 26, 2011	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上熊系五段工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 4 of 129

Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Related Submittal(s) / Grant (s)	
	1.3	Test Methodology	
	1.4	Test Facility	
	1.5	Special Accessories	
	1.6	Equipment Modifications	
2	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Configuration of Tested System	10
3	SUM	IMARY OF TEST RESULTS	
4	DES	CRIPTION OF TEST MODES	
5	CON	DUCTED EMISSION TEST	12
	5.1.	Standard Applicable:	
	5.2.	Measurement Equipment Used:	12
	5.3.	EUT Setup:	
	5.4.	Measurement Procedure:	13
	5.5.	Measurement Result:	13
6	PEA	K OUTPUT POWER MEASUREMENT	
	6.1	Standard Applicable:	16
	6.2	Measurement Equipment Used:	17
	6.3	Test Set-up:	
	6.4	Measurement Procedure:	
	6.5	Measurement Result:	19
7	6dB	BANDWIDTH	
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	
	7.3	Test Set-up:	
	7.4	Measurement Procedure:	
	7.5	Measurement Result:	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



8	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	
	8.1	Standard Applicable:	
	8.2	Measurement Equipment Used:	
	8.3	Test SET-UP:	
	8.3.1	Conducted Emission at antenna port:	
	8.3.2	Radiated emission:	
	8.4	Measurement Procedure:	
	8.5	Field Strength Calculation:	
	8.6	Measurement Result:	
9	SPUR	NOUS RADIATED EMISSION TEST	49
	9.1	Standard Applicable	49
	9.2	Measurement Equipment Used:	49
	9.3	Test SET-UP:	
	9.4	Measurement Procedure:	
	9.5	Field Strength Calculation	
	9.6	Measurement Result:	
10	PEAK	K POWER SPECTRAL DENSITY	
	10.1	Standard Applicable:	
	10.2	Measurement Equipment Used:	
	10.3	Test Set-up:	
	10.4	Measurement Procedure:	
	10.5	Measurement Result:	
11	ANTI	ENNA REQUIREMENT	
	11.1.	Standard Applicable:	
	11.2.	Antenna Connected Construction:	
12	99%]	BANDWIDTH MEASUREMENT	
	12.1.	Standard Applicable:	
	12.2.	Measurement Equipment Used:	
	12.3.	Test Set-up:	
	12.4.	Measurement Procedure:	
	12.5.	Measurement Result:	
PH	OTOG	RPHS OF SET UP	
PH	отоб	RPHS OF EUT	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號



1 GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	Smartphone		
Brand Name:	HTC		
Model Name:	PH06130		
Model difference:	N/A		
Simple Hands-Free:	 Model No.: HS G235, Supplier: KINGSTATE Model No.: RC E160, Supplier: FOSTER Model No.: RC E160, Supplier: COTRON Model No.: RC E160, Supplier: Merry 		
USB Cable:	 Model No.: DC M410, Supplier: COXOC Model No.: DC M410, Supplier: Foxlink Model No.: DC M410, Supplier: MEC 		
	3.7Vdc Li-Ion battery or 5Vdc from AC/DC adapter		
Power Supply	Battery:	 Model No.: BH06100, Supplier: Formosa Model No.: BH06100, Supplier: TWS 	
	1. Model No.: TC X 250, Supplier: DeltaAdapter :2. Model No.: TC X 250, Supplier: Emerson3. Model No.: TC X 250, Supplier: Phihong		

GSM and WCDMA:

	Operating Frequency	Rated Power	
	GSM/GPRS 850, Class 10	824.2 MHz- 848.8 MHz	33 dBm
Cellular Phone Standards	GSM/GPRS 1900, Class 10	1850.2MHz – 1909.8MHz	30 dBm
Frequency Range and Power:	EDGE 850, Class 10	824.2 MHz- 848.8 MHz	27 dBm
rower.	EDGE 1900, Class 10	1850.2MHz – 1909.8MHz	26 dBm
	WCDMA/HSDPA Band II	1852.4MHz – 1907.6MHz	23.5 dBm
	WCDMA/HSDPA Band V 826.4MHz - 846.6MHz		23.5 dBm
Type of Emission:	GPRS850: 249KGXW, GPRS1900: 245KGXW EDGE 850: 245KG7W, EDGE 1900: 247KG7W WCDMA Band II: 4M14F9W,HSDPA Band II: 4M13F9W WCDMA Band V: 4M13F9W,HSDPA Band V: 4M12F9W		
Hardware Version:	N/A		
Software Version:	N/A		
IMEI:	357325040011579		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, for a platication at the investigation of the optication approval of the Company. Any unauthorized alteration, may be proceeding the platication of the optication approval of the Company. Any unauthorized alteration, for a platication approval of the Company. Any unauthorized alteration, for mercing alternation, and we have proceeding the fully available of the limit of the limit of the limit of the limit of approximation approval of the Company. Any unauthorized alteration, the platication approval of the Company. forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Bluetooth:

Frequency Range:	2402 – 2480MHz	
Bluetooth Version:	V3.0	
Channel number:	79 channels	
Transmit Power:	0.04 dBm (Peak)	
Modulation type:	Frequency Hopping Spread Spectrum	
Antenna Designation:	PIFA Antenna / Antenna Gain: -0.22dBi	
Type of Emission:	1M17FXD	

The EUT is compliance with Bluetooth.

WLAN: 802.11 b/g/n

Frequency Range:	2412 – 2462 MHz
Channel number:	11 channels
Max. Output Power:	802.11 b: 20.13 dBm (Peak) 802.11 g: 16.72 dBm (Peak) 802.11 n _20MHz: 16.74dBm (Peak)
Modulation Technology:	DSSS, OFDM
Modulation type:CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM	
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72Mbps
Antenna Designation:	PIFA Antenna / Antenna Gain: -0.22dBi
Type of Emission:	17M7G1D

The EUT is compliance with IEEE 802.11 b/g/n Standard.

GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion os- cillator	19.2MHz
Antenna Designation	Fixed Internal

This test report applies for WLAN 802.11 b/g/n.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, for a platication at the investigation of the optication approval of the Company. Any unauthorized alteration, may be proceeding the platication of the optication approval of the Company. Any unauthorized alteration, for a platication approval of the Company. Any unauthorized alteration, for mercing alternation, and we have proceeding the fully available of the limit of the limit of the limit of the limit of approximation approval of the Company. Any unauthorized alteration, the platication approval of the Company. forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group



1.2 **Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: NM8PH06130 filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules. And IC: 4115B-PH06130 filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 8.

1.3 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2010. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 **Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5 **Special Accessories**

Not available for this EUT intended for grant.

Equipment Modifications 1.6

Not available for this EUT intended for grant.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2 SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Configuration of Tested System 2.4

Fig. 2-1 Radiated Emission and AC Power line Configuration




Fig. 2-2 Conduced Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model / Type No.	Series No.
1.	Notebook	DELL	D504	CNF345Q1R

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ard_contrellins_and</u> conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration,



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)/	AC Power Line Conducted Emission	Compliant
RSS-Gen §7.2.4		
§15.247(b)/	Peak Output Power	Compliant
RSS-210 §A8.4(4)		
§15.247(b)/	6dB Bandwidth	Compliant
RSS-210 §A8.4(4)		
§15.247(c)/	100 KHz Bandwidth Of	Compliant
RSS-210 §A8.4(4)	Frequency Band Edges	
§15.247(c)/	Spurious Emission	Compliant
RSS-210 §A8.4(4)		
§15.247/	Peak Power Density	Compliant
RSS-210 §A8.2(b)		
§15.203/	Antenna Requirement	Compliant
RSS-GEN §7.1.2,		
RSS-Gen §4.6.1	99% Power Bandwidth	Compliant

DESCRIPTION OF TEST MODES 4

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) • mid (2437MHz) and high (2462MHz) with 1Mbps data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) • mid (2437MHz) and high (2462MHz) with 6Mbps data rate are chosen for full testing.

802.11 n 20MHz mode: Channel low (2412MHz) > mid (2437MHz) and high (2462MHz) with 6.5Mbps data rate are chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 **CONDUCTED EMISSION TEST**

5.1. **Standard Applicable:**

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Limits dB(uV)						
Quasi-peak	Average					
66 to 56	56 to 46					
56	46					
60	50					
Note 1.The lower limit shall apply at the transition frequencies						
	dB Quasi-peak 66 to 56 56 60					

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. Measurement Equipment Used:

	AC Power Line Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST CAL								
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2010	09/14/2011			
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2011	02/01/2012			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2011	02/01/2012			
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010	11/27/2011			

5.3. EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



5.4. Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5. Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Note: Refer to next page for measurement data and plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ard_contrellins_and</u> conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 14 of 129

AC POWER LINE CONDUCTED EMISSION TEST DATA

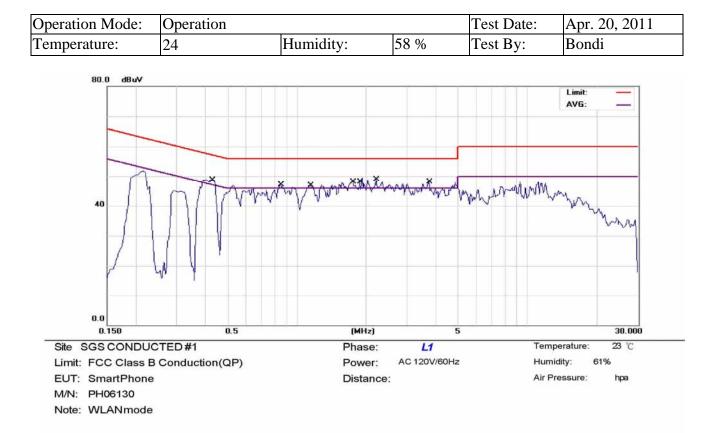

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.4289	44.47	0.12	44.59	57.27	-12.68	QP	
2		0.4289	30.68	0.12	30.80	47.27	-16.47	AVG	
3		0.8486	39.35	0.11	39.46	56.00	-16.54	QP	
4		0.8486	25.44	0.11	25.55	46.00	-20.45	AVG	
5		0.8489	39.12	0.11	39.23	56.00	-16.77	QP	
6		0.8489	25.50	0.11	25.61	46.00	-20.39	AVG	
7		1.1498	39.32	0.12	39.44	56.00	-16.56	QP	
8		1.1498	24.75	0.12	24.87	46.00	-21.13	AVG	
9		1.7406	40.72	0.14	40.86	56.00	-15.14	QP	
10		1.7406	26.08	0.14	26.22	46.00	-19.78	AVG	
11		1.8760	39.56	0.15	39.71	56.00	-16.29	QP	
12		1.8760	24.93	0.15	25.08	46.00	-20.92	AVG	
13		2.2096	39.47	0.15	39.62	56.00	-16.38	QP	
14		2.2096	23.92	0.15	24.07	46.00	-21.93	AVG	
15		3.7387	37.88	0.17	38.05	56.00	-17.95	QP	
16		3.7387	25.28	0.17	25.45	46.00	-20.55	AVG	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 15 of 129

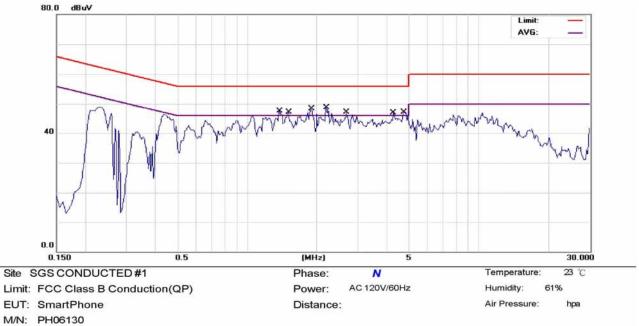

Note: WLANmode

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		1.3757	38.32	0.16	38.48	56.00	-17.52	QP	
2		1.3757	26.32	0.16	26.48	46.00	-19.52	AVG	
3		1.5052	38.06	0.17	38.23	56.00	-17.77	QP	
4		1.5052	23.79	0.17	23.96	46.00	-22.04	AVG	
5		1.8864	38.17	0.18	38.35	56.00	-17.65	QP	
6		1.8864	25.50	0.18	25.68	46.00	-20.32	AVG	
7		2.1928	37.84	0.18	38.02	56.00	-17.98	QP	
8		2.1928	26.07	0.18	26.25	46.00	-19.75	AVG	
9		2.6834	36.58	0.19	36.77	56.00	-19.23	QP	
10		2.6834	23.58	0.19	23.77	46.00	-22.23	AVG	
11		4.2766	37.36	0.21	37.57	56.00	-18.43	QP	
12		4.2766	28.85	0.21	29.06	46.00	-16.94	AVG	
13		4.7343	38.72	0.22	38.94	56.00	-17.06	QP	
14	*	4.7343	30.10	0.22	30.32	46.00	-15.68	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 16 of 129

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(a)(2), (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and
5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to Itis General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



According to RSS-210 issue 8,§A8.4(4), for systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4 (5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012			
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2011	01/24/2012			
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011	01/04/2012			
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011			
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011			
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011			
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011			
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012			

6.2 Measurement Equipment Used:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

SGS Taiwan Ltd 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sgs.com



6.3 Test Set-up:



6.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



6.5 Measurement Result:

802.11b

	Cable loss $= 0$	Peak Power Output				
СН			Data 2	Rate		Required Limit
СП	Frequency (MHz)	1	2	5.5	11	Kequireu Liint
1	2412	19.96	19.89	19.82	19.76	1 Watt = 30 dBm
6	2437	20.13	20.08	19.97	19.91	1 Watt = 30 dBm
11	2462	19.87	19.82	19.75	19.69	1 Watt = 30 dBm
	Cable loss $= 0$		Av	erage Pow	ver Output	t
СН			Data 2	Rate		Doguinad Limit
СП	Frequency (MHz)	1	2	5.5	11	Required Limit
1	2412	17.56	17.50	17.47	17.42	1 Watt = 30 dBm
6	2437	17.68	17.64	17.59	17.55	1 Watt = 30 dBm
11	2462	17.20	17.14	17.10	17.07	1 Watt = 30 dBm

802.11g

Cab	le loss = 0		Peak Power Output								
СН	Frequency		Data Rate								
CII	(MHz)	6	9	12	18	24	36	48	54	Required Limit	
1	2412	16.72	16.67	16.62	16.58	16.51	16.45	16.38	16.30	1 Watt = 30 dBm	
6	2437	16.72	16.65	16.60	16.55	16.47	16.42	16.36	16.29	1 Watt = 30 dBm	
11	2462	16.33	16.30	16.24	16.19	16.15	16.11	16.08	16.02	1 Watt = 30 dBm	
Cab	le loss = 0				Ave	erage Po	ower Ou	ıtput			
СН	Frequency				Data	Rate				Required Limit	
	(MHz)	6	9	12	18	24	36	48	54	Kequii eu Linnt	
1	2412	13.11	13.06	13.00	12.96	12.91	12.88	12.82	12.77	1 Watt = 30 dBm	
6	2437	13.30	13.26	13.21	13.17	13.12	13.04	12.98	12.92	1 Watt = 30 dBm	
11	2462	13.00	12.96	12.91	12.87	12.83	12.78	12.73	12.66	1 Watt = 30 dBm	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, for a platication at the investigation of the optication approval of the Company. Any unauthorized alteration, may be proceeding the platication of the optication approval of the Company. Any unauthorized alteration, for a platication approval of the Company. Any unauthorized alteration, for mercing alternation, and we have proceeding the fully available of the limit of the limit of the limit of the limit of approximation approval of the Company. Any unauthorized alteration, the platication approval of the Company. forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 20 of 129

802.11n_20M

Cab	ble loss = 0		Peak Power Output							
СН	Frequency		Required Limit							
CII	(MHz)	6.5	13	19.5	26	39	52	58.5	65	Kequii eu Linnt
1	2412	16.56	16.50	16.42	16.34	16.28	16.21	16.17	16.08	1 Watt = 30 dBm
6	2437	16.74	16.68	16.62	16.57	16.51	16.45	16.39	16.34	1 Watt = 30 dBm
11	2462	16.35	16.29	16.22	16.14	16.09	16.01	15.96	15.91	1 Watt = 30 dBm
Cab	ble loss = 0				Ave	erage Po	ower Ou	ıtput		
СН	Frequency				Data	Rate				Required Limit
СП	(MHz)	6.5	13	19.5	26	39	52	58.5	65	Kequirea Linni
1	2412	13.24	13.19	13.14	13.09	13.00	12.96	12.91	12.85	1 Watt = 30 dBm
6	2437	13.19	13.64	13.57	13.48	13.40	13.32	13.26	13.19	1 Watt = 30 dBm
11	2462	13.04	13.00	12.95	12.91	12.86	12.81	12.75	12.71	1 Watt = 30 dBm

*Note: Offset 6.5dB

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, the function the results advised atteration, and be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to the function of the opport of the printed or approximate of the limit of the limit of the limit of the limit of a printed or approximate of the limit of the limit




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 21 of 129

802.11b, 1Mbps

Peak Power Output Plot (CH Low)

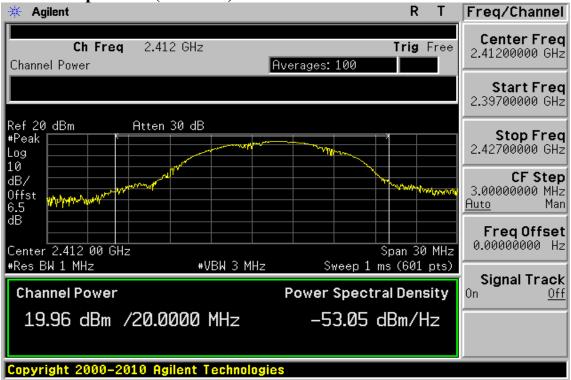

Peak Power Output Plot (CH Mid)

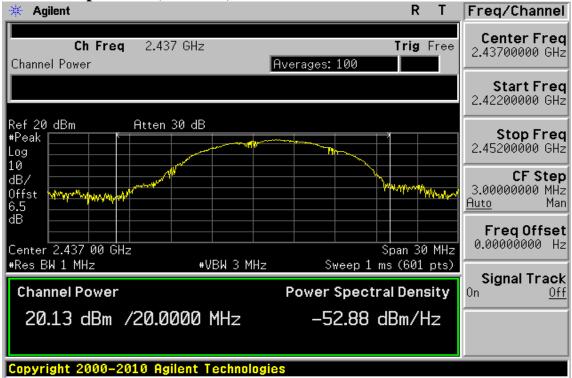

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 22 of 129

Peak Power Output Plot (CH High)



Average Power Output Plot (CH Low)

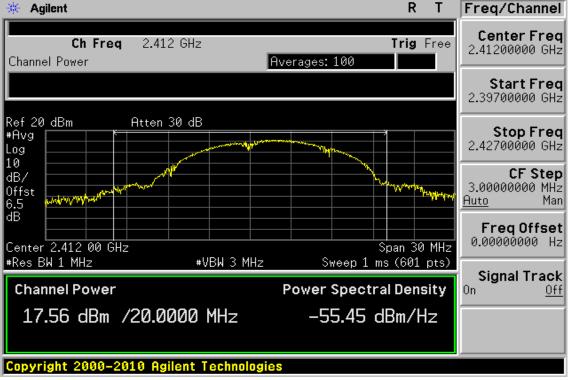

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 23 of 129

Average Power Output Plot (CH Mid)

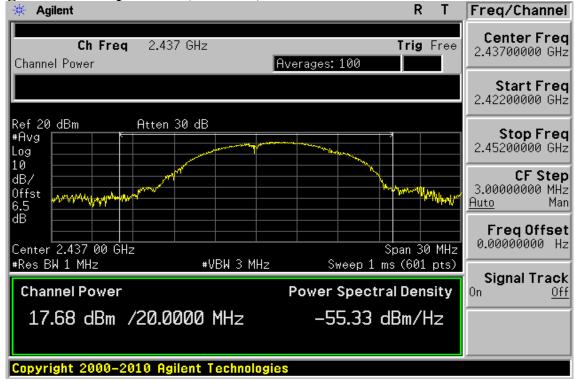

Average Power Output Plot (CH High)

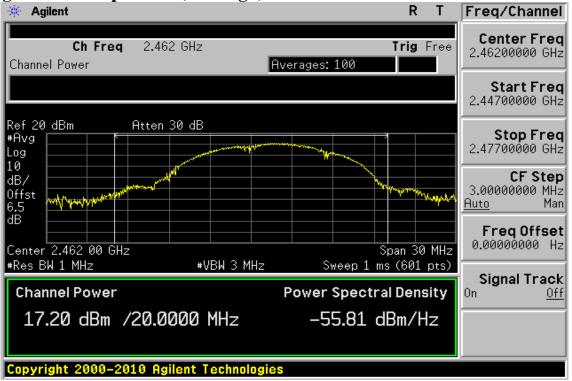

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 24 of 129

802.11g, 6Mbps

Peak Power Output Plot (CH Low)

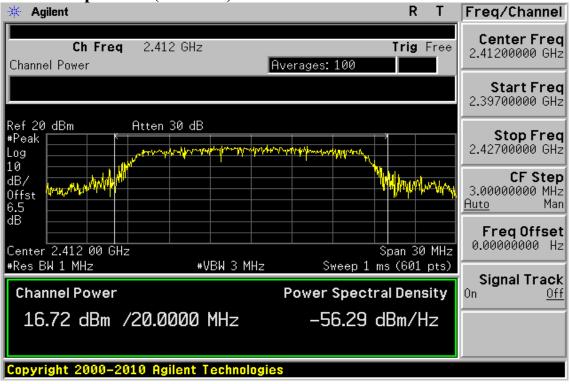

Peak Power Output Plot (CH Mid)

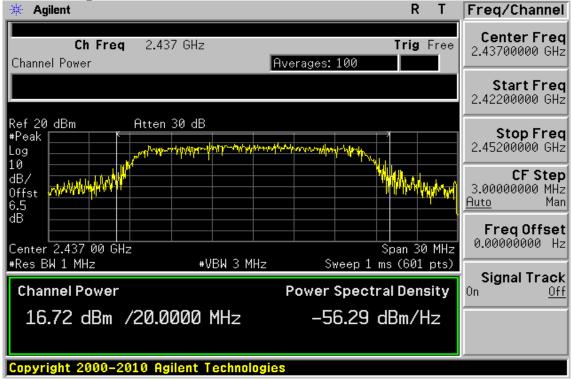

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 25 of 129

Peak Power Output Plot (CH High)

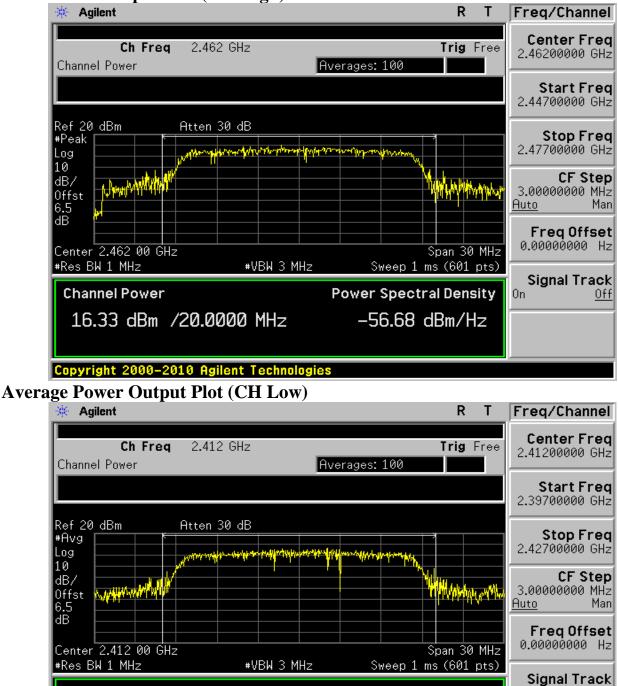

Copyright 2000-2010 Agilent Technologies Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Power Spectral Density

-59.90 dBm/Hz

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Channel Power

13.11 dBm /20.0000 MHz

f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group


0n

Off



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 26 of 129

Average Power Output Plot (CH Mid)

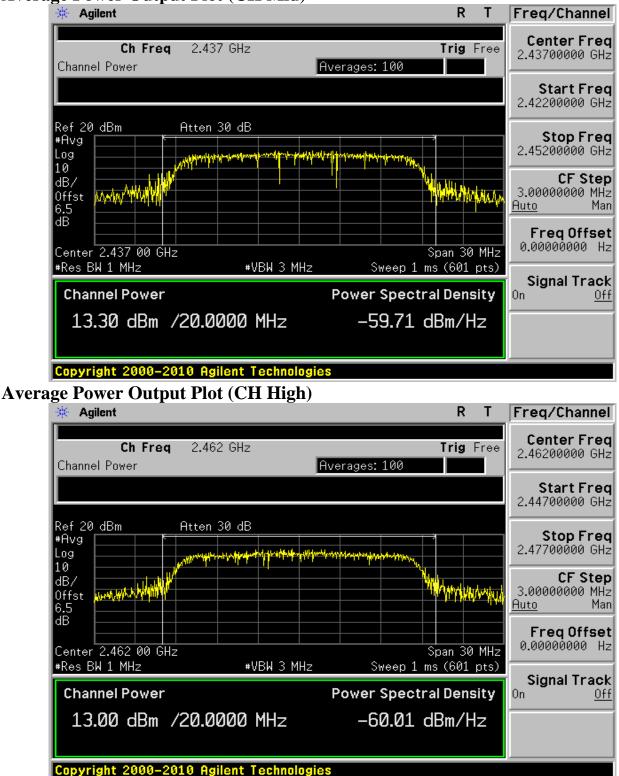

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 27 of 129

802.11n_20M, 6.5Mbps **Peak Power Output Plot (CH Low)**

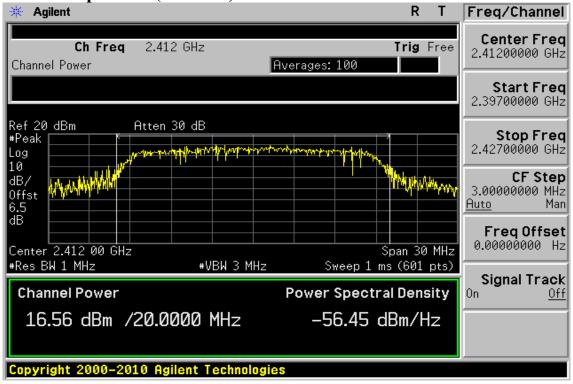

Peak Power Output Plot (CH Mid)

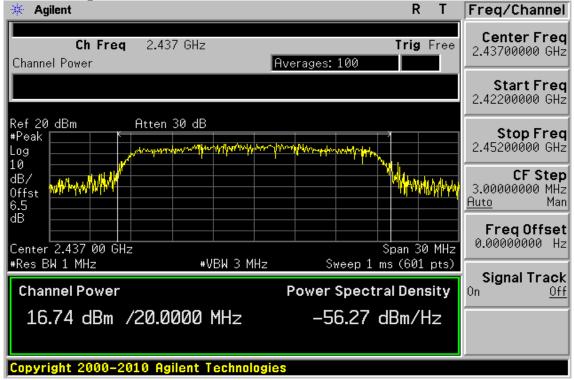

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 28 of 129

Peak Power Output Plot (CH High)

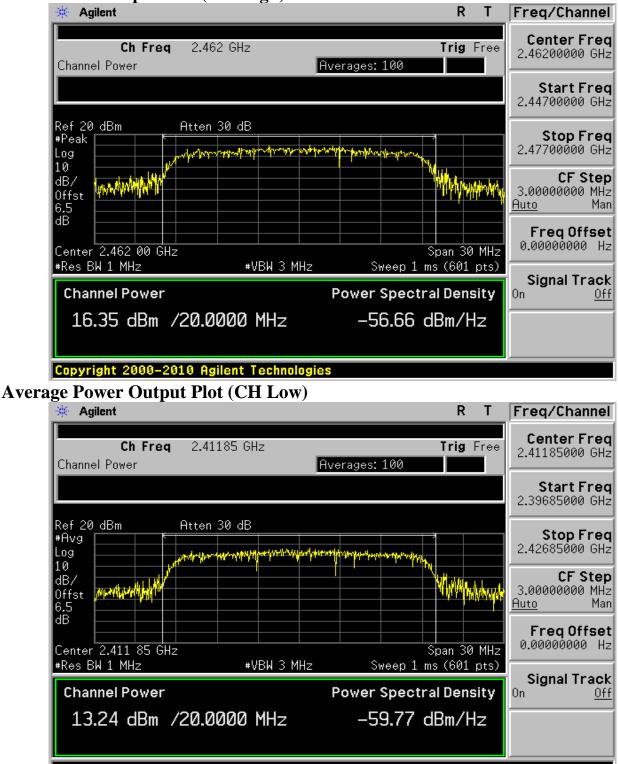

Copyright 2000-2010 Agilent Technologies

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 29 of 129

Average Power Output Plot (CH Mid)

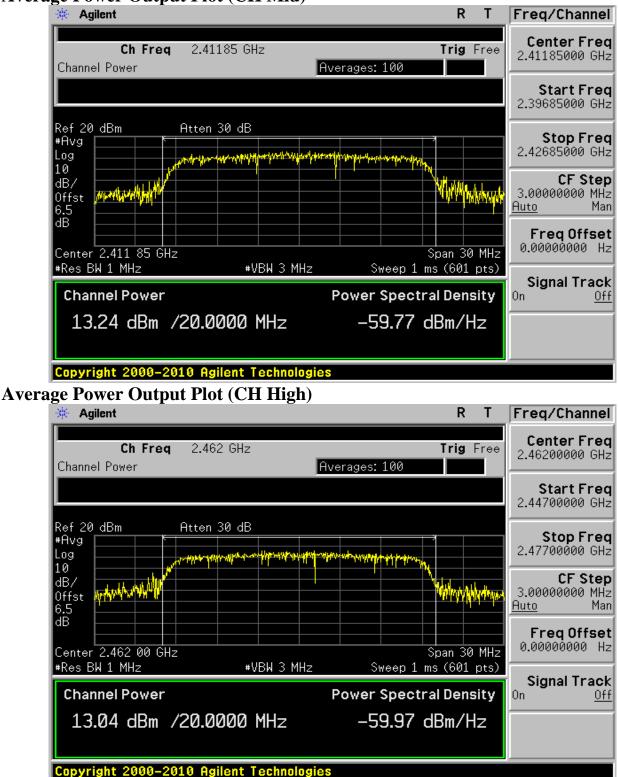

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 30 of 129

7 6dB BANDWIDTH

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

According to RSS 210 issue 8: 2010Annex 8.2. Systems employing digital modulation techniques (which includes direct sequence) can now be certified under RSS-210 provided they comply with the following requirements: The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1.Place the EUT on the table and set it in transmitting mode.

- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the 3.antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = 3*RBW, Span= 30M/60MHz, Sweep=auto

4. Mark the peak frequency and -6dB (upper and lower) frequency.

5. Repeat above procedures until all frequency measured were complete.



7.5 Measurement Result:

802.11b

Frequency	Bandwidth	Bandwidth	Result
(MHz)	(MHz)	(KHz)	Kesun
2412	7.581	> 500	PASS
2437	7.577	> 500	PASS
2462	7.567	> 500	PASS

802.11g

Frequency	Bandwidth	Bandwidth	Degult
(MHz)	(MHz)	(KHz)	Result
2412	15.176	> 500	PASS
2437	15.173	> 500	PASS
2462	15.178	> 500	PASS

802.11n 20M

Frequency	Bandwidth	Bandwidth	Result
(MHz)	(MHz)	(KHz)	Kesuit
2412	17.331	> 500	PASS
2437	15.170	> 500	PASS
2462	15.165	> 500	PASS

offset: 6.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, the function the results advised atteration, and be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to the function of the opport of the printed or approximate of the limit of the limit of the limit of the limit of a printed or approximate of the limit forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 32 of 129

802.11b 6dB Bandwidth Test Data CH-Low

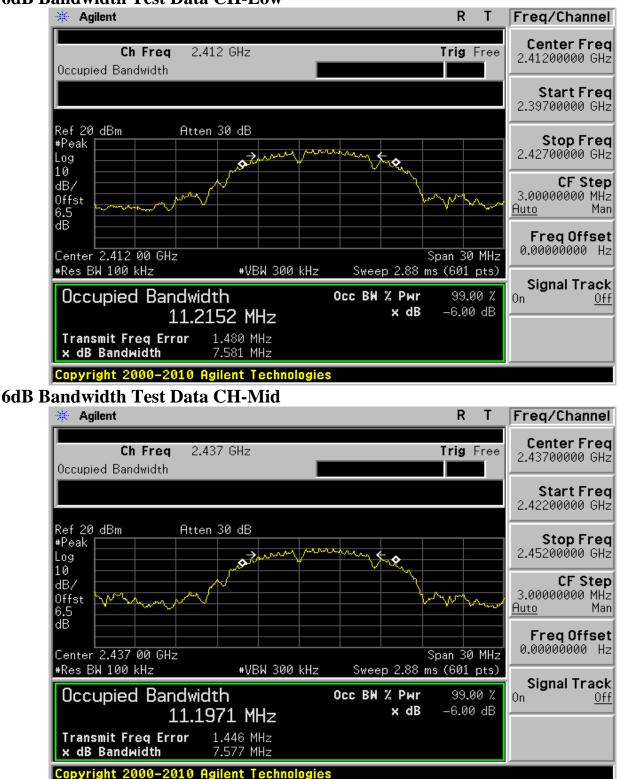

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 33 of 129

6dB Bandwidth Test Data CH-High



802.11g

6dB Bandwidth Test Data CH-Low

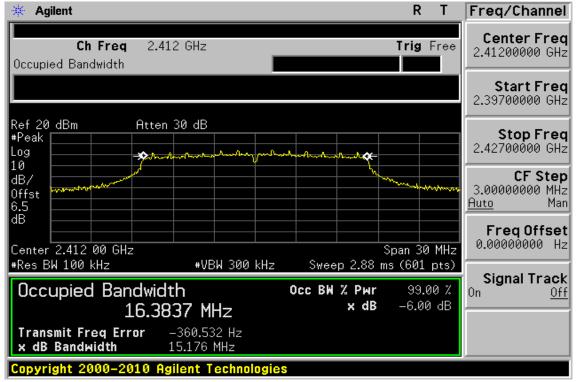

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 34 of 129

6dB Bandwidth Test Data CH-Mid

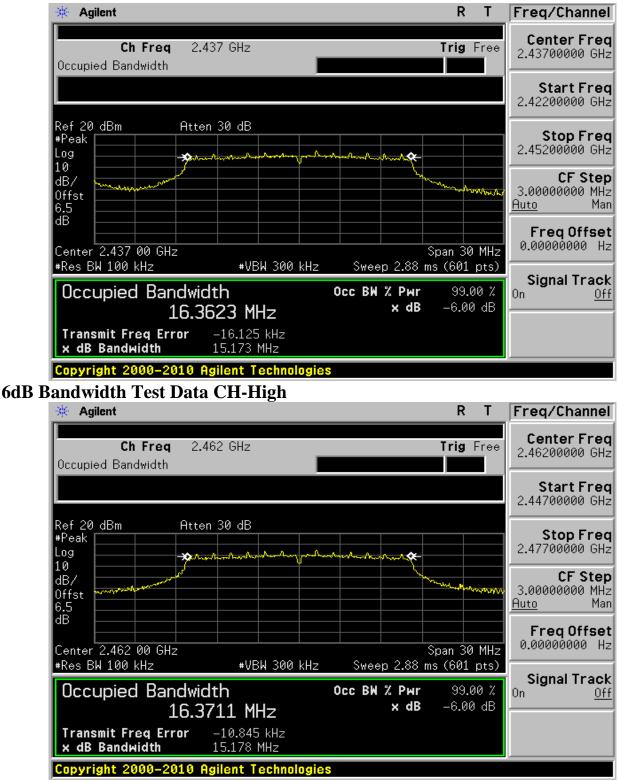

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 35 of 129

802.11n 20M



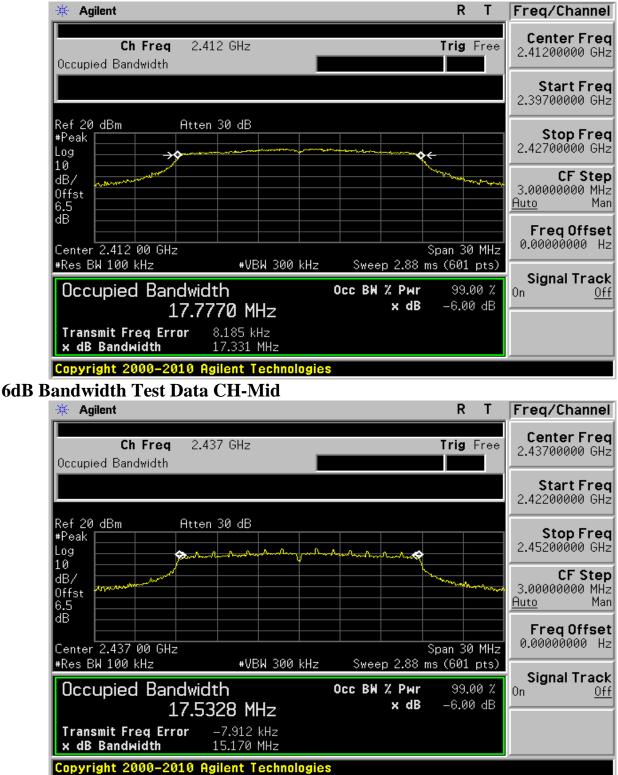

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 **Issue Date: Apr. 26, 2011** Page: 36 of 129

6dB Bandwidth Test Data CH-High

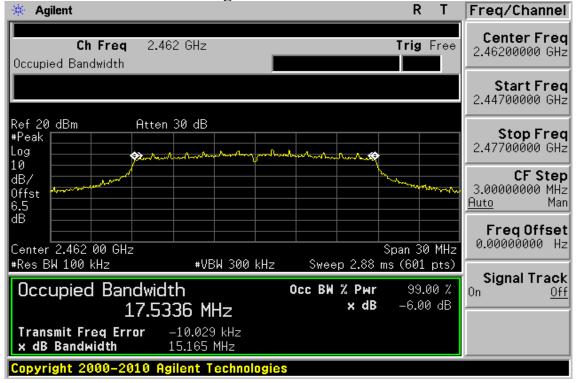

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Siness States and to be states and the states and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Member of SGS Group

www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 37 of 129

8 **100KHz BANDWIDTH OF BAND EDGES MEASUREMENT**

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

According to RSS-210 issue 8,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2 Measurement Equipment Used:

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012					
Spectrum Analyzer	Agilent	E7405A	US41160416	12/25/2009	12/24/2011					
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2011	02/11/2012					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011	01/04/2012					
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2010	07/04/2011					
Software	Audix	Ver 6.2009 – 23B	N/A	N/A	N/A					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> SGS Taiwan Ltd 台灣檢驗科技股份有限公司 t (886-2) 2299-3279

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group




8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

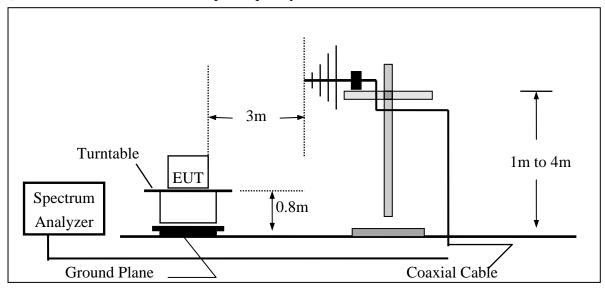

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

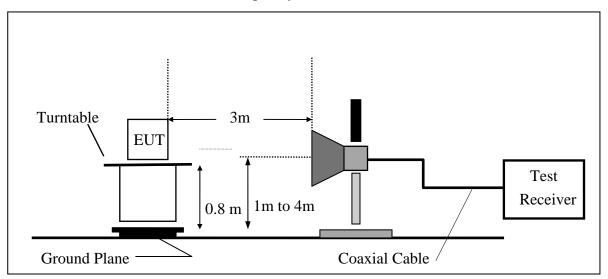

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Member of SGS Group

f (886-2) 2298-0488 www.tw.sgs.com



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 40 of 129

802.11b **Band Edges Test Data CH-Low**

Agilent R L Freq/Channel Mkr1 2.413 58 GHz Center Freq 9.99 dBm Ref 20 dBm Atten 30 dB 2.36500000 GHz #Peak Log 10 Start Freq dB/ 2.31000000 GHz Offst 6.5 dB Stop Freq 2.42000000 GHz 2 3 DI 10.0 CF Step dBm 11.0000000 MHz LgAv <u>Auto</u> Man Start 2.310 00 GHz Stop 2.420 00 GHz Freq Offset 0.0000000 Hz #Res BW 100 kHz #VBW 100 kHz Sweep 13.28 ms (601 pts) X Axis 2.413 58 GHz Amplitude Marker Trace Туре 9.99 dBm -44.32 dBm (1)Freq (1) Freq 2.400 00 GHz Signal Track (1)-45.44 dBm Freq 2.390 00 GHz 0n Off

Copyright 2000-2010 Agilent Technologies

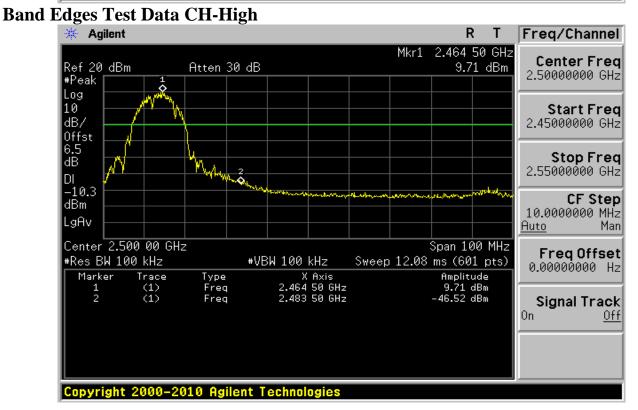

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Radiated Emission: 802.11 b mode

Operation Mode	TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Tmperature	27 °C	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2390.00	56.91	45.42	-1.06	55.85	44.36	74.00	54.00	-9.64	AV
Operation Fundamen Temperatu Humidity	tal Frequer		H Low MHz			Test Test Pol	By	Apr. 26, 20 Bondi Hor.)11
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2390.00	55.79	45.57	-1.06	54.73	44.51	74.00	54.00	-9.49	AV

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode

TV CILLICAL

66 %

Test Data

Amm 26 2011

Operation	Mode	TXC	H High			Test	Date	Apr. 26, 20	JII
Fundamental Frequency 2462 MHz		MHz			Test By Bondi				
Temperatu	ire	27				Pol	•	Ver.	
Humidity		66 %							
	Peak	AV		Actu	ial FS	Peak	AV		
Freq.	e	Reading		Peak	AV	Limit	Limit	U	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)) (dBuV/m)) (d Bu V/m)	$(\mathbf{d}\mathbf{B}\mathbf{u}\mathbf{V})$	m) (dB)	
2483.56	54.51	43.54	-0.59	53.92	42.95	74.00	54.00	-11.05	AV
									.
Operation	Mode		'H High			Test	t Date	Apr. 26, 20	011
Fundamen	tal Frequei	ncy 2462	MHz			Test	t By	Bondi	
Temperatu	ire	27				Pol		Hor.	

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	U	e		Peak		Limit) (dBuV/m)	Limit	0	Remark
(\mathbf{WIIIZ})	$(\mathbf{u}\mathbf{D}\mathbf{u}\mathbf{v})$	(ubuv)	CF(ub)		(ubuv/m)) (u bu v /m)		(ub)	
2483.50	51.43	43.88	-0.59	50.84	43.29	74.00	54.00	-10.71	AV

Remark :


Humidity

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 43 of 129

802.11g **Band Edges Test Data CH-Low**

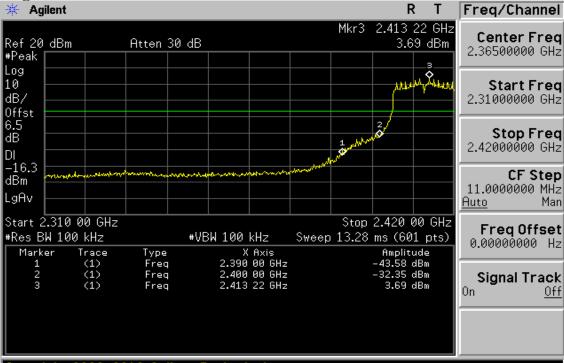

Copyright 2000-2010 Agilent Technologies

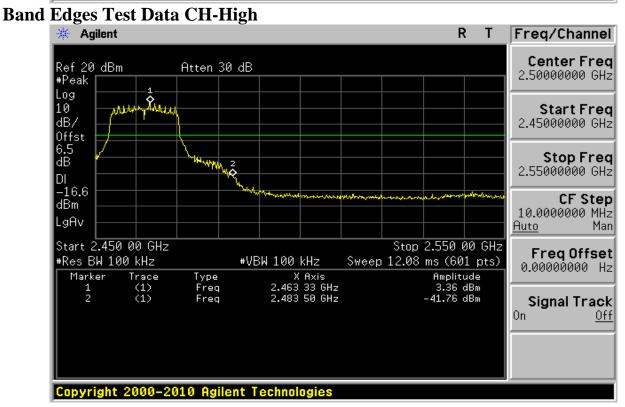

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com Member of SGS Group



Radiated Emission: 802.11 g mode

Operation Mode	TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Tmperature	27 °C	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)(Limit (dBuV/n	0	Remark
2390.00	66.88	51.82	-1.06	65.82	50.76	74.00	54.00	-3.24	AV
Operation Fundament Temperatu Humidity	tal Frequei		CH Low MHz			Test Test Pol	By	Apr. 26, 20 Bondi Hor.	011
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)(Limit (dBuV/n	U	Remark
2390.00	69.07	51.96	-1.06	68.01	50.90	74.00	54.00	-3.10	AV

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Emission: 802.11 g mode

Operation Mode	TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27 °C	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	59.88	44.23	-0.59	59.29	43.64	74.00	54.00	-10.36	AV
Operation Fundament Temperatu Humidity	tal Frequei		CH High MHz			Test Test Pol	By	Apr. 26, 20 Bondi Hor.	011
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit) (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	55.95	42.79	-0.59	55.36	42.20	74.00	54.00	-11.80	AV


Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 46 of 129

802.11n 20M **Band Edges Test Data CH-Low**

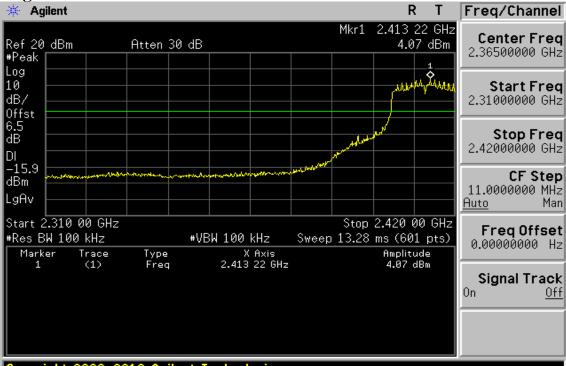

Copyright 2000-2010 Agilent Technologies

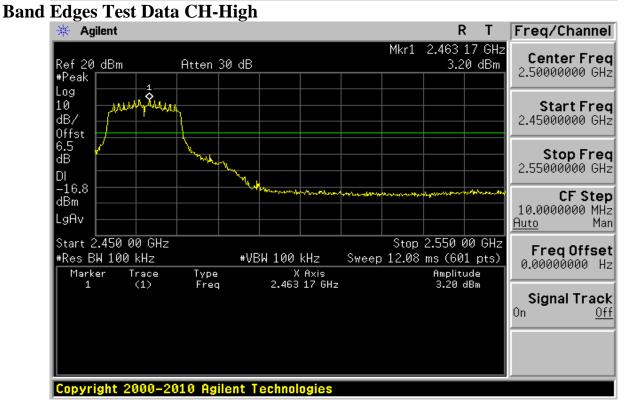

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Member of SGS Group



Radiated Emission: 802.11n_20M mode

Operation Mode	TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Temperature	27 °C	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)(Limit dBuV/m	0	Remark
2390.00	70.03	52.29	-1.06	68.97	51.23	74.00	54.00	-2.77	AV
Operation Fundament Temperatu Humidity	tal Frequer					Test Test Pol	By I	Apr. 26, 20 Bondi Hor.	011
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)(Limit dBuV/m	U	Remark
2390.00	59.84	52.15	-1.06	58.78	51.09	74.00	54.00	-2.91	AV

Remark:

- (1)Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms. (3)
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27 °C	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m	0	Remark
2483.50	60.13	44.97	-0.59	59.54	44.38	74.00	54.00	-9.62	AV
Operation Fundament			CH High MHz			Test Test		Apr. 26, 20 Bondi)11
Temperatu Humidity	1	27 ℃ 66 %				Pol	J	Hor.	
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m	0	Remark
2483.50	58.70	43.60	-0.59	58.11	43.01	74.00	54.00	-10.99	AV

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the (1)reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument us-(2)ing Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 49 of 129

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-210 issue 8,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

9.2 Measurement Equipment Used:

9.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2. Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2. Radiated emission:

Refer to section 7.3 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責;同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



9.4 Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 100K on Spectrum.
- 3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz
- 4. Via Software, combine 5 spans of frequency range into one plot

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

1	Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
		RA = Reading Amplitude	AG = Amplifier Gain
		AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報檔告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the faw. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 51 of 129

Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz

Agilent R Т Freq/Channel Mkr1 2.415 90 GHz Center Freq Ref 20 dBm Atten 30 dB 7.86 dBm 1.51500000 GHz #Peak Log 10 Start Freq dB/ 30.0000000 MHz Offst 6.5 dB Stop Freq 3.00000000 GHz DI 12.1 CF Step dBm 297.000000 MHz LgAv Man <u>Auto</u> Start 3<mark>0.00 MH</mark>z Stop 3.000 00 GHz Freq Offset 0.0000000 Hz #Res BW 100 kHz #VBW 100 kHz Sweep 358.1 ms (601 pts) Marker Amplitude Trace Туре Axis 90 GHz (1)Freq 2.4157.86 dBm Signal Track 0n Off

Copyright 2000-2010 Agilent Technologies

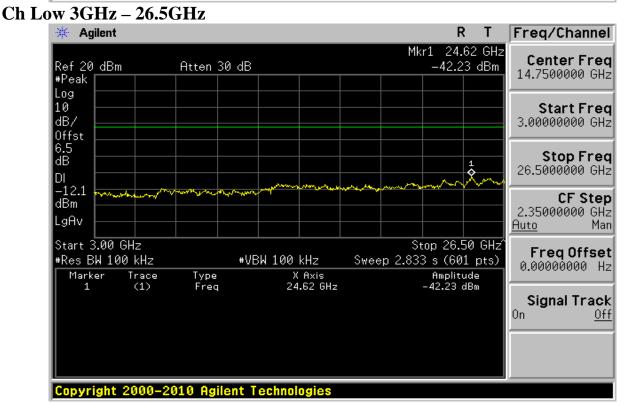

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 52 of 129

Ch Mid 30MHz – 3GHz

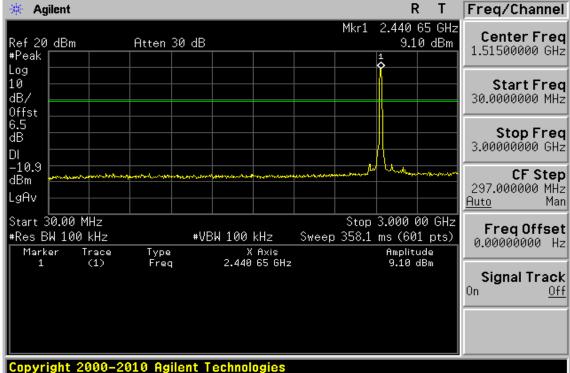



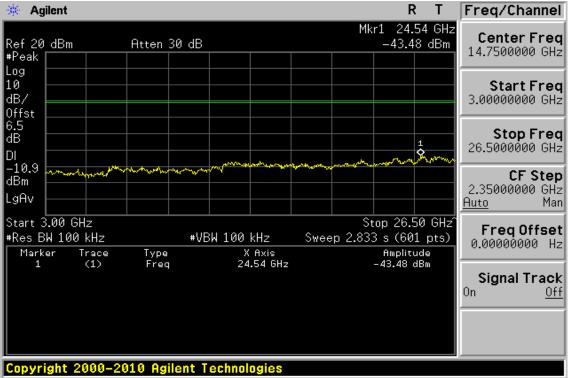

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 53 of 129

Ch High 30MHz - 3GHz

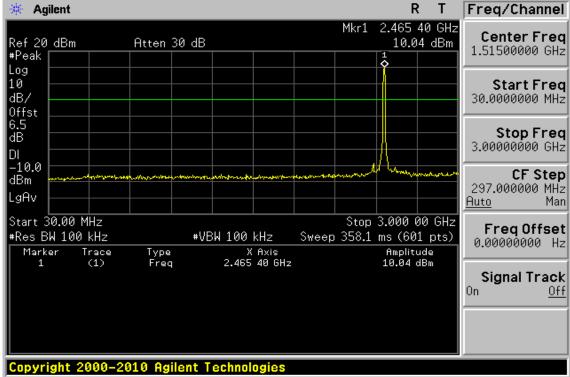



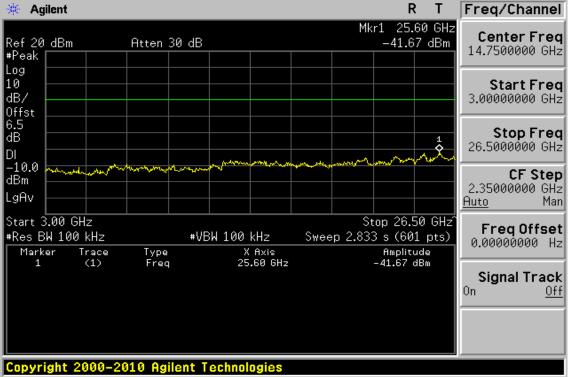

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 54 of 129

Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

Agilent R Т Freq/Channel Mkr1 2.411 GHz Center Freq Atten 20 dB Ref 10 dBm 2.33 dBm 1.51500000 GHz #Peak φ Log 10 Start Freq dB/ 29.9999990 MHz Offst 6.5 dB Stop Freq 3.00000000 GHz DI \ı -17.7CF Step dBm 297.000000 MHz LgAv Auto Man Start 3<mark>0 MH</mark>z Stop 3.000 GHz Freq Offset 0.0000000 Hz #Res BW 100 kHz #VBW 100 kHz Sweep 358.1 ms (601 pts) X Axis Marker Amplitude Trace Туре (1)Freq 2.411 GHz 2.33 dBm Signal Track 0n Off

Copyright 2000-2010 Agilent Technologies

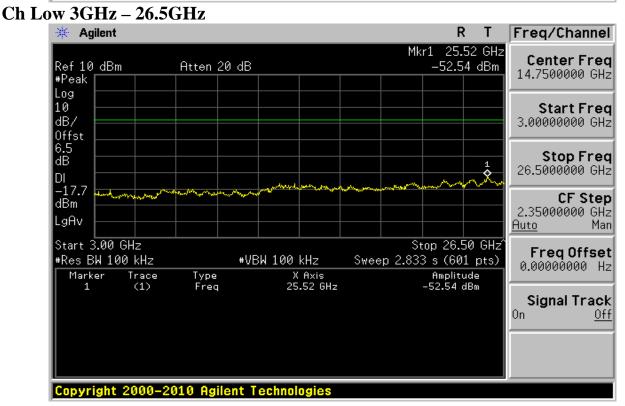

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 55 of 129

Ch Mid 30MHz – 3GHz

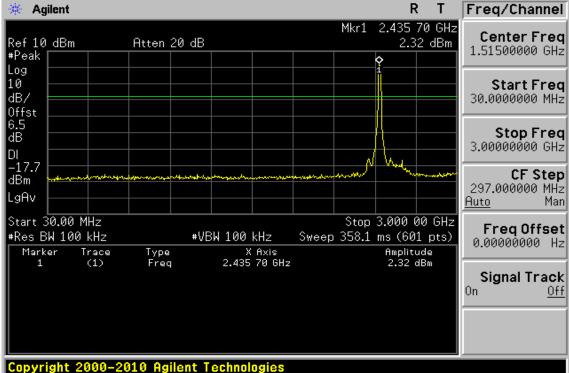



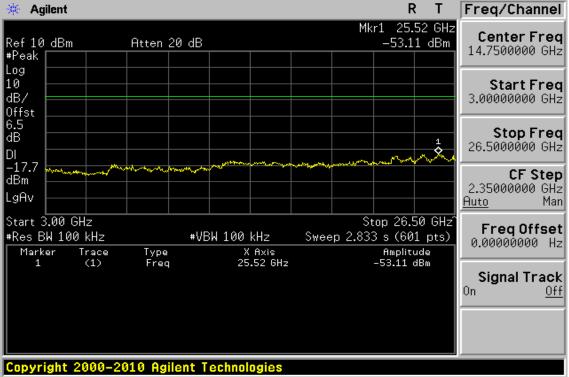

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 56 of 129

Ch High 30MHz - 3GHz

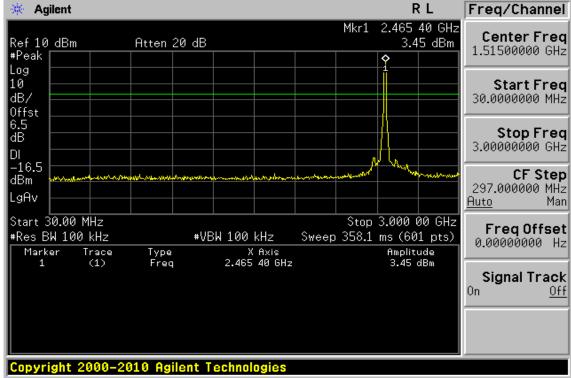



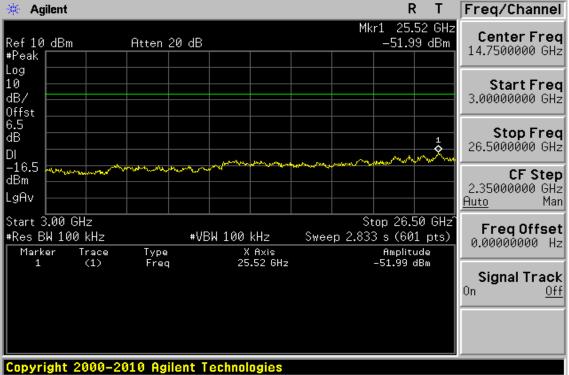

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 57 of 129

Conducted Spurious Emission Measurement Result (802.11n_20M) Ch Low 30MHz – 3GHz

Agilent R Т Freq/Channel Mkr1 2.410 95 GHz Center Freq Ref 20 dBm Atten 30 dB -0.79 dBm 1.51500000 GHz #Peak Log 10 Start Freq dB/ 30.0000000 MHz Offst 6.5 dB Stop Freq 3.00000000 GHz DI 20.8 CF Step dBm 297.000000 MHz LgAv Man <u>Auto</u> Start 3<mark>0.00 MH</mark>z Stop 3.000 00 GHz Freq Offset 0.0000000 Hz #Res BW 100 kHz #VBW 100 kHz Sweep 358.1 ms (601 pts) Marker Amplitude Trace Туре X Axis 95 GHz (1)Frea 2.410-0.79 dBm Signal Track 0n Off

Copyright 2000-2010 Agilent Technologies

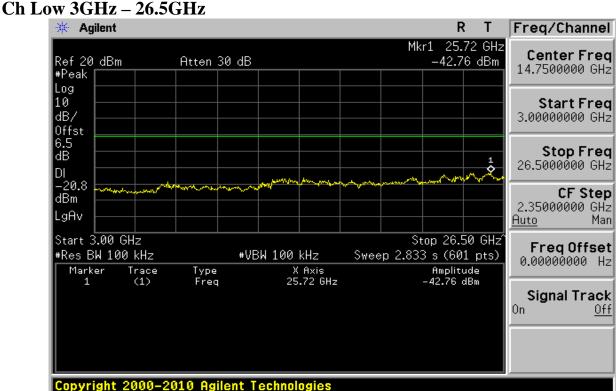

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


f (886-2) 2298-0488 www.tw.sgs.com

台灣檢驗科技股份有限公司 t (886-2) 2299-3279




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 58 of 129

Ch Mid 30MHz – 3GHz

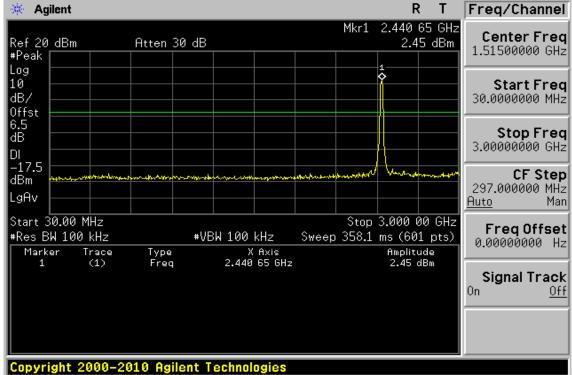



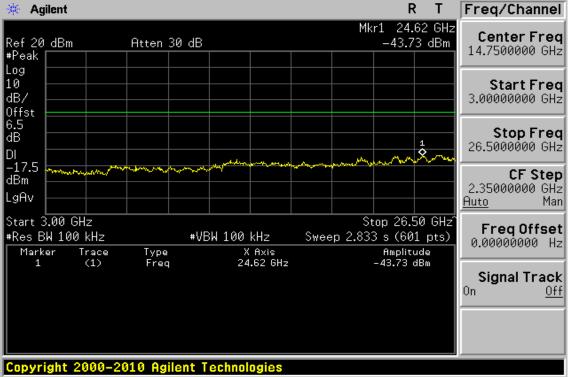

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com Member of SGS Group




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 59 of 129

Ch High 30MHz - 3GHz

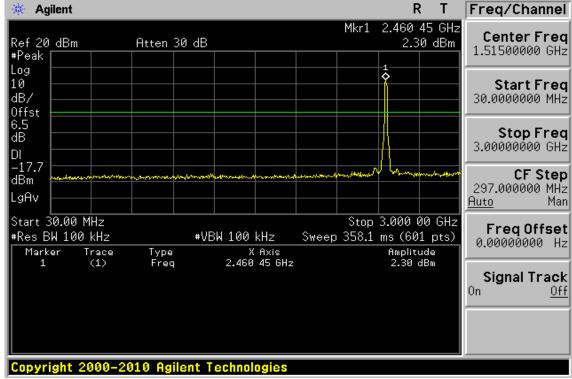

Ch High 3GHz – 26.5GHz

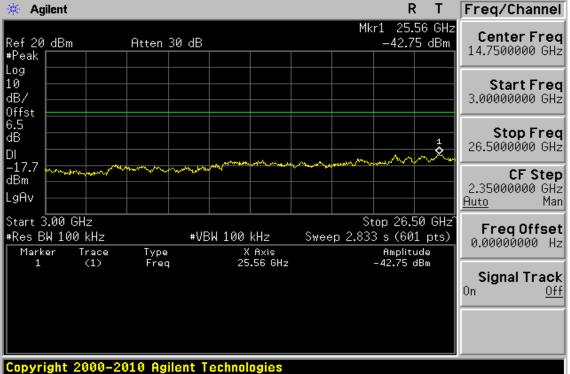

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

Member of SGS Group

www.tw.sgs.com



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
44.55	V	Peak	31.49	-13.62	17.87	40.00	-22.13
144.46	V	Peak	32.62	-12.66	19.96	43.50	-23.54
321.00	V	Peak	32.04	-11.99	20.05	46.00	-25.95
487.84	V	Peak	32.63	-9.33	23.30	46.00	-22.70
796.30	V	Peak	33.02	-3.70	29.32	46.00	-16.68
949.56	V	Peak	32.44	-1.58	30.86	46.00	-15.14
37.76	Н	Peak	31.53	-13.73	17.80	40.00	-22.20
156.10	Н	Peak	31.66	-12.01	19.65	43.50	-23.85
338.46	Н	Peak	32.32	-11.76	20.56	46.00	-25.44
497.54	Н	Peak	32.81	-9.19	23.62	46.00	-22.38
786.60	Н	Peak	33.10	-3.80	29.30	46.00	-16.70
978.66	Н	Peak	32.57	-1.53	31.04	54.00	-22.96

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 61 of 129

Operation Mode	802.11b TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.32	-13.38	17.94	40.00	-22.06
144.46	V	Peak	33.23	-12.66	20.57	43.50	-22.93
340.40	V	Peak	32.24	-11.74	20.50	46.00	-25.50
495.60	V	Peak	32.63	-9.21	23.42	46.00	-22.58
796.30	V	Peak	33.09	-3.70	29.39	46.00	-16.61
959.26	V	Peak	32.42	-1.54	30.88	46.00	-15.12
21.04	**		21.00	14.10	17 60	10.00	22.21
31.94	Н	Peak	31.88	-14.19	17.69	40.00	-22.31
151.25	Н	Peak	31.60	-12.20	19.40	43.50	-24.10
340.40	Н	Peak	32.01	-11.74	20.27	46.00	-25.73
478.14	Н	Peak	32.87	-9.45	23.42	46.00	-22.58
806.00	Н	Peak	32.89	-3.60	29.29	46.00	-16.71
959.26	Н	Peak	32.21	-1.54	30.67	46.00	-15.33

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chieses Guterman States and resolute and resolute and provide the state of the state of the states for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 62 of 129

Operation Mode	802.11b TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
41.64	V	Peak	31.48	-13.51	17.97	40.00	-22.03
144.46	V	Peak	33.13	-12.66	20.47	43.50	-23.03
342.34	V	Peak	32.18	-11.62	20.56	46.00	-25.44
483.96	V	Peak	32.90	-9.38	23.52	46.00	-22.48
769.14	V	Peak	32.95	-4.01	28.94	46.00	-17.06
988.36	V	Peak	32.63	-1.56	31.07	54.00	-22.93
37.76	Н	Peak	31.46	-13.73	17.73	40.00	-22.27
160.95	Н	Peak	31.73	-11.98	19.75	43.50	-23.75
350.10	Н	Peak	32.58	-11.54	21.04	46.00	-24.96
478.14	Н	Peak	32.44	-9.45	22.99	46.00	-23.01
807.94	Н	Peak	32.96	-3.59	29.37	46.00	-16.63
975.75	Н	Peak	33.17	-1.55	31.62	54.00	-22.38

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chieses Guterman States and resolute and resolute and provide the state of the state of the states for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 63 of 129

Operation Mode	802.11g TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.70	-13.38	18.32	40.00	-21.68
144.46	V	Peak	32.36	-12.66	19.70	43.50	-23.80
345.25	V	Peak	32.27	-11.60	20.67	46.00	-25.33
490.75	V	Peak	33.40	-9.27	24.13	46.00	-21.87
809.88	V	Peak	32.81	-3.56	29.25	46.00	-16.75
988.36	V	Peak	32.96	-1.56	31.40	54.00	-22.60
39.70	Н	Peak	32.20	-13.38	18.82	40.00	-21.18
151.25	Н	Peak	31.70	-12.20	19.50	43.50	-24.00
345.25	Н	Peak	33.44	-11.60	21.84	46.00	-24.16
458.74	Н	Peak	33.25	-9.68	23.57	46.00	-22.43
804.06	Н	Peak	32.51	-3.62	28.89	46.00	-17.11
980.60	Н	Peak	32.63	-1.54	31.09	54.00	-22.91

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 64 of 129

Operation Mode	802.11g TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
41.64	V	Peak	32.33	-13.51	18.82	40.00	-21.18
144.46	V	Peak	33.12	-12.66	20.46	43.50	-23.04
335.55	V	Peak	32.89	-11.82	21.07	46.00	-24.93
500.45	V	Peak	33.35	-9.09	24.26	46.00	-21.74
798.24	V	Peak	32.87	-3.68	29.19	46.00	-16.81
961.20	V	Peak	32.86	-1.54	31.32	54.00	-22.68
39.70	Н	Peak	31.73	-13.38	18.35	40.00	-21.65
156.10	Н	Peak	31.36	-12.01	19.35	43.50	-24.15
348.16	Н	Peak	32.00	-11.56	20.44	46.00	-25.56
468.44	Н	Peak	32.61	-9.61	23.00	46.00	-23.00
806.00	Н	Peak	32.85	-3.60	29.25	46.00	-16.75
914.64	Н	Peak	33.34	-2.02	31.32	46.00	-14.68

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chieses Guterman States and resolute and resolute and provide the state of the state of the states for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 65 of 129

Operation Mode	802.11g TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
44.55	V	Peak	31.48	-13.62	17.86	40.00	-22.14
160.95	V	Peak	31.59	-11.98	19.61	43.50	-23.89
345.25	V	Peak	31.83	-11.60	20.23	46.00	-25.77
500.45	V	Peak	32.37	-9.09	23.28	46.00	-22.72
784.66	V	Peak	32.49	-3.82	28.67	46.00	-17.33
988.36	V	Peak	33.13	-1.56	31.57	54.00	-22.43
41.64	Н	Peak	31.57	-13.51	18.06	40.00	-21.94
148.34	Н	Peak	32.30	-12.36	19.94	43.50	-23.56
348.16	Н	Peak	32.28	-11.56	20.72	46.00	-25.28
468.44	Н	Peak	32.28	-9.61	22.67	46.00	-23.33
809.88	Н	Peak	32.45	-3.56	28.89	46.00	-17.11
934.04	Н	Peak	32.82	-1.72	31.10	46.00	-14.90

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 66 of 129

Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.48	-13.38	18.10	40.00	-21.90
156.10	V	Peak	31.87	-12.01	19.86	43.50	-23.64
348.16	V	Peak	32.00	-11.56	20.44	46.00	-25.56
483.96	V	Peak	32.37	-9.38	22.99	46.00	-23.01
742.95	V	Peak	33.16	-4.47	28.69	46.00	-17.31
992.24	V	Peak	32.84	-1.57	31.27	54.00	-22.73
39.70	Н	Peak	31.22	-13.38	17.84	40.00	-22.16
160.95	Н	Peak	31.97	-11.98	19.99	43.50	-23.51
342.34	Н	Peak	31.78	-11.62	20.16	46.00	-25.84
495.60	Н	Peak	32.53	-9.21	23.32	46.00	-22.68
806.00	Н	Peak	32.57	-3.60	28.97	46.00	-17.03
968.96	Н	Peak	32.18	-1.55	30.63	54.00	-23.37

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 67 of 129

Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
37.76	V	Peak	32.11	-13.73	18.38	40.00	-21.62
144.46	V	Peak	32.92	-12.66	20.26	43.50	-23.24
328.76	V	Peak	32.66	-11.87	20.79	46.00	-25.21
487.84	V	Peak	32.43	-9.33	23.10	46.00	-22.90
786.60	V	Peak	33.76	-3.80	29.96	46.00	-16.04
990.30	V	Peak	32.60	-1.56	31.04	54.00	-22.96
37.76	Н	Peak	32.12	-13.73	18.39	40.00	-21.61
158.04	Н	Peak	31.52	-12.00	19.52	43.50	-23.98
332.64	Н	Peak	32.23	-11.83	20.40	46.00	-25.60
449.04	Н	Peak	32.85	-9.78	23.07	46.00	-22.93
809.88	Н	Peak	32.66	-3.56	29.10	46.00	-16.90
951.50	Н	Peak	32.75	-1.53	31.22	46.00	-14.78

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 68 of 129

Operation Mode Fundamental Frequency	802.11n_20M TX CH High 2462MHz	Test Date Test By	Apr. 26, 2011 Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
44.55	V	Peak	31.34	-13.62	17.72	40.00	-22.28
144.46	V	Peak	32.27	-12.66	19.61	43.50	-23.89
340.40	V	Peak	32.20	-11.74	20.46	46.00	-25.54
500.45	V	Peak	32.60	-9.09	23.51	46.00	-22.49
769.14	V	Peak	33.56	-4.01	29.55	46.00	-16.45
968.96	V	Peak	33.01	-1.55	31.46	54.00	-22.54
34.85	Н	Peak	32.16	-14.14	18.02	40.00	-21.98
144.46	Н	Peak	32.18	-12.66	19.52	43.50	-23.98
332.64	Н	Peak	32.64	-11.83	20.81	46.00	-25.19
500.45	Н	Peak	32.12	-9.09	23.03	46.00	-22.97
806.00	Н	Peak	32.99	-3.60	29.39	46.00	-16.61
953.44	Н	Peak	33.32	-1.53	31.79	46.00	-14.21

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4822.0	39.64		5.30	44.94		75.00	54.00	-9.06	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental (1)frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 70 of 129

Operation Mode	802.11b TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

		Peak	AV		Actual FS		Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4822.0	31.18		5.30	36.48		75.00	54.00	-17.52	Peak
	7236.0						74.00	54.00		
	9648.0						74.00	54.00		
	12060.0						74.00	54.00		
	14472.0						74.00	54.00		
	16884.0						74.00	54.00		
	19296.0						74.00	54.00		
	21708.0						74.00	54.00		
	24120.0						74.00	54.00		

Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental (1)frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 71 of 129

Operation Mode	802.11b TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4867.5	39.88		5.42	45.30		74.00	54.00	-8.70	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 72 of 129

Operation Mode	802.11b TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4867.0	31.62		5.42	37.04		74.00	54.00	-16.96	Peak
	4874.0						74.00	54.00		
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 (5) ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11b TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4932.5	37.42		5.56	42.98		75.00	54.00	-11.02	Peak
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental (1)frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11b TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4932.5	33.90		5.56	39.46		75.00	54.00	-14.54	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental (1)frequency
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0						74.00	54.00		
4835.0	30.02		5.33	35.35		74.00	54.00	-18.65	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental (1)frequency
- Data of measurement within this frequency range shown " " in the table above means (2)the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3)Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 76 of 129

Operation Mode	802.11g TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
					74.00	54.00		
29.60		5.49	35.09		74.00	54.00	-18.91	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV)	Reading Reading (dBuv) (dBuv) 29.60 29.61 <tr t=""> <</tr>	Reading Reading Ant./Classical (dBuv) (dBuv) (CF(dBuv)) 29.60 5.49 29.60 5.49 5.49	ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/n)5.4935.095.4935.09 <t< td=""><td>ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.4935.0929.605.4935.09</td><td>ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuVm)(dBuVm)(dBuVm)(dBuVm)</td><td>Reading (dBuv)Ant./ClPeakAVLinniLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.4935.0974.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)(2</td><td>Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(1)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(2)(</td></t<>	ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.4935.0929.605.4935.09	ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuVm)(dBuVm)(dBuVm)(dBuVm)	Reading (dBuv)Ant./ClPeakAVLinniLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.4935.0974.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)(2	Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(1)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(2)(

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4835.0	30.44		5.33	35.77		74.00	54.00	-18.23	Peak
	4874.0						74.00	54.00		
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 78 of 129

Operation Mode	802.11g TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
					74.00	54.00		
29.19		5.46	34.65		74.00	54.00	-19.35	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 29.19 	Reading Reading (dBuv) (dBuv) 29.19 29.19	Reading Reading Ant./CL (dBuV) (DBuV) (DBuV) 5.46 5.46	ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/n)5.4634.655.4634.65	ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.4634.6529.195.4634.655.4634.65 </td <td>ReadingReadingAnt./CLPeakAVLimit(dBuV)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)</td> <td>Reading (dBuv)Ant./CLPeakAVLinit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.4634.6574.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)54.00(1)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)</td> <td>Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)</td>	ReadingReadingAnt./CLPeakAVLimit(dBuV)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)	Reading (dBuv)Ant./CLPeakAVLinit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.4634.6574.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)54.00(1)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)	Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 79 of 129

Operation Mode	802.11g TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4802.5	30.02		5.25	35.27		74.00	54.00	-18.73	4802.5
	4924.0						74.00	54.00		4924.0
	7386.0						74.00	54.00		7386.0
	9848.0						74.00	54.00		9848.0
	12310.0						74.00	54.00		12310.0
	14772.0						74.00	54.00		14772.0
	17234.0						74.00	54.00		17234.0
	19696.0						74.00	54.00		19696.0
	22158.0						74.00	54.00		22158.0
	24620.0						74.00	54.00		24620.0

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 80 of 129

Operation Mode	802.11g TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
					74.00	54.00		
29.32		5.67	34.99		74.00	54.00	-19.01	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV)	Reading Reading (dBuv) (dBuv) 29.32 29.32 <t< td=""><td>Reading Reading Ant./CL (dBuv) (DBuv) (DBuv) 5.67 29.32 5.67 <tr tr=""> </tr></td><td>ReadingAnt./CLPeak(dBuv)CF(dB)(dBuv/no)5.6734.995.6734.99<t< td=""><td>ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.6734.9929.325.6734.99</td><td>Reading (dBuv)Ant./ClPeakAVLimit(dBuv)CF(dB)(dBuVm)(dBuVm)(dBuVm)</td><td>Reading (dBuv)Ant./ClPeakAVLinit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.6734.9974.0054.00(1)5.6754.0174.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)</td><td>Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)</td></t<></td></t<>	Reading Reading Ant./CL (dBuv) (DBuv) (DBuv) 5.67 29.32 5.67 <tr tr=""> </tr>	ReadingAnt./CLPeak(dBuv)CF(dB)(dBuv/no)5.6734.995.6734.99 <t< td=""><td>ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.6734.9929.325.6734.99</td><td>Reading (dBuv)Ant./ClPeakAVLimit(dBuv)CF(dB)(dBuVm)(dBuVm)(dBuVm)</td><td>Reading (dBuv)Ant./ClPeakAVLinit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.6734.9974.0054.00(1)5.6754.0174.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)</td><td>Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)</td></t<>	ReadingReadingAnt./CLPeakAV(dBuV)CF(dB)(dBuV)(dBuV)5.6734.9929.325.6734.99	Reading (dBuv)Ant./ClPeakAVLimit(dBuv)CF(dB)(dBuVm)(dBuVm)(dBuVm)	Reading (dBuv)Ant./ClPeakAVLinit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)(dBuv)(dBuV)(dBuV)(dBuV)(dBuV)(1)5.6734.9974.0054.00(1)5.6754.0174.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(1)74.0054.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)54.00(2)	Reading (dBuv)Ant./CLPeakAVLinniLinniMargin (dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 81 of 129

Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4737.5	29.97		5.08	35.05		74.00	54.00	-18.95	Peak
4824.0						74.00	54.00		
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

	Actu	al FS	Peak	AV		
Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
			74.00	54.00		
5.49	35.41		74.00	54.00	-18.59	Peak
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
			74.00	54.00		
		g Ant./CL Peak CF(dB) (dBuV/m)	CF(dB) (dBuV/m) (dBuV/m)	Ant./CL Peak AV Limit CF(dB) (dBuV/m) (dBuV/m) (dBuV/m) 5.49 35.41 74.00 5.49 35.41 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00 74.00	ant./CL Peak AV Limit Limit CF(dB) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) 5.49 35.41 74.00 54.00 5.49 35.41 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00	x Ant./CL Peak AV Limit Limit Margin (dB) $CF(dB)$ (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dB) 5.49 35.41 74.00 54.00 -18.59 5.49 35.41 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -18.59 74.00 54.00 74.00 54.00 -14.59 74.00 54.00 74.00 54.00 -14.59

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 83 of 129

Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4718.0	30.16		5.06	35.22		74.00	54.00	-18.78	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4783.0	29.92		5.20	35.12		74.00	54.00	-18.88	Peak
	4874.0						74.00	54.00		
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode	802.11n_20M TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4802.5	30.19		5.25	35.44		74.00	54.00	-18.56	Peak
	4924.0						74.00	54.00		
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M TX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4705.0	30.06		5.00	35.06		74.00	54.00	-18.94	Peak
	4924.0						74.00	54.00		
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 87 of 129

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
34.85	V	Peak	32.18	-14.14	18.04	40.00	-21.96
156.10	V	Peak	31.94	-12.01	19.93	43.50	-23.57
350.10	V	Peak	31.62	-11.54	20.08	46.00	-25.92
481.05	V	Peak	32.47	-9.40	23.07	46.00	-22.93
794.36	V	Peak	32.28	-3.72	28.56	46.00	-17.44
978.66	V	Peak	33.87	-1.53	32.34	54.00	-21.66
44.55	Н	Peak	31.58	-13.62	17.96	40.00	-22.04
160.95	Н	Peak	31.94	-11.98	19.96	43.50	-23.54
330.70	Н	Peak	32.17	-11.85	20.32	46.00	-25.68
449.04	Н	Peak	32.95	-9.78	23.17	46.00	-22.83
774.96	Н	Peak	32.85	-3.92	28.93	46.00	-17.07
953.44	Н	Peak	32.54	-1.53	31.01	46.00	-14.99

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 88 of 129

1

Operation Mode	802.11b RX CH Mid	Test Date	Apr. 26, 201
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.88	-13.38	18.50	40.00	-21.50
156.10	V	Peak	31.74	-12.01	19.73	43.50	-23.77
348.16	V	Peak	32.20	-11.56	20.64	46.00	-25.36
445.16	V	Peak	32.87	-9.92	22.95	46.00	-23.05
798.24	V	Peak	33.58	-3.68	29.90	46.00	-16.10
990.30	V	Peak	32.40	-1.56	30.84	54.00	-23.16
39.70	Н	Peak	31.09	-13.38	17.71	40.00	-22.29
158.04	Н	Peak	31.39	-12.00	19.39	43.50	-24.11
330.70	Н	Peak	32.92	-11.85	21.07	46.00	-24.93
487.84	Н	Peak	32.72	-9.33	23.39	46.00	-22.61
767.20	Н	Peak	33.41	-4.04	29.37	46.00	-16.63
985.45	Н	Peak	33.09	-1.55	31.54	54.00	-22.46

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 89 of 129

Operation Mode	802.11b RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
51.34	V	Peak	31.48	-13.93	17.55	40.00	-22.45
144.46	V	Peak	32.31	-12.66	19.65	43.50	-23.85
348.16	V	Peak	31.91	-11.56	20.35	46.00	-25.65
449.04	V	Peak	32.96	-9.78	23.18	46.00	-22.82
801.15	V	Peak	32.44	-3.65	28.79	46.00	-17.21
992.24	V	Peak	32.61	-1.57	31.04	54.00	-22.96
39.70	Н	Peak	31.60	-13.38	18.22	40.00	-21.78
154.16	Н	Peak	32.47	-12.18	20.29	43.50	-23.21
345.25	Н	Peak	31.86	-11.60	20.26	46.00	-25.74
495.60	Н	Peak	32.39	-9.21	23.18	46.00	-22.82
796.30	Н	Peak	33.09	-3.70	29.39	46.00	-16.61
959.26	Н	Peak	32.70	-1.54	31.16	46.00	-14.84

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 90 of 129

Operation Mode	802.11g RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
41.64	V	Peak	31.24	-13.51	17.73	40.00	-22.27
144.46	V	Peak	32.16	-12.66	19.50	43.50	-24.00
345.25	V	Peak	31.91	-11.60	20.31	46.00	-25.69
490.75	V	Peak	32.30	-9.27	23.03	46.00	-22.97
807.94	V	Peak	32.36	-3.59	28.77	46.00	-17.23
985.45	V	Peak	33.27	-1.55	31.72	54.00	-22.28
51.34	Н	Peak	32.53	-13.93	18.60	40.00	-21.40
144.46	Н	Peak	32.66	-12.66	20.00	43.50	-23.50
345.25	Н	Peak	31.68	-11.60	20.08	46.00	-25.92
495.60	Н	Peak	32.55	-9.21	23.34	46.00	-22.66
806.00	Н	Peak	33.05	-3.60	29.45	46.00	-16.55
953.44	Н	Peak	32.64	-1.53	31.11	46.00	-14.89

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 91 of 129

Operation Mode	802.11g RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.17	-13.38	17.79	40.00	-22.21
144.46	V	Peak	32.42	-12.66	19.76	43.50	-23.74
335.55	V	Peak	33.01	-11.82	21.19	46.00	-24.81
487.84	V	Peak	33.03	-9.33	23.70	46.00	-22.30
798.24	V	Peak	32.47	-3.68	28.79	46.00	-17.21
992.24	V	Peak	33.14	-1.57	31.57	54.00	-22.43
44.55	Н	Peak	31.58	-13.62	17.96	40.00	-22.04
146.40	Н	Peak	32.09	-12.51	19.58	43.50	-23.92
350.10	Н	Peak	32.07	-11.54	20.53	46.00	-25.47
490.75	Н	Peak	32.86	-9.27	23.59	46.00	-22.41
798.24	Н	Peak	33.30	-3.68	29.62	46.00	-16.38
946.65	Н	Peak	32.74	-1.61	31.13	46.00	-14.87

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 92 of 129

Operation Mode	802.11g RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver./Hor.
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
44.55	V	Peak	31.59	-13.62	17.97	40.00	-22.03
154.16	V	Peak	31.65	-12.18	19.47	43.50	-24.03
342.34	V	Peak	32.48	-11.62	20.86	46.00	-25.14
483.96	V	Peak	32.76	-9.38	23.38	46.00	-22.62
809.88	V	Peak	32.57	-3.56	29.01	46.00	-16.99
985.45	V	Peak	32.48	-1.55	30.93	54.00	-23.07
51.34	н	Peak	31.65	-13.93	17.72	40.00	-22.28
158.04	Н	Peak	31.68	-12.00	19.68	43.50	-23.82
338.46	Н	Peak	32.29	-11.76	20.53	46.00	-25.47
493.66	Н	Peak	32.62	-9.24	23.38	46.00	-22.62
806.00	Н	Peak	32.94	-3.60	29.34	46.00	-16.66
951.50	Н	Peak	32.66	-1.53	31.13	46.00	-14.87

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 93 of 129

Operation Mode Fundamental Frequency	802.11n_20M RX CH Low 2412MHz	Test Date Test By	Apr. 26, 2011 Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	31.49	-13.38	18.11	40.00	-21.89
148.34	V	Peak	31.80	-12.36	19.44	43.50	-24.06
321.00	V	Peak	32.60	-11.99	20.61	46.00	-25.39
474.26	V	Peak	32.75	-9.51	23.24	46.00	-22.76
809.88	V	Peak	32.69	-3.56	29.13	46.00	-16.87
966.05	V	Peak	32.94	-1.54	31.40	54.00	-22.60
41.64	Н	Peak	31.84	-13.51	18.33	40.00	-21.67
154.16	Н	Peak	31.60	-12.18	19.42	43.50	-24.08
345.25	Н	Peak	32.06	-11.60	20.46	46.00	-25.54
495.60	Н	Peak	33.09	-9.21	23.88	46.00	-22.12
804.06	Н	Peak	32.76	-3.62	29.14	46.00	-16.86
970.90	Н	Peak	32.58	-1.55	31.03	54.00	-22.97

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 94 of 129

Operation Mode Fundamental Frequency	802.11n_20M RX CH Mid 2437MHz	Test Date Test By	Apr. 26, 2011 Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
44.55	V	Peak	32.28	-13.62	18.66	40.00	-21.34
158.04	V	Peak	31.45	-12.00	19.45	43.50	-24.05
348.16	V	Peak	32.62	-11.56	21.06	46.00	-24.94
487.84	V	Peak	32.39	-9.33	23.06	46.00	-22.94
807.94	V	Peak	33.13	-3.59	29.54	46.00	-16.46
980.60	V	Peak	33.05	-1.54	31.51	54.00	-22.49
49.40	Н	Peak	32.34	-13.93	18.41	40.00	-21.59
148.34	Н	Peak	33.83	-12.36	21.47	43.50	-22.03
330.70	Н	Peak	32.12	-11.85	20.27	46.00	-25.73
493.66	Н	Peak	32.79	-9.24	23.55	46.00	-22.45
804.06	Н	Peak	32.55	-3.62	28.93	46.00	-17.07
980.60	Н	Peak	32.61	-1.54	31.07	54.00	-22.93

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 95 of 129

Operation Mode Fundamental Frequency	802.11n_20M RX CH High 2462MHz	Test Date Test By	Apr. 26, 2011 Bondi
Temperature	27	Pol	Ver./Hor
Humidity	66 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
47.46	V	Peak	31.24	-13.85	17.39	40.00	-22.61
158.04	V	Peak	32.55	-12.00	20.55	43.50	-22.95
345.25	V	Peak	33.16	-11.60	21.56	46.00	-24.44
493.66	V	Peak	32.53	-9.24	23.29	46.00	-22.71
807.94	V	Peak	33.26	-3.59	29.67	46.00	-16.33
927.25	V	Peak	32.86	-1.80	31.06	46.00	-14.94
41.64	Н	Peak	31.49	-13.51	17.98	40.00	-22.02
158.04	Н	Peak	32.20	-12.00	20.20	43.50	-23.30
335.55	Н	Peak	32.80	-11.82	20.98	46.00	-25.02
495.60	Н	Peak	32.10	-9.21	22.89	46.00	-23.11
798.24	Н	Peak	33.20	-3.68	29.52	46.00	-16.48
951.50	Н	Peak	32.42	-1.53	30.89	46.00	-15.11

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4770.0	29.89		5.18	35.07		74.00	54.00	-18.93	Peak
4824.0						74.00	54.00		
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0						74.00	54.00		
4978.0	29.83		5.67	35.50		74.00	54.00	-18.50	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4802.5	29.54		5.25	34.79		74.00	54.00	-19.21	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11b RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4737.5	30.18		5.08	35.26		74.00	54.00	-18.74	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11b RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4822.0	29.51		5.30	34.81		74.00	54.00	-19.19	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4900.0	29.67		5.49	35.16		74.00	54.00	-18.84	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11g RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0						74.00	54.00		
4913.0	29.54		5.51	35.05		74.00	54.00	-18.95	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4770.0	30.67		5.18	35.85		74.00	54.00	-18.15	Peak
4824.0						74.00	54.00		
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11g RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0						74.00	54.00		
4952.0	29.12		5.60	34.72		74.00	54.00	-19.28	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4770.0	30.76		5.18	35.94		74.00	54.00	-18.06	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4770.0	29.32		5.18	34.50		74.00	54.00	-19.50	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11g RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462 MHz	Test By	Bondi
Temperature	27	Pol	Hor.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0						74.00	54.00		
4900.0	29.06		5.49	34.55		74.00	54.00	-19.45	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Ver.
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0						74.00	54.00		
4848.0	29.52		5.36	34.88		74.00	54.00	-19.12	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.

5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M RX CH Low	Test Date	Apr. 26, 2011
Fundamental Frequency	2412MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq	. Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz	z) (dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4802.	5 30.03		5.25	35.28		74.00	54.00	-18.72	Peak
4824.	0					74.00	54.00		
7236.	0					74.00	54.00		
9648.	0					74.00	54.00		
12060	.0					74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Ver
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4770.0	29.93		5.18	35.11		74.00	54.00	-18.89	Peak
4874.0						74.00	54.00		
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M RX CH Mid	Test Date	Apr. 26, 2011
Fundamental Frequency	2437MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0						74.00	54.00		
4900.0	29.09		5.49	34.58		74.00	54.00	-19.42	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	802.11n_20M RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Ver
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4757.0	30.25		5.13	35.38		74.00	54.00	-18.62	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M RX CH High	Test Date	Apr. 26, 2011
Fundamental Frequency	2462MHz	Test By	Bondi
Temperature	27	Pol	Hor
Humidity	66 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4757.0	29.97		5.13	35.10		74.00	54.00	-18.90	Peak
4924.0						74.00	54.00		
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 PEAK POWER SPECTRAL DENSITY

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-210 issue 8, §A8.2(b) The transmitter power spectral density (into the antenna) shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.



10.5 **Measurement Result:**

802.11b

Frequency MHz	RF Power Density		RF Power Density	Maximum Limit
IVIIIZ	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-2.18	0.00	-2.18	8
2437	-3.52	0.00	-3.52	8
2462	-3.93	0.00	-3.93	8

802.11g

Frequency	RF Power Density	Cable loss	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-10.66	0.00	-10.66	8
2437	-10.63	0.00	-10.63	8
2462	-10.60	0.00	-10.60	8

802.11n_20M

Frequency	RF Power Density	Cable loss	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-10.44	0.00	-10.44	8
2437	-10.39	0.00	-10.39	8
2462	-10.31	0.00	-10.31	8

*Offset 6.5 dB

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ard_contrellins_and</u> conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration,



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 116 of 129

802.11b

Power Spectral Density Test Plot (CH-Low)

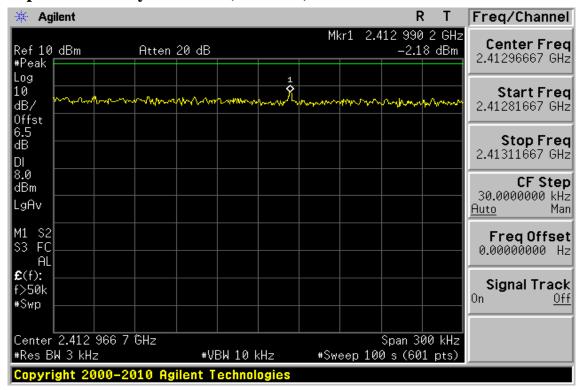

Power Spectral Density Test Plot (CH-Mid)

🔆 Agilent			RL	Peak Search
#Peak	Atten 20 dB	Mkr1 2.4	38 506 8 GHz -3.52 dBm	Next Peak
Log 10 dB/ Offst	nnathar an Maran Mara Maran Maran Mara	and and and a second and a second	order to specific the second section of the second section of the second s	Next Pk Right
6.5 dB DI				Next Pk Left
8.0 dBm LgAv				Min Search
M1 S2 S3 FC AL				Pk-Pk Search
£(f): f>50k #Swp				Mkr → CF
Center 2.438 518 4 (#Res BW 3 kHz	GHz #VBW 10		Span 300 kHz)s (601 pts)	More 1 of 2
Copyright 2000–2010 Agilent Technologies				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 117 of 129

Power Spectral Density Test Plot (CH-High)

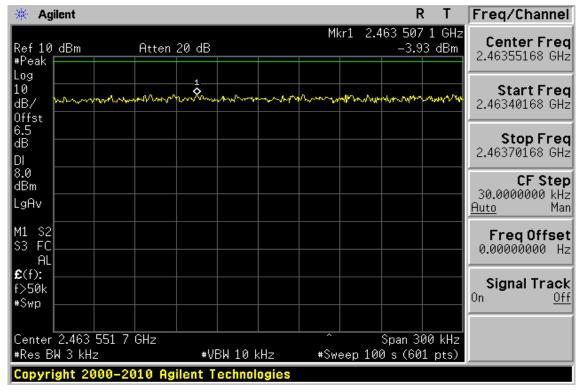

802.11g

Power Spectral Density Test Plot (CH-Low)

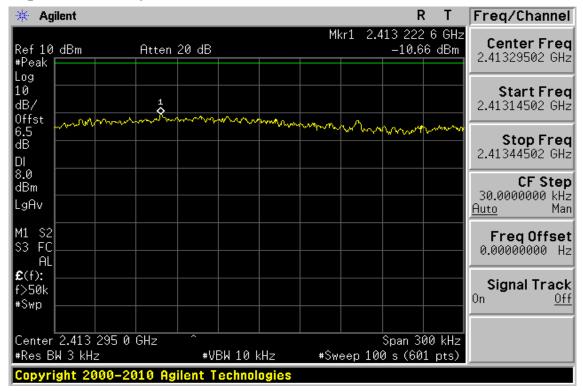

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 118 of 129

Power Spectral Density Test Plot (CH-Mid)

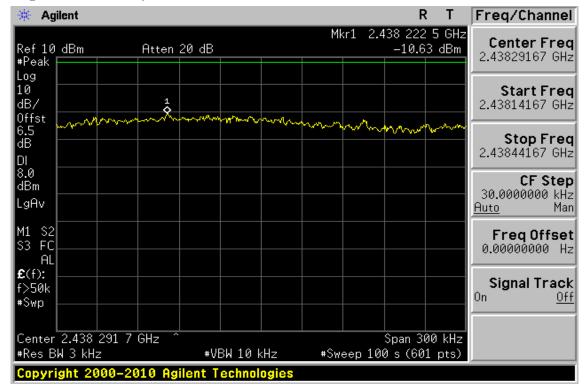

Power Spectral Density Test Plot (CH-High)

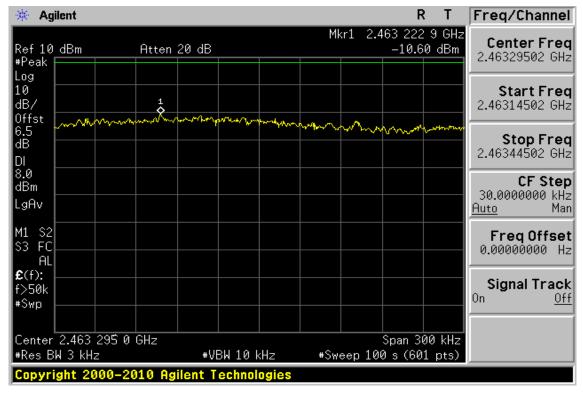

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 119 of 129

802.11n_20M

Power Spectral Density Test Plot (CH-Low)

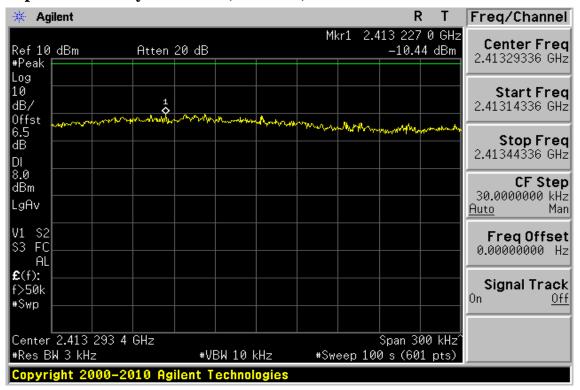

Power Spectral Density Test Plot (CH-Mid)

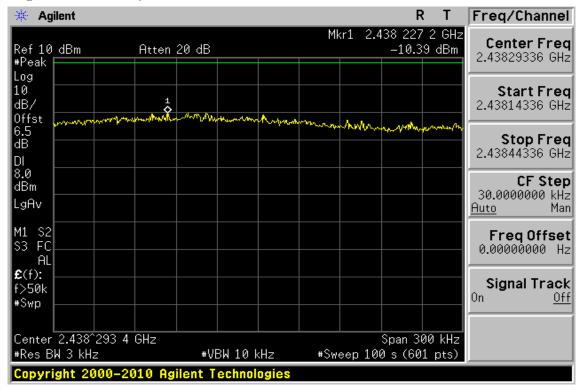

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 120 of 129

Power Spectral Density Test Plot (CH-High)

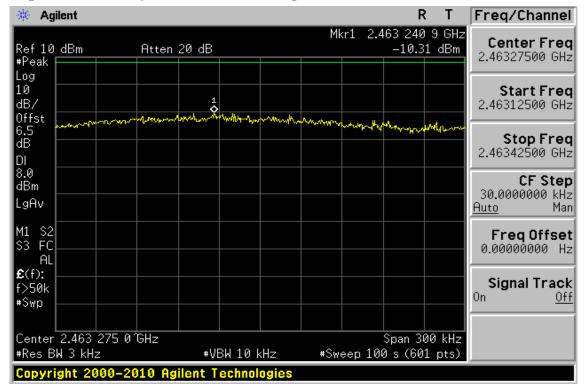

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Siness States and to be states and the states and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 121 of 129

11 ANTENNA REQUIREMENT

11.1. Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be

replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some

field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the

proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 122 of 129

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

11.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is -0.22 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 99% BANDWIDTH MEASUREMENT

12.1. Standard Applicable:

RSS-Gen §4.6.1, the transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=1% of the approximate emission bandwidth, VBW = 3 times RBW, Span= 30/60
- 4. Turn on the 99% bandwidth function, max reading..
- 5. Repeat above procedures until all frequency measured were complete.



12.5. Measurement Result:

802.11b

Frequency MHz	99%Bandwidth (MHz)
2412	11.215
2437	11.197
2462	11.305

802.11g

Frequency	99%Bandwidth	
MHz	(MHz)	
2412	16.384	
2437	16.362	
2462	16.371	

802.11n_20M

Frequency	99%Bandwidth	
MHz	(MHz)	
2412	17.777	
2437	17.533	
2462	17.534	


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, for a platication at the investigation of the optication approval of the Company. Any unauthorized alteration, may be proceeding the platication of the optication approval of the Company. Any unauthorized alteration, for a platication approval of the Company. Any unauthorized alteration, for mercing alternation, and we have proceeding the fulles extend to the law.



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 125 of 129

802.11b

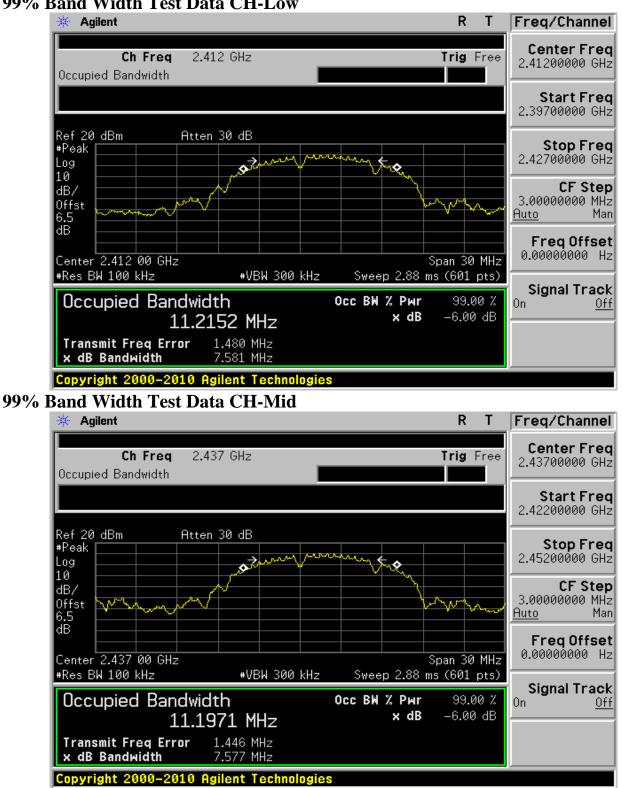

99% Band Width Test Data CH-Low

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 126 of 129

99% Band Width Test Data CH-High

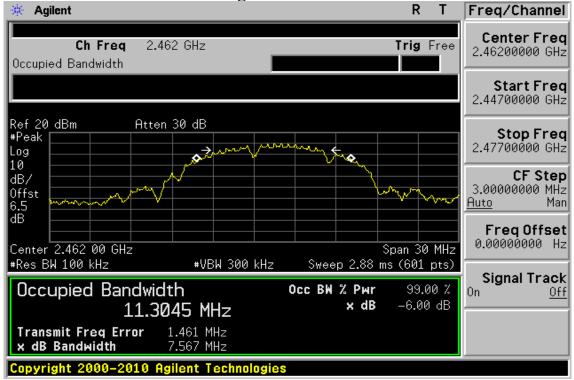

802.11g

99% Band Width Test Data CH-Low

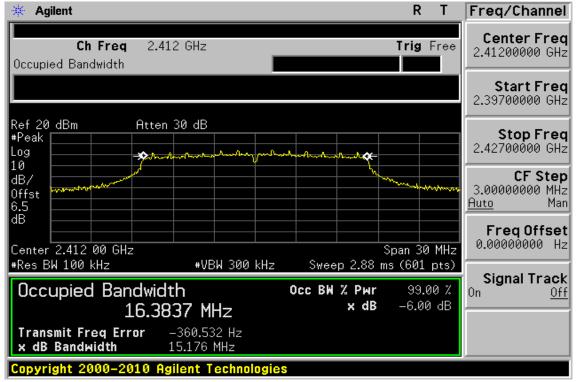

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 127 of 129

99% Band Width Test Data CH-Mid

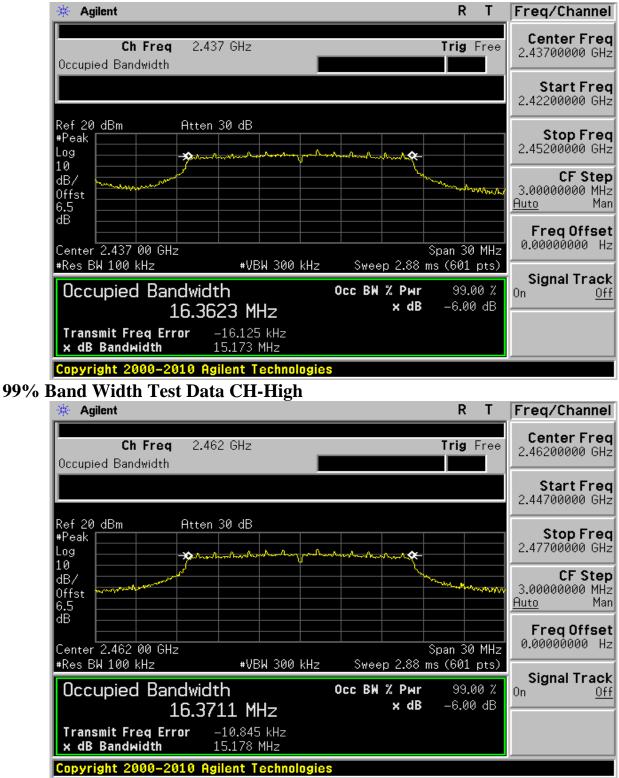

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 128 of 129

802.11n 20M 99% Band Width Test Data CH-Low

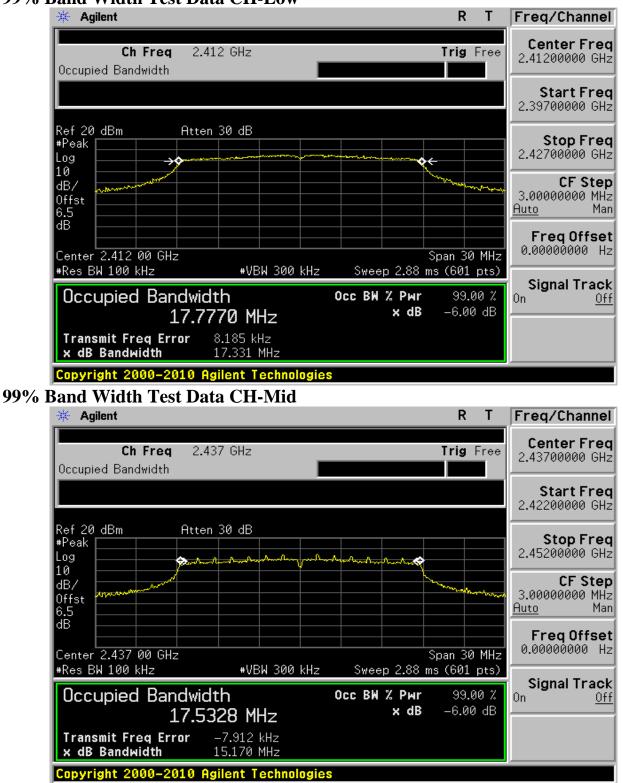

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40028 Issue Date: Apr. 26, 2011 Page: 129 of 129

99% Band Width Test Data CH-High

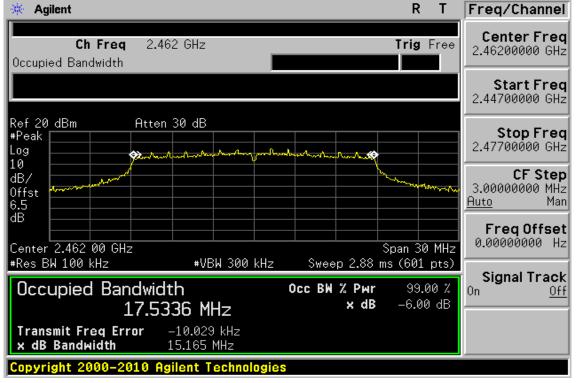

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com