

# FCC RF Test Report

APPLICANT : HTC Corporation  
EQUIPMENT : Smartphone  
MODEL NAME : PH39130  
FCC ID : NM8PH39130  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Oct. 07, 2011 and completely tested on Oct. 29, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

---

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PH39130

Page Number : 1 of 51

Report Issued Date : Nov. 29, 2011

Report Version : Rev. 01



## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer .....	5
1.3 Feature of Equipment Under Test .....	5
1.4 Testing Site .....	6
1.5 Applied Standards .....	6
1.6 Ancillary Equipment List .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>7</b>
2.1 RF Output Power .....	7
2.2 Test Mode .....	8
2.3 Connection Diagram of Test System .....	9
2.4 RF Utility .....	9
<b>3 TEST RESULT .....</b>	<b>10</b>
3.1 Number of Channel Measurement .....	10
3.2 20dB Bandwidth Measurement .....	12
3.3 Hopping Channel Separation Measurement .....	19
3.4 Dwell Time Measurement .....	22
3.5 Peak Output Power Measurement .....	24
3.6 Band Edges Measurement .....	27
3.7 Spurious Emission Measurement .....	31
3.8 AC Conducted Emission Measurement .....	35
3.9 Radiated Emission Measurement .....	39
3.10 Antenna Requirements .....	48
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>49</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>50</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1O0640-01A	Rev. 01	Initial issue of report	Nov. 29, 2011

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.1 dB at 2.086 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.44 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

## 1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smartphone
Model Name	PH39130
FCC ID	NM8PH39130
Sample 1	EUT with Camera 1 and Video Camera 1
Sample 2	EUT with Camera 2 and Video Camera 2
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 1.67 dBm (0.0015 W) Bluetooth EDR (2Mbps) : 1.46 dBm (0.0014 W) Bluetooth EDR (3Mbps) : 1.99 dBm (0.0016 W)
Antenna Type	PIFA Antenna with gain -2.18 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

### Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH07-HY	722060/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	1.30 dBm	1.08 dBm	1.56 dBm
Ch39	2441MHz	1.67 dBm	1.46 dBm	<b>1.99 dBm</b>
Ch78	2480MHz	1.59 dBm	1.32 dBm	1.89 dBm

**Remark:**

1. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (E1 plane) and recorded in this report.

Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + Camera + Battery 1 + Earphone 1 + USB Cable 1 (Charging from Adapter 1)		
Remark:			
1. All the tests were performance with Sample 1.			
2. For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported.			




## 2.3 Connection Diagram of Test System

### <Bluetooth Tx Mode>

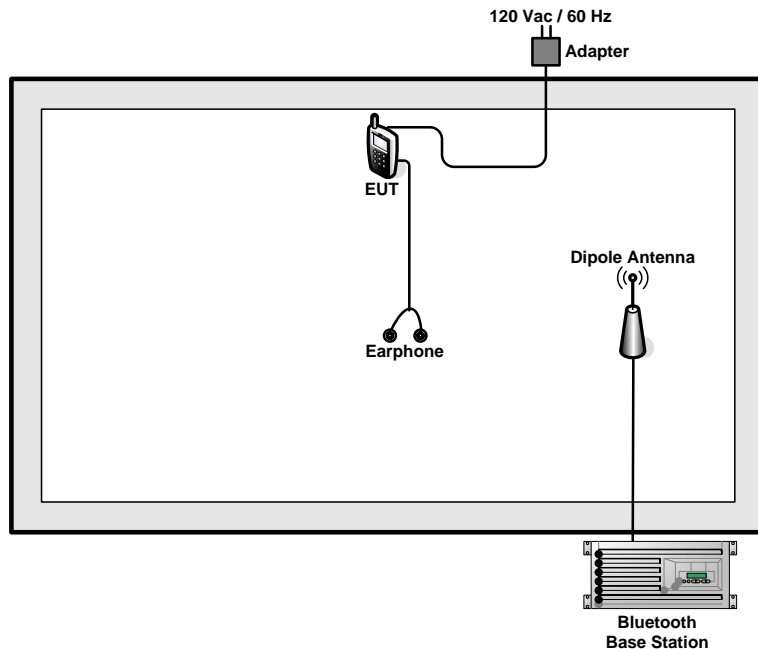

### <AC Conducted Emission Mode>

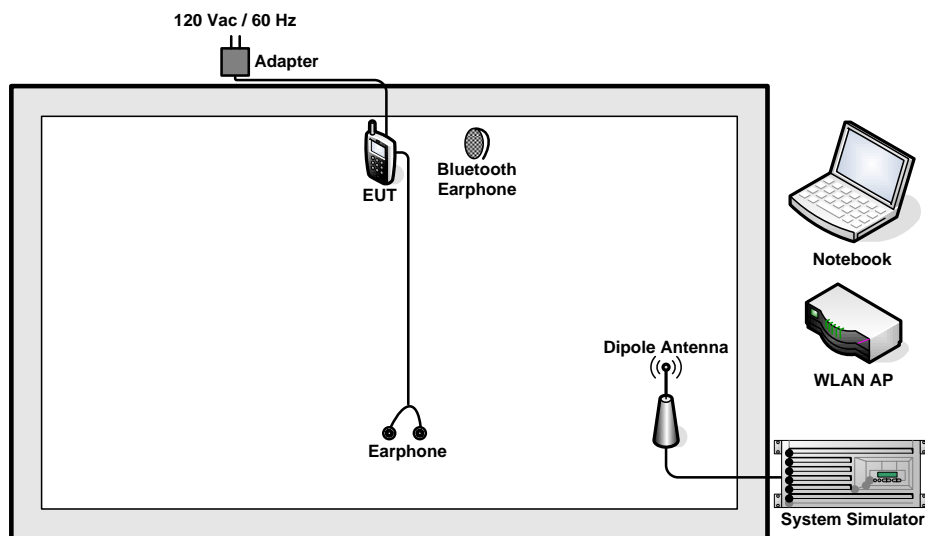

## 2.4 RF Utility

For Bluetooth function, the RF utility, “HTC SSD Test → Bluetooth Test Mode” was installed in EUT which was programmed in order to make the EUT to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


##### 3.1.4 Test Setup

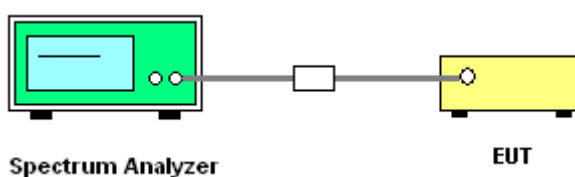


##### 3.1.5 Test Result of Number of Hopping Frequency

<b>Test Mode :</b>	Mode 7~9	<b>Temperature :</b>	21~24°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

**Number of Hopping Channel Plot on Channel 00 - 78**

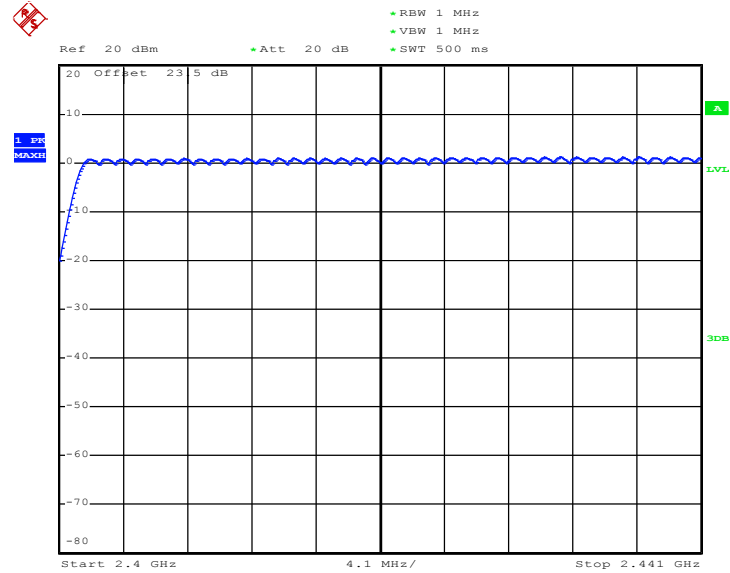

Date: 7.OCT.2011 19:12:35

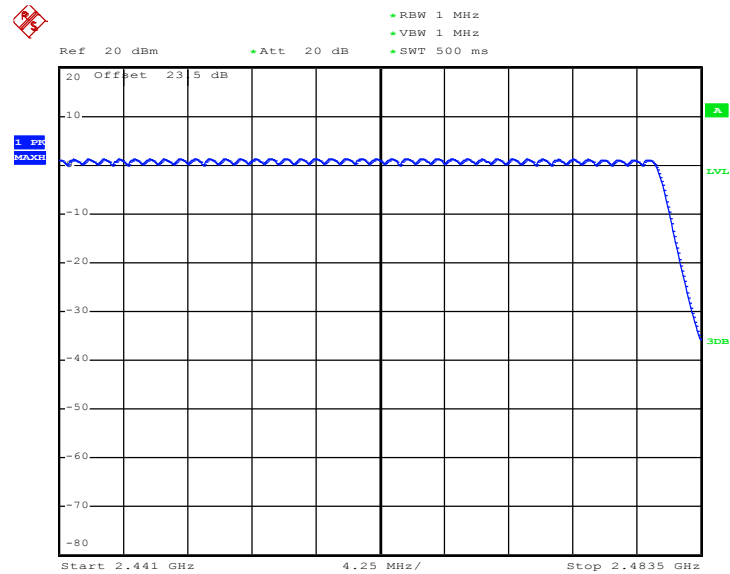

Date: 7.OCT.2011 19:19:17

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

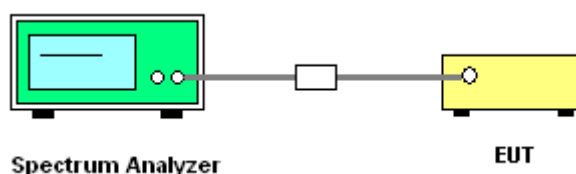


### 3.2.5 Test Result of 20dB Bandwidth


<b>Test Mode :</b>	Mode 1, 2, 3	<b>Temperature :</b>	21~24℃
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.912
39	2441	0.908
78	2480	0.908


**20 dB Bandwidth Plot on Channel 00**

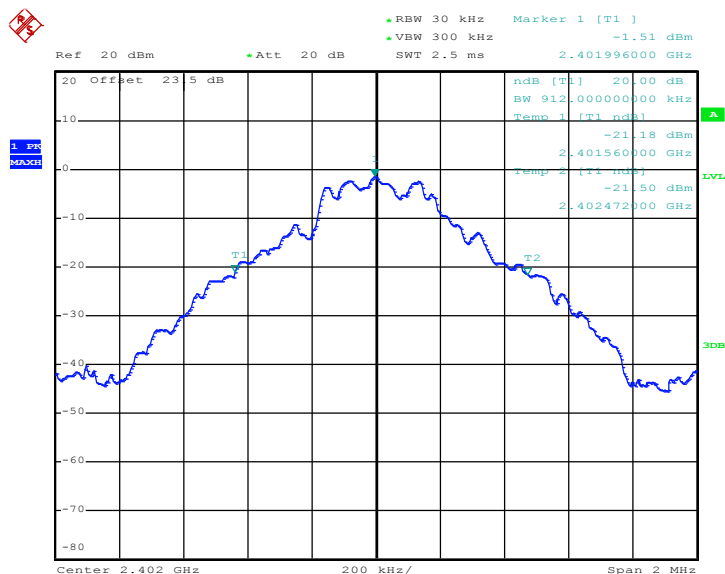

Date: 7.OCT.2011 21:27:11

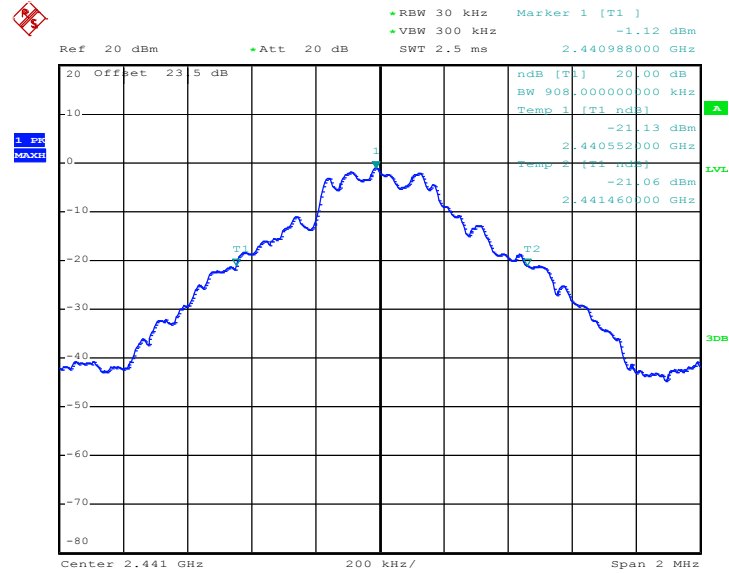**20 dB Bandwidth Plot on Channel 39**


Date: 7.OCT.2011 21:28:08

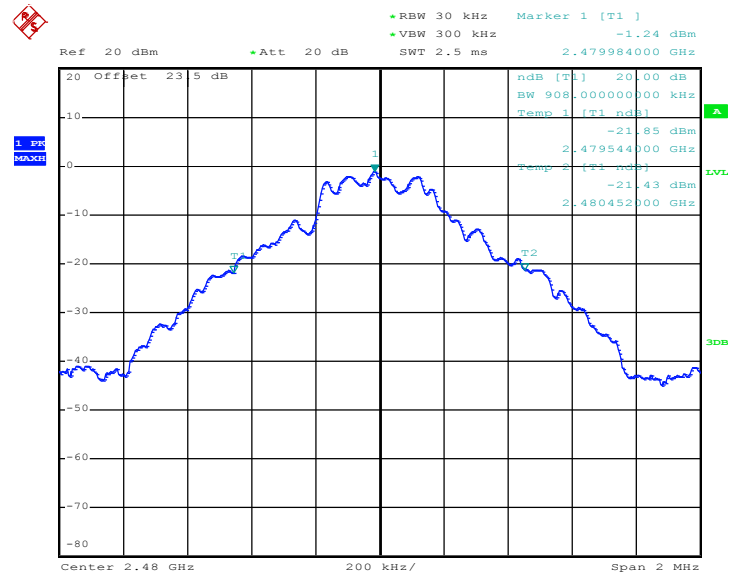**20 dB Bandwidth Plot on Channel 78**


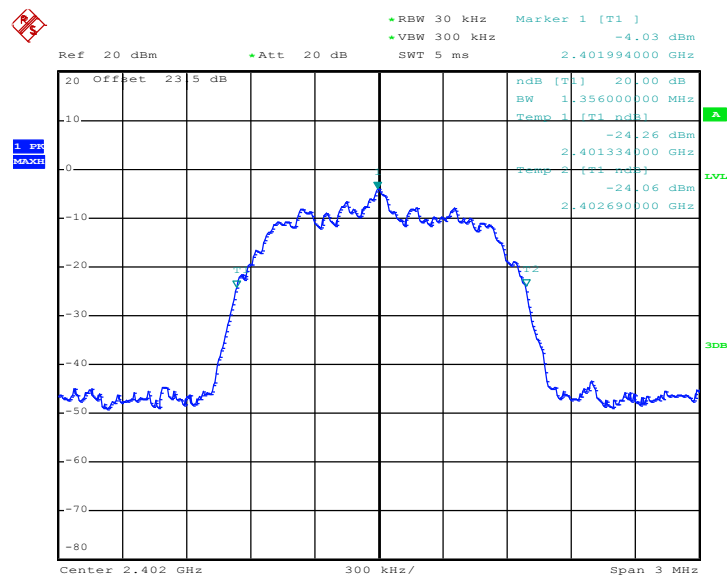
Date: 7.OCT.2011 21:28:36



<b>Test Mode :</b>	Mode 4, 5, 6	<b>Temperature :</b>	21~24°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.356
39	2441	1.356
78	2480	1.350


**20 dB Bandwidth Plot on Channel 00**



Date: 7.OCT.2011 21:29:08




### 20 dB Bandwidth Plot on Channel 39

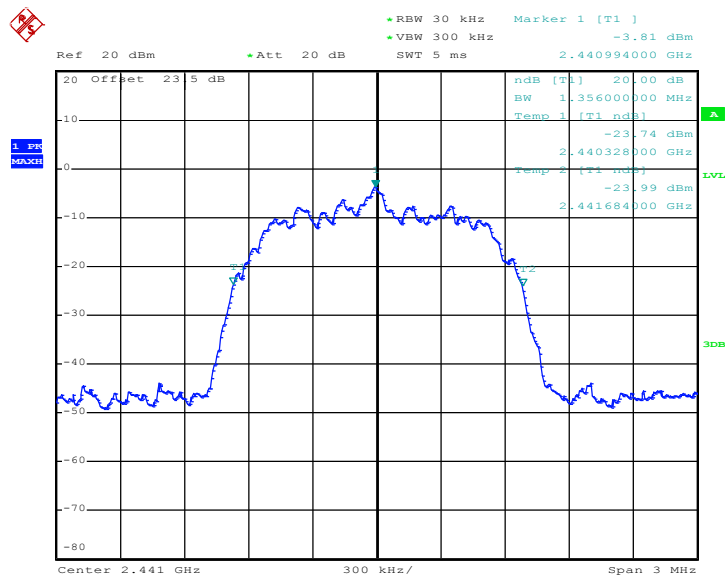

Date: 7.OCT.2011 21:29:34

### 20 dB Bandwidth Plot on Channel 78

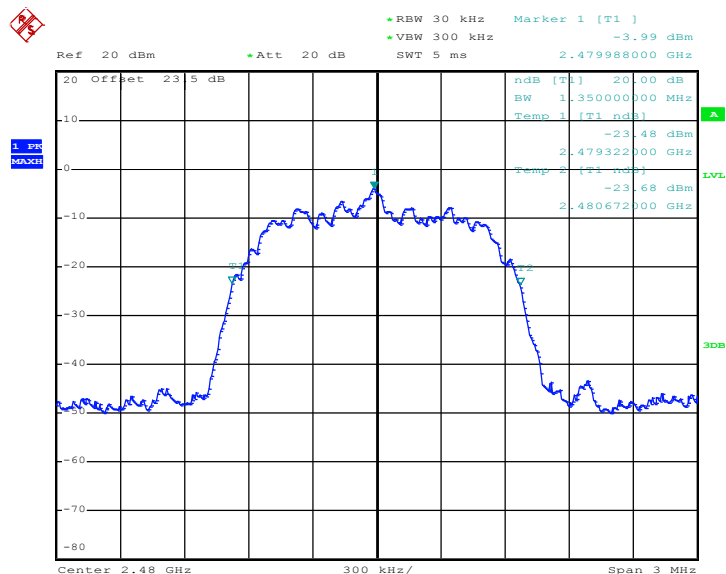


Date: 7.OCT.2011 21:30:08



<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	21~24°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.338
39	2441	1.344
78	2480	1.344

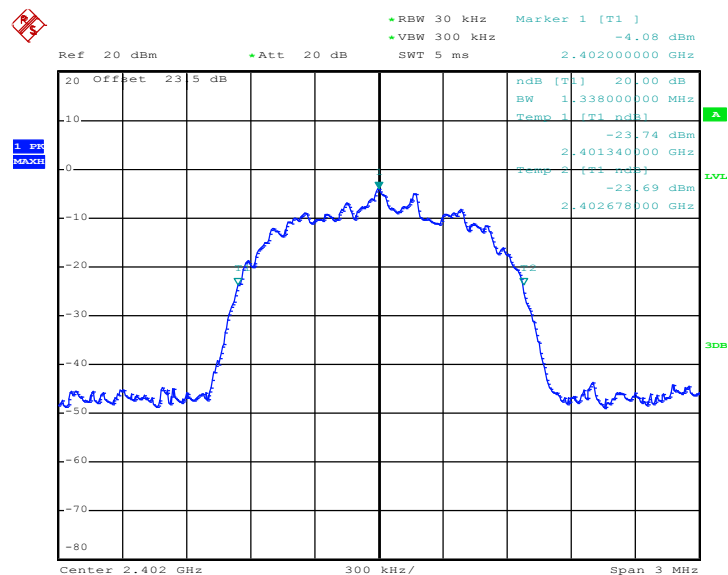**20 dB Bandwidth Plot on Channel 00**


Date: 7.OCT.2011 21:30:38




### 20 dB Bandwidth Plot on Channel 39

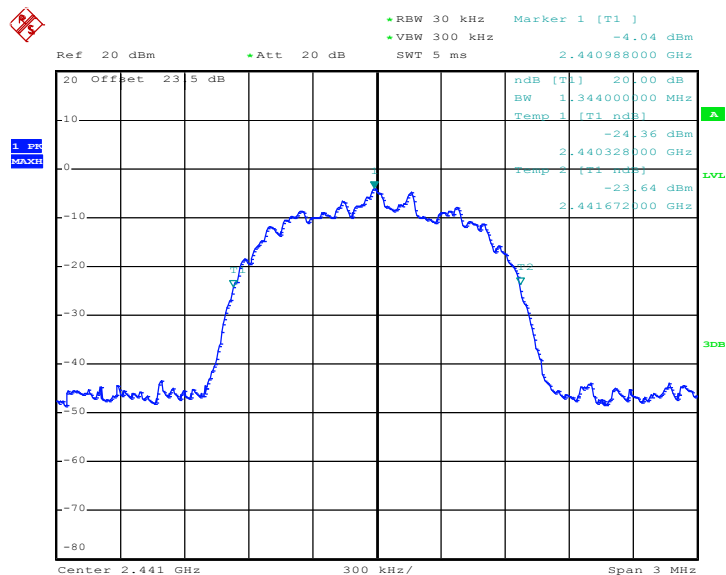

Date: 7.OCT.2011 21:31:19

### 20 dB Bandwidth Plot on Channel 78

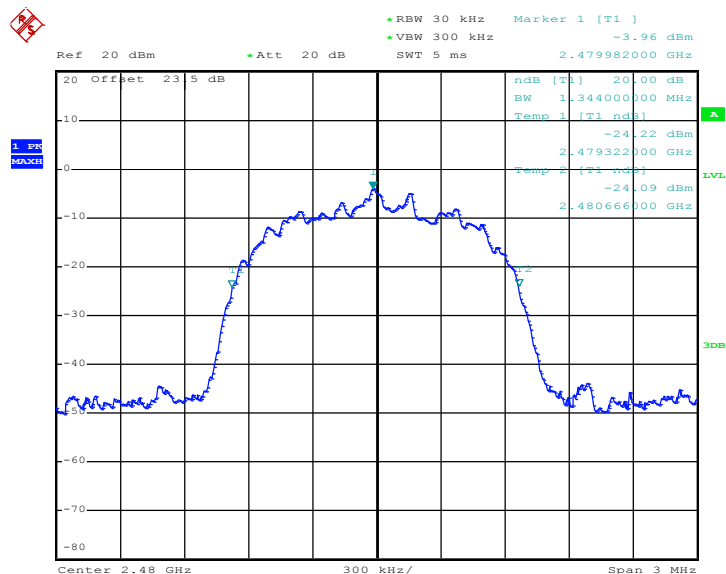

Date: 7.OCT.2011 21:31:56

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

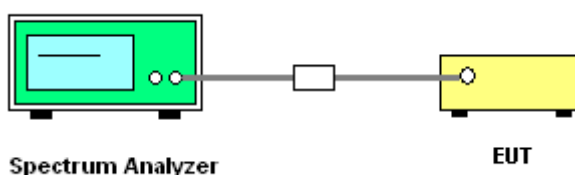


### 3.3.5 Test Result of Hopping Channel Separation


<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	21~24℃
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8920	Pass
39	2441	1.002	0.8960	Pass
78	2480	1.002	0.8960	Pass


**Channel Separation Plot on Channel 00 - 01**

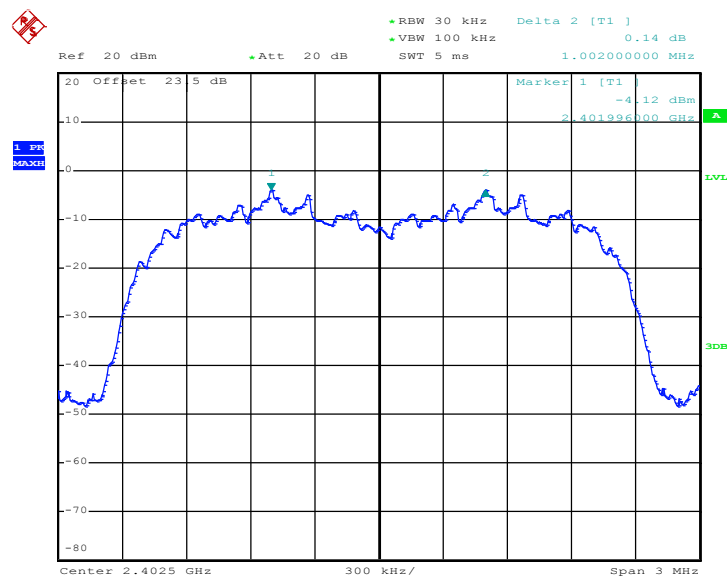

Date: 7.OCT.2011 19:56:44

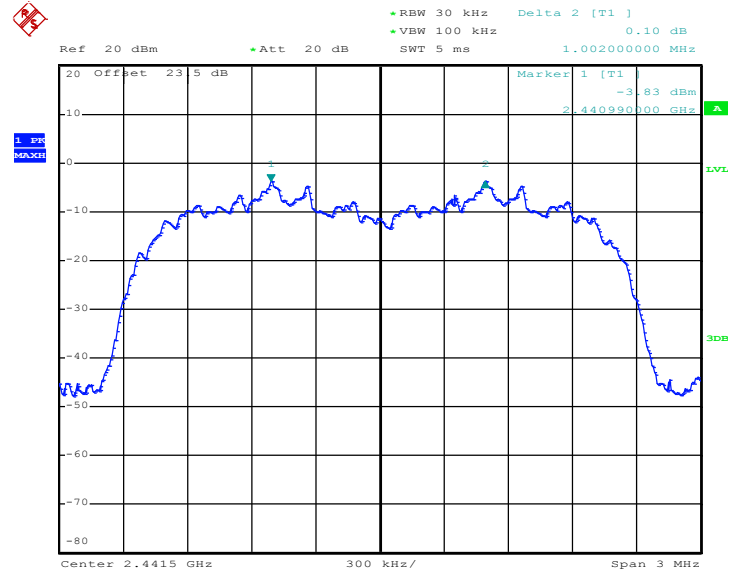**Channel Separation Plot on Channel 39 - 40**


Date: 7.OCT.2011 19:57:24

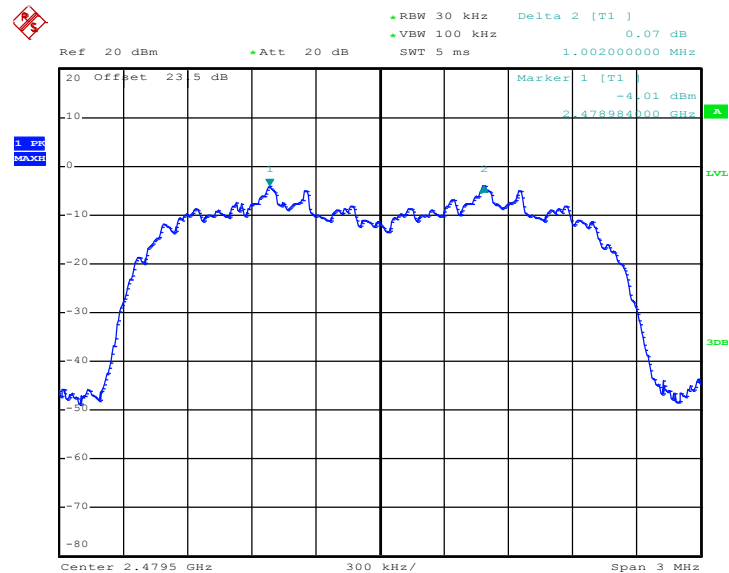**Channel Separation Plot on Channel 77 - 78**


Date: 7.OCT.2011 19:58:11

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

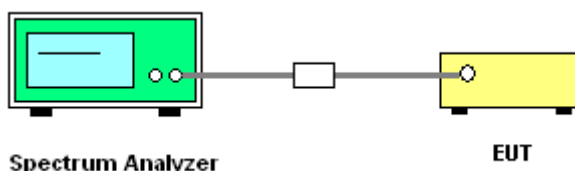

#### 3.4.5 Test Result of Dwell Time

<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	21~24°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%


  

Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.20	2938.00	0.30	0.4	Pass

**Remark:**


1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

### 3DH5 Dwell Time (One Pulse) Plot on Channel 39

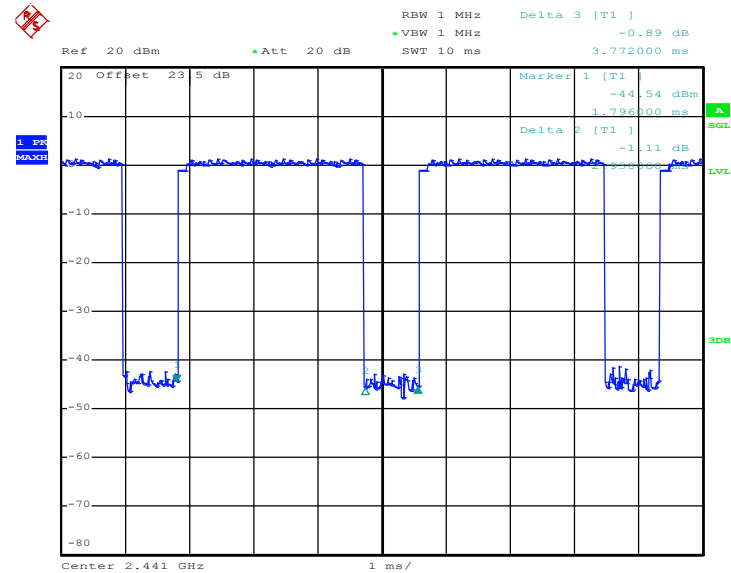

Date: 7.OCT.2011 21:58:58

### 3DH5 Dwell Time (Count Pulses) Plot on Channel 39

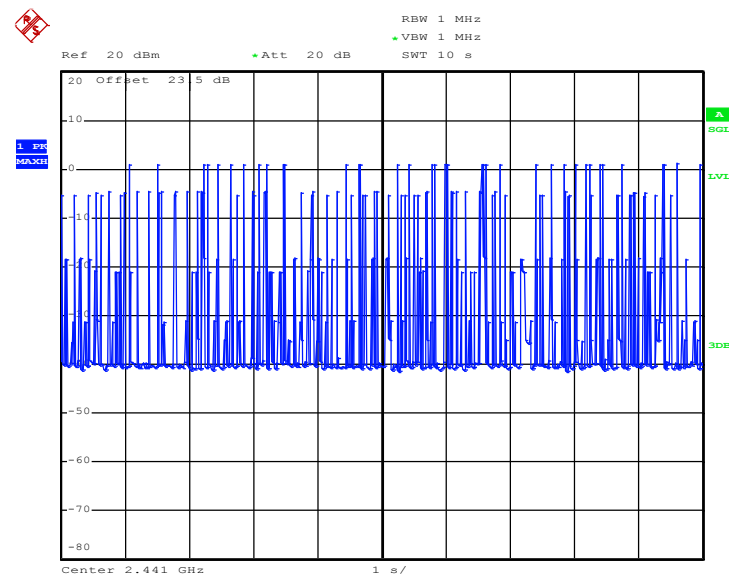

Date: 7.OCT.2011 18:55:46

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

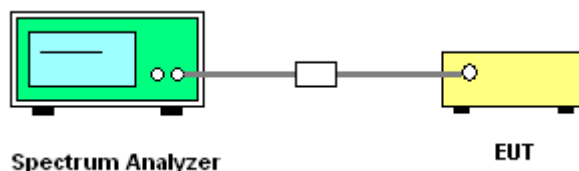


#### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	21~24℃
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	53~56%


Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	1.56	20.97	Pass
39	2441	1.99	20.97	Pass
78	2480	1.89	20.97	Pass







Peak Output Power Plot on Channel 78

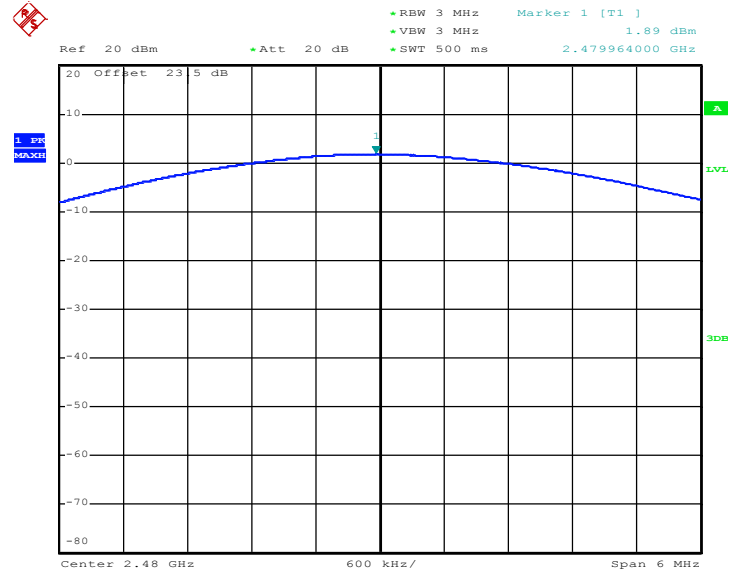

Date: 7.OCT.2011 18:48:27

## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

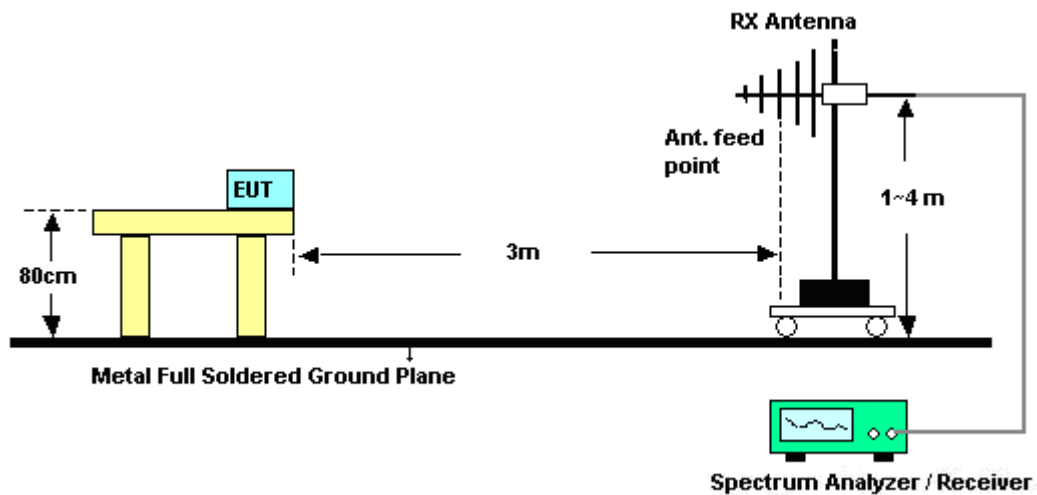

#### <Conducted Band Edges>

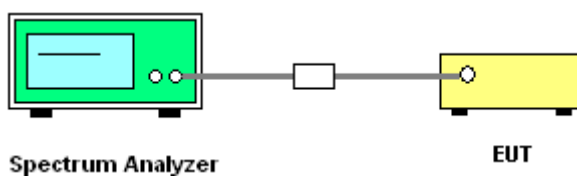

### 3.6.5 Test Result of Radiated Band Edges

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	49~51%
		<b>Test Engineer :</b>	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2336.22	45.76	-28.24	74	41.66	31.98	5.95	33.83	103	118	Peak
2336.22	33.34	-20.66	54	29.24	31.98	5.95	33.83	103	118	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2317.41	46.18	-27.82	74	42.15	31.93	5.92	33.82	104	289	Peak
2317.41	33.23	-20.77	54	29.2	31.93	5.92	33.82	104	289	Average


<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	49~51%
		<b>Test Engineer :</b>	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	54.94	-19.06	74	50.48	32.18	6.18	33.9	107	123	Peak
2483.5	46.26	-7.74	54	41.8	32.18	6.18	33.9	107	123	Average


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	60.49	-13.51	74	56.03	32.18	6.18	33.9	103	277	Peak
2483.5	49.56	-4.44	54	45.1	32.18	6.18	33.9	103	277	Average



<b>Test Mode :</b>	Mode 7 and 9	<b>Temperature :</b>	21~24℃
<b>Test Channel :</b>	00 and 78	<b>Relative Humidity :</b>	53~56%
		<b>Test Engineer :</b>	Reece Li

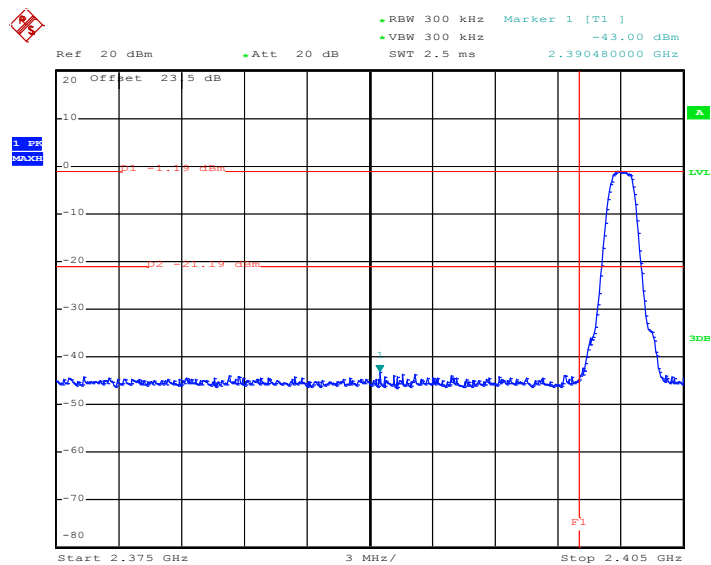

Date: 7.OCT.2011 21:36:40

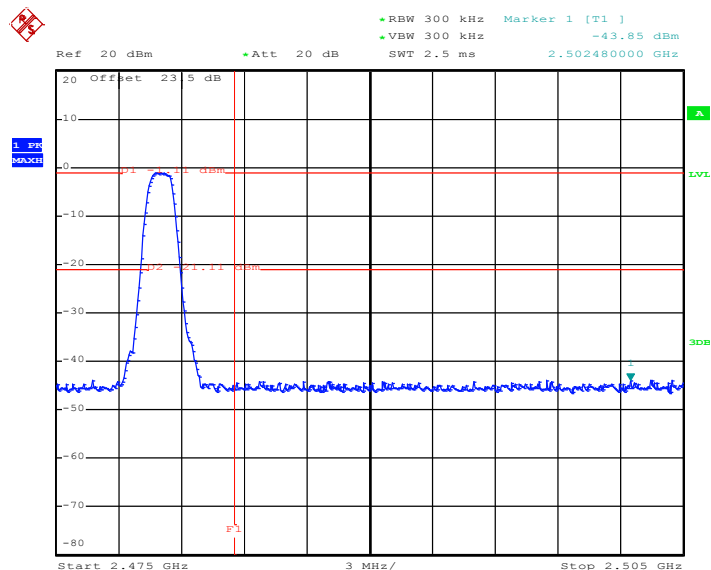

Date: 7.OCT.2011 21:37:43

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


### 3.7.4 Test Setup

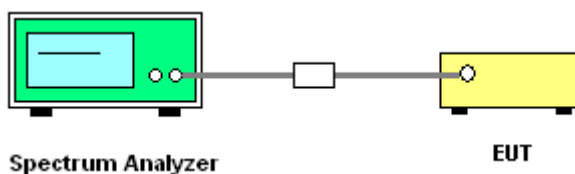

### 3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	21~24℃
Test Channel :	00	Relative Humidity :	53~56%
		Test Engineer :	Reece Li

#### Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

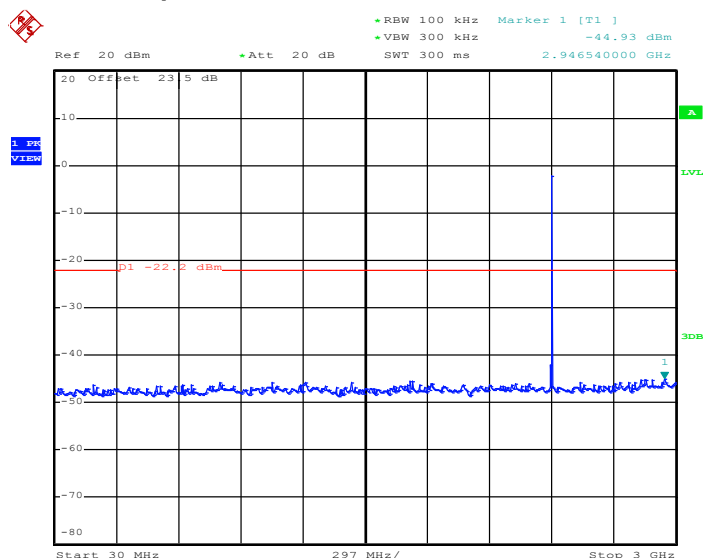

Date: 7.OCT.2011 18:56:44

#### Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

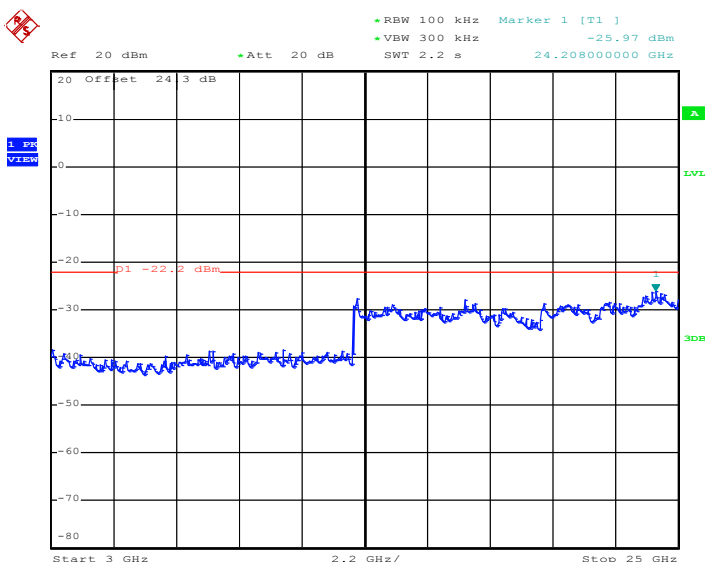


Date: 7.OCT.2011 18:56:57






Test Mode :	Mode 8	Temperature :	21~24°C
Test Channel :	39	Relative Humidity :	53~56%
		Test Engineer :	Reece Li

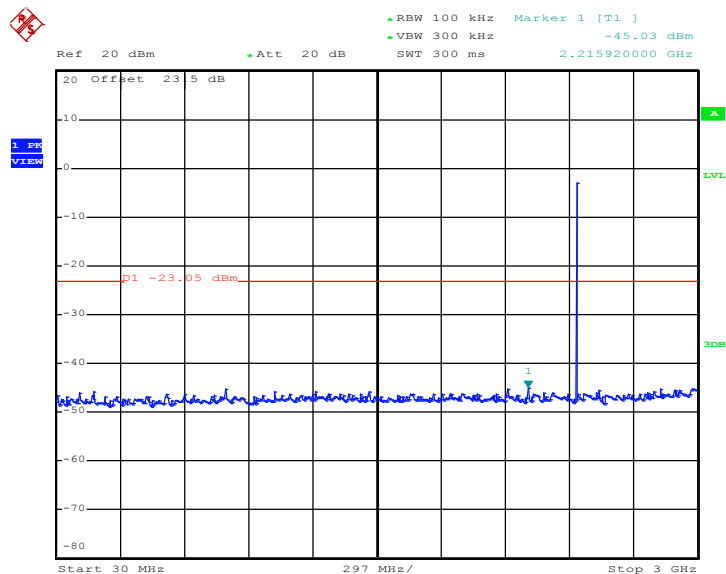**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 7.OCT.2011 18:57:49

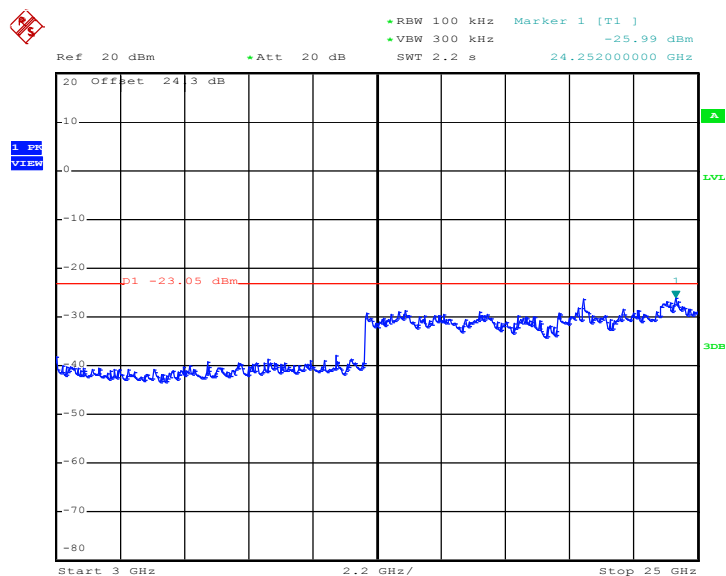**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**


Date: 7.OCT.2011 18:58:02



Test Mode :	Mode 9	Temperature :	21~24°C
Test Channel :	78	Relative Humidity :	53~56%
		Test Engineer :	Reece Li

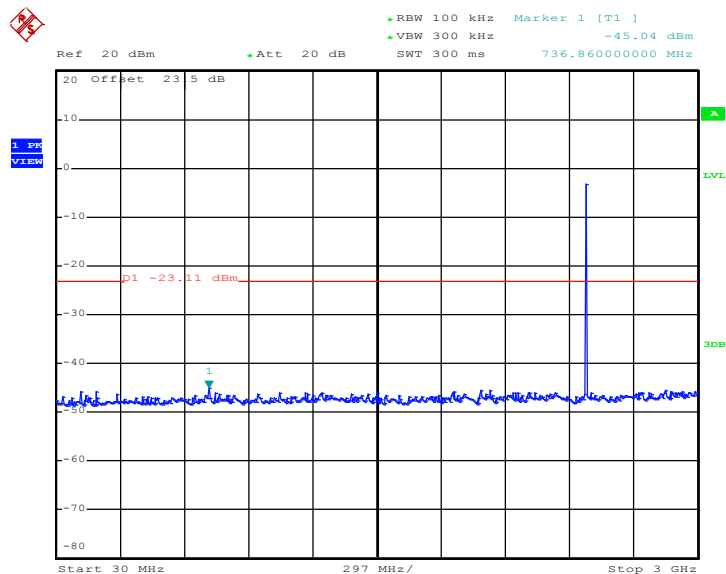**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**

Date: 7.OCT.2011 18:58:54

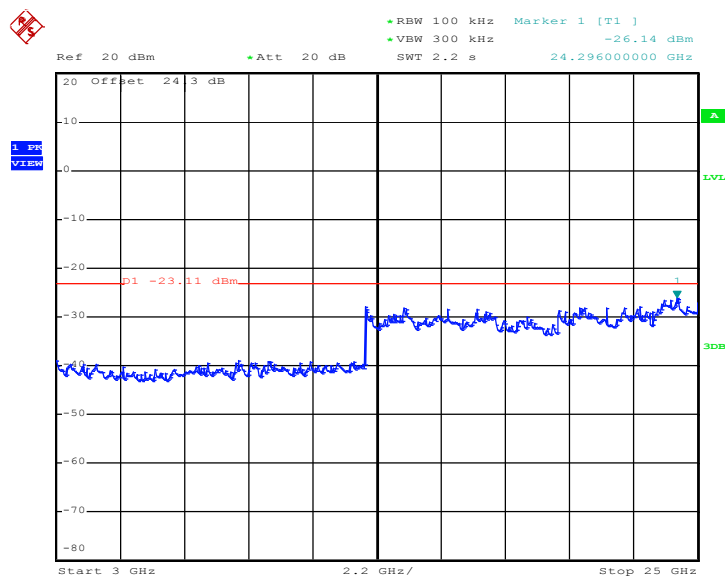**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**

Date: 7.OCT.2011 18:59:07

### 3.8 AC Conducted Emission Measurement

#### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.8.4 Test Setup

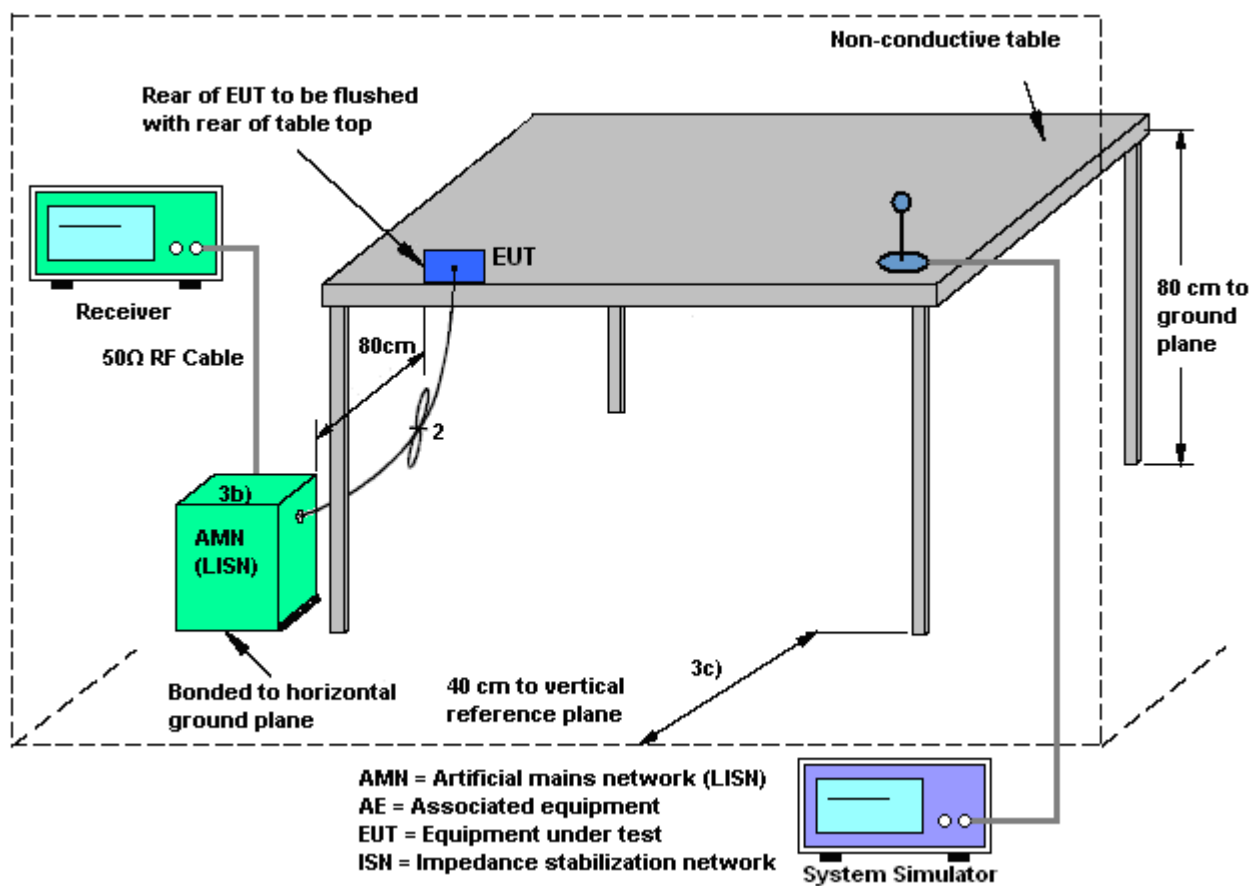

### 3.8.5 Test Result of AC Conducted Emission

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Kai-Chun Chu	<b>Relative Humidity :</b>	42~44%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	GSM850 Idle + Bluetooth Link + WLAN Link + Camera + Battery 1 + Earphone 1 + USB Cable 1 (Charging from Adapter 1)		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

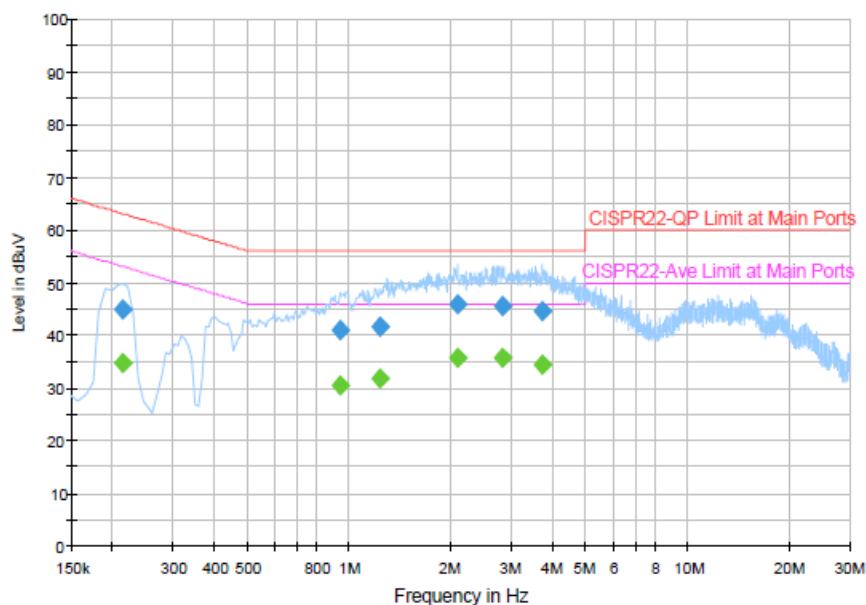


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.214000	45.0	Off	L1	19.4	18.0	63.0
0.934000	40.9	Off	L1	19.4	15.1	56.0
1.222000	41.7	Off	L1	19.4	14.3	56.0
2.086000	45.9	Off	L1	19.4	10.1	56.0
2.830000	45.5	Off	L1	19.4	10.5	56.0
3.702000	44.6	Off	L1	19.5	11.4	56.0

#### Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.214000	34.6	Off	L1	19.4	18.4	53.0
0.934000	30.5	Off	L1	19.4	15.5	46.0
1.222000	31.7	Off	L1	19.4	14.3	46.0
2.086000	35.8	Off	L1	19.4	10.2	46.0
2.830000	35.6	Off	L1	19.4	10.4	46.0
3.702000	34.6	Off	L1	19.5	11.4	46.0

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Kai-Chun Chu	<b>Relative Humidity :</b>	42~44%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM850 Idle + Bluetooth Link + WLAN Link + Camera + Battery 1 + Earphone 1 + USB Cable 1 (Charging from Adapter 1)		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

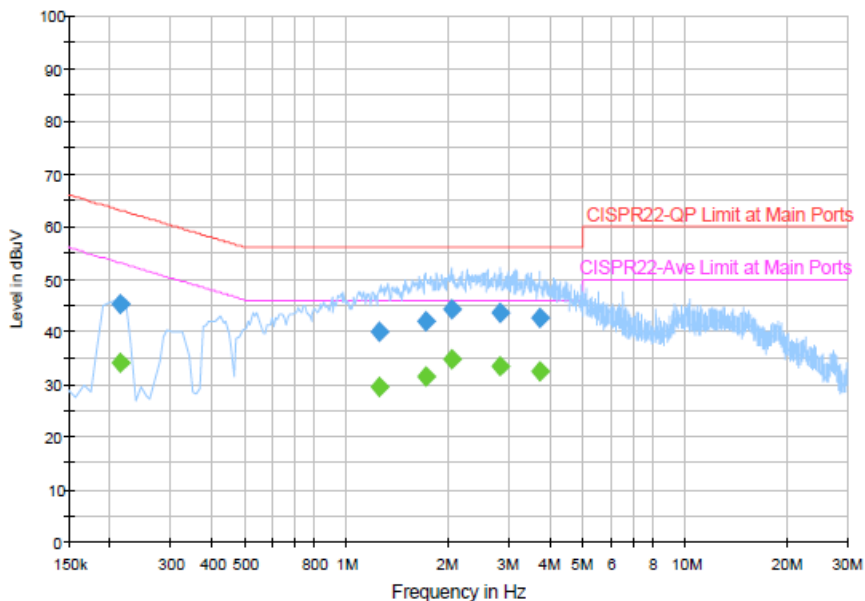
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.214000	45.2	Off	N	19.4	17.8	63.0
1.238000	40.1	Off	N	19.5	15.9	56.0
1.702000	42.1	Off	N	19.5	13.9	56.0
2.030000	44.3	Off	N	19.5	11.7	56.0
2.822000	43.7	Off	N	19.5	12.3	56.0
3.710000	42.6	Off	N	19.5	13.4	56.0

**Final Result 2**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.214000	34.2	Off	N	19.4	18.8	53.0
1.238000	29.5	Off	N	19.5	16.5	46.0
1.702000	31.5	Off	N	19.5	14.5	46.0
2.030000	34.8	Off	N	19.5	11.2	46.0
2.822000	33.5	Off	N	19.5	12.5	46.0
3.710000	32.5	Off	N	19.5	13.5	46.0

## 3.9 Radiated Emission Measurement

### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

### 3.9.4 Test Setup

For radiated emissions below 30MHz

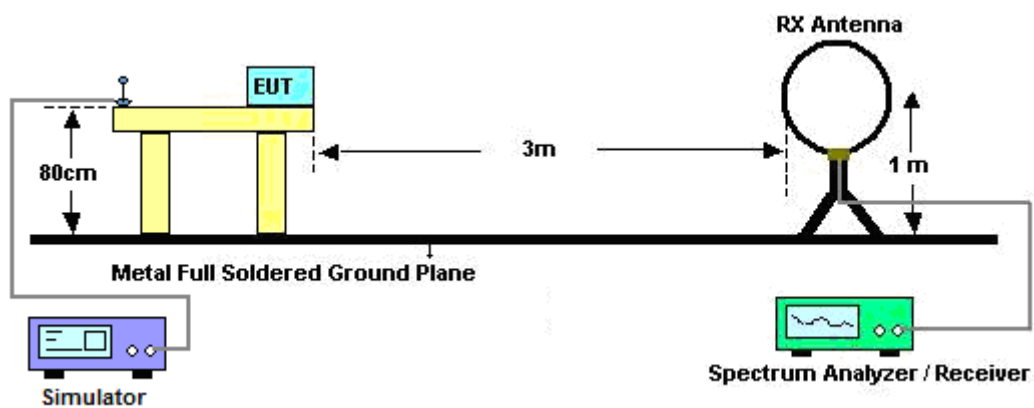


For radiated emissions from 30MHz to 1GHz

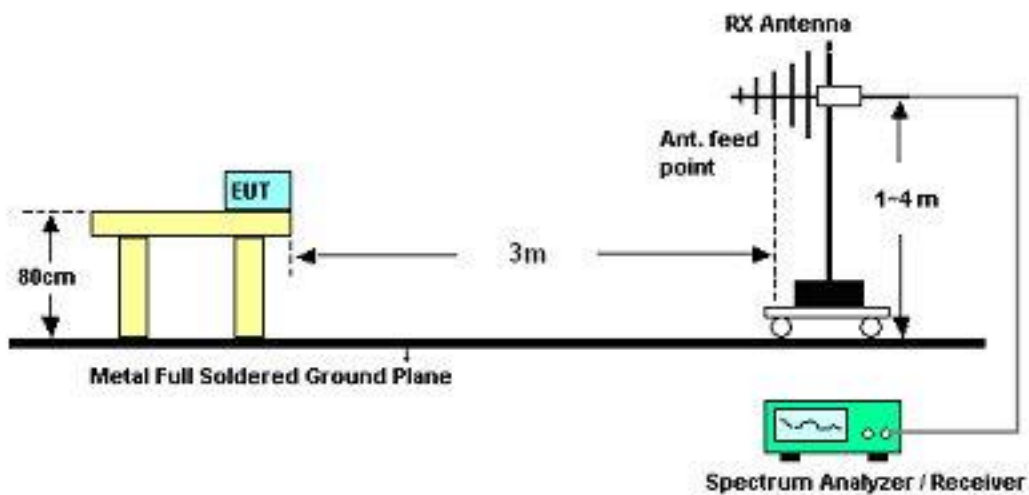



For radiated emissions above 1GHz

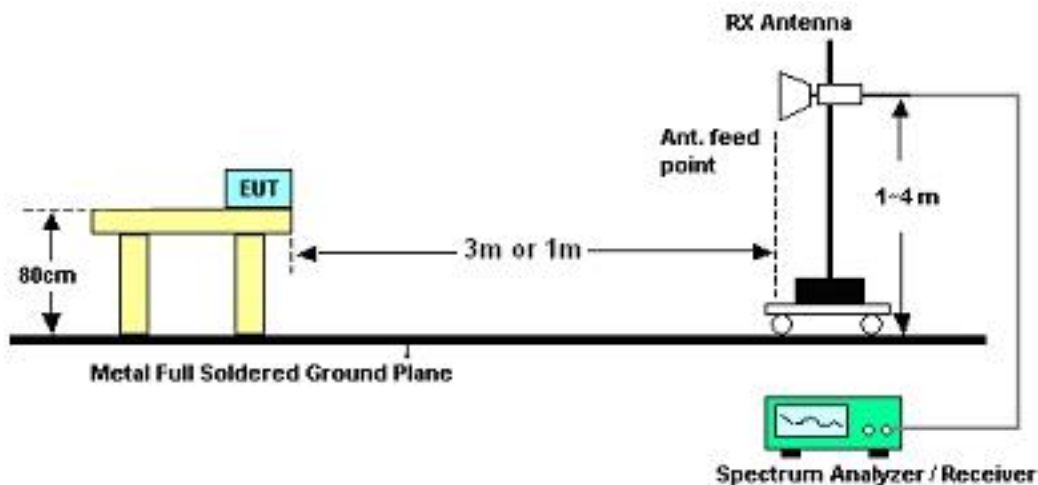

### 3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	David Yang	Temperature :	23~24℃	
		Relative Humidity :	49~51%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

**3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	27.73	-12.27	40	49.5	9.08	0.68	31.53	-	-	Peak
231.69	25.24	-20.76	46	43.82	11.37	1.49	31.44	-	-	Peak
298.38	26.25	-19.75	46	42.38	13.44	1.76	31.33	-	-	Peak
301.4	28.21	-17.79	46	44.25	13.52	1.77	31.33	-	-	Peak
377.7	38.47	-7.53	46	51.75	15.87	2.09	31.24	163	278	Peak
456.1	27.88	-18.12	46	39.17	17.49	2.31	31.09	-	-	Peak
2336.22	45.76	-28.24	74	41.66	31.98	5.95	33.83	103	118	Peak
2336.22	33.34	-20.66	54	29.24	31.98	5.95	33.83	103	118	Average
2402	92.2	-	-	87.94	32.08	6.03	33.85	103	118	Peak
2402	76.79	-	-	72.55	32.06	6.03	33.85	103	118	Average
2500	33.01	-20.99	54	28.53	32.2	6.18	33.9	103	118	Average
2500	45.08	-28.92	74	40.6	32.2	6.18	33.9	103	118	Peak



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
42.69	23.84	-16.16	40	43.12	11.59	0.64	31.51	-	-	Peak
74.82	23.23	-16.77	40	47.21	6.71	0.85	31.54	-	-	Peak
128.82	25.58	-17.92	43.5	44.44	11.57	1.14	31.57	-	-	Peak
300	25.81	-20.19	46	41.91	13.46	1.77	31.33	-	-	Peak
379.8	33.43	-12.57	46	46.61	15.96	2.1	31.24	100	112	Peak
470.1	29.33	-16.67	46	40.32	17.73	2.35	31.07	-	-	Peak
2317.41	46.18	-27.82	74	42.15	31.93	5.92	33.82	104	289	Peak
2317.41	33.23	-20.77	54	29.2	31.93	5.92	33.82	104	289	Average
2402	94.52	-	-	90.26	32.08	6.03	33.85	104	289	Peak
2402	79.64	-	-	75.4	32.06	6.03	33.85	104	289	Average
2494	33	-21	54	28.52	32.2	6.18	33.9	104	289	Average
2494	45.32	-28.68	74	40.84	32.2	6.18	33.9	104	289	Peak

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	29.39	-10.61	40	51.16	9.08	0.68	31.53	-	-	Peak
254.1	26.35	-19.65	46	43.48	12.73	1.55	31.41	-	-	Peak
299.73	27.1	-18.9	46	43.2	13.46	1.77	31.33	-	-	Peak
301.4	28.9	-17.1	46	44.94	13.52	1.77	31.33	-	-	Peak
377	37.58	-8.42	46	50.86	15.87	2.09	31.24	133	151	Peak
466.6	29.46	-16.54	46	40.52	17.67	2.34	31.07	-	-	Peak
2332	45.43	-28.57	74	41.35	31.96	5.95	33.83	107	134	Peak
2332	33.27	-20.73	54	29.19	31.96	5.95	33.83	107	134	Average
2441	92.47	-	-	88.11	32.13	6.11	33.88	107	134	Peak
2441	77.33	-	-	72.97	32.13	6.11	33.88	107	134	Average
2484	45.32	-28.68	74	40.86	32.18	6.18	33.9	107	134	Peak
2484	32.92	-21.08	54	28.46	32.18	6.18	33.9	107	134	Average

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	29.74	-10.26	40	51.51	9.08	0.68	31.53	100	193	Peak
74.82	23.54	-16.46	40	47.52	6.71	0.85	31.54	-	-	Peak
130.98	27.61	-15.89	43.5	46.45	11.58	1.15	31.57	-	-	Peak
301.4	26.77	-19.23	46	42.81	13.52	1.77	31.33	-	-	Peak
379.8	33.74	-12.26	46	46.92	15.96	2.1	31.24	-	-	Peak
466.6	29.77	-16.23	46	40.83	17.67	2.34	31.07	-	-	Peak
2310	45.54	-28.46	74	41.51	31.93	5.92	33.82	103	280	Peak
2310	33.21	-20.79	54	29.18	31.93	5.92	33.82	103	280	Average
2441	95.57	-	-	91.21	32.13	6.11	33.88	103	280	Peak
2441	79.58	-	-	75.22	32.13	6.11	33.88	103	280	Average
2494	45.81	-28.19	74	41.33	32.2	6.18	33.9	103	280	Peak
2494	32.94	-21.06	54	28.46	32.2	6.18	33.9	103	280	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
132.33	24.66	-18.84	43.5	43.49	11.58	1.16	31.57	-	-	Peak
253.02	26.18	-19.82	46	43.32	12.72	1.55	31.41	-	-	Peak
299.73	27.15	-18.85	46	43.25	13.46	1.77	31.33	-	-	Peak
304.2	27.62	-18.38	46	43.56	13.61	1.78	31.33	-	-	Peak
380.5	38.23	-7.77	46	51.41	15.96	2.1	31.24	111	142	Peak
469.4	28.73	-17.27	46	39.73	17.72	2.35	31.07	-	-	Peak
2358	44.77	-29.23	74	40.61	32.01	5.99	33.84	107	123	Peak
2358	33.33	-20.67	54	29.17	32.01	5.99	33.84	107	123	Average
2480	77.33	-	-	72.87	32.18	6.18	33.9	107	123	Average
2480	91.5	-	-	87.04	32.18	6.18	33.9	107	123	Peak
2483.5	54.94	-19.06	74	50.48	32.18	6.18	33.9	107	123	Peak
2483.5	46.26	-7.74	54	41.8	32.18	6.18	33.9	107	123	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	49~51%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	31.3	-8.7	40	53.07	9.08	0.68	31.53	109	325	Peak
133.41	28.07	-15.43	43.5	46.88	11.58	1.17	31.56	-	-	Peak
299.73	25.69	-20.31	46	41.79	13.46	1.77	31.33	-	-	Peak
301.4	26.58	-19.42	46	42.62	13.52	1.77	31.33	-	-	Peak
379.8	37.25	-8.75	46	50.43	15.96	2.1	31.24	-	-	Peak
464.5	30.15	-15.85	46	41.26	17.64	2.33	31.08	-	-	Peak
2334	45.92	-28.08	74	41.84	31.96	5.95	33.83	103	277	Peak
2334	33.22	-20.78	54	29.14	31.96	5.95	33.83	103	277	Average
2480	79.16	-	-	74.7	32.18	6.18	33.9	103	277	Average
2480	95.1	-	-	90.64	32.18	6.18	33.9	103	277	Peak
2483.5	60.49	-13.51	74	56.03	32.18	6.18	33.9	103	277	Peak
2483.5	49.56	-4.44	54	45.1	32.18	6.18	33.9	103	277	Average

## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 18, 2011	Sep. 17, 2012	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 18, 2011	Sep. 17, 2012	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 18, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 18, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 01, 2011	May 31, 2012	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Aug. 21, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	112403	N/A	Feb. 22, 2011	Feb. 21, 2012	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Oct. 21, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Aug. 09, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
EMI TEST RECEIVER	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Aug. 21, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	1GHz ~ 18GHz	Feb. 21, 2011	Feb. 20, 2012	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan. 13, 2011	Jan. 12, 2012	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	$\pm 0.10$	Normal ( $k=2$ )	0.10	1	0.10
Antenna Factor Calibration	$\pm 1.70$	Normal ( $k=2$ )	0.85	1	0.85
Cable Loss Calibration	$\pm 0.50$	Normal ( $k=2$ )	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site Imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				

