

A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.

Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT



Test Report No.	:	1108FS11
Applicant	:	HTC Corporation
Product Type	:	Smartphone
Trade Name	:	HTC
Model Number	:	PH85110
Dates of Test	:	Jul. 11 ~ Jul. 28, 2011
Date of Issued	:	Aug. 02, 2011
Test Environment	:	Ambient Temperature : 22 ± 2 ° C Relative Humidity : 40 - 70 %
Standard	:	ANSI/IEEE C95.1-1999 IEEE Std. 1528-2003 47 CFR Part §2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
Max. SAR	:	0.464 W/kg Head SAR 1.320 W/kg Body SAR
Test Lab Location	:	Chang-an Lab



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By :



(Sam Chuang)

Tested By :



(Alex Wu)



Contents

1. Description of Equipment under Test (EUT)	3
2. Introduction	5
2.1 SAR Definition	5
3. SAR Measurement Setup	6
3.1 DASY5 E-Field Probe System	7
3.2 Data Acquisition Electronic (DAE) System.....	10
3.3 Robot.....	10
3.4 Measurement Server.....	10
3.5 Device Holder.....	11
3.6 Phantom - SAM v4.0	11
3.7 Oval Flat Phantom - ELI 4.0.....	12
3.8 Data Storage and Evaluation	12
4. Tissue Simulating Liquids	15
4.1 Ingredients	16
4.2 Recipes	16
4.3 Liquid Confirmation	17
5. SAR Testing with RF Transmitters	21
5.1 SAR Testing with HSDPA Transmitters	21
5.2 SAR Testing with 802.11 Transmitters	24
5.2.1 General Device Setup	24
5.2.2 Frequency Channel Configurations	24
5.3 Conducted Power.....	26
5.4 Simultaneous Transmitting Evaluate.....	36
6. System Performance Check	41
6.1 Symmetric Dipoles for System Validation	41
6.2 Validation.....	42
7. Test Equipment List.....	50
8. Measurement Uncertainty	51
9. Measurement Procedure	53
9.1 Spatial Peak SAR Evaluation	53
9.2 Area & Zoom Scan Procedures	54
9.3 Volume Scan Procedures	54
9.4 SAR Averaged Methods.....	54
9.5 Power Drift Monitoring.....	54
10. SAR Test Results Summary.....	55
10.1 Head SAR	55
10.2 Body SAR.....	56
10.3 Std. C95.1-1999 RF Exposure Limit	61
11. Conclusion	62
12. References.....	62
Appendix A - System Performance Check.....	63
Appendix B - SAR Measurement Data.....	75
Appendix C - Calibration.....	184



1. Description of Equipment under Test (EUT)

Applicant	HTC Corporation	
Applicant Address	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan	
Manufacture	HTC Corporation	
Manufacture Address	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan	
Product Type	Smartphone	
Trade Name	HTC	
Model Number	PH85110	
FCC ID	NM8PH85110	
RF Function	GSM/GPRS/EGPRS 850 (Device Class B, Multi-slot Class 10) GSM/GPRS/EGPRS 1900 (Device Class B, Multi-slot Class 10) WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band II WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band IV WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band V IEEE 802.11b / 802.11g / draft 802.11n 2.4GHz Standard-20MHz with Wi-Fi Hot spot mode IEEE 802.11a / draft 802.11n 5GHz Standard-20MHz Bluetooth	
Tx Frequency	Band	Operate Frequency (MHz)
	GSM/GPRS/EGPRS 850	824.2 - 848.8
	GSM/GPRS/EGPRS 1900	1850.2 - 1909.8
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band II	1852.4 - 1907.6
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band IV	1712.4 - 1752.6
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band V	826.4 - 846.4
	IEEE 802.11b/802.11g	2412 - 2462
	draft 802.11n 2.4GHz Standard-20MHz	2412 - 2462
	IEEE 802.11a	5180 - 5825
	draft 802.11n 5GHz Standard-20MHz	5180 - 5825
	Bluetooth	2402 - 2480



RF Conducted Power (Avg.)	Band	Power (W / dBm)
	GSM/GPRS/EGPRS 850	2.188 / 33.40
	GSM/GPRS/EGPRS 1900	1.059 / 30.25
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band II	0.186 / 22.70
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band IV	0.206 / 23.13
	WCDMA(RMC 12.2K) / HSDPA / HSUPA / HSPA+ (QPSK) Band V	0.208 / 23.19
	IEEE 802.11b	0.095 / 19.77
	IEEE 802.11g	0.029 / 14.63
	draft 802.11n 2.4GHz Standard-20MHz	0.022 / 13.39
	IEEE 802.11a	0.031 / 14.94
	draft 802.11n 5GHz Standard-20MHz	0.030 / 14.74
	Bluetooth	0.00074 / -1.33
Max. SAR Measurement	0.464 W/kg Head SAR 1.320 W/kg Body SAR	
Antenna Type	PIFA Type	
Device Category	Portable Device	
RF Exposure Environment	General Population / Uncontrolled	
Battery Option	Standard	
Application Type	Certification	

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

2. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **HTC Corporation Trade Name : HTC Model(s) : PH85110**. The test procedures, as described in American National Standards, Institute C95.1-1999 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

2.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)


ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

* Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

3. SAR Measurement Setup

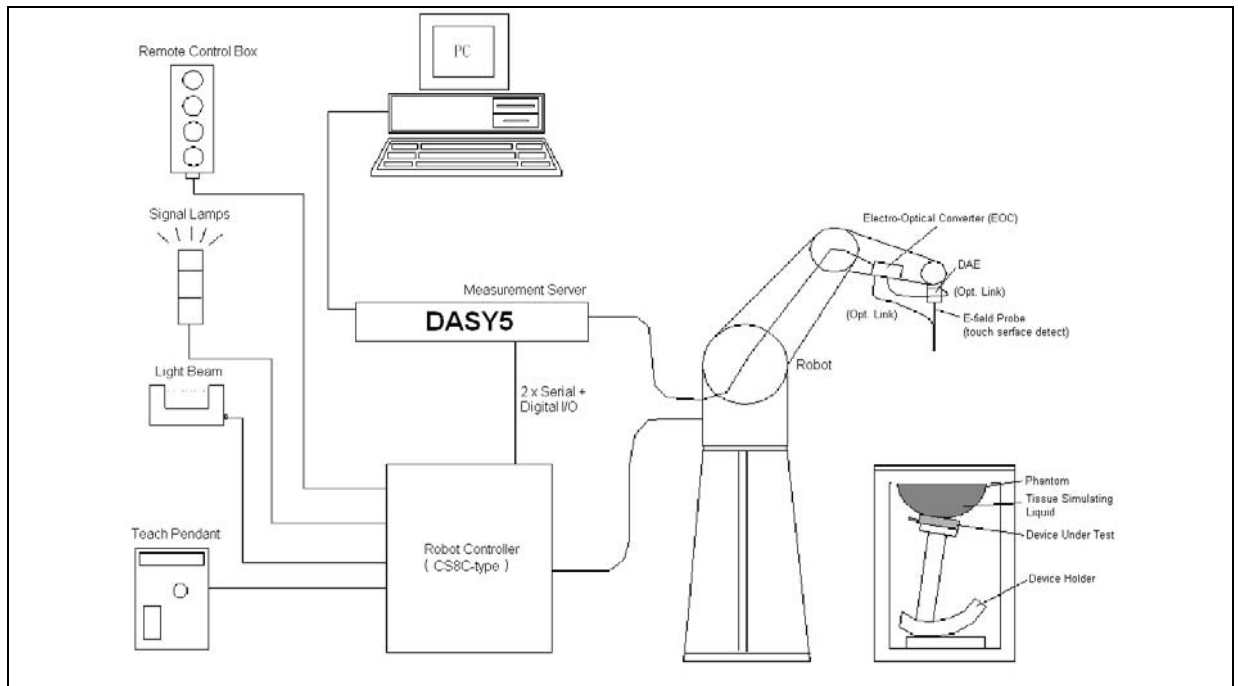

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY5 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.




3.1 DASYS E-Field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 or EX3DV3 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASYS software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

3.1.1 E-Field Probe Specification

Construction	<p>Symmetrical design with triangular core</p> <p>Built-in optical fiber for surface detection System</p> <p>Built-in shielding against static charges</p> <p>PEEK enclosure material (resistant to organic solvents, e.q., glycol)</p>
Calibration	<p>In air from 10 MHz to 6 GHz</p> <p>In brain and muscle simulating tissue at frequencies of 2450MHz (accuracy $\pm 8\%$)</p> <p>Calibration for other liquids and frequencies upon request</p>
Frequency	<p>± 0.2 dB (30 MHz to 6 GHz) for EX3DV4</p> <p>± 0.2 dB (30 MHz to 4 GHz) for EX3DV3</p>
Directivity	<p>± 0.3 dB in brain tissue (rotation around probe axis)</p> <p>± 0.5 dB in brain tissue (rotation normal probe axis)</p>
Dynamic Range	<p>10 μ W/g to > 100mW/g; Linearity: ± 0.2dB</p>
Dimensions	<p>Overall length: 337mm</p> <p>Tip length: 20mm</p> <p>Body diameter: 12mm</p> <p>Tip diameter: 2.5mm for EX3DV4, 3.9mm for EX3DV3</p> <p>Distance from probe tip to dipole centers: 1.0mm for EX3DV4, 2.0mm for EX3DV3</p>
Application	<p>General dosimetry up to 6GHz</p> <p>Compliance tests of mobile phones</p> <p>Fast automatic scanning in arbitrary phantoms</p>

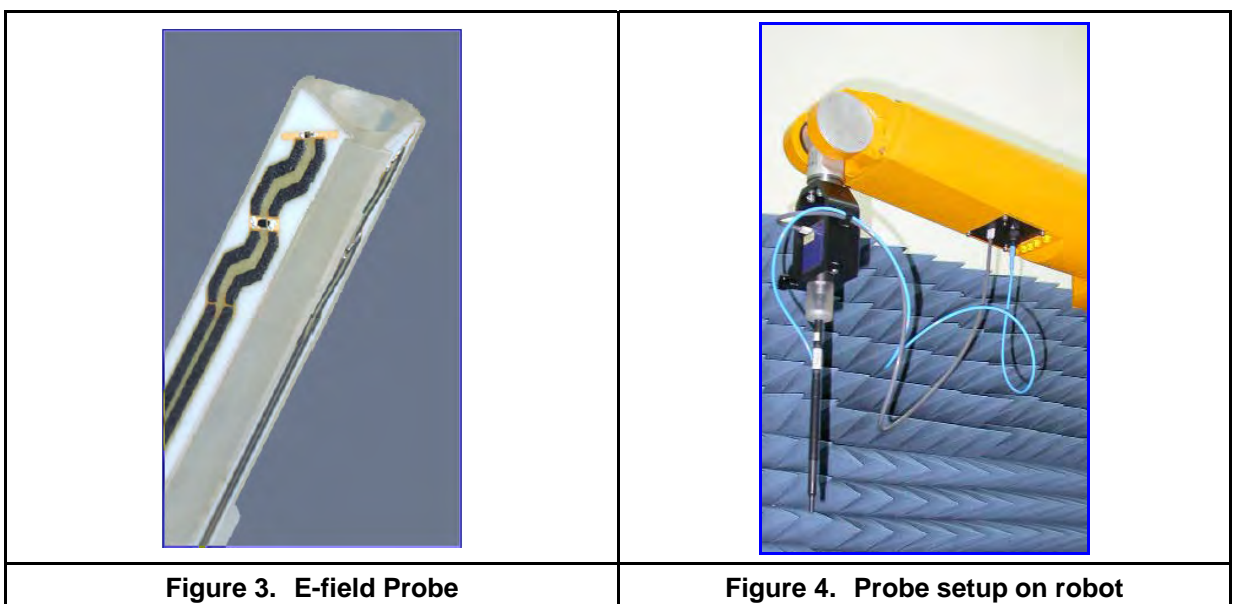



3.1.2 E-Field Probe Calibration process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

- Δt = Exposure time (30 seconds),
- C = Heat capacity of tissue (head or body),
- ΔT = Temperature increase due to RF exposure.

$$\text{Or } \text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

- σ = Simulated tissue conductivity,
- ρ = Tissue density (kg/m³).



3.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Core(TM)2 CPU
Clock Speed : @ 1.86GHz
Operating System : Windows XP Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY5 v5.0 (Build 125) & SEMCAD X Version 13.4 Build 125
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock

3.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ± 0.02 mm
No. of Axis : 6

3.4 Measurement Server

Processor : PC/104 with a 400MHz intel ULV Celeron
I/O-board : Link to DAE4 (or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

3.5 Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

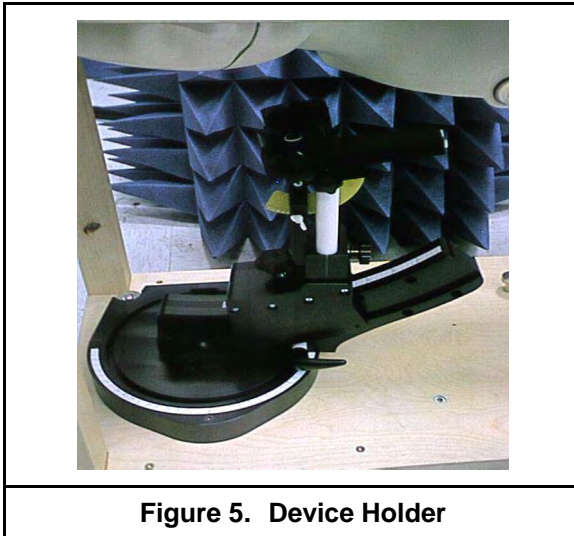


Figure 5. Device Holder

3.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	1000x500 mm (LxW)
Table 1. Specification of SAM v4.0	



Figure 6. SAM Twin Phantom

3.7 Oval Flat Phantom - ELI 4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190x600x400 mm (HxLxW)
Table 2. Specification of ELI 4.0	

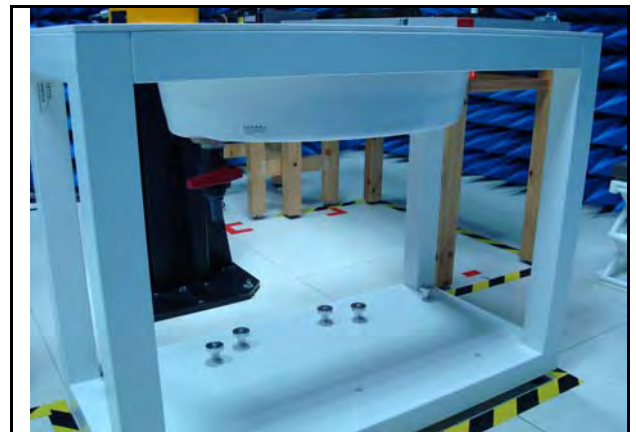


Figure 7. Oval Flat Phantom

3.8 Data Storage and Evaluation

3.8.1 Data Storage

The DASY5 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA5. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

3.8.2 Data Evaluation

The DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

H-field probes :

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

***Note :** That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



4. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue. The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)				

Table 3. Tissue dielectric parameters for head and body phantoms



4.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

4.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride Sugar: 98+% Pure Sucrose

Water: De-ionized, $16 \text{ M } \Omega$ resistivity HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether



Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

4.3 Liquid Confirmation

4.3.1 Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
835MHz Head	820MHz	22.0	ϵ_r	41.50	41.41	-0.22%	± 5	07/11/2011
			σ	0.90	0.89	-1.11%	± 5	
	835MHz	22.0	ϵ_r	41.50	41.18	-0.77%	± 5	
			σ	0.90	0.90	0.00%	± 5	
	850MHz	22.0	ϵ_r	41.50	40.99	-1.23%	± 5	
			σ	0.90	0.92	2.22%	± 5	
1750MHz Head	1700MHz	22.0	ϵ_r	40.08	39.56	-1.30%	± 5	07/23/2011
			σ	1.37	1.36	-0.73%	± 5	
	1750MHz	22.0	ϵ_r	40.08	39.51	-1.42%	± 5	
			σ	1.37	1.40	2.19%	± 5	
	1760MHz	22.0	ϵ_r	40.08	39.48	-1.50%	± 5	
			σ	1.37	1.41	2.92%	± 5	
1900MHz Head	1850MHz	22.0	ϵ_r	40.00	38.37	-4.08%	± 5	07/12/2011
			σ	1.40	1.35	-3.57%	± 5	
	1900MHz	22.0	ϵ_r	40.00	38.19	-4.53%	± 5	
			σ	1.40	1.37	-2.14%	± 5	
	1930MHz	22.0	ϵ_r	40.00	38.12	-4.70%	± 5	
			σ	1.40	1.40	0.00%	± 5	
2450MHz Head	2400MHz	22.0	ϵ_r	39.20	39.73	1.35%	± 5	07/23/2011
			σ	1.80	1.74	-3.33%	± 5	
	2450MHz	22.0	ϵ_r	39.20	39.56	0.92%	± 5	
			σ	1.80	1.80	0.00%	± 5	
	2500MHz	22.0	ϵ_r	39.20	39.45	0.64%	± 5	
			σ	1.80	1.87	3.89%	± 5	

Table 4. Measured Tissue dielectric parameters for head and body phantoms



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
835MHz Body	820MHz	22.0	ϵ_r	55.20	54.56	-1.16%	± 5	07/16/2011
			σ	0.97	0.96	-1.03%	± 5	
	835MHz	22.0	ϵ_r	55.20	54.39	-1.47%	± 5	
			σ	0.97	0.98	1.03%	± 5	
	850MHz	22.0	ϵ_r	55.20	54.31	-1.61%	± 5	
			σ	0.97	1.00	3.09%	± 5	
1750MHz Body	1700MHz	22.0	ϵ_r	53.43	52.95	-0.90%	± 5	07/17/2011
			σ	1.49	1.47	-1.34%	± 5	
	1750MHz	22.0	ϵ_r	53.43	53.00	-0.80%	± 5	
			σ	1.49	1.52	2.01%	± 5	
	1760MHz	22.0	ϵ_r	53.43	52.98	-0.84%	± 5	
			σ	1.49	1.53	2.68%	± 5	
1900MHz Body	1850MHz	22.0	ϵ_r	53.30	52.17	-2.12%	± 5	07/15/2011
			σ	1.52	1.45	-4.61%	± 5	
	1900MHz	22.0	ϵ_r	53.30	52.04	-2.36%	± 5	
			σ	1.52	1.50	-1.32%	± 5	
	1930MHz	22.0	ϵ_r	53.30	52.01	-2.42%	± 5	
			σ	1.52	1.53	0.66%	± 5	
1900MHz Body	1850MHz	22.0	ϵ_r	53.30	52.17	-2.12%	± 5	07/22/2011
			σ	1.52	1.45	-4.61%	± 5	
	1900MHz	22.0	ϵ_r	53.30	52.04	-2.36%	± 5	
			σ	1.52	1.50	-1.32%	± 5	
	1930MHz	22.0	ϵ_r	53.30	52.01	-2.42%	± 5	
			σ	1.52	1.53	0.66%	± 5	
2450MHz Body	1850MHz	22.0	ϵ_r	52.70	51.81	-1.69%	± 5	07/17/2011
			σ	1.95	1.88	-3.59%	± 5	
	1900MHz	22.0	ϵ_r	52.70	51.67	-1.95%	± 5	
			σ	1.95	1.94	-0.51%	± 5	
	1930MHz	22.0	ϵ_r	52.70	51.50	-2.28%	± 5	
			σ	1.95	2.00	2.56%	± 5	

Table 5. Measured Tissue dielectric parameters for head and body phantoms-1



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5200MHz Body	5150MHz	22.0	ϵ_r	49.01	47.89	-2.29%	± 5	07/26/2011
			σ	5.30	5.46	3.02%	± 5	
	5200MHz	22.0	ϵ_r	49.01	47.76	-2.55%	± 5	
			σ	5.30	5.52	4.15%	± 5	
	5250MHz	22.0	ϵ_r	49.01	47.63	-2.82%	± 5	
			σ	5.30	5.55	4.72%	± 5	
5500MHz Body	5450MHz	22.0	ϵ_r	48.61	47.16	-2.98%	± 5	07/27/2011
			σ	5.65	5.84	3.36%	± 5	
	5500MHz	22.0	ϵ_r	48.61	47.09	-3.13%	± 5	
			σ	5.65	5.90	4.42%	± 5	
	5550MHz	22.0	ϵ_r	48.61	46.93	-3.46%	± 5	
			σ	5.65	5.97	5.66%	± 5	
5800MHz Body	5750MHz	22.0	ϵ_r	48.20	46.54	-3.44%	± 5	07/27/2011
			σ	6.00	6.21	3.50%	± 5	
	5800MHz	22.0	ϵ_r	48.20	46.40	-3.73%	± 5	
			σ	6.00	6.27	4.50%	± 5	
	5850MHz	22.0	ϵ_r	48.20	46.36	-3.82%	± 5	
			σ	6.00	6.33	5.50%	± 5	

Table 6. Measured Tissue dielectric parameters for head and body phantoms-2

4.3.2 Liquid Depth

The liquid level was during measurement 15cm \pm 0.5cm.

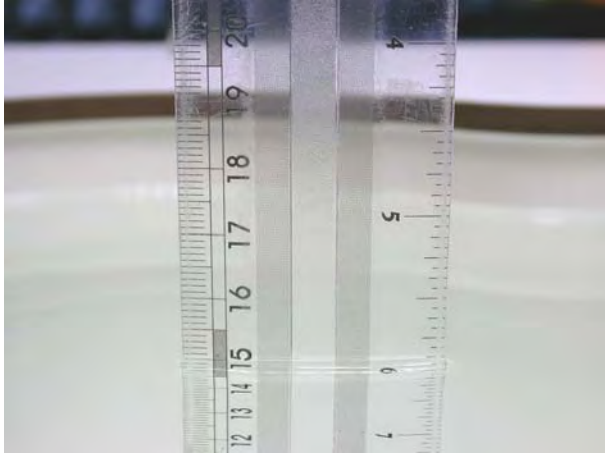


Figure 8. Head-Tissue-Simulating-Liquid



Figure 9. Body-Tissue-Simulating-Liquid

5. SAR Testing with RF Transmitters

5.1 SAR Testing with HSDPA Transmitters

HSDPA Data Devices setup for SAR Measurement.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below.³² The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.³³

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1,2)}$	CM (dB) ⁽³⁾	MRP (dB) ⁽³⁾
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note

- Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
- For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$ and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$
- CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
- For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 7. Setup for Release 5 HSDPA



HSPA Data Devices setup for SAR Measurement.

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. Body exposure conditions generally apply to these devices, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations without HSPA. The default test configuration is to establish a radio link between the DUT and a communication test set to configure a 12.2 kbps RMC (reference measurement channel) in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, EDPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest SAR configuration in WCDMA with 12.2 kbps RMC only. An FRC is configured according to HSDPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Subtest 5 requirements. SAR for other HSPA sub-test configurations is also confirmed selectively according to output power, exposure conditions and E-DCH UE Category. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. The UE Categories for HSDPCCH and HSPA should be clearly identified in the SAR report. The following procedures are applicable only if Maximum Power Reduction (MPR) is implemented according to Cubic Metric (CM) requirements.

When voice transmission and head exposure conditions are applicable to a WCDMA/HSPA data device, head exposure is measured according to the 'Head SAR Measurements' procedures in the 'WCDMA Handsets' section of this document. SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of this document. In addition, body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document.



The highest body SAR measured in Antenna Extended & Retracted configurations on a channel in 12.2 kbps RMC. The possible channels are the High, Middle & Low channel. Contact the FCC Laboratory for test and approval requirements if the maximum output power measured in E-DCH Sub-test 2 - 4 is higher than Sub-test 5.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	Bed (SF)	Bed (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 8. Setup for Release 6 HSPA / Release 7 HSPA+



5.2 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

5.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined

for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate.

The same data pattern should be used for all measurements.

5.2.2 Frequency Channel Configurations

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz §15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels. These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.



802.11 Test Channels per FCC Requirement

Mode	GHz	Channel	Turbo Channel	Default Test "Channels"				
				§15.247		UNII		
				802.11b	802.11g			
802.11 b/g	2412	1		✓	▽			
	2437	6	6	✓	▽			
	2462	11		✓	▽			
802.11a	5.18	36				✓		
	5.20	40	42 (5.21 GHz)				*	
	5.22	44					*	
	5.24	48						
	5.26	52	50 (5.25 GHz)			✓		
	5.28	56					*	
	5.30	60	58 (5.29 GHz)				*	
	5.32	64				✓		
	5.500	100	Unknown					*
	5.520	104				✓		
	5.540	108						*
	5.560	112						*
	5.580	116				✓		
	5.600	120						*
	5.620	124				✓		
	5.640	128						*
	5.660	132						*
	5.680	136				✓		
	5.700	140						*
	UNII or §15.247	5.745	149		✓		✓	
5.765		153	152 (5.76 GHz)		*		*	
5.785		157		✓			*	
5.805		161	160 (5.80 GHz)		*	✓		
§15.247	5.825	165		✓				



5.3 Conducted Power

Band	Mode	CH	Frequency (MHz)	RF Conducted Output Power (dBm)	
				Time Average	Average burst
GSM 850	---	Lowest	824.2	23.91	33.10
		Middle	836.6	24.01	33.20
		Highest	848.8	24.11	33.30
GPRS 850	4Down1Up	Lowest	824.2	24.11	33.30
		Middle	836.6	24.11	33.30
		Highest	848.8	24.21	33.40
	3Down2Up	Lowest	824.2	26.57	32.80
		Middle	836.6	26.07	32.30
		Highest	848.8	26.17	32.40
EGPRS 850	4Down1Up	Lowest	824.2	17.71	26.90
		Middle	836.6	17.71	26.90
		Highest	848.8	17.71	26.90
	3Down2Up	Lowest	824.2	18.97	25.20
		Middle	836.6	18.87	25.10
		Highest	848.8	18.87	25.10

Band	Mode	CH	Frequency (MHz)	RF Conducted Output Power (dBm)	
				Time Average	Average burst
GSM 1900	---	Lowest	1850.2	20.91	30.10
		Middle	1880.0	21.01	30.20
		Highest	1909.8	21.06	30.25
GPRS 1900	4Down1Up	Lowest	1850.2	20.61	29.80
		Middle	1880.0	20.51	29.70
		Highest	1909.8	20.51	29.70
	3Down2Up	Lowest	1850.2	22.87	29.10
		Middle	1880.0	22.77	29.00
		Highest	1909.8	22.57	28.80
EGPRS 1900	4Down1Up	Lowest	1850.2	16.11	25.30
		Middle	1880.0	16.21	25.40
		Highest	1909.8	16.11	25.30
	3Down2Up	Lowest	1850.2	17.97	24.20
		Middle	1880.0	17.87	24.10
		Highest	1909.8	17.87	24.10



Band	Sub-test	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
WCDMA Band II	---	Lowest	1852.4	22.55
		Middle	1880.0	22.49
		Highest	1907.6	22.70
HSDPA Band II	1	Lowest	1852.4	21.51
		Middle	1880.0	21.45
		Highest	1907.6	21.61
	2	Lowest	1852.4	21.44
		Middle	1880.0	21.41
		Highest	1907.6	21.49
	3	Lowest	1852.4	20.19
		Middle	1880.0	20.03
		Highest	1907.6	20.40
	4	Lowest	1852.4	20.30
		Middle	1880.0	19.78
		Highest	1907.6	20.01
HSUPA Band II	1	Lowest	1852.4	20.49
		Middle	1880.0	19.66
		Highest	1907.6	19.97
	2	Lowest	1852.4	17.62
		Middle	1880.0	17.73
		Highest	1907.6	17.64
	3	Lowest	1852.4	20.02
		Middle	1880.0	20.64
		Highest	1907.6	20.48
	4	Lowest	1852.4	20.22
		Middle	1880.0	19.84
		Highest	1907.6	19.83
	5	Lowest	1852.4	19.80
		Middle	1880.0	19.78
		Highest	1907.6	19.75
HSPA+ (QPSK) Band II	1	Lowest	1852.4	20.32
		Middle	1880.0	19.55
		Highest	1907.6	19.82
	2	Lowest	1852.4	17.51
		Middle	1880.0	17.69
		Highest	1907.6	17.60
	3	Lowest	1852.4	20.00
		Middle	1880.0	20.55
		Highest	1907.6	20.38
	4	Lowest	1852.4	20.19
		Middle	1880.0	19.72
		Highest	1907.6	19.69
	5	Lowest	1852.4	19.72
		Middle	1880.0	19.70
		Highest	1907.6	19.60



Band	Sub-test	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
WCDMA Band IV	---	Lowest	1712.4	22.76
		Middle	1740.0	23.13
		Highest	1752.6	23.00
HSDPA Band IV	1	Lowest	1712.4	22.75
		Middle	1740.0	23.12
		Highest	1752.6	23.00
	2	Lowest	1712.4	22.68
		Middle	1740.0	22.83
		Highest	1752.6	22.84
	3	Lowest	1712.4	20.30
		Middle	1740.0	20.47
		Highest	1752.6	20.36
	4	Lowest	1712.4	20.24
		Middle	1740.0	20.19
		Highest	1752.6	20.20
HSUPA Band IV	1	Lowest	1712.4	21.56
		Middle	1740.0	22.03
		Highest	1752.6	21.54
	2	Lowest	1712.4	18.50
		Middle	1740.0	18.40
		Highest	1752.6	18.70
	3	Lowest	1712.4	20.60
		Middle	1740.0	21.30
		Highest	1752.6	20.50
	4	Lowest	1712.4	20.60
		Middle	1740.0	21.20
		Highest	1752.6	20.50
	5	Lowest	1712.4	20.30
		Middle	1740.0	21.02
		Highest	1752.6	21.52
HSPA+ (QPSK) Band IV	1	Lowest	1712.4	21.44
		Middle	1740.0	21.95
		Highest	1752.6	21.42
	2	Lowest	1712.4	18.38
		Middle	1740.0	18.22
		Highest	1752.6	18.66
	3	Lowest	1712.4	19.51
		Middle	1740.0	21.21
		Highest	1752.6	20.42
	4	Lowest	1712.4	20.45
		Middle	1740.0	21.05
		Highest	1752.6	20.36
	5	Lowest	1712.4	20.19
		Middle	1740.0	19.92
		Highest	1752.6	21.41



Band	Sub-test	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
WCDMA Band V	---	Lowest	826.4	23.19
		Middle	836.6	22.84
		Highest	846.4	22.89
HSDPA Band V	1	Lowest	826.4	23.17
		Middle	836.6	22.81
		Highest	846.4	22.86
	2	Lowest	826.4	23.01
		Middle	836.6	22.64
		Highest	846.4	22.79
	3	Lowest	826.4	20.51
		Middle	836.6	20.58
		Highest	846.4	20.52
	4	Lowest	826.4	20.35
		Middle	836.6	20.22
		Highest	846.4	20.21
HSUPA Band V	1	Lowest	826.4	22.50
		Middle	836.6	21.96
		Highest	846.4	21.65
	2	Lowest	826.4	18.90
		Middle	836.6	18.40
		Highest	846.4	18.80
	3	Lowest	826.4	20.40
		Middle	836.6	20.30
		Highest	846.4	20.40
	4	Lowest	826.4	20.70
		Middle	836.6	20.60
		Highest	846.4	20.30
	5	Lowest	826.4	21.50
		Middle	836.6	20.40
		Highest	846.4	20.50
HSPA+ (QPSK) Band V	1	Lowest	826.4	22.40
		Middle	836.6	21.85
		Highest	846.4	21.54
	2	Lowest	826.4	18.82
		Middle	836.6	18.33
		Highest	846.4	18.70
	3	Lowest	826.4	20.31
		Middle	836.6	20.18
		Highest	846.4	20.28
	4	Lowest	826.4	20.61
		Middle	836.6	20.55
		Highest	846.4	20.30
	5	Lowest	826.4	21.42
		Middle	836.6	20.29
		Highest	846.4	20.41



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
IEEE 802.11b	1 M	1	2412.0	19.54
		6	2437.0	19.67
		11	2462.0	19.77
	2 M	1	2412.0	19.52
		6	2437.0	19.63
		11	2462.0	19.67
	5.5 M	1	2412.0	19.53
		6	2437.0	19.66
		11	2462.0	19.70
	11 M	1	2412.0	19.44
		6	2437.0	19.60
		11	2462.0	19.65
IEEE 802.11g	6 M	1	2412.0	14.45
		6	2437.0	14.63
		11	2462.0	14.52
	9 M	1	2412.0	14.51
		6	2437.0	14.52
		11	2462.0	14.54
	12 M	1	2412.0	14.44
		6	2437.0	14.54
		11	2462.0	14.53
	18 M	1	2412.0	14.39
		6	2437.0	14.43
		11	2462.0	14.46
	24 M	1	2412.0	14.30
		6	2437.0	14.36
		11	2462.0	14.40
	36 M	1	2412.0	14.18
		6	2437.0	14.24
		11	2462.0	14.27
	48 M	1	2412.0	14.11
		6	2437.0	14.13
		11	2462.0	14.14
	54 M	1	2412.0	14.04
		6	2437.0	14.05
		11	2462.0	14.13



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
Draft 802.11n_HT20 (2.4 GHz)	7.20 M	1	2412.0	13.24
		6	2437.0	13.32
		11	2462.0	13.35
	14.40 M	1	2412.0	13.23
		6	2437.0	13.39
		11	2462.0	13.33
	21.70 M	1	2412.0	13.19
		6	2437.0	13.24
		11	2462.0	13.24
	28.90 M	1	2412.0	13.13
		6	2437.0	13.23
		11	2462.0	13.20
	43.30 M	1	2412.0	13.01
		6	2437.0	13.06
		11	2462.0	13.07
	57.80 M	1	2412.0	12.83
		6	2437.0	12.90
		11	2462.0	12.88
	65.00 M	1	2412.0	12.78
		6	2437.0	12.86
		11	2462.0	12.85
	72.20 M	1	2412.0	12.83
		6	2437.0	12.93
		11	2462.0	12.93



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
IEEE 802.11a	6 M	36	5180.0	14.30
		40	5200.0	14.31
		44	5220.0	14.44
		48	5240.0	14.58
		52	5260.0	14.55
		56	5280.0	14.51
		60	5300.0	14.42
		64	5320.0	14.26
		100	5500.0	14.20
		104	5520.0	14.41
		108	5540.0	14.49
		112	5560.0	14.53
		116	5580.0	14.69
		120	5600.0	14.71
		124	5620.0	14.79
		128	5640.0	14.78
		132	5660.0	14.74
		136	5680.0	14.83
		140	5700.0	14.94
		149	5745.0	14.52
153	5765.0	14.59		
157	5785.0	14.47		
161	5805.0	14.61		
165	5825.0	14.00		



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
IEEE 802.11a	54 M	36	5180.0	13.72
		40	5200.0	13.81
		44	5220.0	13.90
		48	5240.0	14.01
		52	5260.0	13.92
		56	5280.0	14.17
		60	5300.0	13.94
		64	5320.0	13.82
		100	5500.0	13.76
		104	5520.0	13.88
		108	5540.0	13.90
		112	5560.0	13.82
		116	5580.0	14.17
		120	5600.0	14.28
		124	5620.0	14.30
		128	5640.0	14.27
		132	5660.0	14.26
		136	5680.0	14.35
		140	5700.0	13.94
		149	5745.0	13.93
153	5765.0	13.97		
157	5785.0	14.08		
161	5805.0	13.99		
165	5825.0	14.33		



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
Draft 802.11n_HT20 (5 GHz)	7.2 M	36	5180.0	14.11
		40	5200.0	14.16
		44	5220.0	14.29
		48	5240.0	14.43
		52	5260.0	14.36
		56	5280.0	14.57
		60	5300.0	14.32
		64	5320.0	14.14
		100	5500.0	14.15
		104	5520.0	14.23
		108	5540.0	14.36
		112	5560.0	14.40
		116	5580.0	14.61
		120	5600.0	14.74
		124	5620.0	14.70
		128	5640.0	14.68
		132	5660.0	14.66
		136	5680.0	14.67
		140	5700.0	14.52
		149	5745.0	14.44
153	5765.0	14.46		
157	5785.0	14.57		
161	5805.0	14.58		
165	5825.0	12.83		



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
IEEE 802.11a	72.2 M	36	5180.0	12.96
		40	5200.0	12.63
		44	5220.0	12.75
		48	5240.0	12.83
		52	5260.0	12.76
		56	5280.0	12.96
		60	5300.0	12.74
		64	5320.0	12.61
		100	5500.0	12.63
		104	5520.0	12.49
		108	5540.0	12.77
		112	5560.0	12.86
		116	5580.0	12.94
		120	5600.0	12.99
		124	5620.0	13.01
		128	5640.0	13.00
		132	5660.0	13.20
		136	5680.0	12.97
		140	5700.0	12.81
		149	5745.0	12.84
153	5765.0	12.91		
157	5785.0	12.88		
161	5805.0	13.25		
165	5825.0	14.36		



5.4 Simultaneous Transmitting Evaluate

RF Conducted Power		
Band	dBm	W
GSM/GPRS/EGPRS 850	33.40	2.188
GSM/GPRS/EGPRS 1900	30.25	1.059
WCDMA/HSDPA/HSUPA/HSPA+ (QPSK) Band II	22.70	0.186
WCDMA/HSDPA/HSUPA/HSPA+ (QPSK) Band IV	23.13	0.206
WCDMA/HSDPA/HSUPA/HSPA+ (QPSK) Band V	23.19	0.208
Wi-Fi 802.11a	14.94	0.031
Wi-Fi 802.11b	19.77	0.095
Wi-Fi 802.11g	14.63	0.029
Wi-Fi 802.11n_2.4GHz	13.39	0.022
Wi-Fi 802.11n_5GHz	14.74	0.030
BT 2.0	-1.33	0.00074

Antenna Distance	
Antenna Account	Distance (cm)
BT to WLAN	0
BT to GSM(License)	8.5
WLAN to GSM(License)	8.5

BT and GSM/WCDMA and WLAN simultaneously SAR Description

- (1) Antenna Distance
 - 1a. BT & GSM 8.5 cm
 - 1b. BT & WLAN 0cm
- (2) GSM/BT – with antenna separation distance greater than 5cm – BT power is less than 2Pref ,
Than both stand alone for BT and simultaneous SAR of GSM/BT is not required.
- (3) WLAN/BT – with antenna separation is less than 2.5cm-WLAN SAR is less than 1.2W/kg , then
simultaneous SAR is not required.
- (4) Cellular/PCS Stand-alone SAR is required due to routine evaluation requirements.
- (5) Highest Simultaneous SAR Evaluation:

Body SAR: $\sum \text{SAR} = \text{WCDMA Band II} + \text{WLAN} = 1.09 + 0.025 = 1.115 \text{mW/g}$

Head SAR: $\sum \text{SAR} = \text{WCDMA Band V} + \text{WLAN} = 0.464 + 0.008 = 0.472 \text{mW/g}$

Therefore, the Simultaneous SAR is not required.
- (6) For WiFi hot spot mode, since the GSM network will not support the DTM mode, therefore the
GPRS/EGPRS SAR of head is not required.

Note: 1. Simultaneous Transmission Summation of SAR, please find the table-9 as below.

1-1 For Edge Top mode, that WWAN antenna to edge top >2.5cm, therefore the WWAN Stand-alone SAR is not required(hot -spot mode).

1-2 For (Edge Bottom mode & Edge Left mode), that WLAN antenna to edge Bottom & Edge Left mode >2.5cm, therefore the WLAN Stand-alone SAR is not required(hot -spot mode).



Table 9.

Right-Cheek mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.407	0.008	0.415	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.083	0.008	0.091	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.263	0.008	0.271	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.219	0.008	0.227	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.464	0.008	0.472	<1.6

Right-Tilted mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.340	0.011	0.351	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.043	0.011	0.054	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.101	0.011	0.112	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.129	0.011	0.140	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.352	0.011	0.363	<1.6



Left-Cheek mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.388	0.009	0.397	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.101	0.009	0.110	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.416	0.009	0.425	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.288	0.009	0.297	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.433	0.009	0.442	<1.6

Left-Tilted mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.316	0.001	0.317	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.040	0.001	0.041	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.104	0.001	0.105	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.161	0.001	0.162	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.331	0.001	0.332	<1.6



Back surface mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	1.080	0.025	1.105	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.822	0.025	0.847	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	1.090	0.025	1.115	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.590	0.025	0.615	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.362	0.025	0.387	<1.6

Front surface mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	1.080	0.000	1.080	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.758	0.000	0.758	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.918	0.000	0.918	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.500	0.000	0.500	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.387	0.000	0.387	<1.6



Edge Right mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.850	0.002	0.852	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.085	0.002	0.087	<1.6
Simult Tx	Configuration	WCDMA Band II SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.130	0.002	0.132	<1.6
Simult Tx	Configuration	WCDMA Band IV SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.082	0.002	0.084	<1.6
Simult Tx	Configuration	WCDMA Band V SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.352	0.002	0.354	<1.6

6. System Performance Check

6.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	835, 1750, 1900, 2450 MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D835V2: dipole length 161 mm; overall height 340 mm D1750V2: dipole length 75.2 mm; overall height 301.5 mm D1900V2: dipole length 67.7 mm; overall height 300 mm D2450V2 : dipole length 51.5 mm; overall height 300 mm D5GHzV2: dipole length 20.6 mm; overall height 300 mm

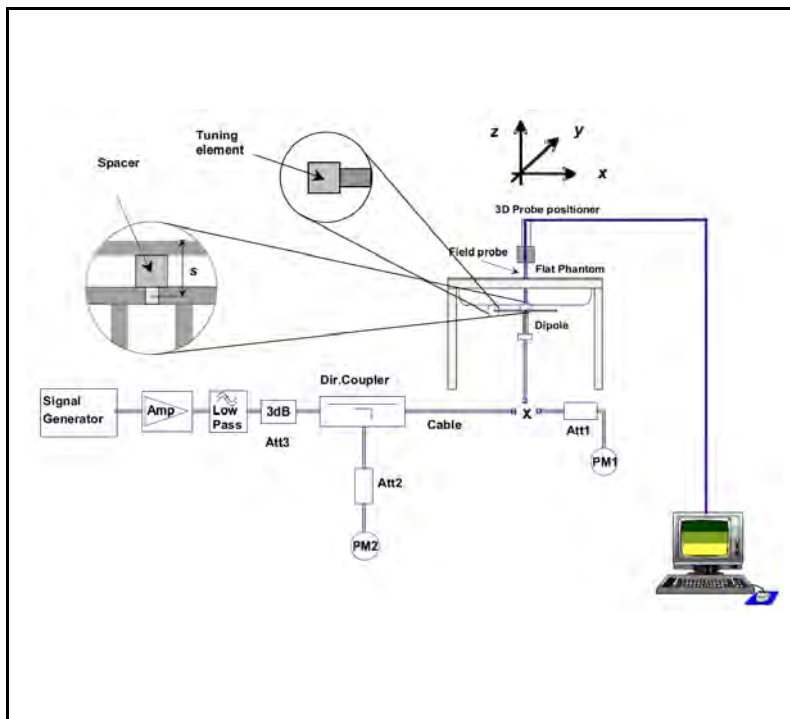


Figure 10. System Verification Setup Diagram



Figure 11. Validation Kit



6.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The validation was performed at 835, 1750, 1900, 2450, 5200, 5500 and 5800MHz.


Validation kit		Mixture Type	SAR _{1g} [mW/g]		SAR _{10g} [mW/g]		Date of Calibration
D835V2-SN4d092		Head	9.52		6.22		06/22/2011
D1750V2-SN1023		Head	35.9		19		06/16/2011
D1900V2-SN5d018		Head	39.8		20.8		06/16/2011
D2450V2-SN712		Head	52.9		24.5		02/23/2011
Frequency (MHz)	Power (dBm)	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
					1g	10g	
835 (Head)	250mW	2.45	1.59	0.024	2.9 %	2.3 %	07/11/2011
	Normalize to 1 Watt	9.8	6.36				
1750 (Head)	250mW	9.18	4.8	0.035	2.3 %	1.1 %	07/23/2011
	Normalize to 1 Watt	36.72	19.2				
1900 (Head)	250mW	10.3	5.4	0.003	3.5 %	3.8 %	07/12/2011
	Normalize to 1 Watt	41.2	21.6				
2450 (Head)	250mW	13.5	6.23	0.042	2.1 %	1.7 %	07/23/2011
	Normalize to 1 Watt	54	24.92				




Validation kit		Mixture Type	SAR _{1g} [mW/g]		SAR _{10g} [mW/g]		Date of Calibration
D835V2-SN4d092		Body	9.65		6.38		06/22/2011
D1750V2-SN1023		Body	36.7		19.4		06/16/2011
D1900V2-SN5d018		Body	40.5		21.1		06/16/2011
D2450V2-SN712		Body	50.4		23.3		02/23/2011
D5GHZV2-SN1021_5200MHz		Body	78.5		21.8		02/16/2011
D5GHZV2-SN1021_5500MHz		Body	84.3		23.3		02/16/2011
D5GHZV2-SN1021_5800MHz		Body	73.3		20.1		02/16/2011
835 (Body)	250mW	2.51	1.63	0.017	4.0 %	2.2 %	07/16/2011
	Normalize to 1 Watt	10.04	6.52				
1750 (Body)	250mW	9.41	4.97	0.024	2.6 %	2.5 %	07/17/2011
	Normalize to 1 Watt	37.64	19.88				
1900 (Body)	250mW	10.4	5.4	0.088	2.7 %	2.4 %	07/15/2011
	Normalize to 1 Watt	41.6	21.6				
1900 (Body)	250mW	10.6	5.49	0.042	4.7 %	4.1 %	07/22/2011
	Normalize to 1 Watt	42.4	21.96				
2450 (Body)	250mW	12.2	5.76	-0.114	-3.2 %	-1.1 %	07/17/2011
	Normalize to 1 Watt	48.8	23.04				
5200 (Body)	250mW	7.85	2.23	0.133	0.0 %	2.3 %	07/26/2011
	Normalize to 1 Watt	78.5	22.3				
5500 (Body)	250mW	8.45	2.35	0.135	0.2 %	0.9 %	07/27/2011
	Normalize to 1 Watt	84.5	23.5				
5800 (Body)	250mW	7.04	1.97	0.120	-4.0 %	-2.0 %	07/27/2011
	Normalize to 1 Watt	70.4	19.7				



Z-axis Plot of System Performance Check

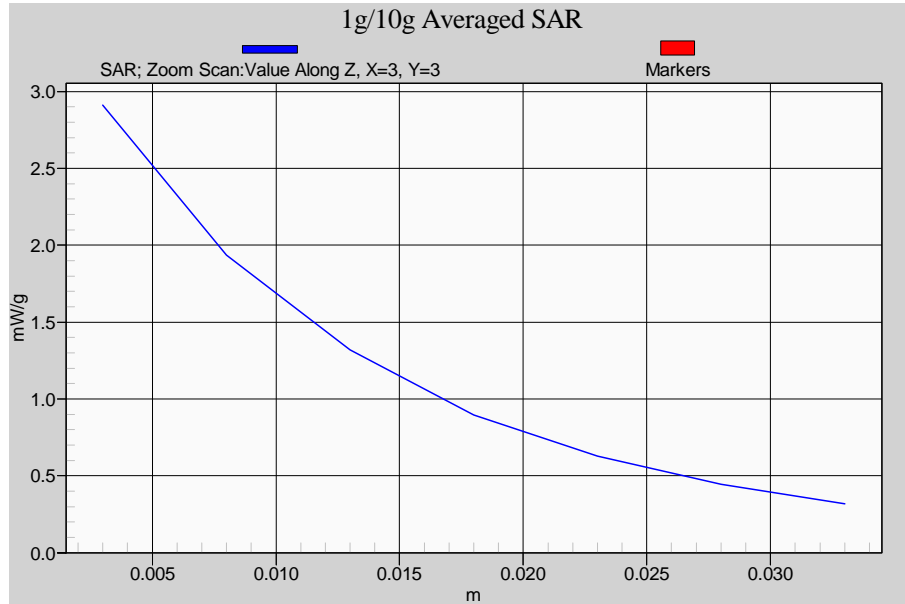


Head-Tissue-Simulating-Liquid 835MHz

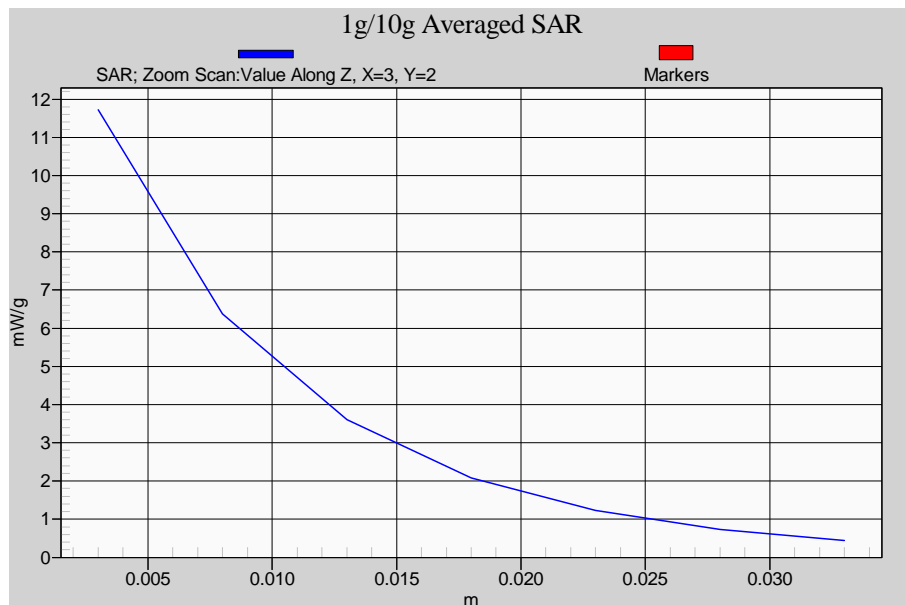


Head-Tissue-Simulating-Liquid 1750MHz

Z-axis Plot of System Performance Check

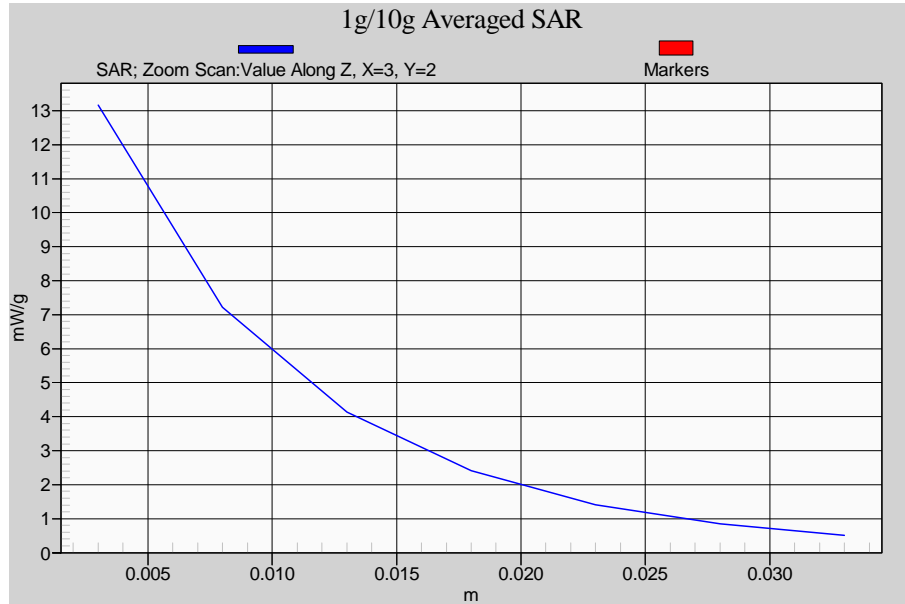


Head-Tissue-Simulating-Liquid 1900MHz

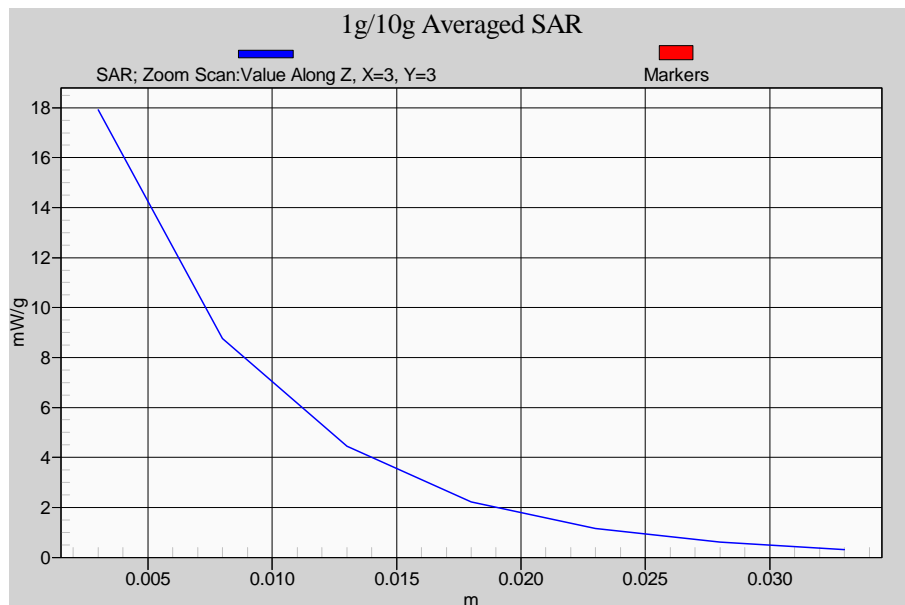


Head-Tissue-Simulating-Liquid 2450MHz

Z-axis Plot of System Performance Check

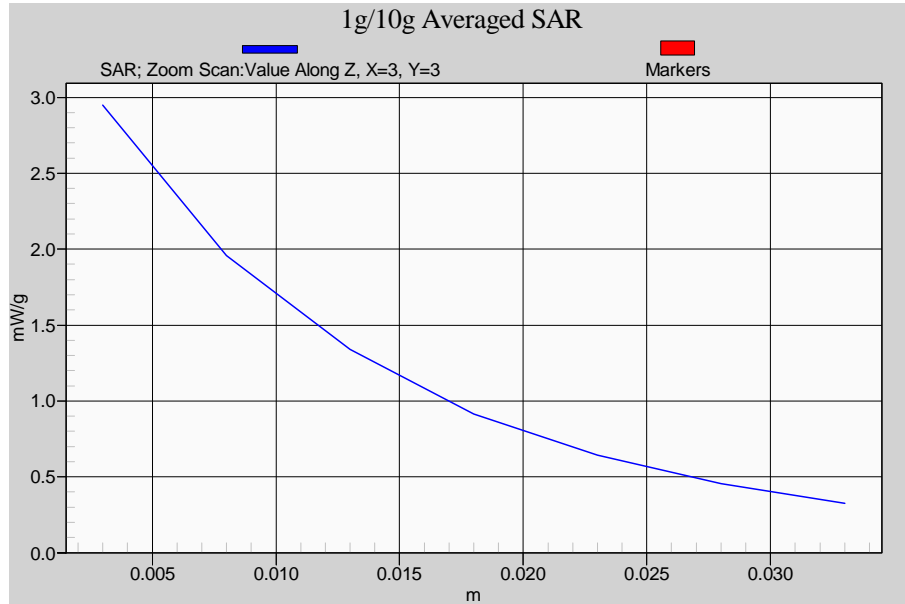


Body-Tissue-Simulating-Liquid 835MHz

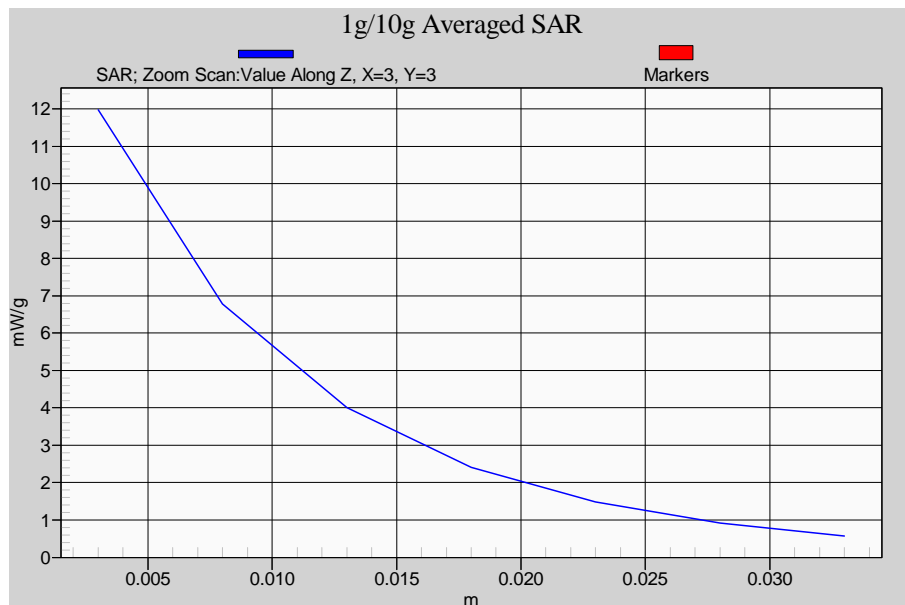


Body-Tissue-Simulating-Liquid 1750MHz

Z-axis Plot of System Performance Check

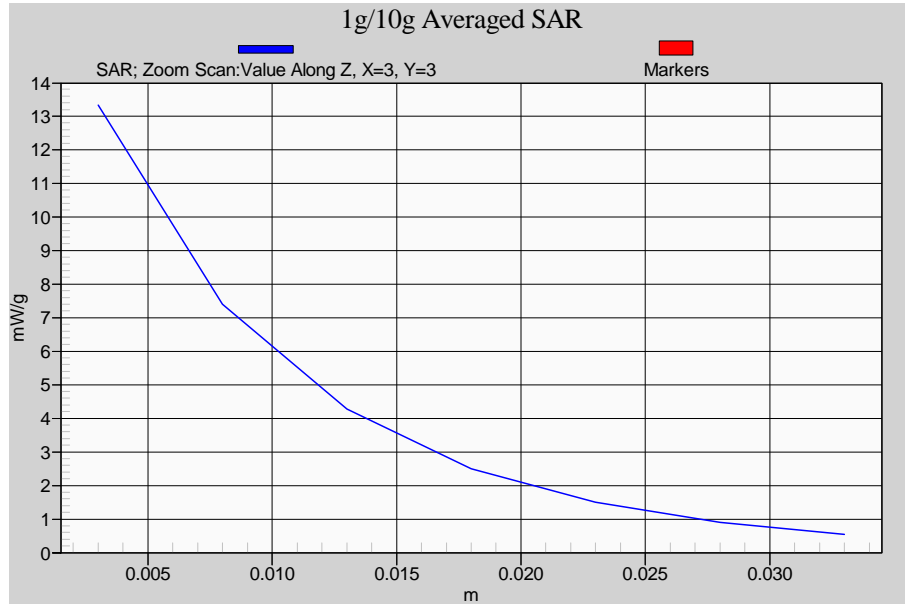


Body-Tissue-Simulating-Liquid 1900MHz (07/15/2011)

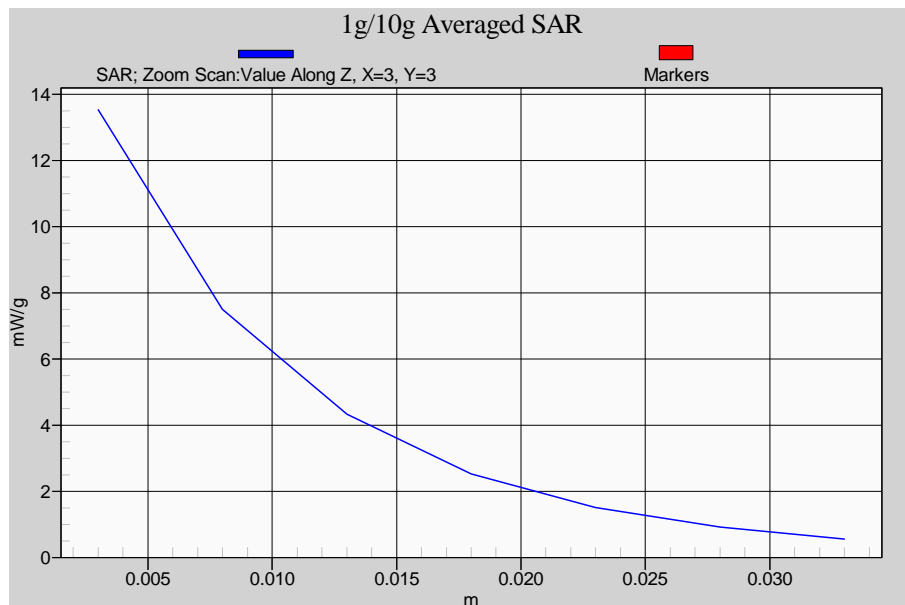


Body-Tissue-Simulating-Liquid 1900MHz (07/22/2011)



Z-axis Plot of System Performance Check

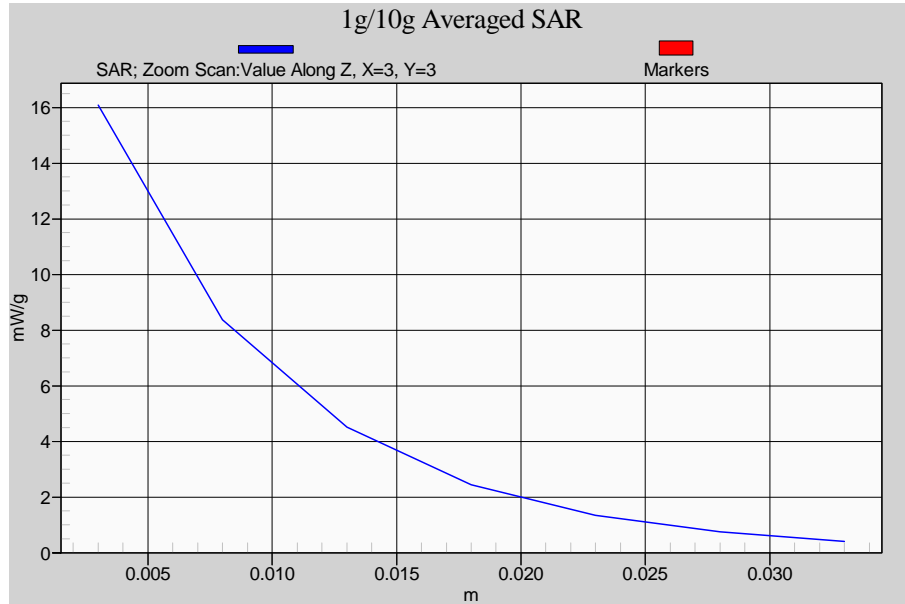


Body-Tissue-Simulating-Liquid 2450MHz

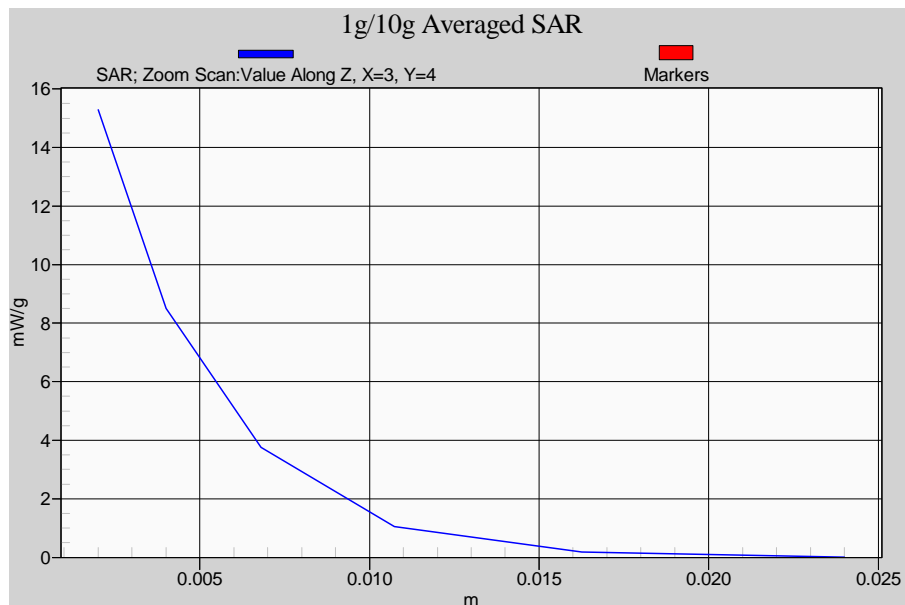


Body-Tissue-Simulating-Liquid 5200MHz

Z-axis Plot of System Performance Check

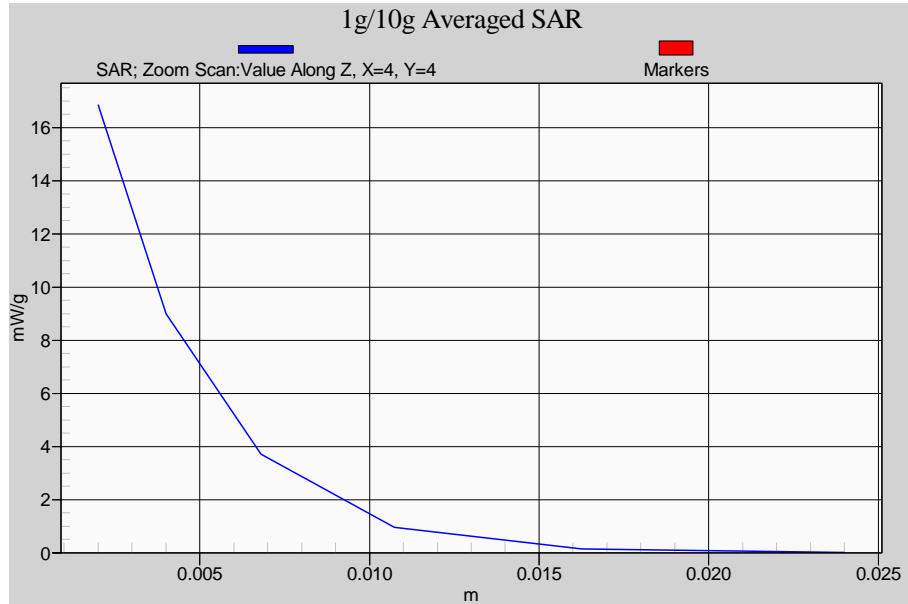

Body-Tissue-Simulating-Liquid 5500MHz

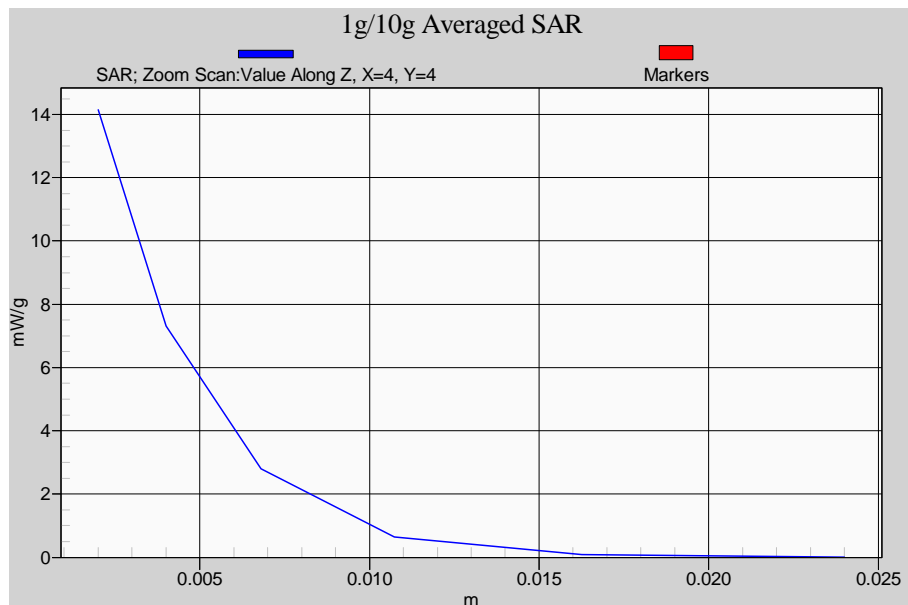

Body-Tissue-Simulating-Liquid 5800MHz



7. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	EX3DV4	3632	01/19/2011	01/19/2012
SPEAG	Dosimetric E-Field Probe	EX3DV3	3519	02/25/2011	02/25/2012
SPEAG	835MHz System Validation Kit	D835V2	4d092	06/22/2011	06/22/2012
SPEAG	1750MHz System Validation Kit	D1750V2	1023	06/16/2011	06/16/2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d018	06/16/2011	06/16/2012
SPEAG	2450MHz System Validation Kit	D2450V2	712	02/23/2011	02/23/2012
SPEAG	5GHz System Validation Kit	D5GHZV2	1021	02/16/2011	02/16/2012
SPEAG	Data Acquisition Electronics	DAE4	779	01/31/2011	01/31/2012
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Phantom	SAM V4.0	TP-1150	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY5 V5.0 Build 125	N/A	NCR	
SPEAG	Software	SEMCAD V13.4 Build 125	N/A	NCR	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	07/07/2011	07/07/2012
R&S	Power Sensor	NRP-Z22	100179	05/27/2011	05/27/2012
Agilent	MXG Vector Signal Generator	N5182A	MY47420962	05/16/2011	05/16/2012
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	

Table 10. Test Equipment List



8. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 20.10\%$ [8] .

According to Std. C95.3 [9] , the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10] , typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.



Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	v_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	±5.5%	Normal	1	1	1	±5.5%	±5.5%	∞
u2	Probe Isotropy	±7.6%	Rectangular	$\sqrt{3}$	0.7	0.7	±3.1%	±3.1%	∞
u3	Boundary Effect	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
u4	Linearity	±4.7%	Rectangular	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
u5	System Detection Limit	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u6	Readout Electronics	±0.3%	Normal	1	1	1	±0.3%	±0.3%	∞
u7	Response Time	±0.8%	Rectangular	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
u8	Integration Time	±2.6%	Rectangular	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
u9	RF Ambient Conditions	±0%	Rectangular	$\sqrt{3}$	1	1	±0%	±0%	∞
u10	RF Ambient Reflections	±0%	Rectangular	$\sqrt{3}$	1	1	±0%	±0%	∞
u11	Probe Positioner Mechanical Tolerance	±0.4%	Rectangular	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
u12	Probe Positioning with respect to Phantom Shell	±2.9%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u13	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test sample Related									
u14	Test sample Positioning	±3.6%	Normal	1	1	1	±3.6%	±3.6%	89
u15	Device Holder Uncertainty	±3.5%	Normal	1	1	1	±3.5%	±3.5%	5
u16	Output Power Variation - SAR drift measurement	±5.0%	Rectangular	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Tissue Parameters									
u17	Phantom Uncertainty (shape and thickness tolerances)	±4.0%	Rectangular	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
u18	Liquid Conductivity - deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
u19	Liquid Conductivity - measurement uncertainty	±1.93%	Normal	1	0.64	0.43	±1.24%	±0.83%	69
u20	Liquid Permittivity - deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
u21	Liquid Permittivity - measurement uncertainty	±1.4%	Normal	1	0.6	0.49	±0.84%	±1.69%	69
Combined standard uncertainty			RSS				±10.05%	±9.98%	313
Expanded uncertainty (95% CONFIDENCE LEVEL)			$k=2$				±20.10%	±19.96%	

Table 11. Uncertainty Budget of DASY



9. Measurement Procedure

The measurement procedures are as follows:

1. For WLAN function, engineering testing software installed on Notebook can provide continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASYS software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASYS software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1g and 10g



9.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 7x7x9 points with step size 5, 5 and 3 mm for 300 MHz to 3 GHz, and 7x7x9 points with step size 5, 5 and 3 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

9.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.4 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



10. SAR Test Results Summary

10.1 Head SAR

Measurement Results								
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz						
GSM 850	251	848.8	33.30	Right-cheek	0	0.407	0.071	---
	251	848.8	33.30	Right-Tilted	0	0.340	0.000	---
	251	848.8	33.30	Left-cheek	0	0.388	-0.131	---
	251	848.8	33.30	Left-Tilted	0	0.316	0.023	---
GSM 1900	810	1909.8	30.25	Right-cheek	0	0.083	0.153	---
	810	1909.8	30.25	Right-Tilted	0	0.043	0.075	---
	810	1909.8	30.25	Left-cheek	0	0.101	-0.151	---
	810	1909.8	30.25	Left-Tilted	0	0.040	0.063	---
WCDMA Band II	9538	1907.6	22.70	Right-cheek	0	0.263	-0.174	---
	9538	1907.6	22.70	Right-Tilted	0	0.101	0.081	---
	9538	1907.6	22.70	Left-cheek	0	0.416	0.142	---
	9538	1907.6	22.70	Left-Tilted	0	0.104	0.071	---
WCDMA Band IV	1413	1740.0	23.13	Right-cheek	0	0.219	-0.005	---
	1413	1740.0	23.13	Right-Tilted	0	0.129	0.058	---
	1413	1740.0	23.13	Left-cheek	0	0.288	0.139	---
	1413	1740.0	23.13	Left-Tilted	0	0.161	0.036	---
WCDMA Band V	4132	826.4	23.19	Right-cheek	0	0.464	0.088	---
	4132	826.4	23.19	Right-Tilted	0	0.352	0.029	---
	4132	826.4	23.19	Left-cheek	0	0.433	-0.046	---
	4132	826.4	23.19	Left-Tilted	0	0.331	-0.029	---
IEEE 802.11b Rate 1M	11	2462.0	19.77	Right-cheek	0	0.008	-0.090	---
	11	2462.0	19.77	Right-Tilted	0	0.011	0.121	---
	11	2462.0	19.77	Left-cheek	0	0.009	0.197	---
	11	2462.0	19.77	Left-Tilted	0	0.001	-0.059	---
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram			

- Notes:
- 802.11g & 802.11n power are not more than 802.11b 0.25dB, therefore 802.11g Stand-alone SAR is not required.
 - If the Channel's SAR 1g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.



10.2 Body SAR

Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
GSM 850	251	848.8	33.30	Flat	15	Headset	0.234	-0.029	Front Surface to Phantom
	251	848.8	33.30	Flat	15	Headset	0.229	-0.016	Back Surface to Phantom
GSM 1900	810	1909.8	30.25	Flat	15	Headset	0.209	-0.055	Front Surface to Phantom
	810	1909.8	30.25	Flat	15	Headset	0.238	0.023	Back Surface to Phantom
WCDMA Band II	9538	1907.6	22.70	Flat	15	Headset	0.551	0.043	Front Surface to Phantom
	9538	1907.6	22.70	Flat	15	Headset	0.678	-0.063	Back Surface to Phantom
WCDMA Band IV	1413	1740.0	23.13	Flat	15	Headset	0.304	0.192	Front Surface to Phantom
	1413	1740.0	23.13	Flat	15	Headset	0.336	0.177	Back Surface to Phantom
WCDMA Band V	4132	826.4	23.19	Flat	15	Headset	0.255	0.107	Front Surface to Phantom
	4132	826.4	23.19	Flat	15	Headset	0.253	-0.014	Back Surface to Phantom
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
IEEE 802.11a Rate 6M	36	5180.0	14.30	Flat	15	Headset	0.013	0.195	Front Surface to Phantom
	36	5180.0	14.30	Flat	15	Headset	0.047	-0.192	Back Surface to Phantom
	48	5240.0	14.58	Flat	15	Headset	0.012	-0.104	Front Surface to Phantom
	48	5240.0	14.58	Flat	15	Headset	0.046	-0.031	Back Surface to Phantom
	52	5260.0	14.55	Flat	15	Headset	0.014	0.108	Front Surface to Phantom
	52	5260.0	14.55	Flat	15	Headset	0.054	0.031	Back Surface to Phantom
	64	5320.0	14.26	Flat	15	Headset	0.013	0.168	Front Surface to Phantom
	64	5320.0	14.26	Flat	15	Headset	0.056	0.169	Back Surface to Phantom
	104	5520.0	14.41	Flat	15	Headset	0.012	0.076	Front Surface to Phantom
	104	5520.0	14.41	Flat	15	Headset	0.043	-0.188	Back Surface to Phantom
	116	5580.0	14.69	Flat	15	Headset	0.011	0.132	Front Surface to Phantom
	116	5580.0	14.69	Flat	15	Headset	0.038	0.110	Back Surface to Phantom
	124	5620.0	14.79	Flat	15	Headset	0.009	-0.190	Front Surface to Phantom
	124	5620.0	14.79	Flat	15	Headset	0.040	0.042	Back Surface to Phantom
	136	5680.0	14.83	Flat	15	Headset	0.011	-0.177	Front Surface to Phantom
	136	5680.0	14.83	Flat	15	Headset	0.042	0.090	Back Surface to Phantom
	140	5700.0	14.94	Flat	15	Headset	0.011	0.199	Front Surface to Phantom
	140	5700.0	14.94	Flat	15	Headset	0.036	0.032	Back Surface to Phantom
	149	5745.0	14.52	Flat	15	Headset	0.010	-0.116	Front Surface to Phantom
	149	5745.0	14.52	Flat	15	Headset	0.035	0.099	Back Surface to Phantom
	157	5785.0	14.47	Flat	15	Headset	0.009	-0.099	Front Surface to Phantom
	157	5785.0	14.47	Flat	15	Headset	0.037	0.146	Back Surface to Phantom
	161	5805.0	14.61	Flat	15	Headset	0.011	0.064	Front Surface to Phantom
	161	5805.0	14.61	Flat	15	Headset	0.047	0.147	Back Surface to Phantom
165	5825.0	14.00	Flat	15	Headset	0.016	-0.173	Front Surface to Phantom	
165	5825.0	14.00	Flat	15	Headset	0.059	0.167	Back Surface to Phantom	
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
GPRS 850 3Down2Up	128	824.2	32.80	Flat	10	N/A	1.080	-0.002	Front Surface to Phantom
	128	824.2	32.80	Flat	10	N/A	1.080	-0.010	Back Surface to Phantom
	128	824.2	32.80	Flat	10	N/A	0.861	-0.009	Edge left to Phantom
	128	824.2	32.80	Flat	10	N/A	0.850	0.038	Edge Right to Phantom
	128	824.2	32.80	Flat	10	N/A	0.172	0.027	Edge bottom to Phantom
	190	836.6	32.30	Flat	10	N/A	0.871	-0.031	Front Surface to Phantom
	190	836.6	32.30	Flat	10	N/A	0.843	-0.002	Back Surface to Phantom
	190	836.6	32.30	Flat	10	N/A	0.680	-0.119	Edge left to Phantom
	190	836.6	32.30	Flat	10	N/A	0.671	-0.012	Edge Right to Phantom
	251	848.8	32.40	Flat	10	N/A	0.714	-0.067	Front Surface to Phantom
	251	848.8	32.40	Flat	10	N/A	0.678	-0.045	Back Surface to Phantom
	251	848.8	32.40	Flat	10	N/A	0.563	0.010	Edge left to Phantom
	251	848.8	32.40	Flat	10	N/A	0.603	-0.027	Edge Right to Phantom
	GPRS 1900 3Down2Up	512	1850.2	29.10	Flat	10	N/A	0.758	-0.061
512		1850.2	29.10	Flat	10	N/A	0.822	-0.017	Back Surface to Phantom
512		1850.2	29.10	Flat	10	N/A	0.074	0.070	Edge left to Phantom
512		1850.2	29.10	Flat	10	N/A	0.085	-0.028	Edge Right to Phantom
512		1850.2	29.10	Flat	10	N/A	1.320	0.069	Edge bottom to Phantom
661		1880.0	29.00	Flat	10	N/A	0.716	-0.039	Back Surface to Phantom
661		1880.0	29.00	Flat	10	N/A	1.090	0.060	Edge bottom to Phantom
810		1909.8	28.80	Flat	10	N/A	0.688	-0.008	Back Surface to Phantom
810		1909.8	28.80	Flat	10	N/A	1.030	0.118	Edge bottom to Phantom
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
WCDMA Band II	9262	1852.4	22.55	Flat	10	N/A	0.838	-0.063	Front Surface to Phantom
	9262	1852.4	22.55	Flat	10	N/A	0.911	-0.130	Back Surface to Phantom
	9262	1852.4	22.55	Flat	10	N/A	0.884	0.017	Edge bottom to Phantom
	9400	1880.0	22.49	Flat	10	N/A	0.918	0.127	Front Surface to Phantom
	9400	1880.0	22.49	Flat	10	N/A	1.000	0.027	Back Surface to Phantom
	9400	1880.0	22.49	Flat	10	N/A	1.010	0.192	Edge bottom to Phantom
	9538	1907.6	22.70	Flat	10	N/A	0.800	0.064	Front Surface to Phantom
	9538	1907.6	22.70	Flat	10	N/A	1.090	0.052	Back Surface to Phantom
	9538	1907.6	22.70	Flat	10	N/A	0.149	-0.042	Edge left to Phantom
	9538	1907.6	22.70	Flat	10	N/A	0.130	-0.019	Edge Right to Phantom
WCDMA Band IV	1413	1740.0	23.13	Flat	10	N/A	0.500	0.079	Front Surface to Phantom
	1413	1740.0	23.13	Flat	10	N/A	0.590	-0.077	Back Surface to Phantom
	1413	1740.0	23.13	Flat	10	N/A	0.108	0.053	Edge left to Phantom
	1413	1740.0	23.13	Flat	10	N/A	0.082	0.082	Edge Right to Phantom
	1413	1740.0	23.13	Flat	10	N/A	0.734	0.171	Edge bottom to Phantom
WCDMA Band V	4132	826.4	23.19	Flat	10	N/A	0.387	-0.018	Front Surface to Phantom
	4132	826.4	23.19	Flat	10	N/A	0.362	0.026	Back Surface to Phantom
	4132	826.4	23.19	Flat	10	N/A	0.377	0.053	Edge left to Phantom
	4132	826.4	23.19	Flat	10	N/A	0.352	0.046	Edge Right to Phantom
	4132	826.4	23.19	Flat	10	N/A	0.087	0.060	Edge bottom to Phantom
IEEE 802.11b Rate 1M	11	2462.0	19.77	Flat	10	N/A	0.000	-0.092	Front Surface to Phantom
	11	2462.0	19.77	Flat	10	N/A	0.025	-0.124	Back Surface to Phantom
	11	2462.0	19.77	Flat	10	N/A	0.002	0.017	Edge Right to Phantom
	11	2462.0	19.77	Flat	10	N/A	0.001	-0.021	Edge Top to Phantom
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to FCC/OET Bulletin 65, Supplement C [June 2001], IEEE1528-2003 and RSS-102.
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Batteries are fully charged for all readings.
5. Base on power table (section 5.2), the worst case is 802.11b CH1 rate 1M, therefore the test sample was investigated on this configuration.
6. 802.11g & 802.11n power are not more than 802.11b 0.25dB, therefore 802.11g Stand-alone SAR is not required.
7. Wi-Fi hot-spot mode is not include 802.11a
8. If the Channel's SAR 1g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.
9. HSDPA & HSUPA&(HSPA+ QPSK) power are not more than WCDMA 0.25dB and the SAR value of WCDMA < 1.2 mW/g, therefore HSDPA & HSUPA&(HSPA+ QPSK) Stand-alone SAR is not required.
10. In Hot-spot mode, the antenna location to edge > 2.5 cm, therefore for WWAN antenna in edge top is not required.
11. In Hot-spot mode, the antenna location to edge > 2.5 cm, therefore for WLAN antenna in edge bottom and edge Left is not required.
12. Since the DUT support the WI-FI hotspot function and form factor $> 9\text{cm} \times 5\text{cm}$, therefore GPRS/EGPRS is performed SAR at 10mm.
13. Since the Wi-Fi hotspot function is not support voice mode, therefore GSM is not performed SAR at 10mm
14. Since the source-base time-averaged output power of EGPRS lower than that in the GPRS mode, therefore EGPRS is not performed SAR at 10mm



10.3 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 12. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole – body.
- *** The Spatial Average value of the SAR averaged over the partial – body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



11. Conclusion

The SAR test values found for the portable mobile phone **HTC Corporation Trade Name : HTC Model(s) : PH85110** is below the maximum recommended level of 1.6 W/kg (mW/g).

12. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, "Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz*, Jan. 1995.
- [11] KDB248227 D01 SAR meas for 802 11 a b g v01r02.
- [12] KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05
- [13] KDB 941225 D01 SAR Test for 3G Devices 3G-SAR
- [14] KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE
- [15] KDB 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- [16] KDB 941225 D06 Hot Spot SAR v01

Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/11/2011 11:03:39 PM

System Performance Check at 835MHz_20110711_Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 2.87 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 56.2 V/m; Power Drift = 0.024 dB
 Peak SAR (extrapolated) = 3.72 W/kg
SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.59 mW/g
 Maximum value of SAR (measured) = 2.87 mW/g

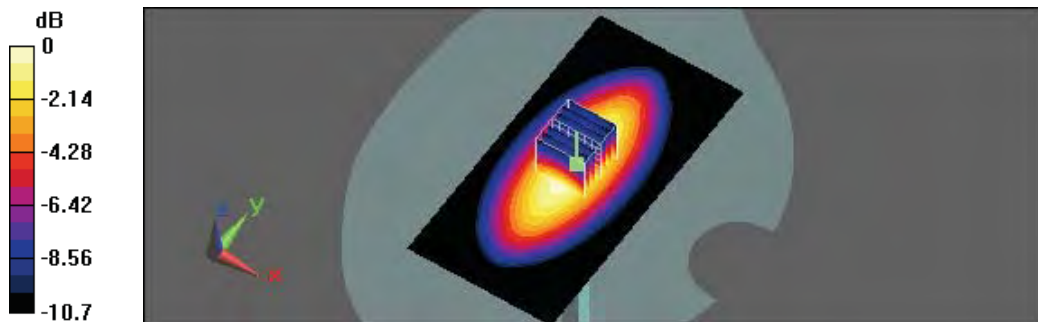

0 dB = 2.87mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 3:37:06 PM

System Performance Check at 1750MHz_20110723_Head

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1023

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.16, 8.16, 8.16); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1750MHz/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 11.9 mW/g

System Performance Check at 1750MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 91 V/m; Power Drift = 0.035 dB
 Peak SAR (extrapolated) = 17.2 W/kg
SAR(1 g) = 9.18 mW/g; SAR(10 g) = 4.8 mW/g
 Maximum value of SAR (measured) = 11.7 mW/g

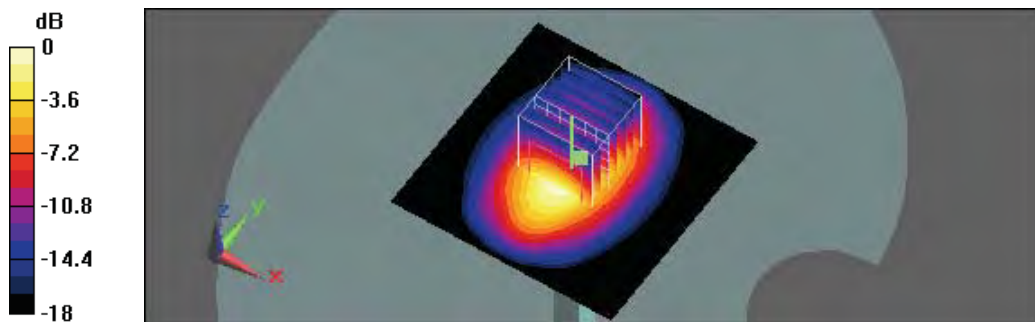

0 dB = 11.7mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 6:55:22 PM

System Performance Check at 1900MHz_20110712_Head

DUT: Dipole D1900V2_SN5d018; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 13.2 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 98.3 V/m; Power Drift = 0.00342 dB
 Peak SAR (extrapolated) = 19.2 W/kg
SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.4 mW/g
 Maximum value of SAR (measured) = 13.2 mW/g

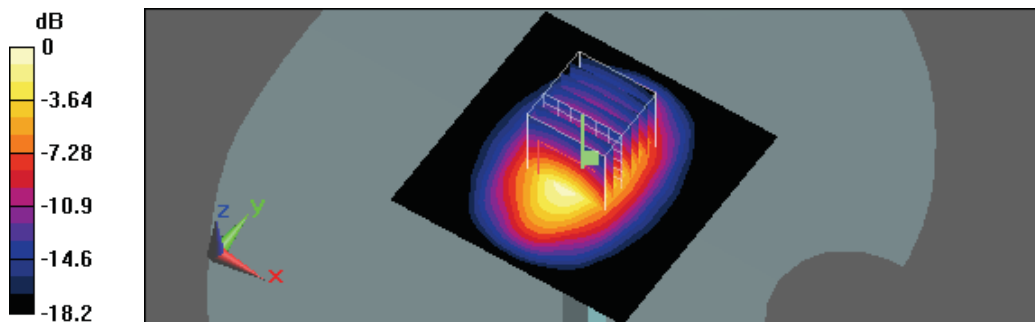

0 dB = 13.2mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 6:28:04 PM

System Performance Check at 2450MHz_20110723_Head

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 2450MHz/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 17.8 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 99.4 V/m; Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 28.1 W/kg
SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.23 mW/g
 Maximum value of SAR (measured) = 17.9 mW/g

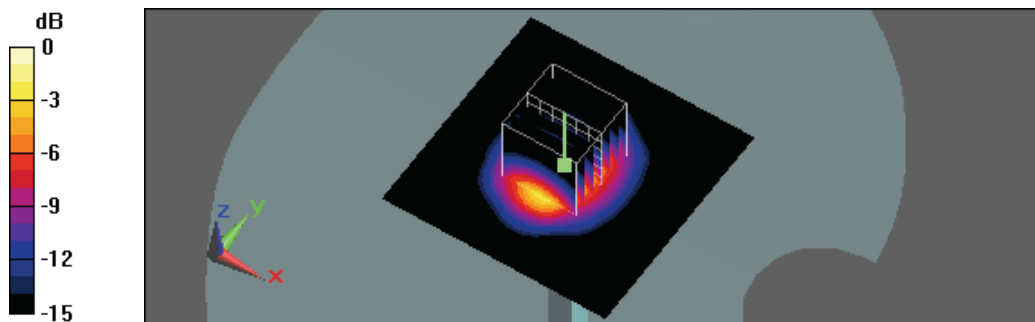

0 dB = 17.9mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 5:26:57 PM

System Performance Check at 835MHz_20110716_Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 2.92 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 54.5 V/m; Power Drift = 0.017 dB
 Peak SAR (extrapolated) = 3.81 W/kg
SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.63 mW/g
 Maximum value of SAR (measured) = 2.95 mW/g

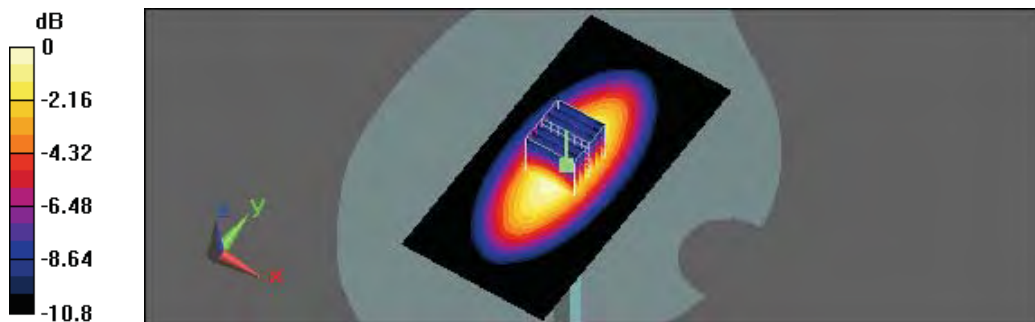

0 dB = 2.95mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 6:11:30 PM

System Performance Check at 1750MHz_20110717_Body

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1023

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1750MHz/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 11.9 mW/g

System Performance Check at 1750MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 88.3 V/m; Power Drift = 0.024 dB
 Peak SAR (extrapolated) = 17.1 W/kg
SAR(1 g) = 9.41 mW/g; SAR(10 g) = 4.97 mW/g
 Maximum value of SAR (measured) = 12 mW/g

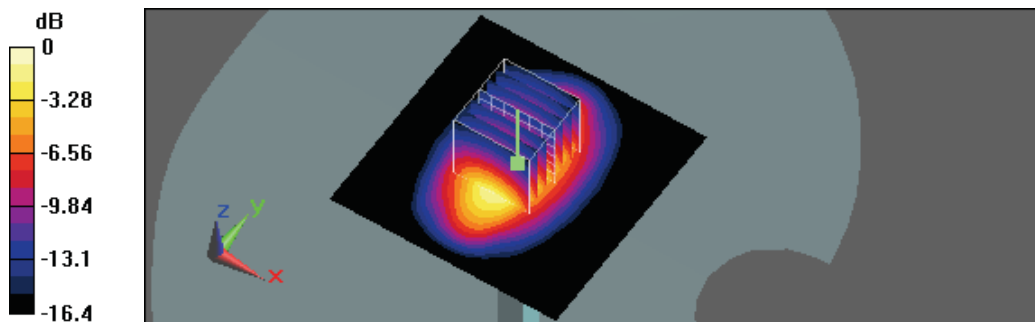

0 dB = 12mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 5:33:05 PM

System Performance Check at 1900MHz_20110715_Body

DUT: Dipole D1900V2_SN5d018; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 13.3 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 89 V/m; Power Drift = 0.088 dB
 Peak SAR (extrapolated) = 19.4 W/kg
SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.4 mW/g
 Maximum value of SAR (measured) = 13.3 mW/g

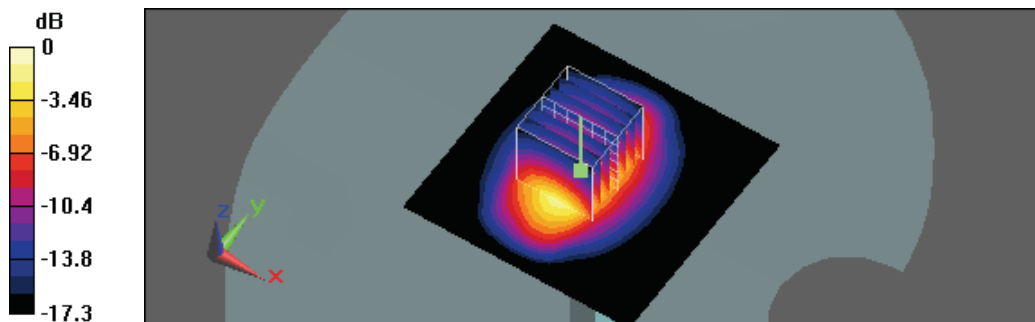

0 dB = 13.3mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 3:49:28 PM

System Performance Check at 1900MHz_20110722_Body

DUT: Dipole D1900V2_SN5d018; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 13.6 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 94 V/m; Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 19.7 W/kg
SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.49 mW/g
 Maximum value of SAR (measured) = 13.5 mW/g

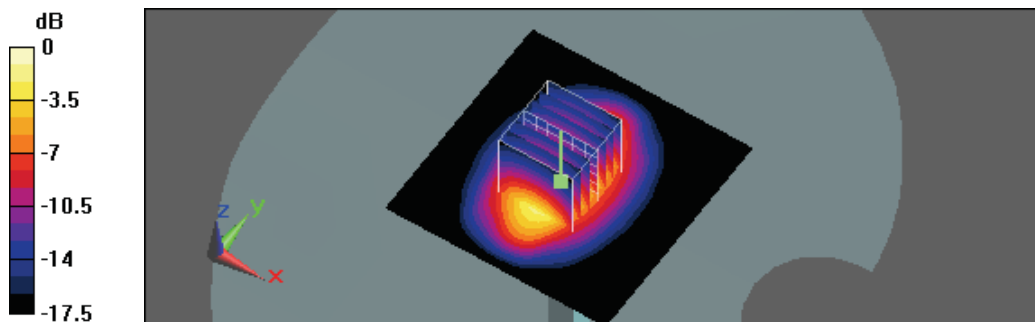

0 dB = 13.5mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 2:51:46 PM

System Performance Check at 2450MHz_20110717_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 2450MHz/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 18 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 93.6 V/m; Power Drift = -0.114 dB
 Peak SAR (extrapolated) = 24.2 W/kg
SAR(1 g) = 12.2 mW/g; SAR(10 g) = 5.76 mW/g
 Maximum value of SAR (measured) = 16.1 mW/g

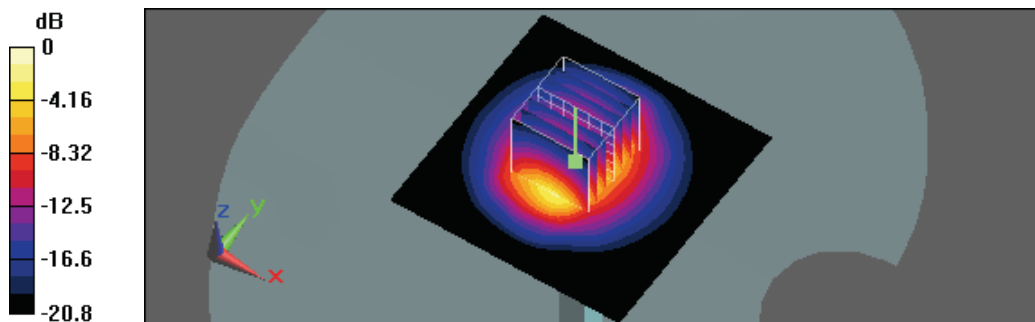

0 dB = 16.1mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 10:22:59 AM

System Performance Check at 5200MHz_20110726_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.52$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.36, 4.36, 4.36); Calibrated: 2/25/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 5200MHz/Area Scan (91x91x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 15.4 mW/g

System Performance Check at 5200MHz/Zoom Scan (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 56.7 V/m; Power Drift = 0.133 dB
 Peak SAR (extrapolated) = 31.1 W/kg
SAR(1 g) = 7.85 mW/g; SAR(10 g) = 2.23 mW/g
 Maximum value of SAR (measured) = 15.3 mW/g

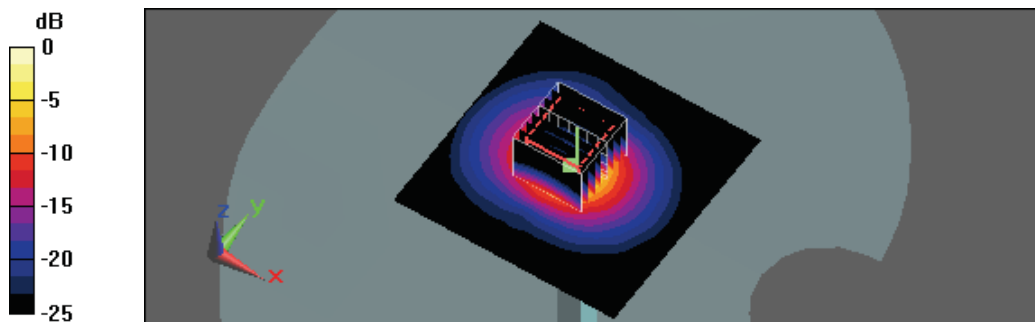

0 dB = 15.3mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 12:18:46 AM

System Performance Check at 5500MHz_20110727_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.9 \text{ mho/m}$; $\epsilon_r = 47.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.88, 3.88, 3.88); Calibrated: 2/25/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 5500MHz/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 16.8 mW/g

System Performance Check at 5500MHz/Zoom Scan (8x8x6)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 56.9 V/m; Power Drift = 0.135 dB
 Peak SAR (extrapolated) = 35.8 W/kg
SAR(1 g) = 8.45 mW/g; SAR(10 g) = 2.35 mW/g
 Maximum value of SAR (measured) = 16.8 mW/g

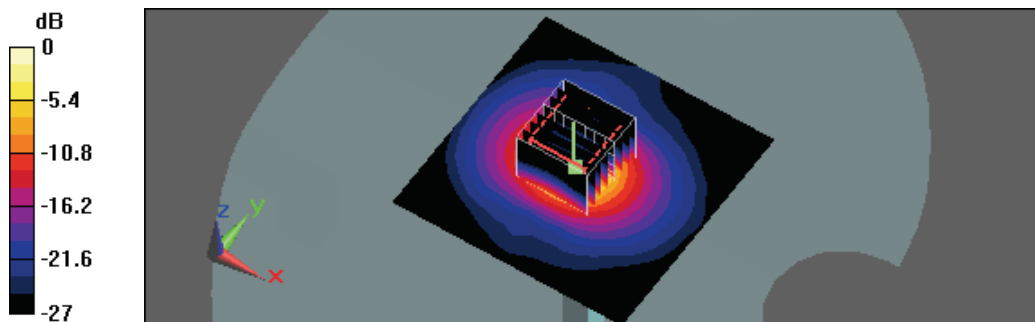

0 dB = 16.8mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 3:02:56 PM

System Performance Check at 5800MHz_20110727_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.27$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 5800MHz/Area Scan (91x91x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 14.3 mW/g

System Performance Check at 5800MHz/Zoom Scan (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 51.3 V/m; Power Drift = 0.120 dB
 Peak SAR (extrapolated) = 30.9 W/kg
SAR(1 g) = 7.04 mW/g; SAR(10 g) = 1.97 mW/g
 Maximum value of SAR (measured) = 14.1 mW/g

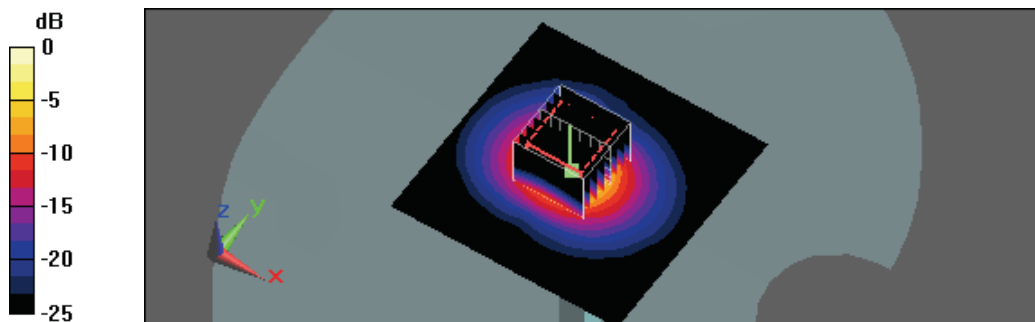

0 dB = 14.1mW/g

Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 12:30:46 AM

RC_GSM 850 CH 251

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x111x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.473 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.82 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.453 mW/g

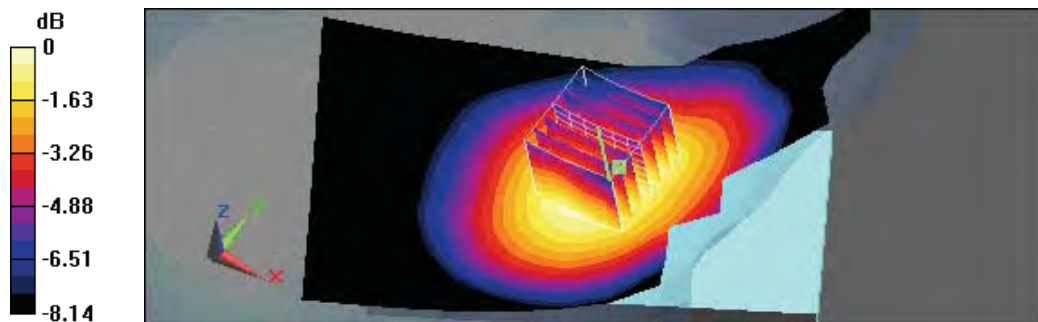

0 dB = 0.453mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 1:19:43 AM

RT_GSM 850 CH 251

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.353 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 14.6 V/m; Power Drift = -0.000365 dB
 Peak SAR (extrapolated) = 0.436 W/kg
SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.260 mW/g
 Maximum value of SAR (measured) = 0.377 mW/g

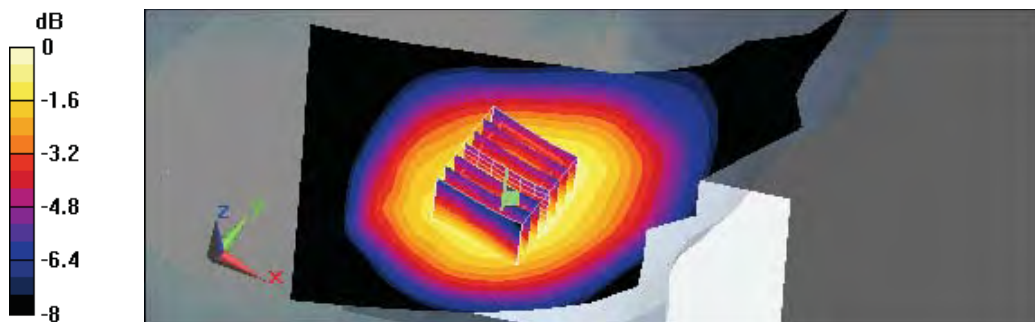

0 dB = 0.377mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 1:54:05 AM

LC_GSM 850 CH 251

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.430 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.12 V/m; Power Drift = -0.131 dB
 Peak SAR (extrapolated) = 0.493 W/kg
SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.290 mW/g
 Maximum value of SAR (measured) = 0.432 mW/g

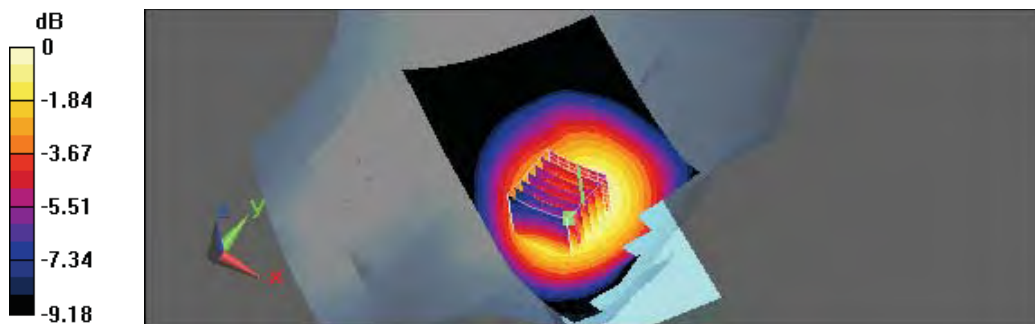

0 dB = 0.432mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 2:20:42 AM

LT_GSM 850 CH 251

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.340 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 14.1 V/m; Power Drift = 0.023 dB
 Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.243 mW/g
 Maximum value of SAR (measured) = 0.360 mW/g

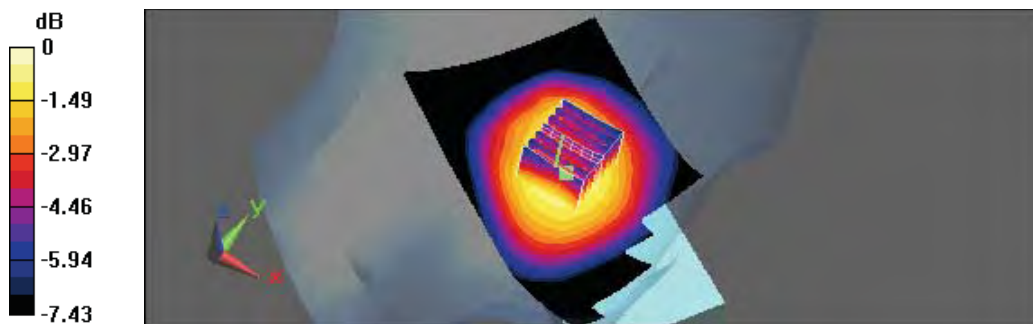

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 7:27:47 PM

RC_PCS CH810

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.098 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 3.37 V/m; Power Drift = 0.153 dB
 Peak SAR (extrapolated) = 0.131 W/kg
SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.051 mW/g
 Maximum value of SAR (measured) = 0.103 mW/g

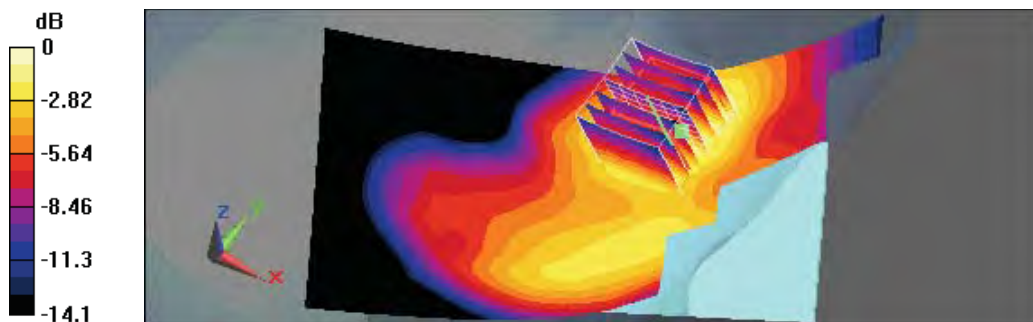

0 dB = 0.103mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 7:56:43 PM

RT_PCS CH810

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.054 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 5.46 V/m; Power Drift = 0.075 dB
 Peak SAR (extrapolated) = 0.065 W/kg
SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.024 mW/g
 Maximum value of SAR (measured) = 0.052 mW/g

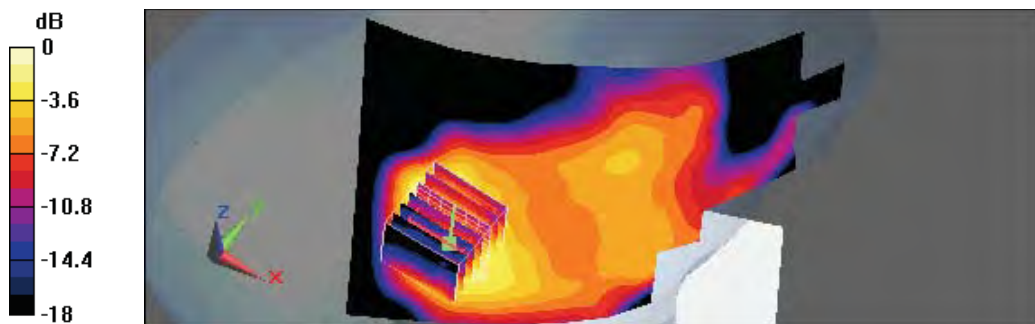

0 dB = 0.052mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 9:01:07 PM

LC_PCS CH810

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (71x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.135 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 3.59 V/m; Power Drift = -0.151 dB
 Peak SAR (extrapolated) = 0.161 W/kg
SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.062 mW/g
 Maximum value of SAR (measured) = 0.120 mW/g

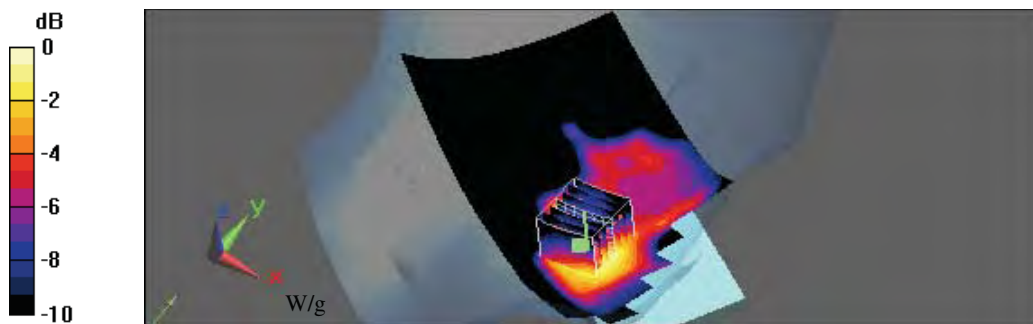

0 dB = 0.120m

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 9:30:06 PM

LT_PCS CH810

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (71x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.048 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 5.82 V/m; Power Drift = 0.063 dB
 Peak SAR (extrapolated) = 0.066 W/kg
SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.023 mW/g
 Maximum value of SAR (measured) = 0.048 mW/g

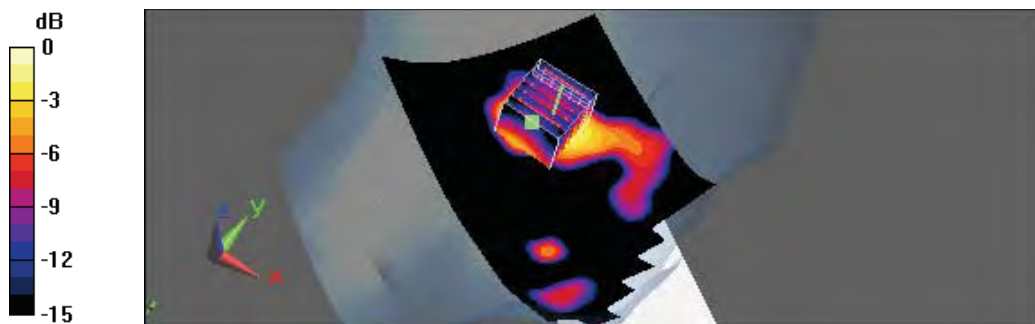

0 dB = 0.048mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 11:53:08 PM

RC_WCDMA Band II CH9538

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.305 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.9 V/m; Power Drift = -0.174 dB
 Peak SAR (extrapolated) = 0.403 W/kg
SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.163 mW/g
 Maximum value of SAR (measured) = 0.310 mW/g

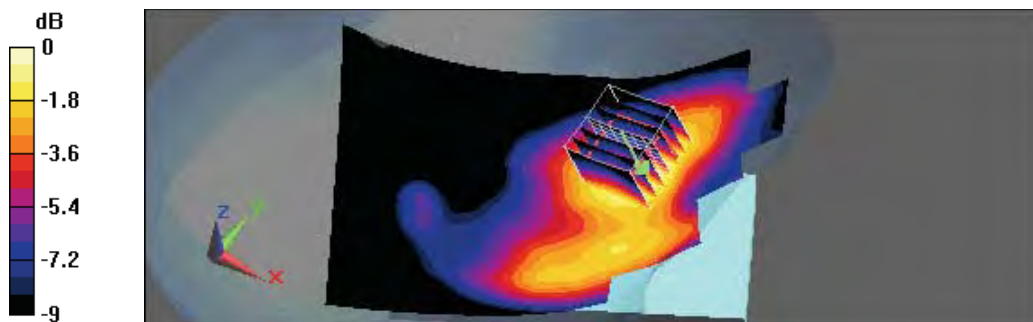

0 dB = 0.310mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/13/2011 12:25:24 AM

RT_WCDMA Band II CH9538

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.126 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.83 V/m; Power Drift = 0.081 dB
 Peak SAR (extrapolated) = 0.163 W/kg
SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.058 mW/g
 Maximum value of SAR (measured) = 0.121 mW/g

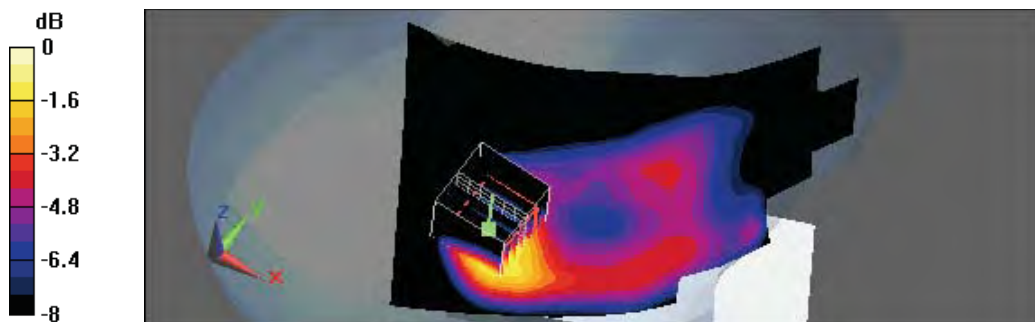

0 dB = 0.121mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/13/2011 1:04:56 AM

LC_WCDMA Band II CH9538

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.480 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.39 V/m; Power Drift = 0.142 dB
 Peak SAR (extrapolated) = 0.642 W/kg
SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.254 mW/g
 Maximum value of SAR (measured) = 0.493 mW/g

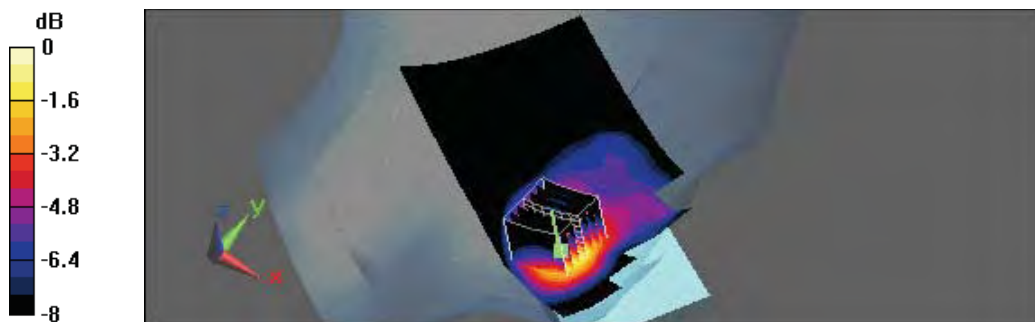

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/13/2011 1:35:26 AM

LT_WCDMA Band II CH9538

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (71x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.152 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.62 V/m; Power Drift = 0.071 dB
 Peak SAR (extrapolated) = 0.161 W/kg
SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.060 mW/g
 Maximum value of SAR (measured) = 0.124 mW/g

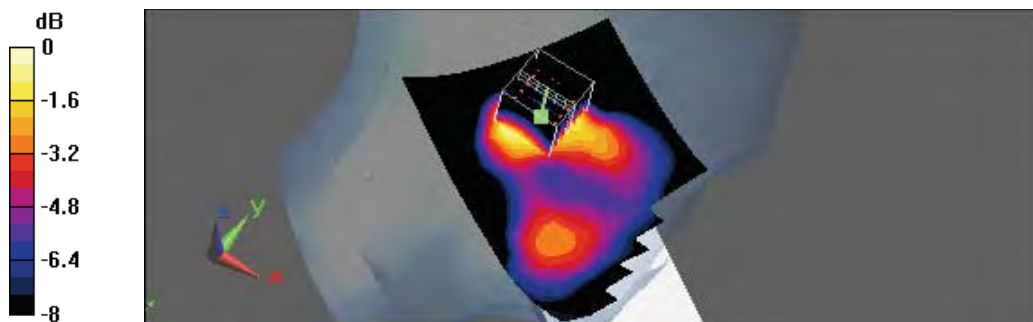

0 dB = 0.124mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 4:36:13 PM

RC_WCDMA Band IV CH1413

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.16, 8.16, 8.16); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.249 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.1 V/m; Power Drift = -0.00464 dB
 Peak SAR (extrapolated) = 0.332 W/kg
SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.134 mW/g
 Maximum value of SAR (measured) = 0.260 mW/g



0 dB = 0.260mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 5:02:28 PM

RT_WCDMA Band IV CH1413

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.16, 8.16, 8.16); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.154 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 10.5 V/m; Power Drift = 0.058 dB
 Peak SAR (extrapolated) = 0.217 W/kg
SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.072 mW/g
 Maximum value of SAR (measured) = 0.158 mW/g

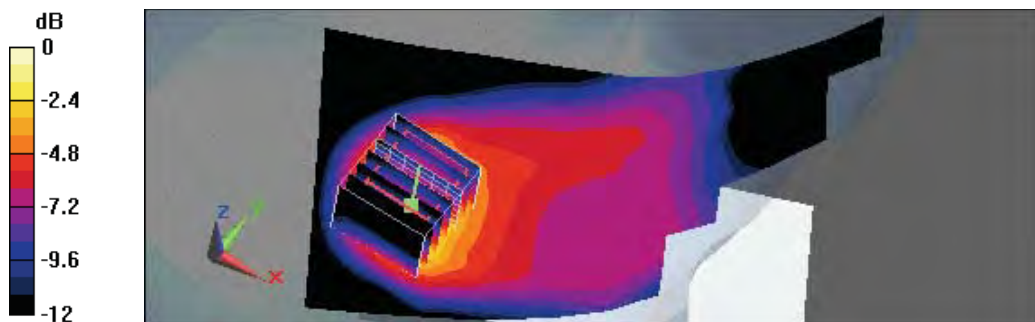

0 dB = 0.158mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 5:40:52 PM

LC_WCDMA Band IV CH1413

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.16, 8.16, 8.16); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.354 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.4 V/m; Power Drift = 0.139 dB
 Peak SAR (extrapolated) = 0.439 W/kg
SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.178 mW/g
 Maximum value of SAR (measured) = 0.340 mW/g

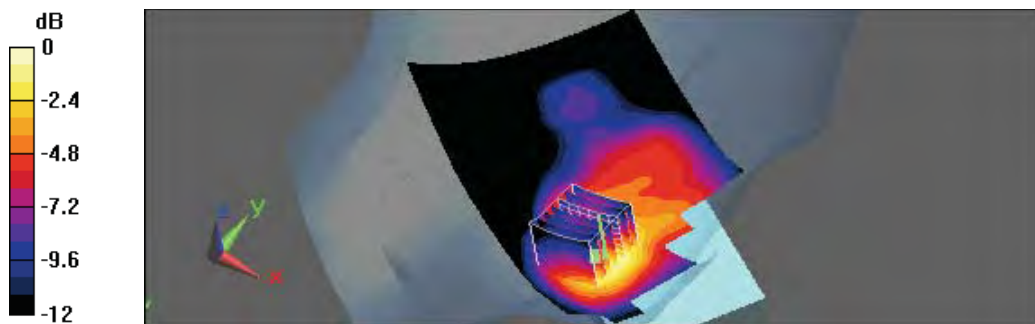

0 dB = 0.340mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 6:08:31 PM

LT_WCDMA Band IV CH1413

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.16, 8.16, 8.16); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.193 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 11.7 V/m; Power Drift = 0.036 dB
 Peak SAR (extrapolated) = 0.281 W/kg
SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.087 mW/g
 Maximum value of SAR (measured) = 0.199 mW/g

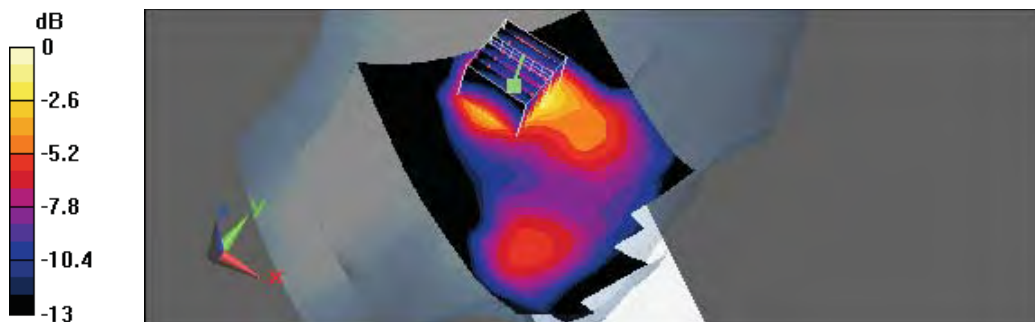

0 dB = 0.199mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 2:38:27 PM

RC_WCDMA Band V CH4132

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x111x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.508 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.06 V/m; Power Drift = 0.088 dB
 Peak SAR (extrapolated) = 0.584 W/kg
SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.352 mW/g
 Maximum value of SAR (measured) = 0.515 mW/g

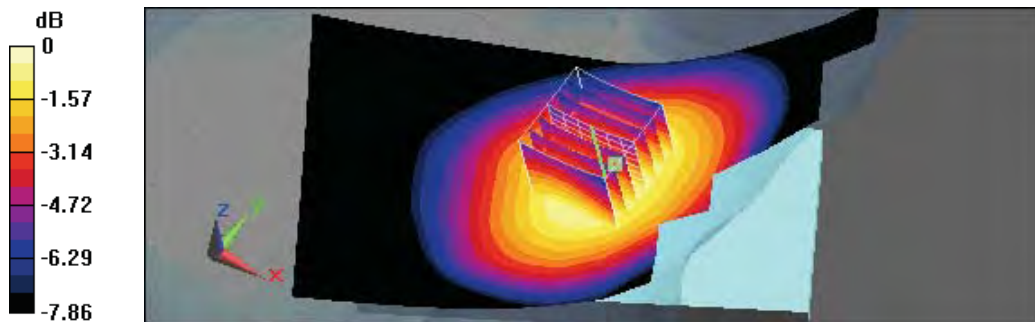

0 dB = 0.515mW/g

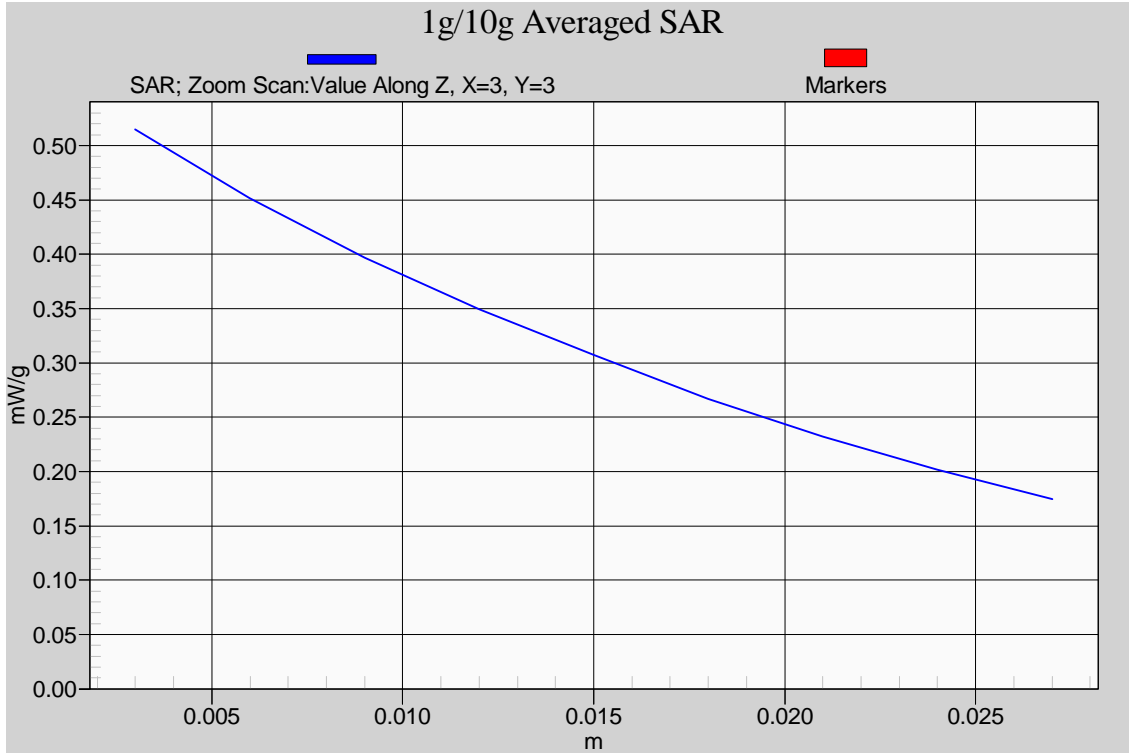

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 3:06:26 PM

RT_WCDMA Band V CH4132

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.383 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 16.8 V/m; Power Drift = 0.029 dB
 Peak SAR (extrapolated) = 0.439 W/kg
SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.271 mW/g
 Maximum value of SAR (measured) = 0.384 mW/g

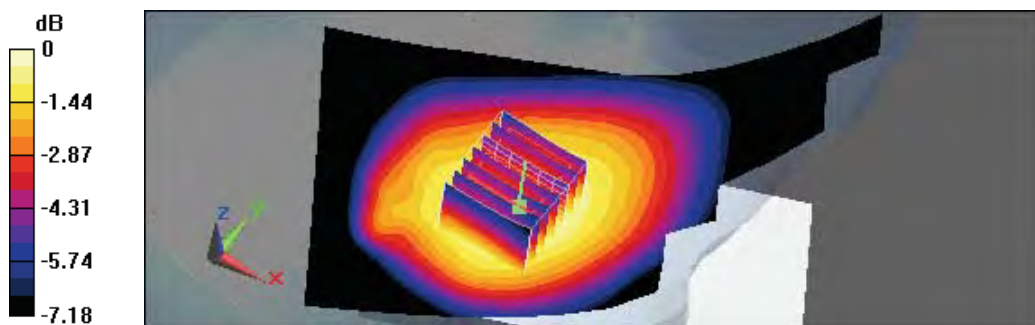

0 dB = 0.384mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 3:41:07 PM

LC_WCDMA Band V CH4132

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.472 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.84 V/m; Power Drift = -0.046 dB
 Peak SAR (extrapolated) = 0.527 W/kg
SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.335 mW/g
 Maximum value of SAR (measured) = 0.472 mW/g

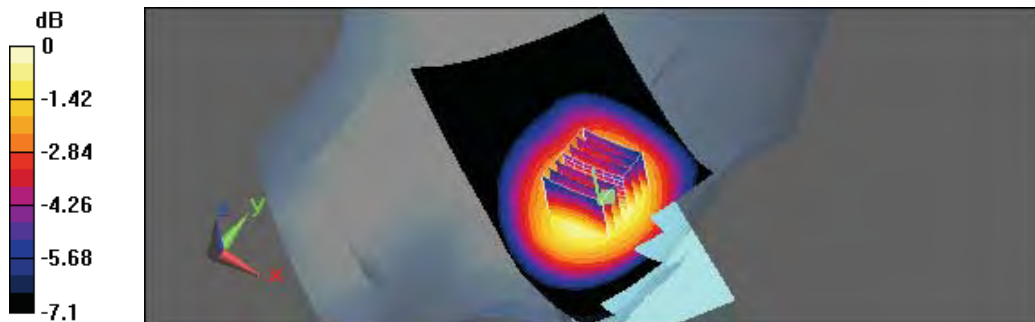

0 dB = 0.472mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/12/2011 4:22:14 PM

LT_WCDMA Band V CH4132

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.370 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 14.1 V/m; Power Drift = -0.029 dB
 Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.257 mW/g
 Maximum value of SAR (measured) = 0.361 mW/g

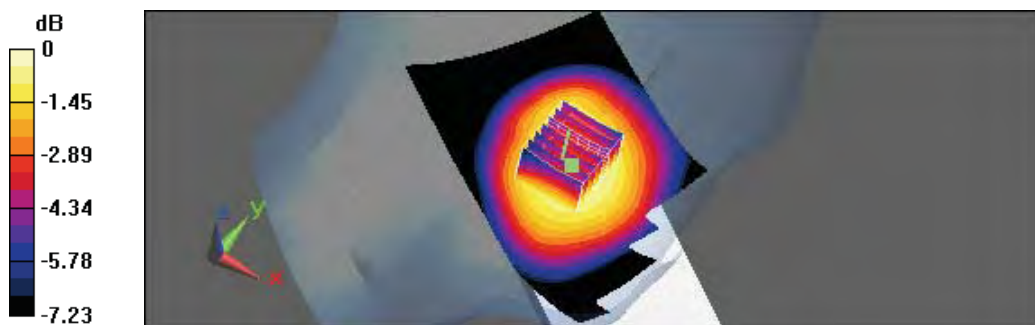

0 dB = 0.361mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 7:07:28 PM

RC_802.11b CH11_1M

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (71x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.014 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 1.18 V/m; Power Drift = -0.090 dB
 Peak SAR (extrapolated) = 0.018 W/kg
SAR(1 g) = 0.00802 mW/g; SAR(10 g) = 0.00358 mW/g
 Maximum value of SAR (measured) = 0.013 mW/g

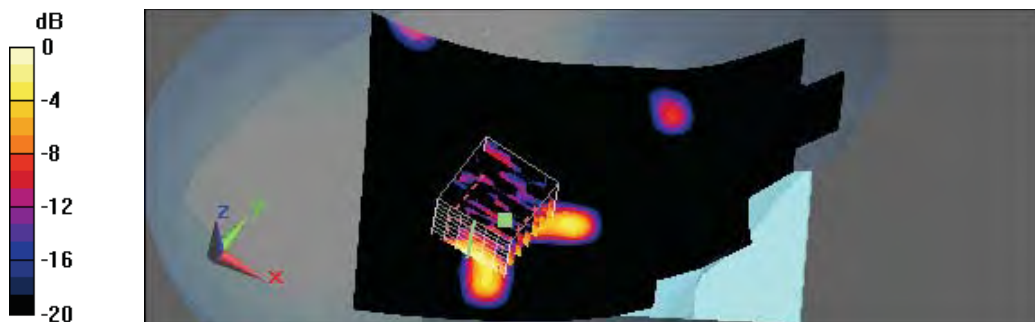

0 dB = 0.013mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 8:16:59 PM

RT_802.11b CH11_1M

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (71x111x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.020 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 0.928 V/m; Power Drift = 0.121 dB
Peak SAR (extrapolated) = 0.031 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00397 mW/g
Maximum value of SAR (measured) = 0.014 mW/g

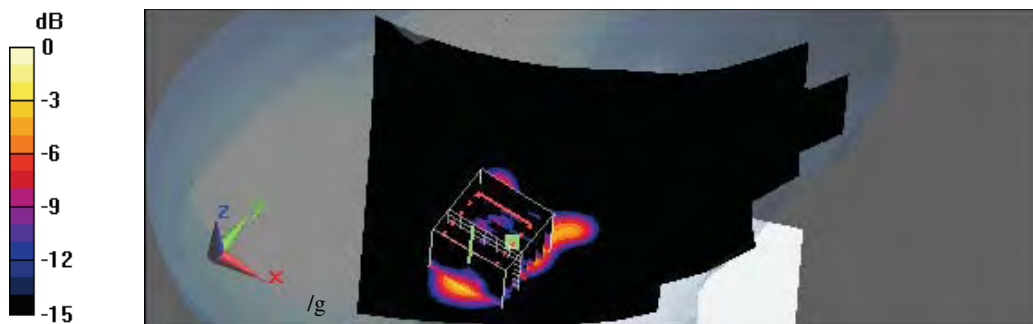

0 dB = 0.014mW

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 9:08:08 PM

LC_802.11b CH11_1M

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (71x111x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.036 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 0.668 V/m; Power Drift = 0.197 dB
Peak SAR (extrapolated) = 0.025 W/kg
SAR(1 g) = 0.00867 mW/g; SAR(10 g) = 0.00222 mW/g
Maximum value of SAR (measured) = 0.015 mW/g

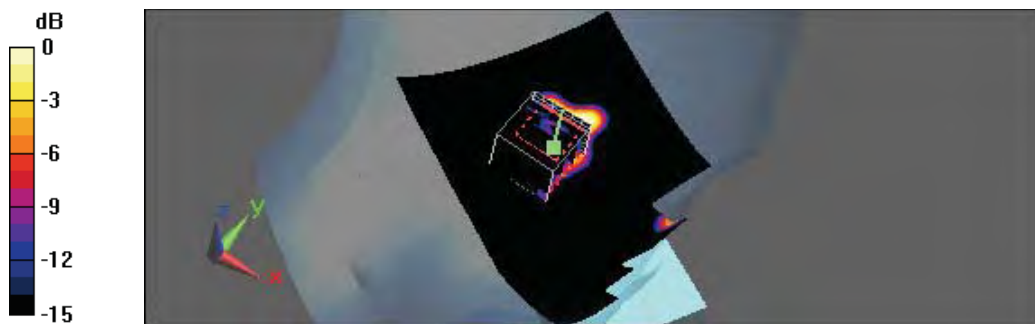

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 9:46:11 PM

LT_802.11b CH11_1M

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (71x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.011 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.686 V/m; Power Drift = -0.059 dB
 Peak SAR (extrapolated) = 0.00671 W/kg
SAR(1 g) = 0.000715 mW/g; SAR(10 g) = 0.00014 mW/g
 Maximum value of SAR (measured) = 0.012 mW/g

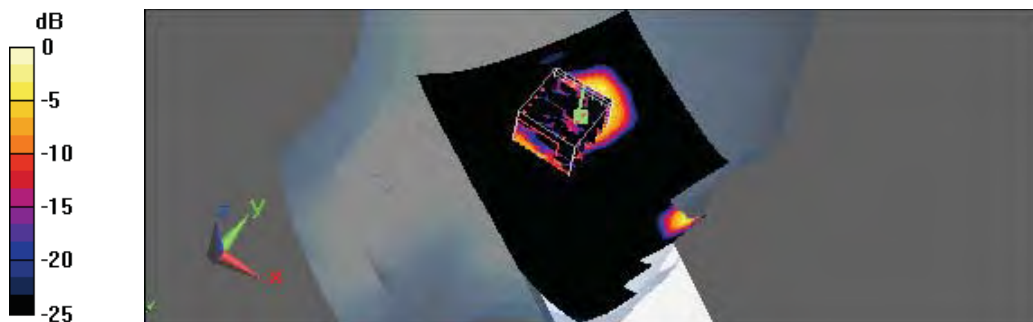

0 dB = 0.012mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 6:22:52 PM

Flat_GSM850 CH251 Headset Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.263 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 15.4 V/m; Power Drift = -0.029 dB
 Peak SAR (extrapolated) = 0.307 W/kg
SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.175 mW/g
 Maximum value of SAR (measured) = 0.260 mW/g

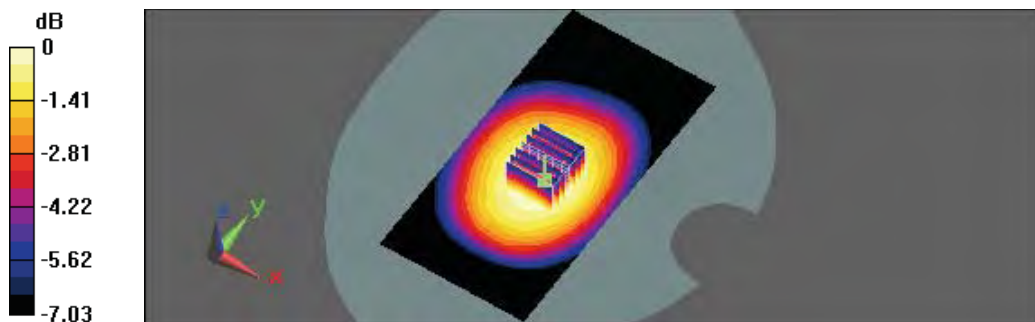

0 dB = 0.260mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 6:51:00 PM

Flat_GSM850 CH251 Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.259 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 14.6 V/m; Power Drift = -0.016 dB
 Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.169 mW/g
 Maximum value of SAR (measured) = 0.256 mW/g

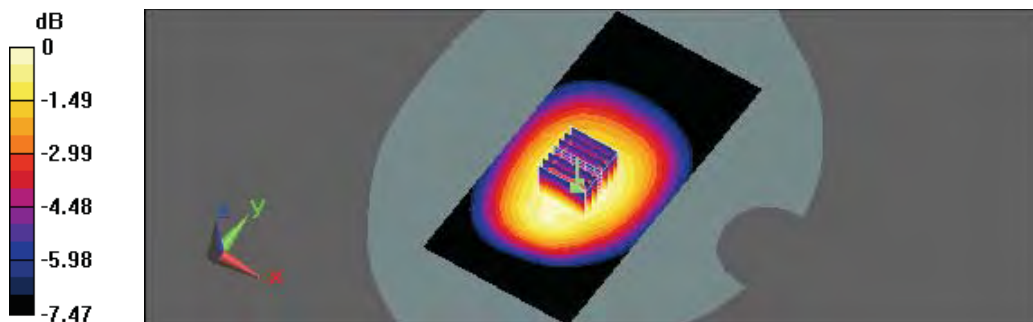

0 dB = 0.256mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 10:53:31 PM

Flat_PCS CH810_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.247 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 3.47 V/m; Power Drift = -0.055 dB
 Peak SAR (extrapolated) = 0.339 W/kg
SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.119 mW/g
 Maximum value of SAR (measured) = 0.256 mW/g

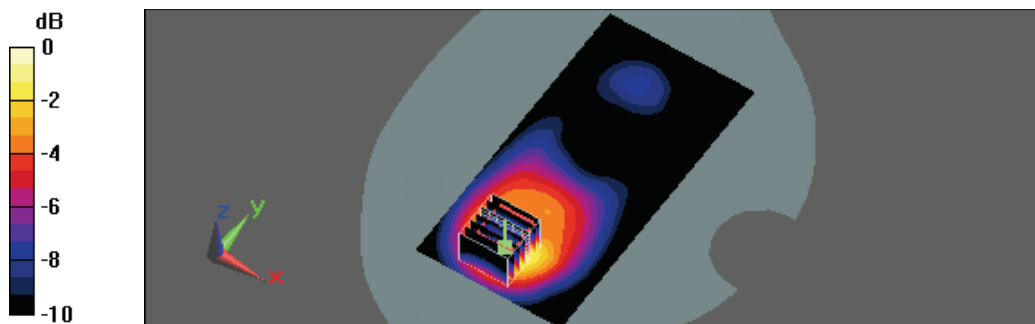

0 dB = 0.256mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 11:24:57 PM

Flat_PCS CH810 Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.287 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 4.46 V/m; Power Drift = 0.023 dB
 Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.137 mW/g
 Maximum value of SAR (measured) = 0.288 mW/g

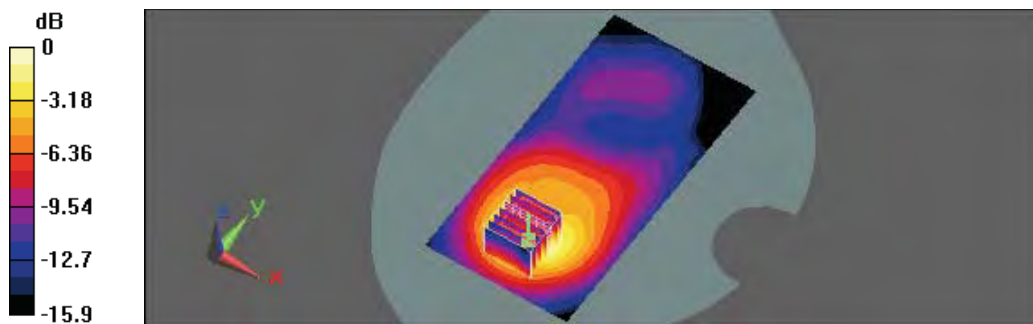

0 dB = 0.288mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 10:13:40 PM

Flat_WCDMA Band II CH9538_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.628 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.45 V/m; Power Drift = 0.043 dB
 Peak SAR (extrapolated) = 0.893 W/kg
SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.316 mW/g
 Maximum value of SAR (measured) = 0.671 mW/g

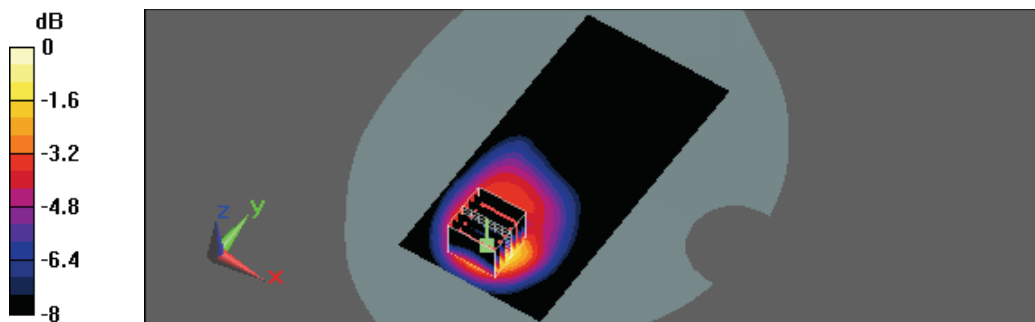

0 dB = 0.671mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 9:33:38 PM

Flat_WCDMA Band II CH9538_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.817 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.44 V/m; Power Drift = -0.063 dB
 Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.390 mW/g
 Maximum value of SAR (measured) = 0.814 mW/g

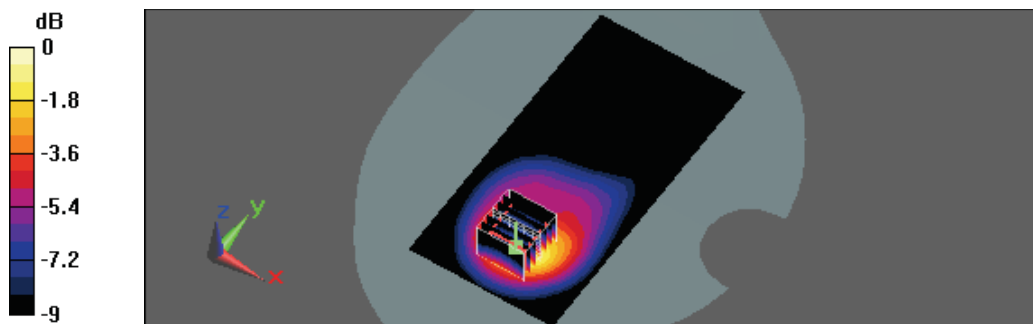

0 dB = 0.814mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 1:00:35 PM

Flat_WCDMA Band IV CH1413_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.360 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.61 V/m; Power Drift = 0.192 dB
 Peak SAR (extrapolated) = 0.479 W/kg
SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.180 mW/g
 Maximum value of SAR (measured) = 0.370 mW/g

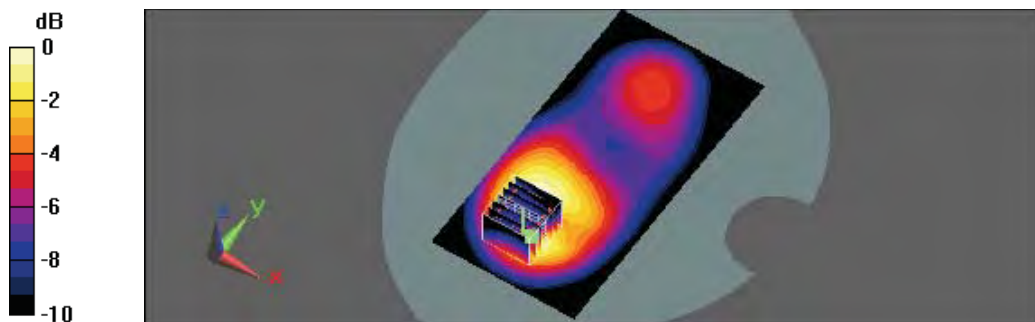

0 dB = 0.370mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 12:30:45 PM

Flat_WCDMA Band IV CH1413_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.383 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.16 V/m; Power Drift = 0.177 dB
 Peak SAR (extrapolated) = 0.523 W/kg
SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.204 mW/g
 Maximum value of SAR (measured) = 0.400 mW/g

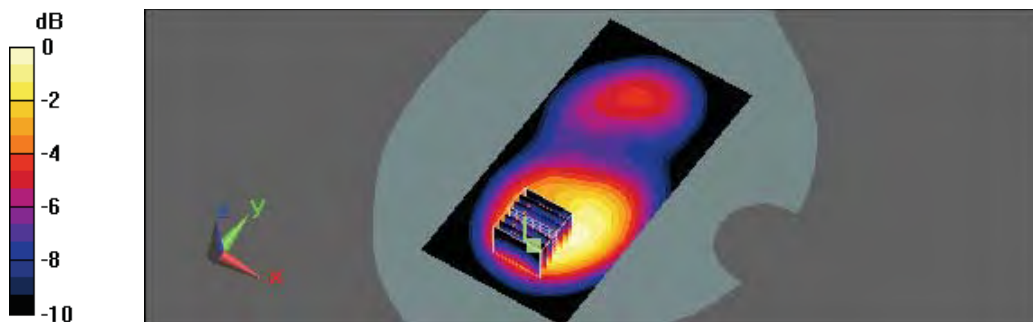

0 dB = 0.400mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 1:43:02 PM

Flat_WCDMA Band V CH4132_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.283 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 16.4 V/m; Power Drift = 0.107 dB
 Peak SAR (extrapolated) = 0.328 W/kg
SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.193 mW/g
 Maximum value of SAR (measured) = 0.281 mW/g

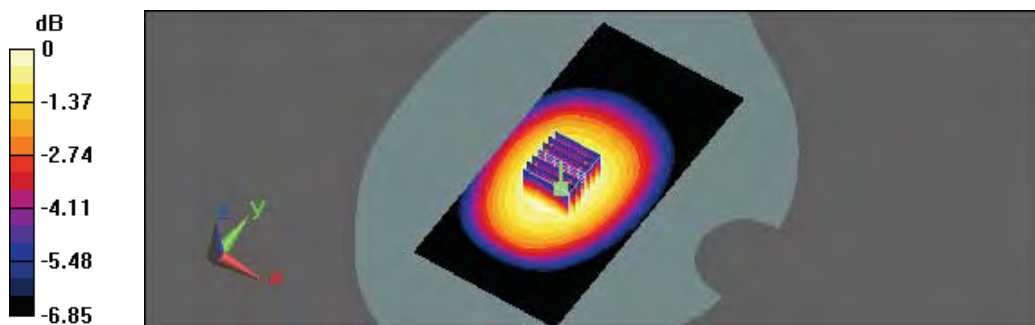

0 dB = 0.281mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 1:16:51 PM

Flat_WCDMA Band V CH4132_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.278 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 15.8 V/m; Power Drift = -0.014 dB
 Peak SAR (extrapolated) = 0.332 W/kg
SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.188 mW/g
 Maximum value of SAR (measured) = 0.281 mW/g

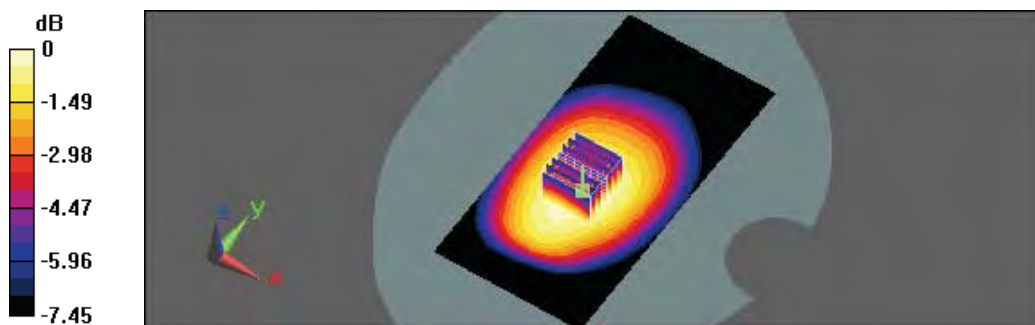

0 dB = 0.281mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 4:16:35 PM

Flat_802.11a_CH36_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5180 \text{ MHz}$; $\sigma = 5.5 \text{ mho/m}$; $\epsilon_r = 47.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.36, 4.36, 4.36); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.022 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0.942 V/m; Power Drift = 0.195 dB
 Peak SAR (extrapolated) = 0.074 W/kg
SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00432 mW/g
 Maximum value of SAR (measured) = 0.019 mW/g

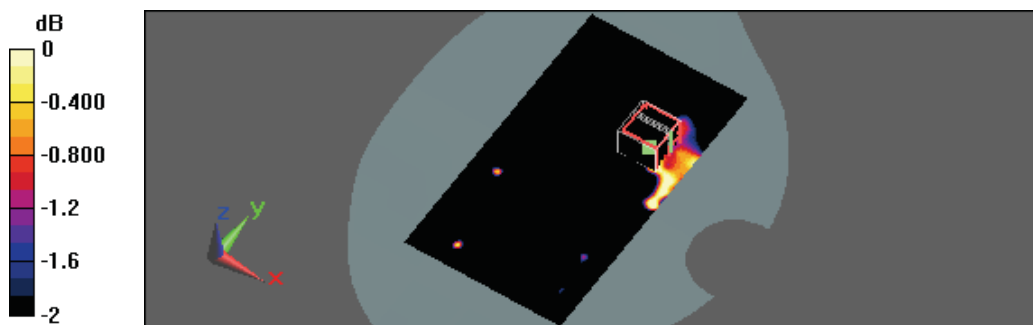

0 dB = 0.019mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 3:27:24 PM

Flat_802.11a_CH36_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5180 \text{ MHz}$; $\sigma = 5.5 \text{ mho/m}$; $\epsilon_r = 47.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.36, 4.36, 4.36); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.073 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.95 V/m; Power Drift = -0.192 dB
 Peak SAR (extrapolated) = 0.150 W/kg
SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.020 mW/g
 Maximum value of SAR (measured) = 0.075 mW/g

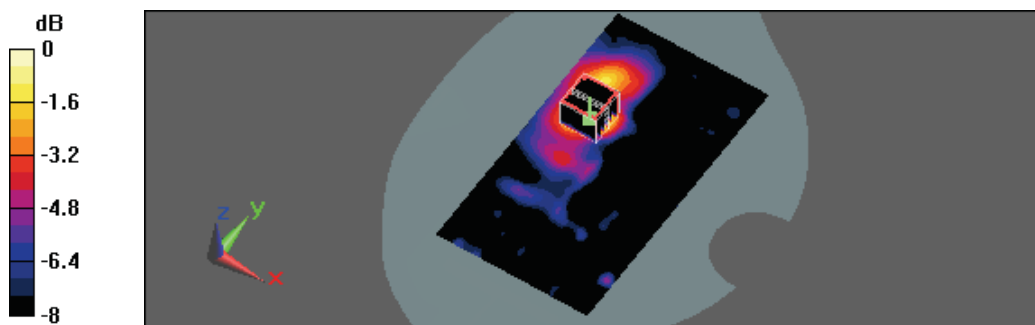

0 dB = 0.075mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 5:18:00 PM

Flat_802.11a_CH48_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.54$ mho/m; $\epsilon_r = 47.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.36, 4.36, 4.36); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.022 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.568 V/m; Power Drift = -0.104 dB
 Peak SAR (extrapolated) = 0.040 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00413 mW/g
 Maximum value of SAR (measured) = 0.023 mW/g

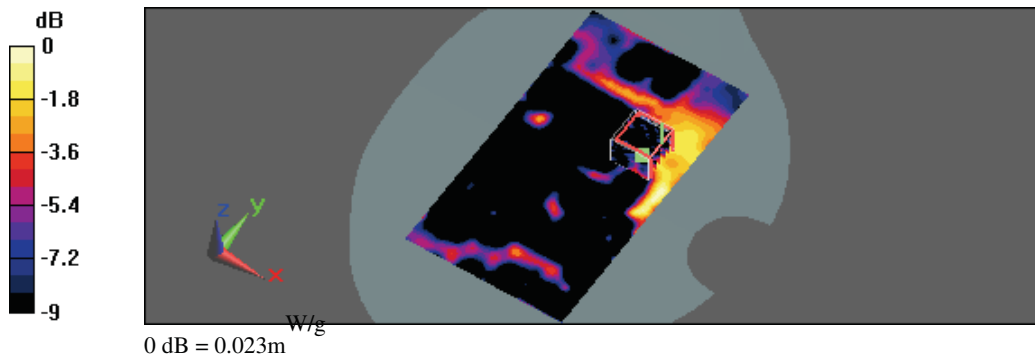

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 6:05:46 PM

Flat_802.11a_CH48_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5240 \text{ MHz}$; $\sigma = 5.54 \text{ mho/m}$; $\epsilon_r = 47.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.36, 4.36, 4.36); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.080 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.72 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 0.144 W/kg
SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.018 mW/g
 Maximum value of SAR (measured) = 0.079 mW/g

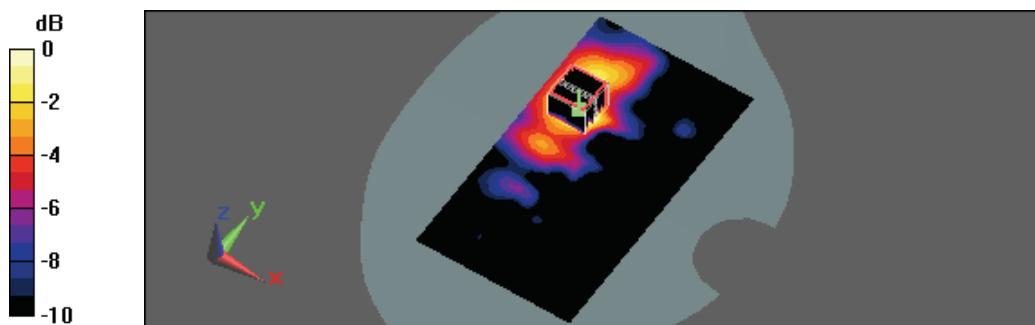

0 dB = 0.079mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 6:59:07 PM

Flat_802.11a_CH52_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.57$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.024 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.708 V/m; Power Drift = 0.108 dB
 Peak SAR (extrapolated) = 0.047 W/kg
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00605 mW/g
 Maximum value of SAR (measured) = 0.024 mW/g

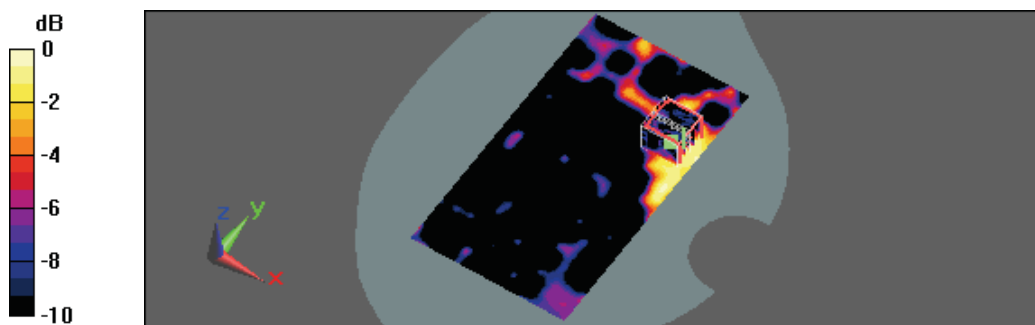

0 dB = 0.024mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 7:49:56 PM

Flat_802.11a_CH52_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.57$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.090 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.46 V/m; Power Drift = 0.031 dB
 Peak SAR (extrapolated) = 0.170 W/kg
SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.021 mW/g
 Maximum value of SAR (measured) = 0.090 mW/g

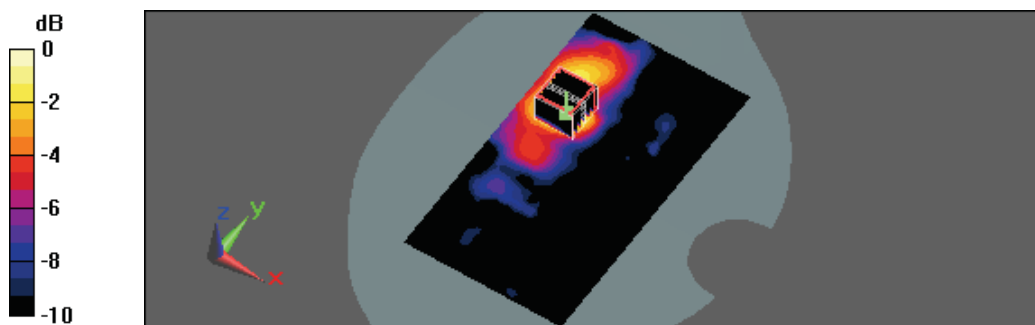

0 dB = 0.090mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 11:08:49 PM

Flat_802.11a_CH64_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.68$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x181x1):

Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.023 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.820 V/m; Power Drift = 0.168 dB
Peak SAR (extrapolated) = 0.064 W/kg
SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00496 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

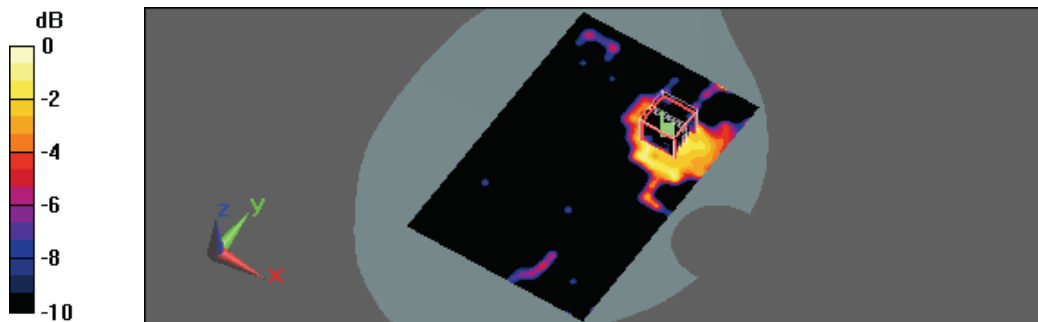

0 dB = 0.026mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/26/2011 8:49:33 PM

Flat_802.11a_CH64_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.68$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.102 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.93 V/m; Power Drift = 0.169 dB
 Peak SAR (extrapolated) = 0.189 W/kg
SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.020 mW/g
 Maximum value of SAR (measured) = 0.096 mW/g

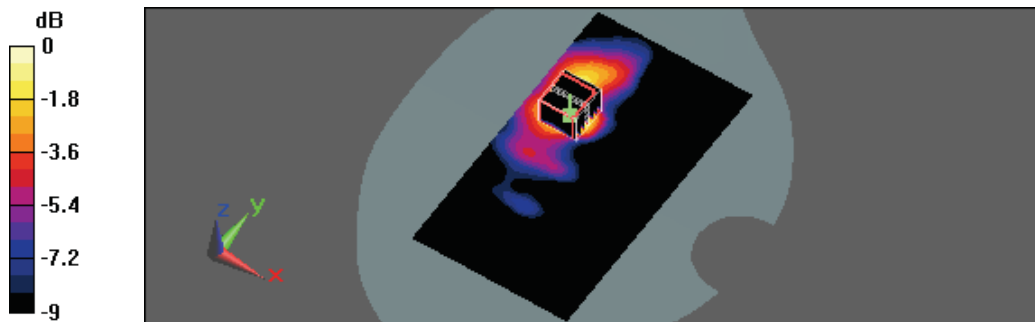

0 dB = 0.096mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 1:01:16 AM

Flat_802.11a_CH104_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5520$ MHz; $\sigma = 5.93$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.88, 3.88, 3.88); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.030 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.402 V/m; Power Drift = 0.076 dB
 Peak SAR (extrapolated) = 0.114 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00436 mW/g
 Maximum value of SAR (measured) = 0.014 mW/g



0 dB = 0.014mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 2:15:59 AM

Flat_802.11a_CH104_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5520 \text{ MHz}$; $\sigma = 5.93 \text{ mho/m}$; $\epsilon_r = 47$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.88, 3.88, 3.88); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.082 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.29 V/m; Power Drift = -0.188 dB
 Peak SAR (extrapolated) = 0.148 W/kg
SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.014 mW/g
 Maximum value of SAR (measured) = 0.075 mW/g

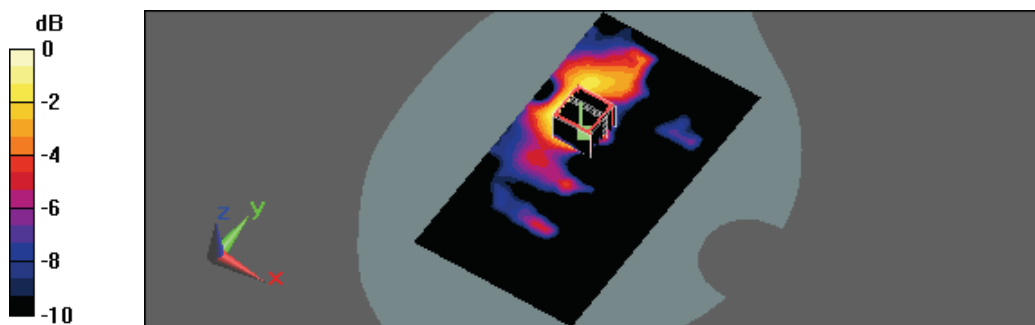

0 dB = 0.075mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 10:03:10 AM

Flat_802.11a_CH116_6M_Headset_Front Surfac to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5580 \text{ MHz}$; $\sigma = 6 \text{ mho/m}$; $\epsilon_r = 46.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.022 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0.790 V/m; Power Drift = 0.132 dB
 Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00305 mW/g
 Maximum value of SAR (measured) = 0.018 mW/g

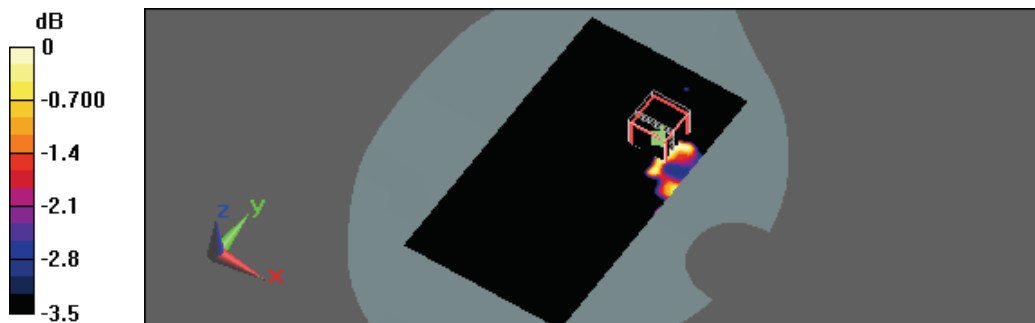

0 dB = 0.018mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 9:05:04 AM

Flat_802.11a_CH116_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5580 \text{ MHz}$; $\sigma = 6 \text{ mho/m}$; $\epsilon_r = 46.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.069 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.22 V/m; Power Drift = 0.110 dB
 Peak SAR (extrapolated) = 0.146 W/kg
SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.015 mW/g
 Maximum value of SAR (measured) = 0.068 mW/g

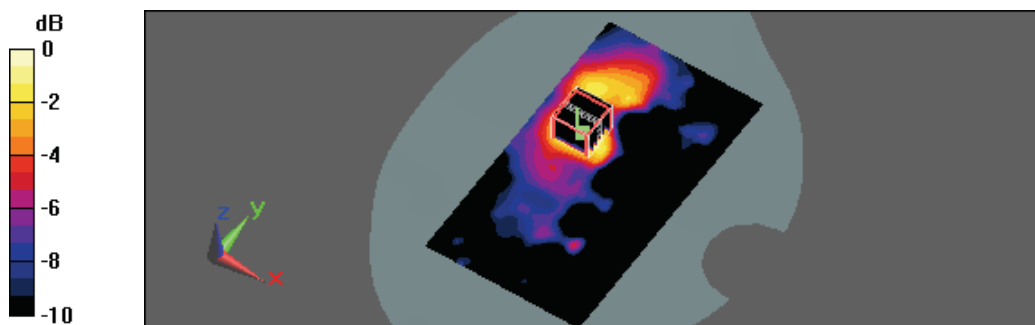

0 dB = 0.068mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 11:04:01 AM

Flat_802.11a_CH124_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.025 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.872 V/m; Power Drift = -0.190 dB
 Peak SAR (extrapolated) = 0.095 W/kg
SAR(1 g) = 0.00901 mW/g; SAR(10 g) = 0.00346 mW/g
 Maximum value of SAR (measured) = 0.017 mW/g

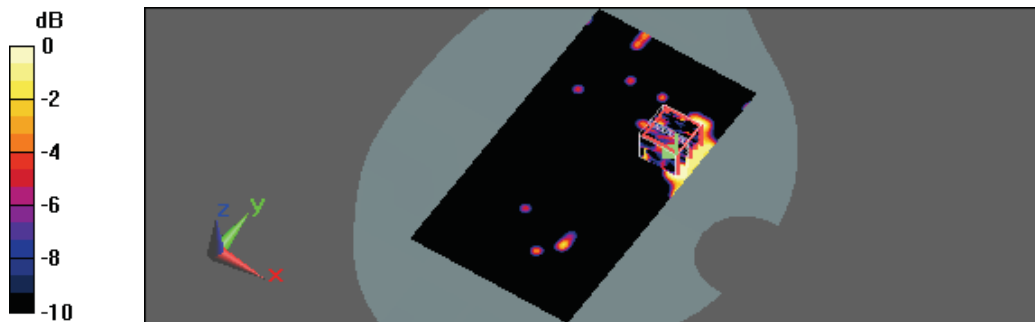

0 dB = 0.017mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 11:54:17 AM

Flat_802.11a_CH124_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5620 \text{ MHz}$; $\sigma = 6.04 \text{ mho/m}$; $\epsilon_r = 46.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.068 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.2 V/m; Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 0.166 W/kg
SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.015 mW/g
 Maximum value of SAR (measured) = 0.067 mW/g

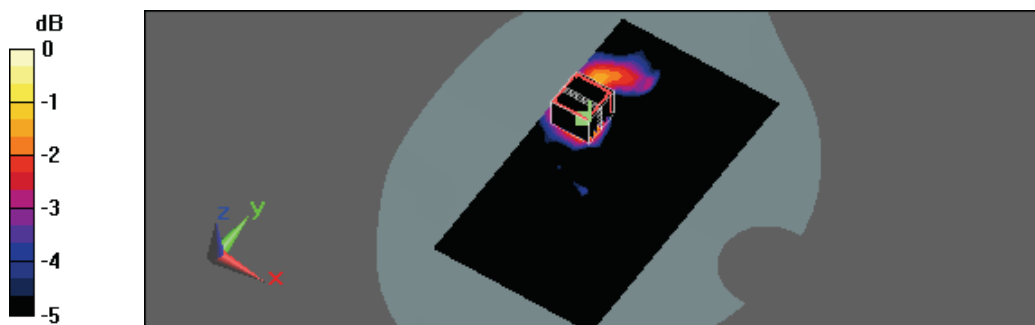

0 dB = 0.067mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 2:58:50 PM

Flat_802.11a_CH136_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5680$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.040 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.16 V/m; Power Drift = -0.177 dB
 Peak SAR (extrapolated) = 0.113 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00365 mW/g
 Maximum value of SAR (measured) = 0.016 mW/g

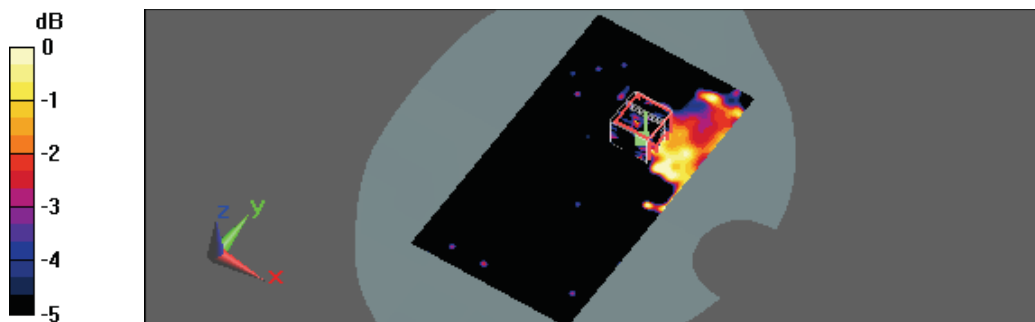

0 dB = 0.016mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 3:55:18 PM

Flat_802.11a_CH136_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5680$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.56, 3.56, 3.56); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.071 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.26 V/m; Power Drift = 0.090 dB
 Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.015 mW/g
 Maximum value of SAR (measured) = 0.068 mW/g

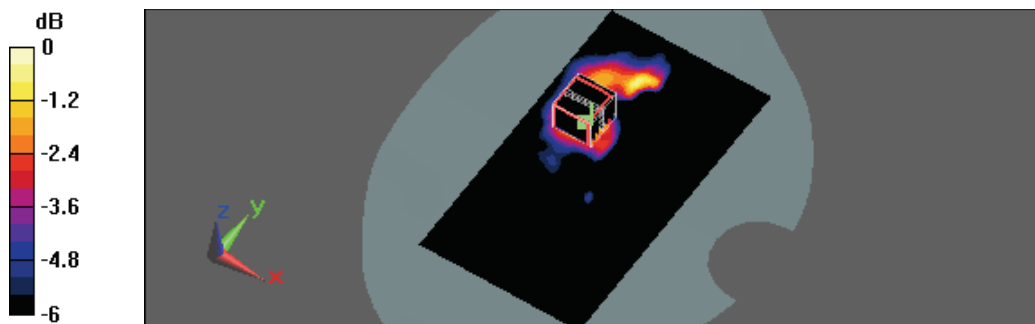

0 dB = 0.068mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 2:07:36 PM

Flat_802.11a_CH140_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5700$ MHz; $\sigma = 6.15$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.030 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.13 V/m; Power Drift = 0.199 dB
 Peak SAR (extrapolated) = 0.091 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00433 mW/g
 Maximum value of SAR (measured) = 0.017 mW/g

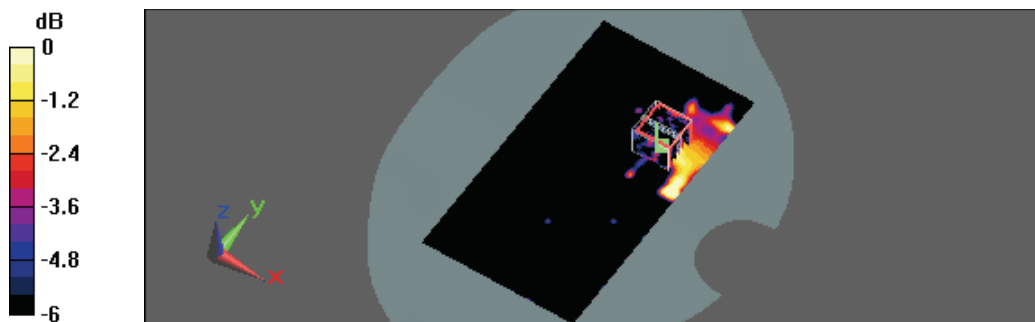

0 dB = 0.017mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 1:13:54 PM

Flat_802.11a_CH140_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5700$ MHz; $\sigma = 6.15$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x181x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.065 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.24 V/m; Power Drift = 0.032 dB
 Peak SAR (extrapolated) = 0.135 W/kg
SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.015 mW/g
 Maximum value of SAR (measured) = 0.061 mW/g

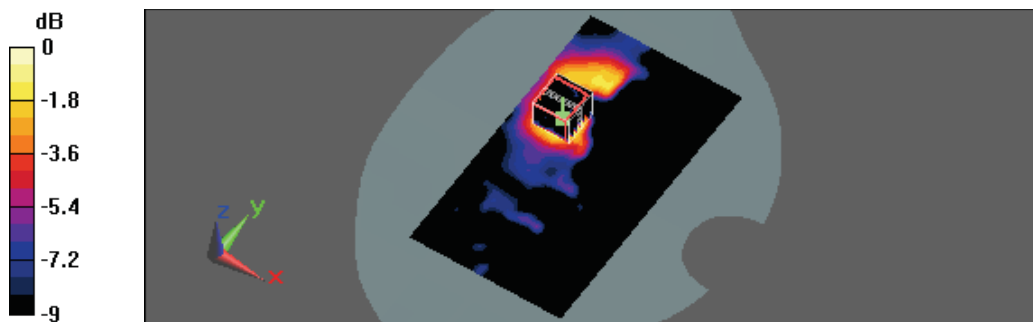

0 dB = 0.061mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 5:36:31 PM

Flat_802.11a_CH149_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 6.2 \text{ mho/m}$; $\epsilon_r = 46.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x161x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.023 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0.609 V/m; Power Drift = -0.116 dB
 Peak SAR (extrapolated) = 0.091 W/kg
SAR(1 g) = 0.0095 mW/g; SAR(10 g) = 0.00303 mW/g
 Maximum value of SAR (measured) = 0.018 mW/g

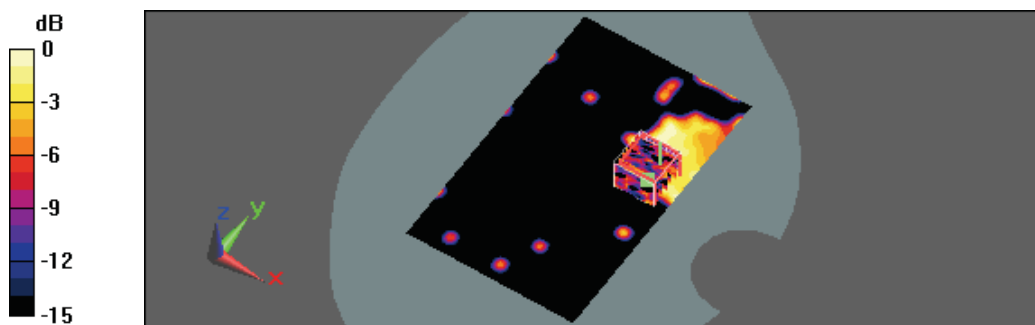

0 dB = 0.018mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/27/2011 4:46:56 PM

Flat_802.11a_CH149_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 6.2 \text{ mho/m}$; $\epsilon_r = 46.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (101x161x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.080 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.56 V/m; Power Drift = 0.099 dB
 Peak SAR (extrapolated) = 0.121 W/kg
SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.013 mW/g
 Maximum value of SAR (measured) = 0.058 mW/g

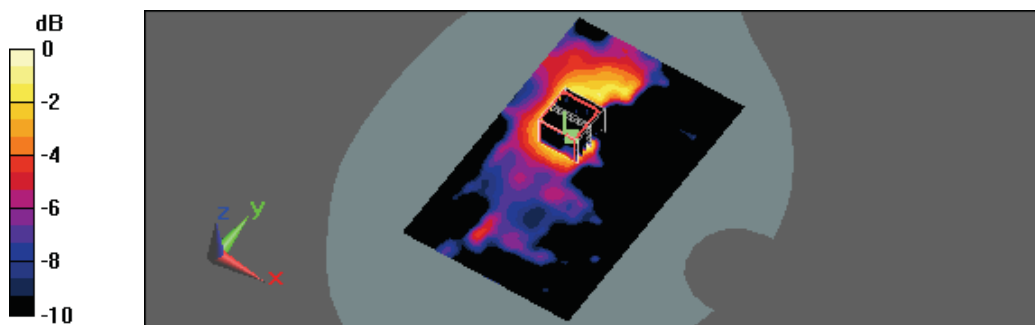

0 dB = 0.058mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 2:40:06 AM

Flat_802.11a_CH157_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.031 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.333 V/m; Power Drift = -0.099 dB
 Peak SAR (extrapolated) = 0.078 W/kg
SAR(1 g) = 0.00864 mW/g; SAR(10 g) = 0.0022 mW/g
 Maximum value of SAR (measured) = 0.013 mW/g

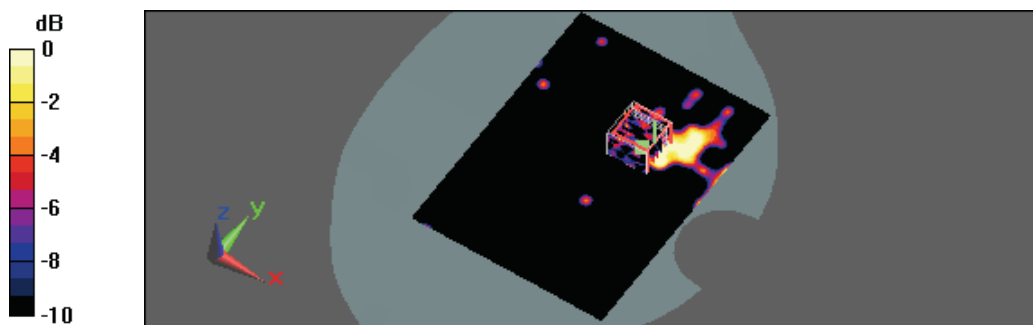

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 1:51:26 AM

Flat_802.11a_CH157_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 6.25 \text{ mho/m}$; $\epsilon_r = 46.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.071 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.23 V/m; Power Drift = 0.146 dB
 Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.013 mW/g
 Maximum value of SAR (measured) = 0.063 mW/g

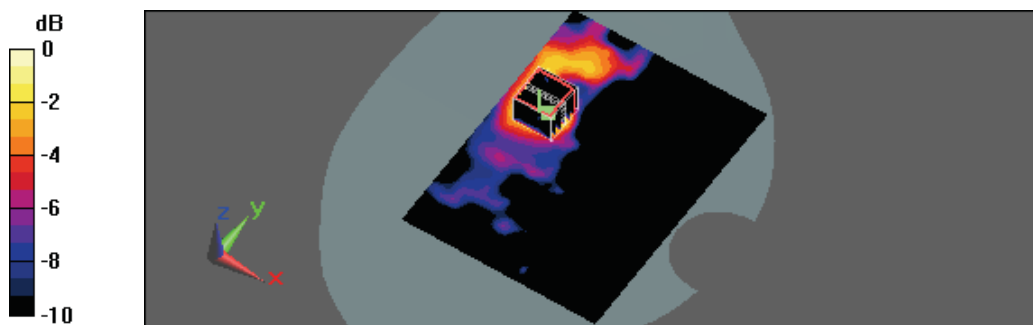

0 dB = 0.063mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 3:48:32 AM

Flat_802.11a_CH161_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5805 \text{ MHz}$; $\sigma = 6.28 \text{ mho/m}$; $\epsilon_r = 46.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.016 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0.428 V/m; Power Drift = 0.064 dB
 Peak SAR (extrapolated) = 0.104 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00402 mW/g
 Maximum value of SAR (measured) = 0.015 mW/g

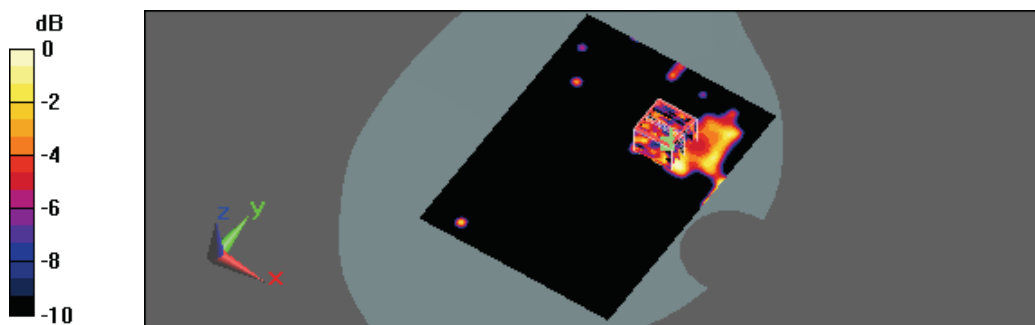

0 dB = 0.015mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 4:47:06 AM

Flat_802.11a_CH161_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5805 \text{ MHz}$; $\sigma = 6.28 \text{ mho/m}$; $\epsilon_r = 46.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.070 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 1.13 V/m; Power Drift = 0.147 dB
 Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.017 mW/g
 Maximum value of SAR (measured) = 0.070 mW/g

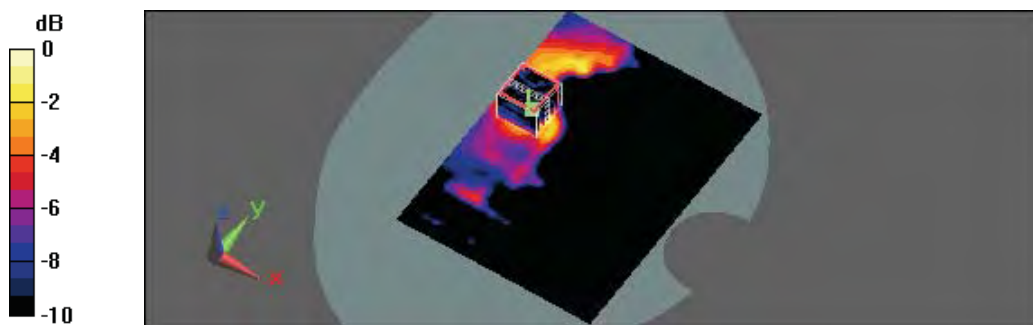

0 dB = 0.070mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 6:47:32 AM

Flat_802.11a_CH165_6M_Headset_Front Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.3$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.057 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.49 V/m; Power Drift = -0.173 dB
 Peak SAR (extrapolated) = 0.081 W/kg
SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00951 mW/g
 Maximum value of SAR (measured) = 0.026 mW/g

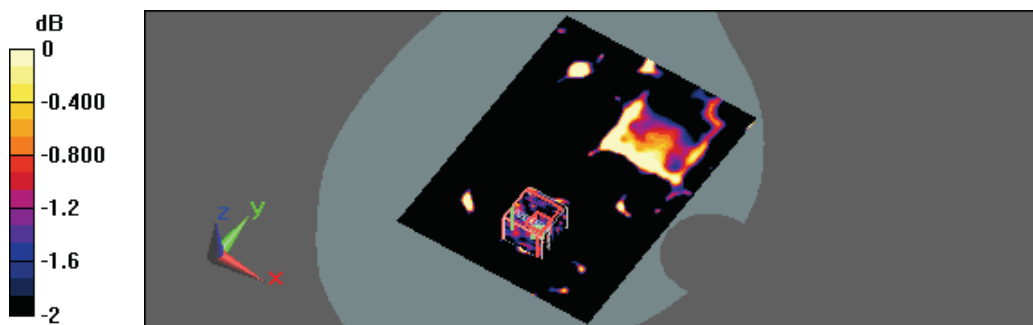

0 dB = 0.026mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/28/2011 5:58:38 AM

Flat_802.11a_CH165_6M_Headset_Back Surface to Phantom_15mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.3$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV3 - SN3519; ConvF(3.94, 3.94, 3.94); Calibrated: 2/25/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (121x161x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.076 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.64 V/m; Power Drift = 0.167 dB
 Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.025 mW/g
 Maximum value of SAR (measured) = 0.077 mW/g

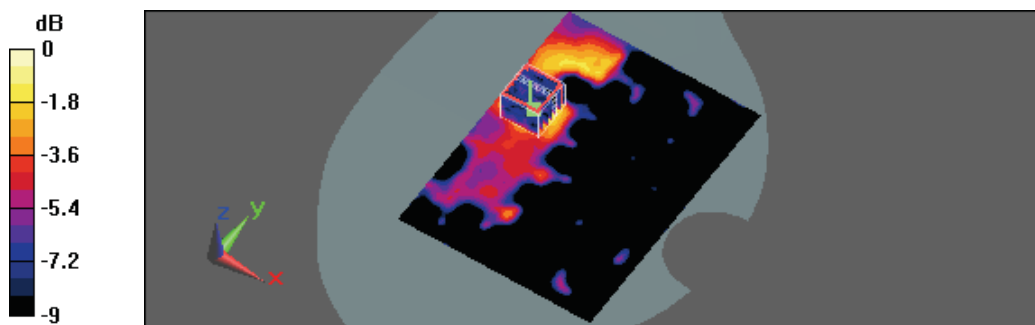

0 dB = 0.077mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 7:38:58 PM

Flat_GPRS850 CH128_3D2U_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.23 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 35.1 V/m; Power Drift = -0.00163 dB
 Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.810 mW/g
 Maximum value of SAR (measured) = 1.19 mW/g

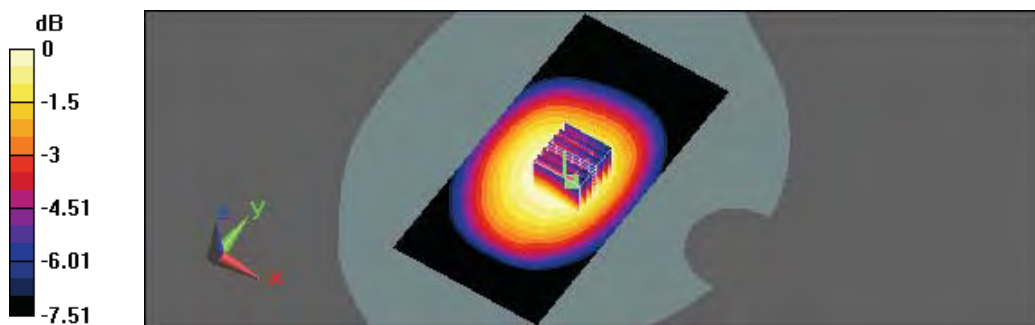

0 dB = 1.19mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 9:07:34 PM

Flat_GPRS850 CH128_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASYS Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):


Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.28 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 35.6 V/m; Power Drift = -0.00954 dB
 Peak SAR (extrapolated) = 1.4 W/kg
SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.808 mW/g
 Maximum value of SAR (measured) = 1.2 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 35.6 V/m; Power Drift = -0.00954 dB
 Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.567 mW/g
 Maximum value of SAR (measured) = 1.01 mW/g

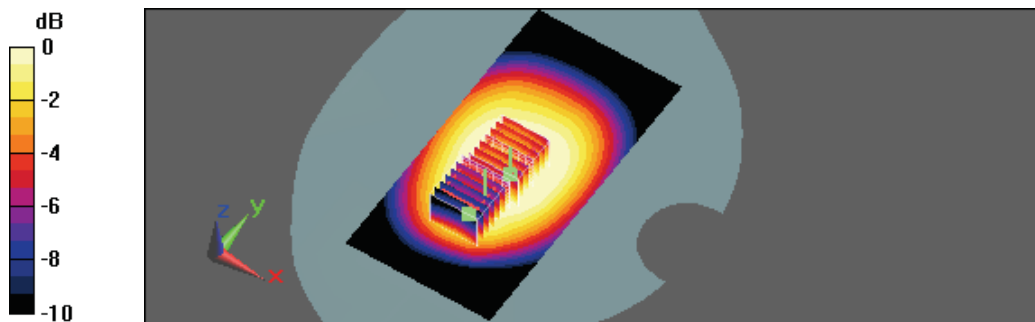

0 dB = 1.01mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 11:51:54 PM

Flat_GPRS850 CH128_3D2U_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.05 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 33.5 V/m; Power Drift = -0.0093 dB
 Peak SAR (extrapolated) = 1.3 W/kg
SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.584 mW/g
 Maximum value of SAR (measured) = 0.993 mW/g

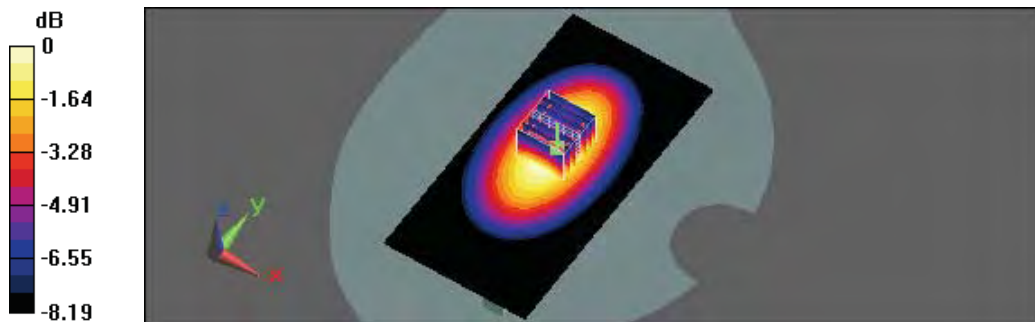

0 dB = 0.993mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 1:22:18 AM

Flat_GPRS850 CH128_3D2U_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.986 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 30.9 V/m; Power Drift = 0.038 dB
 Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.571 mW/g
 Maximum value of SAR (measured) = 0.983 mW/g

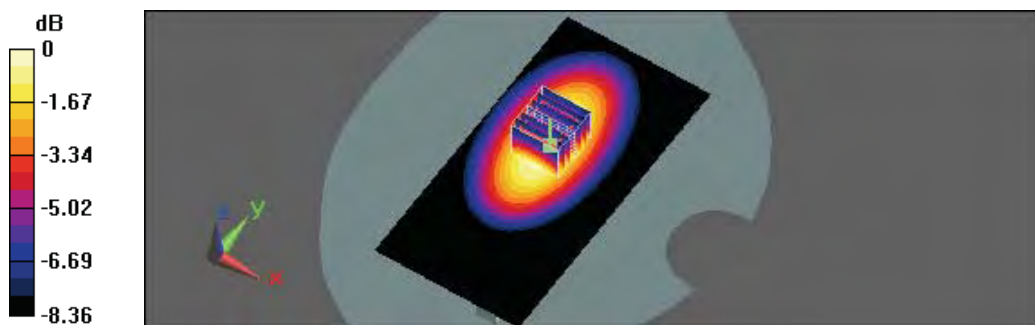

0 dB = 0.983mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 10:10:55 AM

Flat_GPRS 850 CH128_3D2U_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x81x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.227 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 15.4 V/m; Power Drift = 0.027 dB
 Peak SAR (extrapolated) = 0.348 W/kg
SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.093 mW/g
 Maximum value of SAR (measured) = 0.217 mW/g

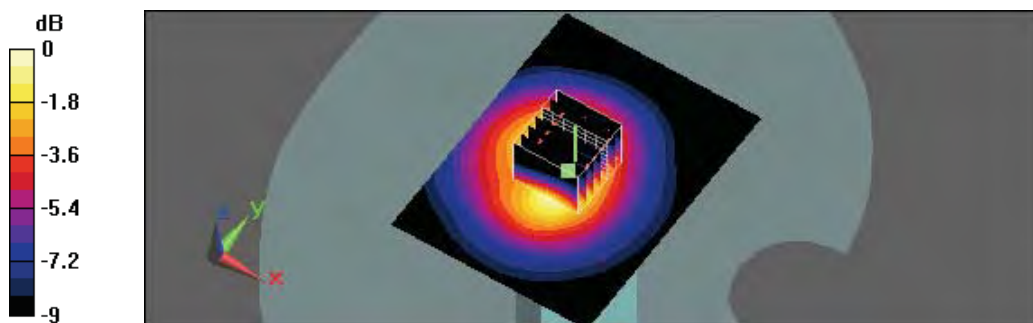

0 dB = 0.217mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 8:07:45 PM

Flat_GPRS850 CH190_3D2U_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.982 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.987 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 31.4 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.651 mW/g
 Maximum value of SAR (measured) = 0.966 mW/g

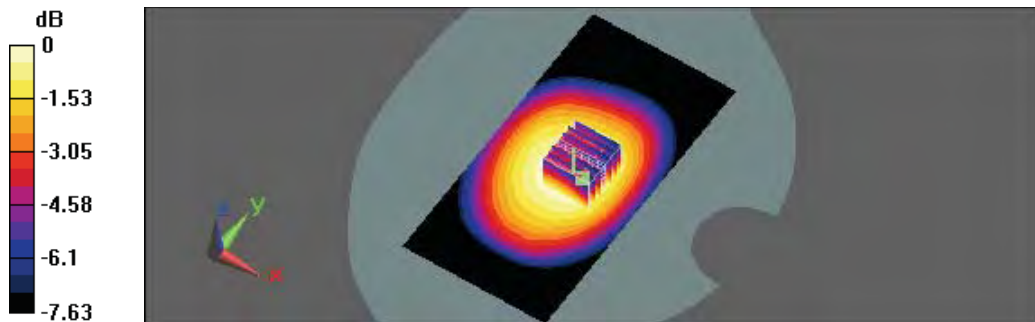

0 dB = 0.966mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 10:13:43 PM

Flat_GPRS850 CH190_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):


Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.942 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 30.2 V/m; Power Drift = -0.00231 dB
 Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.630 mW/g
 Maximum value of SAR (measured) = 0.934 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 30.2 V/m; Power Drift = -0.00231 dB
 Peak SAR (extrapolated) = 0.870 W/kg
SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.421 mW/g
 Maximum value of SAR (measured) = 0.742 mW/g

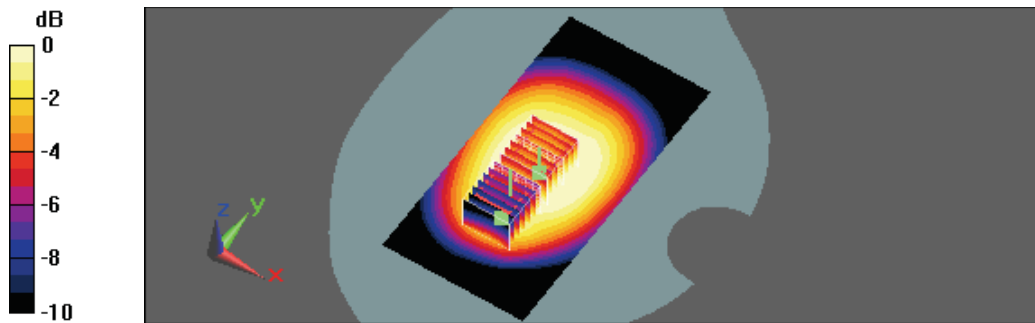

0 dB = 0.742mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 12:21:34 AM

Flat_GPRS850 CH190_3D2U_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.982 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.808 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 29.3 V/m; Power Drift = -0.119 dB
 Peak SAR (extrapolated) = 0.980 W/kg
SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.464 mW/g
 Maximum value of SAR (measured) = 0.782 mW/g

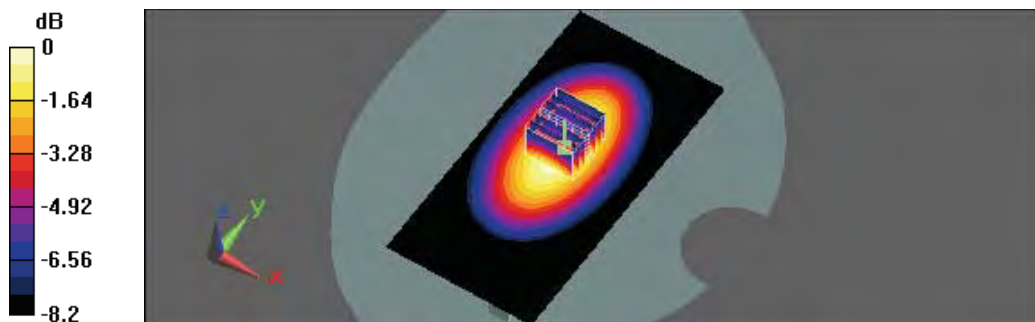

0 dB = 0.782mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 1:51:17 AM

Flat_GPRS850 CH190_3D2U_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.795 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 27.5 V/m; Power Drift = -0.012 dB
 Peak SAR (extrapolated) = 0.975 W/kg
SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.456 mW/g
 Maximum value of SAR (measured) = 0.770 mW/g

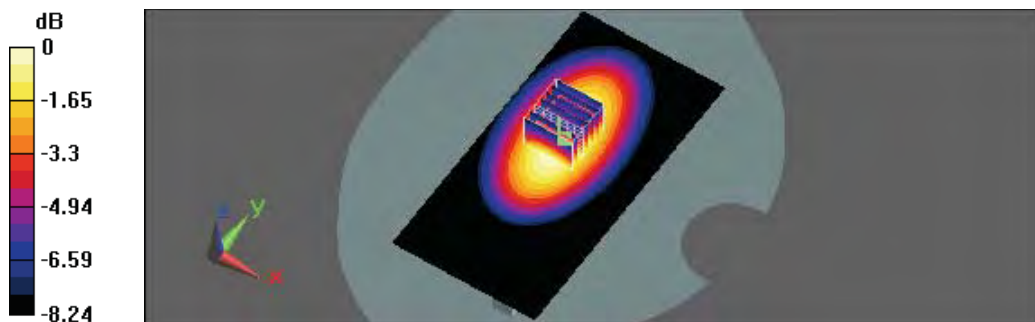

0 dB = 0.770mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 8:36:53 PM

Flat_GPRS850 CH251_3D2U_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.804 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 28.2 V/m; Power Drift = -0.067 dB
 Peak SAR (extrapolated) = 0.933 W/kg
SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.536 mW/g
 Maximum value of SAR (measured) = 0.788 mW/g

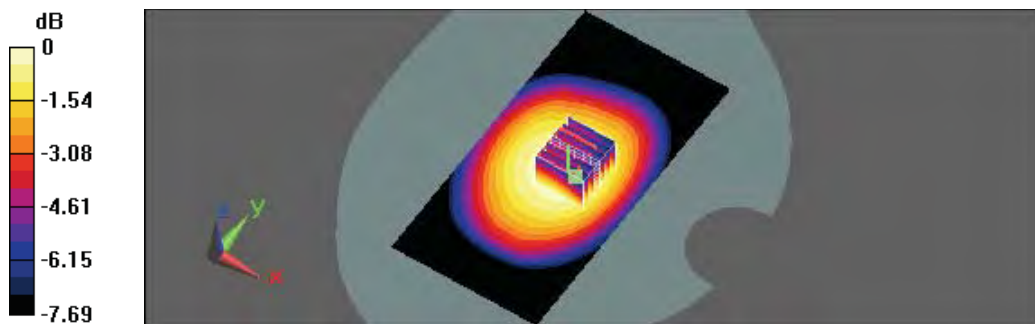

0 dB = 0.788mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/16/2011 10:59:46 PM

Flat_GPRS850 CH251_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.757 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 26.9 V/m; Power Drift = -0.045 dB
 Peak SAR (extrapolated) = 0.880 W/kg
SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.509 mW/g
 Maximum value of SAR (measured) = 0.748 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 26.9 V/m; Power Drift = -0.045 dB
 Peak SAR (extrapolated) = 0.684 W/kg
SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.330 mW/g
 Maximum value of SAR (measured) = 0.583 mW/g

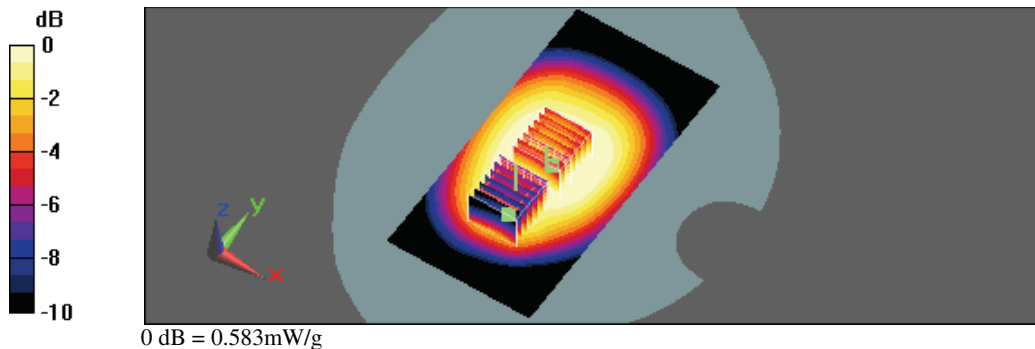

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 12:50:22 AM

Flat_GPRS850 CH251_3D2U_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.662 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 25.7 V/m; Power Drift = 0.00956 dB
 Peak SAR (extrapolated) = 0.814 W/kg
SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.382 mW/g
 Maximum value of SAR (measured) = 0.649 mW/g

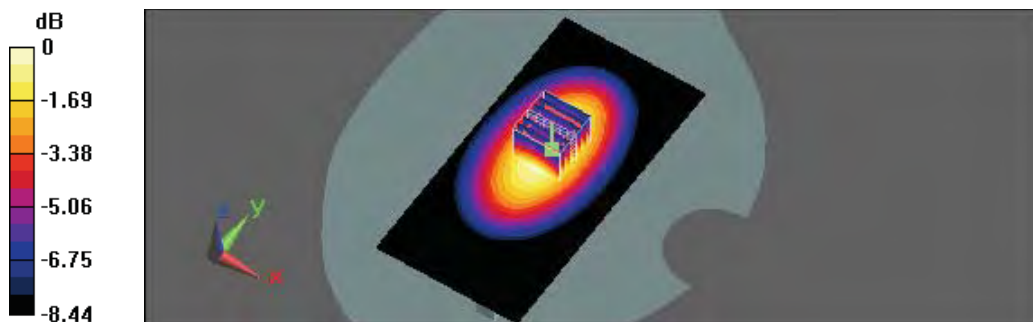

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 2:41:01 AM

Flat_GPRS850 CH251_3D2U_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.728 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 27.1 V/m; Power Drift = -0.027 dB
 Peak SAR (extrapolated) = 0.875 W/kg
SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.411 mW/g
 Maximum value of SAR (measured) = 0.692 mW/g

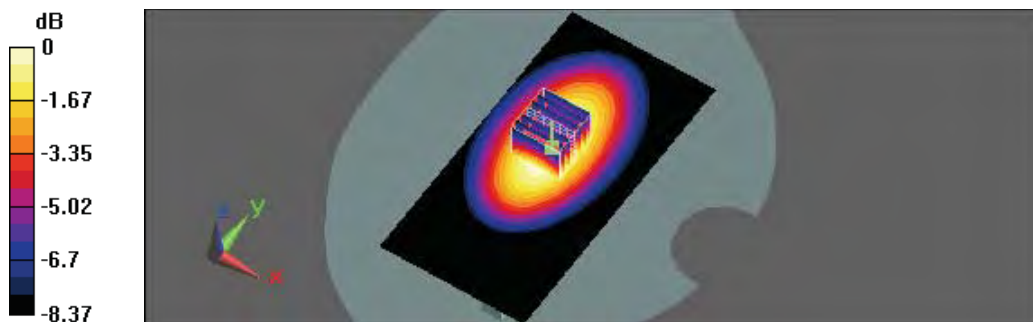

0 dB = 0.692mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 7:49:50 PM

Flat_GPRS PCS CH512_3D2U_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.813 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 6.99 V/m; Power Drift = -0.061 dB
 Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.408 mW/g
 Maximum value of SAR (measured) = 0.942 mW/g

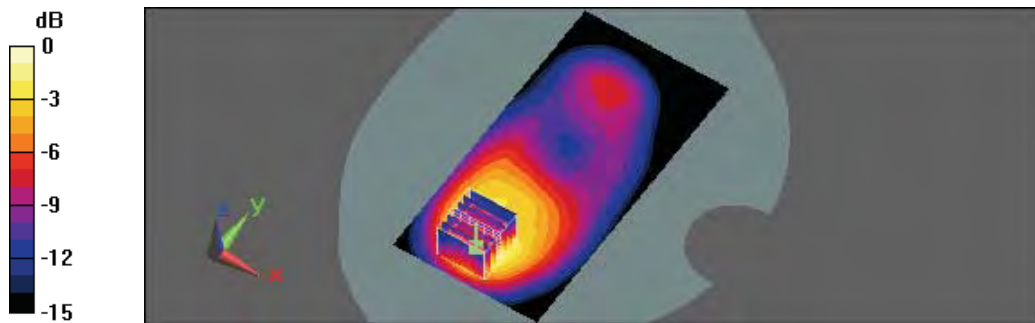

0 dB = 0.942mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 8:22:30 PM

Flat_GPRS PCS CH512_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.05 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.5 V/m; Power Drift = -0.017 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.458 mW/g
 Maximum value of SAR (measured) = 1.01 mW/g

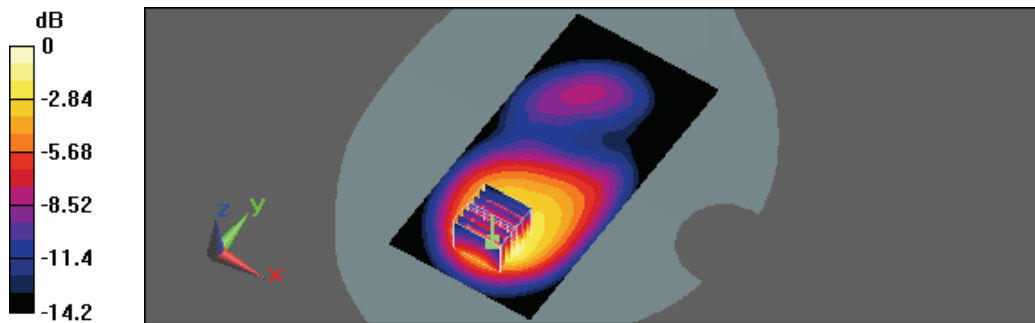

0 dB = 1.01mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 6:19:33 PM

Flat_GPRS PCS CH512_3D2U_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x81x1):


Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.73 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 32.1 V/m; Power Drift = 0.069 dB
 Peak SAR (extrapolated) = 2.27 W/kg
SAR(1 g) = 1.32 mW/g; SAR(10 g) = 0.679 mW/g
 Maximum value of SAR (measured) = 1.68 mW/g

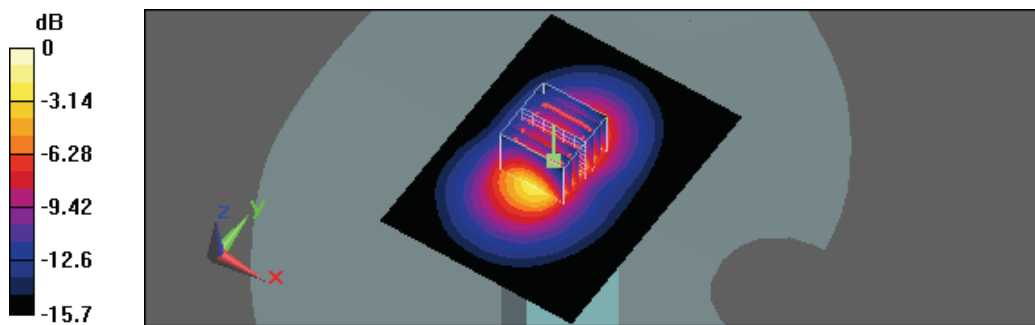

0 dB = 1.68mW/g

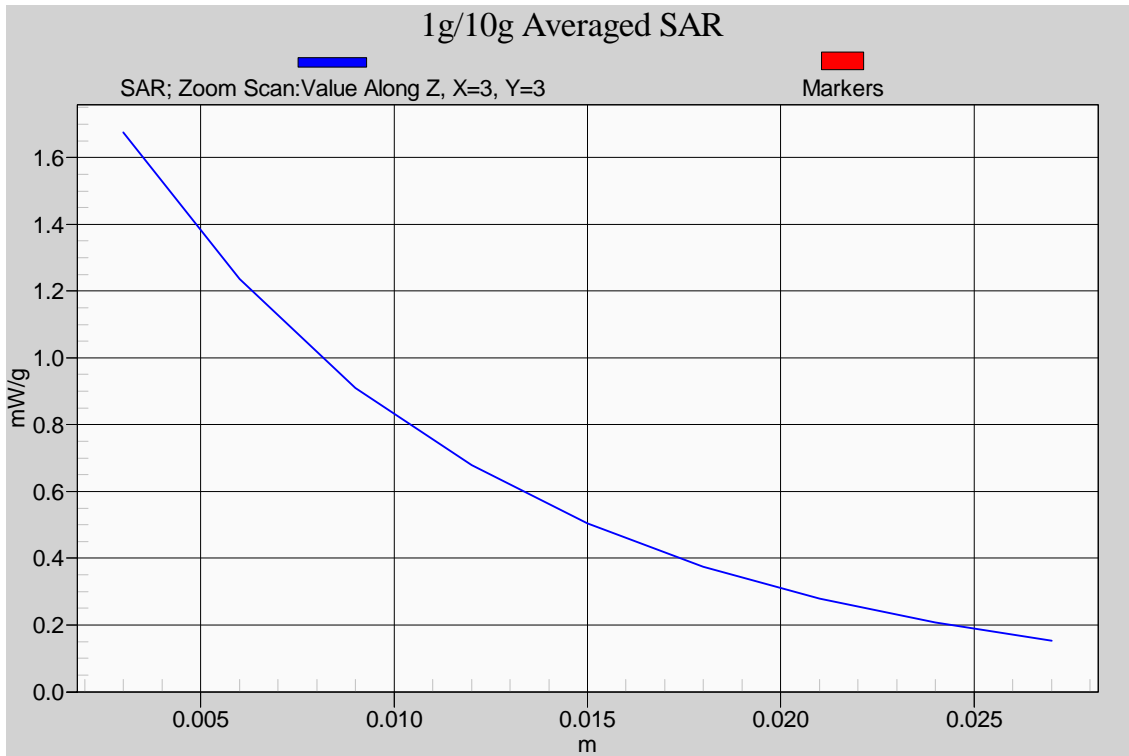

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 9:49:06 PM

Flat_GPRS PCS CH512_3D2U_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.092 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 7.48 V/m; Power Drift = 0.070 dB
 Peak SAR (extrapolated) = 0.124 W/kg
SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.043 mW/g
 Maximum value of SAR (measured) = 0.090 mW/g

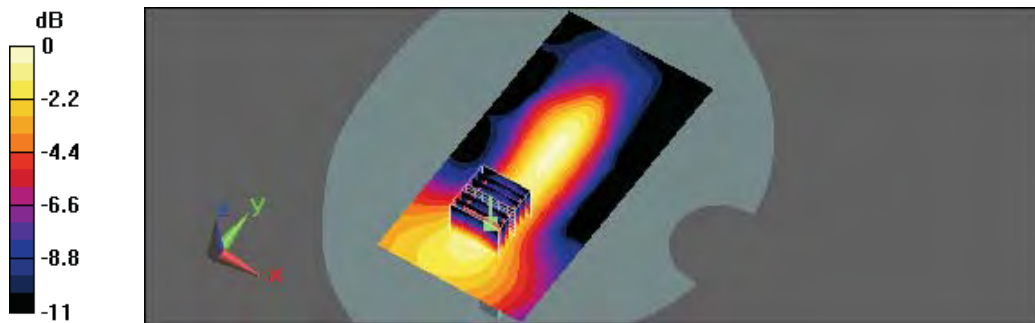

0 dB = 0.090mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 10:19:26 PM

Flat_GPRS PCS CH512_3D2U_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.106 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.84 V/m; Power Drift = -0.028 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.050 mW/g
Maximum value of SAR (measured) = 0.104 mW/g

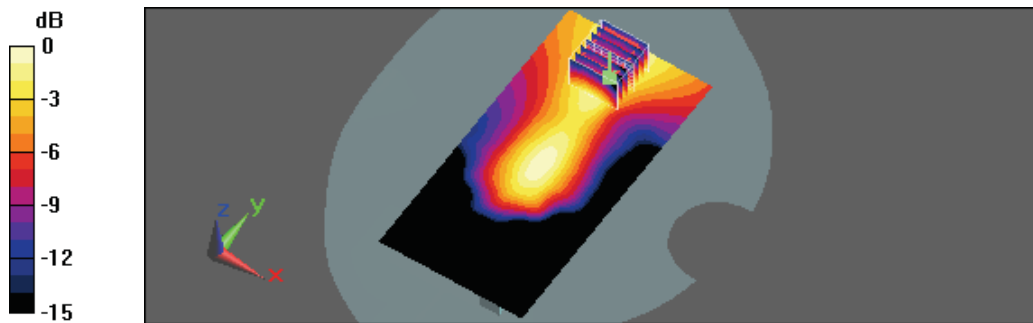

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 8:50:20 PM

Flat_GPRS PCS CH661_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.901 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.88 V/m; Power Drift = -0.039 dB
 Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.716 mW/g; SAR(10 g) = 0.393 mW/g
 Maximum value of SAR (measured) = 0.892 mW/g

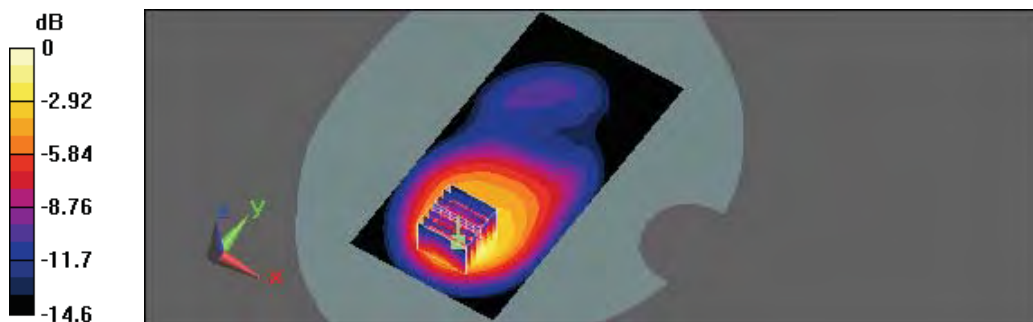

0 dB = 0.892mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 6:51:46 PM

Flat_GPRS PCS CH661_3D2U_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x81x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.44 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 28.9 V/m; Power Drift = 0.060 dB
 Peak SAR (extrapolated) = 1.9 W/kg
SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.554 mW/g
 Maximum value of SAR (measured) = 1.38 mW/g

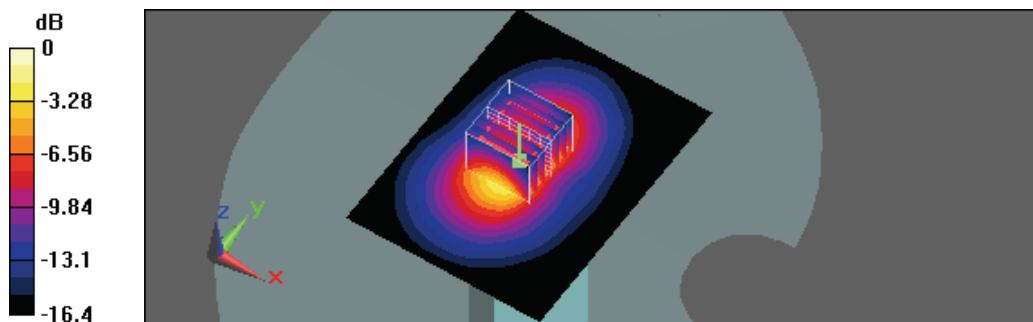

0 dB = 1.38mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 9:18:03 PM

Flat_GPRS PCS CH810_3D2U_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.854 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.61 V/m; Power Drift = -0.00827 dB
 Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.373 mW/g
 Maximum value of SAR (measured) = 0.856 mW/g

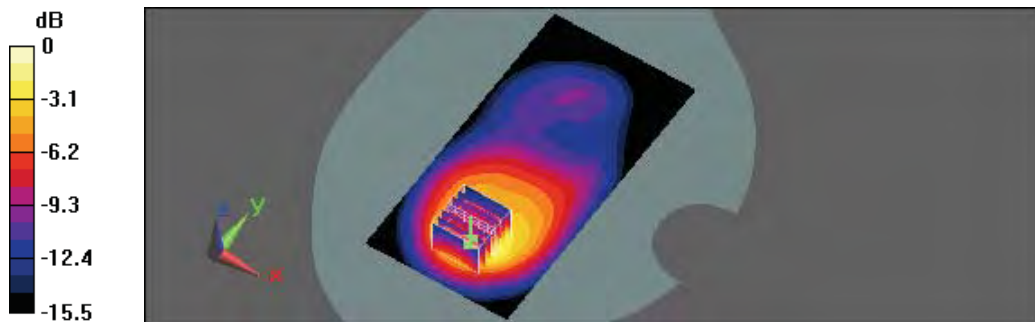

0 dB = 0.856mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/15/2011 7:16:22 PM

Flat_GPRS PCS CH810_3D2U_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: GPRS PCS (3Down,2Up); Frequency: 1909.8 MHz;Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.34 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.7 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

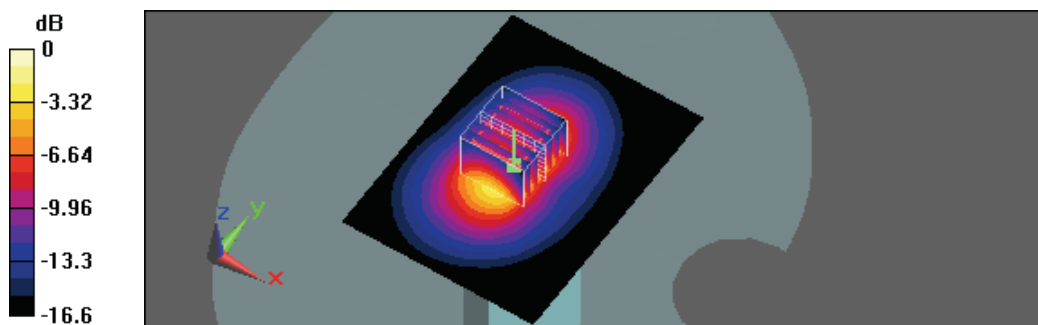

0 dB = 1.31mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 3:01:00 AM

Flat_WCDMA Band II CH9262_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.02 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.44 V/m; Power Drift = -0.063 dB
 Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.457 mW/g
 Maximum value of SAR (measured) = 1.02 mW/g

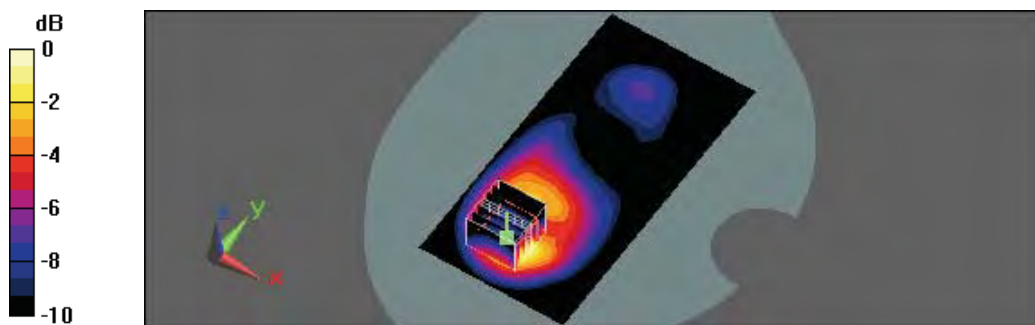

0 dB = 1.02mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 3:36:04 AM

Flat_WCDMA Band II CH9262_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.15 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.1 V/m; Power Drift = -0.130 dB
 Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.511 mW/g
 Maximum value of SAR (measured) = 1.1 mW/g

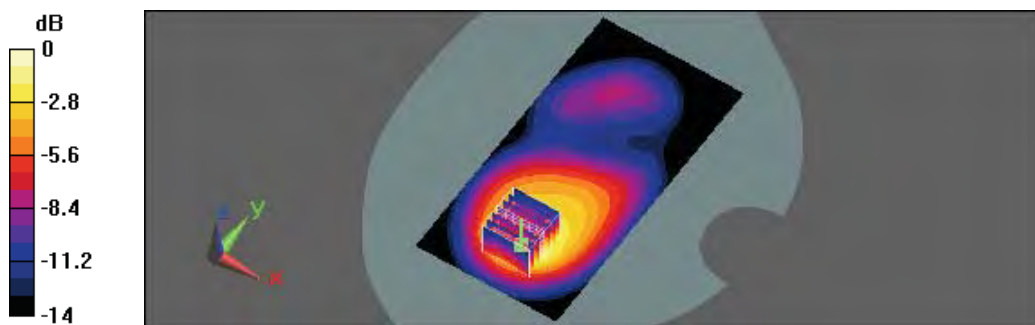

0 dB = 1.1mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 4:24:33 PM

Flat_WCDMA Band II CH9262_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x71x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.08 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 26.4 V/m; Power Drift = 0.017 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 0.884 mW/g; SAR(10 g) = 0.447 mW/g
Maximum value of SAR (measured) = 1.14 mW/g

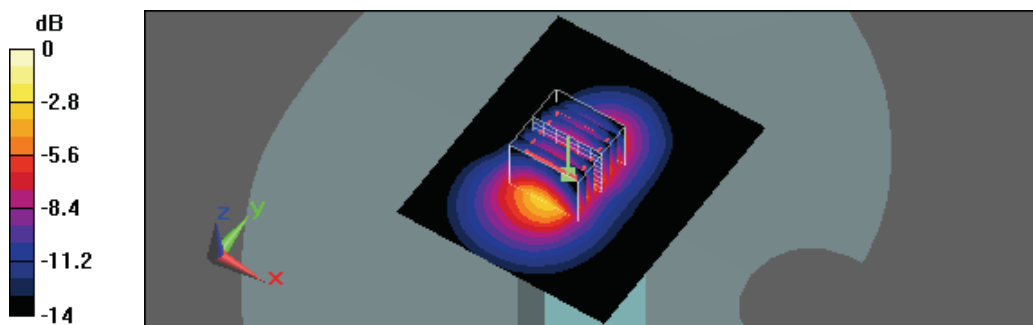

0 dB = 1.14mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 2:34:17 AM

Flat_WCDMA Band II CH9400_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.08 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 7.72 V/m; Power Drift = 0.127 dB
 Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.499 mW/g
 Maximum value of SAR (measured) = 1.14 mW/g

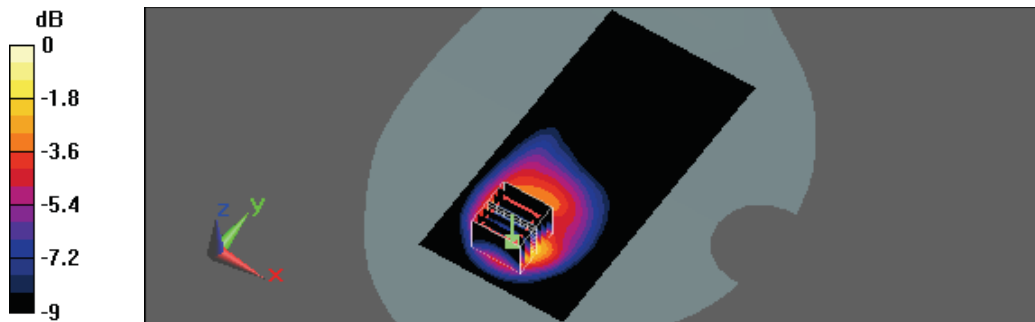

0 dB = 1.14mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 4:02:31 AM

Flat_WCDMA Band II CH9400_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.22 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.37 V/m; Power Drift = 0.027 dB
 Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 1.000 mW/g; SAR(10 g) = 0.552 mW/g
 Maximum value of SAR (measured) = 1.23 mW/g

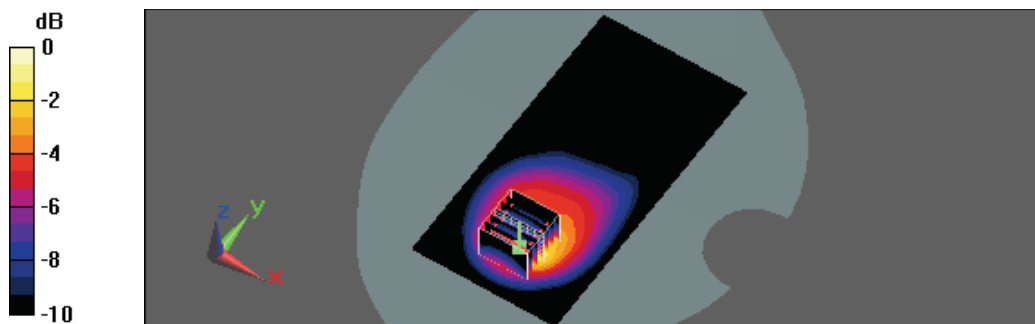

0 dB = 1.23mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 4:52:57 PM

Flat_WCDMA Band II CH9400_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x71x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.23 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 27.7 V/m; Power Drift = 0.192 dB
 Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.506 mW/g
 Maximum value of SAR (measured) = 1.29 mW/g

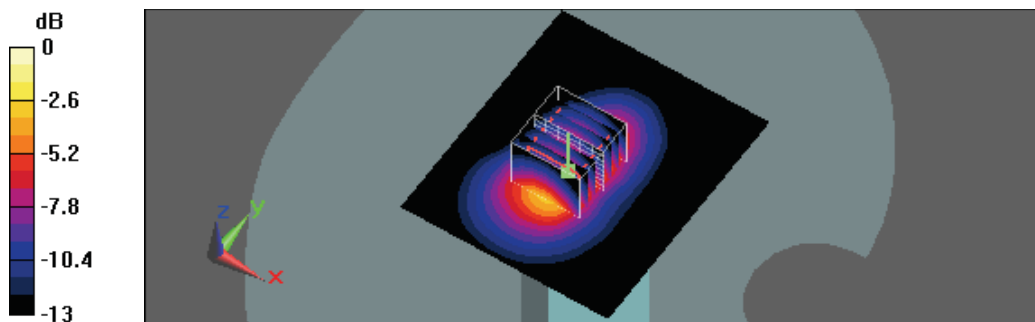

0 dB = 1.29mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 7:18:39 PM

Flat_WCDMA Band II CH9538_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.945 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.65 V/m; Power Drift = 0.064 dB
 Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.441 mW/g
 Maximum value of SAR (measured) = 0.982 mW/g

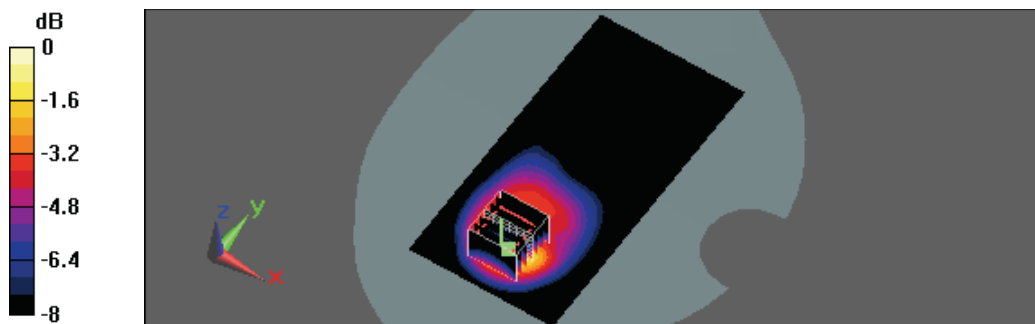

0 dB = 0.982mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 9:01:21 PM

Flat_WCDMA Band II CH9538_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.31 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.43 V/m; Power Drift = 0.052 dB
 Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.600 mW/g
 Maximum value of SAR (measured) = 1.35 mW/g

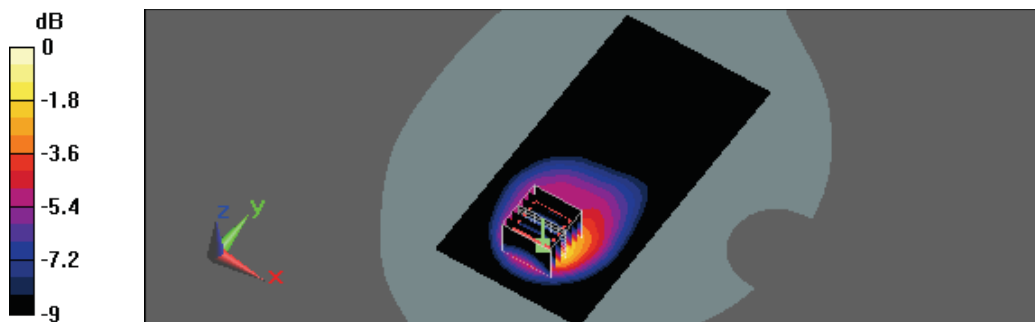

0 dB = 1.35mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 7:51:59 PM

Flat_WCDMA Band II CH9538_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.180 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.21 V/m; Power Drift = -0.042 dB
 Peak SAR (extrapolated) = 0.255 W/kg
SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.085 mW/g
 Maximum value of SAR (measured) = 0.182 mW/g

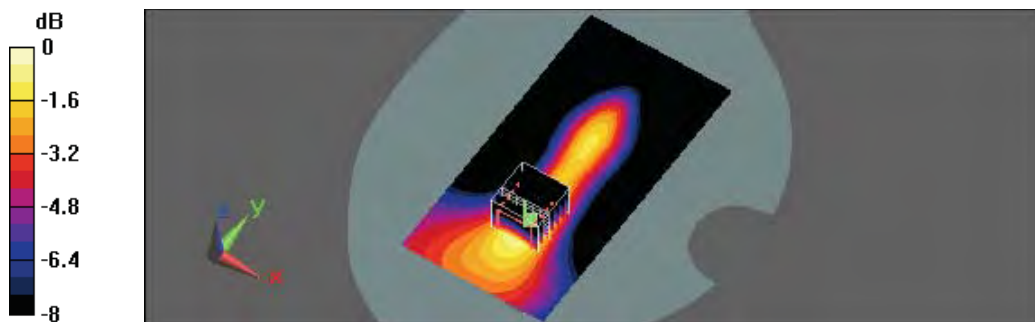

0 dB = 0.182mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 8:30:50 PM

Flat_WCDMA Band II CH9538_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.163 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.63 V/m; Power Drift = -0.019 dB
 Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.076 mW/g
 Maximum value of SAR (measured) = 0.158 mW/g

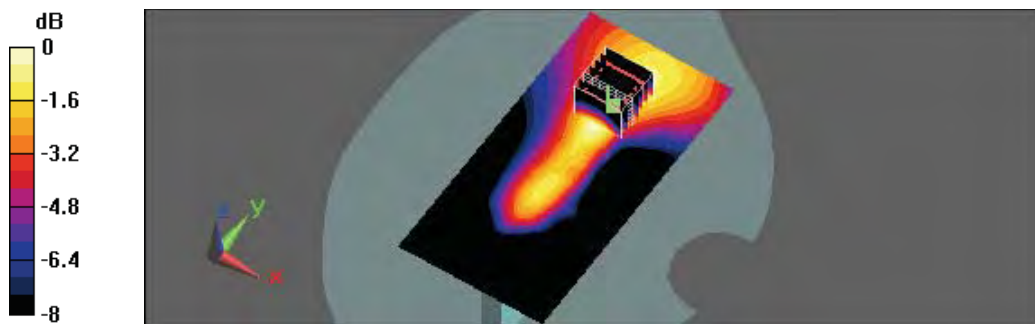

0 dB = 0.158mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/22/2011 5:15:45 PM

Flat_WCDMA Band II CH9538_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.46 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 30.2 V/m; Power Drift = 0.058 dB
 Peak SAR (extrapolated) = 2.02 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.584 mW/g
 Maximum value of SAR (measured) = 1.49 mW/g

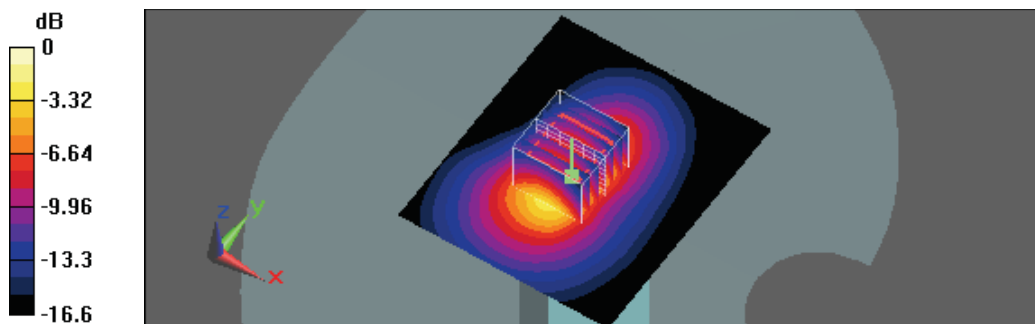

0 dB = 1.49mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 10:46:06 AM

Flat_WCDMA Band IV CH1413_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.587 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.08 V/m; Power Drift = 0.079 dB
 Peak SAR (extrapolated) = 0.799 W/kg
SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.280 mW/g
 Maximum value of SAR (measured) = 0.612 mW/g

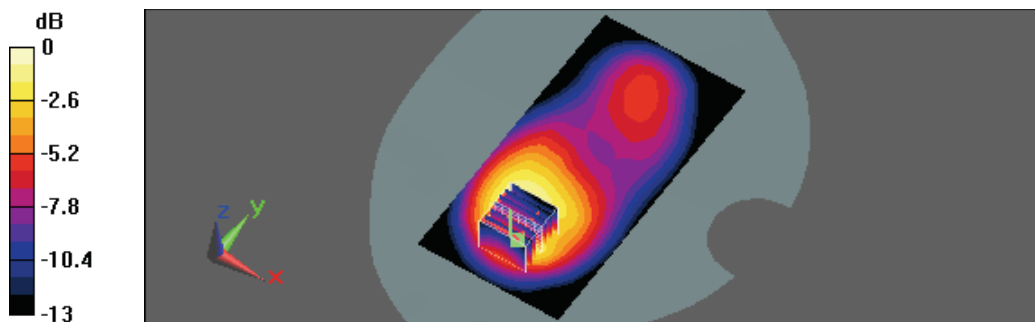

0 dB = 0.612mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 10:02:55 AM

Flat_WCDMA Band IV CH1413_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):


Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.671 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.52 V/m; Power Drift = -0.077 dB
 Peak SAR (extrapolated) = 0.873 W/kg
SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.338 mW/g
 Maximum value of SAR (measured) = 0.656 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.52 V/m; Power Drift = -0.077 dB
 Peak SAR (extrapolated) = 0.953 W/kg
SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.334 mW/g
 Maximum value of SAR (measured) = 0.724 mW/g

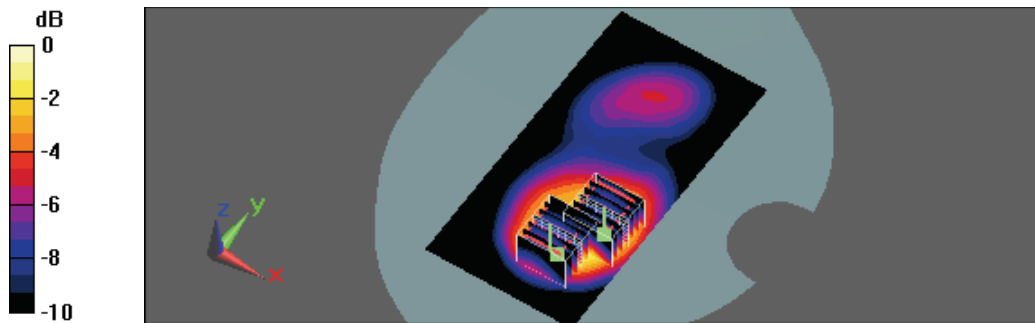

0 dB = 0.724mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 11:16:15 AM

Flat_WCDMA Band IV CH1413_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.126 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 7.09 V/m; Power Drift = 0.053 dB
 Peak SAR (extrapolated) = 0.179 W/kg
SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.062 mW/g
 Maximum value of SAR (measured) = 0.131 mW/g

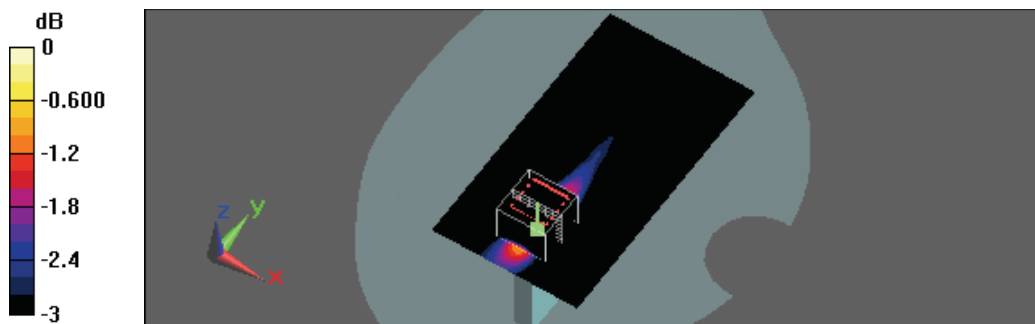

0 dB = 0.131mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 11:45:21 AM

Flat_WCDMA Band IV CH1413_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.093 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.17 V/m; Power Drift = 0.082 dB
 Peak SAR (extrapolated) = 0.135 W/kg
SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.047 mW/g
 Maximum value of SAR (measured) = 0.100 mW/g

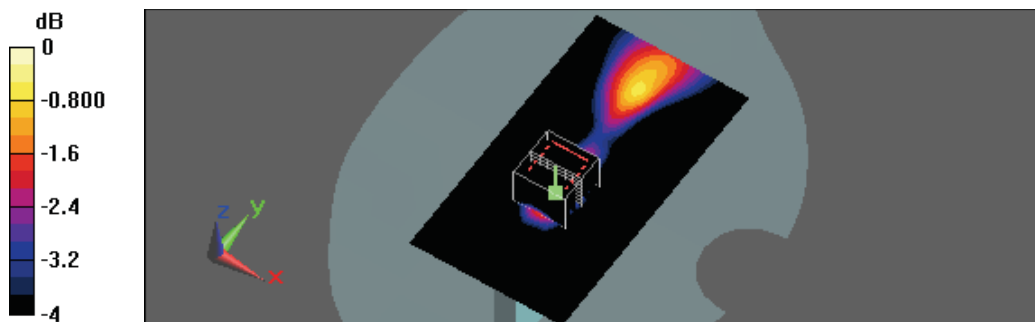

0 dB = 0.100mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/23/2011 9:36:49 AM

Flat_WCDMA Band IV CH1413_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.57, 7.57, 7.57); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.01 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 23.4 V/m; Power Drift = 0.171 dB
 Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.389 mW/g
 Maximum value of SAR (measured) = 0.928 mW/g

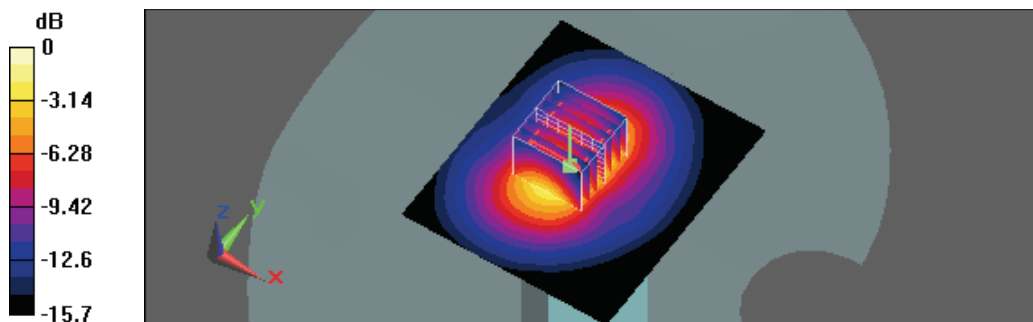

0 dB = 0.928mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 11:09:10 AM

Flat_WCDMA Band V CH4132_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.423 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 20.6 V/m; Power Drift = -0.018 dB
 Peak SAR (extrapolated) = 0.508 W/kg
SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.294 mW/g
 Maximum value of SAR (measured) = 0.427 mW/g

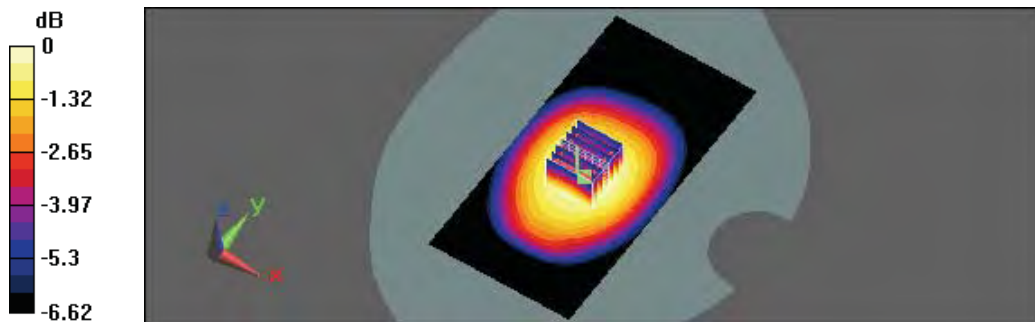

0 dB = 0.427mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 10:42:24 AM

Flat_WCDMA Band V CH4132_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.397 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 19.1 V/m; Power Drift = 0.026 dB
 Peak SAR (extrapolated) = 0.474 W/kg
SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.272 mW/g
 Maximum value of SAR (measured) = 0.399 mW/g

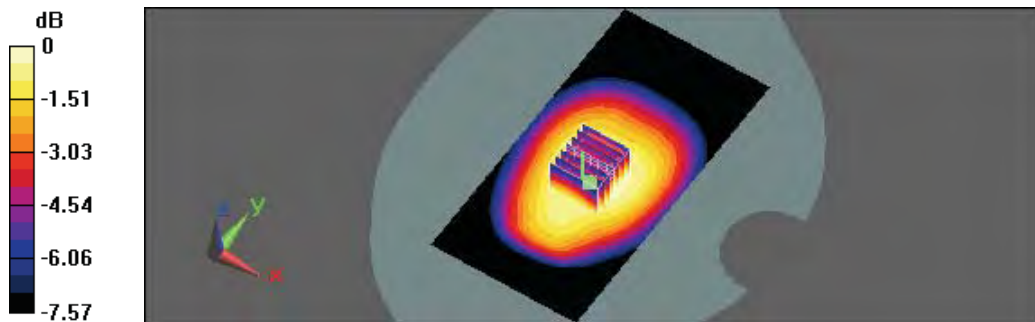

0 dB = 0.399mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 11:40:32 AM

Flat_WCDMA Band V CH4132_Edge Left to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (51x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.440 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 21.1 V/m; Power Drift = 0.053 dB
 Peak SAR (extrapolated) = 0.549 W/kg
SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.256 mW/g
 Maximum value of SAR (measured) = 0.437 mW/g

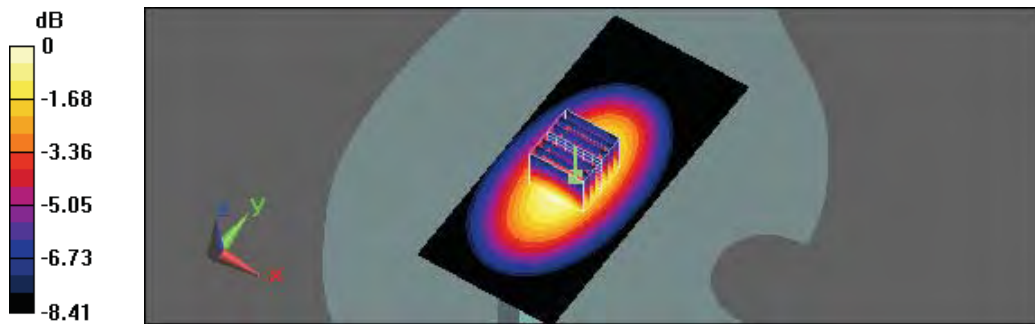

0 dB = 0.437mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 12:06:19 PM

Flat_WCDMA Band V CH4132_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (51x111x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.400 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 19.9 V/m; Power Drift = 0.046 dB
 Peak SAR (extrapolated) = 0.507 W/kg
SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.240 mW/g
 Maximum value of SAR (measured) = 0.407 mW/g

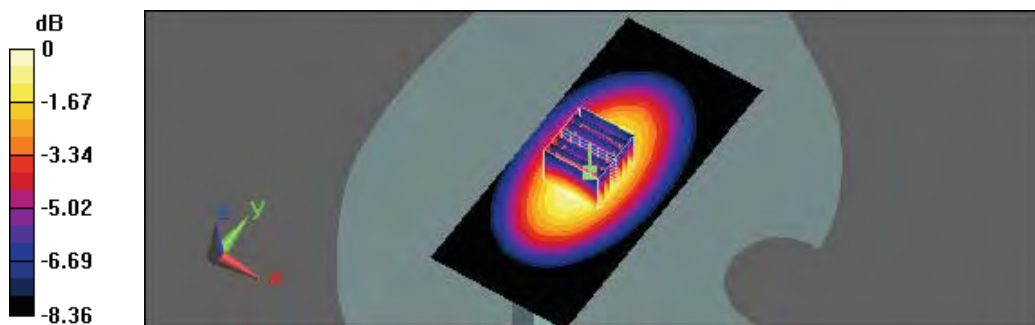

0 dB = 0.407mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 12:31:56 PM

Flat_WCDMA Band V CH4132_Edge Bottom to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x81x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.106 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 10.4 V/m; Power Drift = 0.060 dB
 Peak SAR (extrapolated) = 0.177 W/kg
SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.047 mW/g
 Maximum value of SAR (measured) = 0.109 mW/g

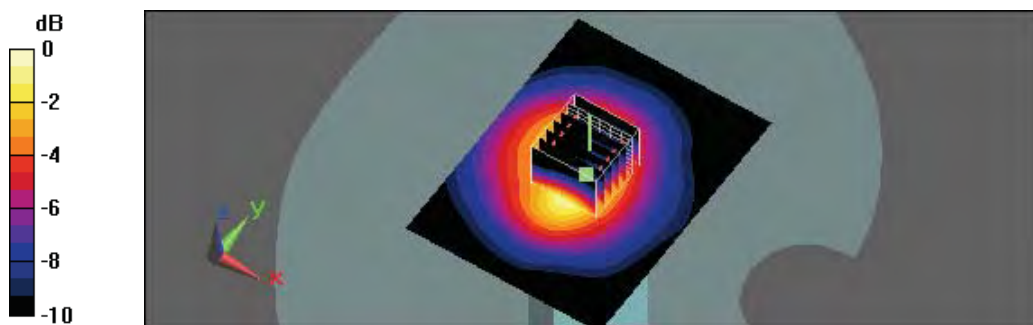

0 dB = 0.109mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/18/2011 3:02:21 AM

Flat_802.11b CH11_1M_Front Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.00101 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.729 V/m; Power Drift = -0.092 dB
 Peak SAR (extrapolated) = 0.00435 W/kg
SAR(1 g) = 0.0000167 mW/g; SAR(10 g) = 0.00000328 mW/g
 Maximum value of SAR (measured) = 0.00596 mW/g

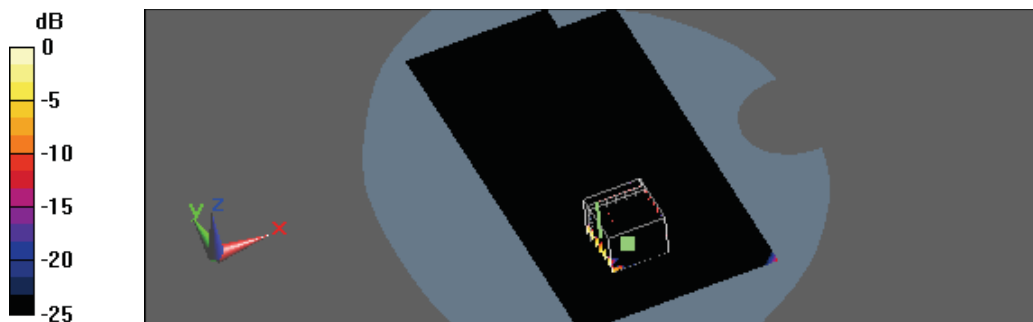

0 dB = 0.00596mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 3:35:21 PM

Flat_802.11b CH11_1M_Back Surface to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x121x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.061 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.804 V/m; Power Drift = -0.124 dB
 Peak SAR (extrapolated) = 0.054 W/kg
SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00787 mW/g
 Maximum value of SAR (measured) = 0.035 mW/g

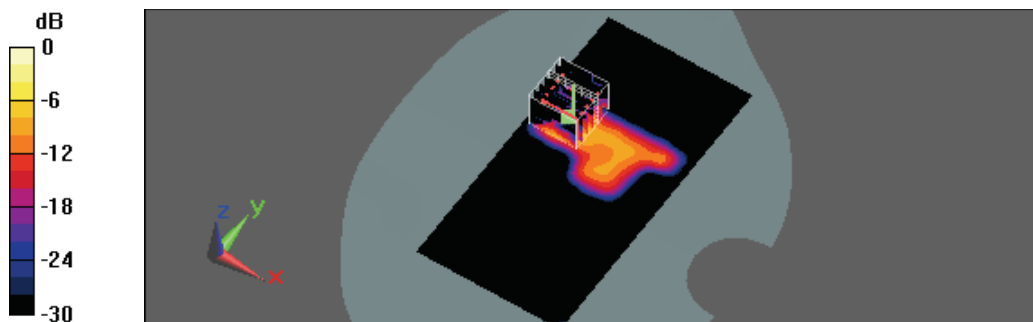

0 dB = 0.060mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/18/2011 10:11:50 AM

Flat_802.11b CH11_1M_Edge Right to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.011 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.651 V/m; Power Drift = 0.017 dB
 Peak SAR (extrapolated) = 0.033 W/kg
SAR(1 g) = 0.00232 mW/g; SAR(10 g) = 0.000255 mW/g
 Maximum value of SAR (measured) = 0.00976 mW/g

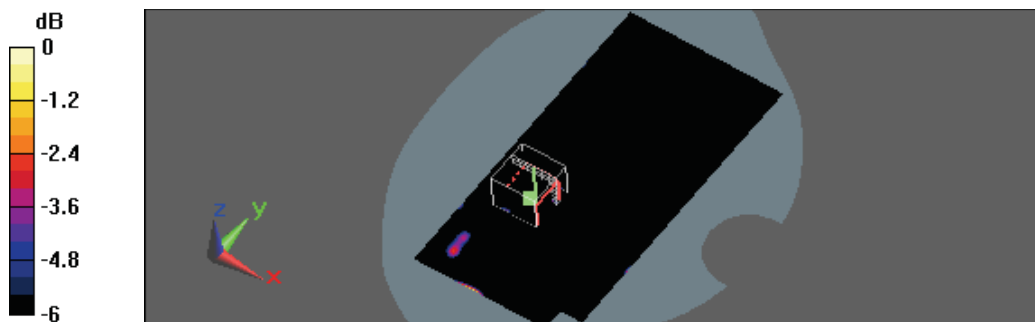

0 dB = 0.00976mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 7/17/2011 4:47:41 PM

Flat_802.11b CH11_1M_Edge Top to Phantom_10mm

DUT: PH85110; Type: Smartphone; FCC ID: NM8PH85110

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.00469 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.807 V/m; Power Drift = -0.021 dB
 Peak SAR (extrapolated) = 0.00873 W/kg
SAR(1 g) = 0.000899 mW/g; SAR(10 g) = 0.00016 mW/g
 Maximum value of SAR (measured) = 0.00441 mW/g

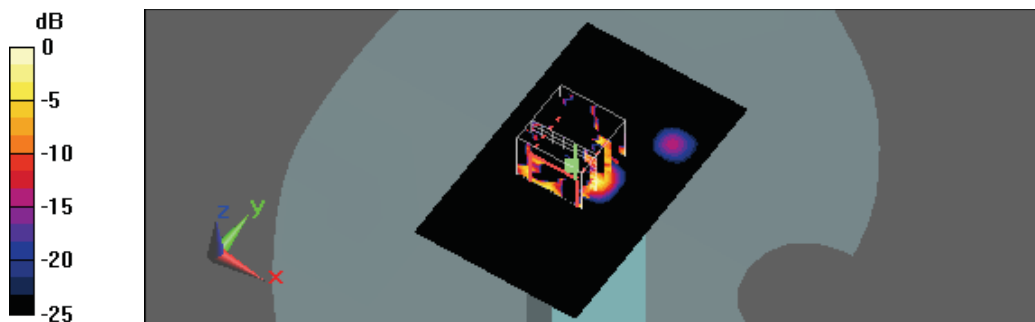

0 dB = 0.00441mW/g



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D835V2 SN:4d092 Calibration No.D835V2-4d092_Jun11
- Dipole _ D1750V2 SN:1023 Calibration No.D1750V2-1023_Jun11
- Dipole _ D1900V2 SN:5d018 Calibration No.D1900V2-5d018_Jun11
- Dipole _ D2450V2 SN:712 Calibration No.D2450V2-712_Feb11
- Probe _ EX3DV4 SN:3632 Calibration No.EX3-3632_Jan11
- Probe _ EX3DV3 SN:3519 Calibration No.EX3-3519_Feb11
- DAE _ DAE4 SN:779 Calibration No.DAE4-779_Jan11

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D835V2-4d092_Jun11**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d092**

Calibration procedure(s) **QA.CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**


Calibration date: **June 22, 2011**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	8-Jun-11 (No. DAE4-601_Jun11)	Jun-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Claudio Leubler** (Name) **Laboratory Technician** (Function)  (Signature)

Approved by: **Katja Pokovic** (Name) **Technical Manager** (Function)  (Signature)

Issued: June 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.8 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.52 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.22 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.1 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.65 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.38 mW / g \pm 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.2 Ω - 2.2 j Ω
Return Loss	- 30.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.2 Ω - 4.8 j Ω
Return Loss	- 25.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.391 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 15, 2009

DASY5 Validation Report for Head TSL

Date: 22.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

D835_4d092_H_110622_CL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.812 V/m; Power Drift = 0.0016 dB

Peak SAR (extrapolated) = 3.508 W/kg


SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.748 mW/g

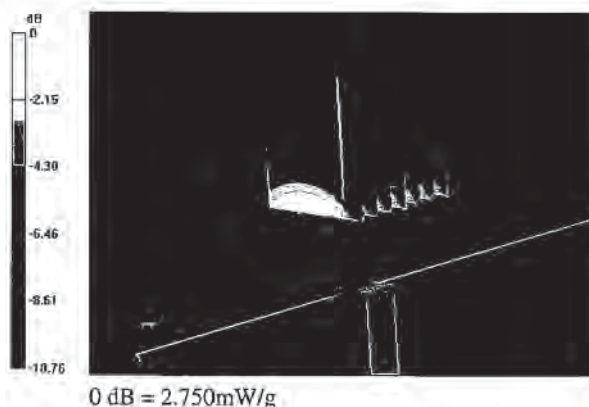



Impedance Measurement Plot for Head TSL

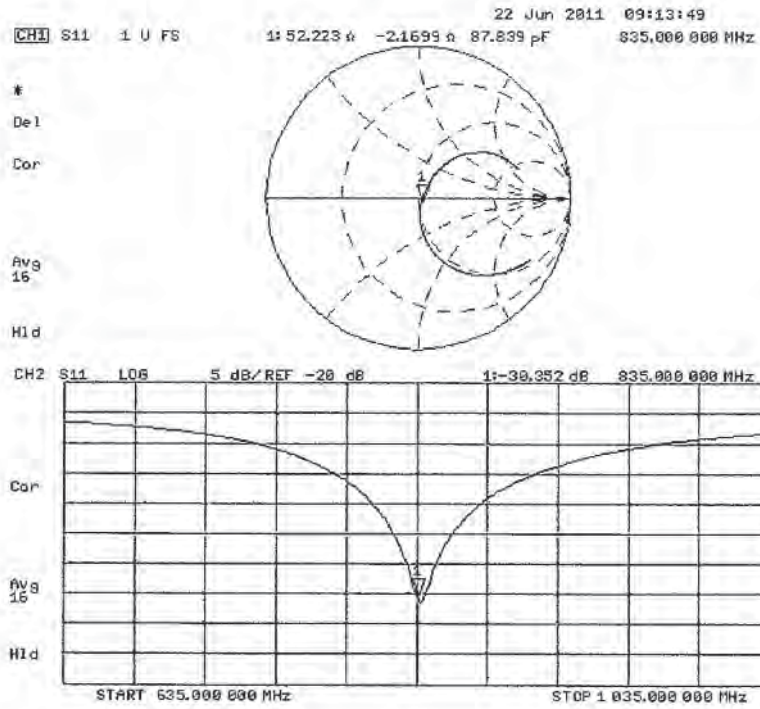

DASY5 Validation Report for Body TSL

Date: 22.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

D835_4d092_M_110622_CL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.717 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.594 W/kg

SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g


Maximum value of SAR (measured) = 2.864 mW/g

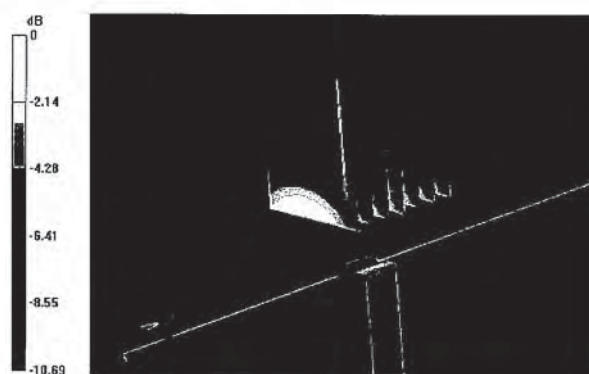

0 dB = 2.860mW/g



Impedance Measurement Plot for Body TSL

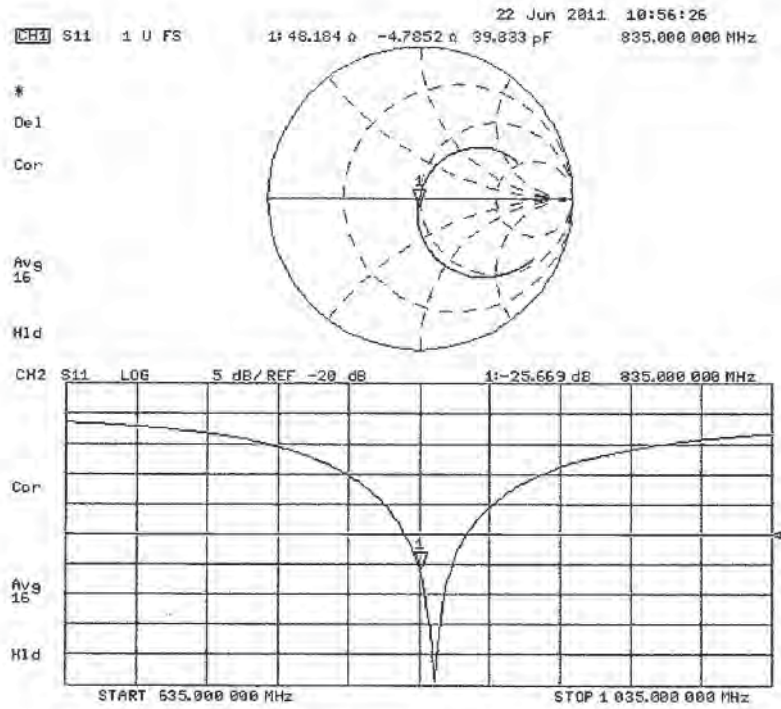

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1750V2-1023_Jun11**

CALIBRATION CERTIFICATE

Object: **D1750V2 - SN: 1023**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**



Calibration date: **June 16, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	8-Jun-11 (No. DAE4-601_Jun11)	Jun-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dirnce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.2 \pm 6 %	1.33 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.94 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	36.2 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.76 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	19.2 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.5 \pm 6 %	1.45 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.08 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	36.8 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.86 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	19.6 mW / g \pm 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω + 0.1 j Ω
Return Loss	- 37.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2 Ω + 0.3 j Ω
Return Loss	- 28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.220 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 20, 2009

DASY5 Validation Report for Head TSL

Date: 15.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1023

Communication System: CW; Frequency: 1750 MHz

Medium: HSL U12 BB

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.22, 5.22, 5.22); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.872 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.013 W/kg

SAR(1 g) = 8.94 mW/g; SAR(10 g) = 4.76 mW/g


Maximum value of SAR (measured) = 11.130 mW/g

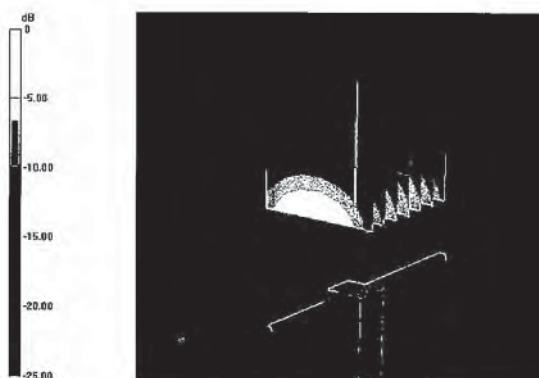

0 dB = 11.130mW/g



Impedance Measurement Plot for Head TSL

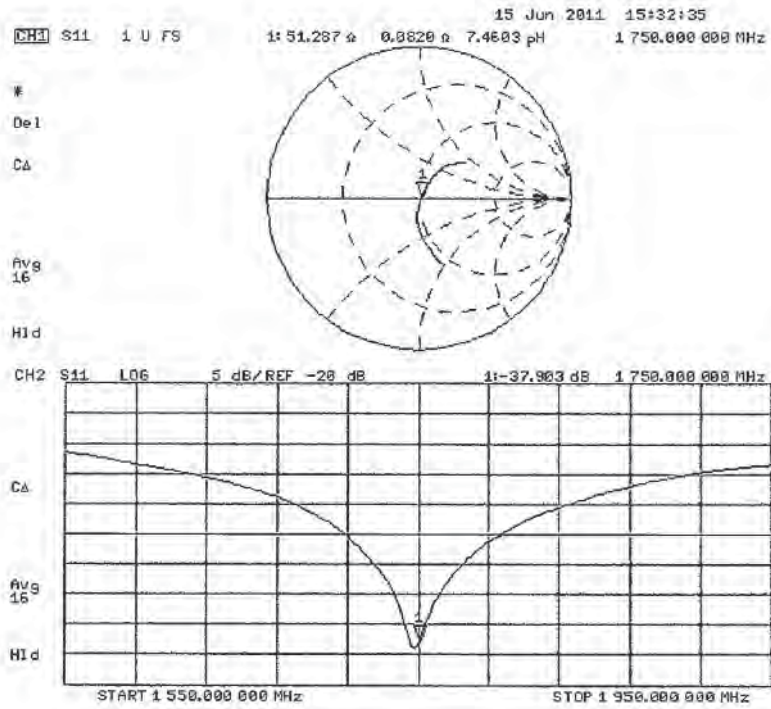

DASY5 Validation Report for Body TSL

Date: 16.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1023

Communication System: CW; Frequency: 1750 MHz

Medium: MSL U12 BB

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.85, 4.85, 4.85); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.898 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 15.674 W/kg


SAR(1 g) = 9.08 mW/g; SAR(10 g) = 4.86 mW/g

Maximum value of SAR (measured) = 11.385 mW/g

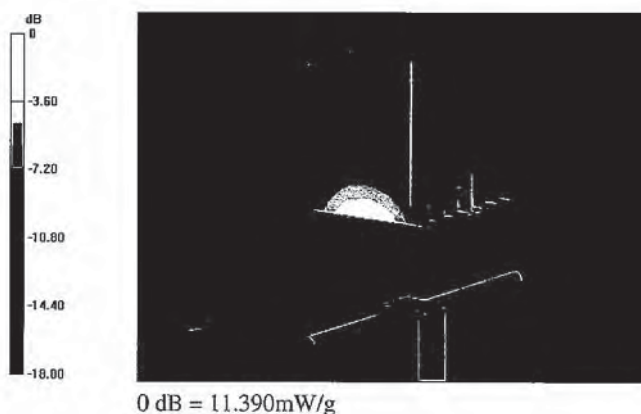



Impedance Measurement Plot for Body TSL

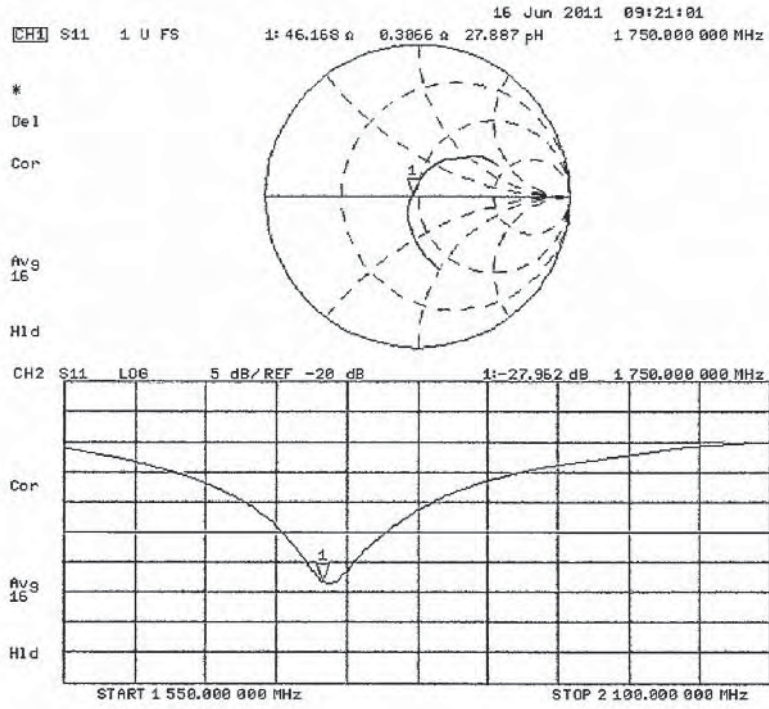



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1900V2-5d018_Jun11**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d018**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **June 16, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	8-Jun-11 (No. DAE4-601_Jun11)	Jun-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-5d018_Jun11

Page 1 of 8

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.40 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.8 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.21 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.8 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.3 \pm 6 %	1.53 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.5 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.31 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.1 mW / g \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 Ω + 3.9 j Ω
Return Loss	- 27.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω + 3.8 j Ω
Return Loss	- 26.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1,195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 04, 2002

DASY5 Validation Report for Head TSL

Date: 15.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Communication System: CW; Frequency: 1900 MHz

Medium: HSL U12 BB

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.065 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.190 W/kg


SAR(1 g) = 10 mW/g; SAR(10 g) = 5.21 mW/g

Maximum value of SAR (measured) = 12.484 mW/g

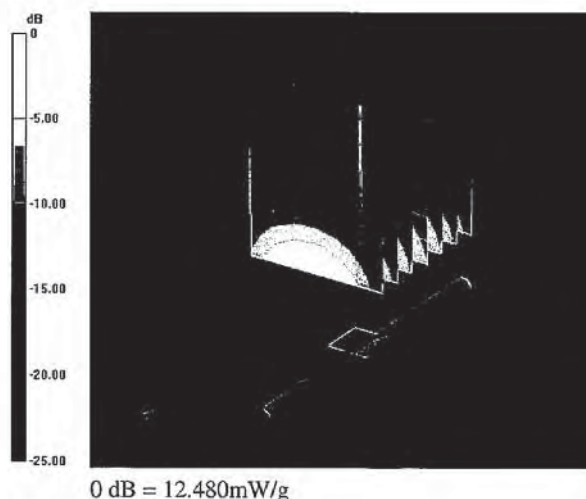



Impedance Measurement Plot for Head TSL

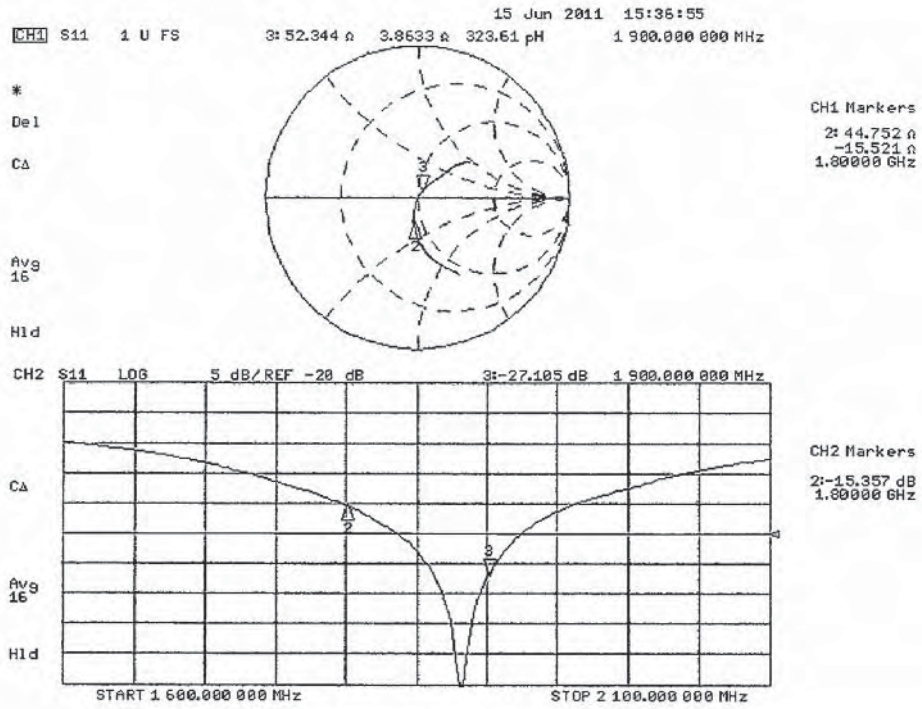

DASY5 Validation Report for Body TSL

Date: 16.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Communication System: CW; Frequency: 1900 MHz

Medium: MSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/ $P_{in}=250$ mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 96.056 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 18.054 W/kg


SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.31 mW/g

Maximum value of SAR (measured) = 12.877 mW/g





Impedance Measurement Plot for Body TSL

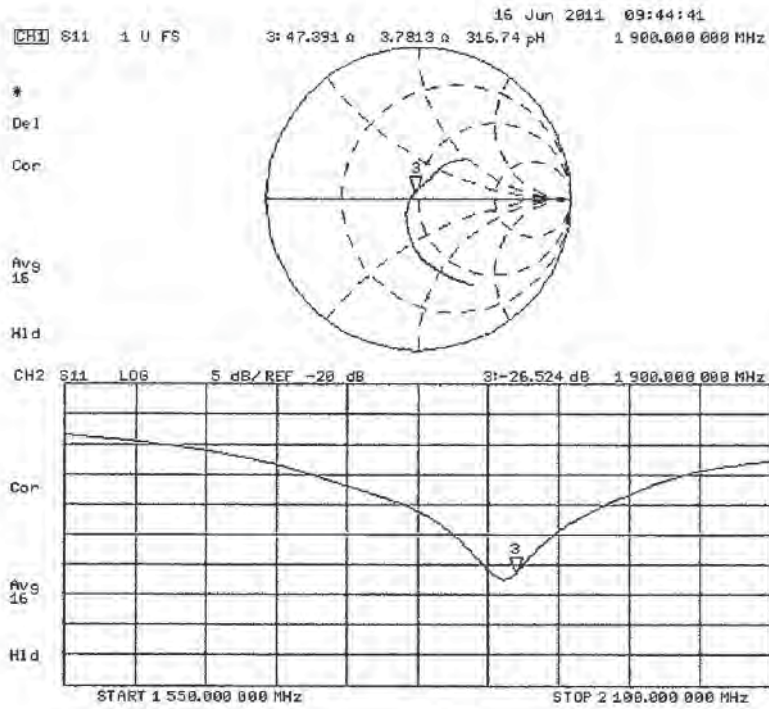

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D2450V2-712_Feb11**

CALIBRATION CERTIFICATE

Object	D2450V2 - SN: 712																																														
Calibration procedure(s)	QA CAL-05.v8 Calibration procedure for dipole validation kits																																														
Calibration date:	February 23, 2011																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-10 (No. 217-01266)</td> <td>Oct-11</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-10 (No. 217-01266)</td> <td>Oct-11</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>30-Mar-10 (No. 217-01158)</td> <td>Mar-11</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>30-Mar-10 (No. 217-01162)</td> <td>Mar-11</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>30-Apr-10 (No. ES3-3205_Apr10)</td> <td>Apr-11</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>10-Jun-10 (No. DAE4-601_Jun10)</td> <td>Jun-11</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-10)</td> <td>In house check: Oct-11</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11	Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11	Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11	Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11	Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11	DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11	RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11																																												
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11																																												
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11																																												
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11																																												
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11																																												
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11																																												
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11																																												
Calibrated by:	Name Dimce Iliev	Function Laboratory Technician	Signature 																																												
Approved by:	Katja Pokovic	Technical Manager																																													
Issued: February 24, 2011																																															
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.1 \pm 6 %	1.73 mho/m \pm 6 %
Head TSL temperature during test	(21.2 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.9 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.08 mW / g
SAR normalized	normalized to 1W	24.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.5 mW /g \pm 16.5 % (k=2)



Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.2 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 mW / g
SAR normalized	normalized to 1W	50.4 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	50.4 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.83 mW / g
SAR normalized	normalized to 1W	23.3 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.3 mW / g ± 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.3 Ω + 1.7 j Ω
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.8 Ω + 5.5 j Ω
Return Loss	- 25.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1,146 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2002

DASY5 Validation Report for Head TSL

Date/Time: 23.02.2011 12:42:01

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.5 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 26.439 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 6.08 mW/g


Maximum value of SAR (measured) = 16.525 mW/g



0 dB = 16.530mW/g



Impedance Measurement Plot for Head TSL

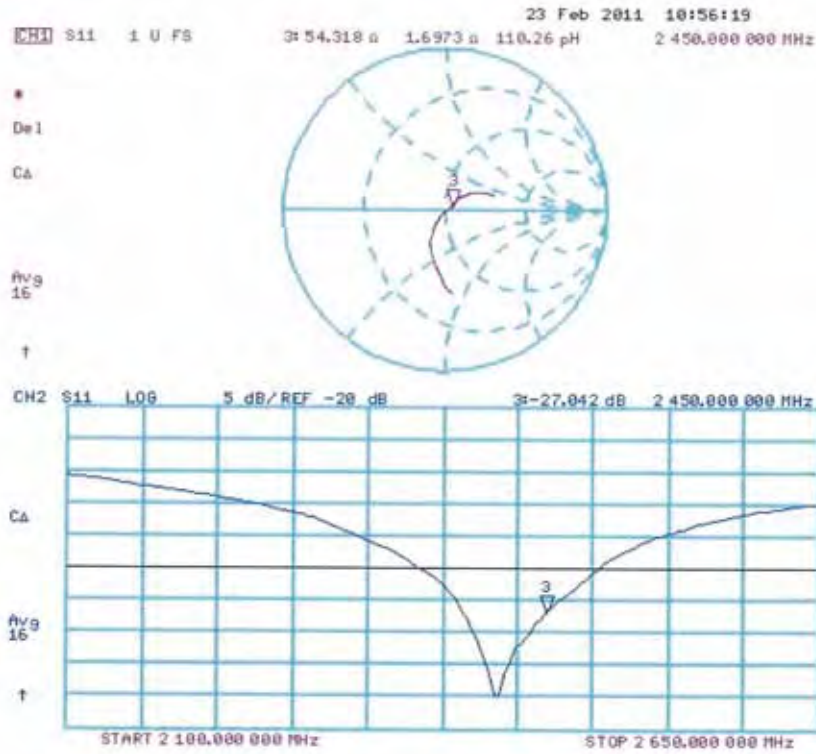

DASY5 Validation Report for Body TSL

Date/Time: 18.02.2011 14:36:14

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.420 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.751 W/kg

SAR(1 g) = 12.6 mW/g; SAR(10 g) = 5.83 mW/g


Maximum value of SAR (measured) = 16.714 mW/g

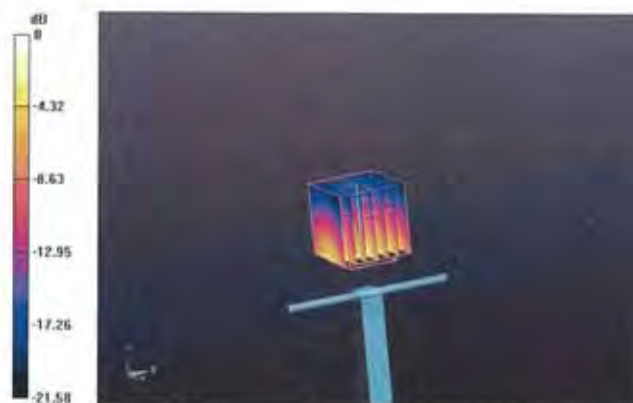

0 dB = 16.710mW/g



Impedance Measurement Plot for Body TSL

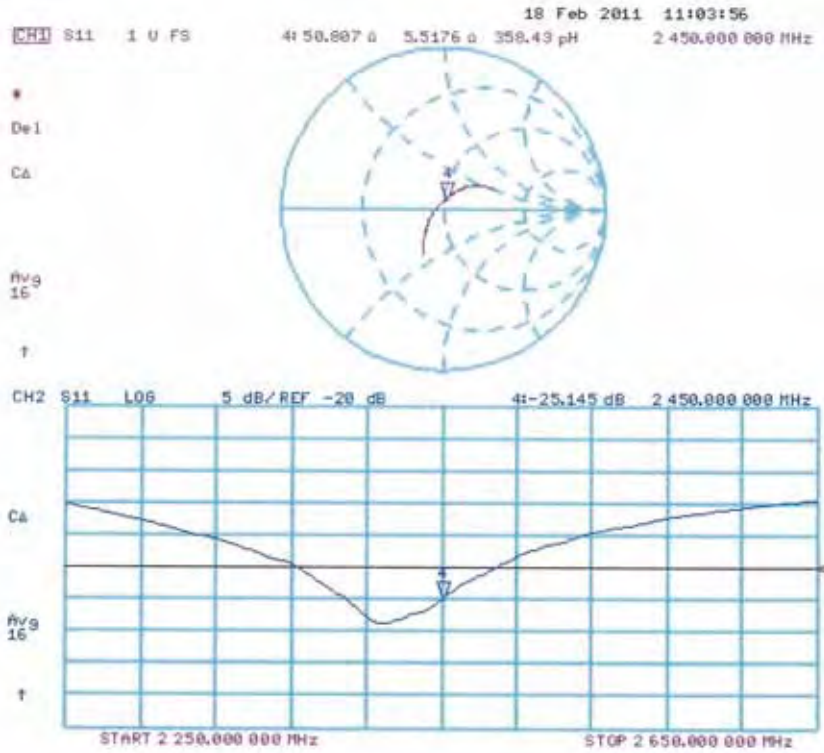



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D5GHzV2-1021_Feb11**

CALIBRATION CERTIFICATE

Object: **D5GHzV2 - SN: 1021**

Calibration procedure(s): **QA CAL-22.v1
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **February 16, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe EX3DV4	SN: 3503	05-Mar-10 (No. EX3-3503_Mar10)	Mar-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 10 mm	
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 2.0 mm	
Frequency	5200 MHz ± 1 MHz 5500 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.5 ± 6 %	4.56 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.33 mW / g
SAR normalized	normalized to 1W	83.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	83.5 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 mW / g
SAR normalized	normalized to 1W	23.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.6 mW / g ± 19.5 % (k=2)



Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.92 mW / g
SAR normalized	normalized to 1W	89.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	89.3 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.51 mW / g
SAR normalized	normalized to 1W	25.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	25.1 mW / g ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.6 ± 6 %	5.17 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.28 mW / g
SAR normalized	normalized to 1W	82.8 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	82.8 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.32 mW / g
SAR normalized	normalized to 1W	23.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.2 mW / g ± 19.5 % (k=2)



Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.2 ± 6 %	5.37 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.91 mW / g
SAR normalized	normalized to 1W	79.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	78.5 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.20 mW / g
SAR normalized	normalized to 1W	22.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.8 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.75 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	100 mW input power	8.50 mW / g
SAR normalized	normalized to 1W	85.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	84.3 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.35 mW / g
SAR normalized	normalized to 1W	23.5 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.3 mW / g ± 19.5 % (k=2)



Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.1 ± 6 %	6.14 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.39 mW / g
SAR normalized	normalized to 1W	73.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	73.3 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.03 mW / g
SAR normalized	normalized to 1W	20.3 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.1 mW / g ± 19.5 % (k=2)



Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.6 Ω - 8.7 j Ω
Return Loss	-21.3 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	52.0 Ω - 2.8 j Ω
Return Loss	-29.5 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.7 Ω - 0.8 j Ω
Return Loss	-24.0 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	50.4 Ω - 7.5 j Ω
Return Loss	-22.6 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	52.5 Ω - 0.8 j Ω
Return Loss	-31.8 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	57.9 Ω + 1.4 j Ω
Return Loss	-22.6 dB



General Antenna Parameters and Design

Electrical Delay (one direction)	1.200 ns
----------------------------------	----------

After long term use with 40 W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004



DASY5 Validation Report for Head TSL

Date/Time: 15.02.2011 16:21:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHz; Serial: D5GHzV2 - SN:1021

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL 5000

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.59$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³ ,

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.89$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³ ,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.2$ mho/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.36, 5.36, 5.36), ConvF(4.85, 4.85, 4.85), ConvF(4.74, 4.74, 4.74); Calibrated: 05.03.2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Configuration D5GHzV2 Dipole (Head)/Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 65.530 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.910 W/kg

SAR(1 g) = 8.33 mW/g; SAR(10 g) = 2.36 mW/g

Maximum value of SAR (measured) = 16.640 mW/g

Configuration D5GHzV2 Dipole (Head)/Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 66.019 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 36.348 W/kg

SAR(1 g) = 8.92 mW/g; SAR(10 g) = 2.51 mW/g

Maximum value of SAR (measured) = 17.990 mW/g

Configuration D5GHzV2 Dipole (Head)/Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 62.471 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 35.358 W/kg

SAR(1 g) = 8.28 mW/g; SAR(10 g) = 2.32 mW/g


Maximum value of SAR (measured) = 16.952 mW/g

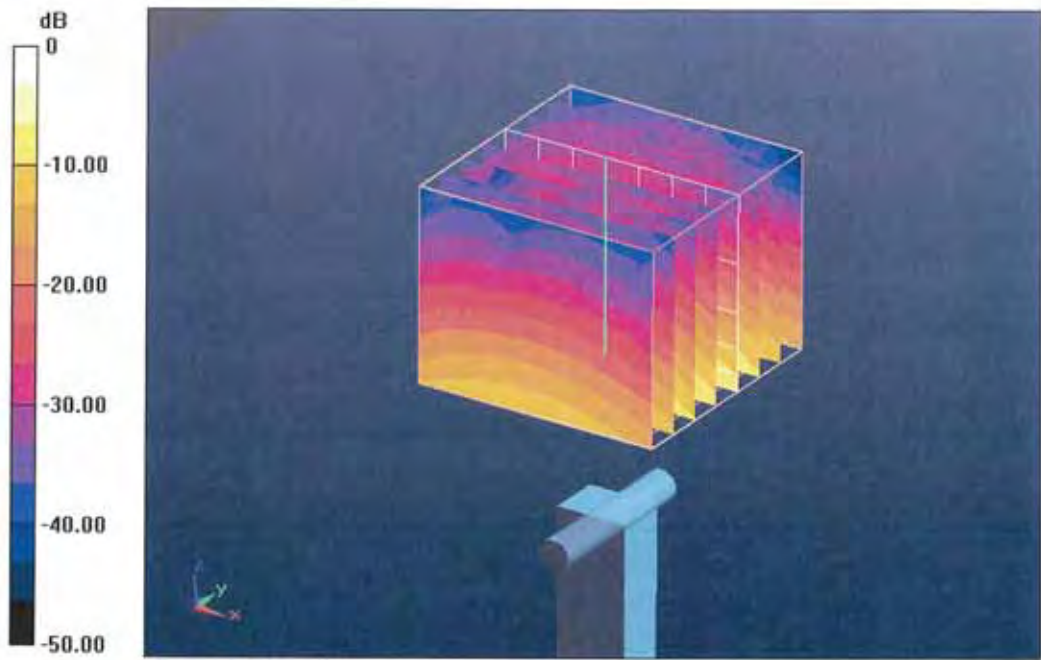

0 dB = 16.950mW/g



Impedance Measurement Plot for Head TSL

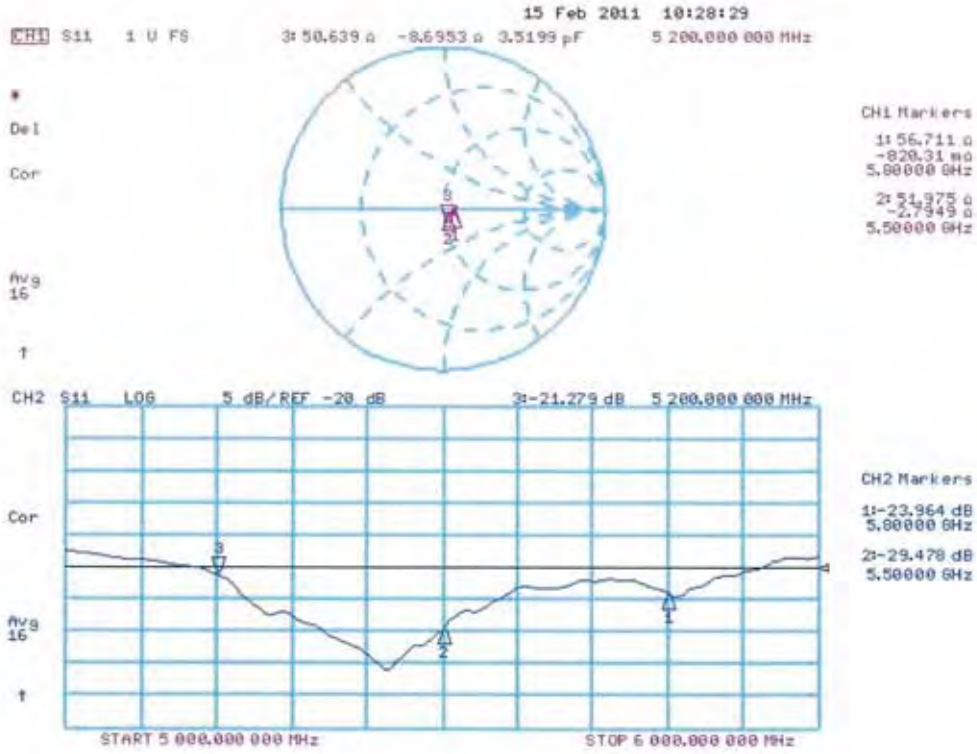



DASY5 Validation Report for Body TSL

Date/Time: 16.02.2011 14:54:55

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHz; Serial: D5GHzV2 - SN:1021

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL 5000 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.37$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.75$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.16$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.88, 4.88, 4.88), ConvF(4.37, 4.37, 4.37), ConvF(4.57, 4.57, 4.57); Calibrated: 05.03.2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Configuration D5GHzV2 Dipole (Body)/Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.859 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 31.519 W/kg

SAR(1 g) = 7.91 mW/g; SAR(10 g) = 2.2 mW/g

Maximum value of SAR (measured) = 15.654 mW/g

Configuration D5GHzV2 Dipole (Body)/Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.701 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 35.772 W/kg

SAR(1 g) = 8.5 mW/g; SAR(10 g) = 2.35 mW/g

Maximum value of SAR (measured) = 17.312 mW/g

Configuration D5GHzV2 Dipole (Body)/Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan (4x4x2mm), dist=2mm (8x8x6)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.113 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 33.376 W/kg

SAR(1 g) = 7.39 mW/g; SAR(10 g) = 2.03 mW/g


Maximum value of SAR (measured) = 15.232 mW/g

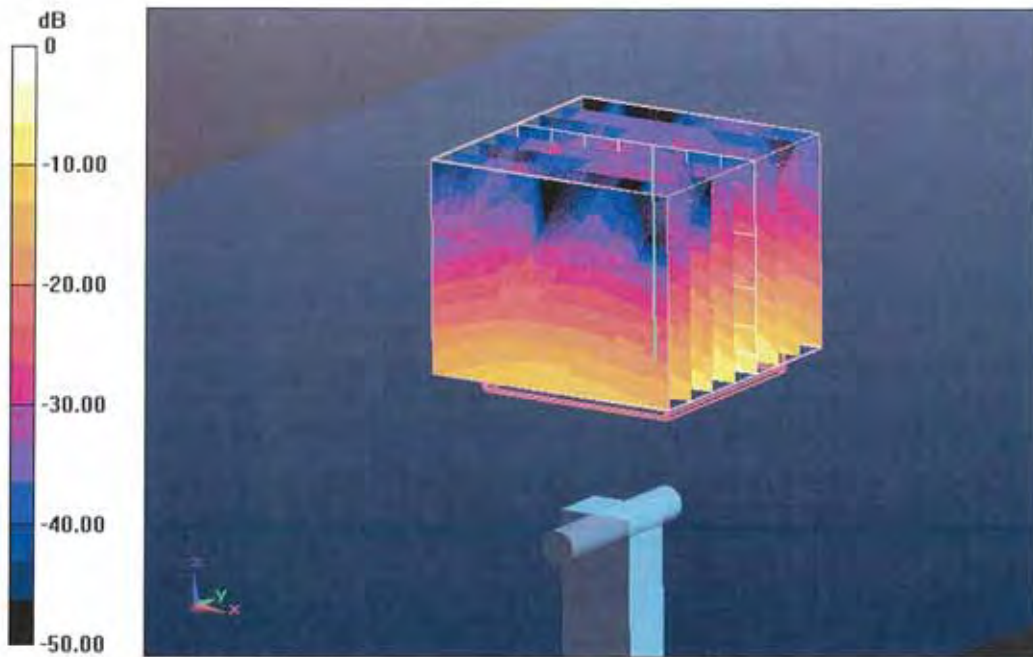

0 dB = 15.230mW/g



Impedance Measurement Plot for Body TSL

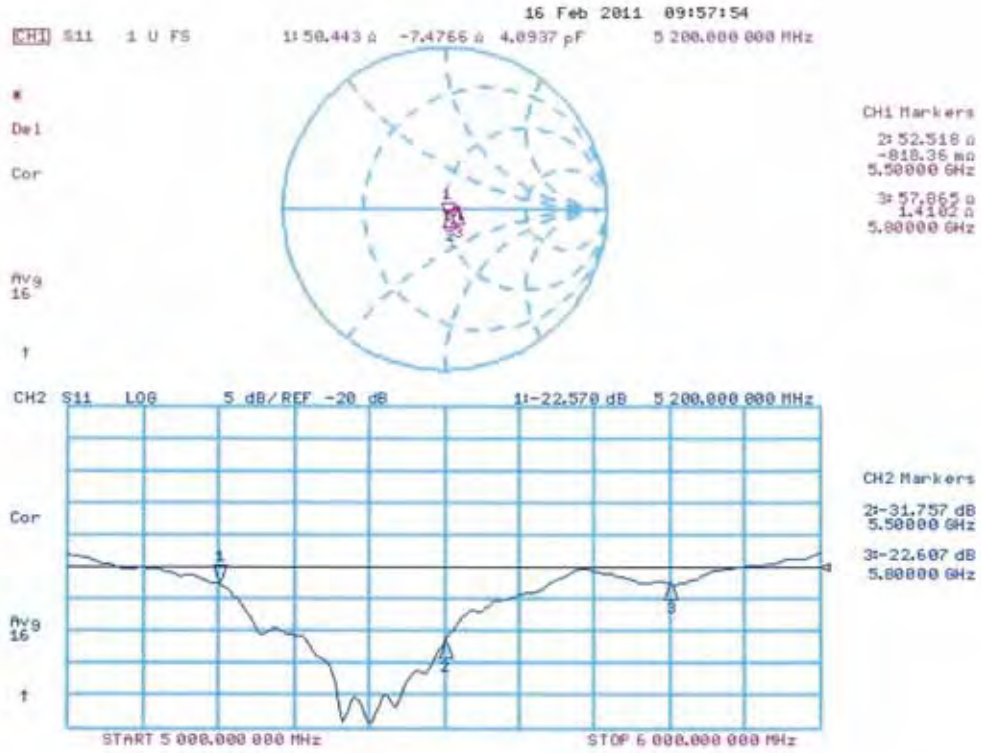

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **EX3-3632_Jan11**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3632**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-12.v6, QA CAL-23.v4 and QA CAL-25.v3
Calibration procedure for dosimetric E-field probes**



Calibration date: **January 19, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: January 20, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 SN:3632

January 19, 2011

Probe EX3DV4

SN:3632

Manufactured:	November 1, 2007
Last calibrated:	January 26, 2010
Recalibrated:	January 19, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.46	0.44	0.39	± 10.1%
DGP (mV) ^B	97.4	94.9	97.4	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	133.3	± 3.4 %
			Y	0.00	0.00	1.00	110.0	
			Z	0.00	0.00	1.00	125.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	9.40	9.40	9.40	0.12	2.85 ± 13.3%
750	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	9.51	9.51	9.51	0.67	0.64 ± 11.0%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	9.09	9.09	9.09	0.66	0.64 ± 11.0%
1810	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.16	8.16	8.16	0.51	0.74 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.02	8.02	8.02	0.58	0.68 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.28	7.28	7.28	0.33	0.91 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632


Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	10.05	10.05	10.05	0.05	1.80 ± 13.3%
750	± 50 / ± 100	55.5 ± 5%	0.96 ± 5%	9.33	9.33	9.33	0.78	0.63 ± 11.0%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	9.28	9.28	9.28	0.73	0.66 ± 11.0%
1810	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.57	7.57	7.57	0.83	0.60 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.39	7.39	7.39	0.67	0.65 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	7.23	7.23	7.23	0.28	1.07 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

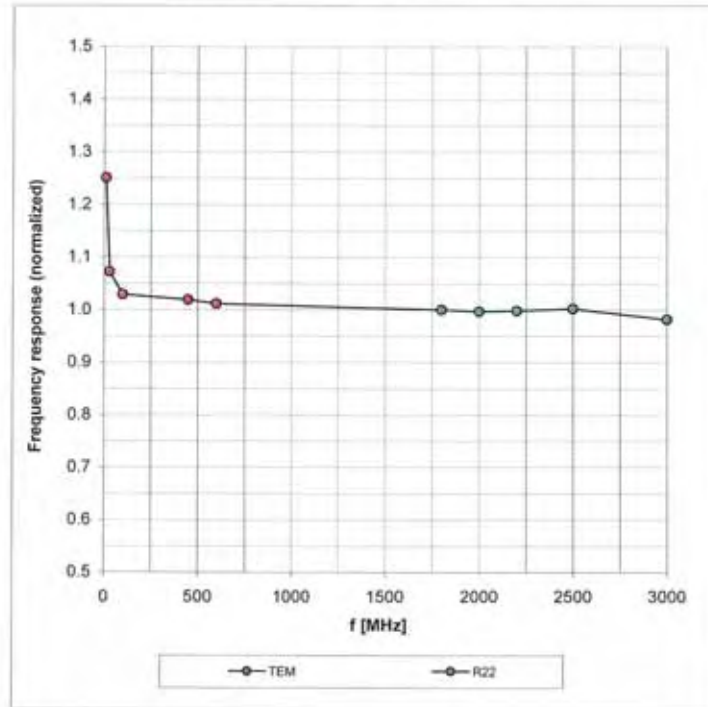



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

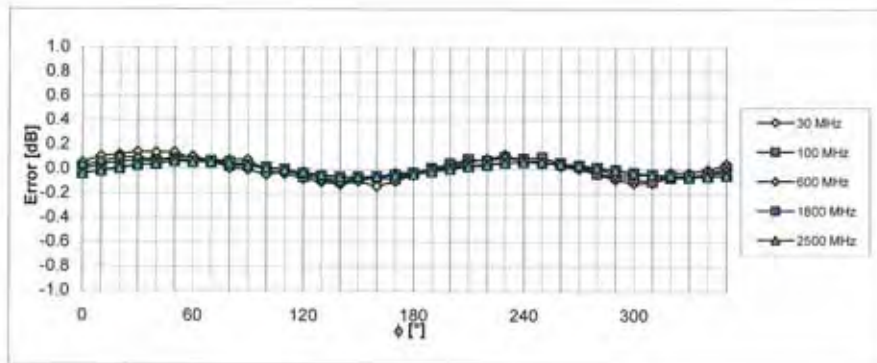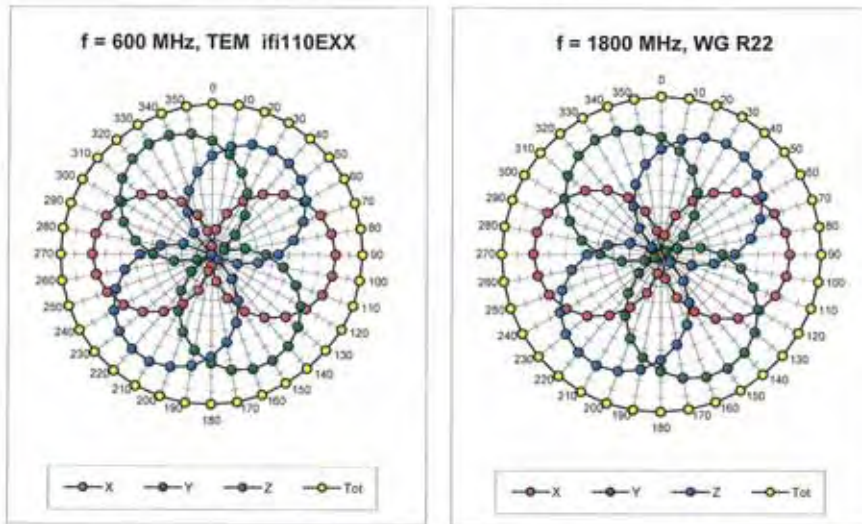


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(SAR_{head})$ (TEM cell, $f = 900$ MHz)

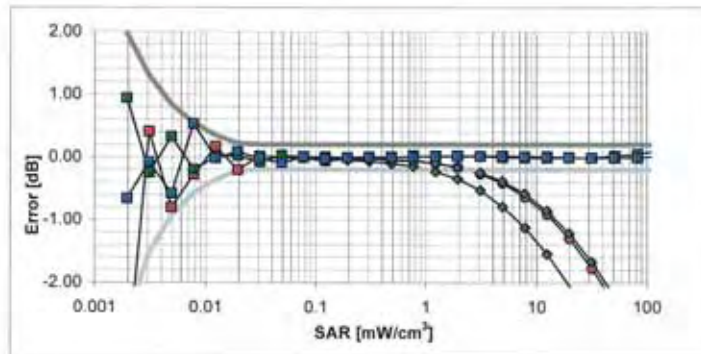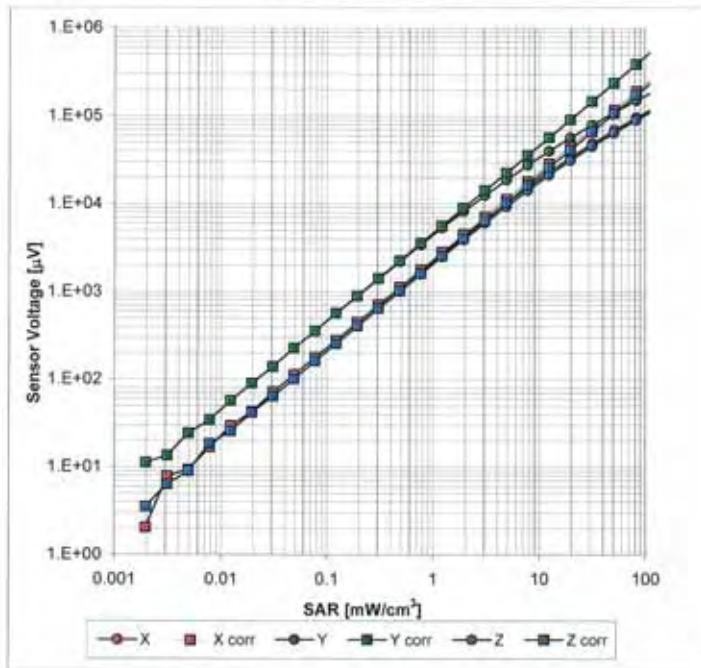


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

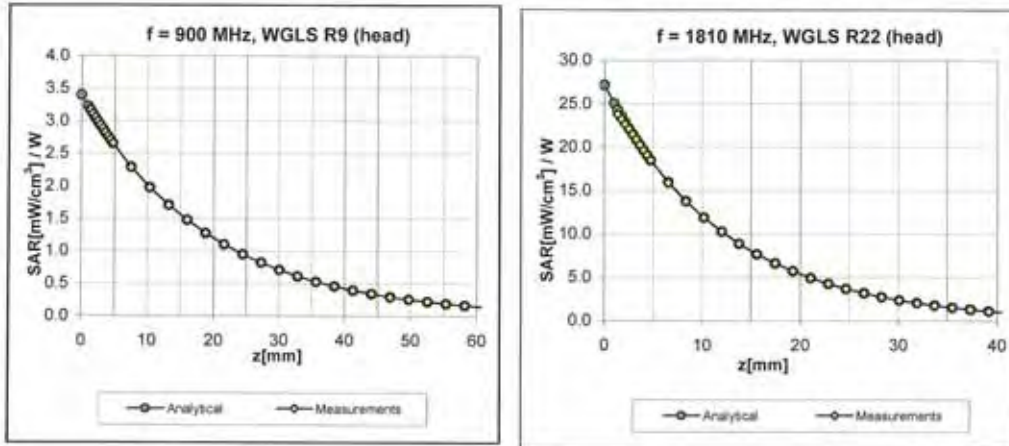

Deviation from Isotropy in HSL

Error (ϕ, θ), f = 900 MHz

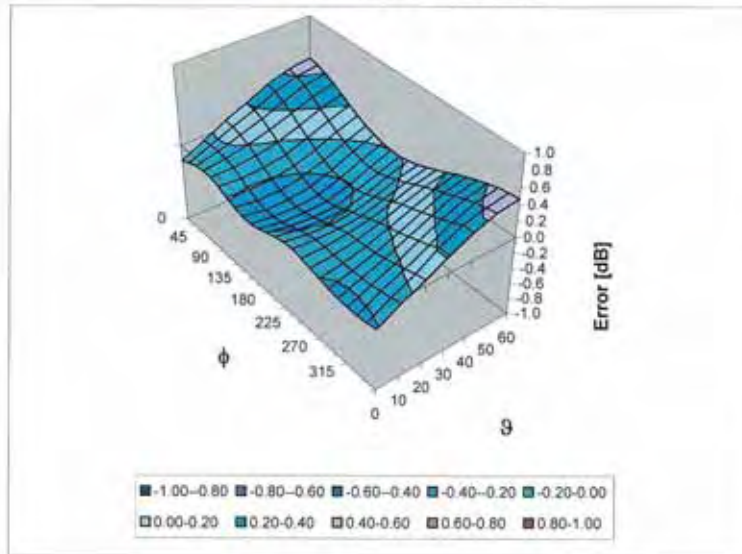

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)



EX3DV4 SN:3632

January 19, 2011

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8064 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **ATL (Auden)**

Certificate No: EX3-3519_Feb11

CALIBRATION CERTIFICATE

Object **EX3DV3 - SN:3519**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes**



Calibration date: **February 25, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	
			Issued: February 25, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}** are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV3 – SN:3519

February 25, 2011

Probe EX3DV3

SN:3519

Manufactured: March 8, 2004
Calibrated: February 25, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

**DASY/EASY - Parameters of Probe: EX3DV3 - SN:3519****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.82	0.71	0.72	$\pm 10.1\%$
DCP (mV) ^B	99.0	98.5	100.8	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	107.3	$\pm 1.9\%$
			Y	0.00	0.00	1.00	110.4	
			Z	0.00	0.00	1.00	136.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



DASY/EASY - Parameters of Probe: EX3DV3 - SN:3519

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2000	40.0	1.40	9.25	9.25	9.25	0.53	0.78	± 12.0 %
5200	36.0	4.66	5.08	5.08	5.08	0.30	1.80	± 13.1 %
5500	35.6	4.96	4.60	4.60	4.60	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.13	4.13	4.13	0.50	1.80	± 13.1 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV3- SN:3519


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2000	53.3	1.52	9.31	9.31	9.31	0.72	0.68	± 12.0 %
2300	52.9	1.81	8.67	8.67	8.67	0.69	0.67	± 12.0 %
2450	52.7	1.95	8.17	8.17	8.17	0.79	0.58	± 12.0 %
2600	52.5	2.16	7.75	7.75	7.75	0.79	0.54	± 12.0 %
3500	51.3	3.31	7.11	7.11	7.11	0.31	1.34	± 13.1 %
5200	49.0	5.30	4.36	4.36	4.36	0.52	1.95	± 13.1 %
5300	48.9	5.42	4.14	4.14	4.14	0.55	1.95	± 13.1 %
5500	48.6	5.65	3.88	3.88	3.88	0.55	1.95	± 13.1 %
5600	48.5	5.77	3.56	3.56	3.56	0.65	1.95	± 13.1 %
5800	48.2	6.00	3.94	3.94	3.94	0.58	1.95	± 13.1 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

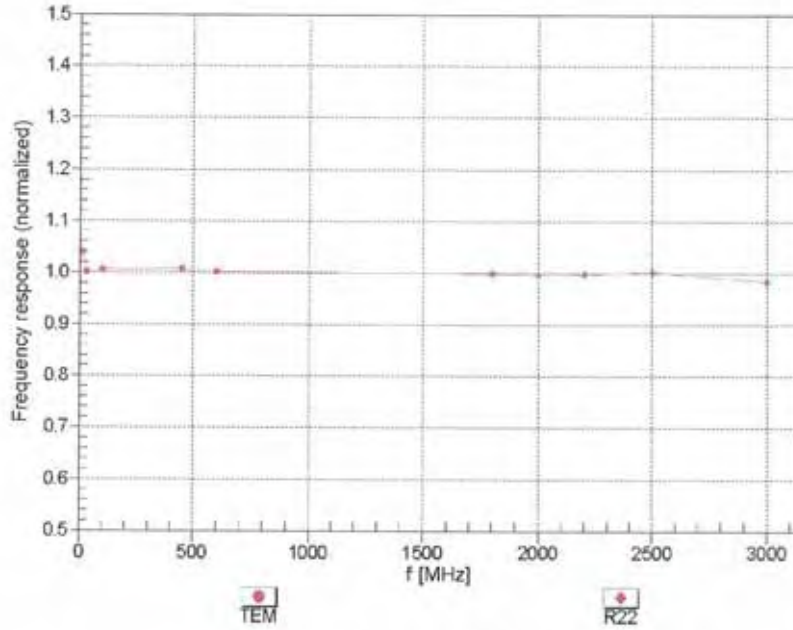



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


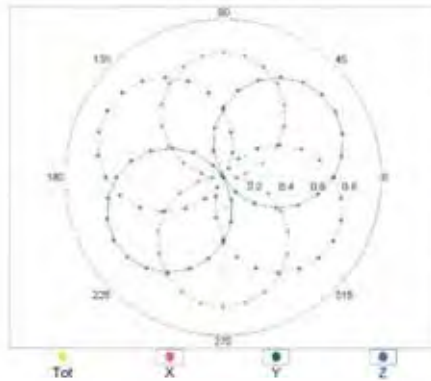


f=1800 MHz,R22

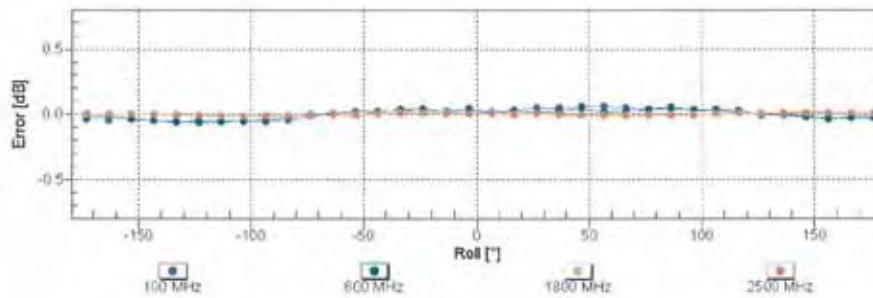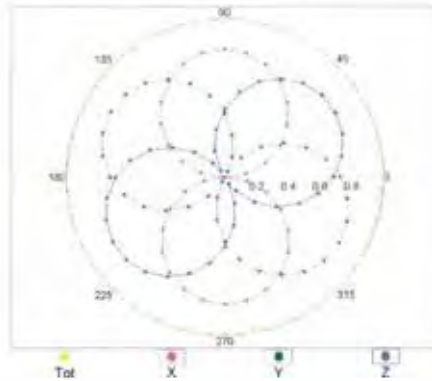


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

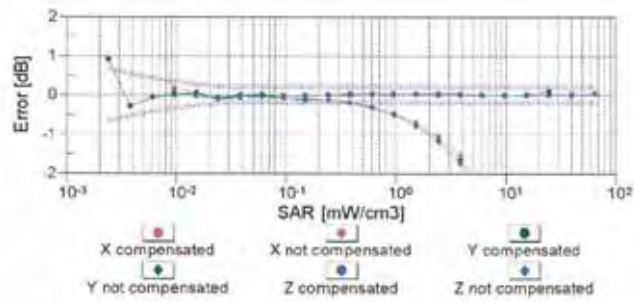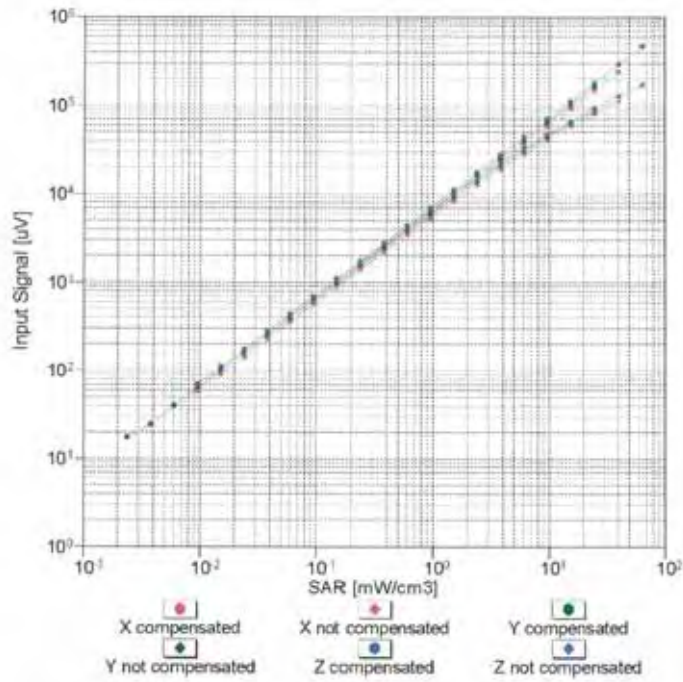


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

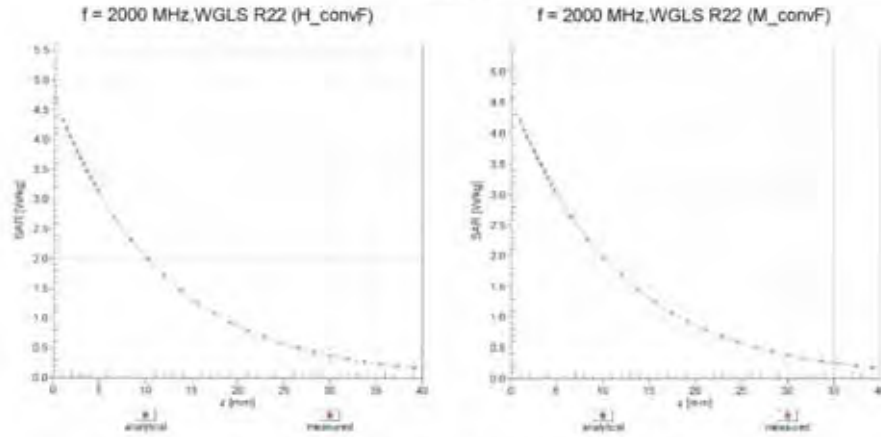

Deviation from Isotropy in Air Error (ϕ, θ), f = 900 MHz

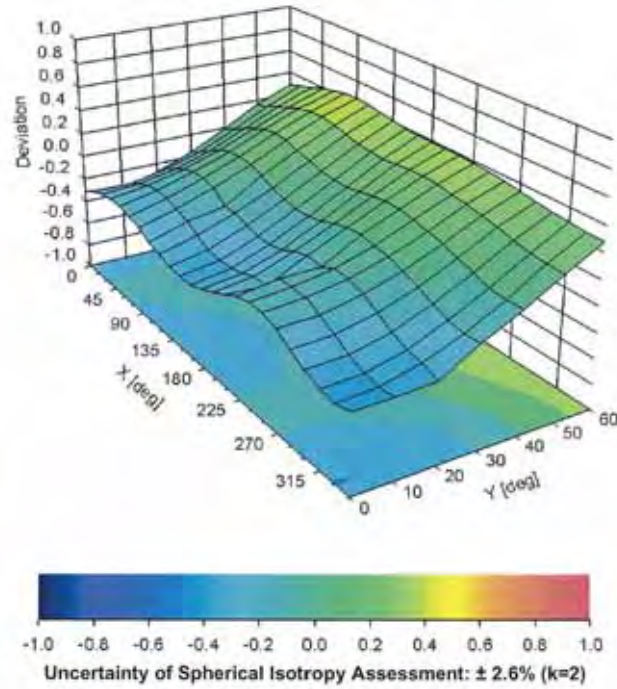



EX3DV3- SN:3519

February 25, 2011

DASY/EASY - Parameters of Probe: EX3DV3 - SN:3519

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (")	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **DAE4-779_Jan11**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 779**

Calibration procedure(s) **QA CAL-06.v22
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 31, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1,1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by:	Name Andrea Guntli	Function Technician	Signature 
Approved by:	Name Fin Bornholt	Function R&D Director	Signature 

Issued: January 31, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.517 \pm 0.1% (k=2)	403.748 \pm 0.1% (k=2)	403.972 \pm 0.1% (k=2)
Low Range	3.96927 \pm 0.7% (k=2)	3.98585 \pm 0.7% (k=2)	3.99915 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	155.5 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------

Appendix

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200001.8	6.19	0.00
Channel X + Input	20003.75	4.25	0.02
Channel X - Input	-19996.56	3.04	-0.02
Channel Y + Input	200005.0	0.90	0.00
Channel Y + Input	20000.78	1.38	0.01
Channel Y - Input	-19996.43	2.97	-0.01
Channel Z + Input	200002.2	-1.15	-0.00
Channel Z + Input	19999.59	0.19	0.00
Channel Z - Input	-19995.05	4.35	-0.02

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.4	0.25	0.01
Channel X + Input	200.27	0.37	0.18
Channel X - Input	-199.08	1.12	-0.56
Channel Y + Input	2000.1	0.19	0.01
Channel Y + Input	199.01	-0.89	-0.45
Channel Y - Input	-199.30	0.50	-0.25
Channel Z + Input	1999.6	-0.40	-0.02
Channel Z + Input	199.22	-0.88	-0.44
Channel Z - Input	-200.27	-0.37	0.19

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-3.66	-5.39
	- 200	5.82	4.90
Channel Y	200	13.39	13.58
	- 200	-14.98	-15.16
Channel Z	200	2.20	2.53
	- 200	-4.84	-4.61

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.33	-0.57
Channel Y	200	1.97	-	3.29
Channel Z	200	1.19	-0.28	-



4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15613	15134
Channel Y	15831	16218
Channel Z	16150	17743

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.26	-1.03	0.79	0.42
Channel Y	0.52	-1.04	2.07	0.58
Channel Z	-2.22	-3.25	-0.85	0.44

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9