

A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.

Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT



Test Report No.	:	1108FS20-01
Applicant	:	HTC Corporation
Product Type	:	Smartphone
Trade Name	:	HTC
Model Number	:	PJ03100
Dates of Test	:	Aug. 15 ~ Aug. 25, 2011 Sep. 29 ~ Sep. 30, 2011
Date of Issued	:	Sep. 30, 2011
Test Environment	:	Ambient Temperature : 22 ± 2 ° C Relative Humidity : 40 - 70 %
Standard	:	ANSI/IEEE C95.1-1999 IEEE Std. 1528-2003 47 CFR Part §2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
Max. SAR	:	1.150 W/kg Head SAR 0.778 W/kg Body SAR
Test Lab Location	:	Chang-an Lab



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By



(Sam Chuang)

Tested By



(Alex Wu)



Contents

1.	Description of Equipment under Test (EUT)	3
2.	Introduction	4
2.1	SAR Definition	4
3.	SAR Measurement Setup	5
3.1	DASY5 E-Field Probe System	6
3.1.1	E-Field Probe Specification	7
3.1.2	E-Field Probe Calibration process	8
3.2	Data Acquisition Electronic (DAE) System	9
3.3	Robot	9
3.4	Measurement Server	9
3.5	Device Holder	10
3.6	Phantom - SAM v4.0	10
3.7	Oval Flat Phantom - ELI 4.0	11
3.8	Data Storage and Evaluation	11
3.8.1	Data Storage	11
3.8.2	Data Evaluation	12
4.	Tissue Simulating Liquids	14
4.1	Ingredients	15
4.2	Recipes	15
4.3	Liquid Confirmation	16
4.3.1	Parameters	16
4.3.2	Liquid Depth	20
5.	SAR Testing with RF Transmitters	21
5.1	SAR Testing with HSDPA Transmitters	21
5.2	SAR Testing with 802.11 Transmitters	24
5.2.1	General Device Setup	24
5.2.2	Frequency Channel Configurations	24
5.3	Conducted Power	26
5.4	Simultaneous Transmitting Evaluate	30
6.	System Performance Check	37
6.1	Symmetric Dipoles for System Validation	37
6.2	Validation	38
7.	Test Equipment List	47
8.	Measurement Uncertainty	48
9.	Measurement Procedure	50
9.1	Spatial Peak SAR Evaluation	50
9.2	Area & Zoom Scan Procedures	51
9.3	Volume Scan Procedures	51
9.4	SAR Averaged Methods	51
9.5	Power Drift Monitoring	51
10.	SAR Test Results Summary	52
10.1	Head SAR	52
10.2	Body SAR	54
10.3	Std. C95.1-1999 RF Exposure Limit	57
11.	Conclusion	58
12.	References	58
Appendix A -	System Performance Check	59
Appendix B -	SAR Measurement Data	73
Appendix C -	Calibration	133



1. Description of Equipment under Test (EUT)

Applicant	HTC Corporation	
Applicant Address	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan	
Manufacture	HTC Corporation	
Manufacture Address	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan	
Product Type	Smartphone	
Trade Name	HTC	
Model Number	PJ03100	
FCC ID	NM8PJ03100	
RF Function	GSM/GPRS/EGPRS 850 (Device Class A, Multi-slot Class 12 / DTM Class 11) GSM/GPRS/EGPRS 1900 (Device Class A, Multi-slot Class 12 / DTM Class 11) IEEE 802.11b / 802.11g / draft 802.11n 2.4GHz Standard-20MHz with Wi-Fi Hot spot mode	
Tx Frequency	Band	Operate Frequency (MHz)
	GSM/GPRS/EGPRS/DTM 850	824.2 - 848.8
	GSM/GPRS/EGPRS/DTM 1900	1850.2 - 1909.8
	IEEE 802.11b/802.11g	2412 - 2462
	draft 802.11n 2.4GHz Standard-20MHz	2412 - 2462
RF Conducted Power (Avg.)	Band	Power (W / dBm)
	GSM/GPRS/EGPRS/DTM 850	1.928 / 32.85
	GSM/GPRS/EGPRS/DTM 1900	1.047 / 30.20
	IEEE 802.11b	0.102 / 20.10
	IEEE 802.11g	0.021 / 13.31
	draft 802.11n 2.4GHz Standard-20MHz	0.021 / 13.28
	Bluetooth	0.0009 / -0.57
Max. SAR Measurement	1.150 W/kg Head SAR 0.778 W/kg Body SAR	
Antenna Type	PIFA Type	
Device Category	Portable Device	
RF Exposure Environment	General Population / Uncontrolled	
Battery Option	Standard	
Application Type	Certification	

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

2. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **HTC Corporation Trade Name : HTC Model(s) : PJ03100**. The test procedures, as described in American National Standards, Institute C95.1-1999 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

2.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$


Where :

- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m³)
- E = RMS electric field strength (V/m)

* Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

3. SAR Measurement Setup

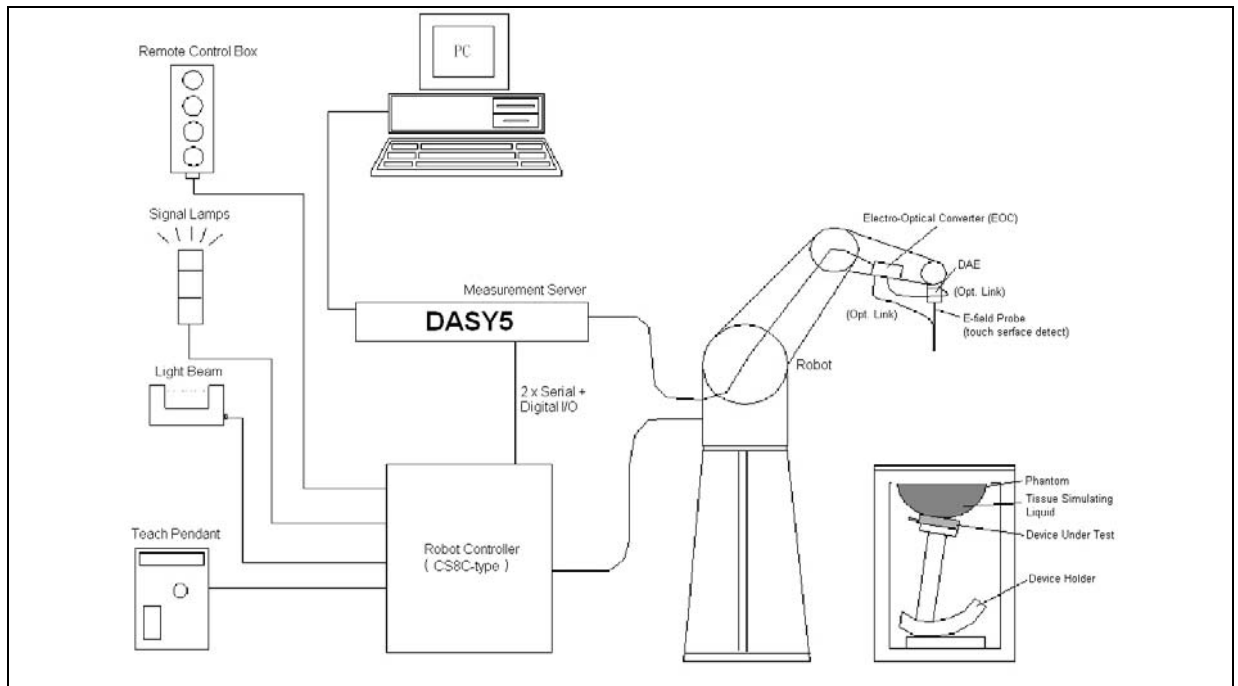

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY5 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.




3.1 DASYS E-Field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 or EX3DV3 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASYS software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

3.1.1 E-Field Probe Specification

Construction	<p>Symmetrical design with triangular core</p> <p>Built-in optical fiber for surface detection System</p> <p>Built-in shielding against static charges</p> <p>PEEK enclosure material (resistant to organic solvents, e.q., glycol)</p>
Calibration	<p>In air from 10 MHz to 6 GHz</p> <p>In brain and muscle simulating tissue at frequencies of 2450MHz (accuracy $\pm 8\%$)</p> <p>Calibration for other liquids and frequencies upon request</p>
Frequency	<p>± 0.2 dB (30 MHz to 6 GHz) for EX3DV4</p> <p>± 0.2 dB (30 MHz to 4 GHz) for EX3DV3</p>
Directivity	<p>± 0.3 dB in brain tissue (rotation around probe axis)</p> <p>± 0.5 dB in brain tissue (rotation normal probe axis)</p>
Dynamic Range	<p>10 μ W/g to > 100mW/g; Linearity: ± 0.2dB</p>
Dimensions	<p>Overall length: 337mm</p> <p>Tip length: 20mm</p> <p>Body diameter: 12mm</p> <p>Tip diameter: 2.5mm for EX3DV4, 3.9mm for EX3DV3</p> <p>Distance from probe tip to dipole centers: 1.0mm for EX3DV4, 2.0mm for EX3DV3</p>
Application	<p>General dosimetry up to 6GHz</p> <p>Compliance tests of mobile phones</p> <p>Fast automatic scanning in arbitrary phantoms</p>

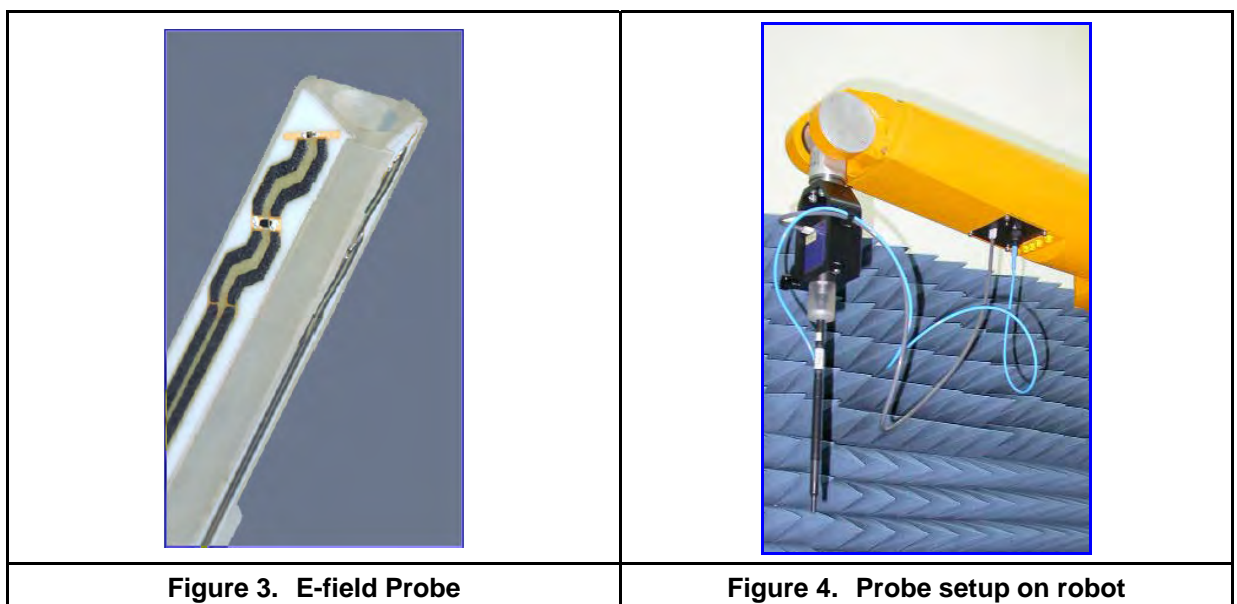



3.1.2 E-Field Probe Calibration process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

- Δt = Exposure time (30 seconds),
- C = Heat capacity of tissue (head or body),
- ΔT = Temperature increase due to RF exposure.

$$\text{Or } \text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

- σ = Simulated tissue conductivity,
- ρ = Tissue density (kg/m³).



3.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Core(TM)2 CPU
Clock Speed : @ 1.86GHz
Operating System : Windows XP Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY5 v5.0 (Build 125) & SEMCAD X Version 13.4 Build 125
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock

3.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ± 0.02 mm
No. of Axis : 6

3.4 Measurement Server

Processor : PC/104 with a 400MHz intel ULV Celeron
I/O-board : Link to DAE4 (or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

3.5 Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

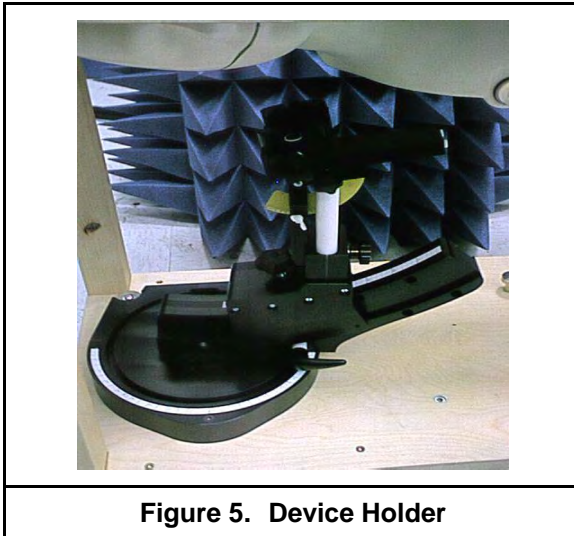


Figure 5. Device Holder

3.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	1000x500 mm (LxW)
Table 1. Specification of SAM v4.0	



Figure 6. SAM Twin Phantom

3.7 Oval Flat Phantom - ELI 4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190×600×400 mm (H×L×W)
Table 2. Specification of ELI 4.0	

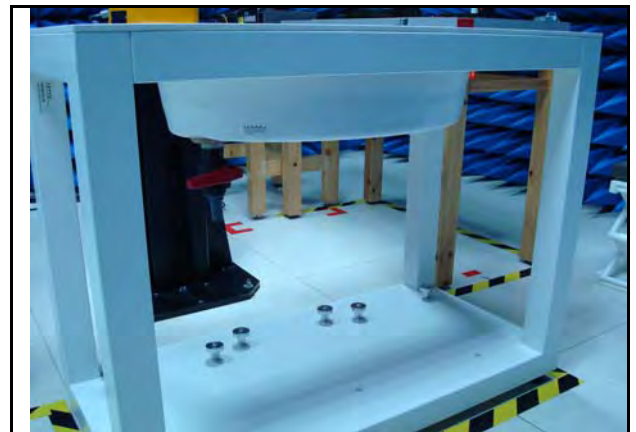


Figure 7. Oval Flat Phantom

3.8 Data Storage and Evaluation

3.8.1 Data Storage

The DASY5 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA5. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



3.8.2 Data Evaluation

The DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

- Probe parameters :**
- Sensitivity Normi, ai0, ai1, ai2
 - Conversion factor ConvFi
 - Diode compression point dcp_i
- Device parameters :**
- Frequency f
 - Crest factor cf
- Media parameters :**
- Conductivity σ
 - Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

H-field probes :

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

***Note :** That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



4. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue. The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Table 3. Tissue dielectric parameters for head and body phantoms



4.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

4.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride Sugar: 98+% Pure Sucrose

Water: De-ionized, $16 \text{ M } \Omega$ resistivity HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether



4.3 Liquid Confirmation

4.3.1 Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
835MHz Head	820MHz	22.0	ϵ_r	41.50	41.41	-0.22%	± 5	08/15/2011
			σ	0.90	0.89	-1.11%	± 5	
	835MHz	22.0	ϵ_r	41.50	41.18	-0.77%	± 5	
			σ	0.90	0.90	0.00%	± 5	
	850MHz	22.0	ϵ_r	41.50	40.99	-1.23%	± 5	
			σ	0.90	0.92	2.22%	± 5	
835MHz Head	820MHz	22.0	ϵ_r	41.50	41.41	-0.22%	± 5	08/19/2011
			σ	0.90	0.89	-1.11%	± 5	
	835MHz	22.0	ϵ_r	41.50	41.18	-0.77%	± 5	
			σ	0.90	0.90	0.00%	± 5	
	850MHz	22.0	ϵ_r	41.50	40.99	-1.23%	± 5	
			σ	0.90	0.92	2.22%	± 5	
835MHz Head	820MHz	22.0	ϵ_r	41.50	41.41	-0.22%	± 5	09/29/2011
			σ	0.90	0.89	-1.11%	± 5	
	835MHz	22.0	ϵ_r	41.50	41.18	-0.77%	± 5	
			σ	0.90	0.90	0.00%	± 5	
	850MHz	22.0	ϵ_r	41.50	40.99	-1.23%	± 5	
			σ	0.90	0.92	2.22%	± 5	
1900MHz Head	1850MHz	22.0	ϵ_r	40.00	38.37	-4.08%	± 5	08/19/2011
			σ	1.40	1.35	-3.57%	± 5	
	1900MHz	22.0	ϵ_r	40.00	38.19	-4.53%	± 5	
			σ	1.40	1.37	-2.14%	± 5	
	1930MHz	22.0	ϵ_r	40.00	38.12	-4.70%	± 5	
			σ	1.40	1.40	0.00%	± 5	
1900MHz Head	1850MHz	22.0	ϵ_r	40.00	38.37	-4.08%	± 5	09/30/2011
			σ	1.40	1.35	-3.57%	± 5	
	1900MHz	22.0	ϵ_r	40.00	38.19	-4.53%	± 5	
			σ	1.40	1.37	-2.14%	± 5	
	1930MHz	22.0	ϵ_r	40.00	38.12	-4.70%	± 5	
			σ	1.40	1.40	0.00%	± 5	



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
2450MHz Head	2400MHz	22.0	ϵ_r	39.20	39.73	1.35%	± 5	08/24/2011
			σ	1.80	1.74	-3.33%	± 5	
	2450MHz	22.0	ϵ_r	39.20	39.56	0.92%	± 5	
			σ	1.80	1.80	0.00%	± 5	
	2500MHz	22.0	ϵ_r	39.20	39.45	0.64%	± 5	
			σ	1.80	1.87	3.89%	± 5	

Table 4. Measured Tissue dielectric parameters for head phantom



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
835MHz Body	820MHz	22.0	ϵ_r	55.20	53.62	-2.86%	± 5	08/21/2011
			σ	0.97	0.94	-3.09%	± 5	
	835MHz	22.0	ϵ_r	55.20	53.50	-3.08%	± 5	
			σ	0.97	0.96	-1.03%	± 5	
	850MHz	22.0	ϵ_r	55.20	53.37	-3.32%	± 5	
			σ	0.97	0.97	0.00%	± 5	
835MHz Body	820MHz	22.0	ϵ_r	55.20	53.62	-2.86%	± 5	08/25/2011
			σ	0.97	0.94	-3.09%	± 5	
	835MHz	22.0	ϵ_r	55.20	53.50	-3.08%	± 5	
			σ	0.97	0.96	-1.03%	± 5	
	850MHz	22.0	ϵ_r	55.20	53.37	-3.32%	± 5	
			σ	0.97	0.97	0.00%	± 5	
835MHz Body	820MHz	22.0	ϵ_r	55.20	53.85	-2.45%	± 5	09/30/2011
			σ	0.97	0.97	0.00%	± 5	
	835MHz	22.0	ϵ_r	55.20	53.72	-2.68%	± 5	
			σ	0.97	0.98	1.03%	± 5	
	850MHz	22.0	ϵ_r	55.20	53.58	-2.93%	± 5	
			σ	0.97	1.00	3.09%	± 5	
1900MHz Body	1850MHz	22.0	ϵ_r	53.30	52.17	-2.12%	± 5	08/21/2011
			σ	1.52	1.45	-4.61%	± 5	
	1900MHz	22.0	ϵ_r	53.30	52.04	-2.36%	± 5	
			σ	1.52	1.50	-1.32%	± 5	
	1930MHz	22.0	ϵ_r	53.30	52.01	-2.42%	± 5	
			σ	1.52	1.53	0.66%	± 5	
1900MHz Body	1850MHz	22.0	ϵ_r	53.30	52.17	-2.12%	± 5	08/25/2011
			σ	1.52	1.45	-4.61%	± 5	
	1900MHz	22.0	ϵ_r	53.30	52.04	-2.36%	± 5	
			σ	1.52	1.50	-1.32%	± 5	
	1930MHz	22.0	ϵ_r	53.30	52.01	-2.42%	± 5	
			σ	1.52	1.53	0.66%	± 5	

Table 5. Measured Tissue dielectric parameters for body phantom



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
1900MHz Body	1850MHz	22.0	ϵ_r	53.30	52.13	-2.20%	± 5	09/30/2011
			σ	1.52	1.46	-3.95%	± 5	
	1900MHz	22.0	ϵ_r	53.30	52.05	-2.35%	± 5	
			σ	1.52	1.50	-1.32%	± 5	
	1930MHz	22.0	ϵ_r	53.30	51.95	-2.53%	± 5	
			σ	1.52	1.53	0.66%	± 5	
2450MHz Body	1850MHz	22.0	ϵ_r	52.70	51.81	-1.69%	± 5	08/22/2011
			σ	1.95	1.88	-3.59%	± 5	
	1900MHz	22.0	ϵ_r	52.70	51.67	-1.95%	± 5	
			σ	1.95	1.94	-0.51%	± 5	
	1930MHz	22.0	ϵ_r	52.70	51.50	-2.28%	± 5	
			σ	1.95	2.00	2.56%	± 5	
2450MHz Body	1850MHz	22.0	ϵ_r	52.70	51.81	-1.69%	± 5	08/25/2011
			σ	1.95	1.88	-3.59%	± 5	
	1900MHz	22.0	ϵ_r	52.70	51.67	-1.95%	± 5	
			σ	1.95	1.94	-0.51%	± 5	
	1930MHz	22.0	ϵ_r	52.70	51.50	-2.28%	± 5	
			σ	1.95	2.00	2.56%	± 5	

Table 6. Measured Tissue dielectric parameters for body phantom

4.3.2 Liquid Depth

The liquid level was during measurement 15cm \pm 0.5cm.

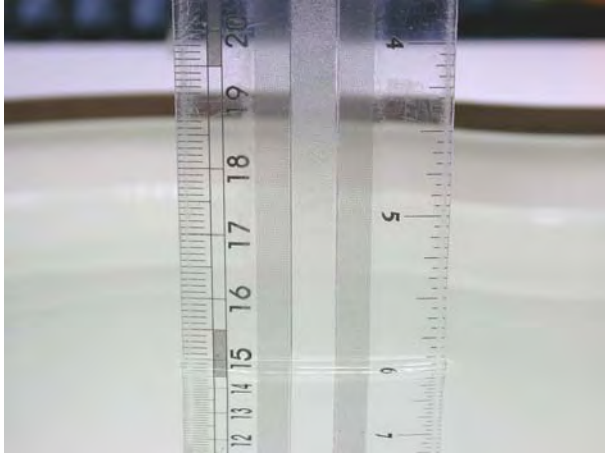


Figure 8. Head-Tissue-Simulating-Liquid



Figure 9. Body-Tissue-Simulating-Liquid



5. SAR Testing with RF Transmitters

5.1 SAR Testing with HSDPA Transmitters

HSDPA Data Devices setup for SAR Measurement.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below.³² The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.³³

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1,2)}$	CM (dB) ⁽³⁾	MRP (dB) ⁽³⁾
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note

- Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
- For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1A and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$ and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$
- CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
- For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 7. Setup for Release 5 HSDPA



HSPA Data Devices setup for SAR Measurement.

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. Body exposure conditions generally apply to these devices, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations without HSPA. The default test configuration is to establish a radio link between the DUT and a communication test set to configure a 12.2 kbps RMC (reference measurement channel) in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, EDPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest SAR configuration in WCDMA with 12.2 kbps RMC only. An FRC is configured according to HSDPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Subtest 5 requirements. SAR for other HSPA sub-test configurations is also confirmed selectively according to output power, exposure conditions and E-DCH UE Category. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. The UE Categories for HSDPCCH and HSPA should be clearly identified in the SAR report. The following procedures are applicable only if Maximum Power Reduction (MPR) is implemented according to Cubic Metric (CM) requirements.

When voice transmission and head exposure conditions are applicable to a WCDMA/HSPA data device, head exposure is measured according to the 'Head SAR Measurements' procedures in the 'WCDMA Handsets' section of this document. SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of this document. In addition, body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document.



The highest body SAR measured in Antenna Extended & Retracted configurations on a channel in 12.2 kbps RMC. The possible channels are the High, Middle & Low channel. Contact the FCC Laboratory for test and approval requirements if the maximum output power measured in E-DCH Sub-test 2 - 4 is higher than Sub-test 5.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	Bed (SF)	Bed (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 8. Setup for Release 6 HSPA / Release 7 HSPA+



5.2 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

5.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined

for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate.

The same data pattern should be used for all measurements.

5.2.2 Frequency Channel Configurations

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz §15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels. These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.



802.11 Test Channels per FCC Requirement

Mode	GHz	Channel	Turbo Channel	Default Test "Channels"				
				§15.247		UNII		
				802.11b	802.11g			
802.11 b/g	2412	1		✓	▽			
	2437	6	6	✓	▽			
	2462	11		✓	▽			
802.11a	5.18	36				✓		
	5.20	40	42 (5.21 GHz)				*	
	5.22	44					*	
	5.24	48						
	5.26	52	50 (5.25 GHz)			✓		
	5.28	56					*	
	5.30	60	58 (5.29 GHz)				*	
	5.32	64				✓		
	5.500	100	Unknown					*
	5.520	104					✓	
	5.540	108						*
	5.560	112						*
	5.580	116					✓	
	5.600	120						*
	5.620	124					✓	
	5.640	128						*
	5.660	132						*
	5.680	136					✓	
	5.700	140					*	
	UNII or §15.247	5.745	149		✓		✓	
5.765		153	152 (5.76 GHz)		*		*	
5.785		157		✓			*	
5.805		161	160 (5.80 GHz)		*	✓		
§15.247	5.825	165		✓				



5.3 Conducted Power

Band	Mode	CH	Frequency (MHz)	RF Conducted Output Power (dBm)	
				Time Average	Average burst
GSM 850	---	Lowest	824.2	23.61	32.80
		Middle	836.6	23.66	32.85
		Highest	848.8	23.51	32.70
GPRS 850 Class 12 (Max. D _L =4, Max. U _L =4, Sum=5)	4Down1Up	Lowest	824.2	23.62	32.81
		Middle	836.6	23.61	32.80
		Highest	848.8	23.52	32.71
	3Down2Up	Lowest	824.2	26.50	32.73
		Middle	836.6	26.49	32.72
		Highest	848.8	26.40	32.63
	2Down3Up	Lowest	824.2	26.66	31.13
		Middle	836.6	26.69	31.16
		Highest	848.8	26.57	31.04
	1Down4Up	Lowest	824.2	26.32	29.54
		Middle	836.6	26.33	29.55
		Highest	848.8	26.26	29.48
EGPRS 850 (Max. D _L =4, Max. U _L =4, Sum=5)	4Down1Up	Lowest	824.2	18.22	27.41
		Middle	836.6	18.20	27.39
		Highest	848.8	18.10	27.29
	3Down2Up	Lowest	824.2	19.65	25.88
		Middle	836.6	19.57	25.80
		Highest	848.8	19.49	25.72
	2Down3Up	Lowest	824.2	21.32	25.79
		Middle	836.6	21.31	25.78
		Highest	848.8	21.20	25.67
	1Down4Up	Lowest	824.2	21.55	24.77
		Middle	836.6	21.53	24.75
		Highest	848.8	21.43	24.65
DTM GPRS 850 Class 11 (Max. D _L =4, Max. U _L =3, Sum=5)	2Up (1CS+1PS)	Lowest	824.2	26.47	32.70
		Middle	836.6	26.57	32.80
		Highest	848.8	26.47	32.70
	3Up (1CS+2PS)	Lowest	824.2	26.61	31.08
		Middle	836.6	26.65	31.12
		Highest	848.8	26.61	31.08
DTM EGPRS 850 (Max. D _L =4, Max. U _L =3, Sum=5)	2Up (1CS+1PS)	Lowest	824.2	19.57	25.80
		Middle	836.6	19.67	25.90
		Highest	848.8	19.57	25.80
	3Up (1CS+2PS)	Lowest	824.2	21.33	25.80
		Middle	836.6	21.33	25.80
		Highest	848.8	21.33	25.80



Band	Mode	CH	Frequency (MHz)	RF Conducted Output Power (dBm)	
				Time Average	Average burst
GSM 1900	---	Lowest	1850.2	21.01	30.20
		Middle	1880.0	20.71	29.90
		Highest	1909.8	20.51	29.70
GPRS 1900 (Max. D _L =4, Max. U _L =4, Sum=5)	4Down1Up	Lowest	1850.2	20.94	30.13
		Middle	1880.0	20.66	29.85
		Highest	1909.8	20.47	29.66
	3Down2Up	Lowest	1850.2	23.89	30.12
		Middle	1880.0	23.60	29.83
		Highest	1909.8	23.41	29.64
	2Down3Up	Lowest	1850.2	24.09	28.56
		Middle	1880.0	23.81	28.28
		Highest	1909.8	23.63	28.10
	1Down4Up	Lowest	1850.2	23.88	27.10
		Middle	1880.0	23.58	26.80
		Highest	1909.8	23.38	26.60
EGPRS 1900 (Max. D _L =4, Max. U _L =4, Sum=5)	4Down1Up	Lowest	1850.2	17.61	26.80
		Middle	1880.0	17.55	26.74
		Highest	1909.8	17.32	26.51
	3Down2Up	Lowest	1850.2	19.50	25.73
		Middle	1880.0	19.44	25.67
		Highest	1909.8	19.25	25.48
	2Down3Up	Lowest	1850.2	21.25	25.72
		Middle	1880.0	21.21	25.68
		Highest	1909.8	21.03	25.50
	1Down4Up	Lowest	1850.2	20.95	24.17
		Middle	1880.0	20.90	24.12
		Highest	1909.8	20.74	23.96
DTM GPRS 1900 (Max. D _L =4, Max. U _L =3, Sum=5)	2Up (1CS+1PS)	Lowest	1850.2	23.87	30.10
		Middle	1880.0	23.67	29.90
		Highest	1909.8	23.27	29.50
	3Up (1CS+2PS)	Lowest	1850.2	23.93	28.40
		Middle	1880.0	23.83	28.30
		Highest	1909.8	23.53	28.00
DTM EGPRS 1900 (Max. D _L =4, Max. U _L =3, Sum=5)	2Up (1CS+1PS)	Lowest	1850.2	19.57	25.80
		Middle	1880.0	19.37	25.60
		Highest	1909.8	19.07	25.30
	3Up (1CS+2PS)	Lowest	1850.2	21.13	25.60
		Middle	1880.0	20.93	25.40
		Highest	1909.8	20.73	25.20



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
IEEE 802.11b	1 M	1	2412.0	19.68
		6	2437.0	19.89
		11	2462.0	20.10
	2 M	1	2412.0	19.74
		6	2437.0	19.81
		11	2462.0	20.01
	5.5 M	1	2412.0	19.66
		6	2437.0	19.92
		11	2462.0	20.04
	11 M	1	2412.0	19.61
		6	2437.0	19.71
		11	2462.0	19.95
IEEE 802.11g	6 M	1	2412.0	13.02
		6	2437.0	13.19
		11	2462.0	13.31
	9 M	1	2412.0	13.02
		6	2437.0	13.09
		11	2462.0	13.31
	12 M	1	2412.0	12.85
		6	2437.0	12.95
		11	2462.0	13.21
	18 M	1	2412.0	12.68
		6	2437.0	12.83
		11	2462.0	13.01
	24 M	1	2412.0	12.37
		6	2437.0	12.69
		11	2462.0	12.76
	36 M	1	2412.0	12.18
		6	2437.0	12.38
		11	2462.0	12.42
	48 M	1	2412.0	11.78
		6	2437.0	12.01
		11	2462.0	12.22
	54 M	1	2412.0	11.72
		6	2437.0	11.86
		11	2462.0	12.02



Band	Data Rate	CH	Frequency (MHz)	RF Conducted Output Power (dBm)
				Average
Draft 802.11n_HT20 (2.4 GHz)	MCS0	1	2412.0	12.94
		6	2437.0	13.01
		11	2462.0	13.28
	MCS1	1	2412.0	12.67
		6	2437.0	12.78
		11	2462.0	13.06
	MCS2	1	2412.0	12.48
		6	2437.0	12.52
		11	2462.0	12.91
	MCS3	1	2412.0	12.35
		6	2437.0	12.49
		11	2462.0	12.75
	MCS4	1	2412.0	12.05
		6	2437.0	12.22
		11	2462.0	12.45
	MCS5	1	2412.0	11.71
		6	2437.0	11.78
		11	2462.0	12.08
	MCS6	1	2412.0	11.55
		6	2437.0	11.77
		11	2462.0	11.92
	MCS7	1	2412.0	11.40
		6	2437.0	11.56
		11	2462.0	11.88



5.4 Simultaneous Transmitting Evaluate

RF Conducted Power		
Band	dBm	W
GSM/GPRS/EGPRS 850	26.69	0.466
GSM/GPRS/EGPRS 1900	24.09	0.256
Wi-Fi 802.11b	20.10	0.102
Wi-Fi 802.11g	13.31	0.0214
Wi-Fi 802.11n_2.4GHz	13.28	0.0213
BT 2.0	-0.57	0.0009

Antenna Distance	
Antenna Account	Distance (cm)
BT to WLAN	0
BT to GSM(License)	4.17
WLAN to GSM(License)	4.17

BT and GSM/WCDMA and WLAN simultaneously SAR Description

(1) Antenna Distance

1a. BT/WLAN & GSM 4.17 cm

1b. BT & WLAN 0cm

(2) GSM/BT – with antenna separation distance greater than >2.5cm <5cm – BT power is less than Pref, Than both stand alone for BT and simultaneous SAR of GSM/BT is not required.

(3) WLAN/BT – Antenna is not simultaneously transmission, Therefore Simultaneous SAR is not required.

(4) GSM850/PCS Stand-alone SAR is required due to routine evaluation requirements.

(5) Highest Simultaneous SAR Evaluation:

Body SAR: $\Sigma \text{SAR} = \text{GPRS 850} + \text{Wifi 802.11b} = 0.778 + 0.252 = 1.03 \text{mW/g} < \text{SAR limit: } 1.6 \text{mW/g}$

Head SAR: $\Sigma \text{SAR} = \text{GPRS 1900} + \text{Wifi 802.11b} = 1.15 + 0.115 = 1.265 \text{mW/g} < \text{SAR limit: } 1.6 \text{mW/g}$

Therefore, the Simultaneous SAR is not required.

(6) For WiFi hot spot mode, since the GSM network will support the DTM mode, therefore the GPRS/EGPRS SAR of head is required.

Note:

1. Simultaneous Transmitting Summary, please find the table-1 as below.

2. Simultaneous Transmission Summation of SAR, please find the table-2 as below.

2.1 For Edge Top mode, that WWAN antenna to edge top >5cm, therefore the WWAN Stand-alone SAR is not required (hot -spot mode).

2.2 For (Edge Bottom mode & Edge Left mode), that WLAN antenna to edge Bottom & Edge Left mode >5cm, therefore the WLAN Stand-alone SAR is not required (hot -spot mode).



Table 9.

Right-Cheek mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.234	0.13	0.364	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.110	0.13	0.240	<1.6
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.194	0.13	0.324	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.548	0.13	0.678	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.191	0.13	0.321	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Cheek	0.510	0.13	0.64	<1.6

Right-Tilted mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.057	0.181	0.238	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.139	0.181	0.320	<1.6
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.125	0.181	0.306	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.273	0.181	0.454	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.113	0.181	0.294	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Right-Tilted	0.237	0.181	0.418	<1.6



Left-Cheek mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.171	0.115	0.286	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.467	0.115	0.582	<1.6
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.367	0.115	0.482	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	1.150	0.115	1.265	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.364	0.115	0.479	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Cheek	0.797	0.115	0.912	<1.6



Left-Tilted mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GSM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.121	0.087	0.208	<1.6
Simult Tx	Configuration	GSM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.171	0.087	0.258	<1.6
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.261	0.087	0.348	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.257	0.087	0.344	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.252	0.087	0.339	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Head SAR	Left-Tilted	0.215	0.087	0.302	<1.6



Back surface mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.778	0.252	1.030	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.756	0.252	1.008	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.680	0.252	0.932	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.739	0.252	0.991	<1.6

Front surface mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.430	0.044	0.474	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.414	0.044	0.458	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.347	0.044	0.391	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.338	0.044	0.382	<1.6



Edge Right mode					
The sum of the 1-g SAR					
Simult Tx	Configuration	GPRS 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.414	0.078	0.492	<1.6
Simult Tx	Configuration	GPRS 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.207	0.078	0.285	<1.6
Simult Tx	Configuration	DTM 850 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.333	0.078	0.411	<1.6
Simult Tx	Configuration	DTM 1900 SAR mW/g	WLAN SAR mW/g	Σ SAR mW/g	Σ SAR
Body SAR	Flat	0.170	0.078	0.248	<1.6

6. System Performance Check

6.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	835, 1750, 1900, 2450 MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D835V2: dipole length 161 mm; overall height 340 mm D1900V2: dipole length 67.7 mm; overall height 300 mm D2450V2 : dipole length 51.5 mm; overall height 300 mm

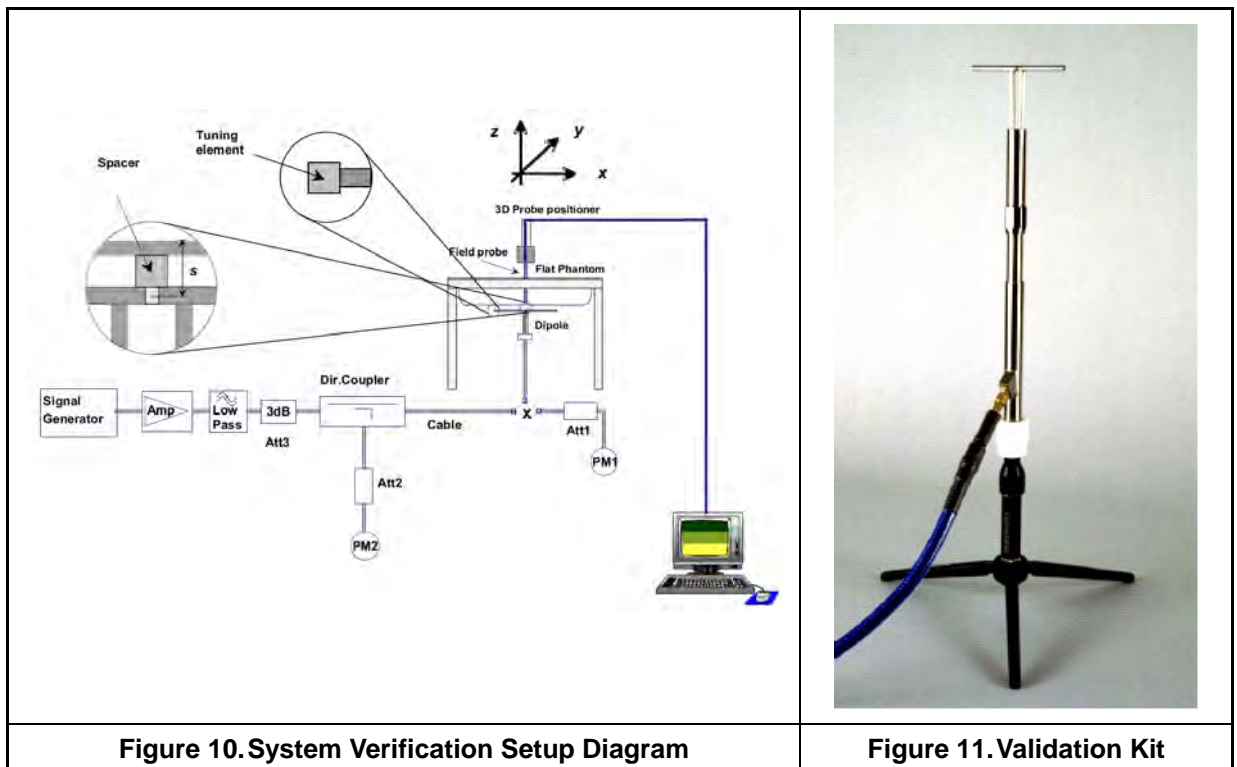


Figure 10. System Verification Setup Diagram

Figure 11. Validation Kit



6.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The validation was performed at 835, 1900, 2450 MHz.


Validation kit		Mixture Type	SAR _{1g} [mW/g]		SAR _{10g} [mW/g]		Date of Calibration
D835V2-SN4d082		Head	9.25		6.07		07/19/2011
D1900V2-SN5d111		Head	39.9		21.0		07/16/2011
D2450V2-SN712		Head	52.9		24.5		02/23/2011
Frequency (MHz)	Power (dBm)	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
					1g	10g	
835 (Head)	250mW	2.37	1.54	0.114	2.5 %	1.5 %	08/15/2011
	Normalize to 1 Watt	9.48	6.16				
835 (Head)	250mW	2.39	1.55	0.0115	3.4 %	2.1 %	08/19/2011
	Normalize to 1 Watt	9.56	6.2				
835 (Head)	250mW	2.23	1.45	-0.015	-3.6 %	-4.4 %	09/29/2011
	Normalize to 1 Watt	8.92	5.8				
1900 (Head)	250mW	9.91	5.13	-0.023	-0.7 %	-2.3 %	08/19/2011
	Normalize to 1 Watt	39.64	20.52				
1900 (Head)	250mW	10.2	5.03	-0.047	2.3 %	-3.3 %	09/30/2011
	Normalize to 1 Watt	40.8	20.12				
2450 (Head)	250mW	13.4	6.14	0.0196	1.3 %	0.2 %	08/24/2011
	Normalize to 1 Watt	53.6	24.56				




Validation kit		Mixture Type	SAR _{1g} [mW/g]		SAR _{10g} [mW/g]		Date of Calibration
D835V2-SN4d082		Body	9.43		6.22		07/19/2011
D1900V2-SN5d111		Body	41.9		22.5		07/16/2011
D2450V2-SN712		Body	50.4		23.3		02/23/2011
Frequency (MHz)	Power (dBm)	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
					1g	10g	
835 (Body)	250mW	2.31	1.51	-0.105	-2.0 %	-2.9 %	08/21/2011
	Normalize to 1 Watt	9.24	6.04				
835 (Body)	250mW	2.35	1.53	-0.012	-0.3 %	-1.6 %	08/25/2011
	Normalize to 1 Watt	9.4	6.12				
835 (Body)	250mW	2.4	1.5	-0.163	1.8 %	-3.5 %	09/30/2011
	Normalize to 1 Watt	9.6	6				
1900 (Body)	250mW	10.7	5.54	0.012	2.1 %	-1.5 %	08/21/2011
	Normalize to 1 Watt	42.8	22.16				
1900 (Body)	250mW	10.6	5.52	0.029	1.2 %	-1.9 %	08/25/2011
	Normalize to 1 Watt	42.4	22.08				
1900 (Body)	250mW	10.9	5.43	0.036	4.1 %	-3.5 %	09/30/2011
	Normalize to 1 Watt	43.6	21.72				
2450 (Body)	250mW	13	6.01	0.042	3.2 %	3.2 %	08/22/2011
	Normalize to 1 Watt	52	24.04				
2450 (Body)	250mW	13.1	6.01	0.127	4.0 %	3.2 %	08/25/2011
	Normalize to 1 Watt	52.4	24.04				



Z-axis Plot of System Performance Check

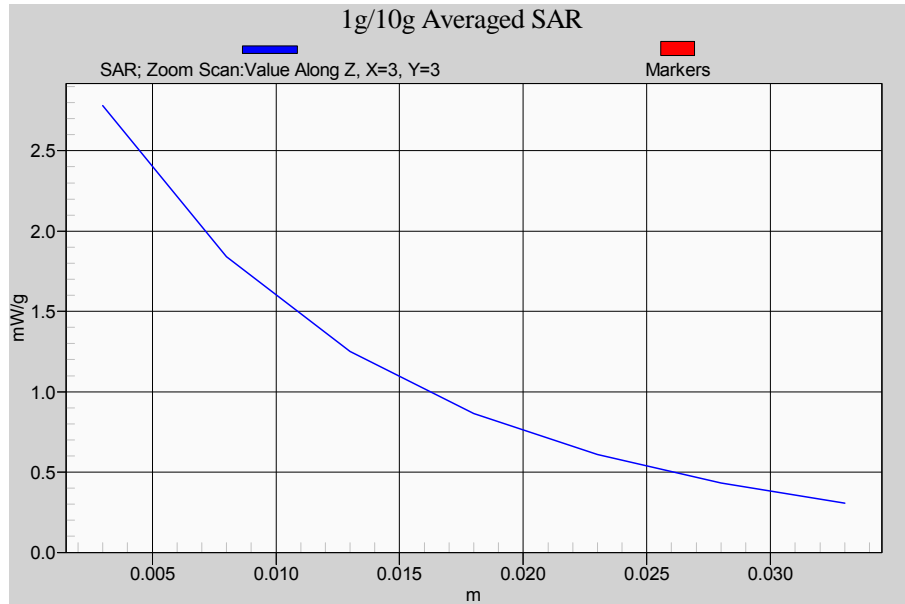


Head-Tissue-Simulating-Liquid 835MHz (08/15/2011)

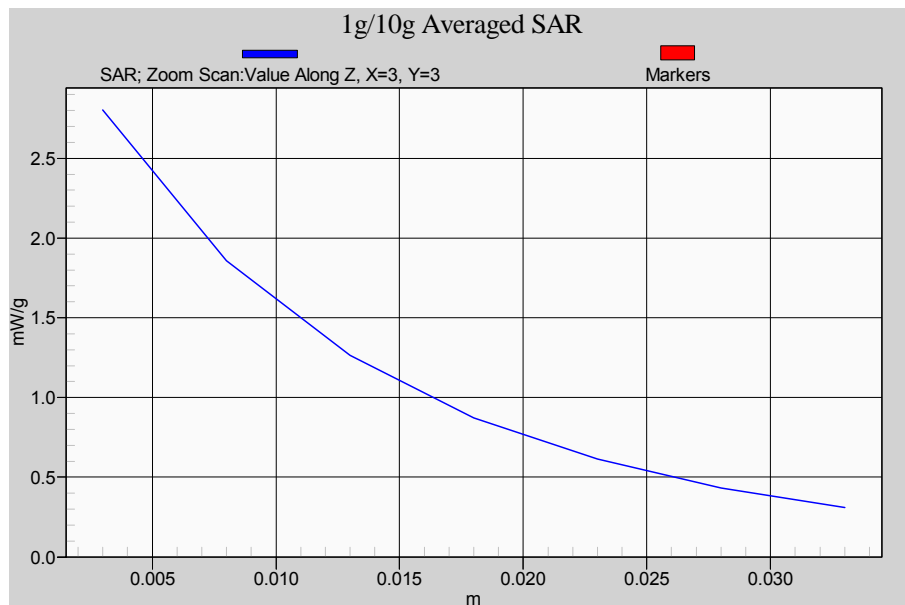


Head-Tissue-Simulating-Liquid 835MHz (08/19/2011)



Z-axis Plot of System Performance Check

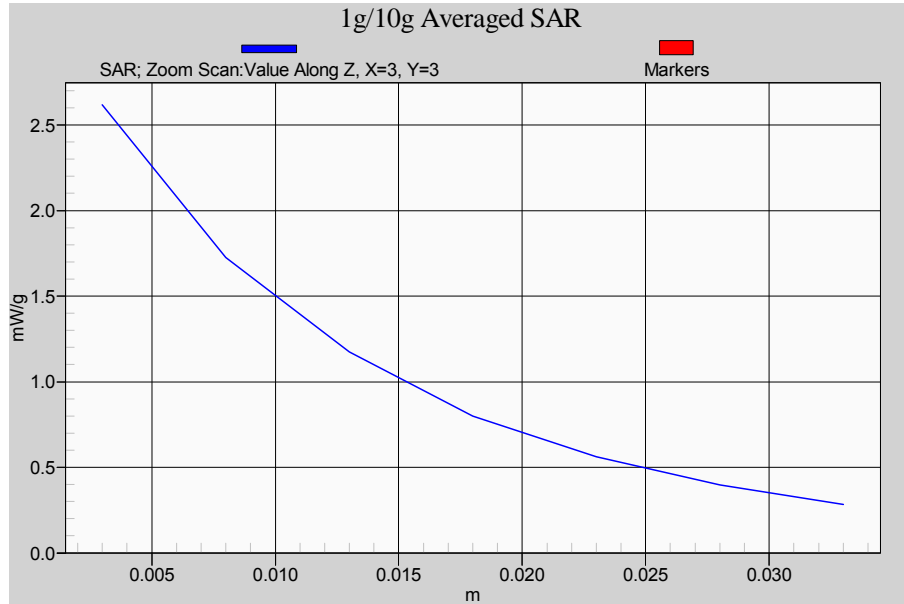


Head-Tissue-Simulating-Liquid 835MHz (09/29/2011)

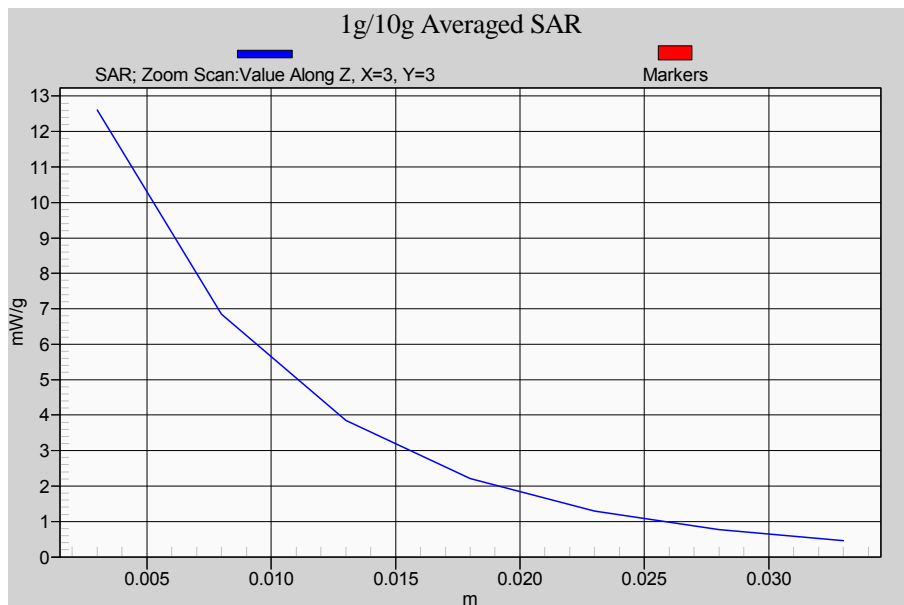


Head-Tissue-Simulating-Liquid 1900MHz (08/19/2011)



Z-axis Plot of System Performance Check

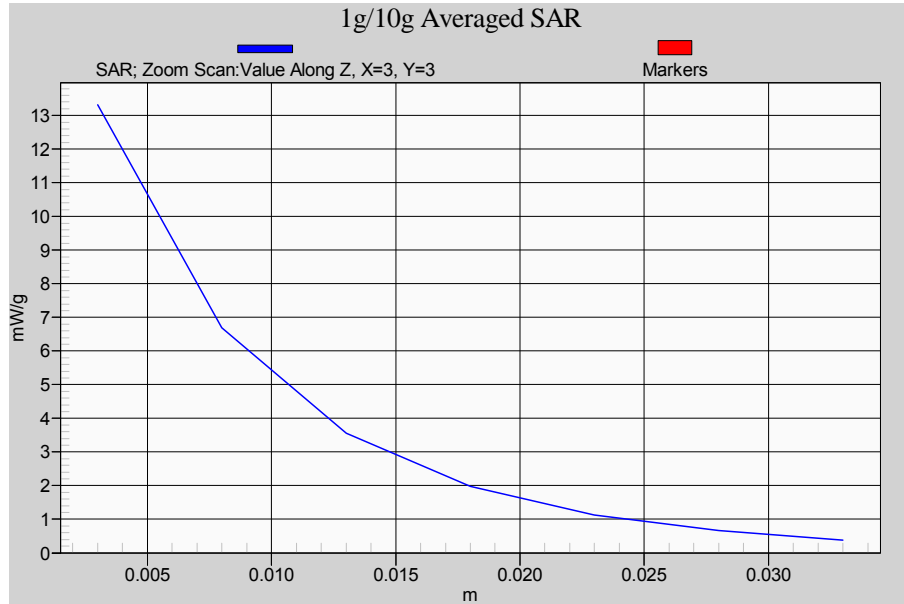


Head-Tissue-Simulating-Liquid 1900MHz (09/30/2011)

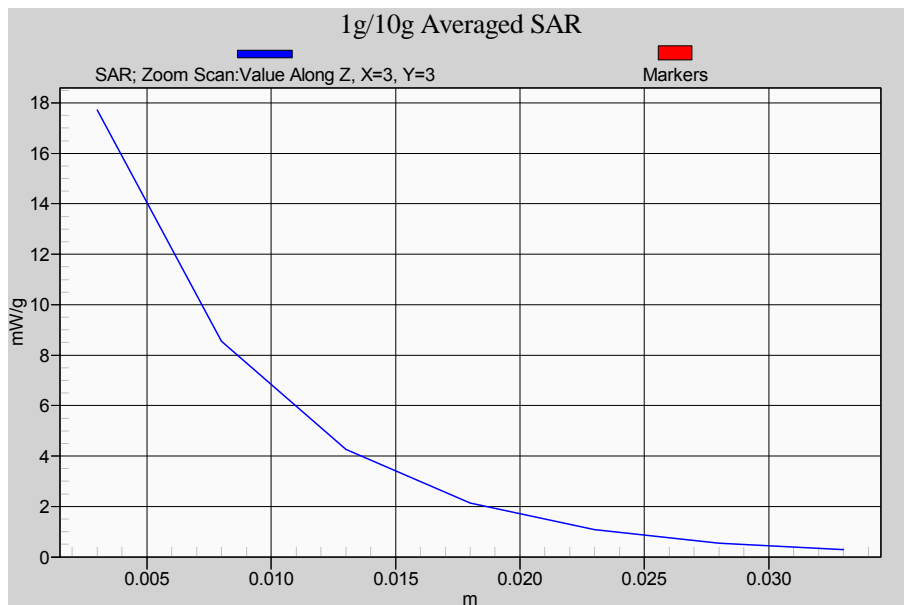


Head-Tissue-Simulating-Liquid 2450MHz

Z-axis Plot of System Performance Check

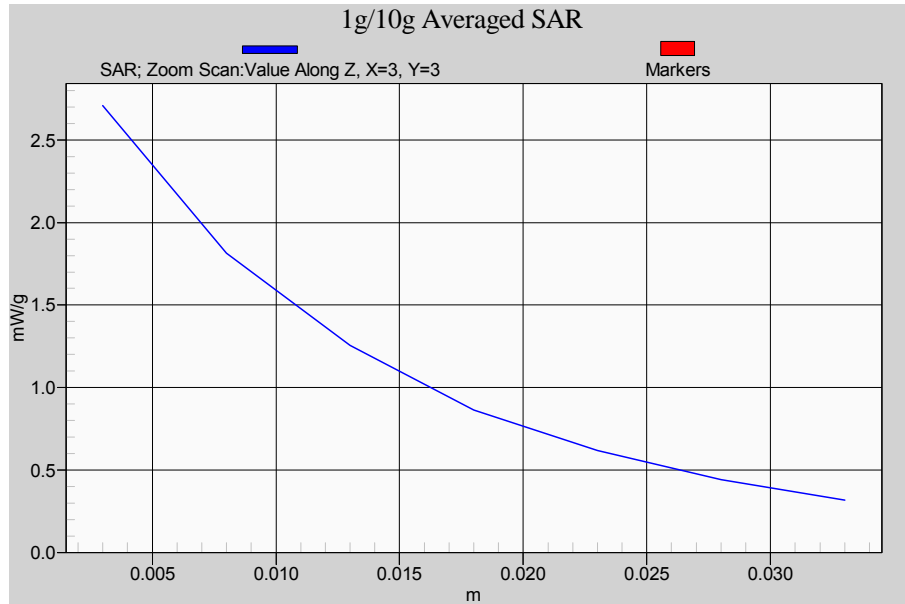


Body-Tissue-Simulating-Liquid 835MHz (08/21/2011)

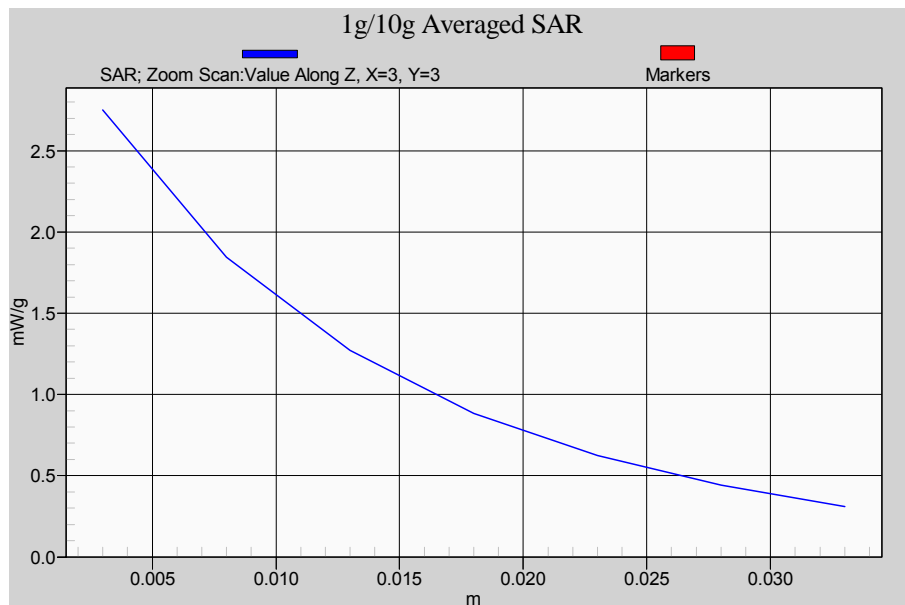


Body-Tissue-Simulating-Liquid 835MHz (08/25/2011)



Z-axis Plot of System Performance Check

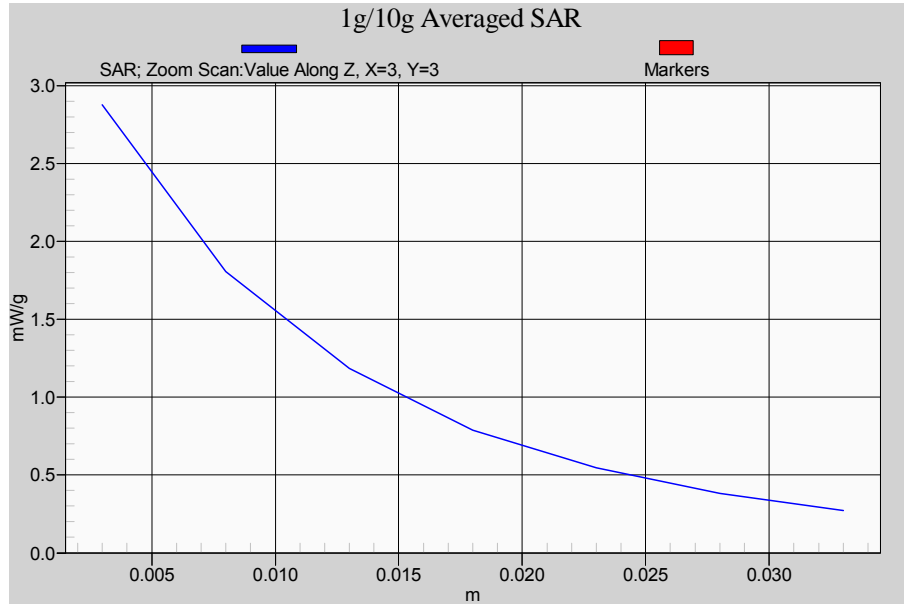


Body-Tissue-Simulating-Liquid 835MHz (09/30/2011)

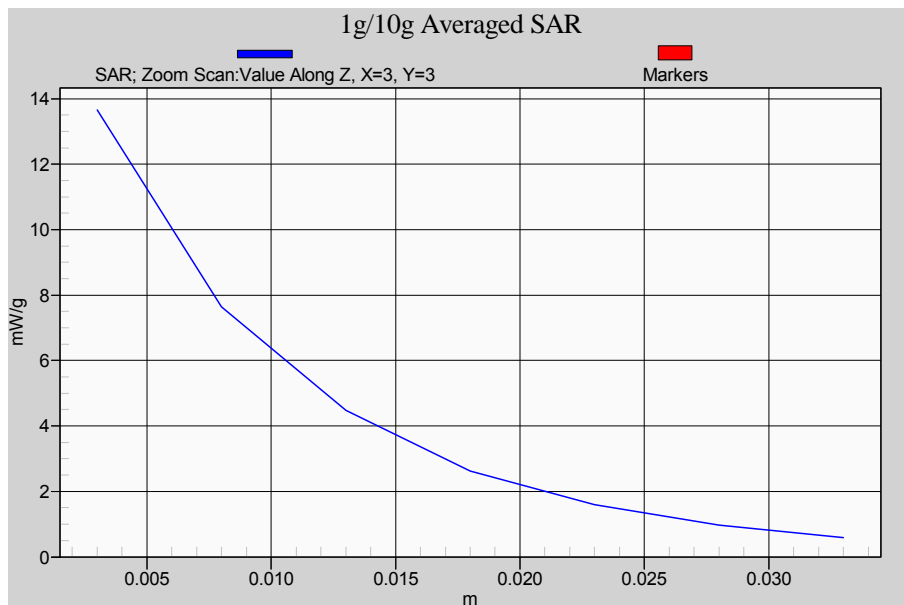


Body-Tissue-Simulating-Liquid 1900MHz (08/21/2011)

Z-axis Plot of System Performance Check

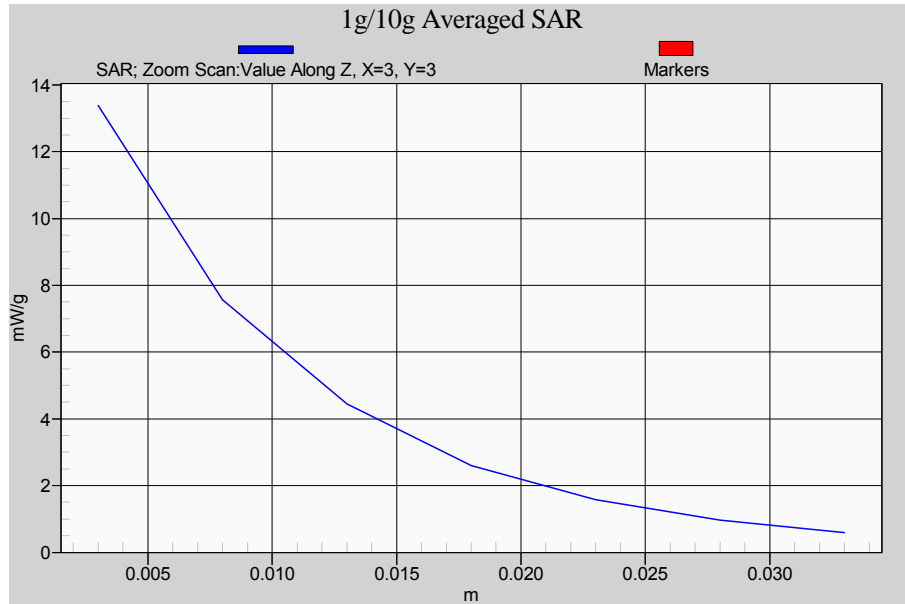


Body-Tissue-Simulating-Liquid 1900MHz (08/25/2011)

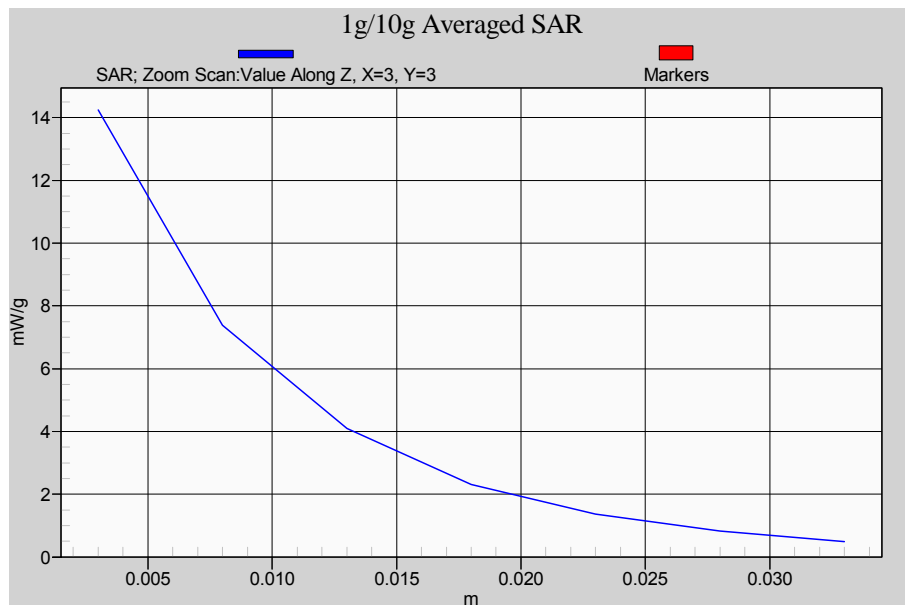


Body-Tissue-Simulating-Liquid 1900MHz (09/30/2011)



Z-axis Plot of System Performance Check

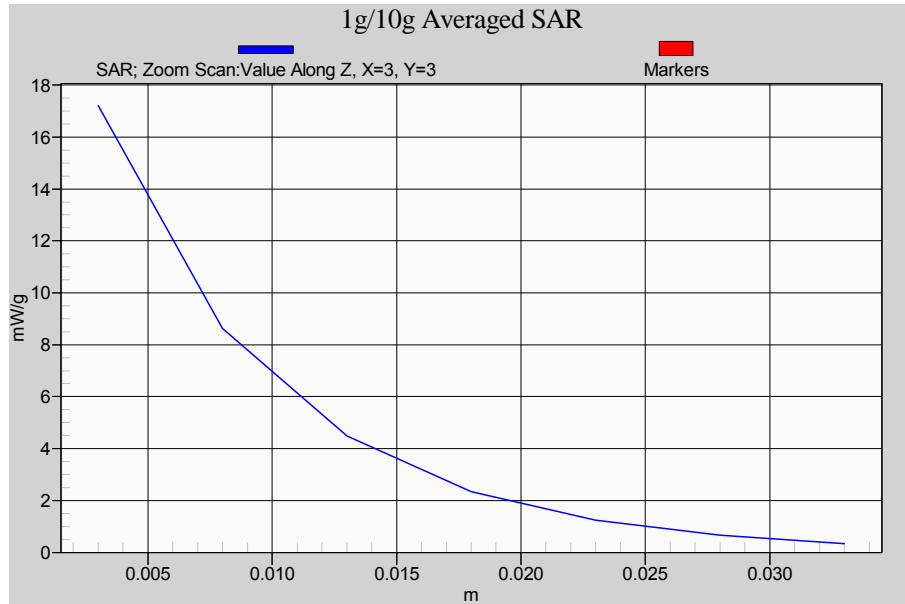

Body-Tissue-Simulating-Liquid 2450MHz (08/22/2011)

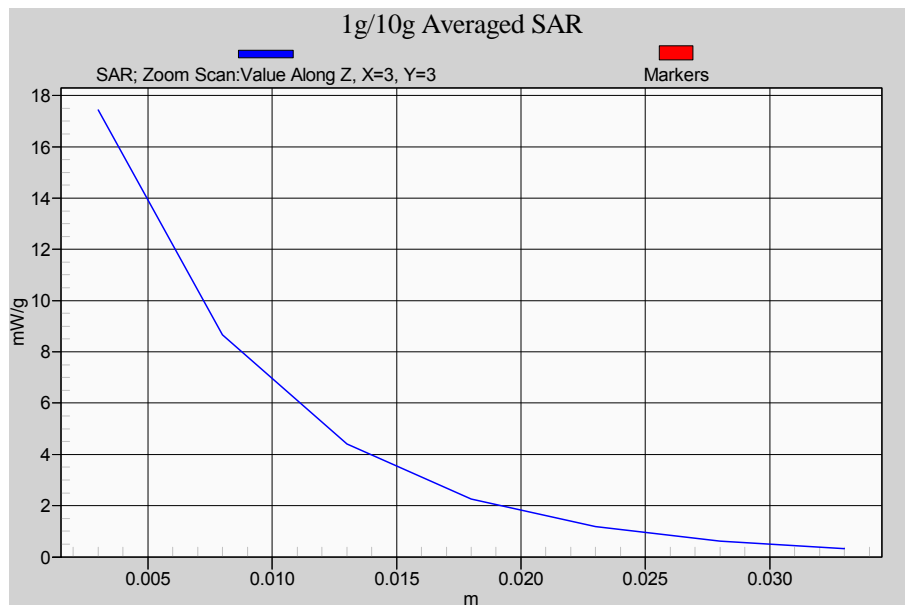

Body-Tissue-Simulating-Liquid 2450MHz (08/25/2011)



7. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	EX3DV4	3632	01/19/2011	01/19/2012
SPEAG	Dosimetric E-Field Probe	EX3DV4	3801	07/11/2011	07/11/2012
SPEAG	835MHz System Validation Kit	D835V2	4d082	07/19/2011	07/19/2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d111	07/22/2011	07/22/2012
SPEAG	2450MHz System Validation Kit	D2450V2	712	02/23/2011	02/23/2012
SPEAG	Data Acquisition Electronics	DAE4	779	01/31/2011	01/31/2012
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Phantom	SAM V4.0	TP-1150	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY5 V5.0 Build 125	N/A	NCR	
SPEAG	Software	SEMCAD V13.4 Build 125	N/A	NCR	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	07/07/2011	07/07/2012
R&S	Power Sensor	NRP-Z22	100179	05/27/2011	05/27/2012
Agilent	MXG Vector Signal Generator	N5182A	MY47420962	05/16/2011	05/16/2012
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	

Table 10. Test Equipment List



8. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 20.10\%$ [8] .

According to Std. C95.3 [9], the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10] , typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.



Uncertainty Component	Uncertainty Value	Probability Distribution	Divisor	c_i (1g)	c_i (10g)	Standard Uncertainty $\pm 1\%$ (1-g)	Standard Uncertainty $\pm 1\%$ (10-g)	v_i or V_{eff}
Measurement System								
Probe Calibration (k=1)	$\pm 5.5\%$	Normal	1	1	1	$\pm 5.5\%$	$\pm 5.5\%$	∞
Probe Isotropy	$\pm 7.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.1\%$	$\pm 3.1\%$	∞
Boundary Effect	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System Detection Limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.58\%$	$\pm 0.58\%$	∞
Readout Electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response Time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration Time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF Ambient Conditions	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
RF Ambient Reflections	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
Probe Positioner Mechanical Tolerance	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe Positioning with respect to Phantom Shell	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test sample Related								
Test sample Positioning	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	89
Device Holder Uncertainty	$\pm 3.5\%$	Normal	1	1	1	$\pm 3.5\%$	$\pm 3.5\%$	5
Output Power Variation - SAR drift measurement	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid Conductivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid Conductivity - measurement uncertainty	$\pm 1.93\%$	Normal	1	0.64	0.43	$\pm 1.24\%$	$\pm 0.83\%$	69
Liquid Permittivity - deviation from target values	± 5.0	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid Permittivity - measurement uncertainty	$\pm 1.4\%$	Normal	1	0.6	0.49	$\pm 0.84\%$	$\pm 0.69\%$	69
Combined standard uncertainty		RSS				$\pm 10.05\%$	$\pm 9.85\%$	313
Expanded uncertainty (95% CONFIDENCE LEVEL)		k=2				$\pm 20.10\%$	$\pm 19.70\%$	

Table 11. System uncertainty: 300MHz -3000MHz



9. Measurement Procedure

The measurement procedures are as follows:

1. For WLAN function, engineering testing software installed on Notebook can provide continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1g and 10g



9.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 7x7x9 points with step size 5, 5 and 3 mm for 300 MHz to 3 GHz, and 7x7x9 points with step size 5, 5 and 3 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

9.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.4 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



10. SAR Test Results Summary

10.1 Head SAR

Measurement Results								
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz						
GSM 850	190	836.6	32.85	Right-cheek	0	0.110	-0.005	---
	190	836.6	32.85	Right-Tilted	0	0.057	-0.119	---
	190	836.6	32.85	Left-cheek	0	0.171	-0.062	---
	190	836.6	32.85	Left-Tilted	0	0.121	0.000	---
GSM 1900	512	1850.2	30.20	Right-cheek	0	0.234	0.023	---
	512	1850.2	30.20	Right-Tilted	0	0.139	-0.051	---
	512	1850.2	30.20	Left-cheek	0	0.467	-0.122	---
	512	1850.2	30.20	Left-Tilted	0	0.171	-0.014	---
GPRS 850 2Down3Up	190	836.6	31.16	Right-cheek	0	0.194	0.083	---
	190	836.6	31.16	Right-Tilted	0	0.125	-0.021	---
	190	836.6	31.16	Left-cheek	0	0.367	-0.003	---
	190	836.6	31.16	Left-Tilted	0	0.261	0.021	---
GPRS 1900 2Down3Up	512	1850.2	28.56	Right-cheek	0	0.548	-0.015	---
	512	1850.2	28.56	Right-Tilted	0	0.273	0.011	---
	512	1850.2	28.56	Left-cheek	0	0.852	-0.124	---
	661	1880.0	28.28	Left-cheek	0	1.030	0.130	---
	810	1909.8	28.10	Left-cheek	0	1.150	0.032	---
	512	1850.2	28.56	Left-Tilted	0	0.257	0.034	---
DMT GPRS 850 3Up (1CS+2PS)	190	836.6	31.16	Right-cheek	0	0.191	0.086	---
	190	836.6	31.16	Right-Tilted	0	0.113	-0.122	---
	190	836.6	31.16	Left-cheek	0	0.364	-0.013	---
	190	836.6	31.16	Left-Tilted	0	0.252	0.063	---
DMT GPRS 1900 3Up (1CS+2PS)	512	1850.2	28.56	Right-cheek	0	0.510	-0.116	---
	512	1850.2	28.56	Right-Tilted	0	0.237	0.083	---
	512	1850.2	28.56	Left-cheek	0	0.797	-0.042	---
	512	1850.2	28.56	Left-Tilted	0	0.215	0.031	---
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram			



Measurement Results								
IEEE 802.11b Rate 1M	11	2462.0	20.10	Right-cheek	0	0.130	-0.048	---
	11	2462.0	20.10	Right-Tilted	0	0.181	0.032	---
	11	2462.0	20.10	Left-cheek	0	0.115	0.089	---
	11	2462.0	20.10	Left-Tilted	0	0.087	0.176	---
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram			

- Notes:
1. 802.11g & 802.11n power are not more than 802.11b 0.25dB, therefore 802.11g Stand-alone SAR is not required.
 2. If the Channel's SAR 1g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.



10.2 Body SAR

Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
GSM 850	190	836.6	32.85	Flat	10	Headset	0.049	0.001	Front Surface to Phantom
	190	836.6	32.85	Flat	10	Headset	0.097	-0.020	Back Surface to Phantom
GSM 1900	512	1850.2	30.20	Flat	10	Headset	0.110	-0.145	Front Surface to Phantom
	512	1850.2	30.20	Flat	10	Headset	0.185	-0.141	Back Surface to Phantom
IEEE 802.11b Rate 1M	11	2462.0	20.10	Flat	10	Headset	0.016	-0.035	Front Surface to Phantom
	11	2462.0	20.10	Flat	10	Headset	0.098	0.140	Back Surface to Phantom
GPRS 850 2Down3Up	190	836.6	31.16	Flat	10	Headset	0.430	0.003	Front Surface to Phantom
	190	836.6	31.16	Flat	10	Headset	0.778	0.042	Back Surface to Phantom
	190	836.6	31.16	Flat	10	Headset	0.245	0.046	Edge left to Phantom
	190	836.6	31.16	Flat	10	Headset	0.414	0.014	Edge Right to Phantom
	190	836.6	31.16	Flat	10	Headset	0.106	0.061	Edge bottom to Phantom
GPRS 1900 2Down3Up	512	1850.2	28.56	Flat	10	Headset	0.414	0.020	Front Surface to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.756	0.090	Back Surface to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.163	-0.092	Edge left to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.207	-0.058	Edge Right to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.395	0.043	Edge bottom to Phantom
DMT GPRS 850 3Up (1CS+2PS)	190	836.6	31.16	Flat	10	Headset	0.347	0.011	Front Surface to Phantom
	190	836.6	31.16	Flat	10	Headset	0.680	0.125	Back Surface to Phantom
	190	836.6	31.16	Flat	10	Headset	0.198	0.119	Edge left to Phantom
	190	836.6	31.16	Flat	10	Headset	0.333	0.014	Edge Right to Phantom
	190	836.6	31.16	Flat	10	Headset	0.084	0.166	Edge bottom to Phantom
DMT GPRS 1900 3Up (1CS+2PS)	512	1850.2	28.56	Flat	10	Headset	0.338	0.130	Front Surface to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.739	0.098	Back Surface to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.136	-0.086	Edge left to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.170	-0.122	Edge Right to Phantom
	512	1850.2	28.56	Flat	10	Headset	0.328	0.144	Edge bottom to Phantom
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Measurement Results									
Band	Frequency		Power (dBm)	Phantom Position	Spacing (mm)	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Remark
	CH	MHz							
IEEE 802.11b Rate 1M	11	2462.0	20.10	Flat	10	Headset	0.044	0.184	Front Surface to Phantom
	11	2462.0	20.10	Flat	10	Headset	0.252	0.032	Back Surface to Phantom
	11	2462.0	20.10	Flat	10	Headset	0.078	0.191	Edge Right to Phantom
	11	2462.0	20.10	Flat	10	Headset	0.071	-0.131	Edge Top to Phantom
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1 gram			



Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to FCC/OET Bulletin 65, Supplement C [June 2001], IEEE1528-2003 and RSS-102.
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Batteries are fully charged for all readings.
5. Base on power table (section 5.2), the worst case is 802.11b CH1 rate 1M, therefore the test sample was investigated on this configuration.
6. 802.11g & 802.11n power are not more than 802.11b 0.25dB, therefore 802.11g Stand-alone SAR is not required.
7. If the Channel's SAR 1g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.
8. In Hot-spot mode, the antenna location to edge > 5 cm, therefore for WWAN antenna in edge top is not required.
9. In Hot-spot mode, the antenna location to edge > 5 cm, therefore for WLAN antenna in edge bottom and edge Left is not required.
10. Since the DUT support the WI-FI hotspot function and form factor $> 9\text{cm} \times 5\text{cm}$, therefore GPRS/EGPRS is performed SAR at 10mm.
11. Since the Wi-Fi hotspot function is not support voice mode, therefore GSM is not performed SAR at 10mm
12. Since the source-base time-averaged output power of EGPRS lower than that in the GPRS mode, therefore EGPRS is not performed SAR at 10mm



10.3 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 12. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue. (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole – body.
- *** The Spatial Average value of the SAR averaged over the partial – body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue. (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



11. Conclusion

The SAR test values found for the portable mobile phone **HTC Corporation Trade Name : HTC Model(s) : PJ03100** is below the maximum recommended level of 1.6 W/kg (mW/g).

12. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, "Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency. 10KHz-300GHz*, Jan. 1995.
- [11] KDB248227 D01 SAR meas for 802 11 a b g v01r02.
- [12] KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05
- [13] KDB 941225 D01 SAR Test for 3G Devices 3G-SAR
- [14] KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE
- [15] KDB 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- [16] KDB 941225 D06 Hot Spot SAR v01



Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/15/2011 11:36:19 PM

System Performance Check at 835MHz_20110815_Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid:
 $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 2.78 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 54.3 V/m; Power Drift = 0.114 dB
Peak SAR (extrapolated) = 3.6 W/kg
SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.54 mW/g
Maximum value of SAR (measured) = 2.78 mW/g

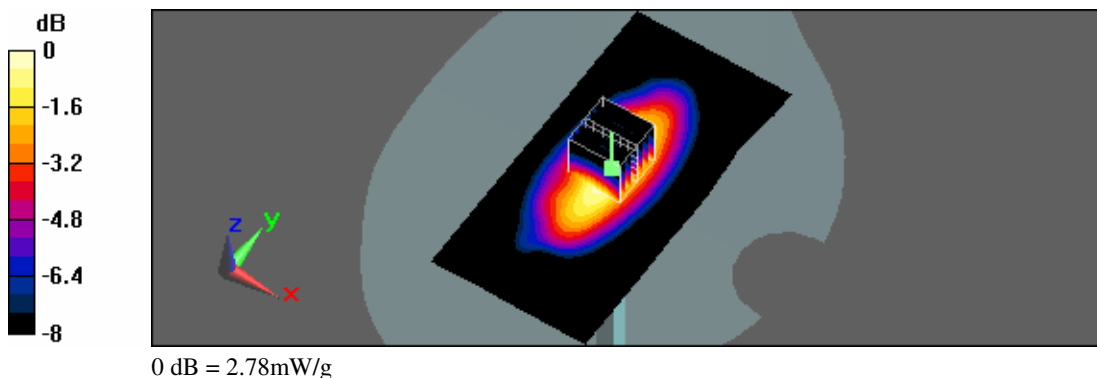



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 10:55:12 AM

System Performance Check at 835MHz_20110819_Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.76, 8.76, 8.76); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.8 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.6 V/m; Power Drift = 0.011 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.55 mW/g
Maximum value of SAR (measured) = 2.8 mW/g

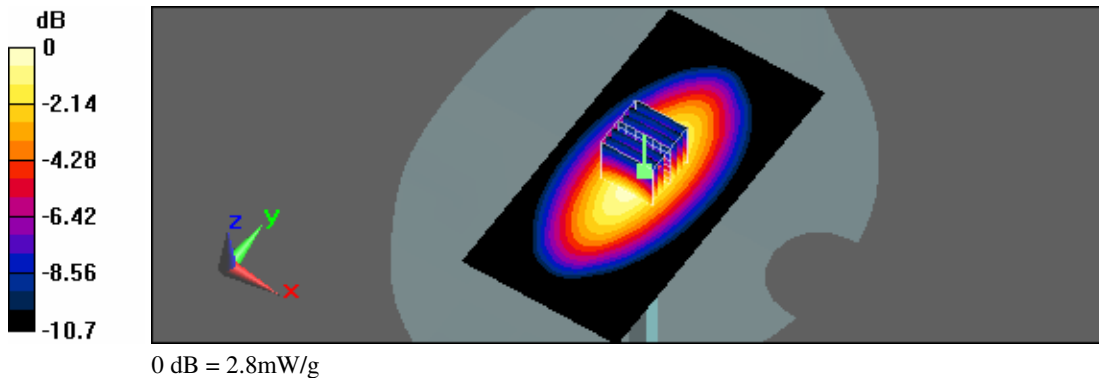

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/29/2011 10:54:45 PM

System Performance Check at 835MHz_20110929_Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 2.62 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 54 V/m; Power Drift = -0.015 dB
 Peak SAR (extrapolated) = 3.41 W/kg
SAR(1 g) = 2.23 mW/g; SAR(10 g) = 1.45 mW/g
 Maximum value of SAR (measured) = 2.62 mW/g

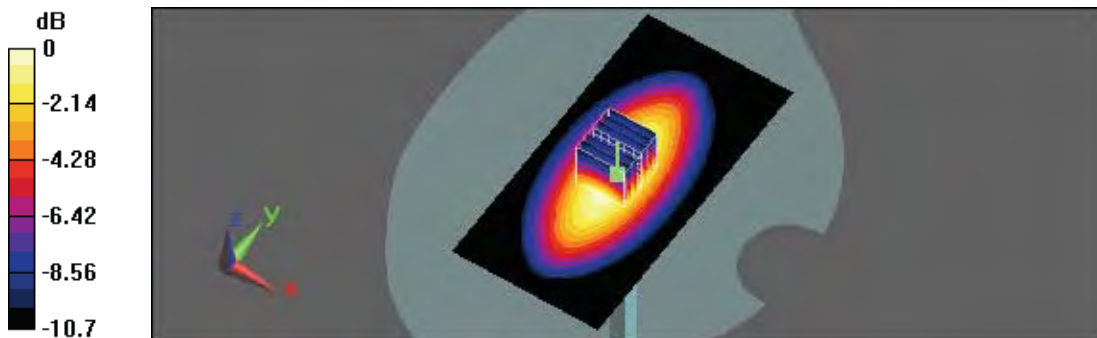

0 dB = 2.62mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 10:23:40 PM

System Performance Check at 1900MHz_20110819_Head

DUT: Dipole D1900V2_SN5d111; Type: D1900V2; Serial: D1900V2 - SN:5d111

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 12.6 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 96.1 V/m; Power Drift = -0.023 dB
Peak SAR (extrapolated) = 18.6 W/kg
SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.13 mW/g
Maximum value of SAR (measured) = 12.6 mW/g

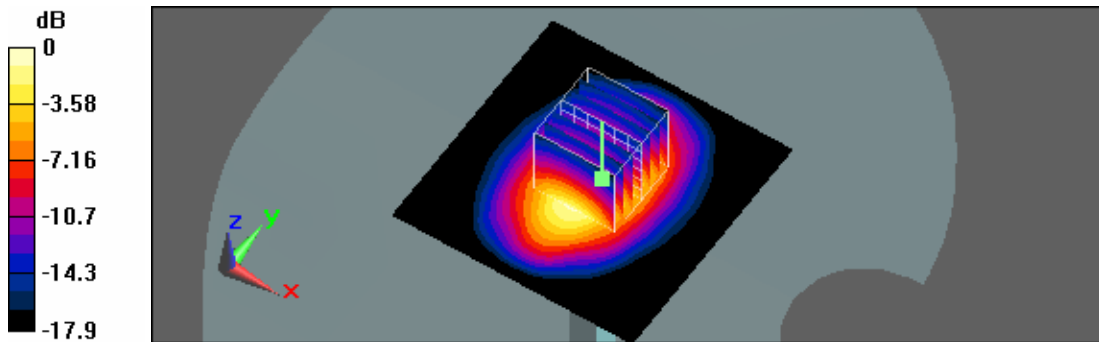

0 dB = 12.6mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 1:52:25 AM

System Performance Check at 1900MHz_20110930_Head

DUT: Dipole D1900V2_SN5d111; Type: D1900V2; Serial: D1900V2 - SN:5d111

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.6, 7.6, 7.6); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 13.3 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 98.6 V/m; Power Drift = -0.047 dB
 Peak SAR (extrapolated) = 21 W/kg
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.03 mW/g
 Maximum value of SAR (measured) = 13.3 mW/g

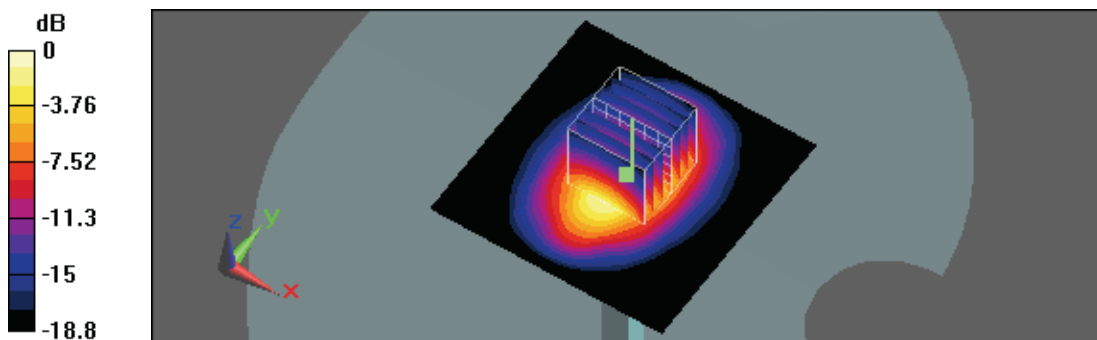

0 dB = 13.3mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/24/2011 7:46:14 PM

System Performance Check at 2450MHz_20110824_Head

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 2450MHz/Area Scan (61x61x1):

Measurement grid:
 $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 17.6 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 99.4 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 28 W/kg
SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.14 mW/g
Maximum value of SAR (measured) = 17.7 mW/g

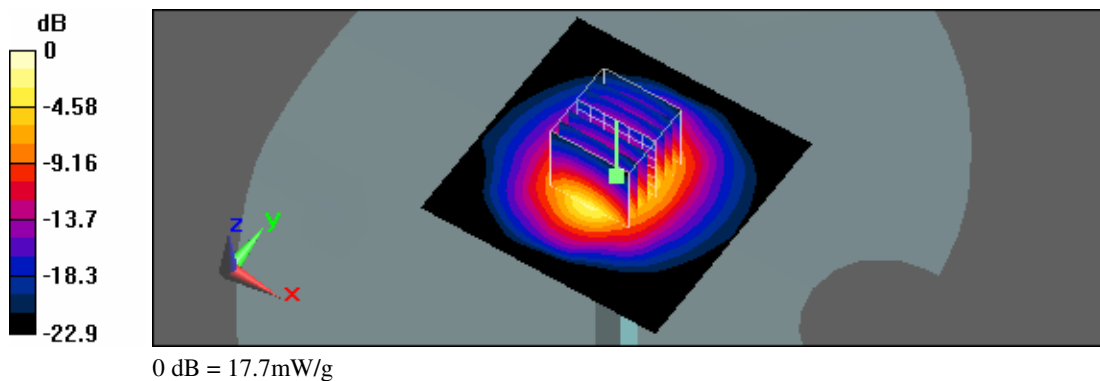



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 14:02:08 AM

System Performance Check at 835MHz_20110821_Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.958 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.74 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.9 V/m; Power Drift = -0.105 dB
Peak SAR (extrapolated) = 3.48 W/kg
SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g
Maximum value of SAR (measured) = 2.71 mW/g

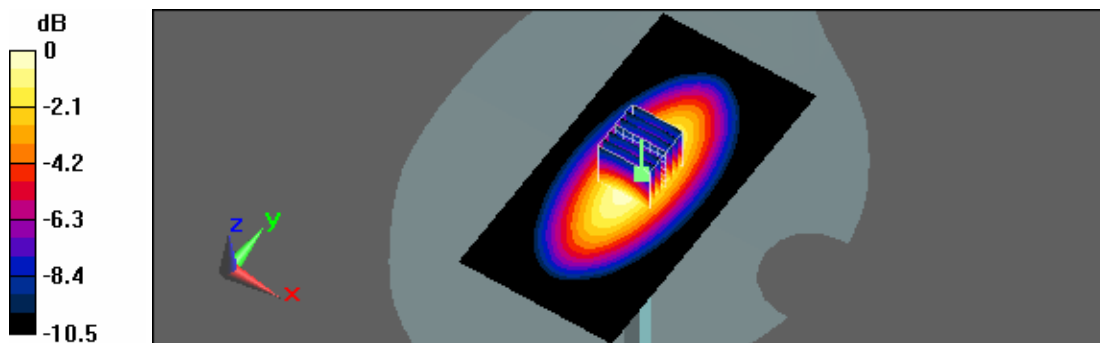

0 dB = 2.71mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 5:01:19 PM

System Performance Check at 835MHz_20110825_Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.958 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.77 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.7 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 3.52 W/kg
SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.53 mW/g
Maximum value of SAR (measured) = 2.75 mW/g

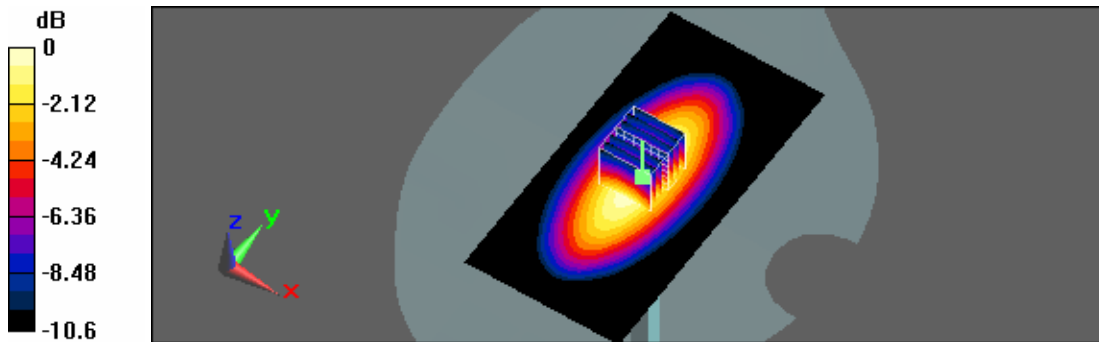

0 dB = 2.75mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:47:28 AM

System Performance Check at 835MHz_20110930_Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.985 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

System Performance Check at 835MHz/Area Scan (61x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.91 mW/g

System Performance Check at 835MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.1 V/m; Power Drift = -0.163 dB
Peak SAR (extrapolated) = 3.87 W/kg
SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.5 mW/g
Maximum value of SAR (measured) = 2.88 mW/g

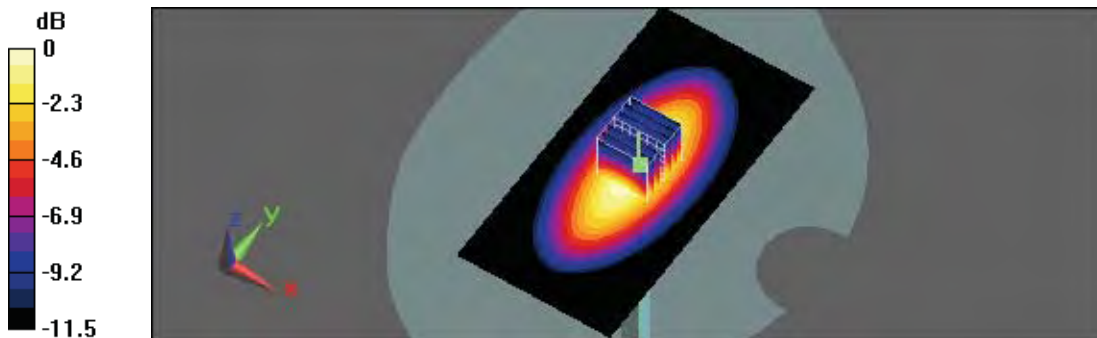

0 dB = 2.88mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 10:00:09 PM

System Performance Check at 1900MHz_20110821_Body

DUT: Dipole D1900V2_SN5d111; Type: D1900V2; Serial: D1900V2 - SN:5d111

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.5 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.7 V/m; Power Drift = 0.012 dB
Peak SAR (extrapolated) = 19.7 W/kg
SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.54 mW/g
Maximum value of SAR (measured) = 13.7 mW/g

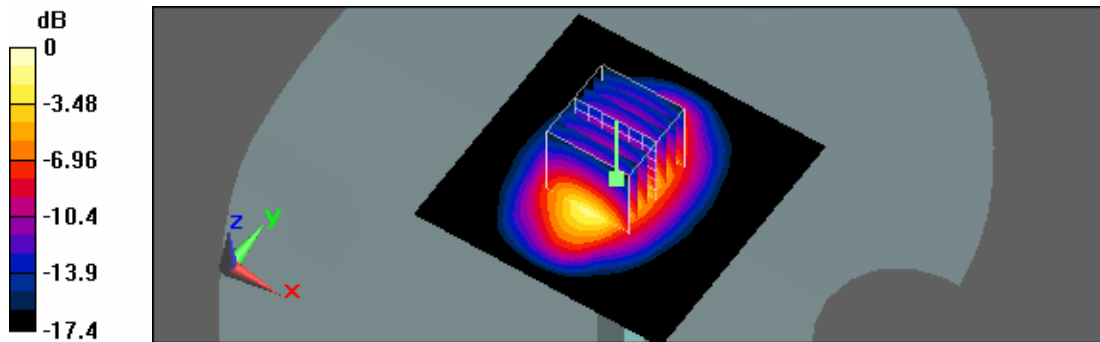

0 dB = 13.7mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 2:44:40 PM

System Performance Check at 1900MHz_20110825_Body

DUT: Dipole D1900V2_SN5d111; Type: D1900V2; Serial: D1900V2 - SN:5d111

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.4 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.4 V/m; Power Drift = 0.029 dB
Peak SAR (extrapolated) = 19.2 W/kg
SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.52 mW/g
Maximum value of SAR (measured) = 13.4 mW/g

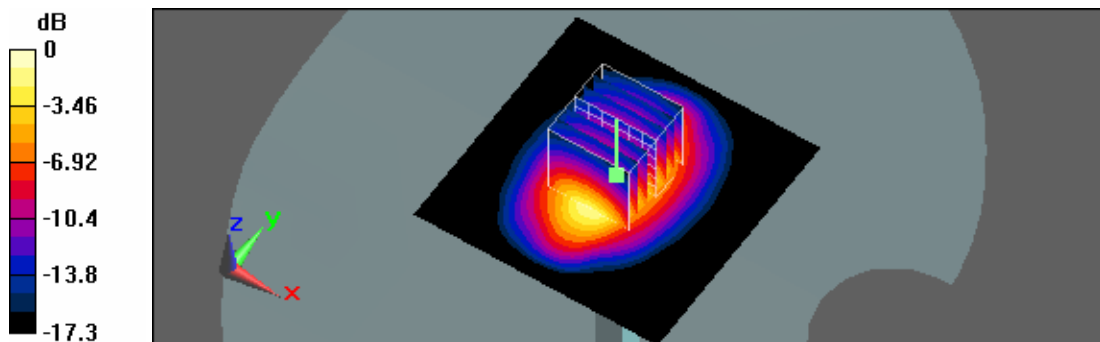

0 dB = 13.4mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:42:36 AM

System Performance Check at 1900MHz_20110930_Body

DUT: Dipole D1900V2_SN5d111; Type: D1900V2; Serial: D1900V2 - SN:5d111

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

System Performance Check at 1900MHz/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 13.5 mW/g

System Performance Check at 1900MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 95 V/m; Power Drift = 0.064 dB
 Peak SAR (extrapolated) = 20.9 W/kg
SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.2 mW/g
 Maximum value of SAR (measured) = 13.7 mW/g

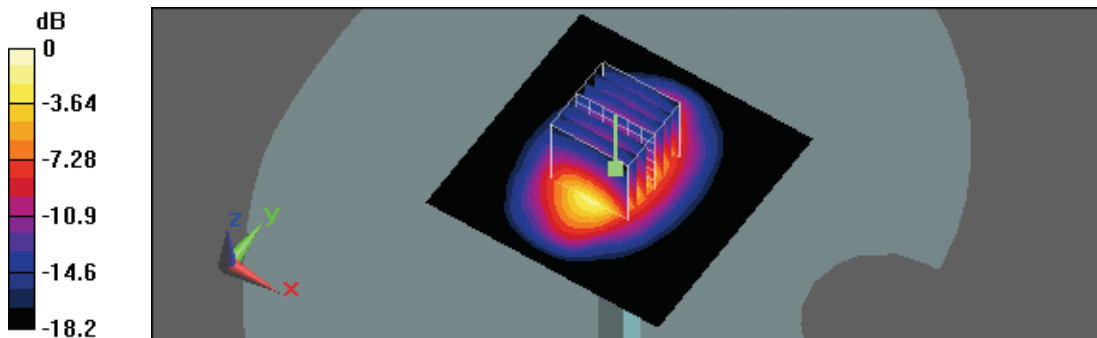

0 dB = 13.7mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 3:19:29 PM

System Performance Check at 2450MHz_20110822_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 2450MHz/Area Scan (61x61x1):

Measurement grid:
 $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 17.1 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 91.3 V/m; Power Drift = 0.042 dB
Peak SAR (extrapolated) = 26.6 W/kg
SAR(1 g) = 13 mW/g; SAR(10 g) = 6.01 mW/g
Maximum value of SAR (measured) = 17.2 mW/g

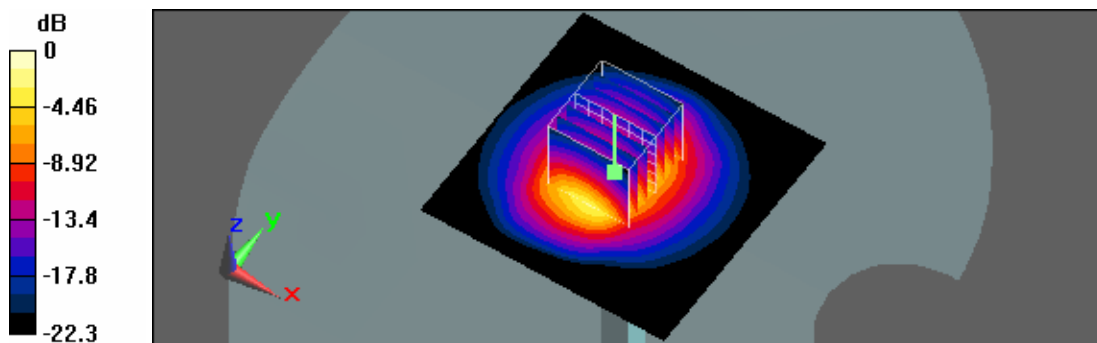

0 dB = 17.2mW/g



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 9:55:28 PM

System Performance Check at 2450MHz_20110825_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 2450MHz/Area Scan (61x61x1):

Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 17 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 90.4 V/m; Power Drift = 0.127 dB
Peak SAR (extrapolated) = 27 W/kg
SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.01 mW/g
Maximum value of SAR (measured) = 17.4 mW/g

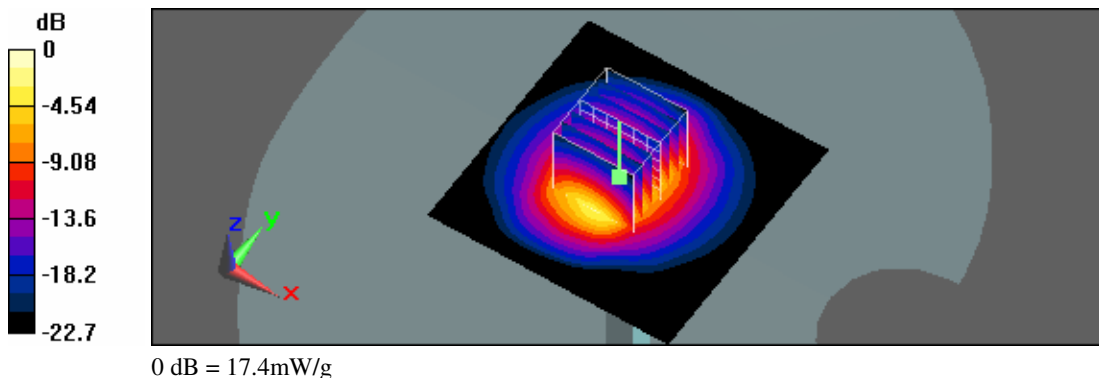



Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/16/2011 12:34:16 AM

RC_GSM 850 CH190

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.122 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.82 V/m; Power Drift = -0.00481 dB
Peak SAR (extrapolated) = 0.173 W/kg
SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.075 mW/g
Maximum value of SAR (measured) = 0.133 mW/g

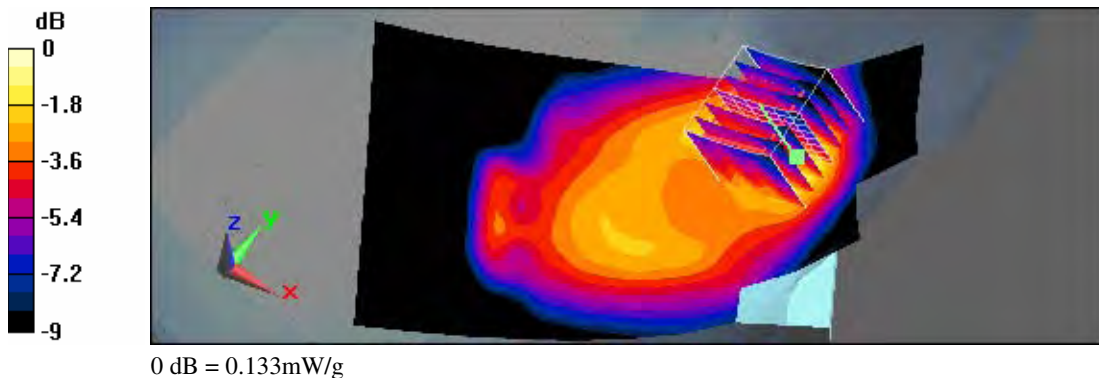

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/16/2011 1:02:30 AM

RT_GSM 850 CH190

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (71x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.093 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.11 V/m; Power Drift = -0.119 dB
 Peak SAR (extrapolated) = 0.093 W/kg
SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.038 mW/g
 Maximum value of SAR (measured) = 0.069 mW/g

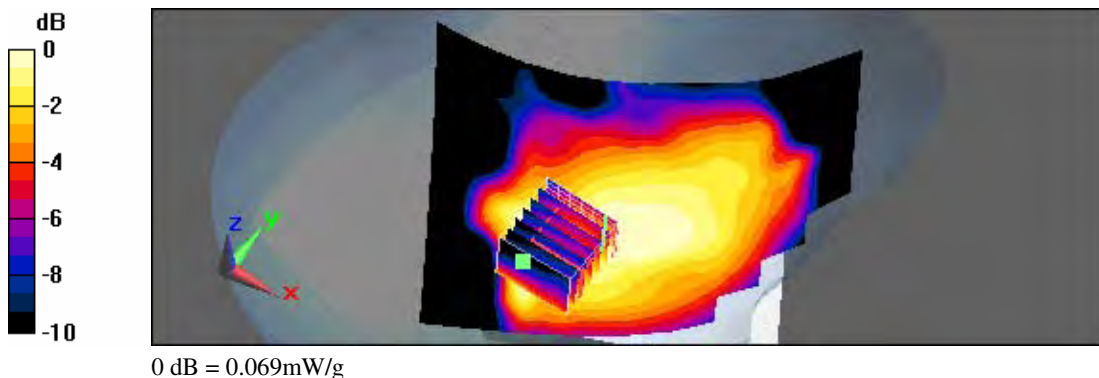

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/16/2011 2:14:12 AM

LC_GSM 850 CH190

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.180 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 6.17 V/m; Power Drift = -0.062 dB
 Peak SAR (extrapolated) = 0.222 W/kg
SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.127 mW/g
 Maximum value of SAR (measured) = 0.191 mW/g

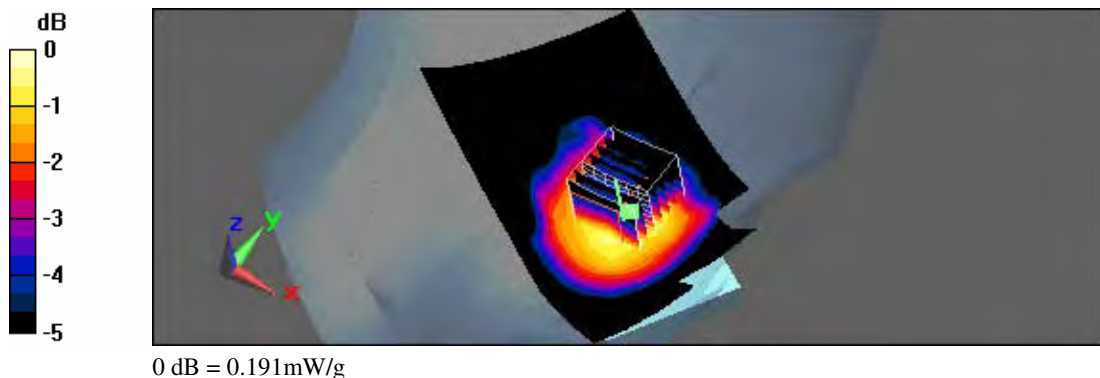

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/16/2011 2:41:15 AM

LT_GSM 850 CH190

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.140 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.13 V/m; Power Drift = -0.000418 dB
 Peak SAR (extrapolated) = 0.159 W/kg
SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.090 mW/g
 Maximum value of SAR (measured) = 0.135 mW/g

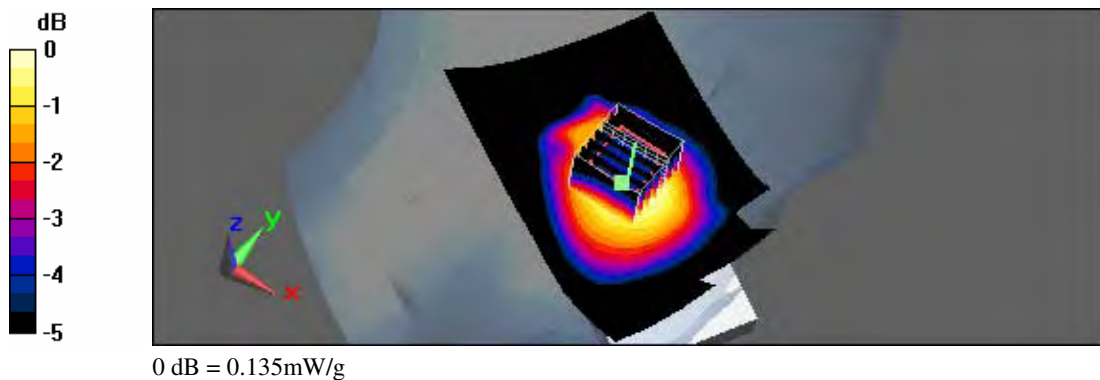

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 12:54:12 AM

RC_PCS CH512

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.284 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.5 V/m; Power Drift = 0.023 dB
 Peak SAR (extrapolated) = 0.359 W/kg
SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.153 mW/g
 Maximum value of SAR (measured) = 0.278 mW/g

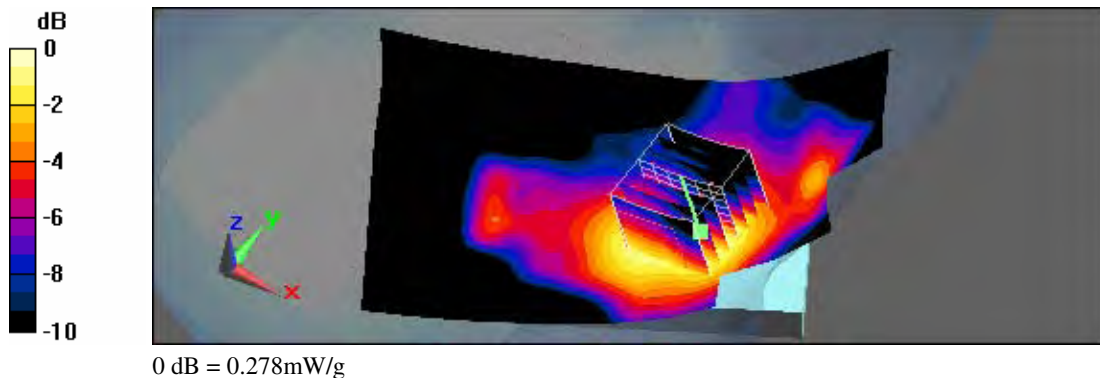

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 1:23:13 AM

RT_PCS CH512

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.200 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 10.8 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.166 mW/g

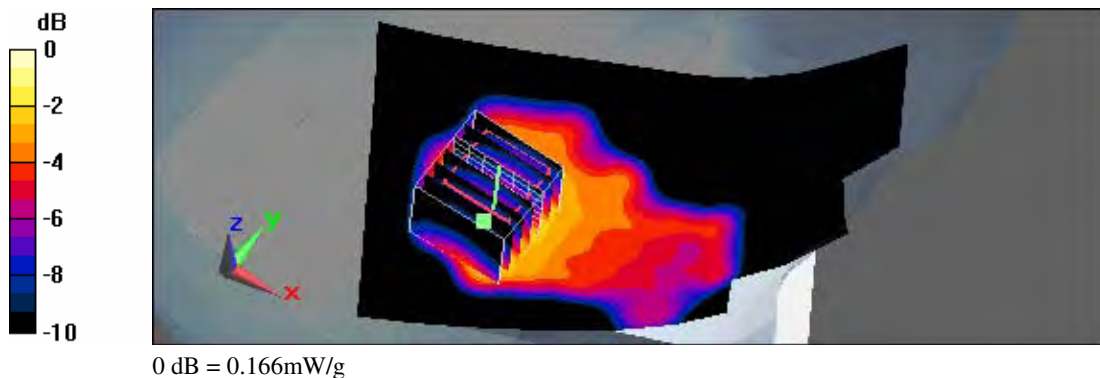

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 1:51:23 AM

LC_PCS CH512

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (91x151x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.568 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 4.05 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

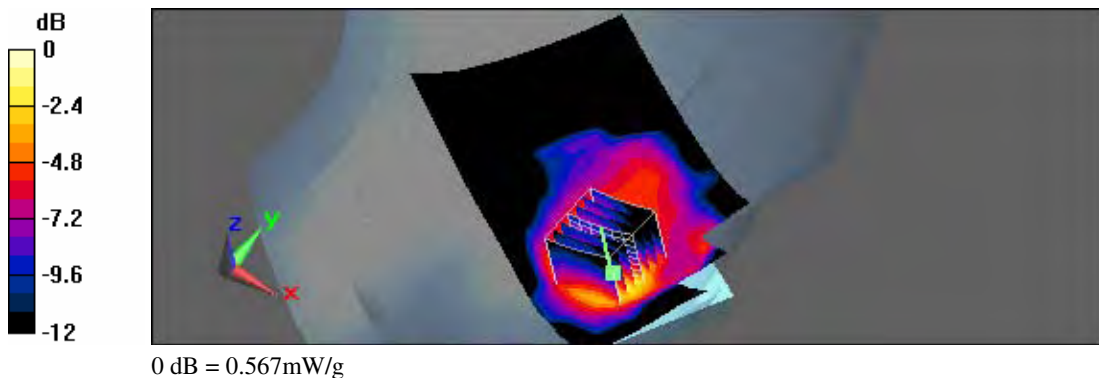

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 11:27:30 AM

LT_GSM PCS CH512

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.257 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.74 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.195 mW/g

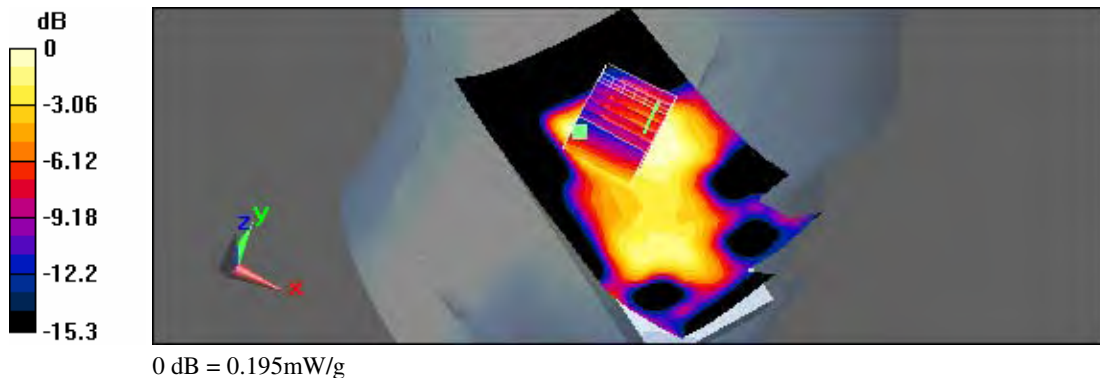

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 6:23:40 PM

RC_GPRS 850 CH190_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.224 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 7.6 V/m; Power Drift = 0.083 dB
 Peak SAR (extrapolated) = 0.297 W/kg
SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.137 mW/g
 Maximum value of SAR (measured) = 0.235 mW/g

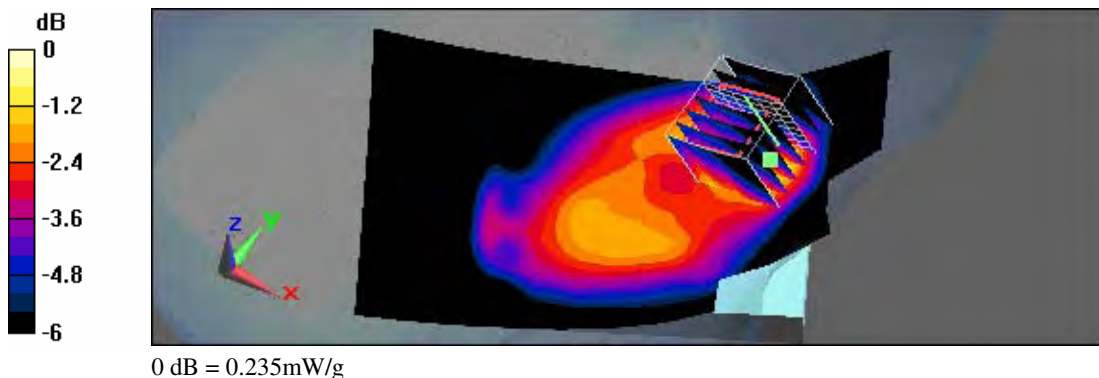

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 6:55:27 PM

RT_GPRS 850 CH190_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.148 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.88 V/m; Power Drift = -0.021 dB
 Peak SAR (extrapolated) = 0.174 W/kg
SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.093 mW/g
 Maximum value of SAR (measured) = 0.151 mW/g

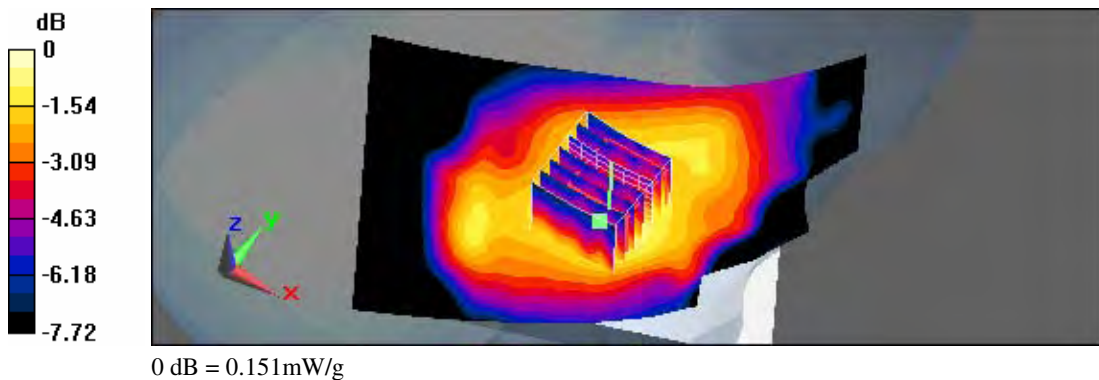

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 8:35:04 PM

LC_GPRS 850 CH190_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (91x151x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.400 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 6.89 V/m; Power Drift = -0.00296 dB
 Peak SAR (extrapolated) = 0.469 W/kg
SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.270 mW/g
 Maximum value of SAR (measured) = 0.407 mW/g

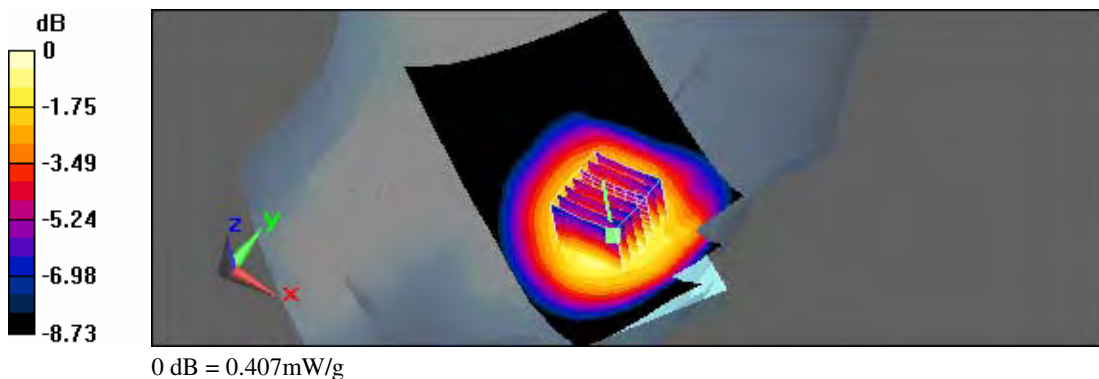

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 9:10:23 PM

LT_GPRS 850 CH190_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.09, 9.09, 9.09); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (91x151x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.305 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 11.9 V/m; Power Drift = 0.021 dB
 Peak SAR (extrapolated) = 0.342 W/kg
SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.194 mW/g
 Maximum value of SAR (measured) = 0.291 mW/g

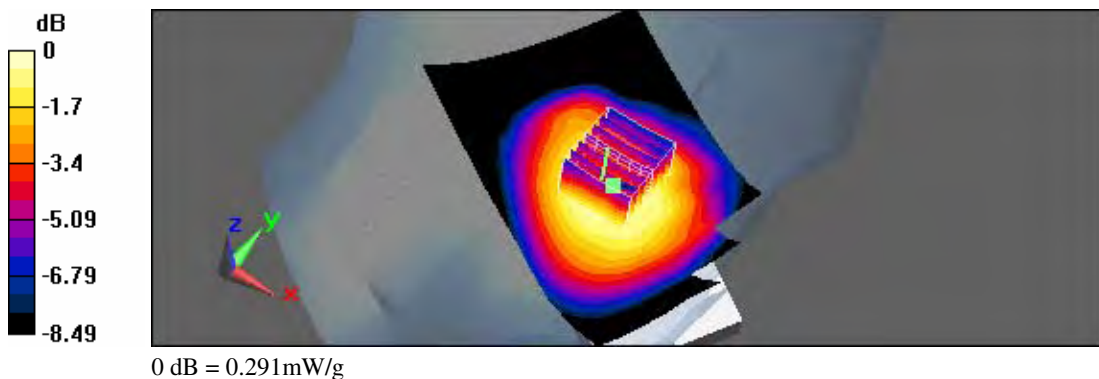

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 10:52:35 PM

RC_GPRS PCS CH512_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.662 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 10.2 V/m; Power Drift = -0.015 dB
 Peak SAR (extrapolated) = 0.866 W/kg
SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.349 mW/g
 Maximum value of SAR (measured) = 0.660 mW/g

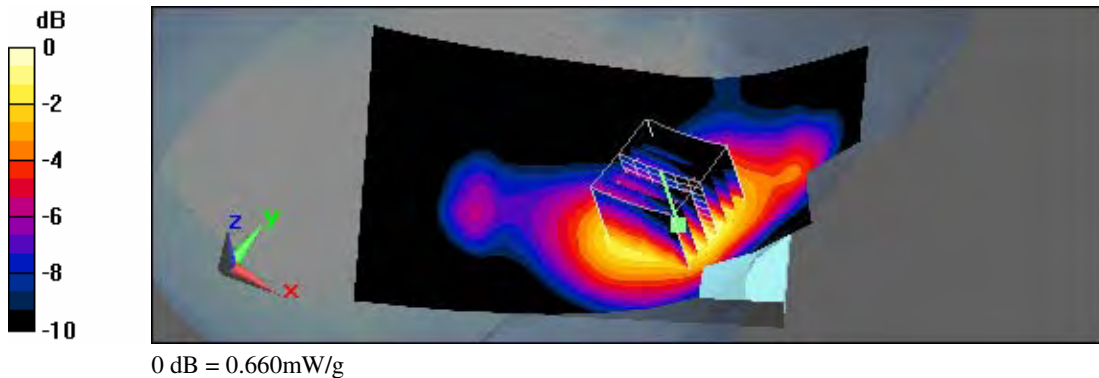

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 11:23:16 PM

RT_GPRS PCS CH512_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.349 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 14.6 V/m; Power Drift = 0.011 dB
 Peak SAR (extrapolated) = 0.427 W/kg
SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.160 mW/g
 Maximum value of SAR (measured) = 0.326 mW/g

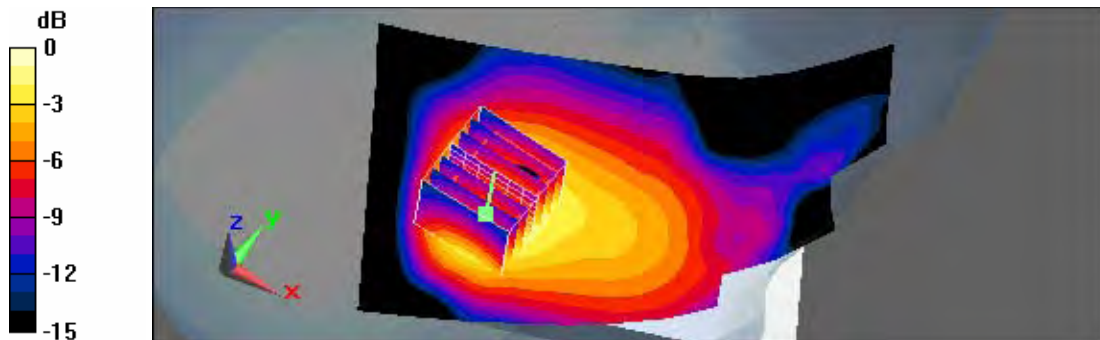

0 dB = 0.326mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/19/2011 11:56:40 PM

LC_GPRS PCS CH512_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.01 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 4.92 V/m; Power Drift = -0.124 dB
 Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.495 mW/g
 Maximum value of SAR (measured) = 1.01 mW/g

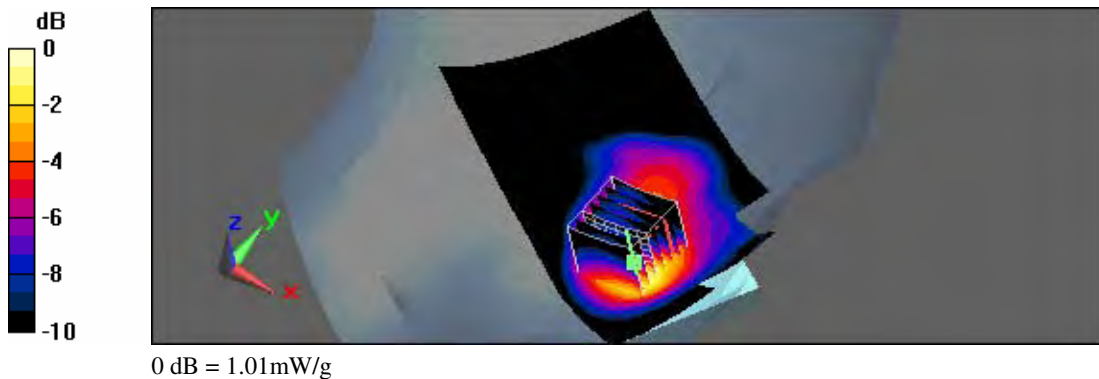

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 9:51:07 AM

LC_GPRS PCS CH661_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1880 MHz;Duty Cycle: 1:2.8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.27 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.9 V/m; Power Drift = 0.130 dB
 Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.595 mW/g
 Maximum value of SAR (measured) = 1.23 mW/g

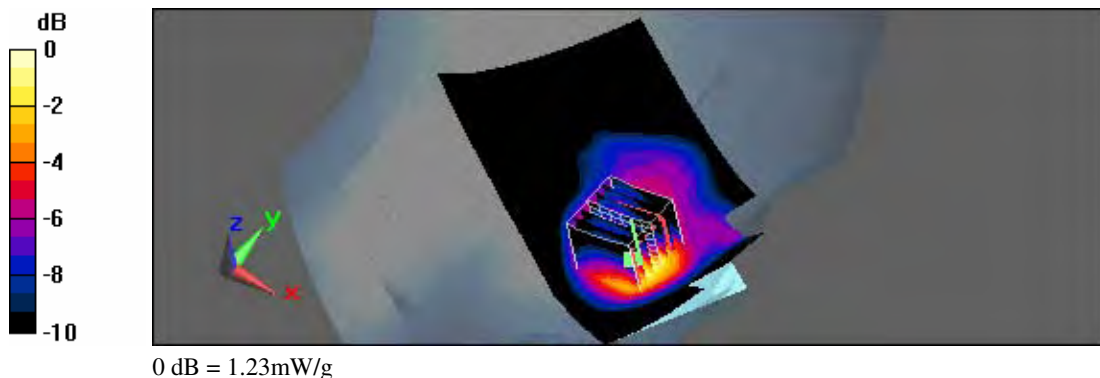

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 10:17:07 AM

LC_GPRS PCS CH810_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1909.8 MHz;Duty Cycle: 1:2.8
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.38 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.94 V/m; Power Drift = 0.032 dB
 Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.665 mW/g
 Maximum value of SAR (measured) = 1.39 mW/g

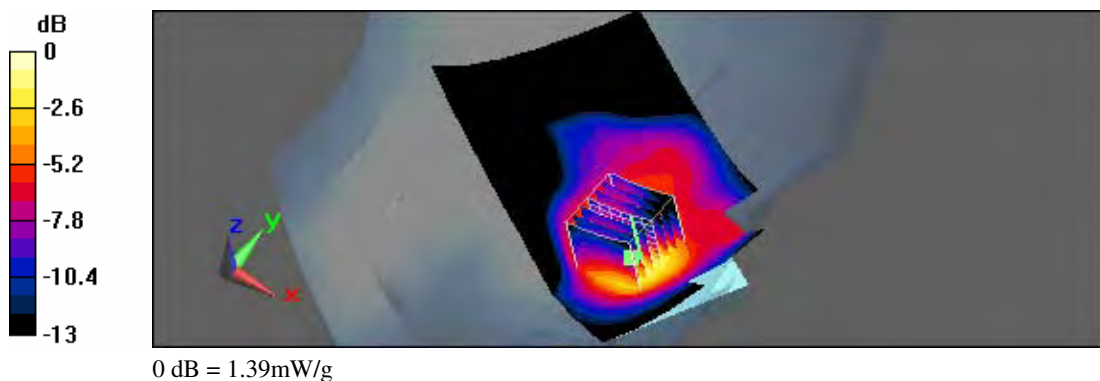

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/20/2011 12:24:24 AM

LT_GPRS PCS CH512_2D3U

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.02, 8.02, 8.02); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.386 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.82 V/m; Power Drift = 0.034 dB
 Peak SAR (extrapolated) = 0.369 W/kg
SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.165 mW/g
 Maximum value of SAR (measured) = 0.297 mW/g

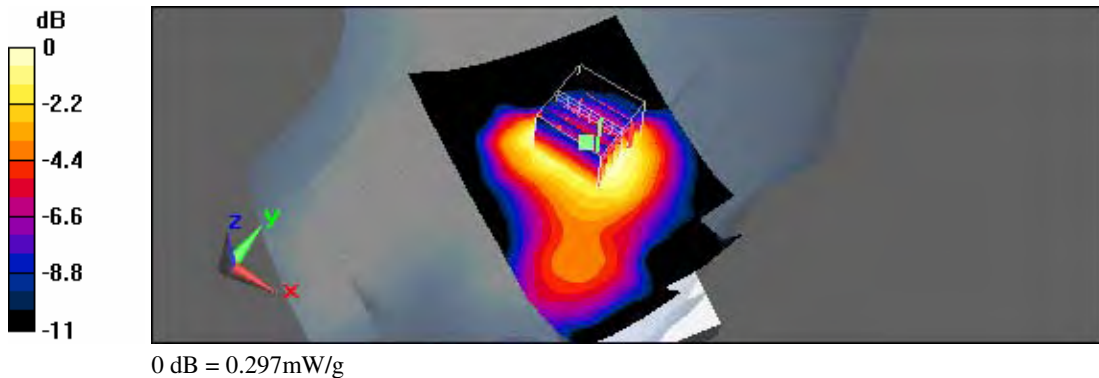

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/30/2011 1:10:22 AM

RC_DTM GPRS850 CH190_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.225 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 6.84 V/m; Power Drift = 0.086 dB
 Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.130 mW/g
 Maximum value of SAR (measured) = 0.236 mW/g

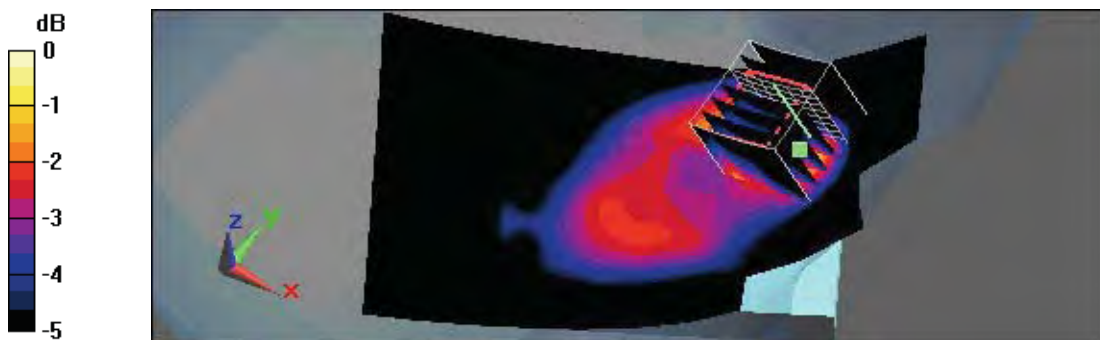

0 dB = 0.236mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 1:26:12 AM

RT_DTM GPRS850 CH190_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.133 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.01 V/m; Power Drift = -0.122 dB
 Peak SAR (extrapolated) = 0.162 W/kg
SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.081 mW/g
 Maximum value of SAR (measured) = 0.137 mW/g

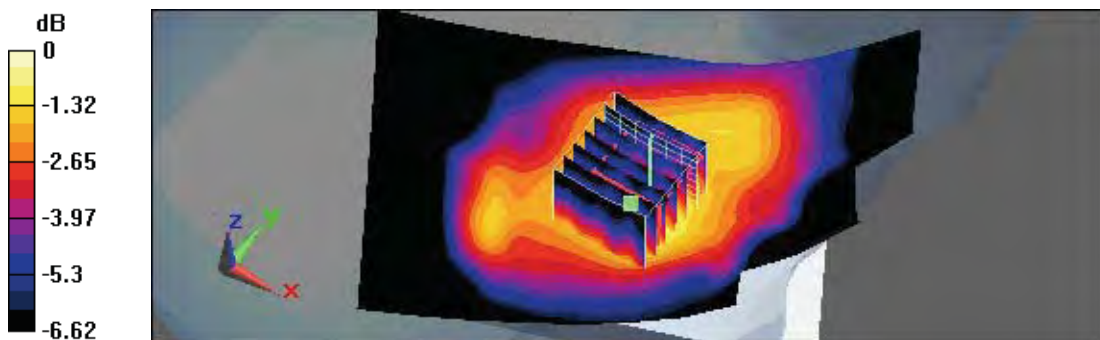

0 dB = 0.137mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 1:33:16 AM

LC_DTM GPRS850 CH190_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (91x151x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.400 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 6.15 V/m; Power Drift = -0.013 dB
 Peak SAR (extrapolated) = 0.487 W/kg
SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.255 mW/g
 Maximum value of SAR (measured) = 0.411 mW/g

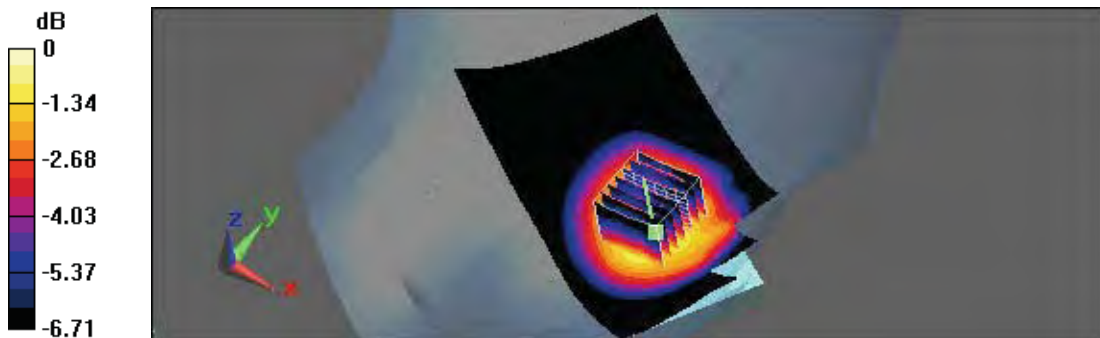

0 dB = 0.411mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 1:43:25 AM

LT_DTM GPRS850 CH190_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (91x151x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.307 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 11 V/m; Power Drift = 0.063 dB
 Peak SAR (extrapolated) = 0.347 W/kg
SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.180 mW/g
 Maximum value of SAR (measured) = 0.287 mW/g

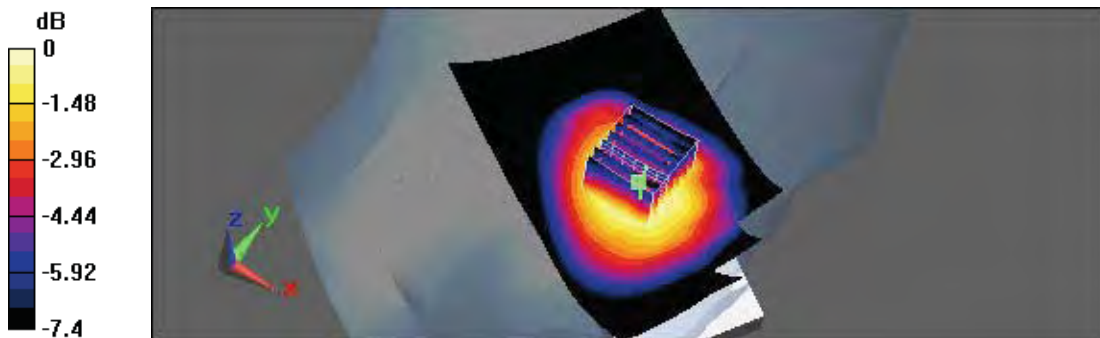

0 dB = 0.287mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:08:39 AM

RC_DTM GPRS 1900 CH512_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.6, 7.6, 7.6); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.630 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.31 V/m; Power Drift = -0.116 dB
 Peak SAR (extrapolated) = 0.872 W/kg
SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.313 mW/g
 Maximum value of SAR (measured) = 0.625 mW/g

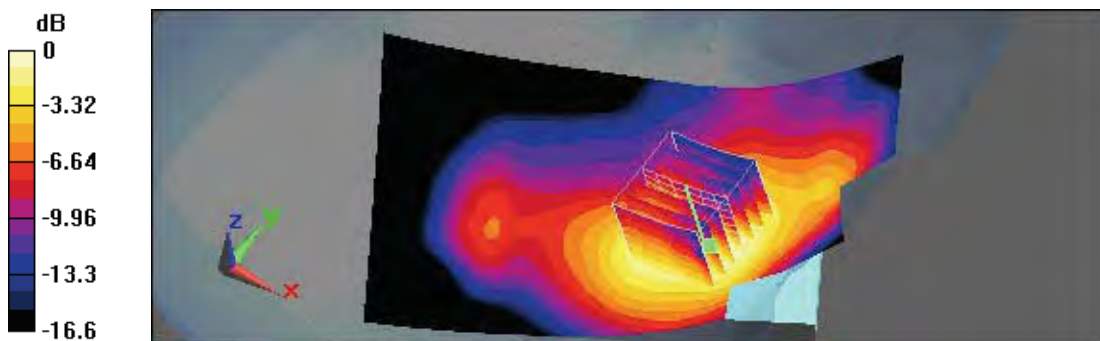

0 dB = 0.625mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:08:39 AM

RT_DTM GPRS 1900 CH512_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.6, 7.6, 7.6); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.305 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 13.6 V/m; Power Drift = 0.083 dB
 Peak SAR (extrapolated) = 0.384 W/kg
SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.136 mW/g
 Maximum value of SAR (measured) = 0.286 mW/g

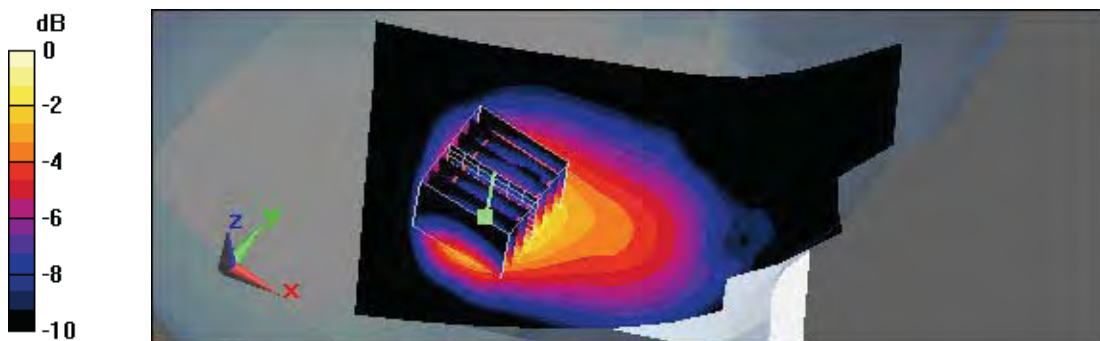

0 dB = 0.286mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:27:15 AM

LC_DTM GPRS 1900 CH512_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.6, 7.6, 7.6); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.967 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 4.54 V/m; Power Drift = -0.042 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.453 mW/g
 Maximum value of SAR (measured) = 0.958 mW/g

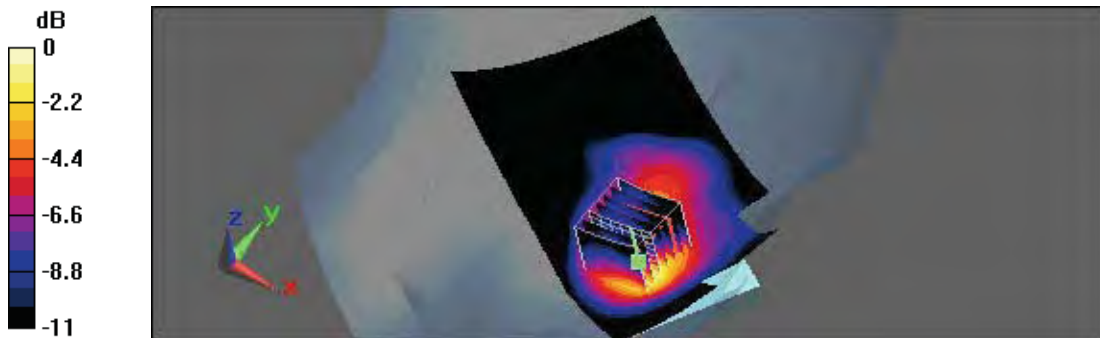

0 dB = 0.958mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:37:33 AM

LT_DTM GPRS 1900 CH512_2D3U(1CS+2PS)

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.6, 7.6, 7.6); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.324 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 9.02 V/m; Power Drift = 0.031 dB
 Peak SAR (extrapolated) = 0.312 W/kg
SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.138 mW/g
 Maximum value of SAR (measured) = 0.248 mW/g

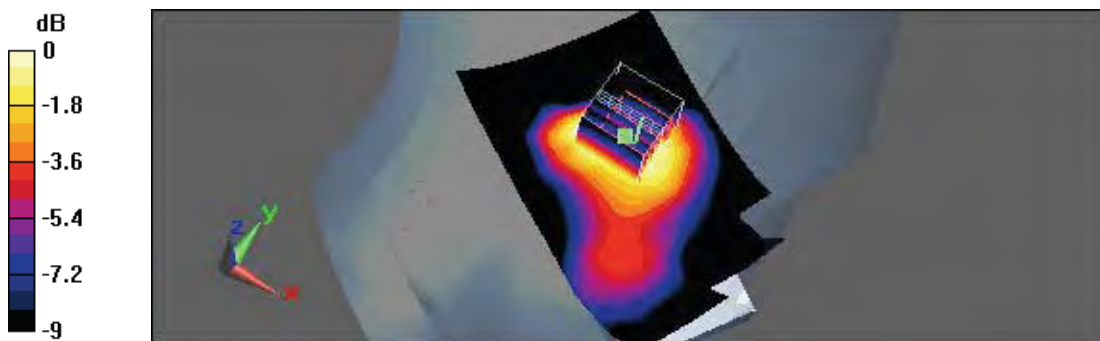

0 dB = 0.248mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/24/2011 8:14:27 PM

RC_802.11b CH11_1M

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.82 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Cheek/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.400 mW/g

Right Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.01 V/m; Power Drift = -0.048 dB
 Peak SAR (extrapolated) = 0.235 W/kg
SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.066 mW/g
 Maximum value of SAR (measured) = 0.160 mW/g

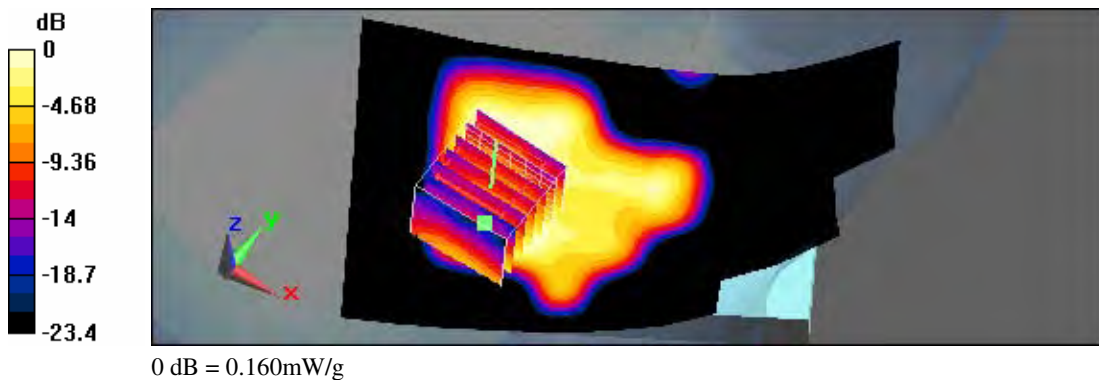

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/24/2011 8:40:54 PM

RT_802.11b CH11_1M

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.82 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Right Tilted/Area Scan (61x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.436 mW/g

Right Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 10.1 V/m; Power Drift = 0.032 dB
 Peak SAR (extrapolated) = 0.661 W/kg
SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.093 mW/g
 Maximum value of SAR (measured) = 0.225 mW/g

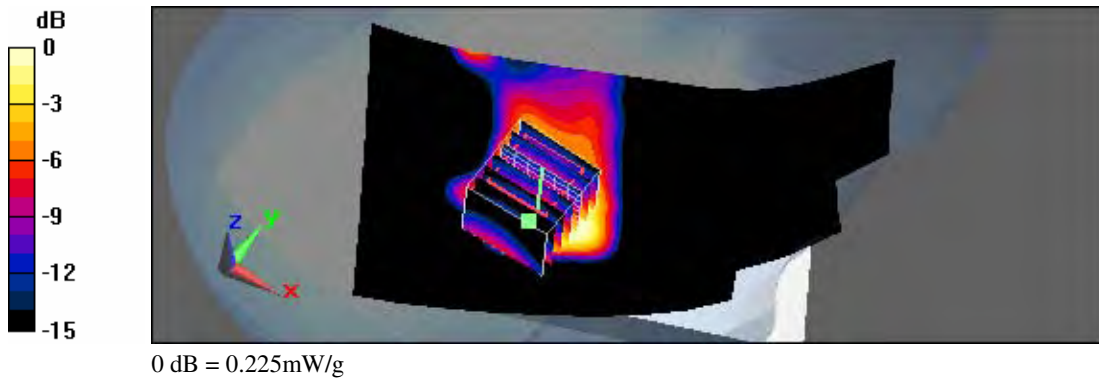

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/24/2011 10:00:29 PM

LC_802.11b CH11_1M

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.82 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Cheek/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.264 mW/g

Left Cheek/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 4.4 V/m; Power Drift = 0.089 dB
 Peak SAR (extrapolated) = 0.250 W/kg
SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.056 mW/g
 Maximum value of SAR (measured) = 0.151 mW/g

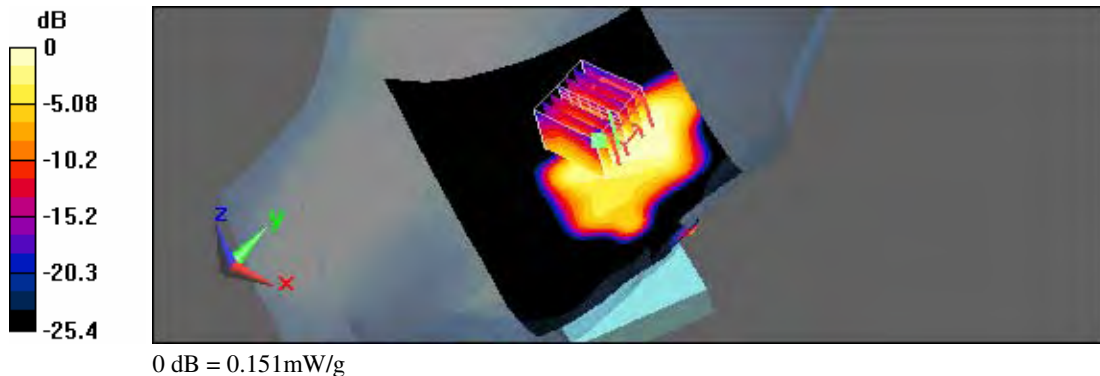

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/24/2011 10:27:55 PM

LT_802.11b CH11_1M

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.82 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.28, 7.28, 7.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Left Tilted/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.246 mW/g

Left Tilted/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 5.51 V/m; Power Drift = 0.176 dB
 Peak SAR (extrapolated) = 0.182 W/kg
SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.043 mW/g
 Maximum value of SAR (measured) = 0.112 mW/g

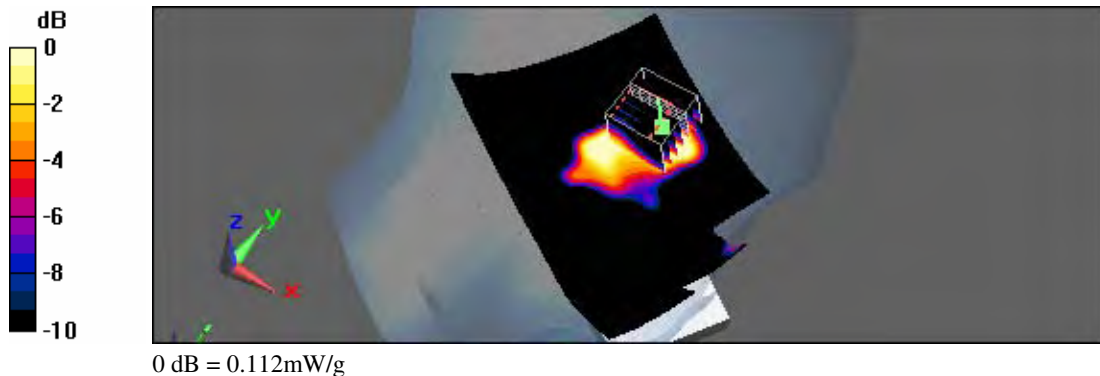

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 8:05:55 PM

Flat_GSM850 CH190_Headset_Front Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.073 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 5.99 V/m; Power Drift = 0.000853 dB
 Peak SAR (extrapolated) = 0.097 W/kg
SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.025 mW/g
 Maximum value of SAR (measured) = 0.062 mW/g

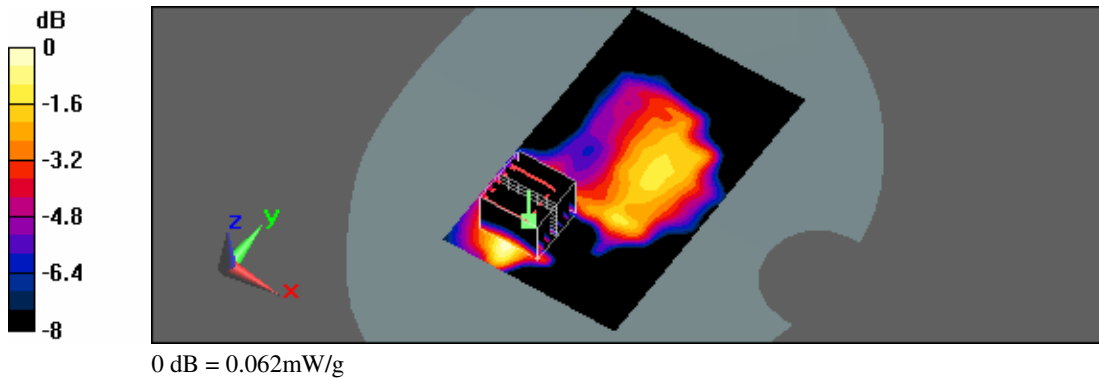

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 8:33:48 PM

Flat_GSM850 CH190_Headset_Back Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.28, 9.28, 9.28); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.132 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.91 V/m; Power Drift = -0.020 dB
 Peak SAR (extrapolated) = 0.194 W/kg
SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.047 mW/g
 Maximum value of SAR (measured) = 0.123 mW/g

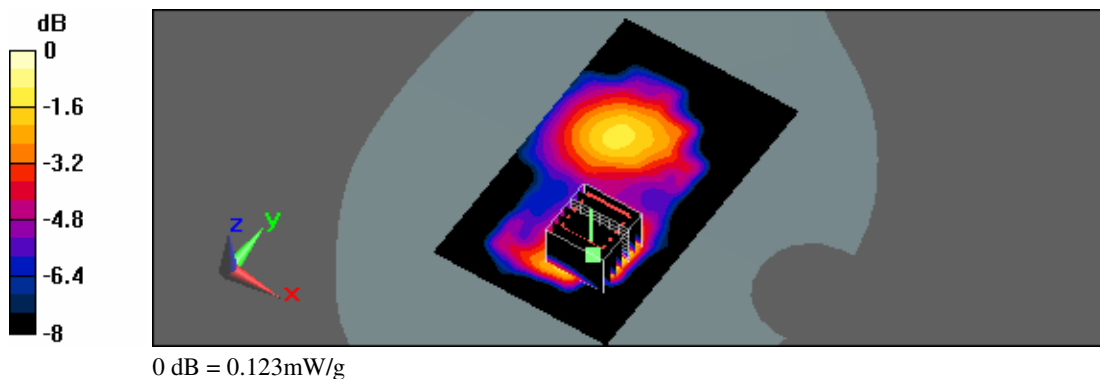

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 3:21:42 PM

Flat_PCS CH512_Headset_Front Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.125 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 6.58 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

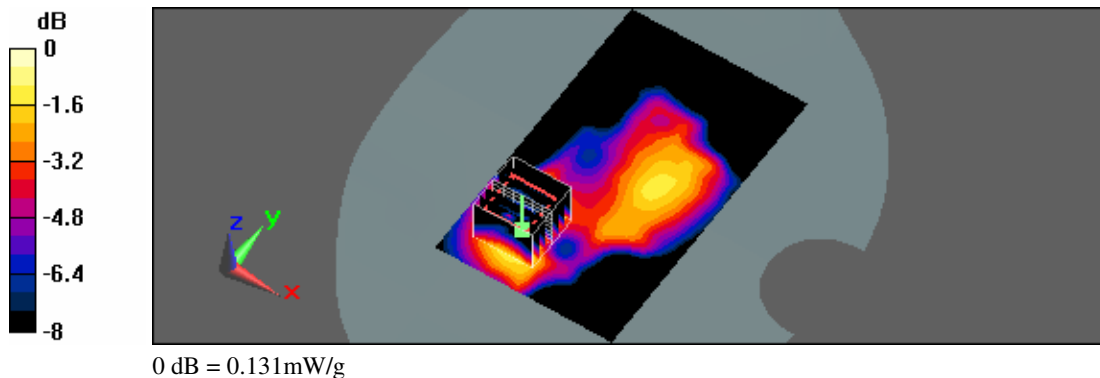

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 3:52:16 PM

Flat_PCS CH512_Headset_Back Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.220 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.67 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

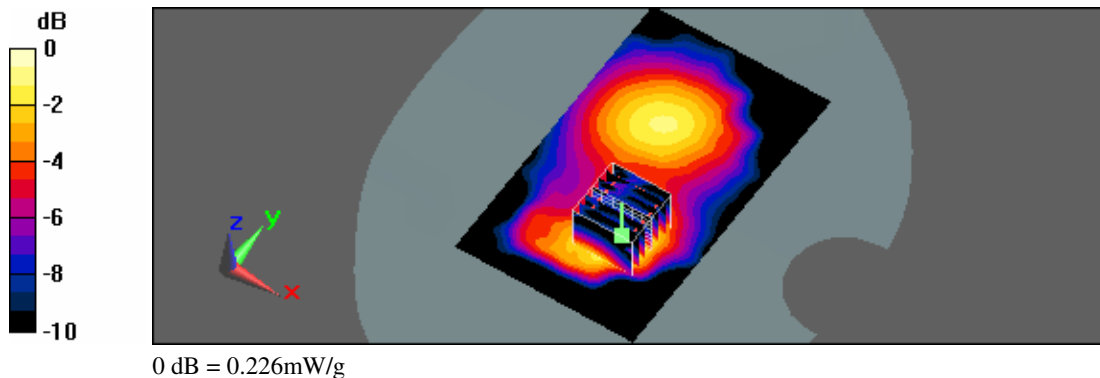

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 11:07:35 PM

Flat_802.11b_CH11_1M_Headset_Front Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.97 \text{ mho/m}$; $\epsilon_r = 51.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.013 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 1.38 V/m; Power Drift = -0.035 dB
 Peak SAR (extrapolated) = 0.052 W/kg
SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00485 mW/g
 Maximum value of SAR (measured) = 0.025 mW/g

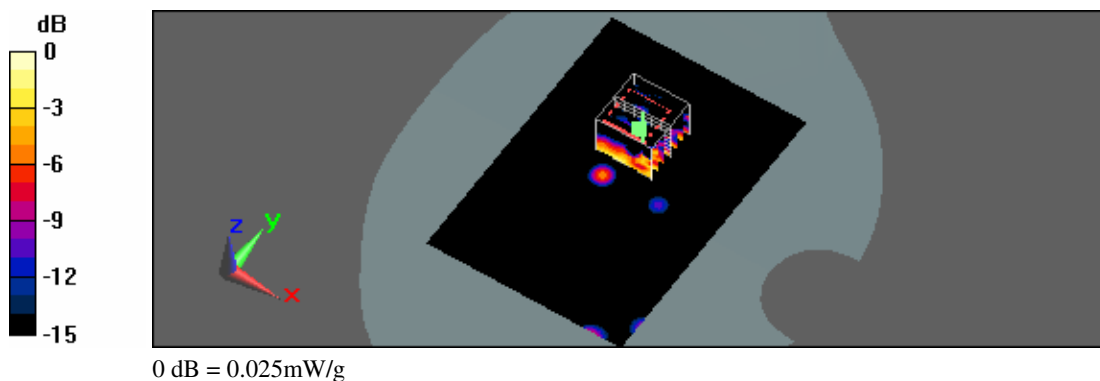

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/25/2011 10:37:06 PM

Flat_802.11b_CH11_1M_Headset_Back Surface to Phantom_15mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.202 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 3.72 V/m; Power Drift = 0.140 dB
 Peak SAR (extrapolated) = 0.196 W/kg
SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.042 mW/g
 Maximum value of SAR (measured) = 0.128 mW/g

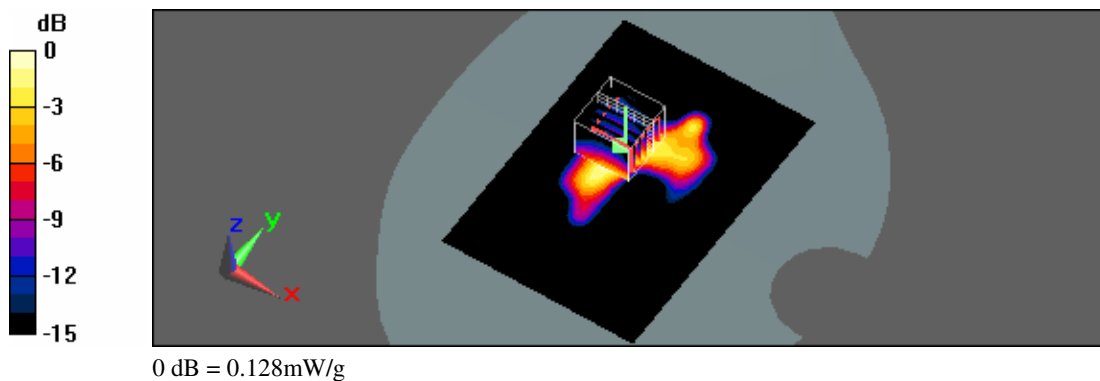

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 5:25:38 PM

Flat_GPRS 850 CH190_2D3U_Front Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.95, 8.95, 8.95); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.481 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 20.5 V/m; Power Drift = 0.00271 dB
 Peak SAR (extrapolated) = 0.555 W/kg
SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.317 mW/g
 Maximum value of SAR (measured) = 0.475 mW/g

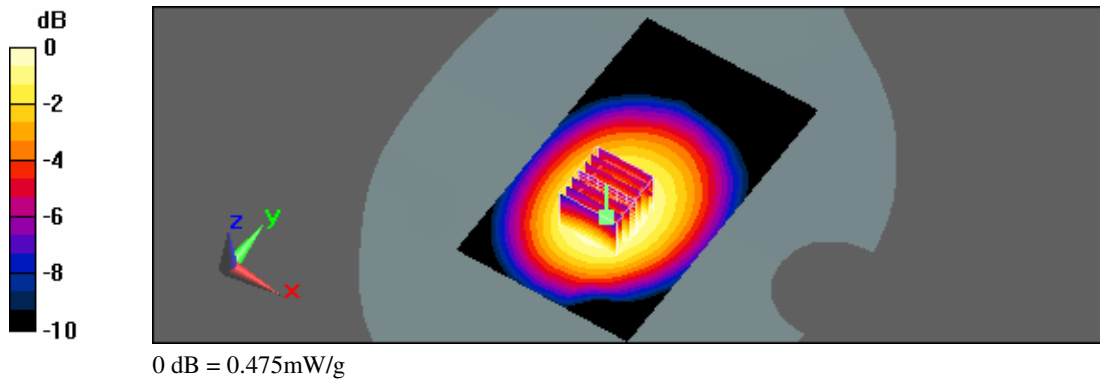

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 5:53:47 PM

Flat_GPRS 850 CH190_2D3U_Back Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.95, 8.95, 8.95); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.878 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 28.5 V/m; Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.547 mW/g
 Maximum value of SAR (measured) = 0.879 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 28.5 V/m; Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.449 mW/g
 Maximum value of SAR (measured) = 0.834 mW/g

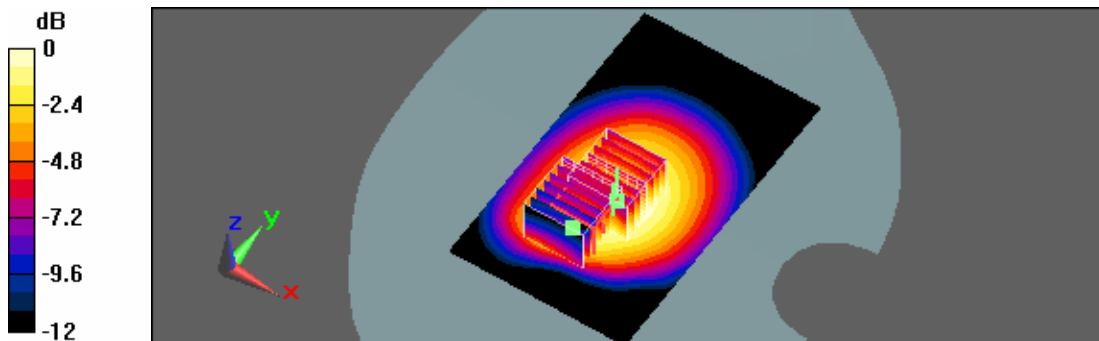

0 dB = 0.834mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 6:39:20 PM

Flat_GPRS 850 CH190_2D3U_Edge Left to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.95, 8.95, 8.95); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.282 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 16.7 V/m; Power Drift = 0.046 dB
 Peak SAR (extrapolated) = 0.353 W/kg
SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.166 mW/g
 Maximum value of SAR (measured) = 0.280 mW/g

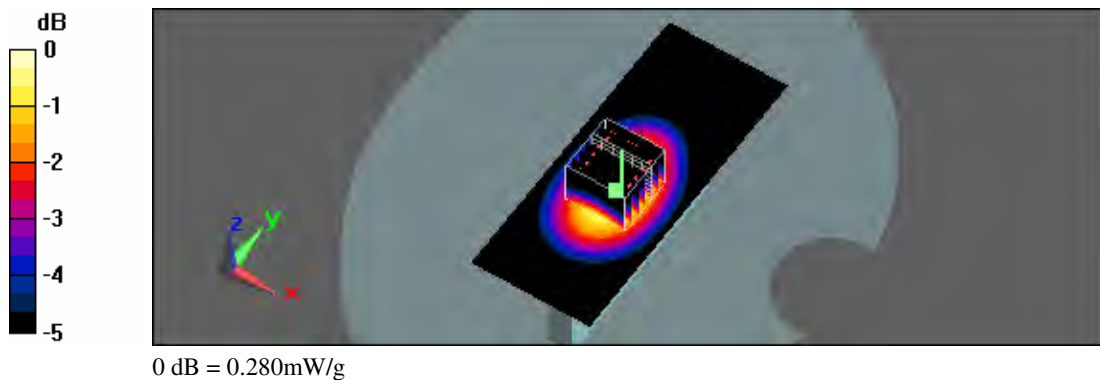

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 7:06:52 PM

Flat_GPRS 850 CH190_2D3U_Edge Right to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.95, 8.95, 8.95); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.475 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 19.6 V/m; Power Drift = 0.014 dB
 Peak SAR (extrapolated) = 0.583 W/kg
SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.283 mW/g
 Maximum value of SAR (measured) = 0.475 mW/g

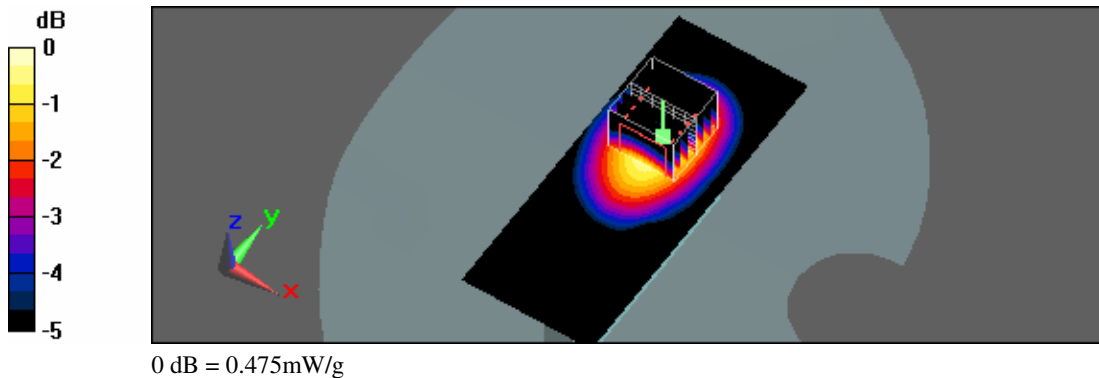

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 8:40:28 PM

Flat_GPRS 850 CH190_2D3U_Edge Bottom to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
Medium parameters used: $f = 837$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(8.95, 8.95, 8.95); Calibrated: 6/16/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x81x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.123 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.4 V/m; Power Drift = 0.061 dB
Peak SAR (extrapolated) = 0.155 W/kg
SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.122 mW/g

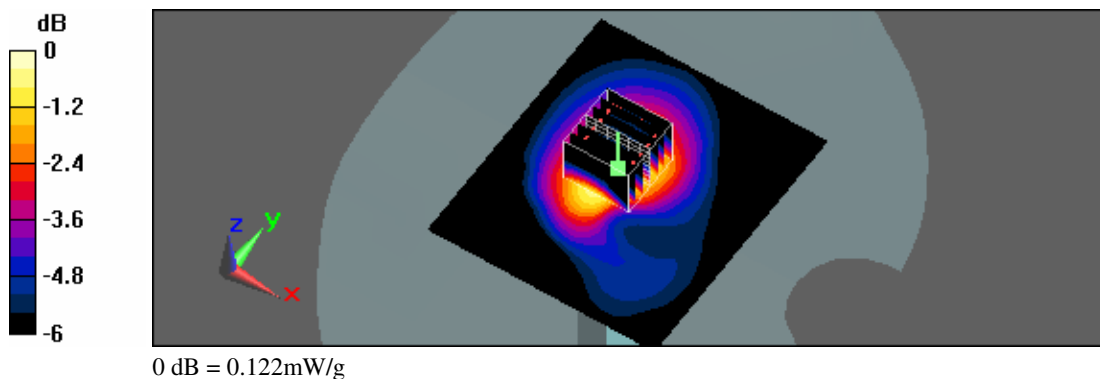

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 10:42:41 PM

Flat_GPRS PCS CH512_2D3U_Front Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.493 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 12.3 V/m; Power Drift = 0.020 dB
 Peak SAR (extrapolated) = 0.686 W/kg
SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.236 mW/g
 Maximum value of SAR (measured) = 0.505 mW/g

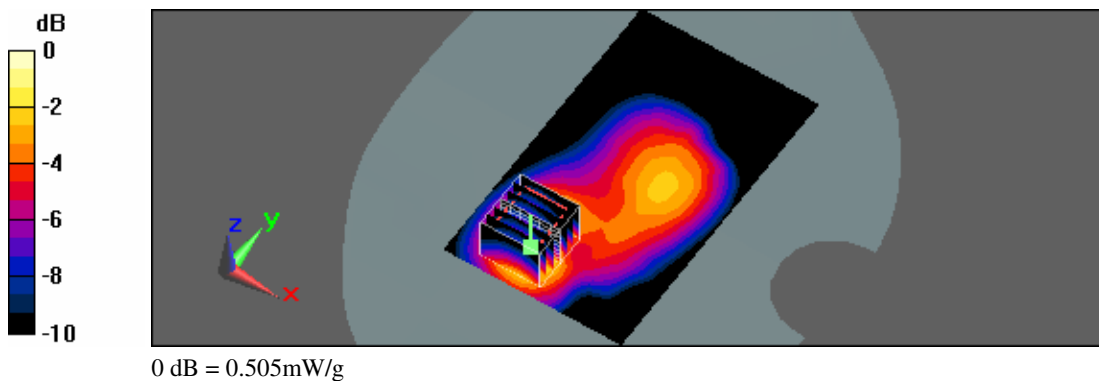

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/21/2011 11:31:39 PM

Flat_GPRS PCS CH512_2D3U_Back Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.887 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 18.4 V/m; Power Drift = 0.090 dB
 Peak SAR (extrapolated) = 1.3 W/kg
SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.411 mW/g
 Maximum value of SAR (measured) = 0.927 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 18.4 V/m; Power Drift = 0.090 dB
 Peak SAR (extrapolated) = 0.871 W/kg
SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.328 mW/g
 Maximum value of SAR (measured) = 0.604 mW/g

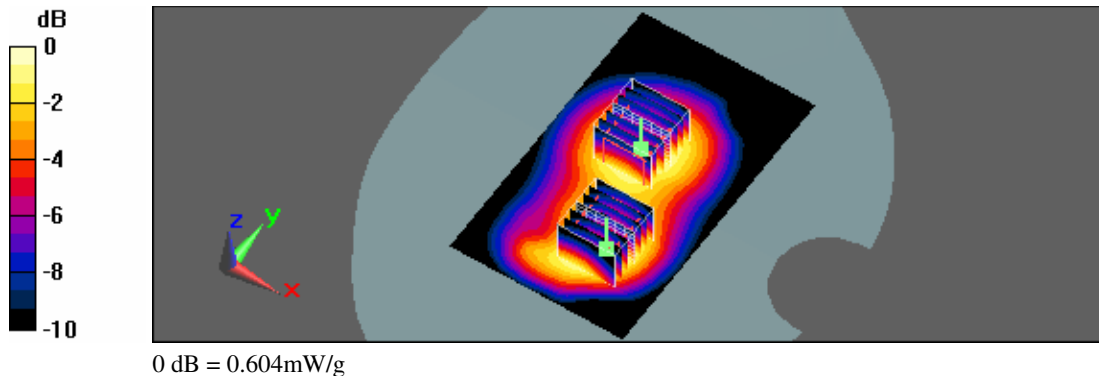

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 12:19:58 AM

Flat_GPRS PCS CH512_2D3U_Edge Left to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.197 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 8.86 V/m; Power Drift = -0.092 dB
 Peak SAR (extrapolated) = 0.431 W/kg
SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.095 mW/g
 Maximum value of SAR (measured) = 0.194 mW/g

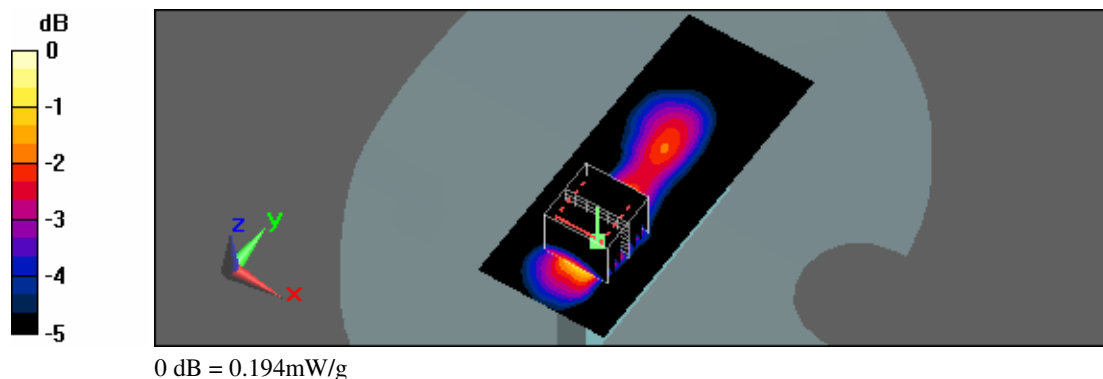

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 1:15:20 AM

Flat_GPRS PCS CH512_2D3U_Edge Right to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.242 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 12.6 V/m; Power Drift = -0.058 dB
 Peak SAR (extrapolated) = 0.330 W/kg
SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.126 mW/g
 Maximum value of SAR (measured) = 0.248 mW/g

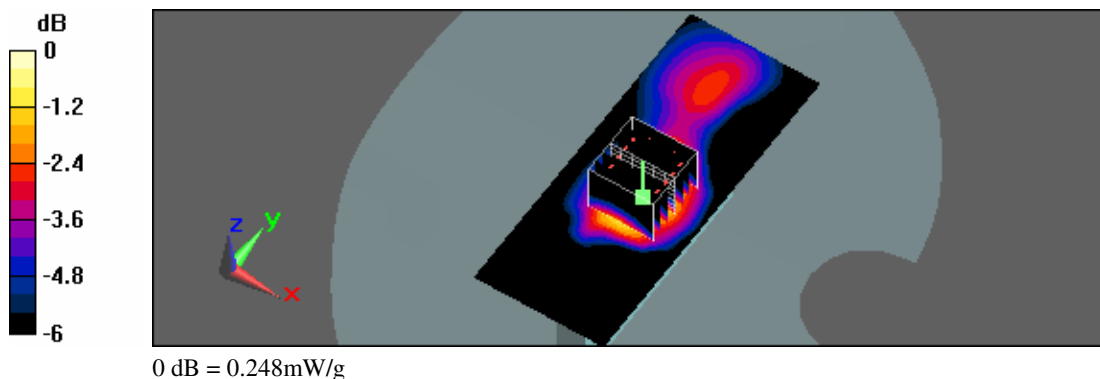

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 2:07:43 AM

Flat_GPRS PCS CH512_2D3U_Edge Bottom to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: GPRS PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.39, 7.39, 7.39); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.461 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 17.9 V/m; Power Drift = 0.043 dB
 Peak SAR (extrapolated) = 0.639 W/kg
SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.226 mW/g
 Maximum value of SAR (measured) = 0.475 mW/g

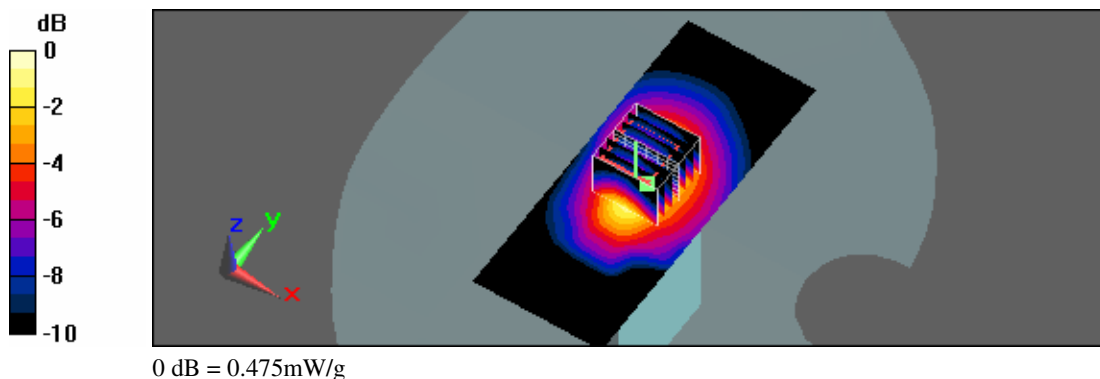

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:09:25 AM

Flat_DTM GPRS 850 CH190_Headset_2D3U(1CS+2PS)_Front Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.987 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.389 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 18.2 V/m; Power Drift = 0.011 dB
 Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.257 mW/g
 Maximum value of SAR (measured) = 0.384 mW/g

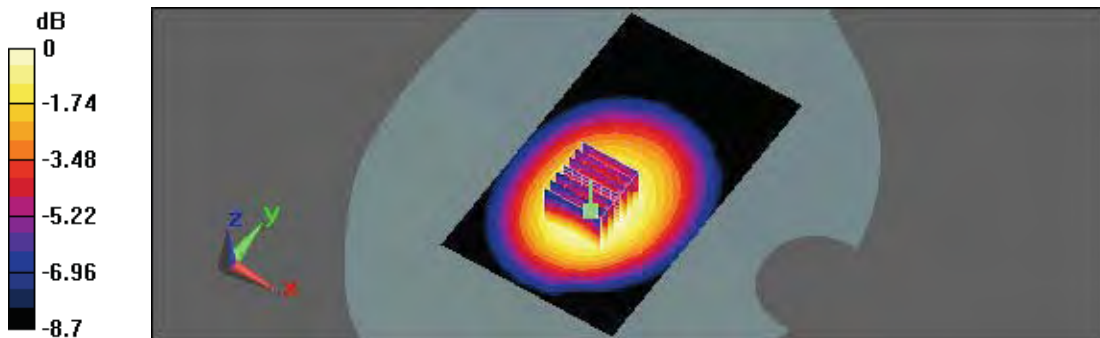

0 dB = 0.384mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 2:59:44 AM

Flat_DTM GPRS 850 CH190_Headset_2D3U(1CS+2PS)_Back Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.987 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.772 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 26.2 V/m; Power Drift = 0.125 dB
 Peak SAR (extrapolated) = 0.938 W/kg
SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.473 mW/g
 Maximum value of SAR (measured) = 0.772 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 26.2 V/m; Power Drift = 0.125 dB
 Peak SAR (extrapolated) = 0.906 W/kg
SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.382 mW/g
 Maximum value of SAR (measured) = 0.739 mW/g

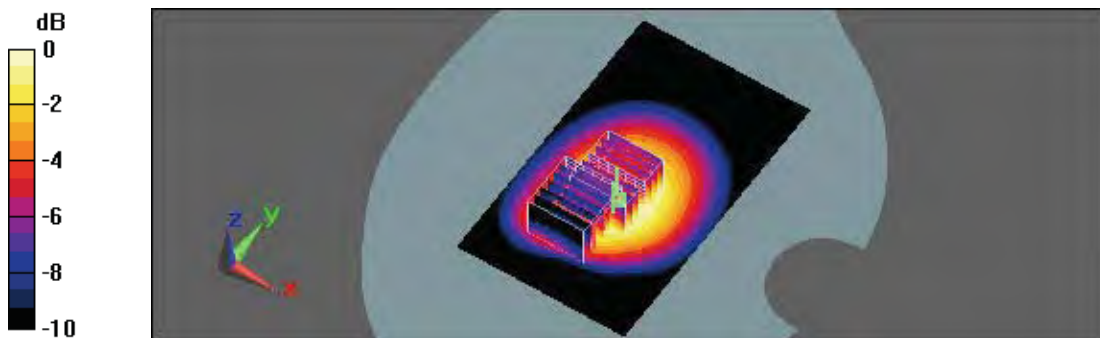

0 dB = 0.739mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:18:18 AM

Flat_DTM GPRS 850 CH190_Headset_2D3U(1CS+2PS)_Edge Left to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.987 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.228 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 14.8 V/m; Power Drift = 0.119 dB
 Peak SAR (extrapolated) = 0.284 W/kg
SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.135 mW/g
 Maximum value of SAR (measured) = 0.227 mW/g

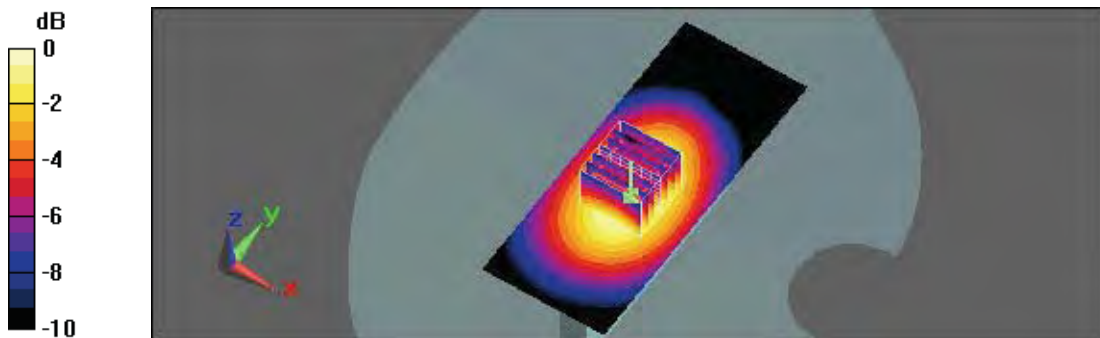

0 dB = 0.227mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:27:24 AM

Flat_DTM GPRS 850 CH190_Headset_2D3U(1CS+2PS)_Edge Right to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.987 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.381 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 17.4 V/m; Power Drift = 0.014 dB
 Peak SAR (extrapolated) = 0.464 W/kg
SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.228 mW/g
 Maximum value of SAR (measured) = 0.381 mW/g

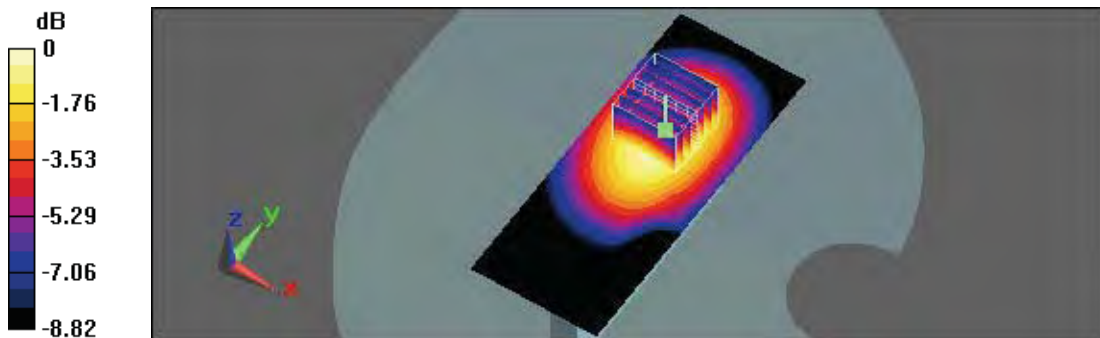

0 dB = 0.381mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:35:18 AM

Flat_DTM GPRS 850 CH190_Headset_2D3U(1CS+2PS)_Edge Bottom to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM 850 (2Down, 3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.8
 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.987 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(9.21, 9.21, 9.21); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.098 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.13 V/m; Power Drift = 0.166 dB
 Peak SAR (extrapolated) = 0.121 W/kg
SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.055 mW/g
 Maximum value of SAR (measured) = 0.097 mW/g

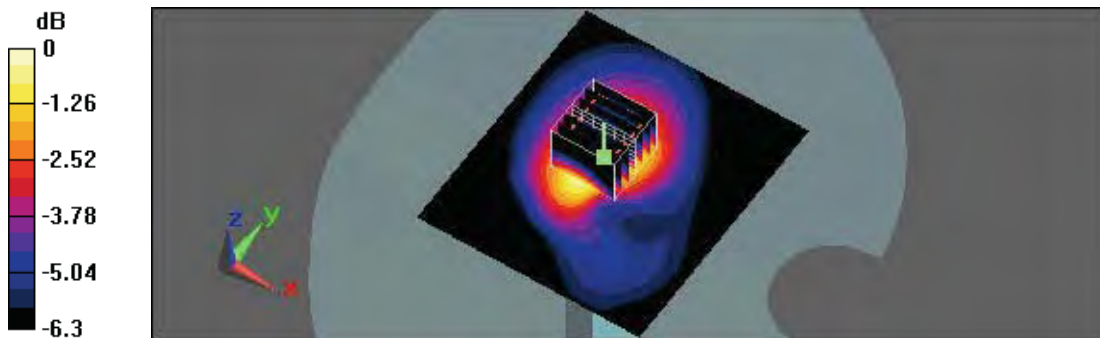

0 dB = 0.097mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 3:53:10 AM

Flat_DTM GPRS 1900 CH512_Headset_2D3U(1CS+2PS)_Front Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.402 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 11 V/m; Power Drift = 0.130 dB
 Peak SAR (extrapolated) = 0.558 W/kg
SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.193 mW/g
 Maximum value of SAR (measured) = 0.411 mW/g

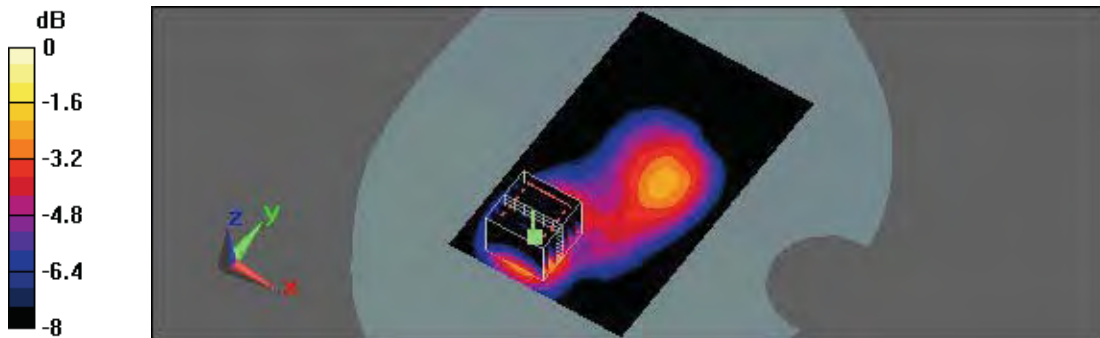

0 dB = 0.411mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 4:01:22 AM

Flat_DTM GPRS 1900 CH512_Headset_2D3U(1CS+2PS)_Back Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):


Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.874 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 17.2 V/m; Power Drift = 0.098 dB
 Peak SAR (extrapolated) = 1.37 W/kg
SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.381 mW/g
 Maximum value of SAR (measured) = 0.931 mW/g

Flat/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 17.2 V/m; Power Drift = 0.098 dB
 Peak SAR (extrapolated) = 0.796 W/kg
SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.283 mW/g
 Maximum value of SAR (measured) = 0.538 mW/g

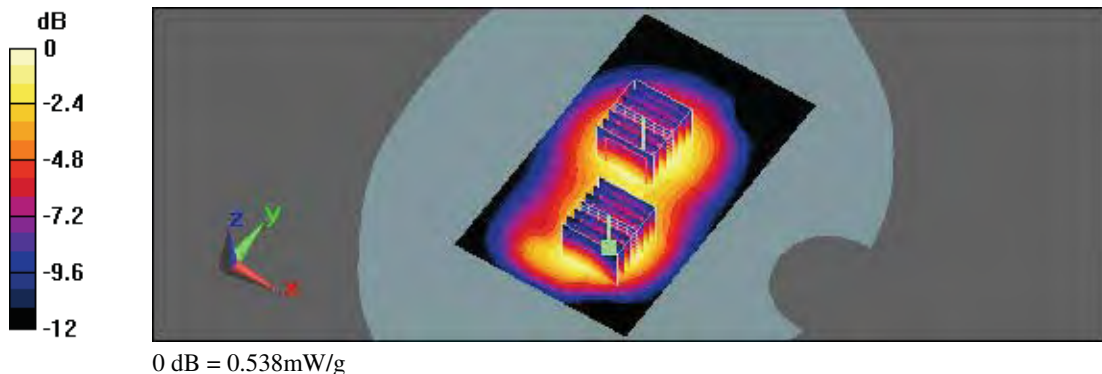

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 4:13:23 AM

Flat_DTM GPRS 1900 CH512_Headset_2D3U(1CS+2PS)_Edge Left to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.164 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 8.07 V/m; Power Drift = -0.086 dB
 Peak SAR (extrapolated) = 0.358 W/kg
SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.080 mW/g
 Maximum value of SAR (measured) = 0.162 mW/g

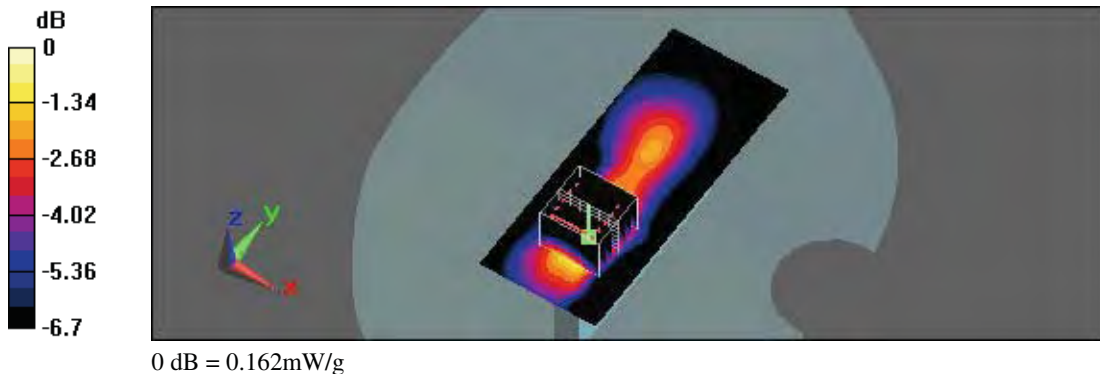

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 4:23:19 AM

Flat_DTM GPRS 1900 CH512_Headset_2D3U(1CS+2PS)_Edge Right to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.198 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 11.4 V/m; Power Drift = -0.122 dB
 Peak SAR (extrapolated) = 0.268 W/kg
SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.103 mW/g
 Maximum value of SAR (measured) = 0.203 mW/g

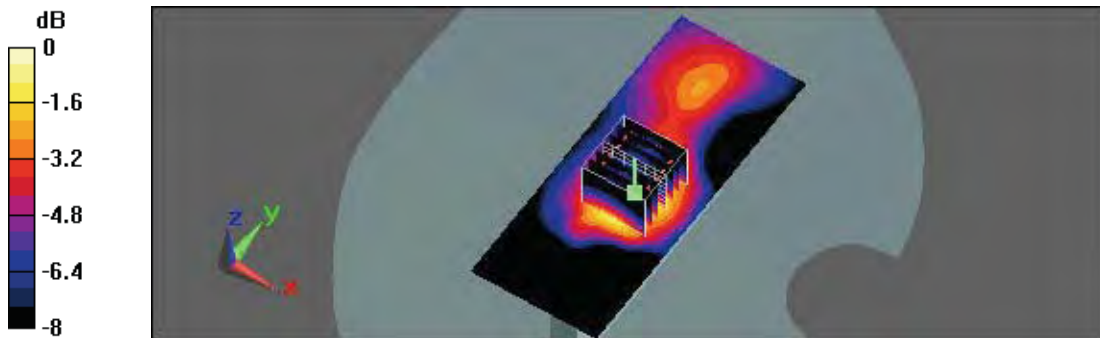

0 dB = 0.203mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 9/30/2011 4:23:19 AM

Flat_DTM GPRS 1900 CH512_Headset_2D3U(1CS+2PS)_Edge Bottom to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: DTM PCS (2Down,3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:2.8
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3801; ConvF(7.14, 7.14, 7.14); Calibrated: 7/11/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (41x101x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.383 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 16.3 V/m; Power Drift = 0.144 dB
 Peak SAR (extrapolated) = 0.527 W/kg
SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.187 mW/g
 Maximum value of SAR (measured) = 0.395 mW/g

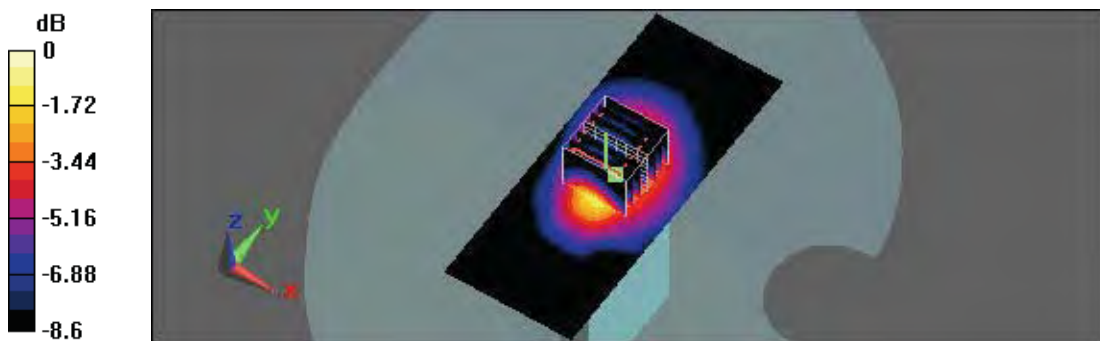

0 dB = 0.395mW/g

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 6:33:53 PM

Flat_802.11b CH11_1M_Front Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.109 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 2.46 V/m; Power Drift = 0.184 dB
 Peak SAR (extrapolated) = 0.077 W/kg
SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.023 mW/g
 Maximum value of SAR (measured) = 0.053 mW/g

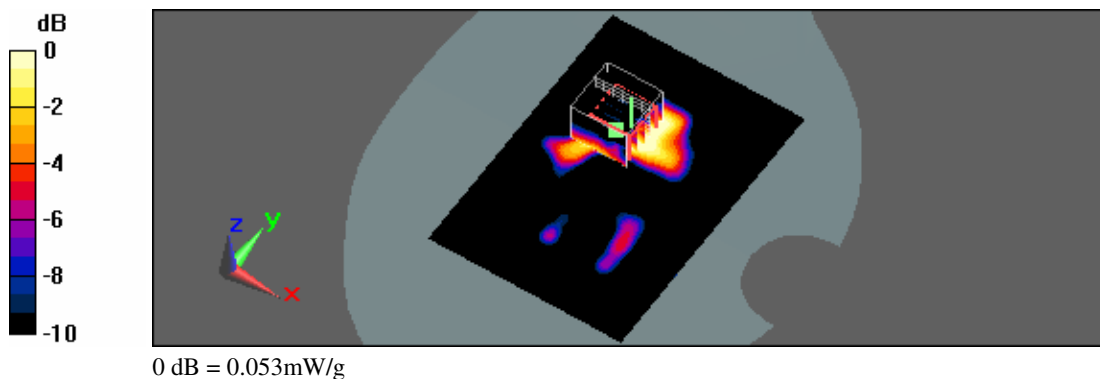

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 4:00:25 PM

Flat_802.11b CH11_1M_Back Surface to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.413 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 5.99 V/m; Power Drift = 0.032 dB
 Peak SAR (extrapolated) = 0.547 W/kg
SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.111 mW/g
 Maximum value of SAR (measured) = 0.330 mW/g

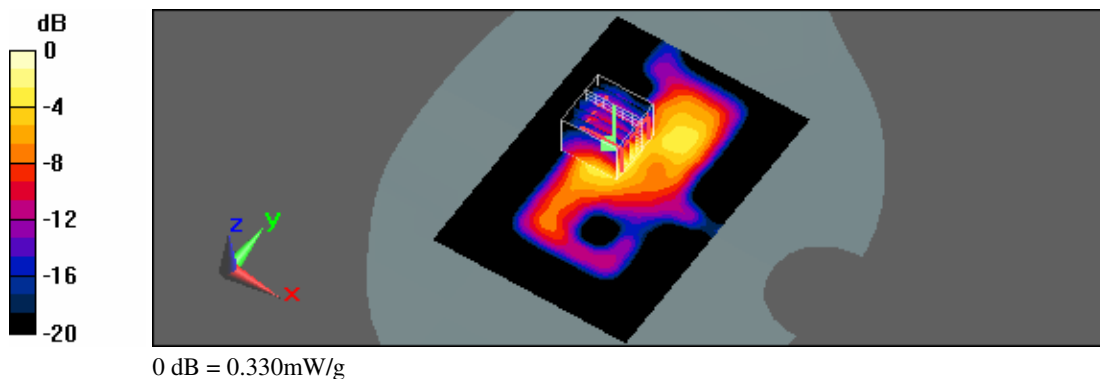

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 5:09:08 PM

Flat_802.11b CH11_1M_Edge Right to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.136 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 4.16 V/m; Power Drift = 0.191 dB
 Peak SAR (extrapolated) = 0.149 W/kg
SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.036 mW/g
 Maximum value of SAR (measured) = 0.102 mW/g

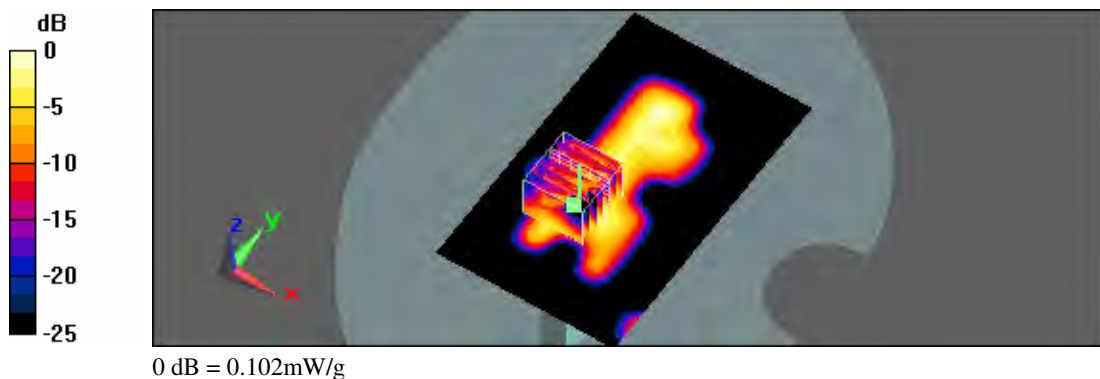

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 8/22/2011 5:38:21 PM

Flat_802.11b CH11_1M_Edge Top to Phantom_10mm

DUT: PJ03100; Type: Smartphone; FCC ID: NM8PJ03100

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(7.23, 7.23, 7.23); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (51x91x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.087 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 6.16 V/m; Power Drift = -0.131 dB
 Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.032 mW/g
 Maximum value of SAR (measured) = 0.086 mW/g

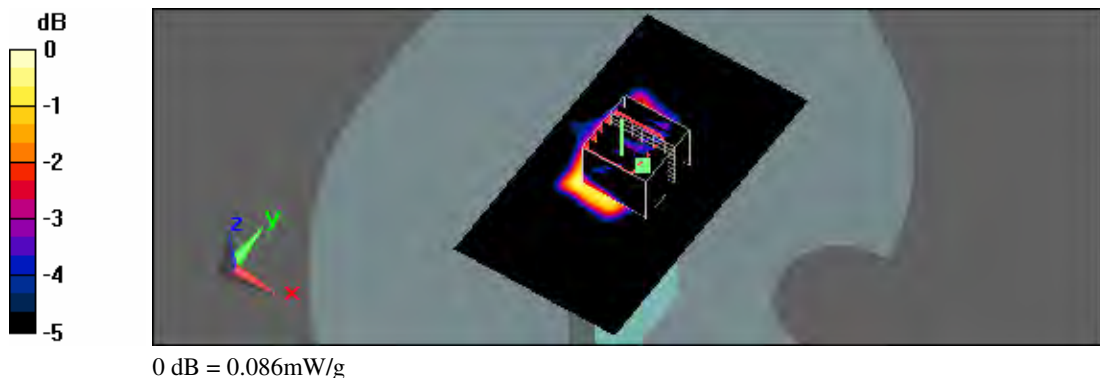



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D835V2 SN:4d082 Calibration No.D835V2-4d082_Jul11
- Dipole _ D1900V2 SN:5d111 Calibration No.D1900V2-5d111_Jul11
- Dipole _ D2450V2 SN:712 Calibration No.D2450V2-712_Feb11
- Probe _ EX3DV4 SN:3632 Calibration No.EX3-3632_Jan11
- Probe _ EX3DV4 SN:3801 Calibration No.EX3-3801_Jul11
- DAE _ DAE4 SN:779 Calibration No.DAE4-779_Jan11



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **ATL (Auden)**

Certificate No: **D835V2-4d082_Jul11**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 4d082**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 19, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal. Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	1D0005	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Claudio Leubler** (Name) / **Laboratory Technician** (Function) /  (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) /  (Signature)

Issued: July 19, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.0 \pm 6 %	0.88 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.28 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.25 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.50 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.07 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.8 \pm 6 %	0.98 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.39 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.43 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.22 mW / g \pm 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.4 Ω - 7.0 $j\Omega$
Return Loss	- 23.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.1 Ω - 8.8 $j\Omega$
Return Loss	- 20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.389 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 17, 2008

DASY5 Validation Report for Head TSL

Date: 18.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.745 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.357 W/kg


SAR(1 g) = 2.28 mW/g; SAR(10 g) = 1.5 mW/g

Maximum value of SAR (measured) = 2.657 mW/g

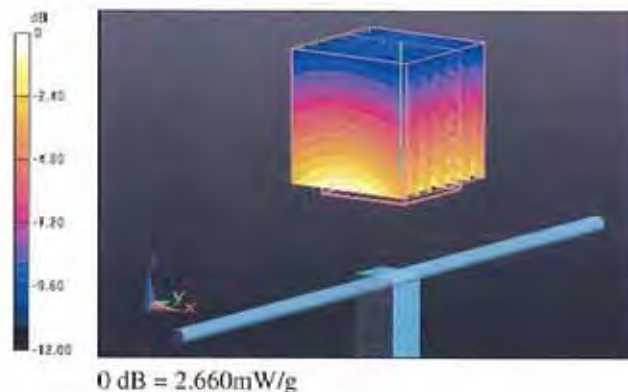



Impedance Measurement Plot for Head TSL

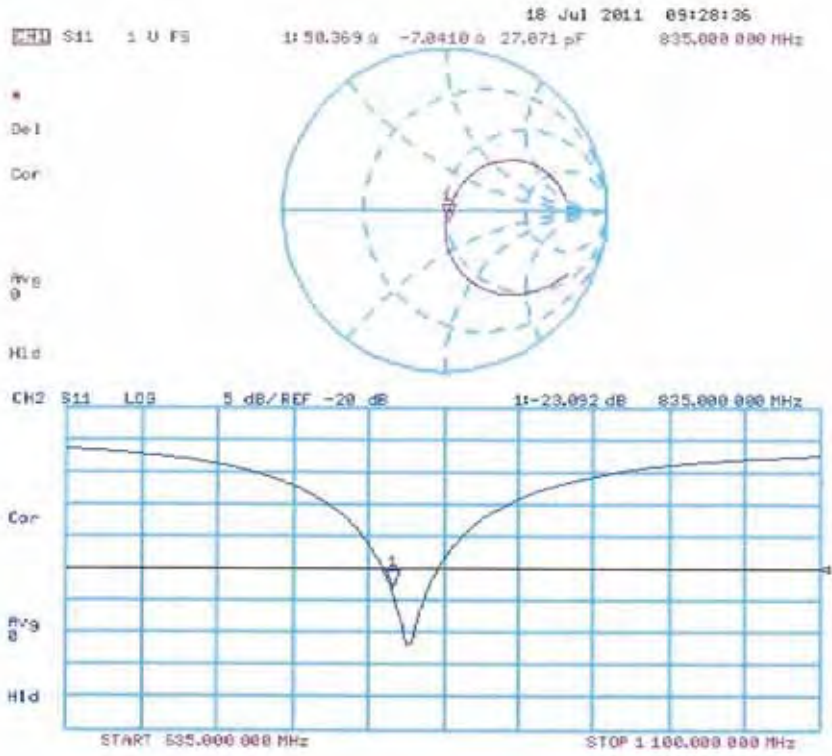

DASY5 Validation Report for Body TSL

Date: 19.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54,883 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.464 W/kg


SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.762 mW/g

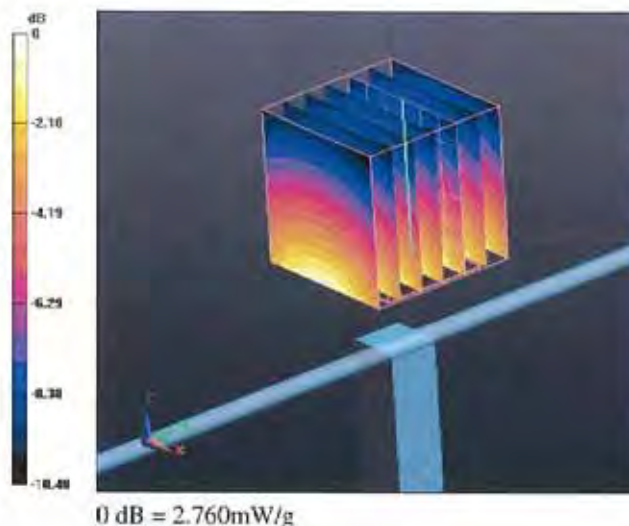



Impedance Measurement Plot for Body TSL

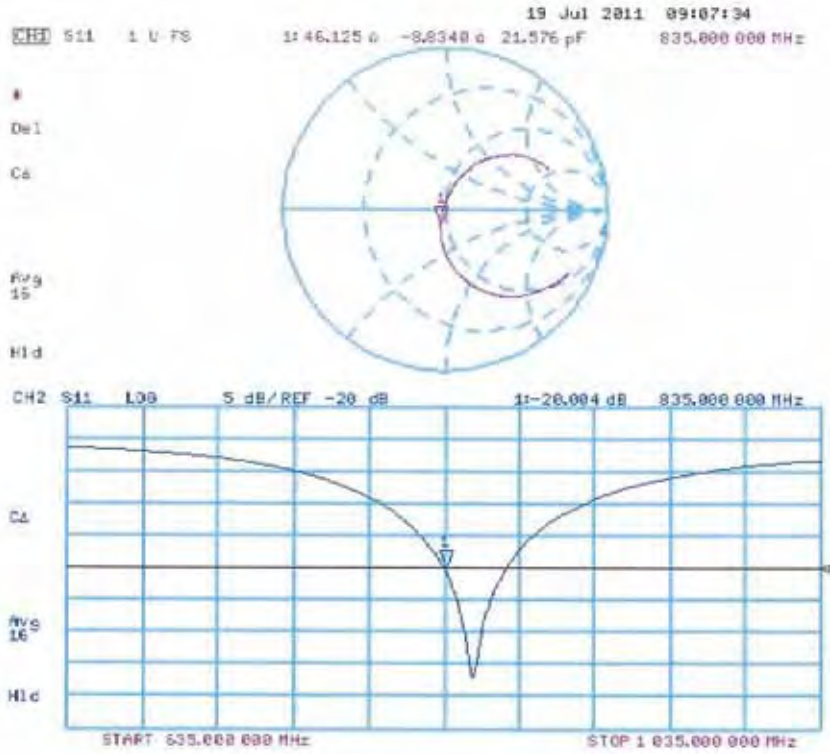



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **ATL (Auden)**

Certificate No: **D1900V2-5d111_Jul11**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d111**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5088 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	130005	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 6753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimitar Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.1 \pm 6 %	1.42 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.9 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.25 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.8 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.3 \pm 6 %	1.53 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.9 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.39 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.5 mW / g \pm 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$51.3 \Omega + 6.7 j\Omega$
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$45.9 \Omega + 6.6 j\Omega$
Return Loss	- 21.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.201 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 28, 2008

DASY5 Validation Report for Head TSL

Date: 20.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d111

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.068 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.391 W/kg


SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g

Maximum value of SAR (measured) = 12.667 mW/g

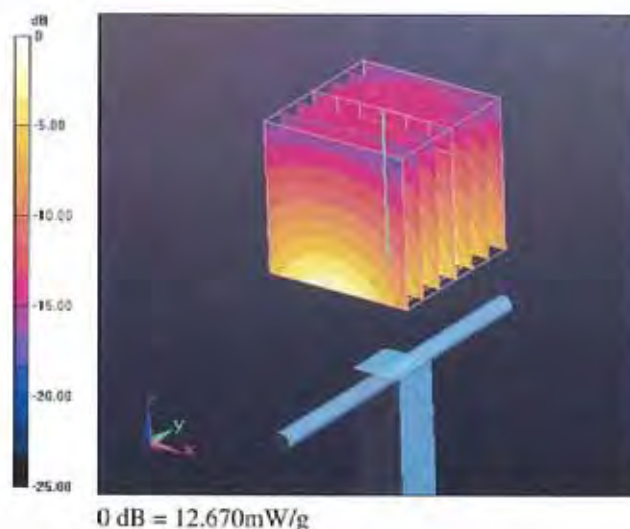



Impedance Measurement Plot for Head TSL

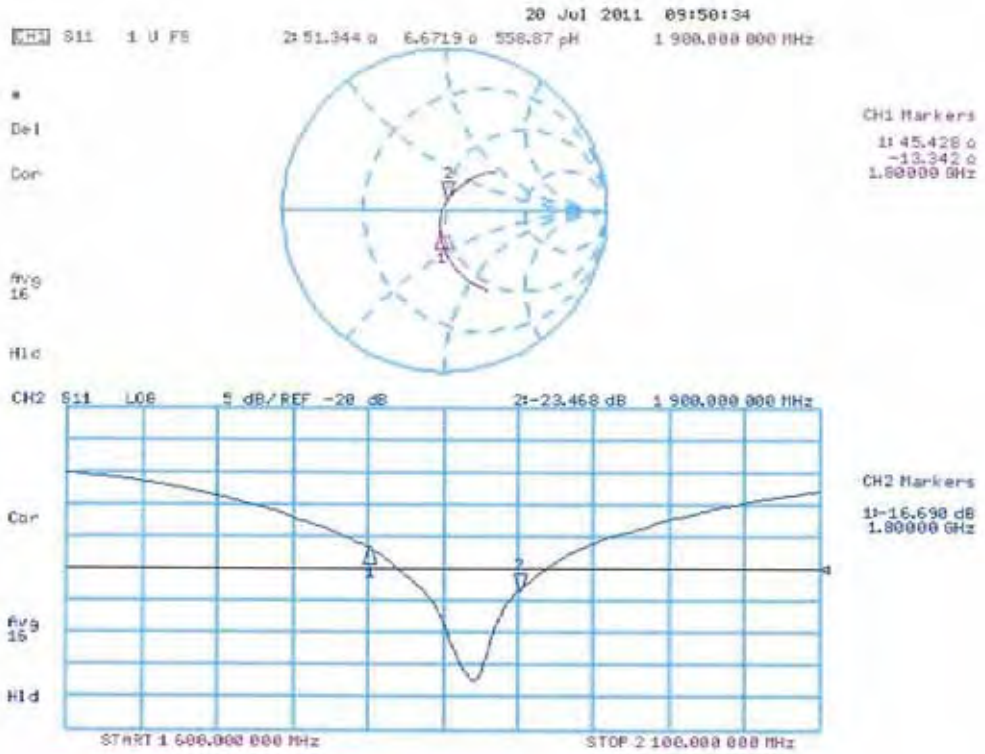

DASY5 Validation Report for Body TSL

Date: 22.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d111

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.720 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 18.122 W/kg


SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 12.882 mW/g





Impedance Measurement Plot for Body TSL

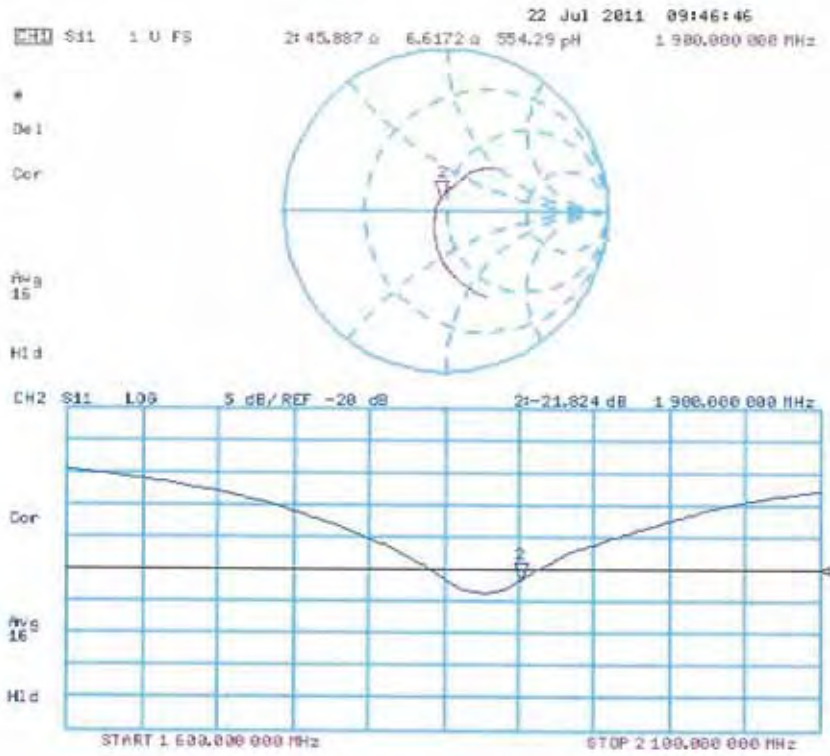



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D2450V2-712_Feb11**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 712**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 23, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5088 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES30V3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100305	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 6753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Dimca Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 24, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	lissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.1 \pm 6 %	1.73 mho/m \pm 6 %
Head TSL temperature during test	(21.2 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.9 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.08 mW / g
SAR normalized	normalized to 1W	24.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.5 mW / g \pm 16.5 % (k=2)



Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.2 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 mW / g
SAR normalized	normalized to 1W	50.4 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	50.4 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.83 mW / g
SAR normalized	normalized to 1W	23.3 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.3 mW / g ± 16.5 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.3 Ω + 1.7 j Ω
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.8 Ω + 5.5 j Ω
Return Loss	- 25.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.146 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2002

DASY5 Validation Report for Head TSL

Date/Time: 23.02.2011 12:42:01

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 101.5 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 26.439 W/kg
SAR(1 g) = 13 mW/g; SAR(10 g) = 6.08 mW/g
 Maximum value of SAR (measured) = 16.525 mW/g

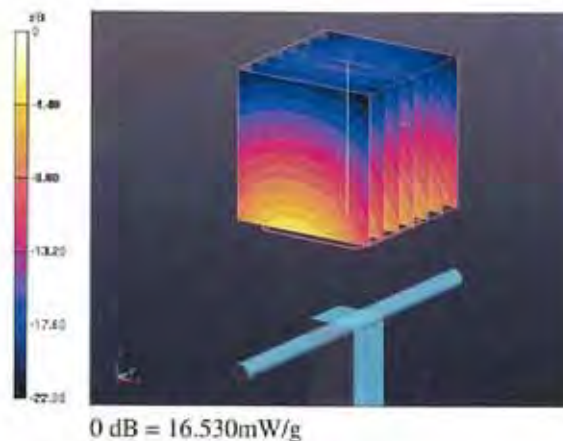



Impedance Measurement Plot for Head TSL

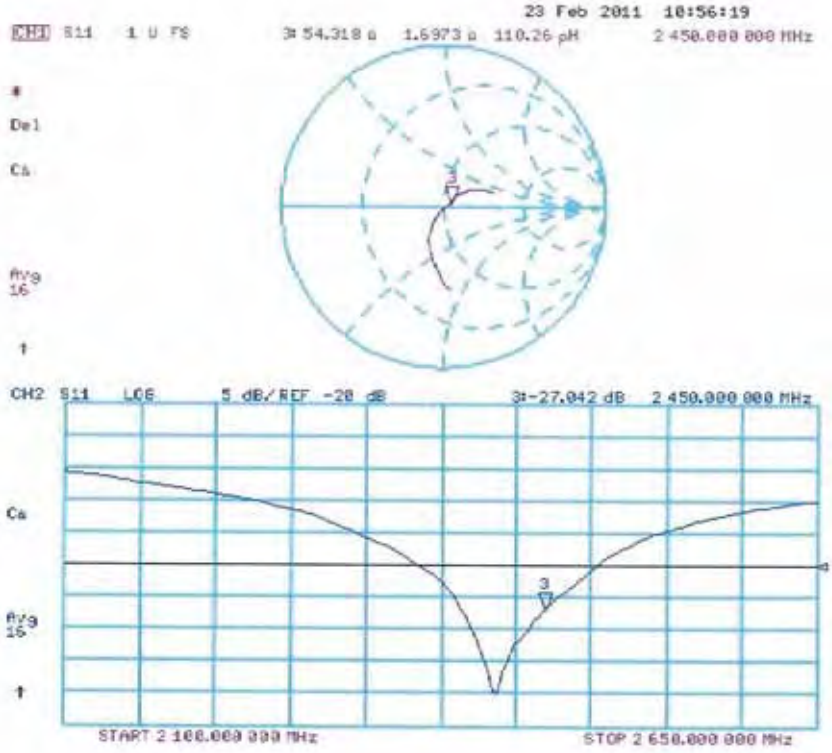

DASY5 Validation Report for Body TSL

Date/Time: 18.02.2011 14:36:14

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement
 grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 95.420 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 26.751 W/kg
SAR(1 g) = 12.6 mW/g; SAR(10 g) = 5.83 mW/g
 Maximum value of SAR (measured) = 16.714 mW/g

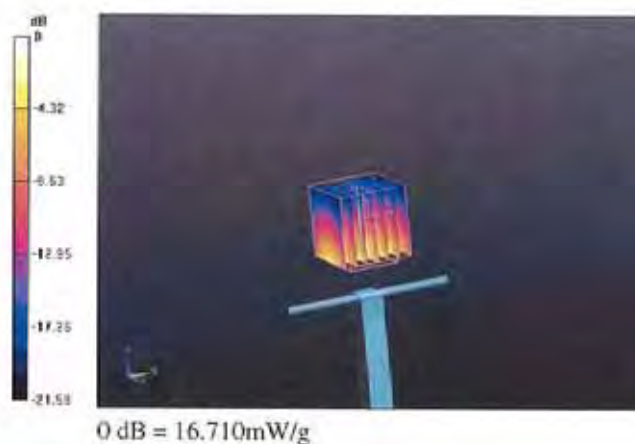



Impedance Measurement Plot for Body TSL

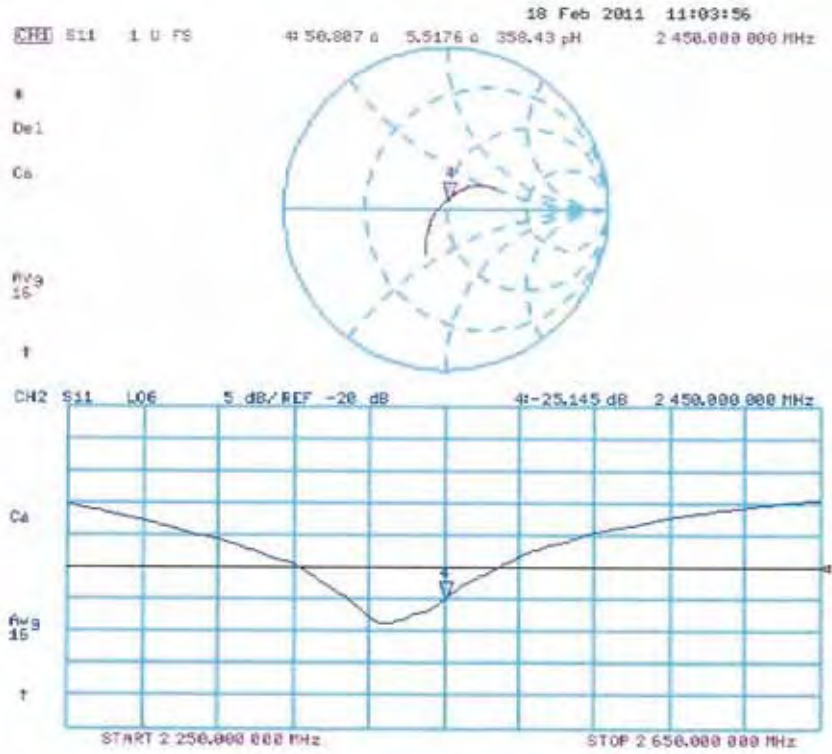

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **EX3-3632_Jan11**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3632**

Calibration procedure(s): **QA CAL-01.v7, QA CAL-12.v6, QA CAL-23.v4 and QA CAL-25.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 19, 2011**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U017D0	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390565	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kasrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 20, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 SN:3632

January 19, 2011

Probe EX3DV4

SN:3632

Manufactured:	November 1, 2007
Last calibrated:	January 26, 2010
Recalibrated:	January 19, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V/(V/m)^2)^A$	0.46	0.44	0.39	$\pm 10.1\%$
DCP (mV) ^B	97.4	94.9	97.4	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	133.3	$\pm 3.4\%$
			Y	0.00	0.00	1.00	110.0	
			Z	0.00	0.00	1.00	125.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX, Y, Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] [†]	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	9.40	9.40	9.40	0.12	2.85 ± 13.3%
750	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	9.51	9.51	9.51	0.67	0.64 ± 11.0%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	9.09	9.09	9.09	0.66	0.64 ± 11.0%
1810	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.16	8.16	8.16	0.51	0.74 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.02	8.02	8.02	0.58	0.68 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.28	7.28	7.28	0.33	0.91 ± 11.0%

[†] The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632


Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	10.05	10.05	10.05	0.05	1.80 ± 13.3%
750	± 50 / ± 100	55.5 ± 5%	0.96 ± 5%	9.33	9.33	9.33	0.78	0.63 ± 11.0%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	9.28	9.28	9.28	0.73	0.66 ± 11.0%
1810	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.57	7.57	7.57	0.83	0.60 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.39	7.39	7.39	0.67	0.65 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	7.23	7.23	7.23	0.28	1.07 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

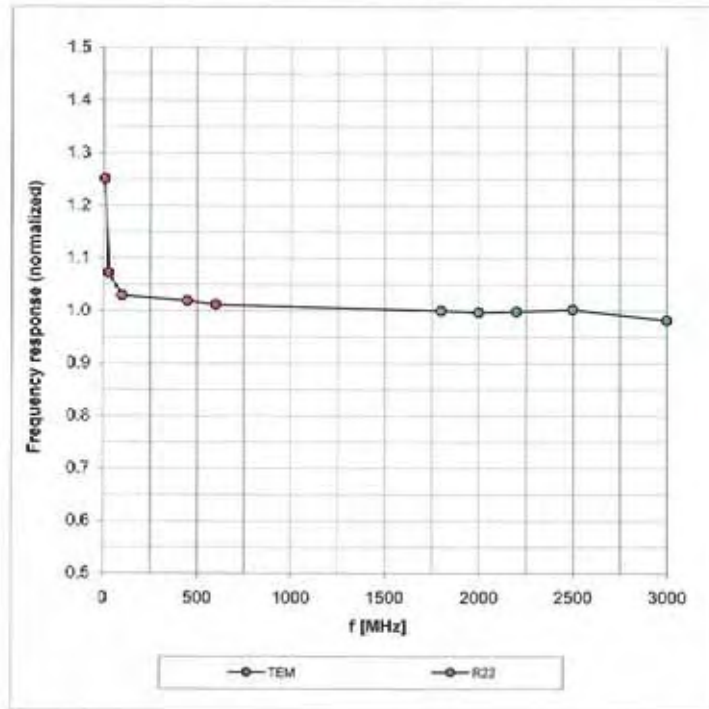



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

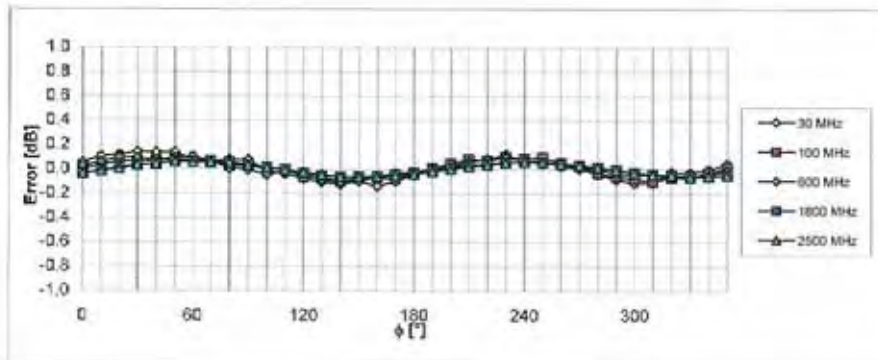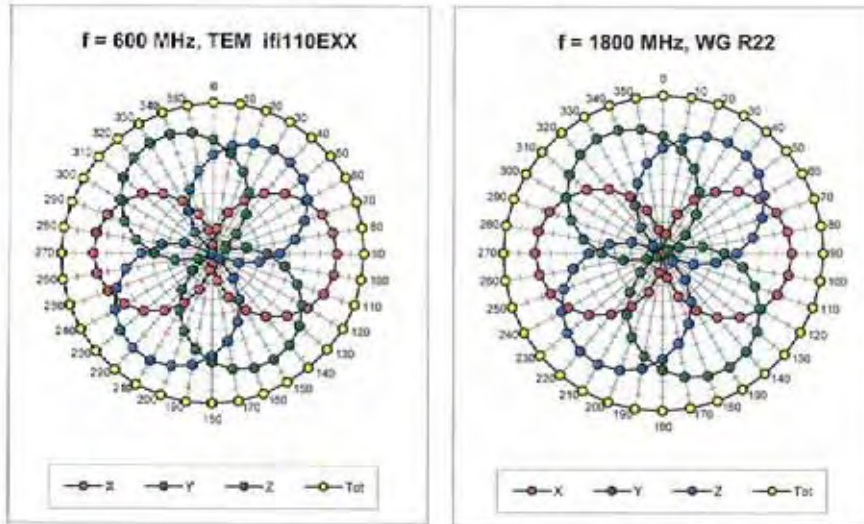


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

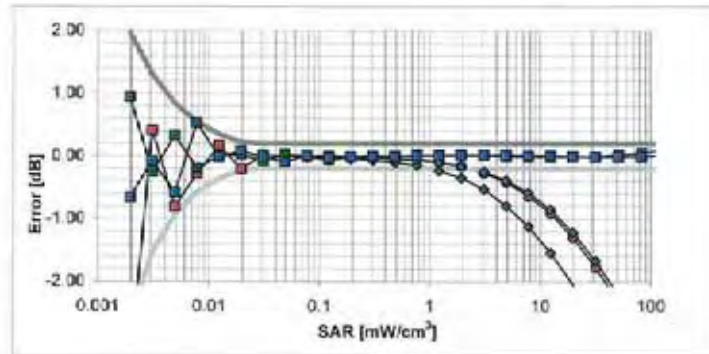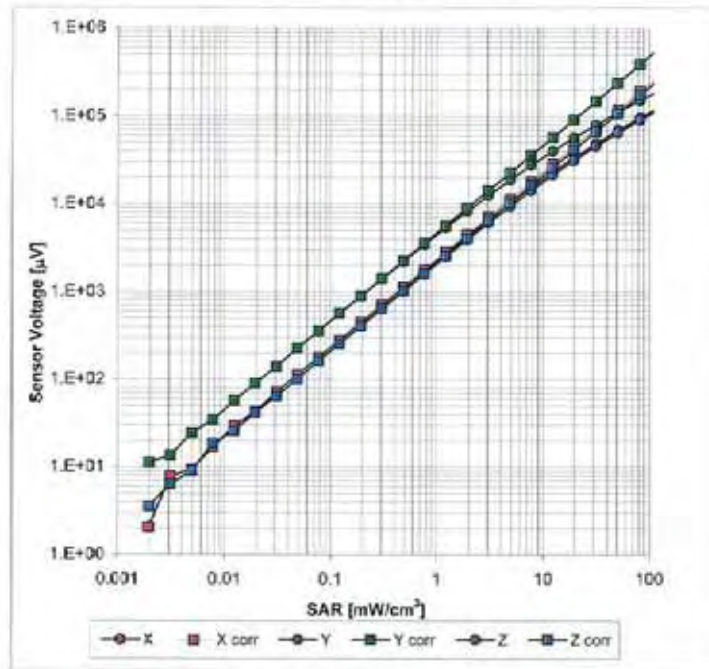


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

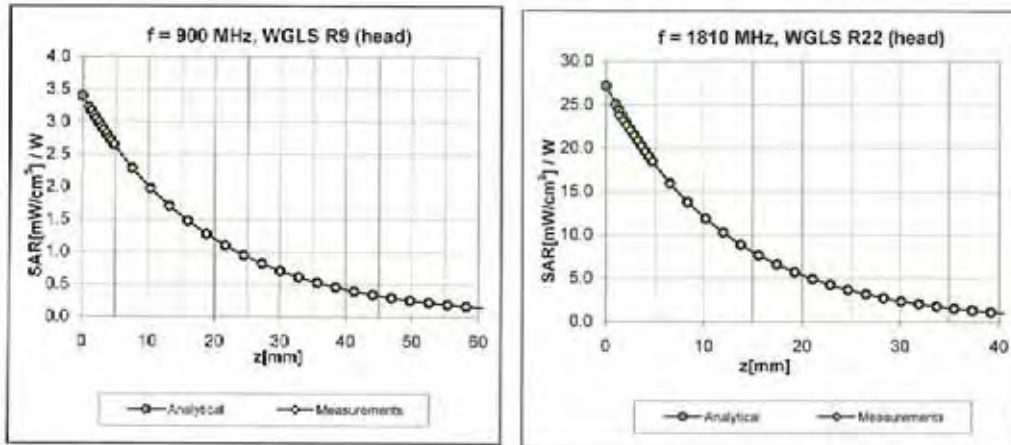

Deviation from Isotropy in HSL

Error (ϕ, θ), f = 900 MHz

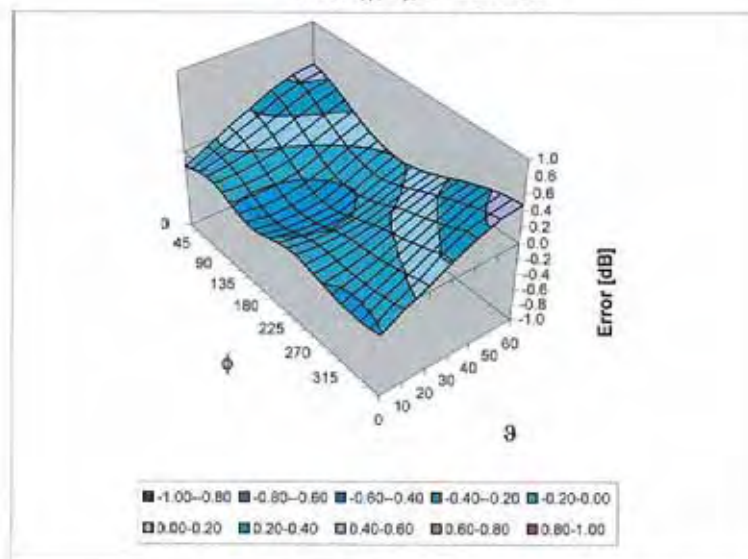

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)



EX3DV4 SN:3632

January 19, 2011

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **ADDON**

Certificate No: **EX3-3801_Jul11**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3801**

Calibration procedure(s): **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 11, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Keatani	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 21, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 – SN:3801

July 11, 2011

Probe EX3DV4

SN:3801

Manufactured: April 5, 2011
Calibrated: July 11, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)



DASY/EASY - Parameters of Probe: EX3DV4 - SN:3801

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.57	0.59	0.52	± 10.1 %
DCP (mV) ^B	99.7	97.1	99.1	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	127.3	±3.0 %
			Y	0.00	0.00	1.00	124.0	
			Z	0.00	0.00	1.00	121.2	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



DASY/EASY - Parameters of Probe: EX3DV4 - SN:3801

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	9.28	9.28	9.28	0.80	0.66	± 12.0 %
835	41.5	0.90	9.00	9.00	9.00	0.80	0.64	± 12.0 %
900	41.5	0.97	8.72	8.72	8.72	0.78	0.69	± 12.0 %
1750	40.1	1.37	7.92	7.92	7.92	0.80	0.62	± 12.0 %
1900	40.0	1.40	7.60	7.60	7.60	0.80	0.63	± 12.0 %
2000	40.0	1.40	7.55	7.55	7.55	0.80	0.50	± 12.0 %
2450	39.2	1.80	6.81	6.81	6.81	0.80	0.63	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



DASY/EASY - Parameters of Probe: EX3DV4- SN:3801


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	9.59	9.59	9.59	0.18	1.23	± 12.0 %
835	55.2	0.97	9.21	9.21	9.21	0.22	1.15	± 12.0 %
900	55.0	1.05	9.04	9.04	9.04	0.26	0.82	± 12.0 %
1750	53.4	1.49	7.63	7.63	7.63	0.80	0.70	± 12.0 %
1900	53.3	1.52	7.14	7.14	7.14	0.80	0.67	± 12.0 %
2000	53.3	1.52	7.28	7.28	7.28	0.80	0.66	± 12.0 %
2450	52.7	1.95	6.79	6.79	6.79	0.80	0.61	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


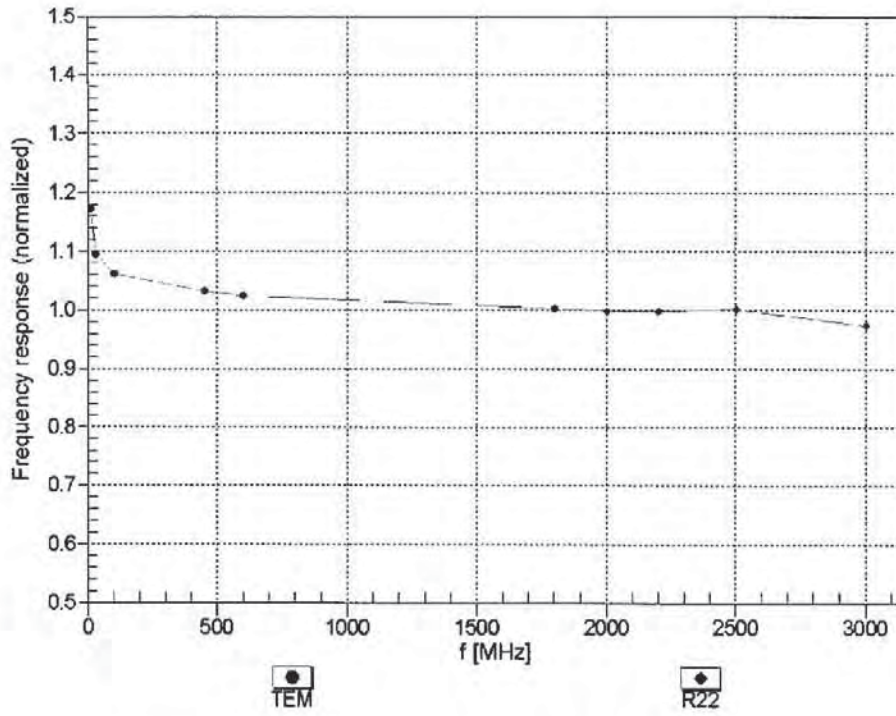


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

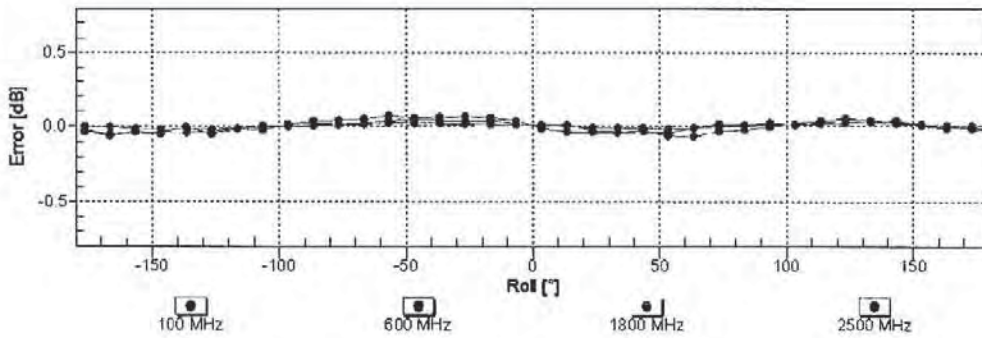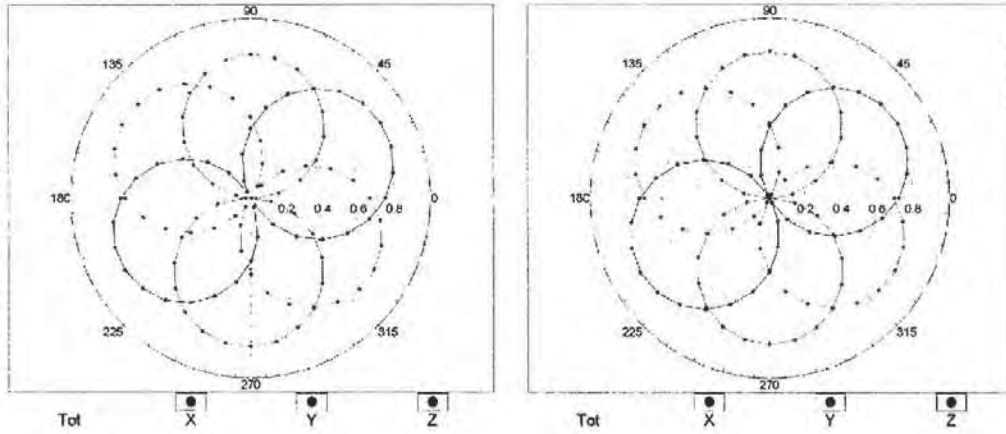


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

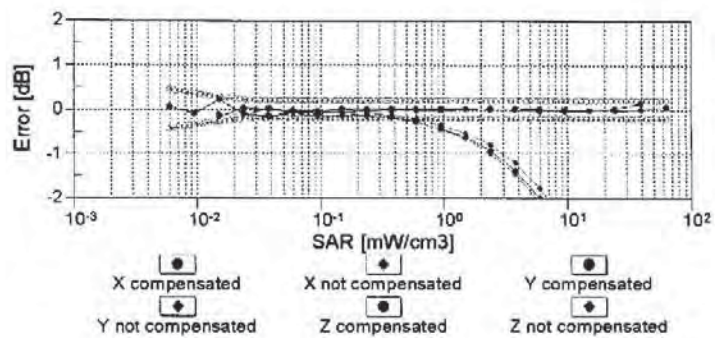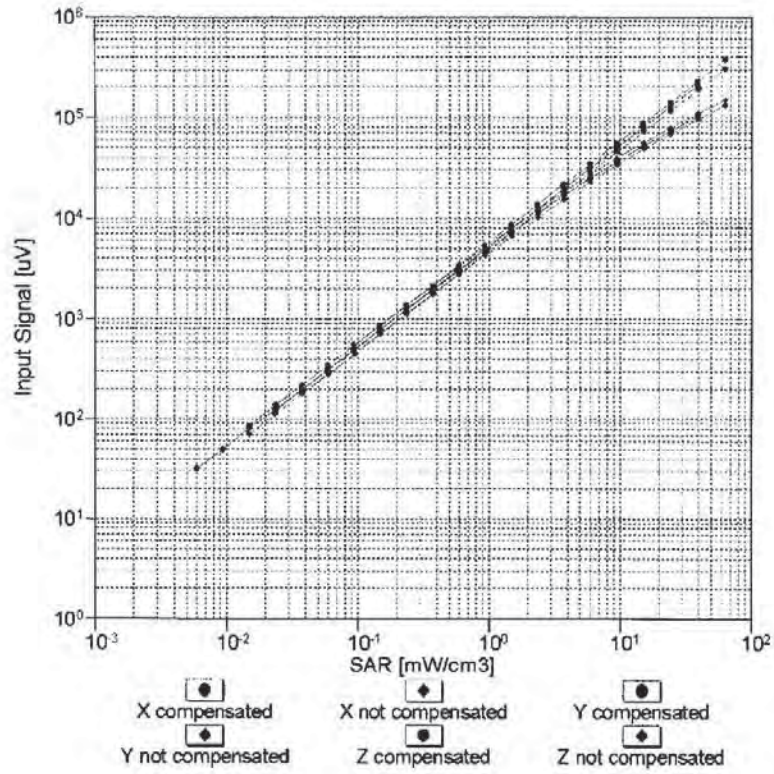


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

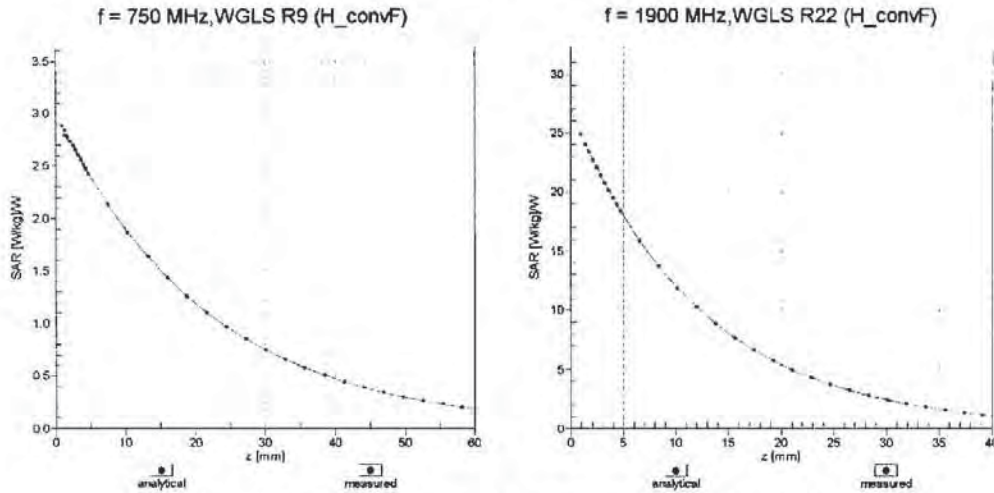

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

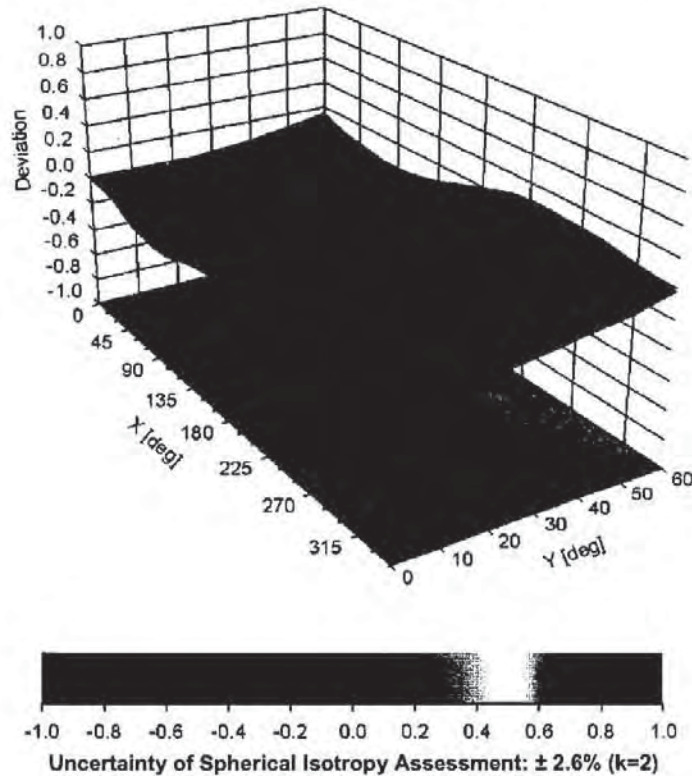

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3801****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **DAE4-779_Jan11**

CALIBRATION CERTIFICATE

Object: **DAE4 - SD 000 D04 BJ - SN: 779**

Calibration procedure(s): **QA CAL-06.v22
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 31, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by: **Name: Andrea Guntli, Function: Technician, Signature: [Signature]**

Approved by: **Name: Fin Bernholt, Function: R&D Director, Signature: [Signature]**

Issued: January 31, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.517 \pm 0.1% (k=2)	403.748 \pm 0.1% (k=2)	403.972 \pm 0.1% (k=2)
Low Range	3.96927 \pm 0.7% (k=2)	3.98585 \pm 0.7% (k=2)	3.99915 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	155.5 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------



Appendix

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200001.8	6.19	0.00
Channel X + Input	200003.75	4.25	0.02
Channel X - Input	-19996.56	3.04	-0.02
Channel Y + Input	200005.0	0.90	0.00
Channel Y + Input	20000.78	1.38	0.01
Channel Y - Input	-19996.43	2.97	-0.01
Channel Z + Input	200002.2	-1.15	-0.00
Channel Z + Input	19999.59	0.19	0.00
Channel Z - Input	-19995.05	4.35	-0.02

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.4	0.25	0.01
Channel X + Input	200.27	0.37	0.18
Channel X - Input	-199.08	1.12	-0.56
Channel Y + Input	2000.1	0.19	0.01
Channel Y + Input	199.01	-0.89	-0.45
Channel Y - Input	-199.30	0.50	-0.25
Channel Z + Input	1999.6	-0.40	-0.02
Channel Z + Input	199.22	-0.88	-0.44
Channel Z - Input	-200.27	-0.37	0.19

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-3.66	-5.39
	-200	5.82	4.90
Channel Y	200	13.39	13.58
	-200	-14.98	-15.16
Channel Z	200	2.20	2.53
	-200	-4.84	-4.61

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.33	-0.57
Channel Y	200	1.97	-	3.29
Channel Z	200	1.19	-0.28	-



4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15613	15134
Channel Y	15831	16218
Channel Z	16150	17743

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	-0.26	-1.03	0.79	0.42
Channel Y	0.52	-1.04	2.07	0.58
Channel Z	-2.22	-3.25	-0.85	0.44

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9