

## FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ03120  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Receive Date : Sep. 06, 2011  
Issue Date : Oct. 11, 2011

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	Oct. 11, 2011	Initial Issue	

## Verification of Compliance

Issued Date: 10/11/2011

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ03120  
FCC ID : NM8PJ03120  
EUT Rated Voltage : DC 5V, 1A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Test Result : Complied  
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.


Tel : +86-3-2710188 / Fax : +86-3-2710190


Taiwan Accreditation Foundation accreditation number:  
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .  
The test results of this report relate only to the tested sample identified in this report.

Approved By :   
(Manager) (Miller Lee )

Reviewed By :   
(Testing Engineer) (Gary Wu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
	3.1. Mode of Operation .....	8
	3.2. EUT Exercise Software.....	8
	3.3. Configuration of Test System Details .....	9
	3.4. Test Site Environment.....	9
<b>4</b>	<b>Conducted Emission Measurement.....</b>	<b>10</b>
	4.1. Limit.....	10
	4.2. Test Instruments .....	10
	4.3. Test Setup.....	10
	4.4. Test Procedure .....	11
	4.5. Test Result.....	12
<b>5</b>	<b>Radiated Interference Measurement.....</b>	<b>17</b>
	5.1. Limit.....	17
	5.2. Test Instruments .....	17
	5.3. Setup .....	18
	5.4. Test Procedure .....	19
	5.5. Test Result.....	21
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>28</b>
	6.1. Limit.....	28
	6.2. Test Setup.....	28
	6.3. Test Instruments .....	28
	6.4. Test Procedure .....	28
	6.5. Test Result.....	29
<b>7</b>	<b>6dB RF Bandwidth Measurement .....</b>	<b>30</b>
	7.1. Limit.....	30
	7.2. Test Setup.....	30
	7.3. Test Instruments .....	30
	7.4. Test Procedure .....	30
	7.5. Test Result.....	31
	7.6. Test Graphs .....	32

<b>8</b>	<b>Maximum Power Density Measurement .....</b>	<b>35</b>
8.1.	Limit.....	35
8.2.	Test Setup.....	35
8.3.	Test Instruments .....	35
8.4.	Test Procedure .....	35
8.5.	Test Result.....	36
8.6.	Test Graphs .....	37
<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>40</b>
9.1.	Limit.....	40
9.2.	Test Setup.....	40
9.3.	Test Instruments .....	40
9.4.	Test Procedure .....	40
9.5.	Test Graphs .....	41
<b>10</b>	<b>Band Edges Measurement.....</b>	<b>44</b>
10.1.	Limit.....	44
10.2.	Test Setup.....	44
10.3.	Test Instruments .....	44
10.4.	Test Procedure .....	45
10.5.	Test Result.....	46
<b>11</b>	<b>99 % Occupied Bandwidth Measurement.....</b>	<b>58</b>
11.1.	Limit.....	58
11.2.	Test Setup.....	58
11.3.	Test Instruments .....	58
11.4.	Test Procedure .....	58
11.5.	Test Result.....	59
11.6.	Test Graphs .....	60
<b>12</b>	<b>Antenna Measurement .....</b>	<b>63</b>
12.1.	Limit.....	63
12.2.	Antenna Connector Construction.....	63

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	:	Smartphone
Trade Name	:	HTC
Model No.	:	PJ03120
Applicant	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Manufacturer	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
FCC ID	:	NM8PJ03120
IMEI No.	:	358703040010875
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM draft 802.11n Standard-20MHz channel mode: OFDM
Antenna Type	:	PIFA Type
Antenna Gain	:	0.04 dBi
RF Output Power	:	IEEE 802.11b: 0.161 W / 22.07 dBm IEEE 802.11g: 0.275 W / 24.40 dBm draft 802.11n Standard-20MHz: 0.257 W / 24.10 dBm

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: draft 802.11n Standard-20MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with MCS0 were chosen for full testing.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


#### 3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.




### 3.3. Configuration of Test System Details

#### Conducted Emission

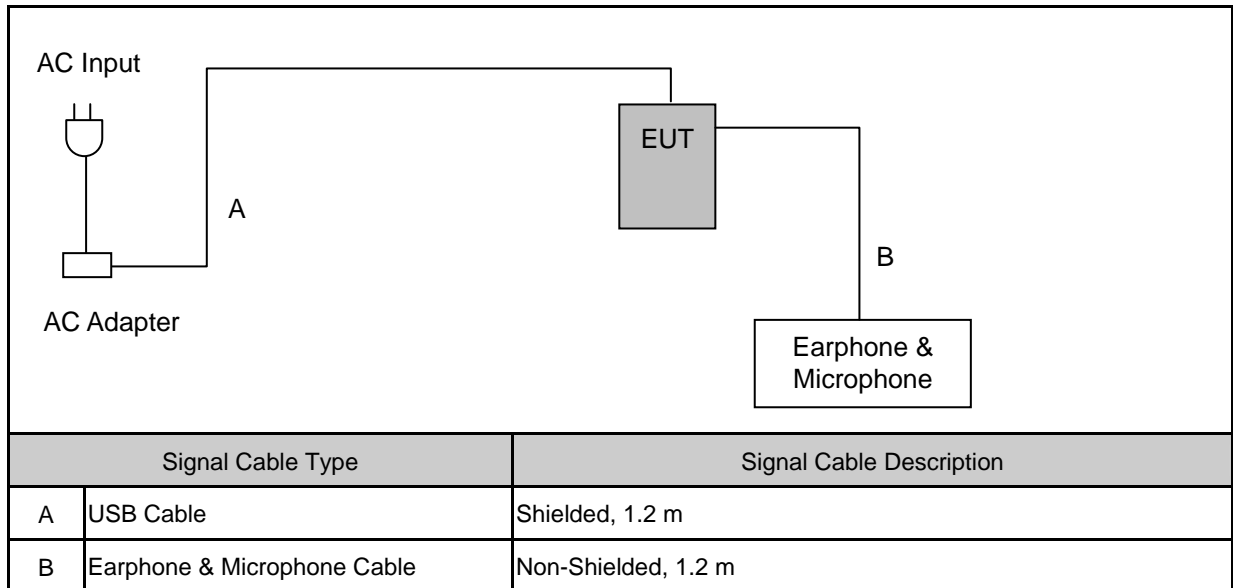

#### Radiated Emission

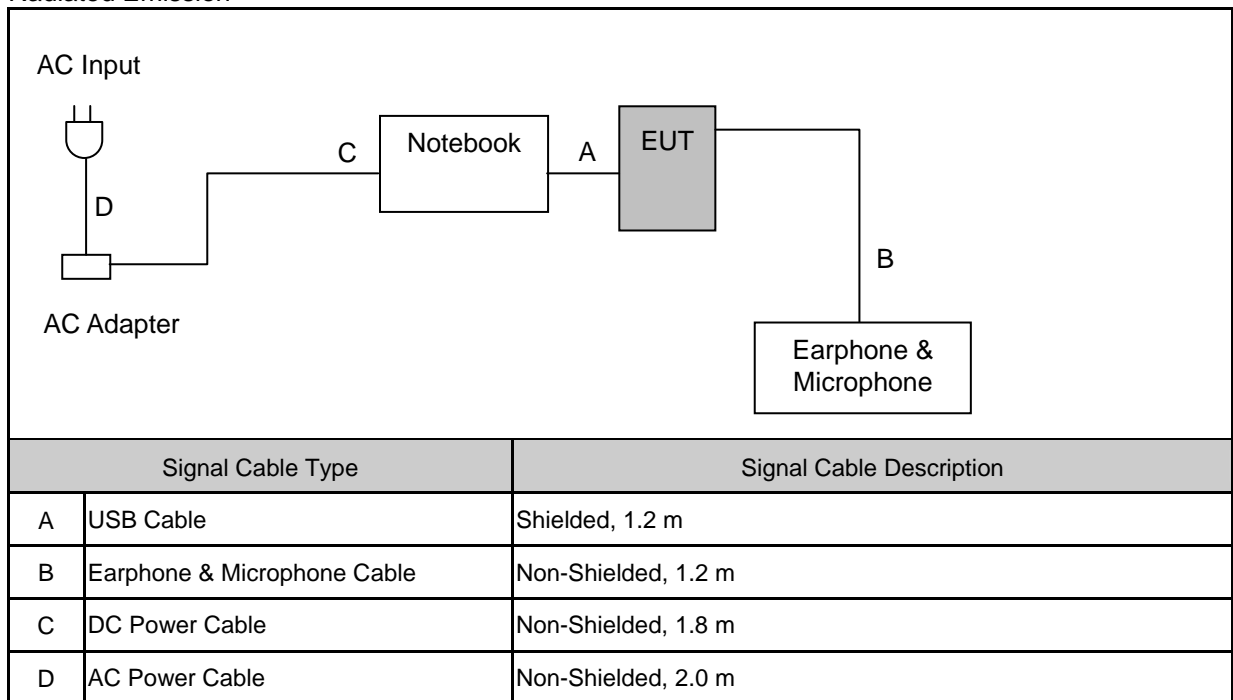

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

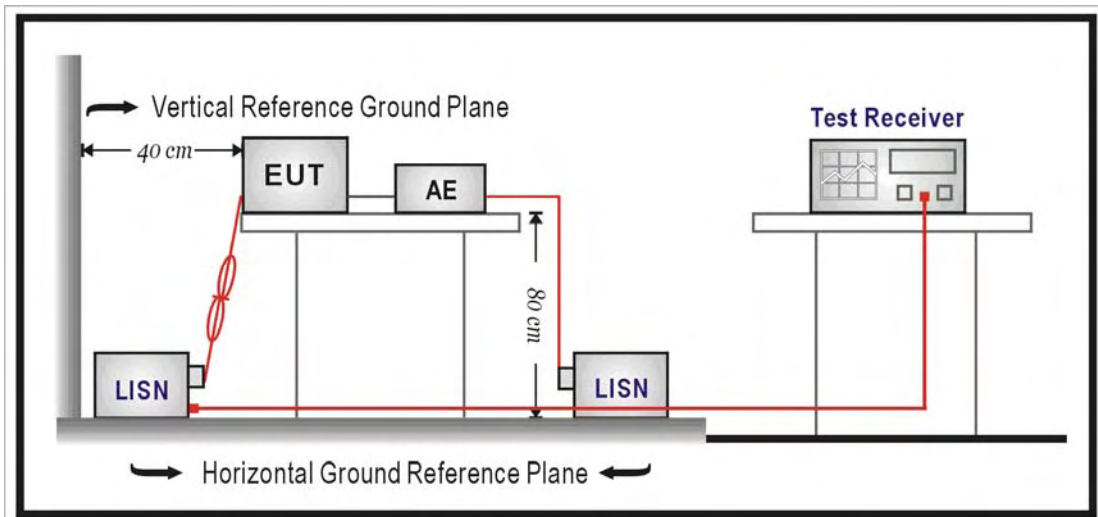

#### **4.4. Test Procedure**


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

**4.5. Test Result**

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	09/09/2011
		Test By:	Gary Wu
Description:			

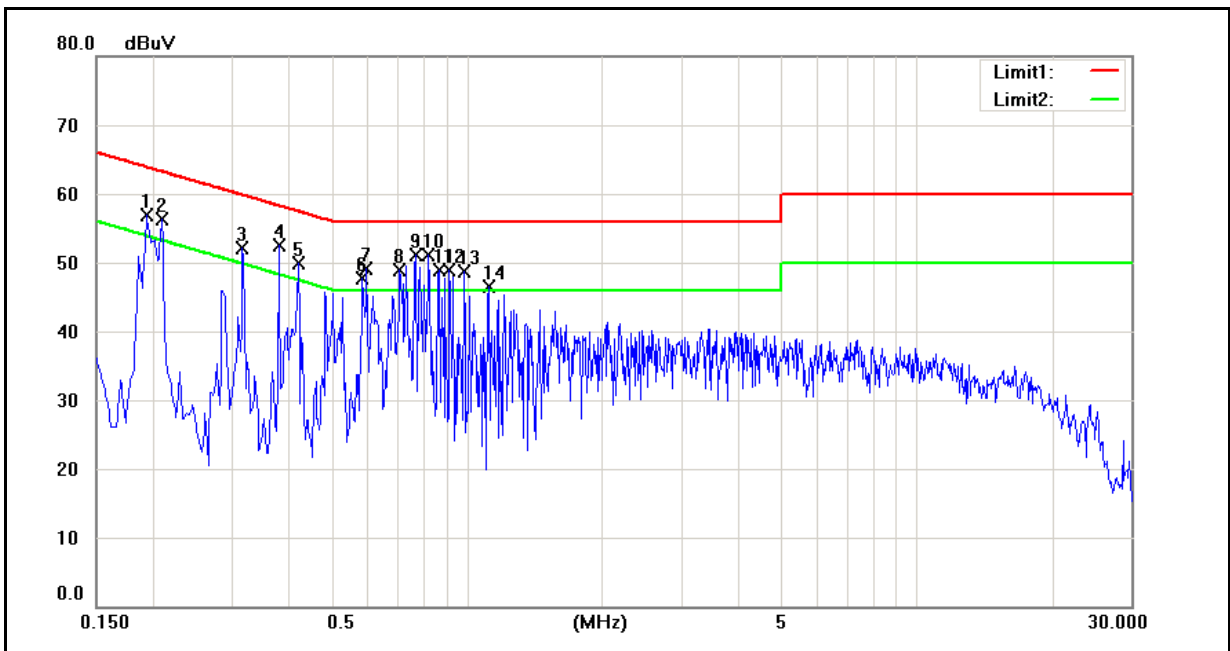


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1940	47.14	29.72	10.05	57.19	39.77	63.86	53.86	-6.67	-14.09	Pass
2	0.2100	45.94	26.29	10.05	55.99	36.34	63.21	53.21	-7.22	-16.87	Pass
3	0.3180	37.97	15.19	10.00	47.97	25.19	59.76	49.76	-11.79	-24.57	Pass
4	0.3820	36.65	19.70	9.98	46.63	29.68	58.24	48.24	-11.61	-18.56	Pass
5	0.4220	36.49	17.24	9.96	46.45	27.20	57.41	47.41	-10.96	-20.21	Pass
6	0.5860	36.98	21.02	9.89	46.87	30.91	56.00	46.00	-9.13	-15.09	Pass
7	0.5980	36.79	20.46	9.89	46.68	30.35	56.00	46.00	-9.32	-15.65	Pass
8	0.7100	36.09	24.53	9.85	45.94	34.38	56.00	46.00	-10.06	-11.62	Pass
9	0.7740	36.19	19.69	9.82	46.01	29.51	56.00	46.00	-9.99	-16.49	Pass
10	0.8260	36.05	19.28	9.80	45.85	29.08	56.00	46.00	-10.15	-16.92	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	09/09/2011
		Test By:	Gary Wu
Description:			


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
11	0.8700	34.51	15.81	9.78	44.29	25.59	56.00	46.00	-11.71	-20.41	Pass
12	0.9180	34.42	15.45	9.76	44.18	25.21	56.00	46.00	-11.82	-20.79	Pass
13	0.9860	34.01	15.64	9.74	43.75	25.38	56.00	46.00	-12.25	-20.62	Pass
14	1.1220	31.24	10.96	9.72	40.96	20.68	56.00	46.00	-15.04	-25.32	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	09/09/2011
		Test By:	Gary Wu
Description:			

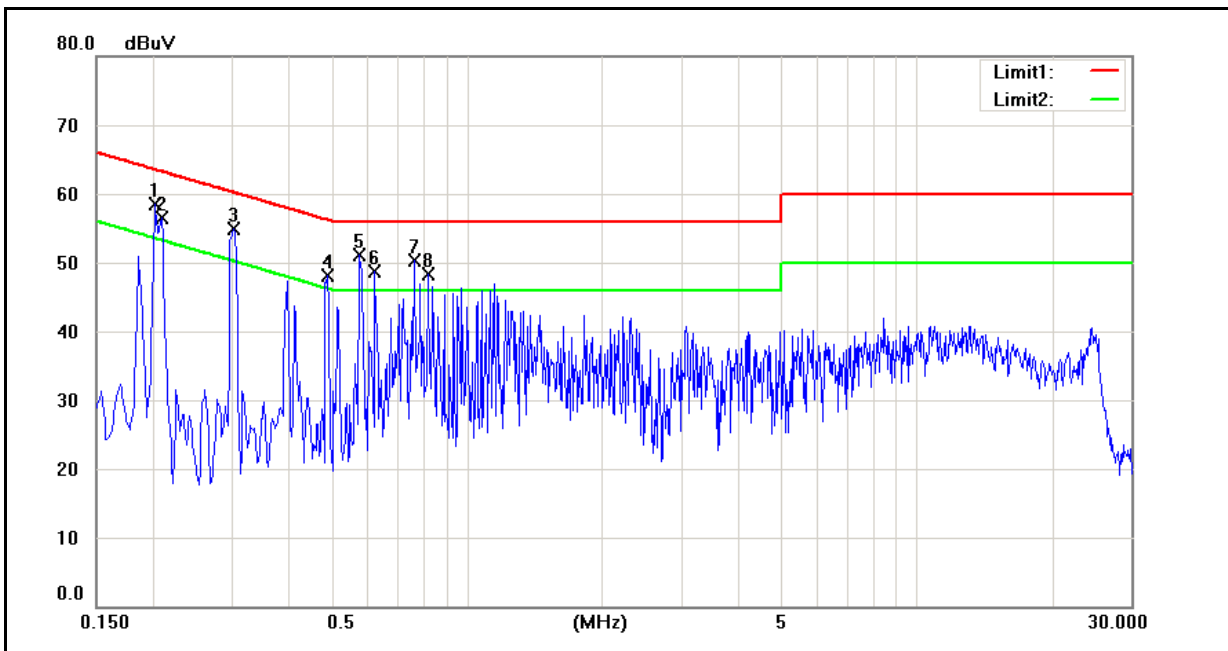


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2020	43.93	26.20	10.13	54.06	36.33	63.53	53.53	-9.47	-17.20	Pass
2	0.2100	43.02	21.77	10.13	53.15	31.90	63.21	53.21	-10.06	-21.31	Pass
3	0.3020	39.51	17.99	10.09	49.60	28.08	60.19	50.19	-10.59	-22.11	Pass
4	0.4900	34.95	16.91	10.01	44.96	26.92	56.17	46.17	-11.21	-19.25	Pass
5	0.5780	35.43	15.41	9.98	45.41	25.39	56.00	46.00	-10.59	-20.61	Pass
6	0.6260	36.91	17.92	9.96	46.87	27.88	56.00	46.00	-9.13	-18.12	Pass
7	0.7660	36.18	23.55	9.90	46.08	33.45	56.00	46.00	-9.92	-12.55	Pass
8	0.8180	36.04	17.84	9.88	45.92	27.72	56.00	46.00	-10.08	-18.28	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/09/2011
		Test By:	Gary Wu
Description:			

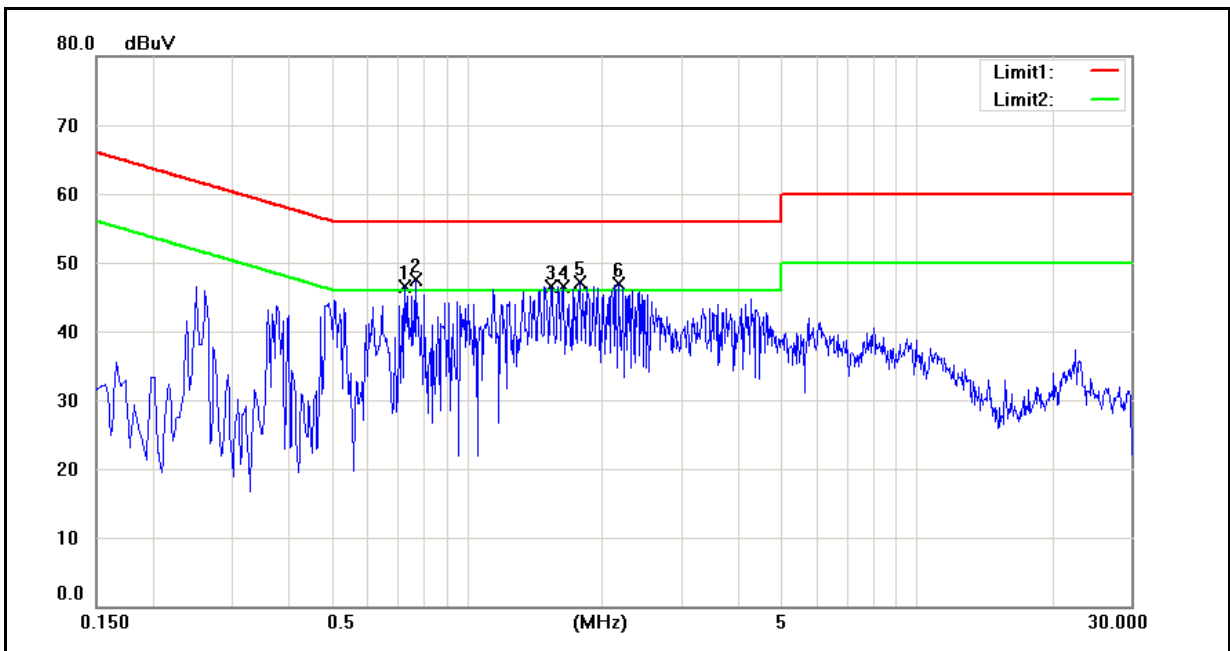

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.7300	31.49	17.79	9.84	41.33	27.63	56.00	46.00	-14.67	-18.37	Pass
2	0.7700	32.04	23.62	9.83	41.87	33.45	56.00	46.00	-14.13	-12.55	Pass
3	1.5380	29.26	16.61	9.69	38.95	26.30	56.00	46.00	-17.05	-19.70	Pass
4	1.6420	28.48	14.10	9.69	38.17	23.79	56.00	46.00	-17.83	-22.21	Pass
5	1.7820	30.13	13.54	9.68	39.81	23.22	56.00	46.00	-16.19	-22.78	Pass
6	2.1740	30.19	16.28	9.70	39.89	25.98	56.00	46.00	-16.11	-20.02	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/09/2011
		Test By:	Gary Wu
Description:			

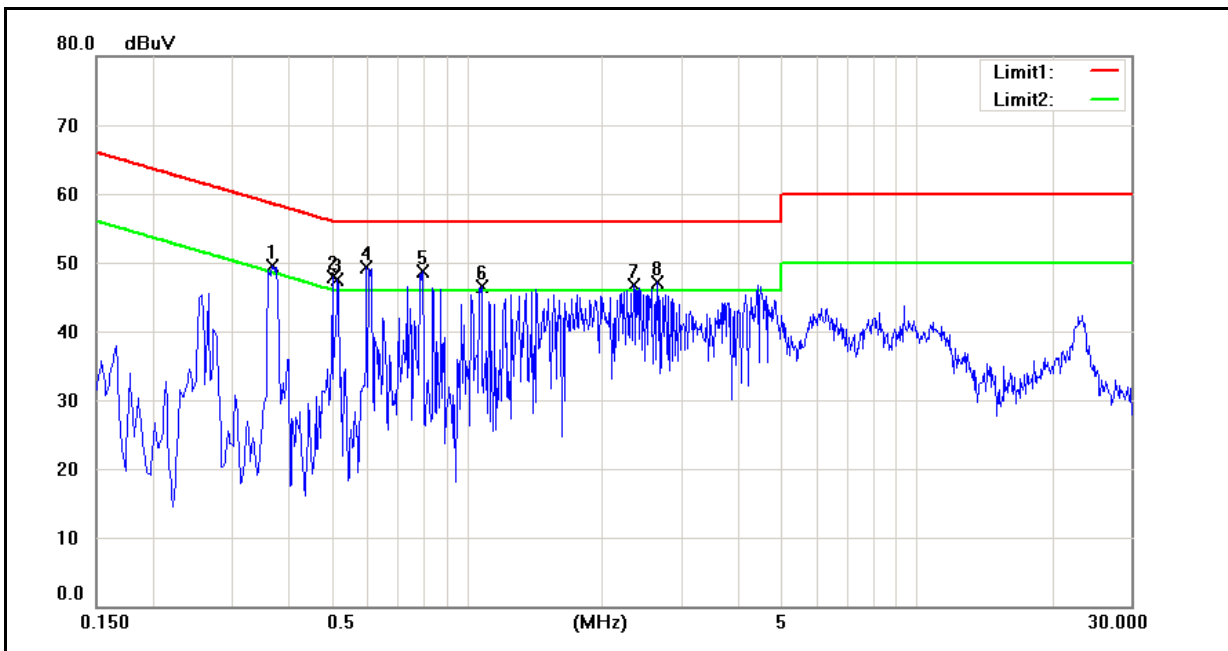

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.3700	34.75	16.36	10.06	44.81	26.42	58.50	48.50	-13.69	-22.08	Pass
2	0.5020	32.50	15.01	10.01	42.51	25.02	56.00	46.00	-13.49	-20.98	Pass
3	0.5180	33.10	13.88	10.00	43.10	23.88	56.00	46.00	-12.90	-22.12	Pass
4	0.5980	33.99	16.88	9.97	43.96	26.85	56.00	46.00	-12.04	-19.15	Pass
5	0.7980	31.97	20.67	9.88	41.85	30.55	56.00	46.00	-14.15	-15.45	Pass
6	1.0780	31.10	12.98	9.79	40.89	22.77	56.00	46.00	-15.11	-23.23	Pass
7	2.3500	29.68	11.08	9.78	39.46	20.86	56.00	46.00	-16.54	-25.14	Pass
8	2.6540	29.82	11.62	9.83	39.65	21.45	56.00	46.00	-16.35	-24.55	Pass



## 5 Radiated Interference Measurement

### 5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

### 5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/18/2011	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/18/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/23/2011	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/29/2011	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/29/2011	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/28/2011	(1)
Test Site	ATL	TE01	888001	12/24/2010	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

Below 1GHz

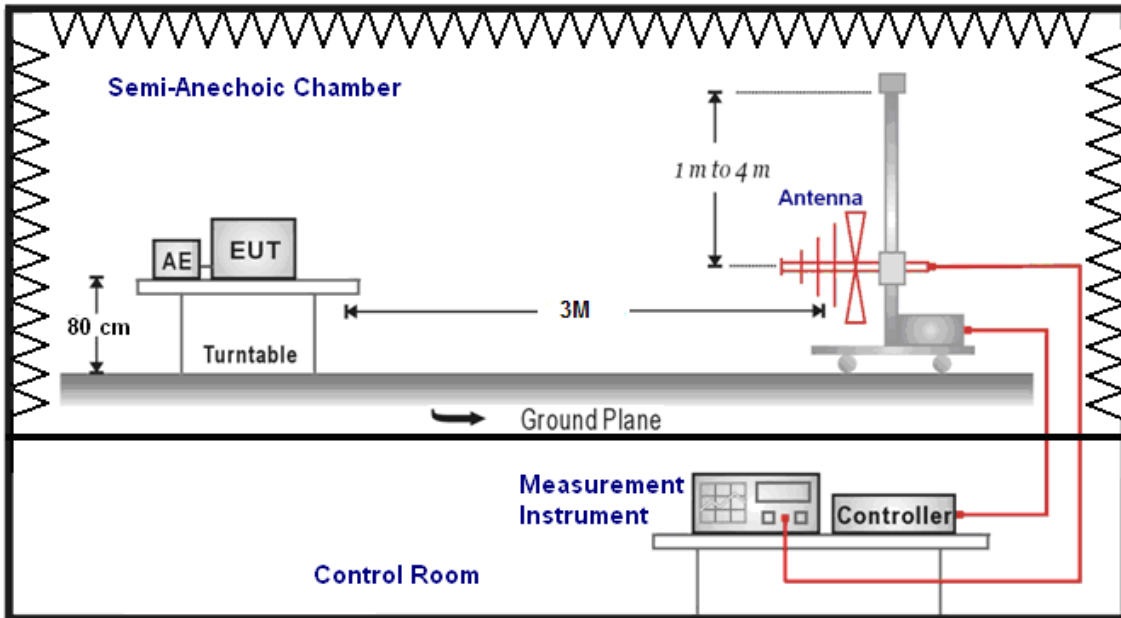

Above 1GHz

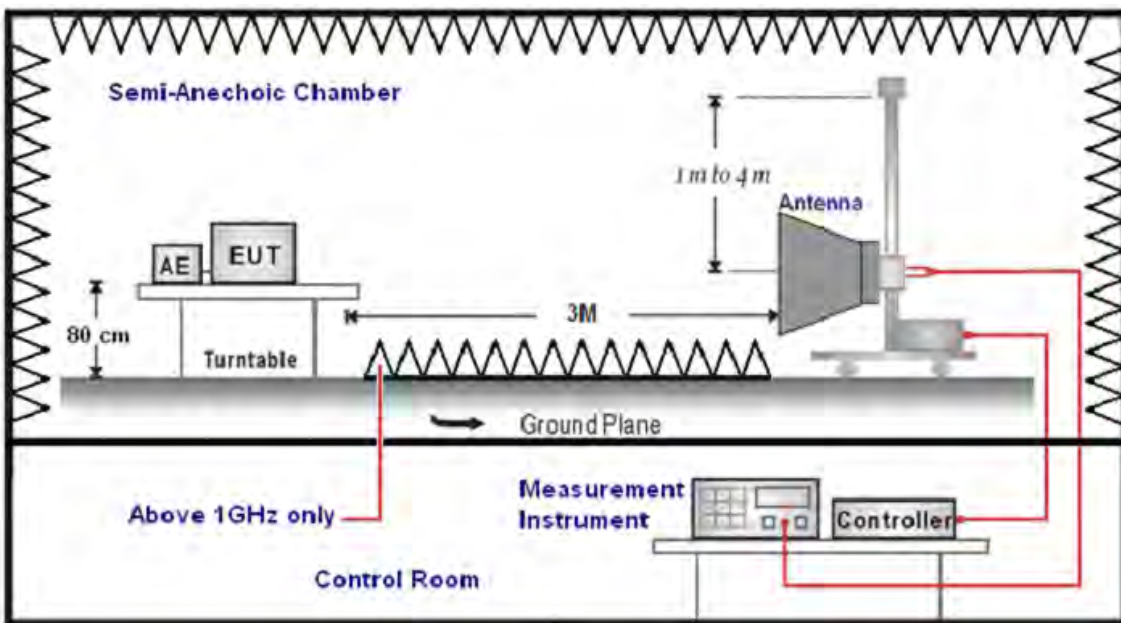

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 5.5. Test Result


### Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/15/2011
Ant.Polar.:	Horizontal	Test By:	Gary Wu

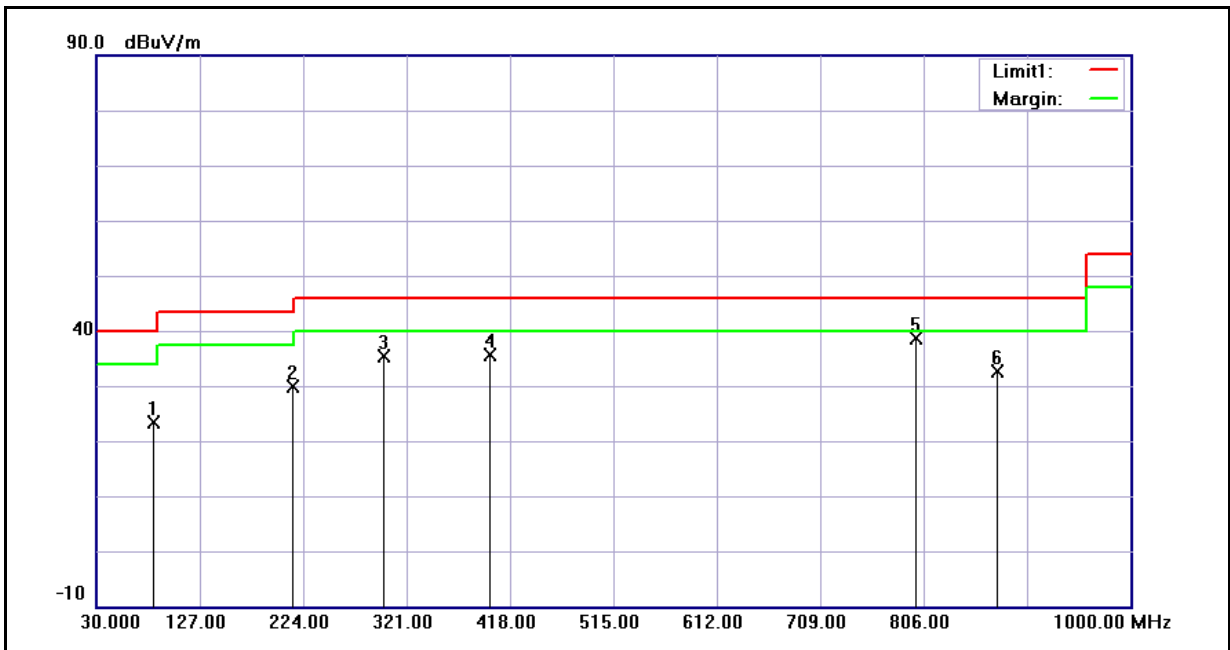

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	84.0000	41.00	-17.50	23.50	40.00	-16.50	QP
2	215.0000	43.57	-13.62	29.95	43.50	-13.55	QP
3	300.0000	46.00	-10.53	35.47	46.00	-10.53	QP
4	399.0000	44.05	-8.49	35.56	46.00	-10.44	QP
5	799.5000	39.96	-1.35	38.61	46.00	-7.39	QP
6	875.0000	33.03	-0.45	32.58	46.00	-13.42	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/15/2011
Ant.Polar.:	Vertical	Test By:	Gary Wu

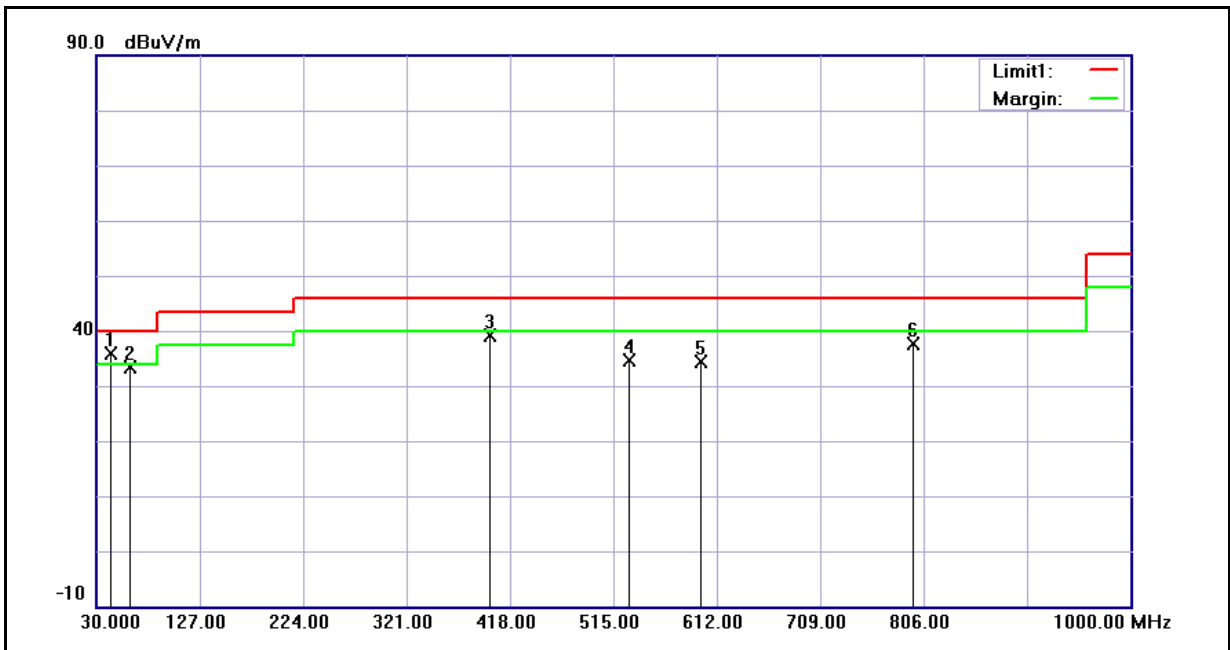

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	44.0000	47.51	-11.62	35.89	40.00	-4.11	QP
2	61.5000	46.36	-13.05	33.31	40.00	-6.69	QP
3	399.5000	47.53	-8.50	39.03	46.00	-6.97	QP
4	530.0000	41.04	-6.43	34.61	46.00	-11.39	QP
5	597.5000	39.36	-4.91	34.45	46.00	-11.55	QP
6	796.5000	39.06	-1.41	37.65	46.00	-8.35	QP

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	09/15/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	52.95	-5.58	47.37	74.00	-26.63	peak	H
2092.000	46.78	-1.38	45.40	74.00	-28.60	peak	H
7236.000	38.38	15.43	53.81	74.00	-20.19	peak	H
7236.000	33.25	15.43	48.68	54.00	-5.32	AVG	H
2092.000	52.61	-1.38	51.23	74.00	-22.77	peak	V
4824.000	40.33	7.95	48.28	74.00	-25.72	peak	V
7236.000	41.23	15.43	56.66	74.00	-17.34	peak	V
7236.000	35.83	15.43	51.26	54.00	-2.74	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	09/15/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	55.27	-5.58	49.69	74.00	-24.31	peak	H
2092.000	47.39	-1.38	46.01	74.00	-27.99	peak	H
7311.000	39.99	15.65	55.64	74.00	-18.36	peak	H
7311.000	33.23	15.65	48.88	54.00	-5.12	AVG	H
2099.000	52.61	-1.35	51.26	74.00	-22.74	peak	V
4874.000	40.38	8.11	48.49	74.00	-25.51	peak	V
7311.000	40.27	15.65	55.92	74.00	-18.08	peak	V
7311.000	34.85	15.65	50.50	54.00	-3.50	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	09/15/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	54.30	-5.58	48.72	74.00	-25.28	peak	H
2092.000	47.32	-1.38	45.94	74.00	-28.06	peak	H
7386.000	39.18	15.88	55.06	74.00	-18.94	peak	H
7386.000	32.50	15.88	48.38	54.00	-5.62	AVG	H
1602.000	53.94	-3.36	50.58	74.00	-23.42	peak	V
4924.000	43.03	8.26	51.29	74.00	-22.71	peak	V
7386.000	37.65	15.88	53.53	74.00	-20.47	peak	V
7386.000	33.06	15.88	48.94	54.00	-5.06	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	09/15/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	54.63	-5.58	49.05	74.00	-24.95	peak	H
2092.000	47.11	-1.38	45.73	74.00	-28.27	peak	H
5277.000	38.40	9.32	47.72	74.00	-26.28	peak	H
2092.000	53.27	-1.38	51.89	74.00	-22.11	peak	V
5151.000	37.23	8.95	46.18	74.00	-27.82	peak	V
6761.000	36.99	13.93	50.92	74.00	-23.08	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	09/15/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	54.22	-5.58	48.64	74.00	-25.36	peak	H
2092.000	47.23	-1.38	45.85	74.00	-28.15	peak	H
4682.000	37.95	7.52	45.47	74.00	-28.53	peak	H
1595.000	54.73	-3.39	51.34	74.00	-22.66	peak	V
4626.000	37.64	7.34	44.98	74.00	-29.02	peak	V
6425.000	37.56	12.76	50.32	74.00	-23.68	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	09/15/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2092.000	48.30	-1.38	46.92	74.00	-27.08	peak	H
4234.000	37.89	6.08	43.97	74.00	-30.03	peak	H
5837.000	36.40	10.58	46.98	74.00	-27.02	peak	H
2092.000	51.81	-1.38	50.43	74.00	-23.57	peak	V
5004.000	37.03	8.51	45.54	74.00	-28.46	peak	V
6362.000	36.00	12.48	48.48	74.00	-25.52	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/15/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	54.40	-5.58	48.82	74.00	-25.18	peak	H
2092.000	47.41	-1.38	46.03	74.00	-27.97	peak	H
6901.000	36.52	14.38	50.90	74.00	-23.10	peak	H
1595.000	53.19	-3.39	49.80	74.00	-24.20	peak	V
3590.000	41.33	3.68	45.01	74.00	-28.99	peak	V
6747.000	36.87	13.89	50.76	74.00	-23.24	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/15/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2092.000	47.99	-1.38	46.61	74.00	-27.39	peak	H
4857.000	37.68	8.06	45.74	74.00	-28.26	peak	H
6628.000	36.77	13.50	50.27	74.00	-23.73	peak	H
1595.000	53.49	-3.39	50.10	74.00	-23.90	peak	V
4871.000	36.96	8.10	45.06	74.00	-28.94	peak	V
6649.000	36.36	13.57	49.93	74.00	-24.07	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/15/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	55.32	-5.58	49.74	74.00	-24.26	peak	H
2092.000	47.64	-1.38	46.26	74.00	-27.74	peak	H
6789.000	37.22	14.03	51.25	74.00	-22.75	peak	H
1595.000	53.76	-3.39	50.37	74.00	-23.63	peak	V
4696.000	37.59	7.55	45.14	74.00	-28.86	peak	V
6369.000	36.10	12.50	48.60	74.00	-25.40	peak	V


Standard:	FCC Part 15C			Test Distance:	3m			
Test item:	Radiated Emission			Power:	AC 120V/60Hz			
Model Number:	PJ03120			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 6			Date:	09/15/2011			
Modulation:	IEEE 802.11b			Test By:	Gary Wu			
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1196.000	55.82	-5.58	50.24	74.00	54.00	-23.76	peak	H
2092.000	47.26	-1.38	45.88	74.00	54.00	-28.12	peak	H
6726.000	36.54	13.82	50.36	74.00	54.00	-23.64	peak	H
1196.000	55.20	-5.58	49.62	74.00	54.00	-24.38	peak	V
1595.000	52.17	-3.39	48.78	74.00	54.00	-25.22	peak	V
3597.000	40.63	3.70	44.33	74.00	54.00	-29.67	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

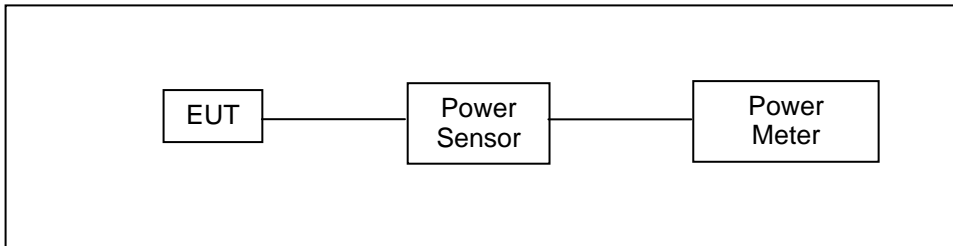

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to  $(\text{GAIN} - 6)/3$  dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Model Number	PJ03120					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11b Link Mode					
Date of Test	09/14/2011			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1	18.85	0.077	21.69	0.148	< 30
2437		18.90	0.078	21.69	0.148	< 30
2462		19.05	0.080	21.94	0.156	< 30
2412	11	18.73	0.075	21.83	0.152	< 30
2437		18.80	0.076	21.96	0.157	< 30
2462		18.85	0.077	<b>22.07</b>	<b>0.161</b>	< 30

Model Number	PJ03120					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11g Link Mode					
Date of Test	09/14/2011			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6	12.56	0.018	23.84	0.242	< 30
2437		12.74	0.019	23.89	0.245	< 30
2462		12.87	0.019	<b>24.40</b>	<b>0.275</b>	< 30
2412	54	11.30	0.013	23.24	0.211	< 30
2437		11.32	0.014	23.46	0.222	< 30
2462		11.50	0.014	23.69	0.234	< 30


Model Number	PJ03120					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode					
Date of Test	09/14/2011			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	MCS0	12.44	0.018	23.58	0.228	< 30
2437		12.70	0.019	<b>24.10</b>	<b>0.257</b>	< 30
2462		12.65	0.018	23.82	0.241	< 30
2412	MCS7	11.12	0.013	23.27	0.212	< 30
2437		11.16	0.013	23.41	0.219	< 30
2462		11.24	0.013	23.72	0.236	< 30

## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

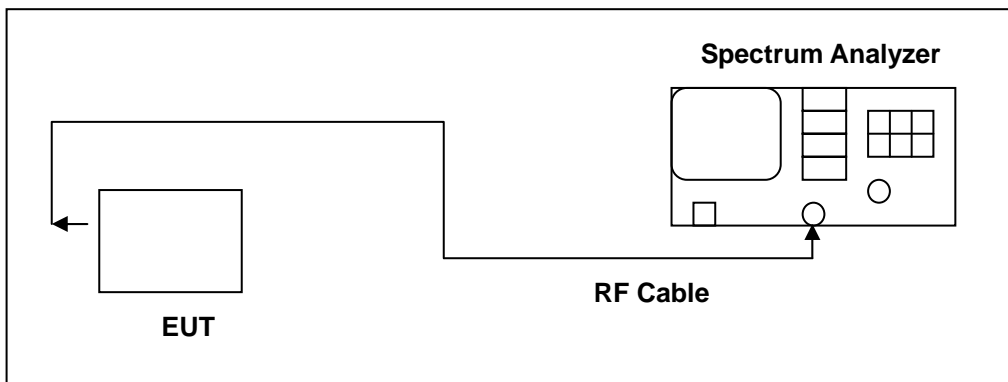

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)


**7.5. Test Result**

Model Number	PJ03120		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	8375	> 500
	2437	7875	> 500
	2462	7000	> 500

Model Number	PJ03120		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	09/14/2011	Test Site	TE06
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	14375	> 500
	2437	14125	> 500
	2462	15875	> 500

Model Number	PJ03120		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	15375	> 500
	2437	14000	> 500
	2462	17125	> 500

7.6. Test Graphs

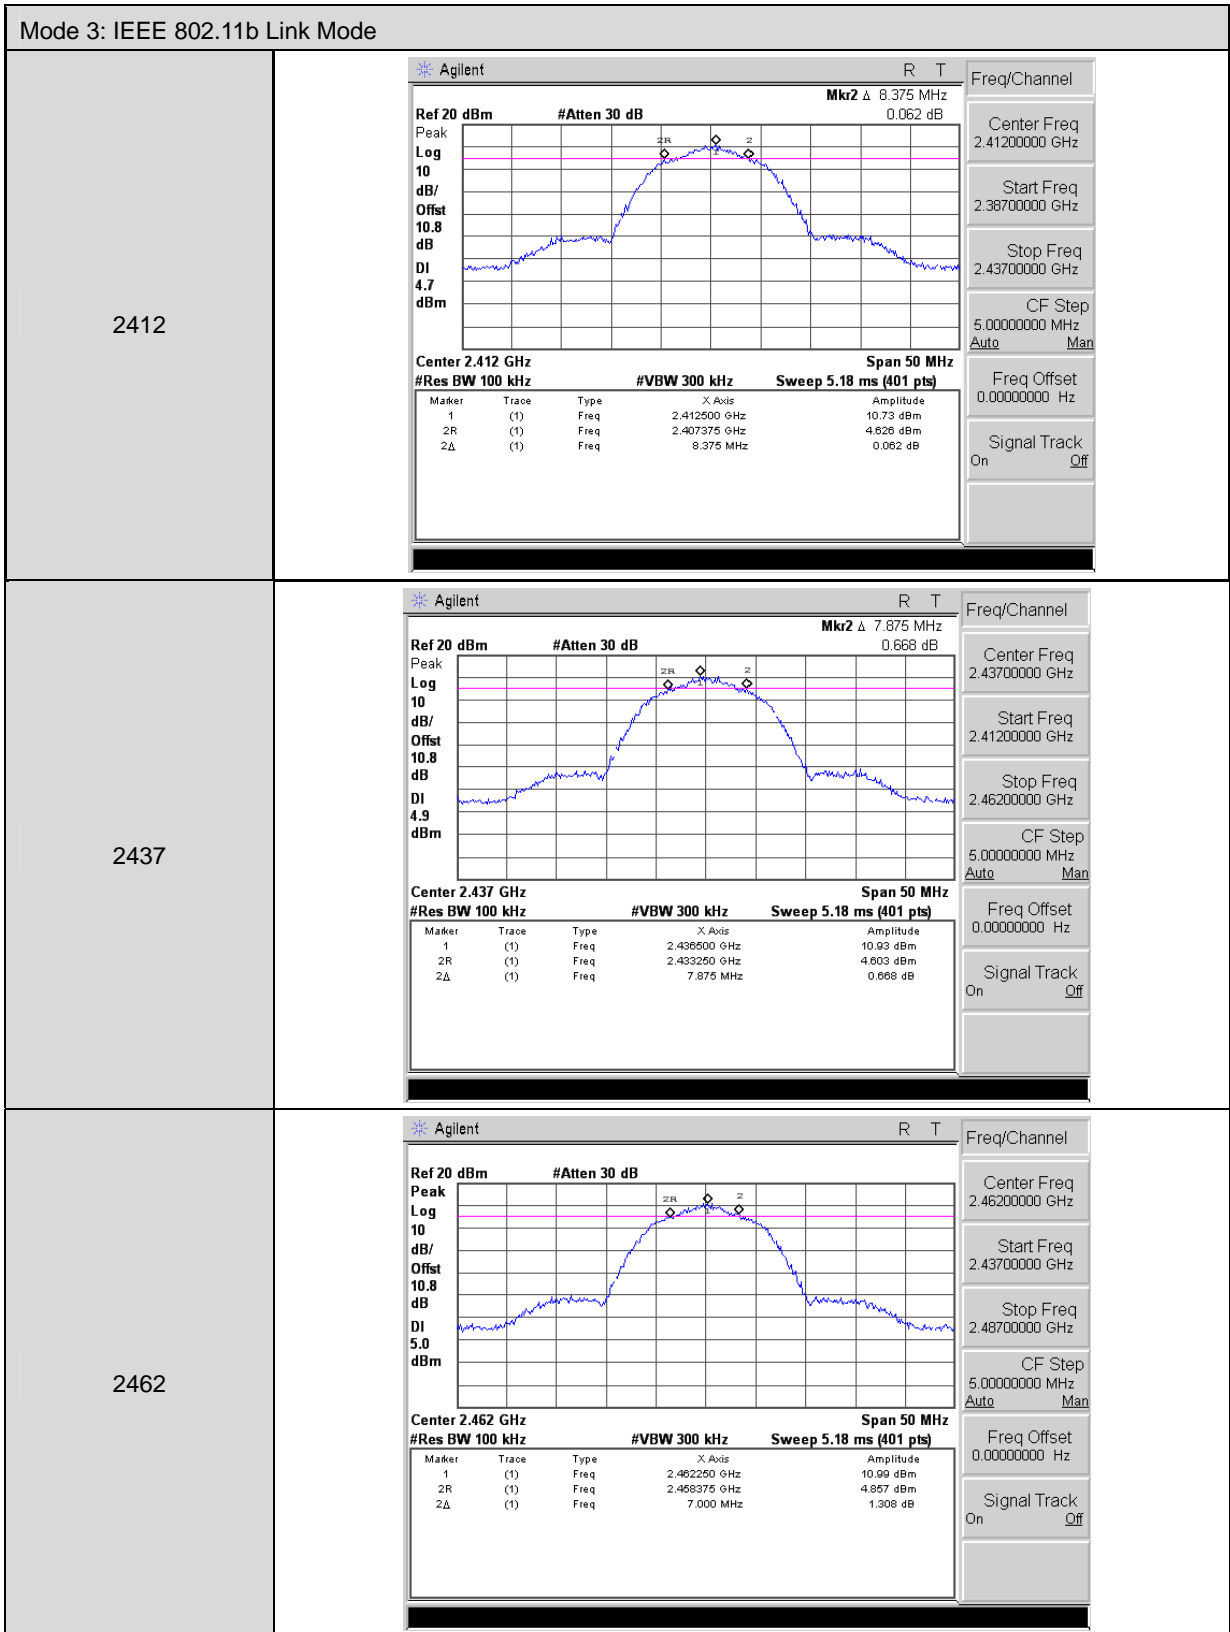



Mode 4: IEEE 802.11g Link Mode

<p>2412</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 14.375 MHz -0.574 dB</p> <p>Peak 10 dB/Offst 10.8 dB DI -4.2 dBm</p> <p>Center 2.412 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.413250 GHz</td> <td>1.77 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.405375 GHz</td> <td>-4.885 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>14.375 MHz</td> <td>-0.574 dB</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.413250 GHz	1.77 dBm	2R	(1)	Freq	2.405375 GHz	-4.885 dBm	2Δ	(1)	Freq	14.375 MHz	-0.574 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.413250 GHz	1.77 dBm																	
2R	(1)	Freq	2.405375 GHz	-4.885 dBm																	
2Δ	(1)	Freq	14.375 MHz	-0.574 dB																	
<p>2437</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 14.125 MHz 0.514 dB</p> <p>Peak 10 dB/Offst 10.8 dB DI -4.5 dBm</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.435750 GHz</td> <td>1.487 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.430125 GHz</td> <td>-4.565 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>14.125 MHz</td> <td>0.514 dB</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.435750 GHz	1.487 dBm	2R	(1)	Freq	2.430125 GHz	-4.565 dBm	2Δ	(1)	Freq	14.125 MHz	0.514 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.435750 GHz	1.487 dBm																	
2R	(1)	Freq	2.430125 GHz	-4.565 dBm																	
2Δ	(1)	Freq	14.125 MHz	0.514 dB																	
<p>2462</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 15.875 MHz 0.129 dB</p> <p>Peak 10 dB/Offst 10.8 dB DI -5.6 dBm</p> <p>Center 2.462 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.467000 GHz</td> <td>0.373 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.454125 GHz</td> <td>-6.175 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>15.875 MHz</td> <td>0.129 dB</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.467000 GHz	0.373 dBm	2R	(1)	Freq	2.454125 GHz	-6.175 dBm	2Δ	(1)	Freq	15.875 MHz	0.129 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.467000 GHz	0.373 dBm																	
2R	(1)	Freq	2.454125 GHz	-6.175 dBm																	
2Δ	(1)	Freq	15.875 MHz	0.129 dB																	

Mode 5: draft 802.11n Standard-20MHz Link Mode


2412	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 15.375 MHz 0.281 dB</p> <p>Center 2.412 GHz Span 50 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.410750 GHz</td> <td>1.281 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.405125 GHz</td> <td>-5.125 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>15.375 MHz</td> <td>0.281 dB</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.410750 GHz	1.281 dBm	2R	(1)	Freq	2.405125 GHz	-5.125 dBm	2Δ	(1)	Freq	15.375 MHz	0.281 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.410750 GHz	1.281 dBm																	
2R	(1)	Freq	2.405125 GHz	-5.125 dBm																	
2Δ	(1)	Freq	15.375 MHz	0.281 dB																	
2437	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 14.000 MHz -0.368 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.438250 GHz</td> <td>1.958 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.430500 GHz</td> <td>-3.716 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>14.000 MHz</td> <td>-0.368 dB</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.438250 GHz	1.958 dBm	2R	(1)	Freq	2.430500 GHz	-3.716 dBm	2Δ	(1)	Freq	14.000 MHz	-0.368 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.438250 GHz	1.958 dBm																	
2R	(1)	Freq	2.430500 GHz	-3.716 dBm																	
2Δ	(1)	Freq	14.000 MHz	-0.368 dB																	
2462	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm #Atten 30 dB Mkr2 Δ 17.125 MHz -0.404 dB</p> <p>Center 2.462 GHz Span 50 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.464500 GHz</td> <td>1.121 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.453500 GHz</td> <td>-5.08 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>17.125 MHz</td> <td>-0.404 dB</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.464500 GHz	1.121 dBm	2R	(1)	Freq	2.453500 GHz	-5.08 dBm	2Δ	(1)	Freq	17.125 MHz	-0.404 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.464500 GHz	1.121 dBm																	
2R	(1)	Freq	2.453500 GHz	-5.08 dBm																	
2Δ	(1)	Freq	17.125 MHz	-0.404 dB																	

## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

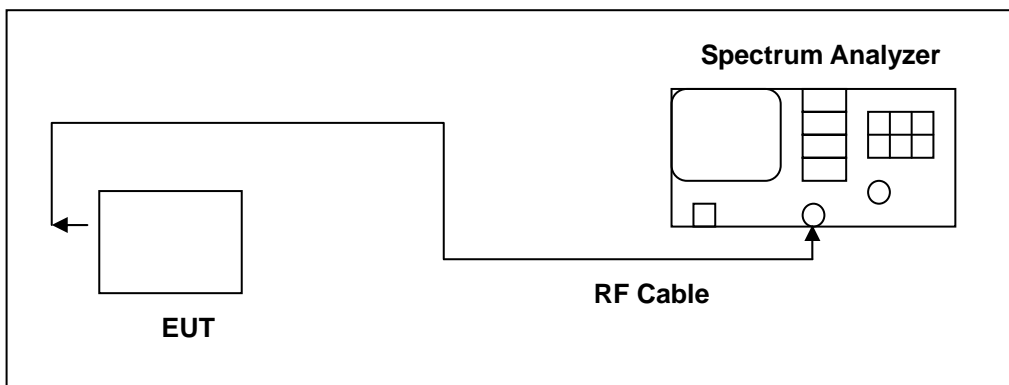

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

**8.5. Test Result**

Model Number	PJ03120		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-4.281	< 8
	2437	-3.158	< 8
	2462	-2.742	< 8

Model Number	PJ03120		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-11.12	< 8
	2437	-10.82	< 8
	2462	-11.56	< 8

Model Number	PJ03120		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-11.39	< 8
	2437	-11.38	< 8
	2462	-10.94	< 8

**8.6. Test Graphs**

Mode 3: IEEE 802.11b Link Mode	
2412	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.41341900 GHz 4.281 dBm</p> <p>Peak Log 10 dB/ Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.413 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.41341825 GHz Start Freq 2.41326825 GHz Stop Freq 2.41356825 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.43634475 GHz 3.158 dBm</p> <p>Peak Log 10 dB/ Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.436 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.43634475 GHz Start Freq 2.43619475 GHz Stop Freq 2.43649475 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.46168625 GHz 2.742 dBm</p> <p>Peak Log 10 dB/ Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.46155575 GHz Start Freq 2.46140575 GHz Stop Freq 2.46170575 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

Mode 4: IEEE 802.11g Link Mode

2412	<p>Agilent R T</p> <p>Mkr1 2.41259750 GHz -11.12 dBm</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>Peak Log 10 dB/Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.413 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.41261475 GHz Start Freq 2.41246475 GHz Stop Freq 2.41276475 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Mkr1 2.43759750 GHz -10.82 dBm</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>Peak Log 10 dB/Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.438 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.43759750 GHz Start Freq 2.43744750 GHz Stop Freq 2.43774750 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Mkr1 2.46167425 GHz -11.56 dBm</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>Peak Log 10 dB/Offst 10.8 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel Center Freq 2.46169600 GHz Start Freq 2.46154600 GHz Stop Freq 2.46184600 GHz CF Step 30.0000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode


<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

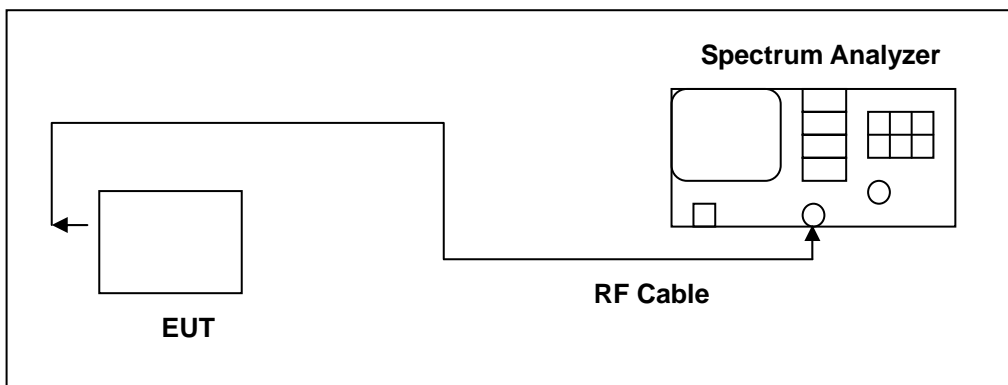

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.




All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)






**9.5. Test Graphs**

Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	

Mode 4: IEEE 802.11g Link Mode
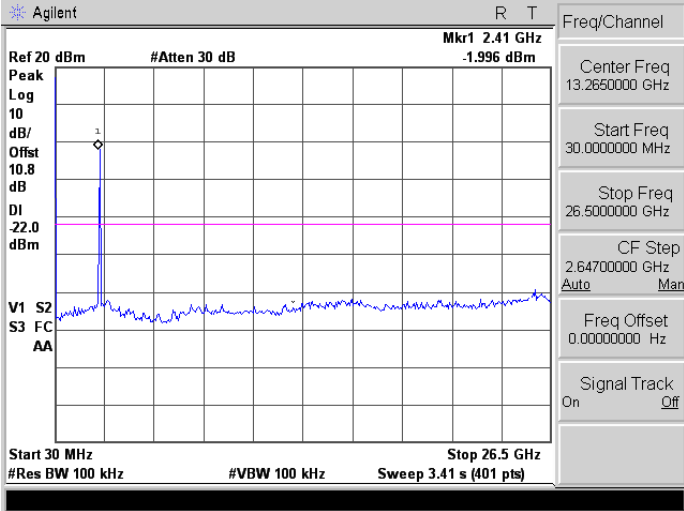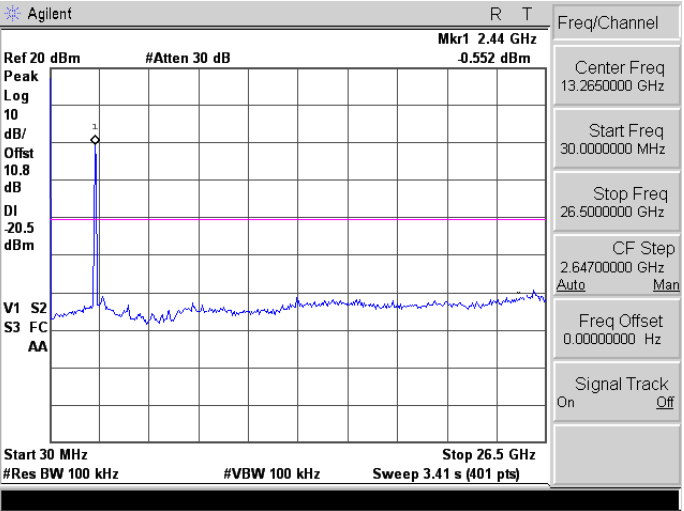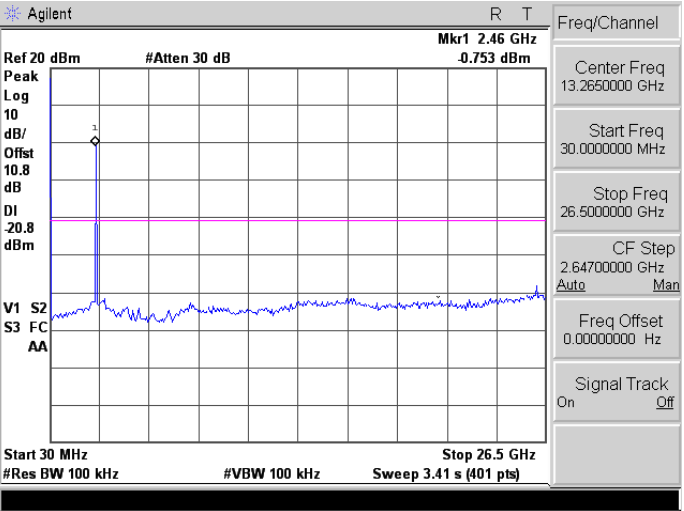
<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 5: draft 802.11n Standard-20MHz Link Mode

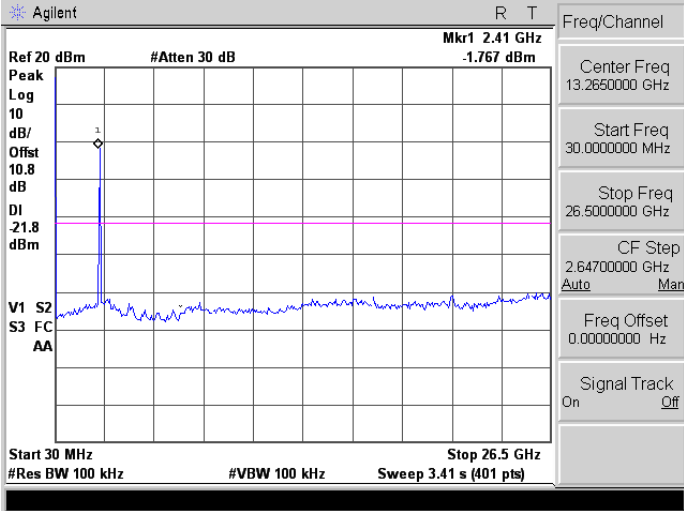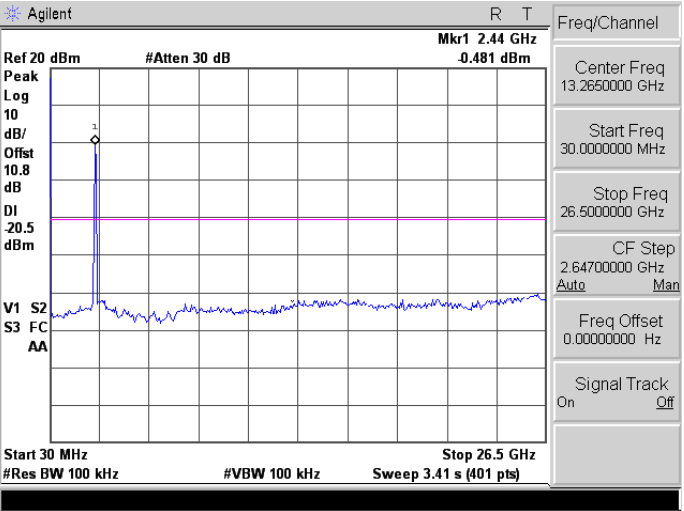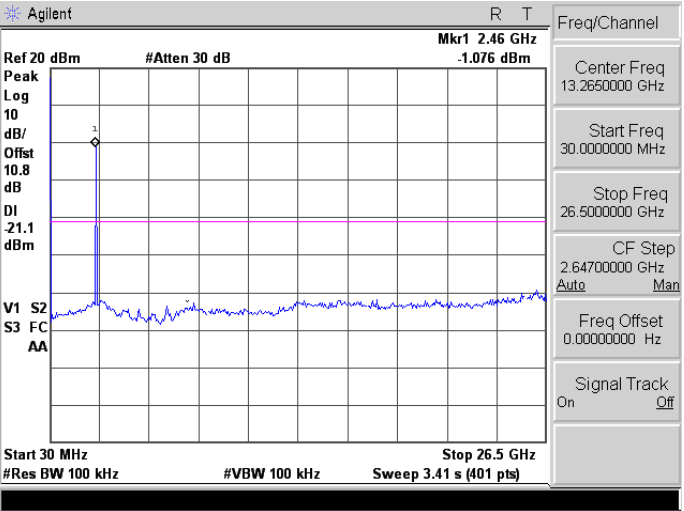
<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

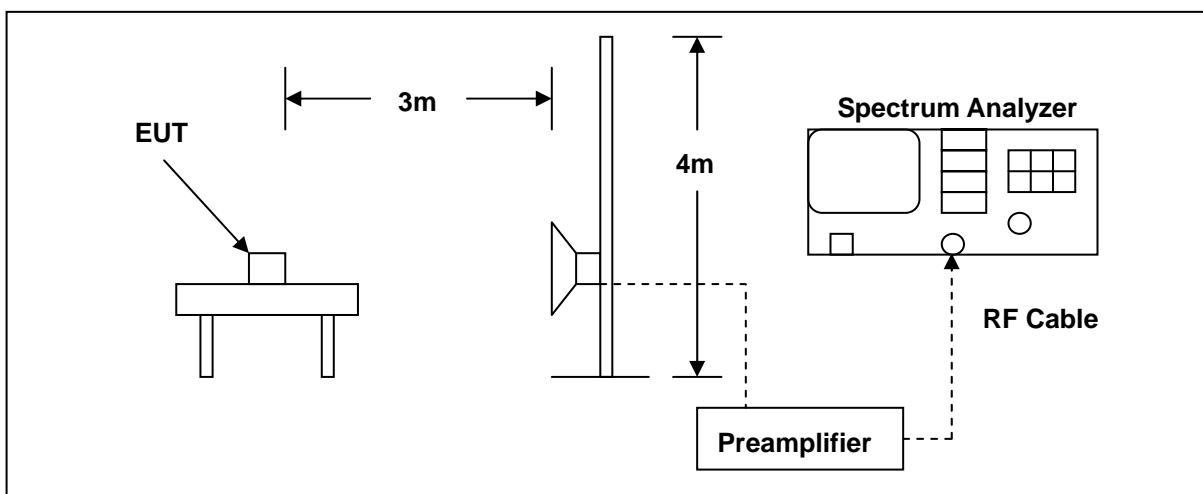

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/24/2010	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### **10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


**10.5.Test Result**

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

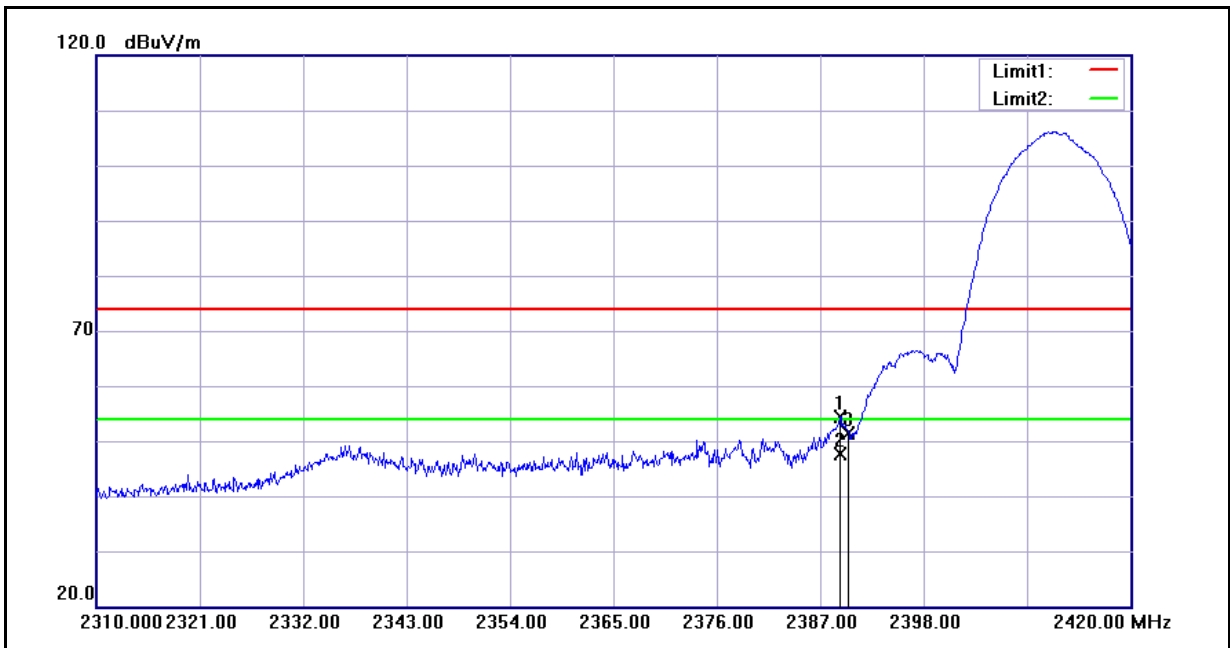


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	54.39	-0.06	54.33	74.00	-19.67	peak
2	2389.090	47.78	-0.06	47.72	54.00	-6.28	AVG
3	2390.000	51.35	-0.06	51.29	74.00	-22.71	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

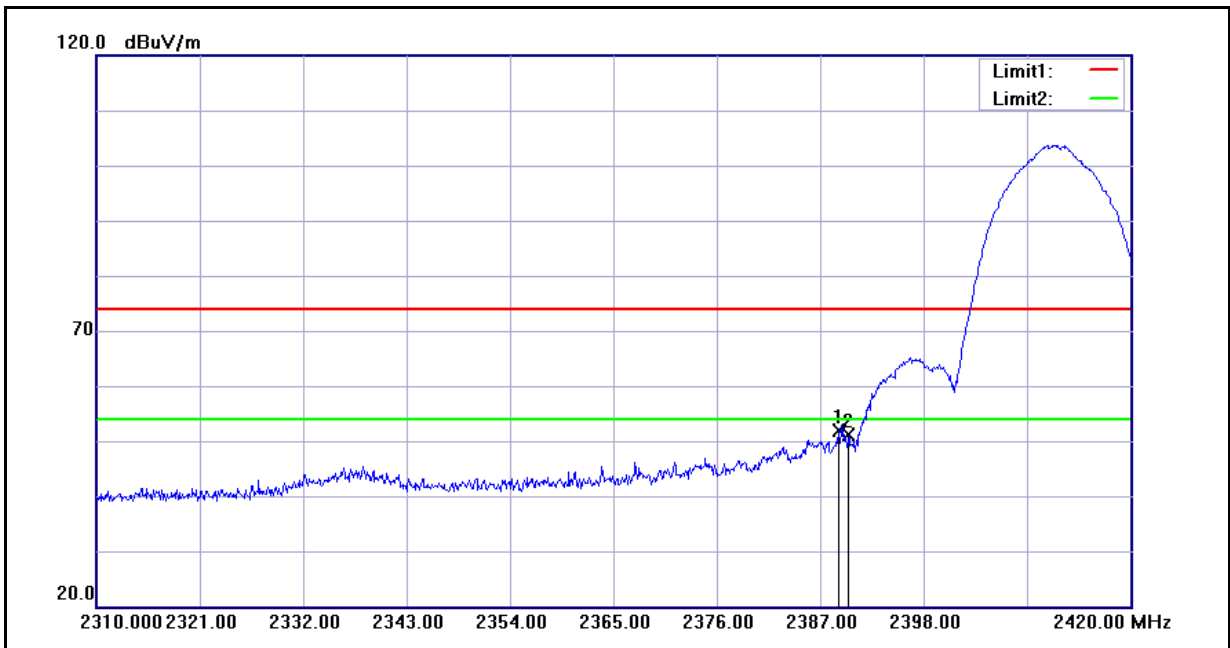

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.980	51.84	-0.06	51.78	74.00	-22.22	peak
2	2390.000	51.17	-0.06	51.11	74.00	-22.89	peak


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

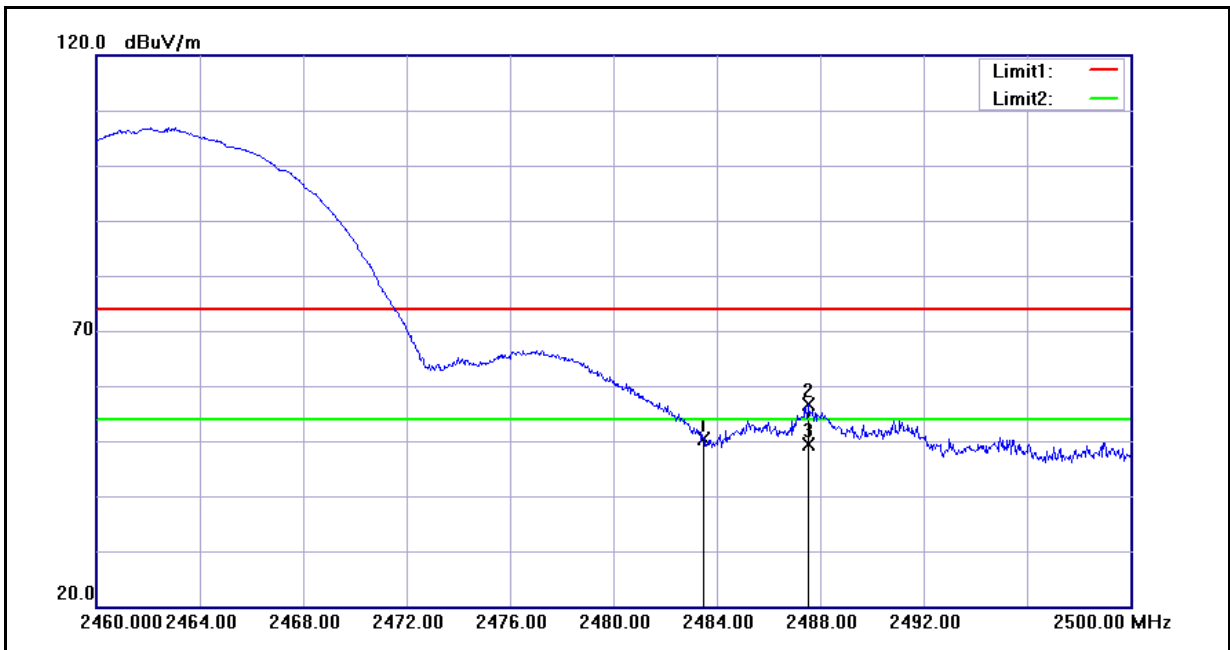

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.97	0.35	50.32	74.00	-23.68	peak
2	2487.560	56.26	0.37	56.63	74.00	-17.37	peak
3	2487.560	49.11	0.37	49.48	54.00	-4.52	AVG




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

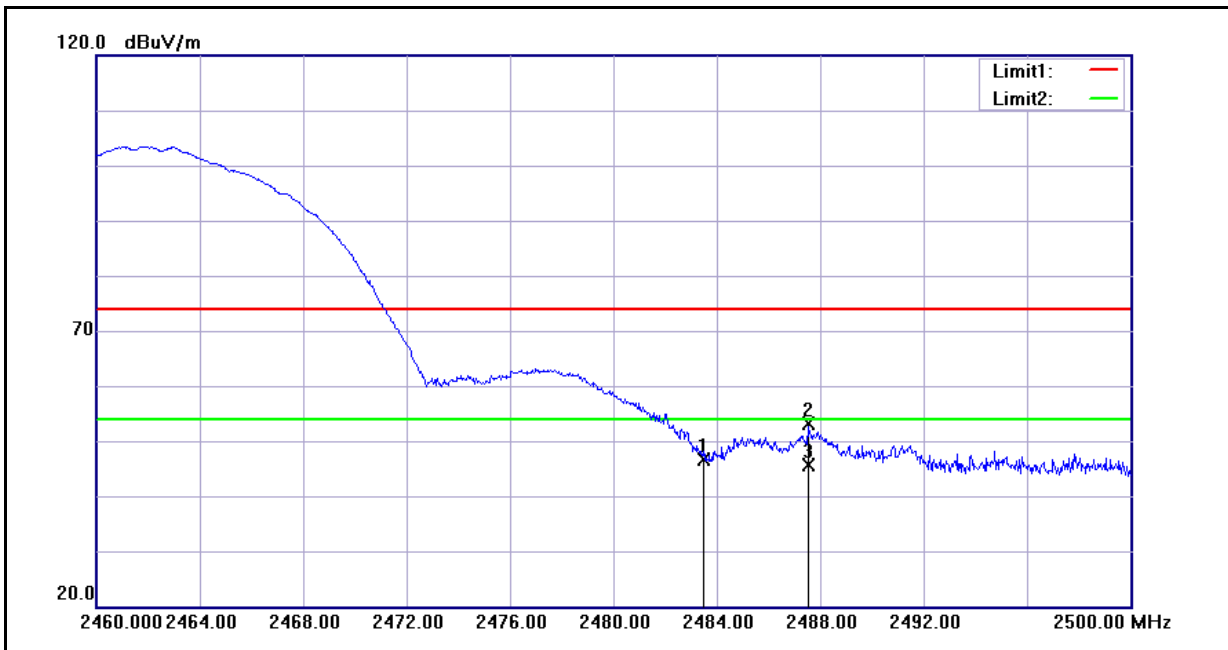


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.35	0.35	46.70	74.00	-27.30	peak
2	2487.520	52.80	0.37	53.17	74.00	-20.83	peak
3	2487.520	45.16	0.37	45.53	54.00	-8.47	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

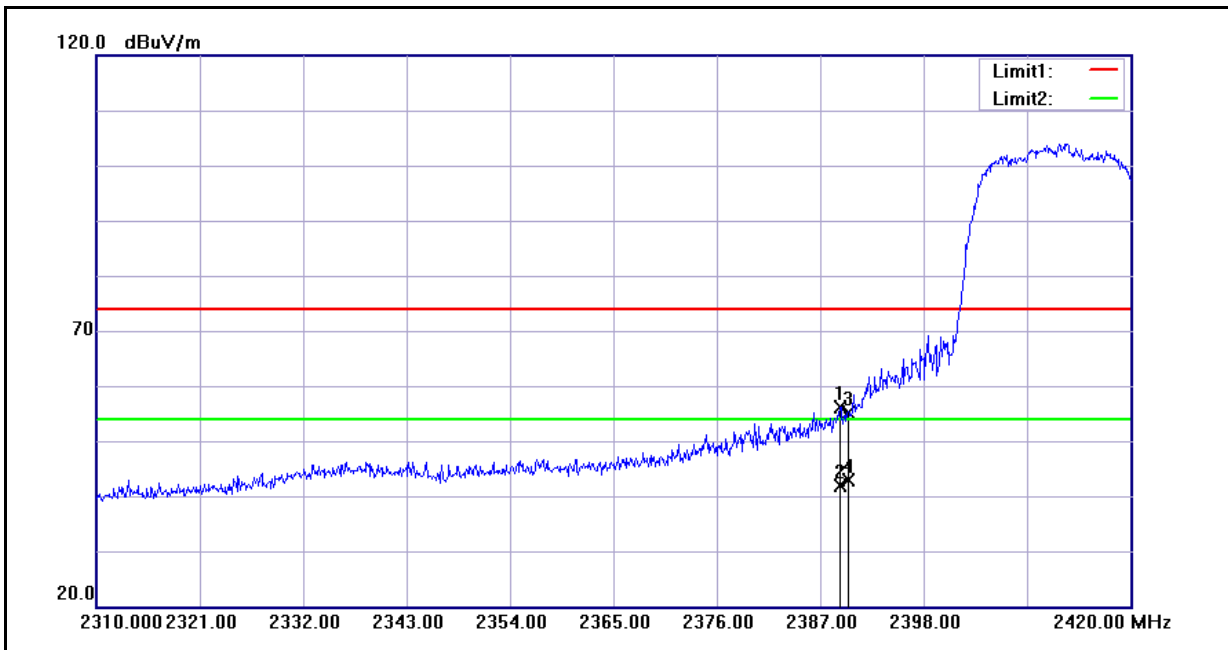


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	56.28	-0.06	56.22	74.00	-17.78	peak
2	2389.090	41.98	-0.06	41.92	54.00	-12.08	AVG
3	2390.000	55.23	-0.06	55.17	74.00	-18.83	peak
4	2390.000	42.87	-0.06	42.81	54.00	-11.19	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

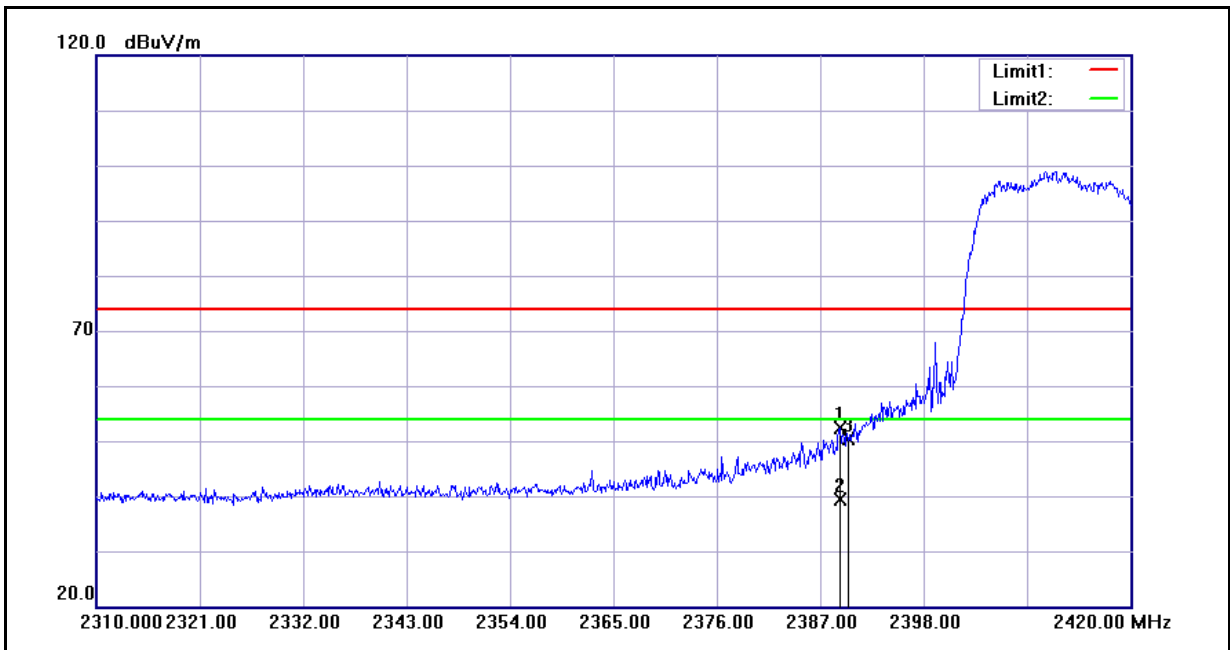


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	52.35	-0.06	52.29	74.00	-21.71	peak
2	2389.090	39.55	-0.06	39.49	54.00	-14.51	AVG
3	2390.000	50.55	-0.06	50.49	74.00	-23.51	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

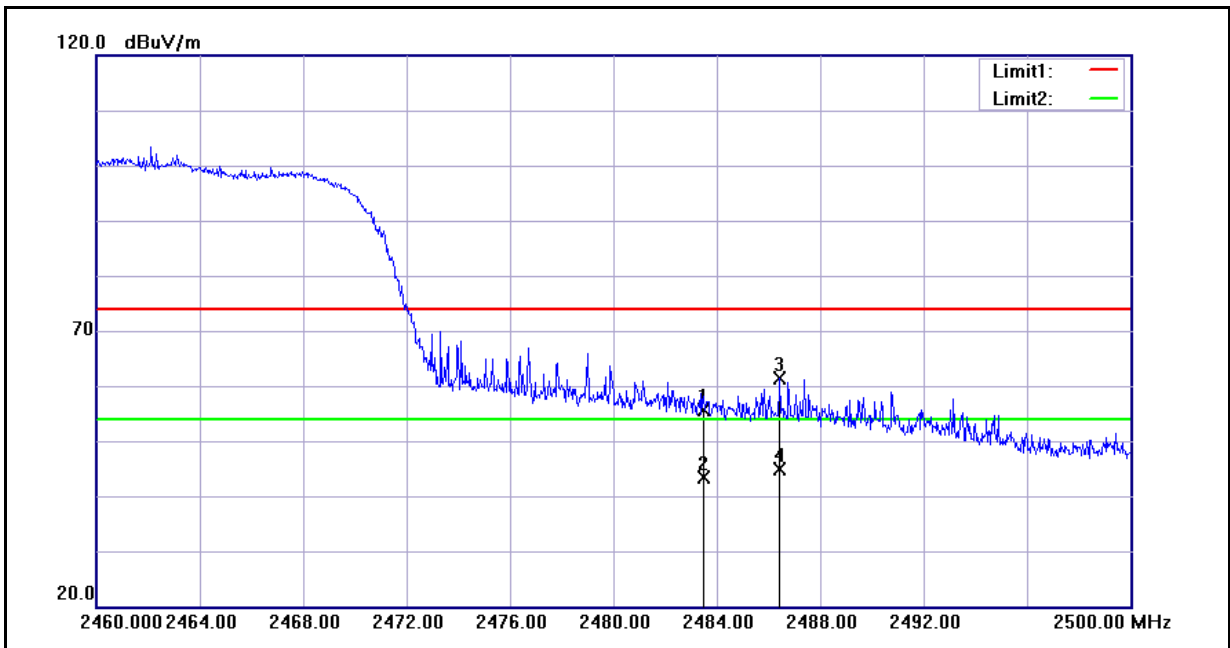


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.38	0.35	55.73	74.00	-18.27	peak
2	2483.500	43.03	0.35	43.38	54.00	-10.62	AVG
3	2486.440	61.05	0.37	61.42	74.00	-12.58	peak
4	2486.440	44.44	0.37	44.81	54.00	-9.19	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

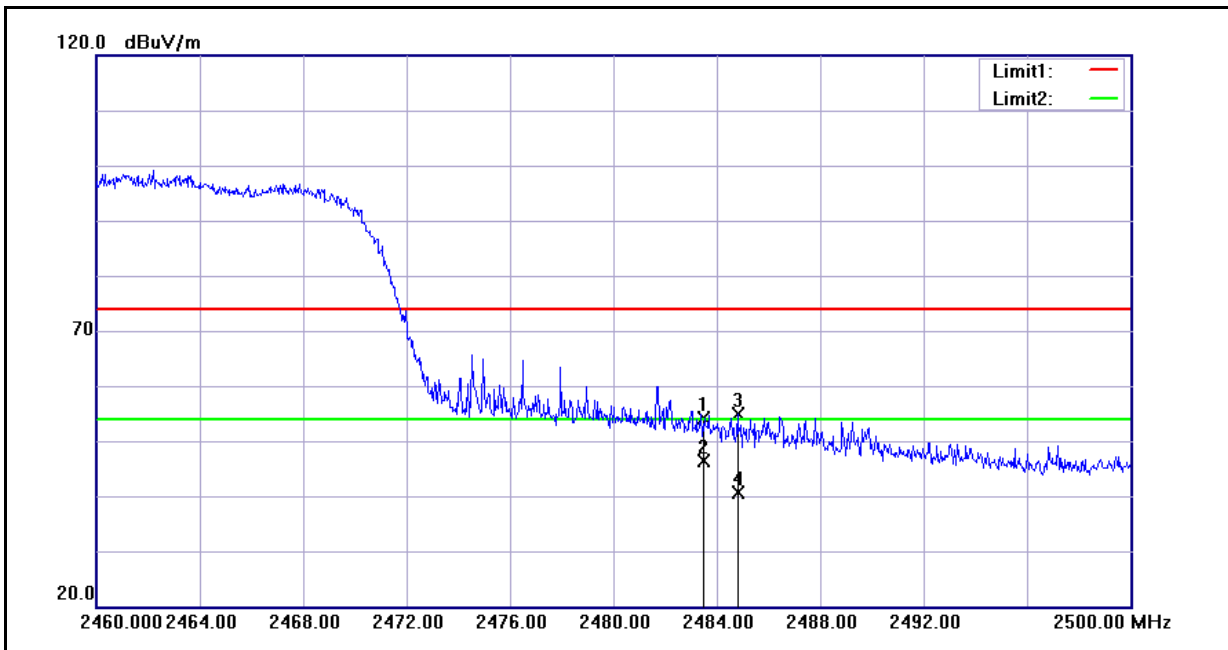


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.83	0.35	54.18	74.00	-19.82	peak
2	2483.500	45.98	0.35	46.33	54.00	-7.67	AVG
3	2484.800	54.58	0.35	54.93	74.00	-19.07	peak
4	2484.800	40.37	0.35	40.72	54.00	-13.28	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

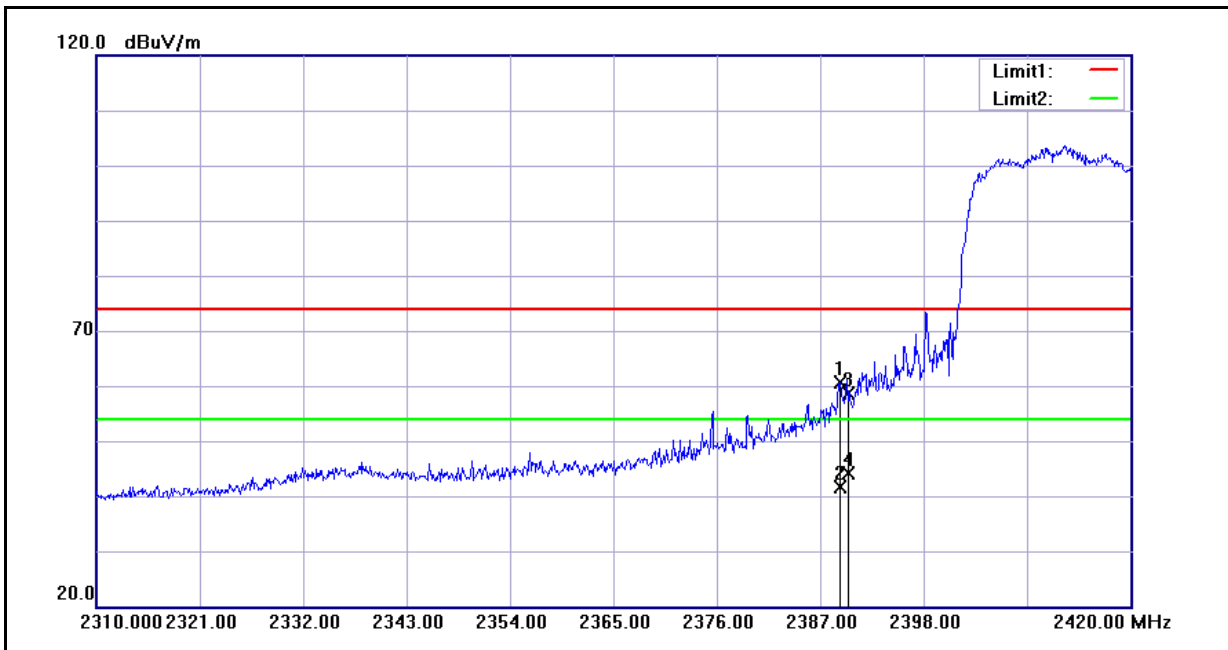


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	60.60	-0.06	60.54	74.00	-13.46	peak
2	2389.090	41.71	-0.06	41.65	54.00	-12.35	AVG
3	2390.000	58.72	-0.06	58.66	74.00	-15.34	peak
4	2390.000	44.15	-0.06	44.09	54.00	-9.91	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/15/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

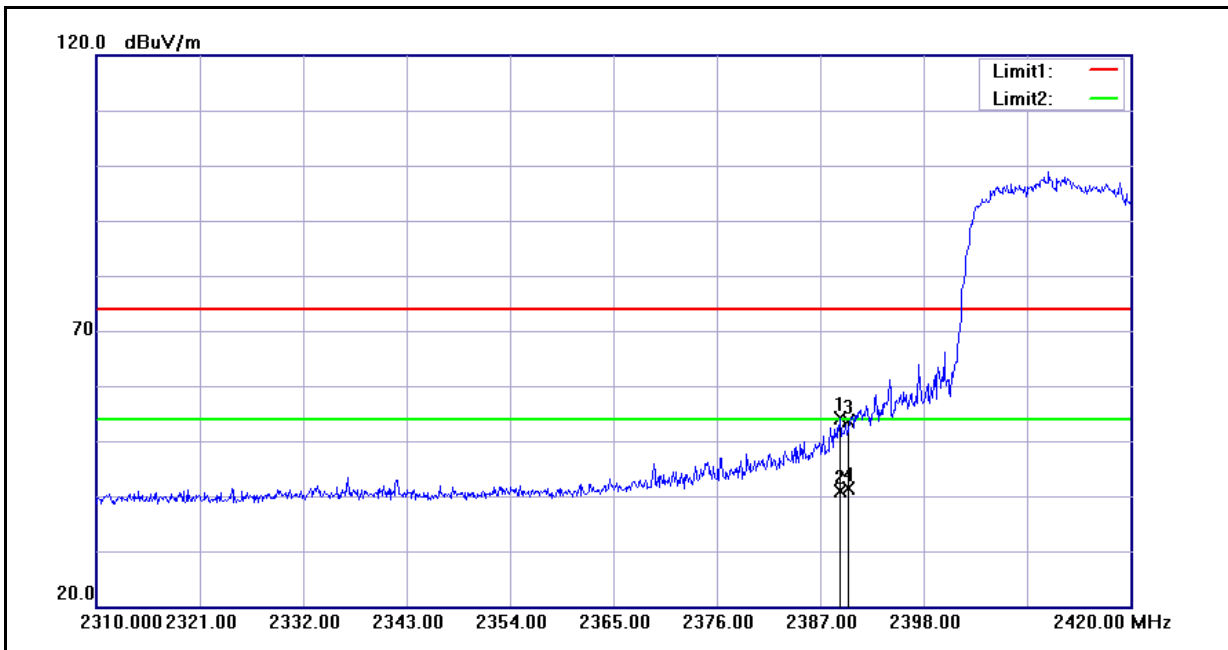

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	54.25	-0.06	54.19	74.00	-19.81	peak
2	2389.090	41.01	-0.06	40.95	54.00	-13.05	AVG
3	2390.000	53.77	-0.06	53.71	74.00	-20.29	peak
4	2390.000	41.53	-0.06	41.47	54.00	-12.53	AVG


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

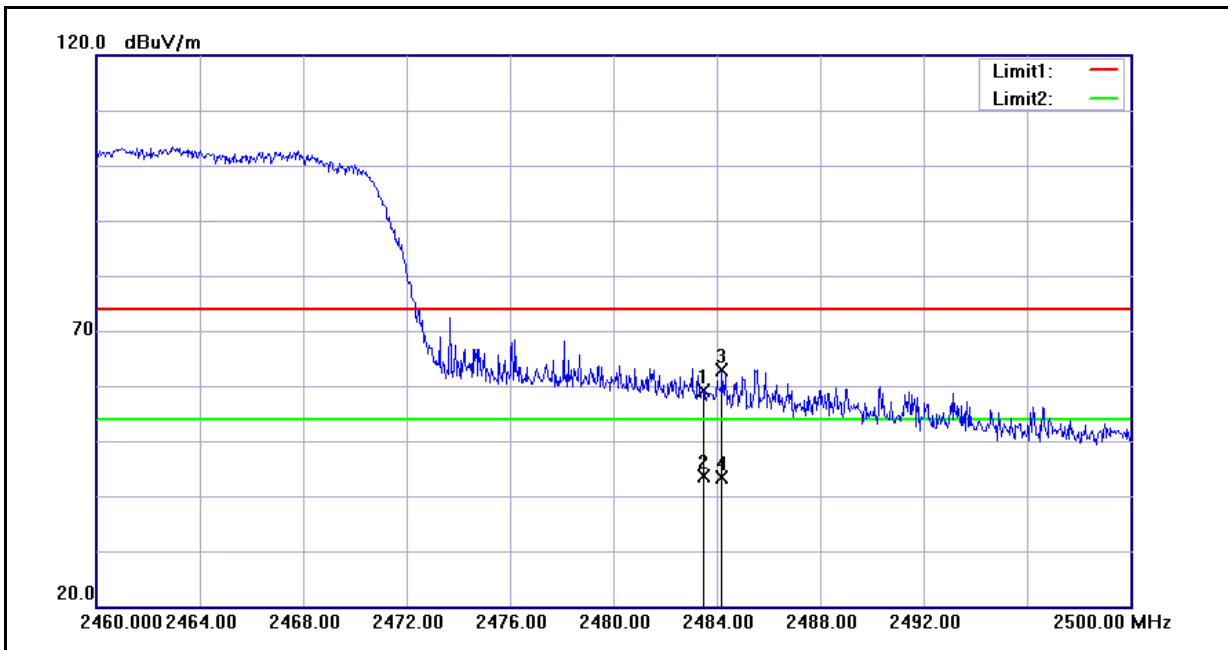

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.68	0.35	59.03	74.00	-14.97	peak
2	2483.500	43.37	0.35	43.72	54.00	-10.28	AVG
3	2484.200	62.52	0.35	62.87	74.00	-11.13	peak
4	2484.200	43.10	0.35	43.45	54.00	-10.55	AVG



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ03120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/15/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

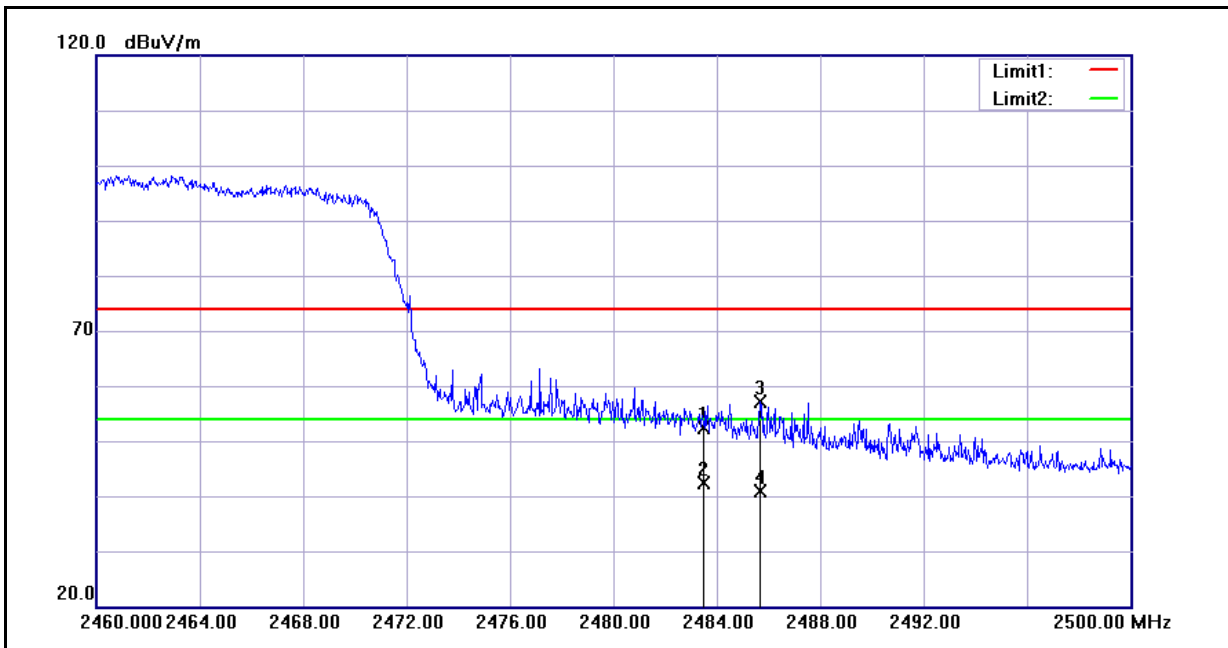


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.06	0.35	52.41	74.00	-21.59	peak
2	2483.500	41.93	0.35	42.28	54.00	-11.72	AVG
3	2485.680	56.85	0.37	57.22	74.00	-16.78	peak
4	2485.680	40.61	0.37	40.98	54.00	-13.02	AVG

## 11 99 % Occupied Bandwidth Measurement

### 11.1.Limit

N/A

### 11.2.Test Setup

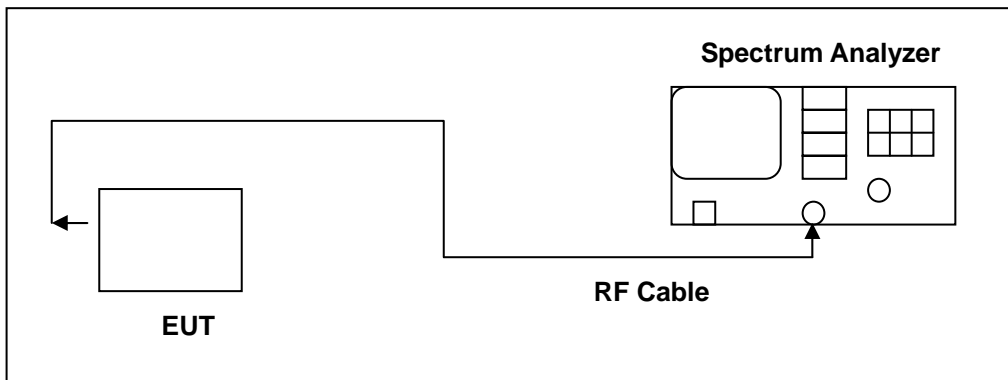

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**11.5.Test Result**

Model Number	PJ03120		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	13336.8	-----
	2437	13353.4	-----
	2462	13243.2	-----

Model Number	PJ03120		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	17194.2	-----
	2437	17011.2	-----
	2462	16897.7	-----

Model Number	PJ03120		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	09/14/2011	Test Site	TE05
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	18018.6	-----
	2437	18002.4	-----
	2462	17992.6	-----

**11.6. Test Graphs**

Mode 3: IEEE 802.11b Link Mode	
2412	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 25 dBm #Atten 30 dB</p> <p>#Samp Log 10 dB/ Offst 10.8 dB</p> <p>Center 2.412 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>13.3368 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 76.268 kHz</p> <p>x dB Bandwidth 16.796 MHz*</p>
2437	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 25 dBm #Atten 30 dB</p> <p>#Samp Log 10 dB/ Offst 10.8 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>13.3534 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 17.510 kHz</p> <p>x dB Bandwidth 16.858 MHz*</p>
2462	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 25 dBm #Atten 30 dB</p> <p>#Samp Log 10 dB/ Offst 10.8 dB</p> <p>Center 2.462 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>13.2432 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error -17.185 kHz</p> <p>x dB Bandwidth 16.787 MHz*</p>

Mode 4: IEEE 802.11g Link Mode

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 5: draft 802.11n Standard-20MHz Link Mode

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

## **12 Antenna Measurement**

### **12.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2.Antenna Connector Construction**

The antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **0.04 dBi**.