



A D T

# FCC/IC SAR Test Report

Report No. : SA120118C07  
Applicant : HTC Corporation  
Address : 23, XINGHUA RD., TAOYUAN 330, TAIWAN, R.O.C.  
Product : Smartphone  
FCC ID : NM8PJ40110  
IC : 4115B-PJ40110  
Brand : HTC  
Model No. : PJ40110  
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1991 / IEEE 1528:2003  
FCC OET BULLETIN 65 SUPPLEMENT C (EDITION 01-01) / IC RSS-102 ISSUE 4:2010  
KDB 248227 D01 v01r02 / KDB 648474 D01 v01r05 / KDB 941225 D01 v02  
KDB 941225 D03 v01 / KDB 941225 D06 v01  
Date of Testing : Jan. 25, 2012 ~ Feb. 14, 2012

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report.

This test report consists of 29 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.

Prepared By :   
Pettie Chen / Specialist

Approved By :   
Roy Wu / Manager





## Table of Contents

Release Control Record .....	3
1. Summary of Maximum SAR Value .....	4
2. Description of Equipment Under Test .....	5
3. SAR Measurement System .....	7
3.1 Definition of Specific Absorption Rate (SAR).....	7
3.2 SPEAG DASY System .....	7
3.2.1 Robot.....	8
3.2.2 Probes.....	9
3.2.3 Data Acquisition Electronics (DAE) .....	9
3.2.4 Phantoms .....	10
3.2.5 Device Holder.....	11
3.2.6 System Validation Dipoles.....	11
3.2.7 Tissue Simulating Liquids.....	12
3.3 SAR System Verification .....	13
3.4 SAR Measurement Procedure .....	14
3.4.1 Area & Zoom Scan Procedure .....	14
3.4.2 Volume Scan Procedure.....	14
3.4.3 Power Drift Monitoring.....	14
3.4.4 Spatial Peak SAR Evaluation .....	15
3.4.5 SAR Averaged Methods .....	15
4. SAR Measurement Evaluation .....	16
4.1 EUT Configuration and Setting.....	16
4.2 EUT Testing Position .....	16
4.3 Tissue Verification .....	18
4.4 System Verification.....	19
4.5 Conducted Power Results.....	19
4.6 SAR Testing Results.....	21
4.6.1 SAR Results for Head .....	21
4.6.2 SAR Results for Body.....	22
4.6.3 Simultaneous Multi-band Transmission Evaluation .....	24
5. Calibration of Test Equipment.....	27
6. Measurement Uncertainty .....	28
7. Information on the Testing Laboratories.....	29
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	



## Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Original release	Feb. 20, 2012

**1. Summary of Maximum SAR Value**

Mode / Band	Test Position	SAR-1g (W/kg)
GSM850	Head	0.393
	Body (Hotspot, 1 cm Gap)	1.18
	Body (Body Worn, 1 cm Gap)	1.18
GSM1900	Head	0.14
	Body (Hotspot, 1 cm Gap)	0.495
	Body (Body Worn, 1 cm Gap)	0.495
WCDMA Band II	Head	0.303
	Body (Hotspot, 1 cm Gap)	1.15
	Body (Body Worn, 1 cm Gap)	1.15
WCDMA Band IV	Head	0.222
	Body (Hotspot, 1 cm Gap)	0.753
	Body (Body Worn, 1 cm Gap)	0.753
WCDMA Band V	Head	0.23
	Body (Hotspot, 1 cm Gap)	0.652
	Body (Body Worn, 1 cm Gap)	0.652
WLAN 2450	Head	0.35
	Body (Hotspot, 1 cm Gap)	0.181
	Body (Body Worn, 1 cm Gap)	0.181
Bluetooth	Head	N/A
	Body (Hotspot, 1 cm Gap)	N/A
	Body (Body Worn, 1 cm Gap)	N/A

**Note:**

The SAR limit (**1.6 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991.

## 2. Description of Equipment Under Test

<b>EUT Type</b>	Smartphone
<b>FCC ID</b>	NM8PJ40110
<b>IC</b>	4115B-PJ40110
<b>Brand Name</b>	HTC
<b>Model Name</b>	PJ40110
<b>Tx Frequency Bands (Unit: MHz)</b>	GSM850 : 824 ~ 849 GSM1900 : 1850 ~ 1910 WCDMA Band II : 1850 ~ 1910 WCDMA Band IV : 1710 ~ 1755 WCDMA Band V : 824 ~ 849 WLAN : 2400 ~ 2483.5 Bluetooth : 2400 ~ 2483.5
<b>Uplink Modulations</b>	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK 802.11b : DSSS 802.11g/n : OFDM Bluetooth : GFSK
<b>Maximum AVG Conducted Power (Unit: dBm)</b>	GSM850 : 33.18 GSM1900 : 29.88 WCDMA Band II : 23.20 WCDMA Band IV : 23.18 WCDMA Band V : 23.40 802.11b : 18.22 802.11g : 13.24 802.11n HT20 : 13.28
<b>Antenna Type</b>	Fixed Internal Antenna
<b>EUT Stage</b>	Production Unit

**Note:**


1. This device does not support DTM capability.
2. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
3. The EUT's accessories list refers to Ext Pho\_NM8PJ40110.pdf.

# FCC/IC SAR Test Report

The simultaneous transmission possibilities are listed as below.

Simultaneous Tx Combination	Configuration	WLAN Hotspot
1	GSM850 + WLAN/BT	V
2	GSM1900 + WLAN/BT	V
3	WCDMA Band II + WLAN/BT	V
4	WCDMA Band IV + WLAN/BT	V
5	WCDMA Band V + WLAN/BT	V

## <Antenna Location>

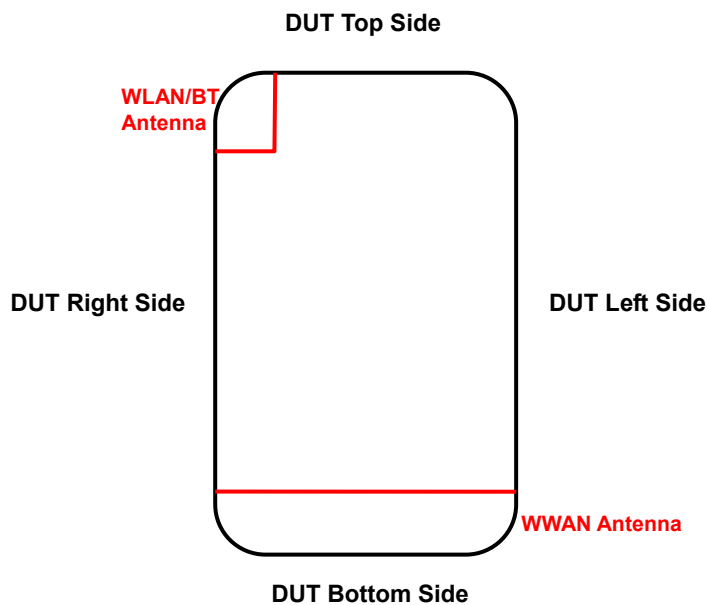

This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces / slide edges where a transmitting antenna is within 25 mm from the edge. Since the SAR is required for antenna located within 25 mm from edge, SAR testing for each antenna is listed as below.

WWAN : Front Face, Rear Face, Left Side, Right Side, Bottom Side

WLAN : Front Face, Rear Face, Right Side, Top Side

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY System**

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

# FCC/IC SAR Test Report

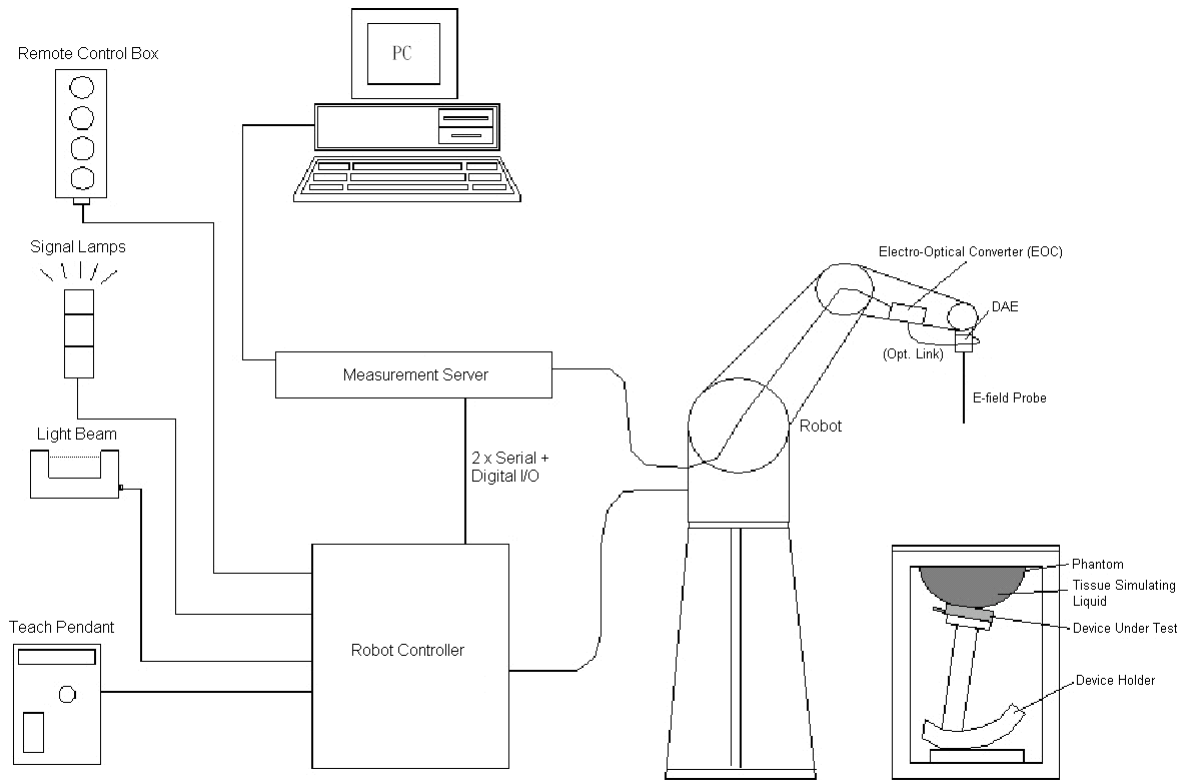

**Fig-3.1 DASY System Setup**

## 3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 DASY4**




**Fig-3.3 DASY5**




## FCC/IC SAR Test Report


### 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

<b>Model</b>	EX3DV4	
<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
<b>Frequency</b>	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


<b>Model</b>	ES3DV3	
<b>Construction</b>	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
<b>Frequency</b>	10 MHz to 4 GHz Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	


### 3.2.3 Data Acquisition Electronics (DAE)

<b>Model</b>	DAE3, DAE4	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
<b>Input Offset Voltage</b>	$< 5$ $\mu$ V (with auto zero)	
<b>Input Bias Current</b>	$< 50$ fA	
<b>Dimensions</b>	60 x 60 x 68 mm	

# FCC/IC SAR Test Report


## 3.2.4 Phantoms


<b>Model</b>	Twin SAM	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	
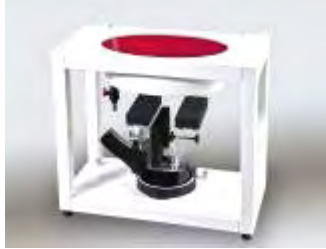
<b>Model</b>	ELI	
<b>Construction</b>	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	


# FCC/IC SAR Test Report

## 3.2.5 Device Holder

<b>Model</b>	Mounting Device	
<b>Construction</b>	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
<b>Material</b>	POM	

<b>Model</b>	Laptop Extensions Kit	
<b>Construction</b>	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
<b>Material</b>	POM, Acrylic glass, Foam	

## 3.2.6 System Validation Dipoles

<b>Model</b>	D-Serial	
<b>Construction</b>	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
<b>Frequency</b>	750 MHz to 5800 MHz	
<b>Return Loss</b>	> 20 dB	
<b>Power Capability</b>	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

## FCC/IC SAR Test Report

### 3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

**Table-3.1 Targets of Tissue Simulating Liquid**

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
<b>For Head</b>				
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
<b>For Body</b>				
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2450	-	45.0	-	0.1	-	-	54.9	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2450	-	31.4	-	0.1	-	-	68.5	-

### 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

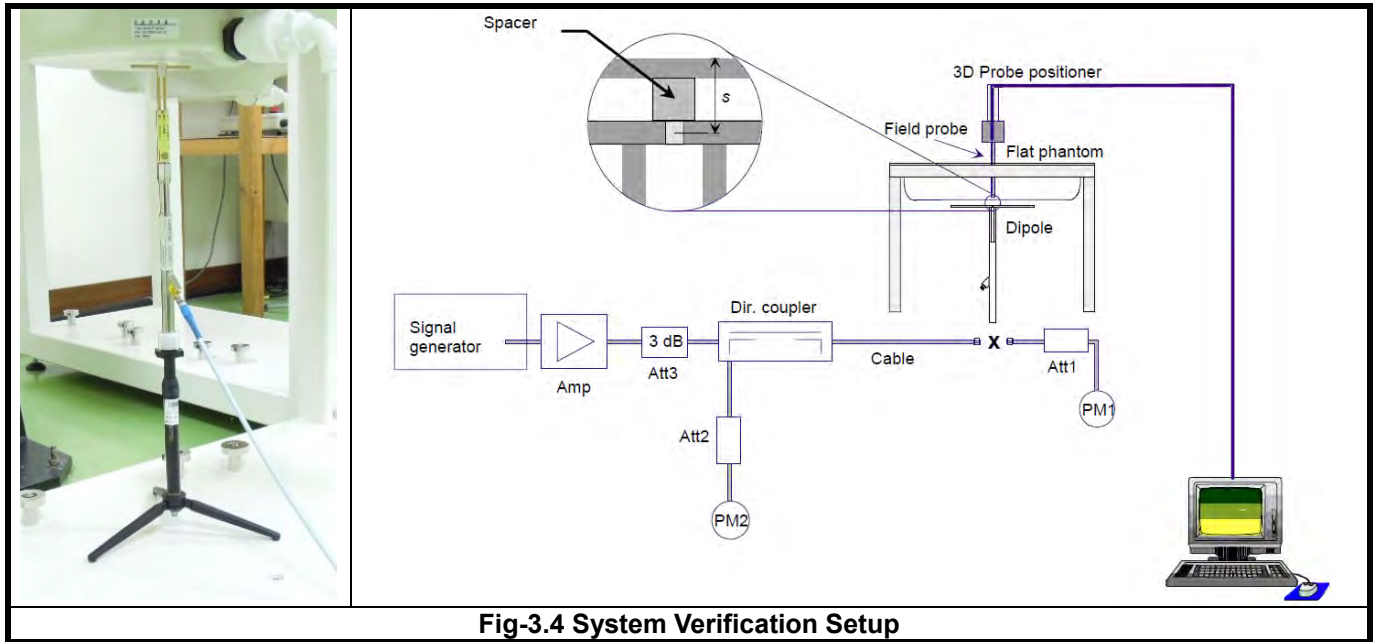

**Fig-3.4 System Verification Setup**

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

### **3.4 SAR Measurement Procedure**

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

#### **3.4.1 Area & Zoom Scan Procedure**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for below 3 GHz, and 7x7x9 points with step size 4, 4 and 2.5 mm for above 5 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

#### **3.4.2 Volume Scan Procedure**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### **3.4.3 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## FCC/IC SAR Test Report

---

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.


For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle. The data rates for WLAN SAR testing were set in lowest data rate as 1 Mbps for 802.11b, 6 Mbps for 802.11g, and MCS0 for 802.11n due to the highest RF output power.

### 4.2 EUT Testing Position

This DUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Front Face, Rear Face, Left Side, Right Side, Top Side, and Bottom Side** positions as illustrated below:

#### 1. Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

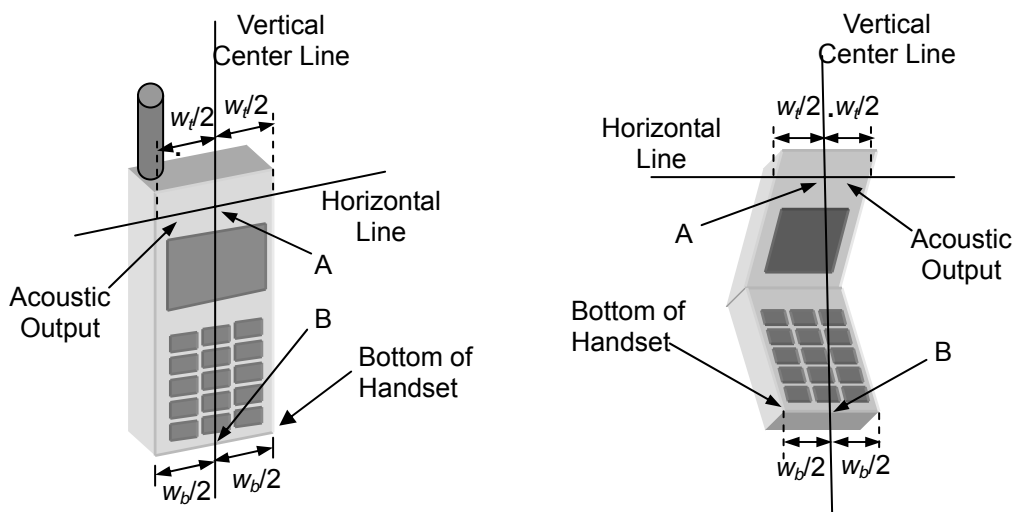

**Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines**



## FCC/IC SAR Test Report

### 2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

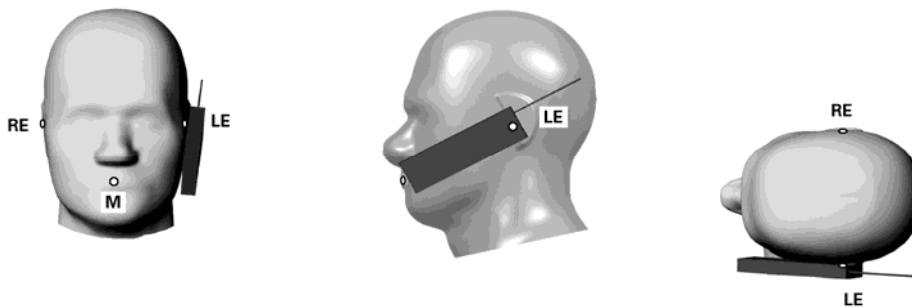


Fig-4.2 Illustration for Cheek Position

### 3. Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).


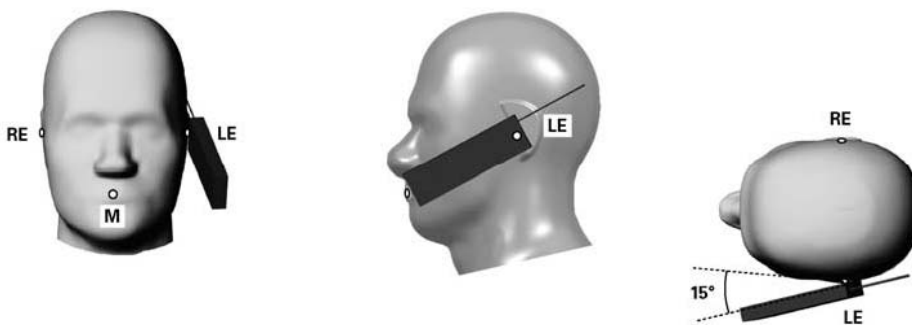


Fig-4.3 Illustration for Tilted Position

# FCC/IC SAR Test Report

## 4. Body Worn Position

- (a) To position the EUT parallel to the phantom surface.
- (b) To adjust the EUT parallel to the flat phantom.
- (c) To adjust the distance between the EUT surface and the flat phantom to 1.0 cm.

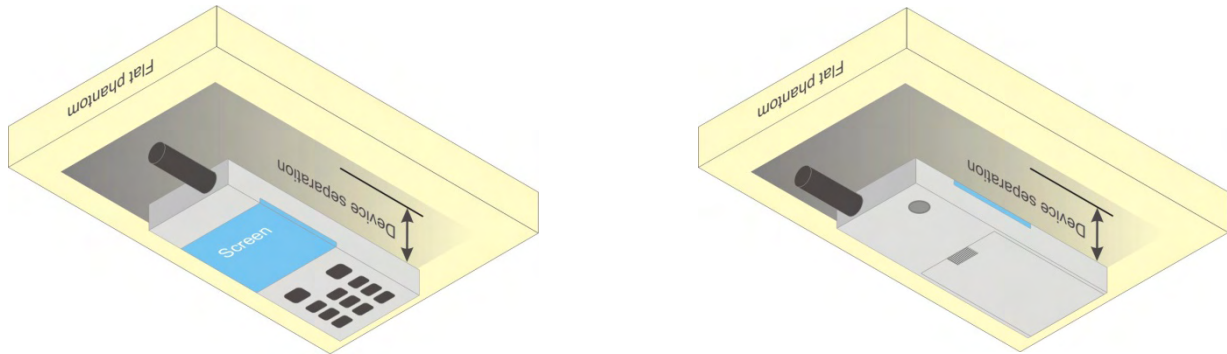

**Fig-4.4 Illustration for Body Worn Position**

## 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Target Conductivity ( $\sigma$ )	Target Permittivity ( $\epsilon_r$ )	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
H835	835	21.3	0.886	41.989	0.90	41.5	-1.56	1.18	Feb. 02, 2012
H835	835	20.7	0.886	42.018	0.90	41.5	-1.56	1.25	Feb. 12, 2012
B835	835	21.2	0.994	54.98	0.97	55.2	2.47	-0.40	Jan. 25, 2012
B835	835	20.4	0.997	55.338	0.97	55.2	2.78	0.25	Feb. 12, 2012
B835	835	21.4	0.998	55.5	0.97	55.2	2.89	0.54	Feb. 14, 2012
H1750	1750	20.3	1.365	40.525	1.37	40.1	-0.36	1.06	Feb. 12, 2012
B1750	1750	20.5	1.462	54.469	1.49	53.4	-1.88	2.00	Feb. 01, 2012
B1750	1750	20.5	1.462	54.756	1.49	53.4	-1.88	2.54	Feb. 11, 2012
H1900	1900	20.3	1.436	40.996	1.40	40.0	2.57	2.49	Feb. 12, 2012
B1900	1900	20.5	1.544	52.883	1.52	53.3	1.58	-0.78	Feb. 01, 2012
B1900	1900	20.5	1.548	52.953	1.52	53.3	1.84	-0.65	Feb. 11, 2012
B1900	1900	21.5	1.55	52.4	1.52	53.3	1.97	-1.69	Feb. 14, 2012
H2450	2450	21.2	1.854	37.997	1.80	39.2	3.00	-3.07	Feb. 12, 2012
B2450	2450	21.0	1.976	50.932	1.95	52.7	1.33	-3.35	Feb. 12, 2012

**Note:**

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within  $\pm 5\%$  of the target values. Liquid temperature during the SAR testing must be within  $\pm 2$  °C.



# FCC/IC SAR Test Report

## 4.4 System Verification

The measuring results for system check are shown as below.

Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Feb. 02, 2012	835	9.65	2.41	9.64	-0.10	4d021	3650	579
Feb. 12, 2012	835	9.65	2.40	9.60	-0.52	4d021	3661	579
Jan. 25, 2012	835	10.10	2.56	10.24	1.39	4d021	3650	579
Feb. 12, 2012	835	10.10	2.59	10.36	2.57	4d021	3800	861
Feb. 14, 2012	835	10.10	2.46	9.84	-2.57	4d021	3650	1277
Feb. 12, 2012	1750	36.60	8.59	34.36	-6.12	1055	3800	861
Feb. 01, 2012	1750	38.00	9.19	36.76	-3.26	1055	3650	579
Feb. 11, 2012	1750	38.00	9.14	36.56	-3.79	1055	3800	861
Feb. 12, 2012	1900	38.90	10.50	42.00	7.97	5d036	3800	861
Feb. 01, 2012	1900	38.90	9.39	37.56	-3.44	5d036	3650	579
Feb. 11, 2012	1900	38.90	10.40	41.60	6.94	5d036	3800	861
Feb. 14, 2012	1900	38.90	9.84	39.36	1.18	5d036	3650	1277
Feb. 12, 2012	2450	52.90	13.80	55.20	4.35	737	3661	579
Feb. 12, 2012	2450	50.00	13.20	52.80	5.60	737	3661	579

### Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

## 4.5 Conducted Power Results

The measuring conducted power (Unit: dBm) are shown as below.

Band Channel	GSM850			GSM1900		
	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
<b>Maximum Burst-Averaged Output Power</b>						
GSM (GMSK, 1 slot)	33.17	33.18	33.05	29.75	29.51	29.88
GPRS 8 (GMSK, 1 slot)	33.15	33.16	33.05	29.78	29.51	29.79
GPRS 10 (GMSK, 2 slot)	32.09	32.36	32.33	26.75	26.85	26.86
EDGE 8 (GMSK, 1 slot)	26.29	26.19	26.22	24.88	24.65	24.46
EDGE 10 (GMSK, 2 slot)	26.13	26.04	26.09	24.63	24.43	24.35
EDGE 8 (8PSK, 1 slot)	25.39	25.32	25.38	24.55	24.47	24.44
EDGE 10 (8PSK, 2 slot)	24.73	24.71	24.69	24.34	24.31	24.30
<b>Maximum Frame-Averaged Output Power</b>						
GSM (GMSK, 1 slot)	24.17	24.18	24.05	20.75	20.51	20.88
GPRS 8 (GMSK, 1 slot)	24.15	24.16	24.05	20.78	20.51	20.79
GPRS 10 (GMSK, 2 slot)	26.09	26.36	26.33	20.75	20.85	20.86
EDGE 8 (GMSK, 1 slot)	17.29	17.19	17.22	15.88	15.65	15.46
EDGE 10 (GMSK, 2 slot)	20.13	20.04	20.09	18.63	18.43	18.35
EDGE 8 (8PSK, 1 slot)	16.39	16.32	16.38	15.55	15.47	15.44
EDGE 10 (8PSK, 2 slot)	18.73	18.71	18.69	18.34	18.31	18.30

Note: SAR testing for GSM/GPRS/EDGE was performed on the maximum frame-averaged power mode.



# FCC/IC SAR Test Report

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.4	846.6
RMC 12.2K	23.04	23.20	23.14	23.40	23.38	23.37
HSDPA Subtest-1	21.45	21.64	21.72	22.84	23.02	22.85
HSDPA Subtest-2	21.38	21.64	21.60	22.82	22.95	22.85
HSDPA Subtest-3	21.55	21.71	21.60	22.42	22.50	22.33
HSDPA Subtest-4	21.45	21.69	21.59	22.38	22.52	22.36
HSUPA Subtest-1	21.22	21.69	21.39	22.21	22.48	22.34
HSUPA Subtest-2	19.72	19.90	19.93	20.94	21.10	21.28
HSUPA Subtest-3	19.70	19.88	19.83	21.32	21.51	21.62
HSUPA Subtest-4	19.70	19.87	19.92	21.40	21.41	21.52
HSUPA Subtest-5	21.58	21.81	21.78	22.84	22.98	22.82

Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.15	23.01	23.18
HSDPA Subtest-1	21.68	21.63	21.67
HSDPA Subtest-2	21.60	21.49	21.52
HSDPA Subtest-3	21.67	21.54	21.55
HSDPA Subtest-4	21.67	21.53	21.64
HSUPA Subtest-1	21.80	21.13	21.22
HSUPA Subtest-2	19.98	19.54	19.86
HSUPA Subtest-3	20.48	20.27	20.37
HSUPA Subtest-4	19.03	18.89	19.17
HSUPA Subtest-5	21.83	21.72	21.89

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	18.01	18.22	18.11	13.19	13.24	13.18

Band	802.11n (HT20)			-		
Channel	1	6	11	-	-	-
Frequency (MHz)	2412	2437	2462	-	-	-
Average Power	13.16	13.28	13.24	-	-	-

**4.6 SAR Testing Results**

**4.6.1 SAR Results for Head**

Plot No.	Band	Mode	Test Position	Channel	Sample	SAR-1g (W/kg)
1	GSM850	GPRS10	Right Cheek	189	1	<b>0.393</b>
2	GSM850	GPRS10	Right Tilted	189	1	0.237
3	GSM850	GPRS10	Left Cheek	189	1	0.358
4	GSM850	GPRS10	Left Tilted	189	1	0.242
7	GSM850	GPRS10	Right Cheek	189	2	0.376
18	GSM1900	GSM	Right Cheek	810	1	0.078
19	GSM1900	GSM	Right Tilted	810	1	0.056
20	GSM1900	GSM	Left Cheek	810	1	<b>0.14</b>
21	GSM1900	GSM	Left Tilted	810	1	0.07
24	GSM1900	GSM	Left Cheek	810	2	0.123
68	WCDMA II	RMC12.2K	Right Cheek	9400	1	0.183
69	WCDMA II	RMC12.2K	Right Tilted	9400	1	0.126
70	WCDMA II	RMC12.2K	Left Cheek	9400	1	<b>0.303</b>
71	WCDMA II	RMC12.2K	Left Tilted	9400	1	0.139
72	WCDMA II	RMC12.2K	Left Cheek	9400	2	0.240
53	WCDMA IV	RMC12.2K	Right Cheek	1513	1	0.183
54	WCDMA IV	RMC12.2K	Right Tilted	1513	1	0.109
55	WCDMA IV	RMC12.2K	Left Cheek	1513	1	<b>0.222</b>
56	WCDMA IV	RMC12.2K	Left Tilted	1513	1	0.095
57	WCDMA IV	RMC12.2K	Left Cheek	1513	2	0.163
40	WCDMA V	RMC12.2K	Right Cheek	4132	1	<b>0.23</b>
41	WCDMA V	RMC12.2K	Right Tilted	4132	1	0.139
42	WCDMA V	RMC12.2K	Left Cheek	4132	1	0.219
43	WCDMA V	RMC12.2K	Left Tilted	4132	1	0.158
44	WCDMA V	RMC12.2K	Right Cheek	4132	2	0.214
95	802.11b	-	Right Cheek	6	1	0.268
96	802.11b	-	Right Tilted	6	1	<b>0.350</b>
97	802.11b	-	Left Cheek	6	1	0.312
98	802.11b	-	Left Tilted	6	1	0.311
99	802.11b	-	Right Tilted	6	2	0.338

**Note:**

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.
2. Since GSM/WCDMA/WLAN of this device supports VOIP capability, we evaluate head SAR on both voice and data mode.

**4.6.2 SAR Results for Body**

<Hotspot Mode>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Sample	SAR-1g (W/kg)
8	GSM850	GPRS10	Front Face	1	189	1	0.528
9	GSM850	GPRS10	Rear Face	1	189	1	0.972
10	GSM850	GPRS10	Left Side	1	189	1	0.682
11	GSM850	GPRS10	Right Side	1	189	1	0.531
13	GSM850	GPRS10	Bottom Side	1	189	1	0.084
14	GSM850	GPRS10	Rear Face	1	128	1	0.875
15	GSM850	GPRS10	Rear Face	1	251	1	<b>1.18</b>
17	GSM850	GPRS10	Rear Face	1	251	2	0.996
110	GSM850	GPRS10	Rear Face	1	189	2	1.1
111	GSM850	GPRS10	Rear Face	1	128	2	0.986
25	GSM1900	GSM	Front Face	1	810	1	0.248
26	GSM1900	GSM	Rear Face	1	810	1	<b>0.495</b>
31	GSM1900	GSM	Left Side	1	810	1	0.118
32	GSM1900	GSM	Right Side	1	810	1	0.019
34	GSM1900	GSM	Bottom Side	1	810	1	0.401
38	GSM1900	GSM	Rear Face	1	810	2	0.469
73	WCDMA II	RMC12.2K	Front Face	1	9400	1	0.467
74	WCDMA II	RMC12.2K	Rear Face	1	9400	1	0.917
75	WCDMA II	RMC12.2K	Left Side	1	9400	1	0.207
76	WCDMA II	RMC12.2K	Right Side	1	9400	1	0.03
78	WCDMA II	RMC12.2K	Bottom Side	1	9400	1	0.691
79	WCDMA II	RMC12.2K	Rear Face	1	9262	1	0.872
80	WCDMA II	RMC12.2K	Rear Face	1	9538	1	<b>1.15</b>
82	WCDMA II	RMC12.2K	Rear Face	1	9538	2	1.05
83	WCDMA II	RMC12.2K	Rear Face	1	9262	2	0.803
84	WCDMA II	RMC12.2K	Rear Face	1	9400	2	0.856
58	WCDMA IV	RMC12.2K	Front Face	1	1513	1	0.448
59	WCDMA IV	RMC12.2K	Rear Face	1	1513	1	<b>0.753</b>
60	WCDMA IV	RMC12.2K	Left Side	1	1513	1	0.127
61	WCDMA IV	RMC12.2K	Right Side	1	1513	1	0.034
63	WCDMA IV	RMC12.2K	Bottom Side	1	1513	1	0.683
67	WCDMA IV	RMC12.2K	Rear Face	1	1513	2	0.683
45	WCDMA V	RMC12.2K	Front Face	1	4132	1	0.34
46	WCDMA V	RMC12.2K	Rear Face	1	4132	1	<b>0.652</b>
47	WCDMA V	RMC12.2K	Left Side	1	4132	1	0.45
48	WCDMA V	RMC12.2K	Right Side	1	4132	1	0.446
50	WCDMA V	RMC12.2K	Bottom Side	1	4132	1	0.089
52	WCDMA V	RMC12.2K	Rear Face	1	4132	2	0.627
100	802.11b	-	Front Face	1	6	1	0.117
101	802.11b	-	Rear Face	1	6	1	<b>0.181</b>
103	802.11b	-	Right Side	1	6	1	0.125
104	802.11b	-	Top Side	1	6	1	0.156
106	802.11b	-	Rear Face	1	6	2	0.146

**Note:**

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.



## FCC/IC SAR Test Report

## &lt;Body Worn Mode&gt;

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Sample	Earphone	SAR-1g (W/kg)
8	GSM850	GPRS10	Front Face	1	189	1	w/o	0.528
9	GSM850	GPRS10	Rear Face	1	189	1	w/o	0.972
14	GSM850	GPRS10	Rear Face	1	128	1	w/o	0.875
15	GSM850	GPRS10	Rear Face	1	251	1	w/o	<b>1.18</b>
16	GSM850	GPRS10	Rear Face	1	251	1	1	0.858
108	GSM850	GPRS10	Rear Face	1	189	1	1	0.642
109	GSM850	GPRS10	Rear Face	1	128	1	1	0.513
85	GSM850	GPRS10	Rear Face	1	251	1	2	0.763
25	GSM1900	GSM	Front Face	1	810	1	w/o	0.248
26	GSM1900	GSM	Rear Face	1	810	1	w/o	<b>0.495</b>
37	GSM1900	GSM	Rear Face	1	810	1	1	0.455
86	GSM1900	GSM	Rear Face	1	810	1	2	0.433
73	WCDMA II	RMC12.2K	Front Face	1	9400	1	w/o	0.467
74	WCDMA II	RMC12.2K	Rear Face	1	9400	1	w/o	0.917
79	WCDMA II	RMC12.2K	Rear Face	1	9262	1	w/o	0.872
80	WCDMA II	RMC12.2K	Rear Face	1	9538	1	w/o	<b>1.15</b>
81	WCDMA II	RMC12.2K	Rear Face	1	9538	1	1	0.993
112	WCDMA II	RMC12.2K	Rear Face	1	9262	1	1	1.11
113	WCDMA II	RMC12.2K	Rear Face	1	9400	1	1	1.14
89	WCDMA II	RMC12.2K	Rear Face	1	9538	1	2	1.03
93	WCDMA II	RMC12.2K	Rear Face	1	9262	1	2	0.721
94	WCDMA II	RMC12.2K	Rear Face	1	9400	1	2	0.812
58	WCDMA IV	RMC12.2K	Front Face	1	1513	1	w/o	0.448
59	WCDMA IV	RMC12.2K	Rear Face	1	1513	1	w/o	<b>0.753</b>
64	WCDMA IV	RMC12.2K	Rear Face	1	1513	1	1	0.695
88	WCDMA IV	RMC12.2K	Rear Face	1	1513	1	2	0.683
45	WCDMA V	RMC12.2K	Front Face	1	4132	1	w/o	0.34
46	WCDMA V	RMC12.2K	Rear Face	1	4132	1	w/o	<b>0.652</b>
51	WCDMA V	RMC12.2K	Rear Face	1	4132	1	1	0.529
87	WCDMA V	RMC12.2K	Rear Face	1	4132	1	2	0.435
100	802.11b	-	Front Face	1	6	1	w/o	0.117
101	802.11b	-	Rear Face	1	6	1	w/o	<b>0.181</b>
105	802.11b	-	Rear Face	1	6	1	1	0.137
107	802.11b	-	Rear Face	1	6	1	2	0.142

**Note:**

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.
2. Since GSM/WCDMA/WLAN of this device supports VOIP capability, we evaluate body worn SAR on both voice and data mode.

**Test Engineer :** Phoenix Chen, Match Tsui and Jerome Chang



**FCC/IC SAR Test Report**
**4.6.3 Simultaneous Multi-band Transmission Evaluation**
**<Simultaneous Transmission Configuration 1>**

Position (Head)	GSM850 (Voice / VOIP)	802.11b/g/n (Data)	Max. SAR Summation
Right Cheek	0.393	0.268	0.661
Right Tilted	0.237	0.35	0.587
Left Cheek	0.358	0.312	0.670
Left Tilted	0.242	0.311	0.553
Position (Hotspot)	GSM850 (Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.528	0.117	0.645
Rear Face	1.18	0.181	1.361
Left Side	0.682	0	0.682
Right Side	0.531	0.125	0.656
Top Side	0	0.156	0.156
Bottom Side	0.084	0	0.084
Position (Body Worn)	GSM850 (Voice / VOIP / Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.528	0.117	0.645
Rear Face	1.18	0.181	1.361

**<Simultaneous Transmission Configuration 2>**

Position (Head)	GSM1900 (Voice / VOIP)	802.11b/g/n (Data)	Max. SAR Summation
Right Cheek	0.078	0.268	0.346
Right Tilted	0.056	0.35	0.406
Left Cheek	0.14	0.312	0.452
Left Tilted	0.07	0.311	0.381
Position (Hotspot)	GSM1900 (Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.248	0.117	0.365
Rear Face	0.495	0.181	0.676
Left Side	0.118	0	0.118
Right Side	0.019	0.125	0.144
Top Side	0	0.156	0.156
Bottom Side	0.401	0	0.401
Position (Body Worn)	GSM1900 (Voice / VOIP / Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.248	0.117	0.365
Rear Face	0.495	0.181	0.676





## &lt;Simultaneous Transmission Configuration 3&gt;

Position (Head)	WCDMA Band II (Voice / VOIP)	802.11b/g/n (Data)	Max. SAR Summation
Right Cheek	0.183	0.268	0.451
Right Tilted	0.126	0.35	0.476
Left Cheek	0.303	0.312	0.615
Left Tilted	0.139	0.311	0.450
Position (Hotspot)	WCDMA Band II (Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.467	0.117	0.584
Rear Face	1.15	0.181	1.331
Left Side	0.207	0	0.207
Right Side	0.03	0.125	0.155
Top Side	0	0.156	0.156
Bottom Side	0.691	0	0.691
Position (Body Worn)	WCDMA Band II (Voice / VOIP / Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.467	0.117	0.584
Rear Face	1.15	0.181	1.331

## &lt;Simultaneous Transmission Configuration 4&gt;

Position (Head)	WCDMA Band IV (Voice / VOIP)	802.11b/g/n (Data)	Max. SAR Summation
Right Cheek	0.183	0.268	0.451
Right Tilted	0.109	0.35	0.459
Left Cheek	0.222	0.312	0.534
Left Tilted	0.095	0.311	0.406
Position (Hotspot)	WCDMA Band IV (Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.448	0.117	0.565
Rear Face	0.753	0.181	0.934
Left Side	0.127	0	0.127
Right Side	0.034	0.125	0.159
Top Side	0	0.156	0.156
Bottom Side	0.683	0	0.683
Position (Body Worn)	WCDMA Band IV (Voice / VOIP / Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.448	0.117	0.565
Rear Face	0.753	0.181	0.934



<Simultaneous Transmission Configuration 5>

Position (Head)	WCDMA Band V (Voice / VOIP)	802.11b/g/n (Data)	Max. SAR Summation
Right Cheek	0.23	0.268	0.498
Right Tilted	0.139	0.35	0.489
Left Cheek	0.219	0.312	0.531
Left Tilted	0.158	0.311	0.469
Position (Hotspot)	WCDMA Band V (Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.34	0.117	0.457
Rear Face	0.652	0.181	0.833
Left Side	0.45	0	0.450
Right Side	0.446	0.125	0.571
Top Side	0	0.156	0.156
Bottom Side	0.089	0	0.089
Position (Body Worn)	WCDMA Band V (Voice / VOIP / Data)	802.11b/g/n (Data)	Max. SAR Summation
Front Face	0.34	0.117	0.457
Rear Face	0.652	0.181	0.833

**Summary:**

According to KDB 648474, the simultaneous transmission SAR for WWAN and WLAN was not required, because the SAR summation is less than 1.6 W/kg. The simultaneous transmission SAR for WWAN and BT was not required, because the output power of Bluetooth is less than  $P_{Ref}$  (10.8 dBm) and the closest separation distance of these antennas is larger than 2.5 cm. WLAN and BT share the same antenna, and they cannot transmit simultaneously.



## 5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Kit	SPEAG	D835V2	4d021	Mar. 23, 2011	Annual
System Validation Kit	SPEAG	D1750V2	1055	Aug. 09, 2011	Annual
System Validation Kit	SPEAG	D1900V2	5d036	Jan. 26, 2012	Annual
System Validation Kit	SPEAG	D2450V2	737	Jan. 24, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Oct. 26, 2011	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3661	Jan. 27, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3800	Aug. 05, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE3	579	Sep. 23, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE4	861	Aug. 29, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE4	1277	Jul. 29, 2011	Annual
SAM Phantom	SPEAG	QD000P40CD	TP-1652	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1485	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1202	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1653	N/A	N/A
ELI Phantom	SPEAG	QDOVA001B	TP-1043	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50266628	Sep. 26, 2011	Biennial
ENA Series Network Analyzer	Agilent	E5071C	MY46104190	Apr. 15, 2011	Annual
Signal Generator	Agilent	E8257C	MY43320668	Dec. 20, 2011	Annual
Power Meter	Anritsu	ML2487A	6K00001571	May 25, 2011	Annual
Power Sensor	Anritsu	MA2491A	030954	May 25, 2011	Annual
Dielectric Probe Kit	Agilent	85070D	N/A	N/A	N/A

## 6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
<b>Measurement System</b>						
Probe Calibration	6.0	Normal	1	1	± 6.0 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.6	Normal	1	1	± 0.6 %	∞
Response Time	0.0	Rectangular	√3	1	± 0.0 %	∞
Integration Time	1.7	Rectangular	√3	1	± 1.0 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.5	Rectangular	√3	1	± 0.3 %	∞
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %	∞
Max. SAR Eval.	2.3	Rectangular	√3	1	± 1.3 %	∞
<b>Test Sample Related</b>						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
<b>Phantom and Setup</b>						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	29
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	29
<b>Combined Standard Uncertainty</b>					± 11.7 %	
<b>Expanded Uncertainty (K=2)</b>					<b>± 23.4 %</b>	

Uncertainty budget for frequency range 300 MHz to 3 GHz



## **7. Information on the Testing Laboratories**

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site. If you have any comments, please feel free to contact us at the following:

**Taiwan HwaYa EMC/RF/Safety/Telecom Lab:**

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-318-5050

**Taiwan LinKo EMC/RF Lab:**

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

**Taiwan HsinChu EMC/RF Lab:**

Add: No. 81-1, Lu Liao Keng, 9<sup>th</sup> Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The road map of all our labs can be found in our web site also.

---END---