

## FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ46100  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Application Purpose : Original  
Receive Date : Jan. 19, 2012  
Issue Date : Feb. 23, 2012

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	Feb. 23, 2012	Initial Issue	

## Verification of Compliance

Issued Date: 02/23/2012

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ46100  
FCC ID : NM8PJ46100  
EUT Rated Voltage : DC 5.0V, 1.0A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Test Result : Complied  
Application Purpose : Original  
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.



Tel : +86-3-2710188 / Fax : +86-3-2710190

Taiwan Accreditation Foundation accreditation number:  
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .  
The test results of this report relate only to the tested sample identified in this report.

Approved By :  Reviewed By :   
(Manager) (Murphy Wang) (Testing Engineer) (Fly Lu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
	3.1. Mode of Operation.....	8
	3.2. EUT Exercise Software.....	9
	3.3. Configuration of Test System Details.....	9
	3.4. Test Site Environment.....	10
<b>4</b>	<b>Conducted Emission Measurement .....</b>	<b>11</b>
	4.1. Limit .....	11
	4.2. Test Instruments .....	11
	4.3. Test Setup.....	11
	4.4. Test Procedure.....	12
	4.5. Test Result.....	13
<b>5</b>	<b>Radiated Interference Measurement .....</b>	<b>17</b>
	5.1. Limit .....	17
	5.2. Test Instruments .....	17
	5.3. Setup .....	18
	5.4. Test Procedure.....	19
	5.5. Test Result.....	21
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>34</b>
	6.1. Limit .....	34
	6.2. Test Setup.....	34
	6.3. Test Instruments .....	34
	6.4. Test Procedure.....	34
	6.5. Test Result.....	35
<b>7</b>	<b>6dB RF Bandwidth Measurement .....</b>	<b>37</b>
	7.1. Limit .....	37
	7.2. Test Setup.....	37
	7.3. Test Instruments .....	37
	7.4. Test Procedure.....	37
	7.5. Test Result.....	38
	7.6. Test Graphs .....	40

<b>8</b>	<b>Maximum Power Density Measurement.....</b>	<b>45</b>
8.1.	Limit .....	45
8.2.	Test Setup.....	45
8.3.	Test Instruments .....	45
8.4.	Test Procedure.....	45
8.5.	Test Result.....	46
8.6.	Test Graphs .....	48
<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>53</b>
9.1.	Limit .....	53
9.2.	Test Setup.....	53
9.3.	Test Instruments .....	53
9.4.	Test Procedure.....	53
9.5.	Test Graphs .....	54
<b>10</b>	<b>Band Edges Measurement .....</b>	<b>59</b>
10.1.	Limit .....	59
10.2.	Test Setup.....	59
10.3.	Test Instruments .....	59
10.4.	Test Procedure.....	60
10.5.	Test Result.....	61
<b>11</b>	<b>99 % Occupied Bandwidth Measurement.....</b>	<b>73</b>
11.1.	Limit .....	73
11.2.	Test Setup.....	73
11.3.	Test Instruments .....	73
11.4.	Test Procedure.....	73
11.5.	Test Result.....	74
11.6.	Test Graphs .....	76
<b>12</b>	<b>Antenna Measurement.....</b>	<b>81</b>
12.1.	Limit .....	81
12.2.	Antenna Connector Construction .....	81

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	:	Smartphone
Trade Name	:	HTC
Model No.	:	PJ46100
Applicant	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Manufacturer	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
IMEI Number	:	359188040039208
FCC ID	:	NM8PJ46100
Frequency Range	:	IEEE 802.11b / 802.11g / draft 802.11n Standard-20MHz: 2412 ~ 2462 MHz IEEE 802.11a / draft 802.11n Standard-20MHz U-NII Band IV: 5745 ~ 5825 MHz
Modulation Type	:	IEEE 802.11b: DSSS IEEE 802.11g: DSSS + OFDM draft 802.11n Standard-20MHz channel mode: OFDM IEEE 802.11a U-NII Band IV: OFDM draft 802.11n Standard-20MHz U-NII Band IV: OFDM
Antenna Type	:	PIFA antenna
Antenna Gain	:	IEEE 802.11b / 802.11g / draft 802.11n Standard-20MHz: 0.15 dBi IEEE 802.11a / draft 802.11n Standard-20MHz U-NII Band IV: 1.18 dBi
RF Output Power	:	IEEE 802.11b: 0.106 W / 20.25 dBm IEEE 802.11g: 0.229 W / 23.59 dBm draft 802.11n Standard-20MHz: 0.207 W / 23.17 dBm IEEE 802.11a U-NII Band IV: 0.171 W / 22.34 dBm draft 802.11n Standard-20MHz U-NII Band IV: 0.156 W / 21.93 dBm

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: draft 802.11n Standard-20MHz Link Mode
Mode 6: IEEE 802.11a U-NII Band IV Link Mode
Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode
Mode 8: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11a mode / 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode / 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6.5Mbps data rate were chosen for full testing.




### 3.2. EUT Exercise Software


1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

#### Conducted Emission

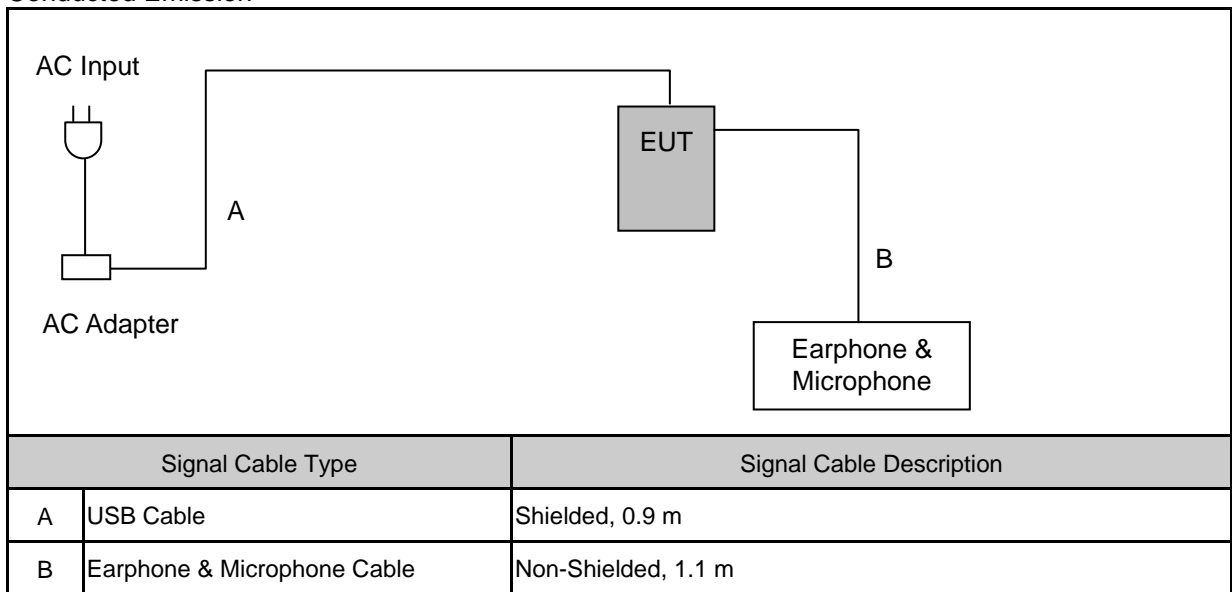

#### Radiated Emission

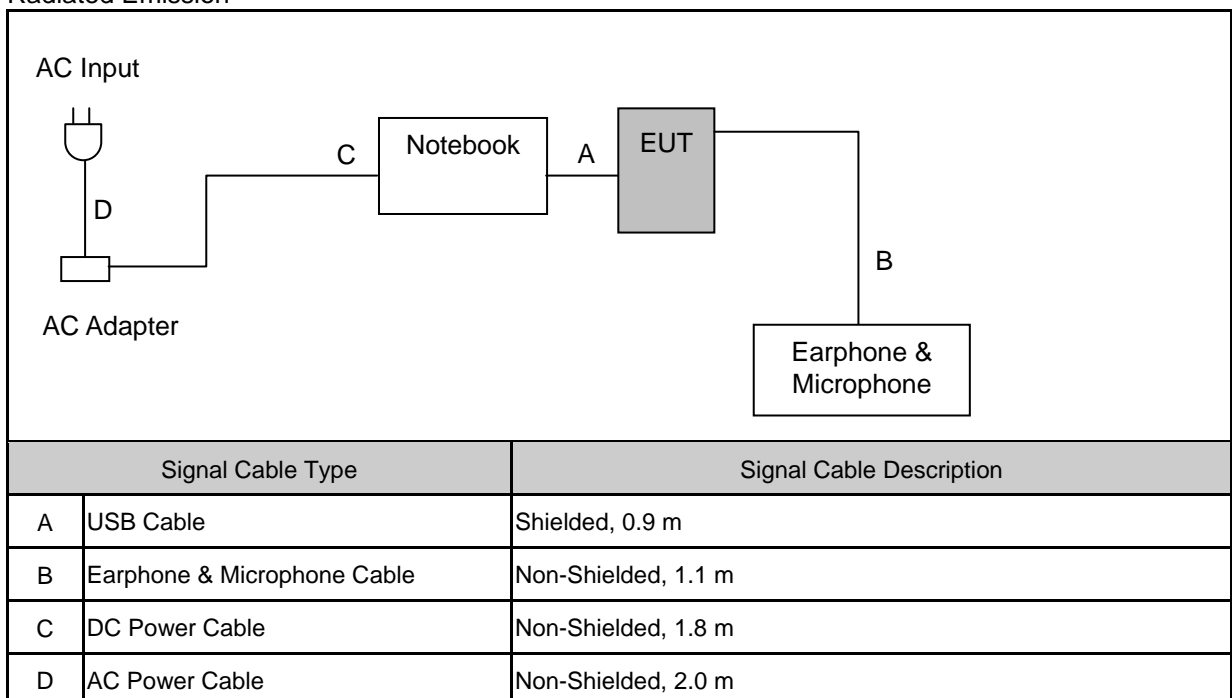

**3.4. Test Site Environment**

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

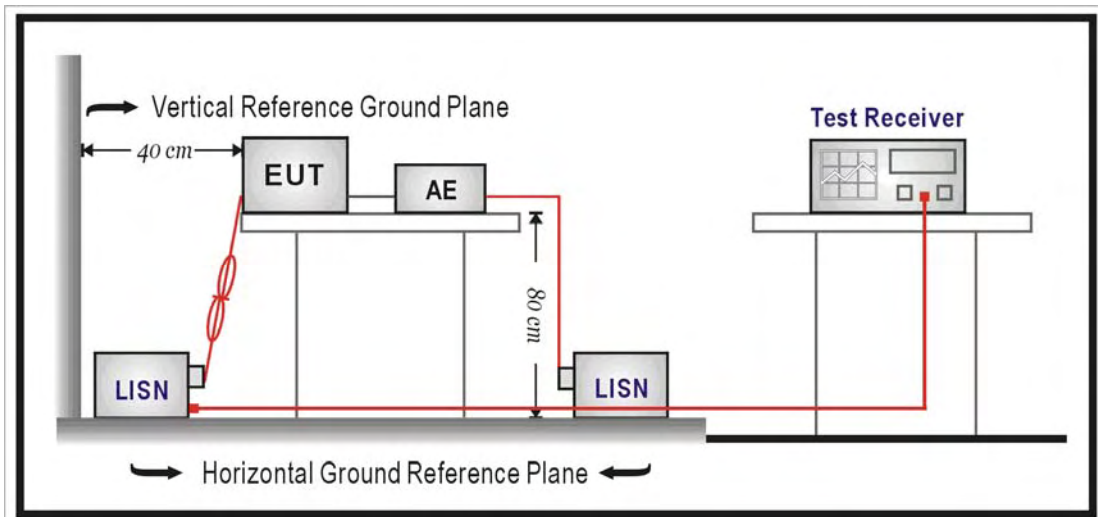

#### **4.4. Test Procedure**


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 1	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

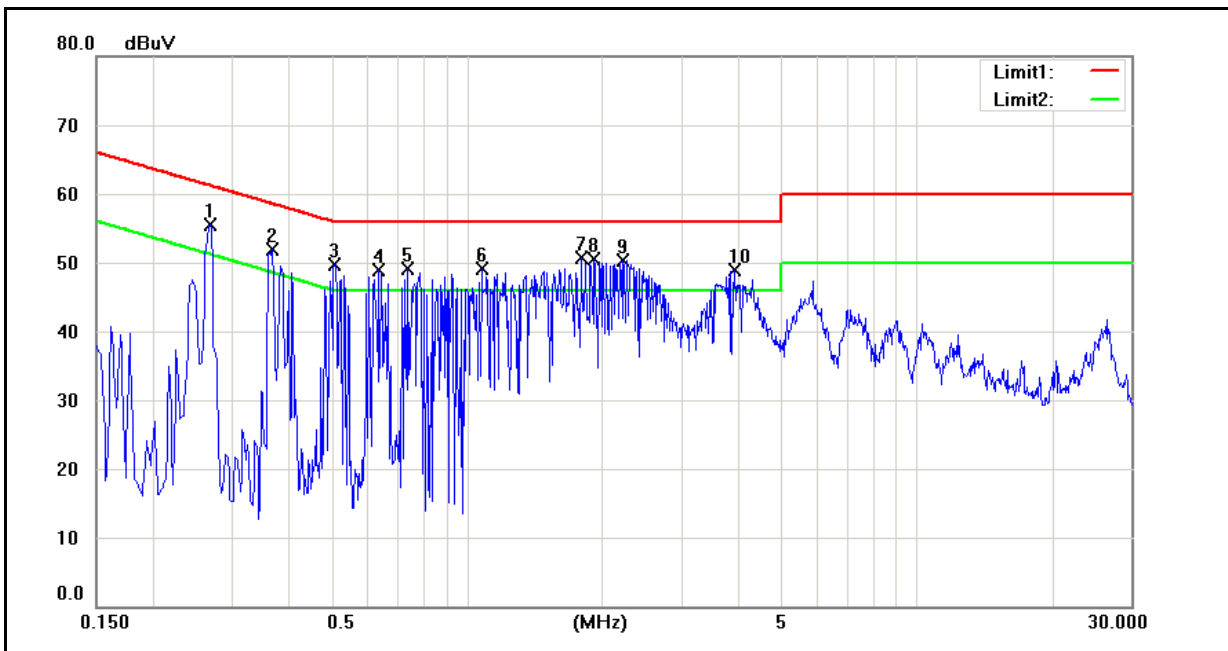


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2700	41.17	18.01	9.59	50.76	27.60	61.12	51.12	-10.36	-23.52	Pass
2	0.3700	37.35	19.23	9.59	46.94	28.82	58.50	48.50	-11.56	-19.68	Pass
3	0.5100	35.22	15.65	9.59	44.81	25.24	56.00	46.00	-11.19	-20.76	Pass
4	0.6380	34.53	13.61	9.60	44.13	23.21	56.00	46.00	-11.87	-22.79	Pass
5	0.7420	34.07	13.64	9.61	43.68	23.25	56.00	46.00	-12.32	-22.75	Pass
6	1.0780	31.38	10.54	9.63	41.01	20.17	56.00	46.00	-14.99	-25.83	Pass
7	1.7980	32.55	12.97	9.66	42.21	22.63	56.00	46.00	-13.79	-23.37	Pass
8	1.9220	34.44	15.82	9.67	44.11	25.49	56.00	46.00	-11.89	-20.51	Pass
9	2.2300	34.26	17.42	9.67	43.93	27.09	56.00	46.00	-12.07	-18.91	Pass
10	3.9540	30.79	10.17	9.66	40.45	19.83	56.00	46.00	-15.55	-26.17	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 1	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

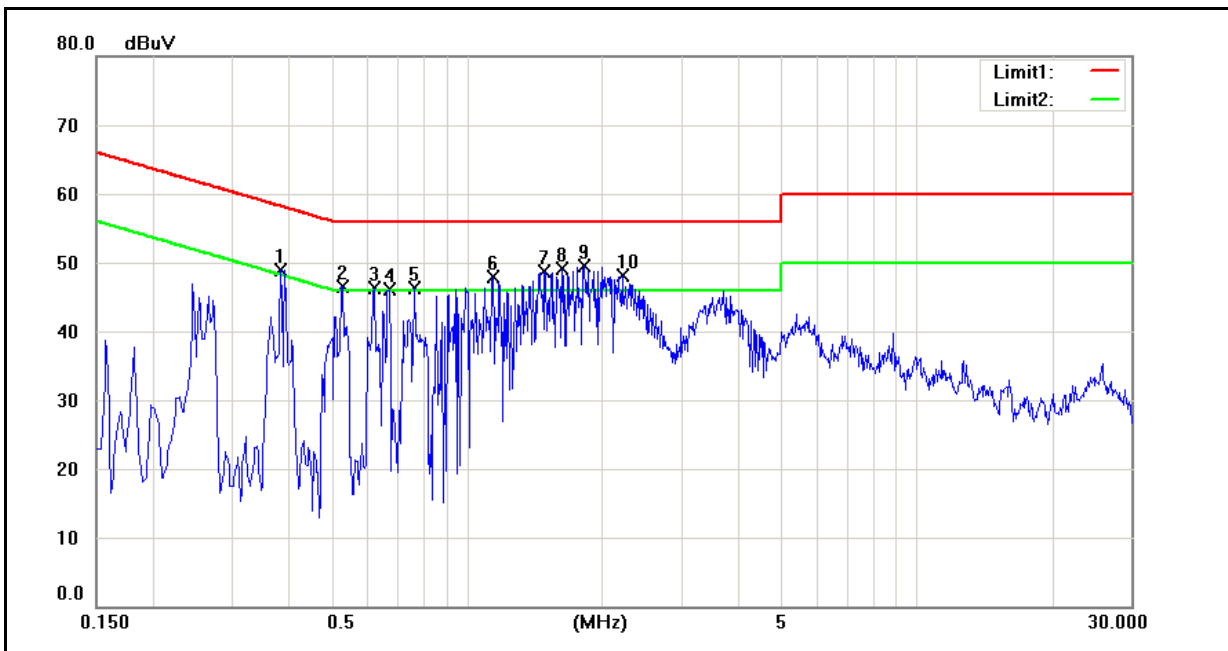


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.3860	34.88	16.71	9.67	44.55	26.38	58.15	48.15	-13.60	-21.77	Pass
2	0.5300	32.14	14.43	9.67	41.81	24.10	56.00	46.00	-14.19	-21.90	Pass
3	0.6260	31.61	13.98	9.68	41.29	23.66	56.00	46.00	-14.71	-22.34	Pass
4	0.6740	30.28	13.53	9.68	39.96	23.21	56.00	46.00	-16.04	-22.79	Pass
5	0.7660	31.10	14.66	9.69	40.79	24.35	56.00	46.00	-15.21	-21.65	Pass
6	1.1460	31.51	12.88	9.70	41.21	22.58	56.00	46.00	-14.79	-23.42	Pass
7	1.4940	34.25	21.16	9.71	43.96	30.87	56.00	46.00	-12.04	-15.13	Pass
8	1.6300	34.43	18.36	9.72	44.15	28.08	56.00	46.00	-11.85	-17.92	Pass
9	1.8220	33.96	20.16	9.72	43.68	29.88	56.00	46.00	-12.32	-16.12	Pass
10	2.2180	32.36	18.13	9.73	42.09	27.86	56.00	46.00	-13.91	-18.14	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 2	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

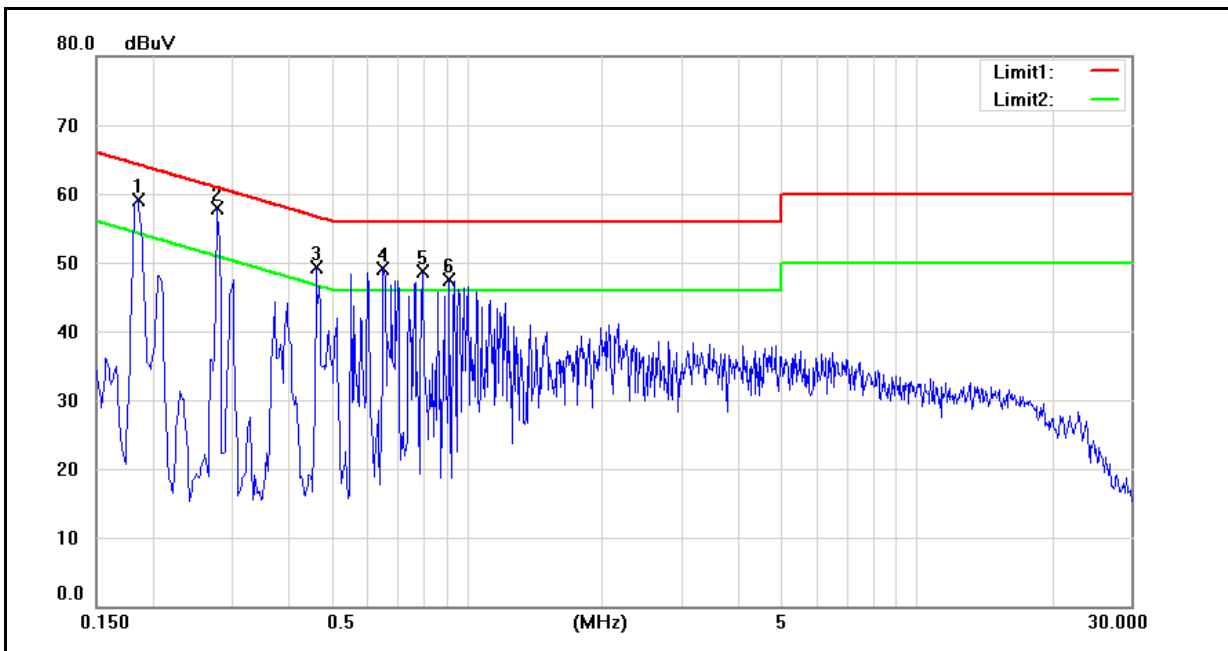

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1860	50.40	29.57	9.59	59.99	39.16	64.21	54.21	-4.22	-15.05	Pass
2	0.2780	42.33	18.13	9.59	51.92	27.72	60.88	50.88	-8.96	-23.16	Pass
3	0.4620	34.77	12.53	9.59	44.36	22.12	56.66	46.66	-12.30	-24.54	Pass
4	0.6540	35.13	16.90	9.60	44.73	26.50	56.00	46.00	-11.27	-19.50	Pass
5	0.7980	36.39	16.70	9.62	46.01	26.32	56.00	46.00	-9.99	-19.68	Pass
6	0.9140	35.05	15.02	9.62	44.67	24.64	56.00	46.00	-11.33	-21.36	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 2	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

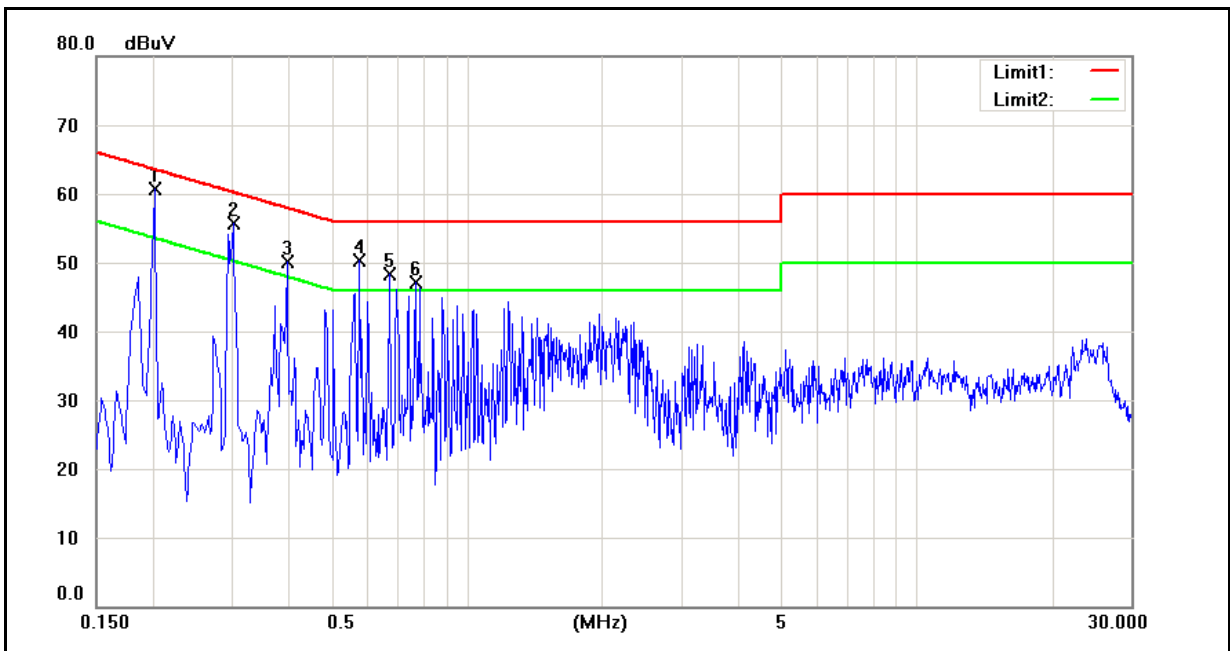

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2020	47.89	26.93	9.67	57.56	36.60	63.53	53.53	-5.97	-16.93	Pass
2	0.3020	41.38	18.32	9.67	51.05	27.99	60.19	50.19	-9.14	-22.20	Pass
3	0.3980	37.50	18.20	9.67	47.17	27.87	57.90	47.90	-10.73	-20.03	Pass
4	0.5780	36.39	14.80	9.67	46.06	24.47	56.00	46.00	-9.94	-21.53	Pass
5	0.6740	35.43	15.85	9.68	45.11	25.53	56.00	46.00	-10.89	-20.47	Pass
6	0.7700	35.48	16.22	9.69	45.17	25.91	56.00	46.00	-10.83	-20.09	Pass



## 5 Radiated Emission Measurement

### 5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

### 5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/16/2012	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/16/2012	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/23/2011	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/29/2011	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/29/2011	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/28/2011	(1)
Test Site	ATL	TE01	888001	12/20/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

Below 1GHz

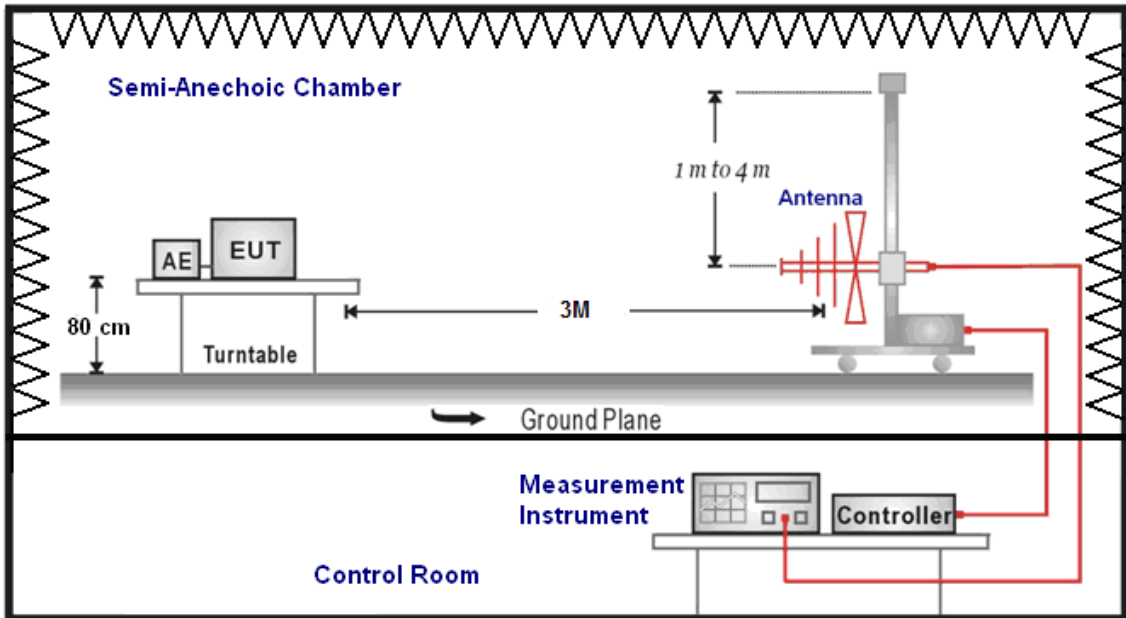

Above 1GHz

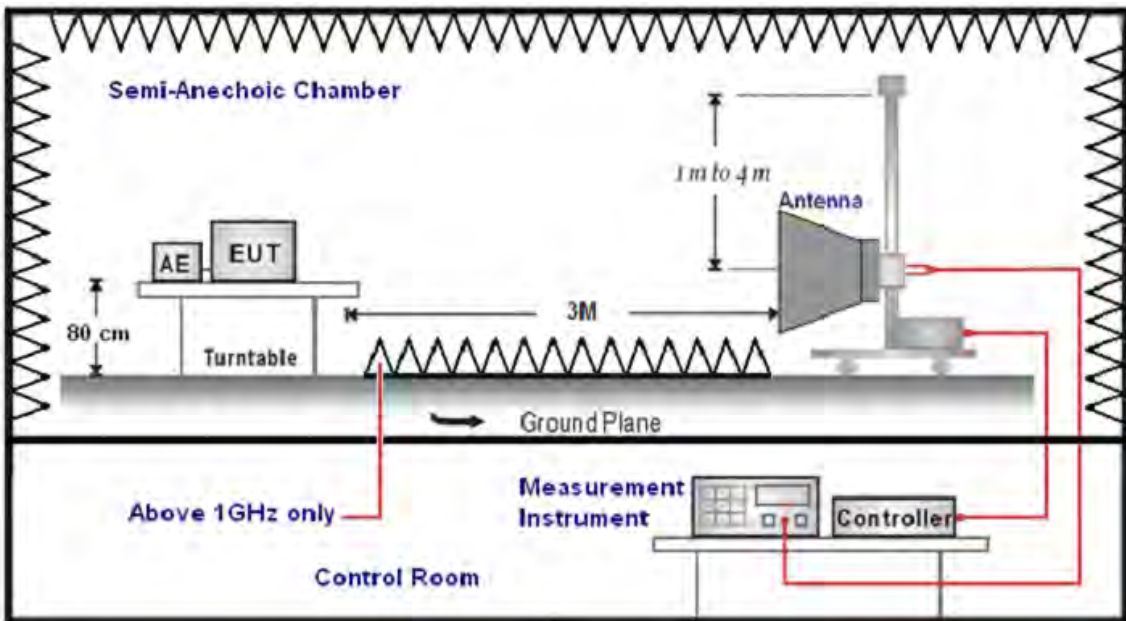

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

ETS-Lindgren Double-Ridged Waveguide Horn (mode 3117) at 3 Meter and the SCHWARZBECK Trilog-Broadband Antenna (model SB AC VULB) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 5.5. Test Result


### Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	02/18/2012
Ant.Polar.:	Horizontal	Test By:	Fly Lu

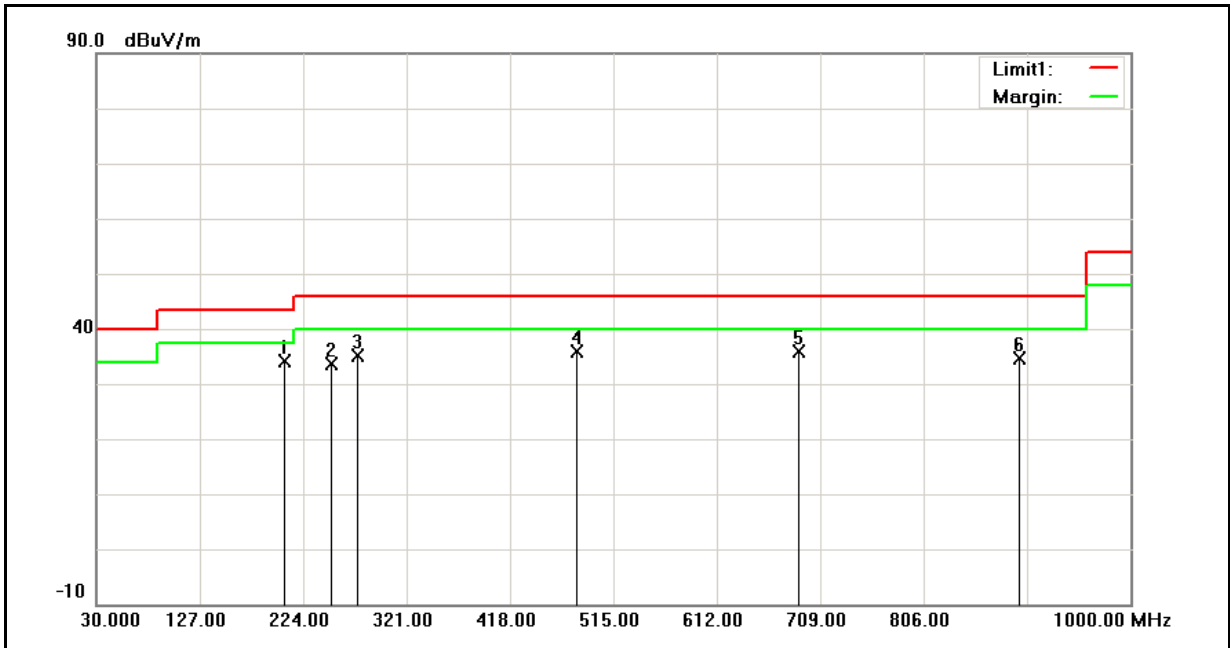

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	207.0000	48.08	-14.05	34.03	43.50	-9.47	QP
2	251.0000	45.64	-11.93	33.71	46.00	-12.29	QP
3	276.0000	46.46	-11.28	35.18	46.00	-10.82	QP
4	481.5000	43.68	-7.72	35.96	46.00	-10.04	QP
5	689.5000	39.42	-3.56	35.86	46.00	-10.14	QP
6	897.0000	34.46	0.12	34.58	46.00	-11.42	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	02/18/2012
Ant.Polar.:	Vertical	Test By:	Fly Lu

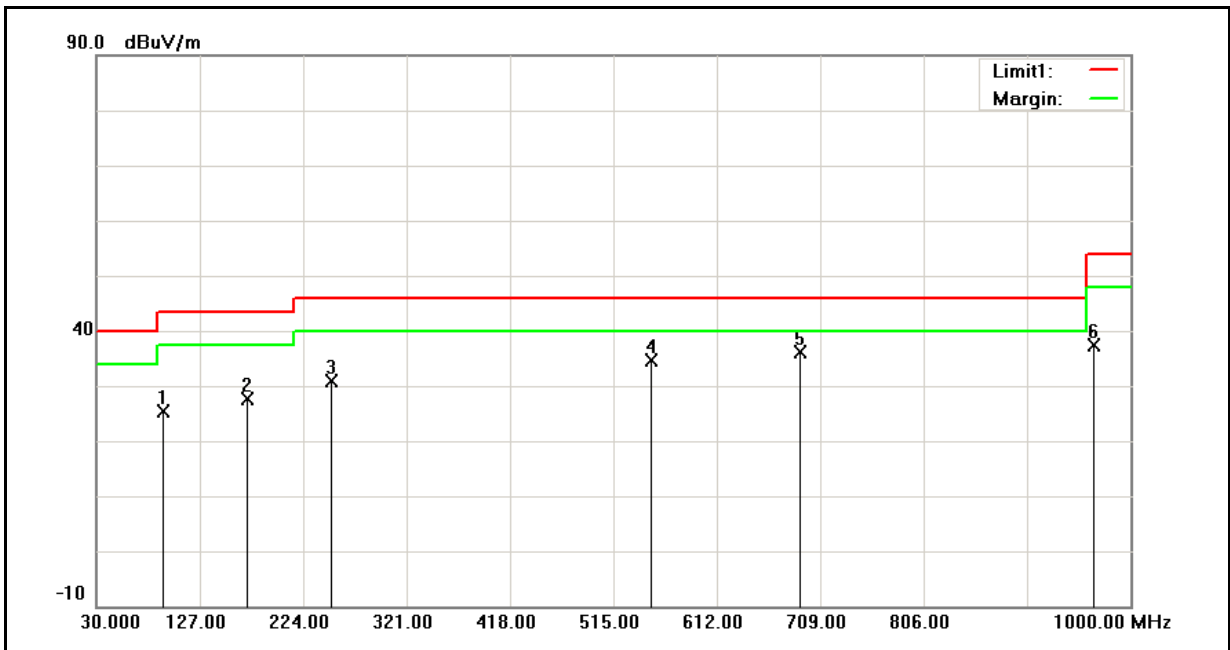

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	92.5000	40.63	-15.36	25.27	43.50	-18.23	QP
2	172.5000	43.39	-15.88	27.51	43.50	-15.99	QP
3	250.5000	42.81	-11.94	30.87	46.00	-15.13	QP
4	550.0000	41.07	-6.36	34.71	46.00	-11.29	QP
5	690.0000	39.65	-3.56	36.09	46.00	-9.91	QP
6	966.0000	36.09	1.17	37.26	54.00	-16.74	QP

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/18/2012		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	52.67	-4.07	48.60	74.00	-25.40	peak	H
4619.000	37.39	7.32	44.71	74.00	-29.29	peak	H
6789.000	33.81	14.03	47.84	74.00	-26.16	peak	H
1378.000	52.99	-4.49	48.50	74.00	-25.50	peak	V
4824.000	38.17	7.95	46.12	74.00	-27.88	peak	V
6670.000	36.64	13.63	50.27	74.00	-23.73	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/18/2012		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1441.000	52.94	-4.11	48.83	74.00	-25.17	peak	H
4874.000	37.60	8.11	45.71	74.00	-28.29	peak	H
7447.000	32.73	16.07	48.80	74.00	-25.20	peak	H
1448.000	52.51	-4.07	48.44	74.00	-25.56	peak	V
4874.000	40.73	8.11	48.84	74.00	-25.16	peak	V
7923.000	33.68	16.79	50.47	74.00	-23.53	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/18/2012		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1441.000	53.94	-4.11	49.83	74.00	-24.17	peak	H
4927.000	37.05	8.28	45.33	74.00	-28.67	peak	H
7587.000	34.00	16.34	50.34	74.00	-23.66	peak	H
3002.000	41.44	2.20	43.64	74.00	-30.36	peak	V
4924.000	40.19	8.26	48.45	74.00	-25.55	peak	V
7342.000	34.35	15.75	50.10	74.00	-23.90	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	02/18/2012		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	50.65	-4.07	46.58	74.00	-27.42	peak	H
3870.000	39.56	4.80	44.36	74.00	-29.64	peak	H
7090.000	33.66	14.99	48.65	74.00	-25.35	peak	H
1378.000	52.09	-4.49	47.60	74.00	-26.40	peak	V
5809.000	37.00	10.52	47.52	74.00	-26.48	peak	V
7293.000	32.66	15.59	48.25	74.00	-25.75	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	02/18/2012		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	51.32	-4.07	47.25	74.00	-26.75	peak	H
5179.000	35.84	9.03	44.87	74.00	-29.13	peak	H
7531.000	33.72	16.26	49.98	74.00	-24.02	peak	H
1448.000	52.40	-4.07	48.33	74.00	-25.67	peak	V
4850.000	36.71	8.04	44.75	74.00	-29.25	peak	V
6621.000	35.56	13.49	49.05	74.00	-24.95	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 4	Date:	02/18/2012				
Frequency:	2462MHz	Test By:	Fly Lu				
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	52.01	-4.07	47.94	74.00	-26.06	peak	H
4276.000	38.72	6.23	44.95	74.00	-29.05	peak	H
6551.000	36.15	13.26	49.41	74.00	-24.59	peak	H
1448.000	52.25	-4.07	48.18	74.00	-25.82	peak	V
4612.000	36.83	7.30	44.13	74.00	-29.87	peak	V
7027.000	35.67	14.79	50.46	74.00	-23.54	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/18/2012		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	53.07	-4.07	49.00	74.00	-25.00	peak	H
4612.000	38.93	7.30	46.23	74.00	-27.77	peak	H
7447.000	34.62	16.07	50.69	74.00	-23.31	peak	H
1448.000	51.22	-4.07	47.15	74.00	-26.85	peak	V
5648.000	35.80	10.25	46.05	74.00	-27.95	peak	V
6887.000	35.14	14.34	49.48	74.00	-24.52	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/18/2012		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1448.000	52.84	-4.07	48.77	74.00	-25.23	peak	H
5116.000	36.20	8.84	45.04	74.00	-28.96	peak	H
7314.000	32.82	15.67	48.49	74.00	-25.51	peak	H
1448.000	52.16	-4.07	48.09	74.00	-25.91	peak	V
5109.000	36.78	8.83	45.61	74.00	-28.39	peak	V
7377.000	34.70	15.85	50.55	74.00	-23.45	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/18/2012		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1441.000	52.72	-4.11	48.61	74.00	-25.39	peak	H
5963.000	35.45	10.79	46.24	74.00	-27.76	peak	H
7027.000	34.23	14.79	49.02	74.00	-24.98	peak	H
1448.000	52.20	-4.07	48.13	74.00	-25.87	peak	V
4822.000	38.39	7.95	46.34	74.00	-27.66	peak	V
7307.000	33.91	15.65	49.56	74.00	-24.44	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6			Date:	02/19/2012		
Frequency:	5745MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3275.000	39.07	2.81	41.88	74.00	-32.12	peak	H
5046.000	34.89	8.64	43.53	74.00	-30.47	peak	H
7895.000	33.24	16.75	49.99	74.00	-24.01	peak	H
2323.000	46.13	-0.35	45.78	74.00	-28.22	peak	V
5228.000	36.60	9.18	45.78	74.00	-28.22	peak	V
7839.000	33.34	16.68	50.02	74.00	-23.98	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6			Date:	02/19/2012		
Frequency:	5785MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2393.000	46.04	-0.04	46.00	74.00	-28.00	peak	H
5606.000	35.62	10.18	45.80	74.00	-28.20	peak	H
7846.000	32.94	16.69	49.63	74.00	-24.37	peak	H
4661.000	36.99	7.45	44.44	74.00	-29.56	peak	V
6656.000	34.71	13.59	48.30	74.00	-25.70	peak	V
7307.000	33.13	15.65	48.78	74.00	-25.22	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 6	Date:	02/19/2012				
Frequency:	5825MHz	Test By:	Fly Lu				
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2001.000	44.75	-1.79	42.96	74.00	-31.04	peak	H
5263.000	37.01	9.28	46.29	74.00	-27.71	peak	H
7167.000	33.81	15.22	49.03	74.00	-24.97	peak	H
3191.000	41.83	2.62	44.45	74.00	-29.55	peak	V
4780.000	37.25	7.81	45.06	74.00	-28.94	peak	V
7818.000	32.71	16.65	49.36	74.00	-24.64	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 7			Date:	02/19/2012		
Frequency:	5745MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3905.000	36.34	4.95	41.29	74.00	-32.71	peak	H
5711.000	34.88	10.36	45.24	74.00	-28.76	peak	H
7398.000	33.26	15.93	49.19	74.00	-24.81	peak	H
3422.000	37.08	3.13	40.21	74.00	-33.79	peak	V
5326.000	33.70	9.47	43.17	74.00	-30.83	peak	V
7965.000	32.80	16.84	49.64	74.00	-24.36	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 7			Date:	02/19/2012		
Frequency:	5785MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3597.000	35.83	3.70	39.53	74.00	-34.47	peak	H
5361.000	33.90	9.57	43.47	74.00	-30.53	peak	H
7573.000	32.21	16.32	48.53	74.00	-25.47	peak	H
3541.000	36.28	3.47	39.75	74.00	-34.25	peak	V
5473.000	33.66	9.91	43.57	74.00	-30.43	peak	V
6873.000	34.56	14.30	48.86	74.00	-25.14	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 7	Date:	02/19/2012				
Frequency:	5825MHz	Test By:	Fly Lu				
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4542.000	35.78	7.09	42.87	74.00	-31.13	peak	H
5865.000	33.35	10.62	43.97	74.00	-30.03	peak	H
6817.000	33.75	14.12	47.87	74.00	-26.13	peak	H
2778.000	37.23	1.42	38.65	74.00	-35.35	peak	V
4843.000	35.59	8.01	43.60	74.00	-30.40	peak	V
7979.000	32.80	16.85	49.65	74.00	-24.35	peak	V



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 8	Date:	02/19/2012
Modulation:	IEEE 802.11b	Test By:	Fly Lu
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1441.000	51.43	-4.11	47.32	74.00	54.00	-26.68	peak	H
3786.000	37.54	4.46	42.00	74.00	54.00	-32.00	peak	H
6285.000	34.66	12.13	46.79	74.00	54.00	-27.21	peak	H
1658.000	53.33	-3.14	50.19	74.00	54.00	-23.81	peak	V
4024.000	37.76	5.40	43.16	74.00	54.00	-30.84	peak	V
6516.000	35.02	13.15	48.17	74.00	54.00	-25.83	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 8	Date:	02/19/2012
Modulation:	IEEE 802.11a U-NII Band IV	Test By:	Fly Lu
Frequency:	5785MHz		


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3163.000	37.23	2.57	39.80	74.00	54.00	-34.20	peak	H
6537.000	34.29	13.21	47.50	74.00	54.00	-26.50	peak	H
7307.000	33.38	15.65	49.03	74.00	54.00	-24.97	peak	H
4346.000	35.99	6.45	42.44	74.00	54.00	-31.56	peak	V
5837.000	35.06	10.58	45.64	74.00	54.00	-28.36	peak	V
7888.000	34.39	16.74	51.13	74.00	54.00	-22.87	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

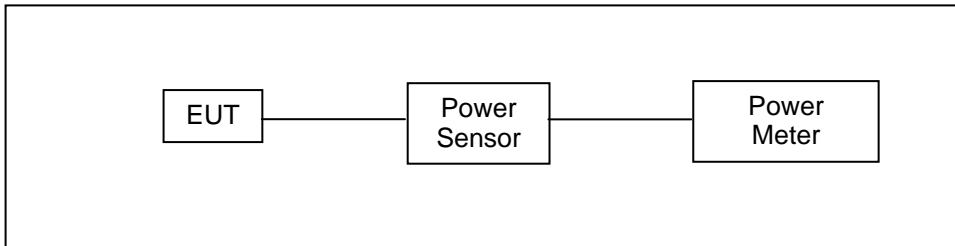

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to  $(\text{GAIN} - 6)/3$  dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11b Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1 M	17.85	0.061	20.02	0.100	< 30
2437		17.95	0.062	20.02	0.100	< 30
2462		18.22	0.066	<b>20.25</b>	<b>0.106</b>	< 30

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11g Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6 M	12.31	0.017	22.62	0.183	< 30
2437		12.50	0.018	23.21	0.209	< 30
2462		12.71	0.019	<b>23.59</b>	<b>0.229</b>	< 30

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6.5 M	11.08	0.013	21.17	0.131	< 30
2437		11.50	0.014	<b>23.17</b>	<b>0.207</b>	< 30
2462		11.37	0.014	22.14	0.164	< 30

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 6: IEEE 802.11a U-NII Band IV Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5745	6 M	11.44	0.014	<b>22.34</b>	<b>0.171</b>	< 30
5785		11.46	0.014	21.90	0.155	< 30
5825		11.36	0.014	21.78	0.151	< 30


Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5745	6.5 M	10.27	0.011	<b>21.93</b>	<b>0.156</b>	< 30
5785		10.36	0.011	21.66	0.147	< 30
5825		10.49	0.011	21.87	0.154	< 30

## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

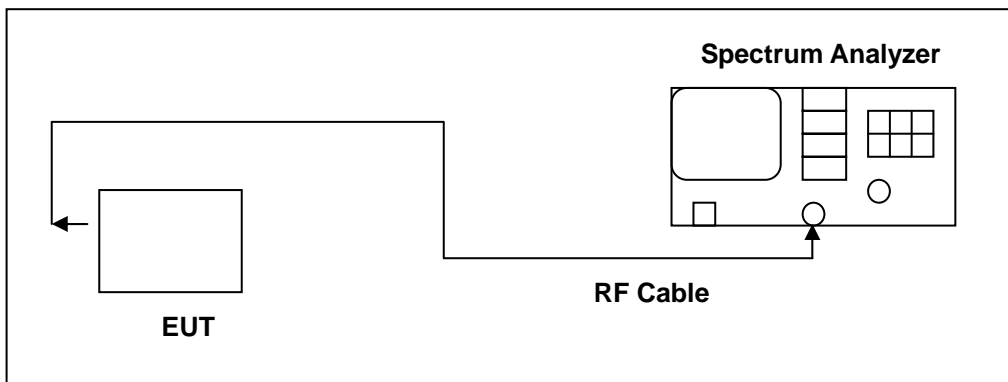

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

**7.5. Test Result**

Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	9246	> 500	
2437	9247	> 500	
2462	9245	> 500	

Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	16007	> 500	
2437	15910	> 500	
2462	16074	> 500	

Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	17221	> 500	
2437	17321	> 500	
2462	17354	> 500	

Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 6: IEEE 802.11a U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	5745	15981	> 500
	5785	15994	> 500
	5825	16010	> 500




Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	5745	17166	> 500
	5785	17285	> 500
	5825	17305	> 500

**7.6. Test Graphs**

Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	



Mode 4: IEEE 802.11g Link Mode

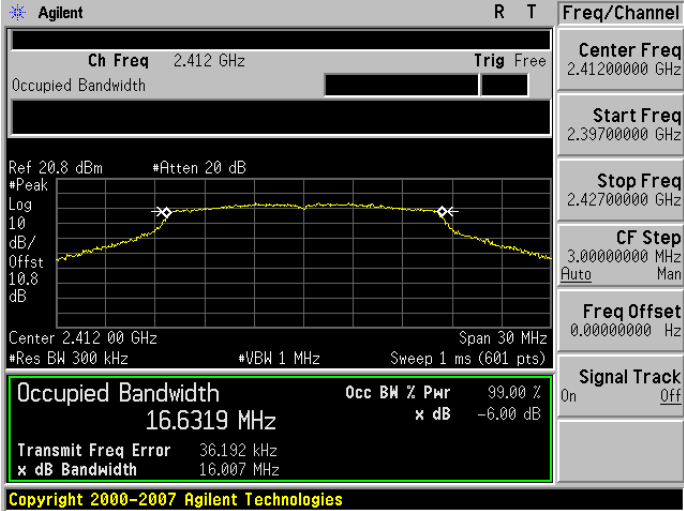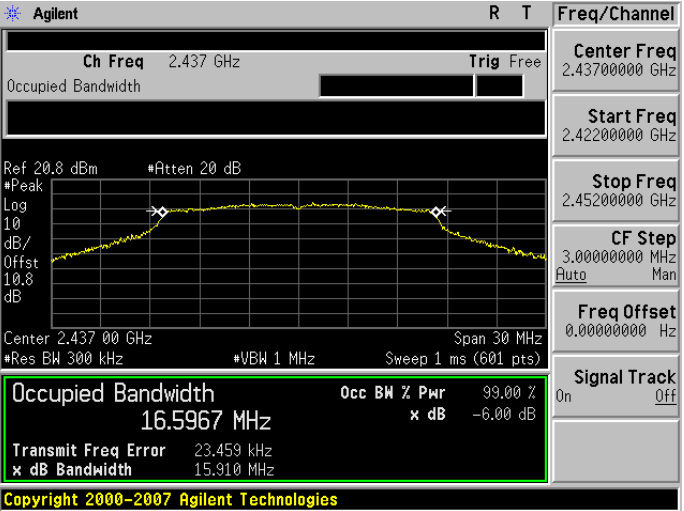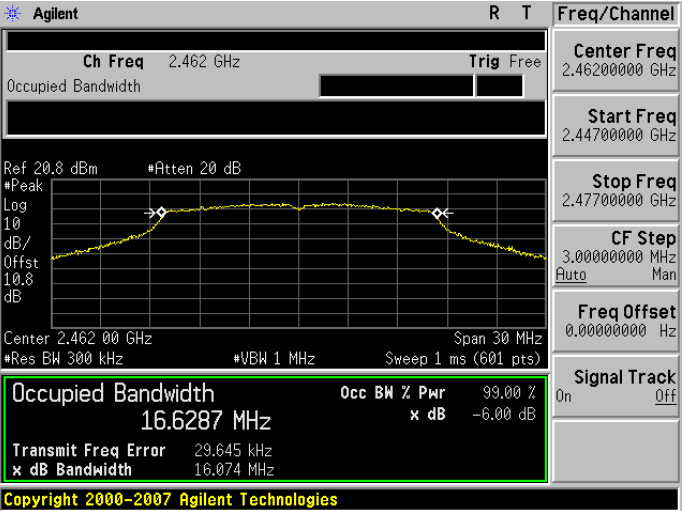2412	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.6319 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 36.192 kHz</p> <p>x dB Bandwidth 16.007 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2437	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.5967 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 23.459 kHz</p> <p>x dB Bandwidth 15.910 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2462	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.6287 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 29.645 kHz</p> <p>x dB Bandwidth 16.074 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

2412	
2437	
2462	

Mode 6: IEEE 802.11a U-NII Band IV Link Mode

<p>5745</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/ Offst 11.3 dB</p> <p>Center 5.745 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6935 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.506 kHz x dB Bandwidth 15.981 MHz</p> <p>Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.73000000 GHz Stop Freq 5.76000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
<p>5785</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/ Offst 11.3 dB</p> <p>Center 5.785 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6802 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 19.539 kHz x dB Bandwidth 15.994 MHz</p> <p>Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.77000000 GHz Stop Freq 5.80000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
<p>5825</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/ Offst 11.3 dB</p> <p>Center 5.825 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6434 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 23.474 kHz x dB Bandwidth 16.010 MHz</p> <p>Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.81000000 GHz Stop Freq 5.84000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode


<p>5745</p>	
<p>5785</p>	
<p>5825</p>	

## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

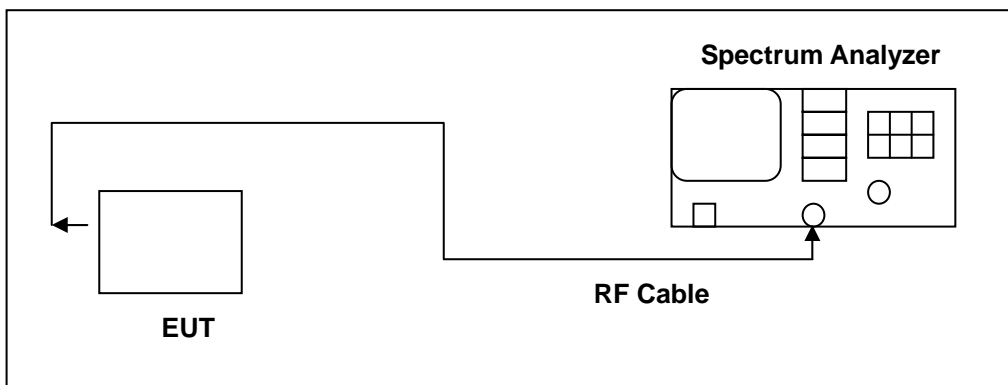

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

**8.5. Test Result**

Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-2.78	< 8	
2437	-2.57	< 8	
2462	-4.08	< 8	




Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-11.73	< 8	
2437	-10.30	< 8	
2462	-11.06	< 8	

Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	02/02/2012	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-12.69	< 8	
2437	-12.51	< 8	
2462	-11.88	< 8	

Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 6: IEEE 802.11a U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	5745	-14.55	< 8
	5785	-14.38	< 8
	5825	-15.49	< 8

Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	5745	-15.57	< 8
	5785	-15.04	< 8
	5825	-14.82	< 8

8.6. Test Graphs

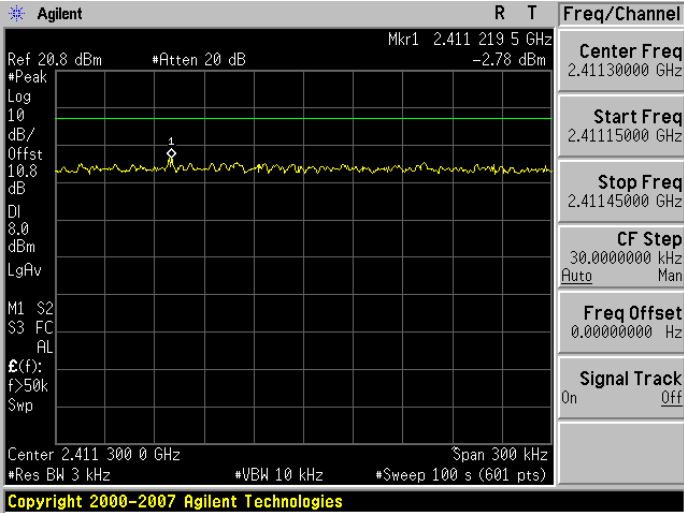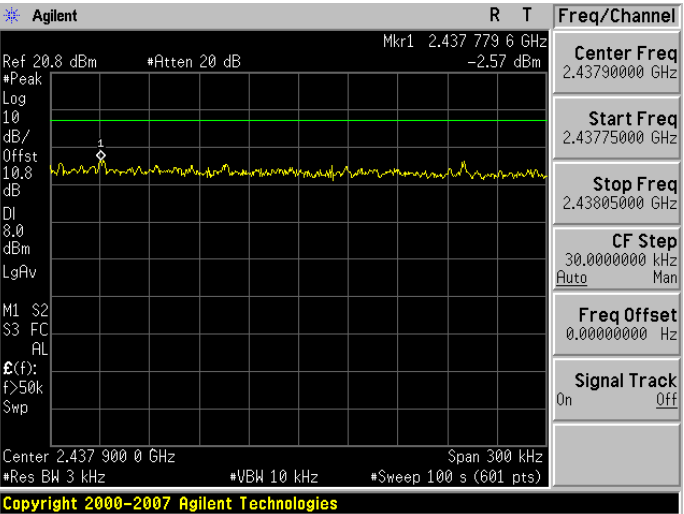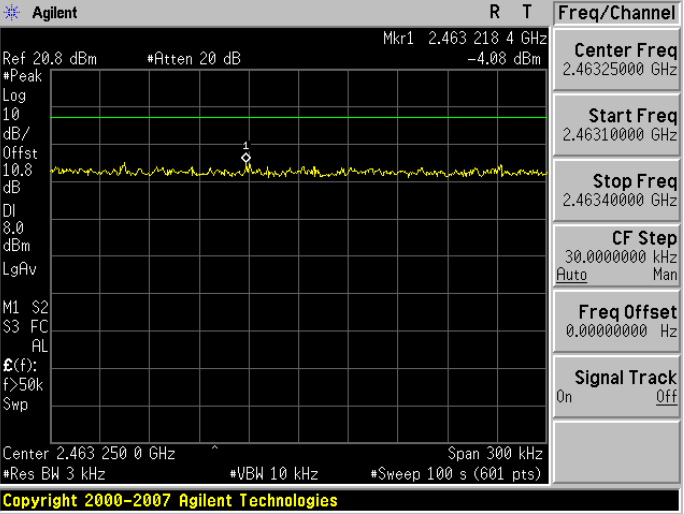Mode 3: IEEE 802.11b Link Mode	
2412	 <p>Agilent R T Freq/Channel  Mkr1 2.411 219 5 GHz  -2.78 dBm  Center Freq 2.41130000 GHz  Start Freq 2.41115000 GHz  Stop Freq 2.41145000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Center 2.411 300 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2437	 <p>Agilent R T Freq/Channel  Mkr1 2.437 779 6 GHz  -2.57 dBm  Center Freq 2.43790000 GHz  Start Freq 2.43775000 GHz  Stop Freq 2.43805000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Center 2.437 900 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2462	 <p>Agilent R T Freq/Channel  Mkr1 2.463 218 4 GHz  -4.08 dBm  Center Freq 2.46325000 GHz  Start Freq 2.46310000 GHz  Stop Freq 2.46340000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Center 2.463 250 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>



Mode 4: IEEE 802.11g Link Mode	
2412	<p>Agilent R T Freq/Channel  Mkr1 2.412 608 3 GHz  Center Freq 2.41265000 GHz  Start Freq 2.41250000 GHz  Stop Freq 2.41280000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Ref 20.8 dBm #Atten 20 dB  #Peak  Log  10  dB/  Offst  10.8  dB  DI  8.0  dBm  LgAv  M1 S2  S3 FC  AL  <math>\mathcal{E}(f)</math>:  f&gt;50k  Swp  Center 2.412 650 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2437	<p>Agilent R T Freq/Channel  Mkr1 2.436 081 6 GHz  Center Freq 2.43605000 GHz  Start Freq 2.43590000 GHz  Stop Freq 2.43620000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Ref 20.8 dBm #Atten 20 dB  #Peak  Log  10  dB/  Offst  10.8  dB  DI  8.0  dBm  LgAv  M1 S2  S3 FC  AL  <math>\mathcal{E}(f)</math>:  f&gt;50k  Swp  Center 2.436 050 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2462	<p>Agilent R T Freq/Channel  Mkr1 2.465 499 0 GHz  Center Freq 2.46550000 GHz  Start Freq 2.46535000 GHz  Stop Freq 2.46565000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.00000000 Hz  Signal Track On Off  Ref 20.8 dBm #Atten 20 dB  #Peak  Log  10  dB/  Offst  10.8  dB  DI  8.0  dBm  LgAv  M1 S2  S3 FC  AL  <math>\mathcal{E}(f)</math>:  f&gt;50k  Swp  Center 2.465 500 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

2412	<p>Agilent R T Freq/Channel  Mkr1 2.410 412 0 GHz  -12.69 dBm  Center Freq 2.4105000 GHz  Start Freq 2.4103500 GHz  Stop Freq 2.4106500 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.0000000 Hz  Signal Track On Off  Center 2.410 500 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2437	<p>Agilent R T Freq/Channel  Mkr1 2.440 426 6 GHz  -12.51 dBm  Center Freq 2.4404000 GHz  Start Freq 2.4402500 GHz  Stop Freq 2.4405500 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.0000000 Hz  Signal Track On Off  Center 2.440 400 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>
2462	<p>Agilent R T Freq/Channel  Mkr1 2.465 463 1 GHz  -11.88 dBm  Center Freq 2.4654500 GHz  Start Freq 2.4653000 GHz  Stop Freq 2.4656000 GHz  CF Step 30.0000000 kHz  Auto Man  Freq Offset 0.0000000 Hz  Signal Track On Off  Center 2.465 450 0 GHz Span 300 kHz  #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)  Copyright 2000-2007 Agilent Technologies</p>

Mode 6: IEEE 802.11a U-NII Band IV Link Mode

5745	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 5.748 502 7 GHz #Peak -14.55 dBm Center Freq 5.74841667 GHz</p> <p>Start Freq 5.74826667 GHz</p> <p>Stop Freq 5.74856667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 5.748 416 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
5785	<p>Agilent R L Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 5.788 128 1 GHz #Peak -14.38 dBm Center Freq 5.78810000 GHz</p> <p>Start Freq 5.78795000 GHz</p> <p>Stop Freq 5.78825000 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 5.788 100 0 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
5825	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 5.821 522 4 GHz #Peak -15.49 dBm Center Freq 5.82155000 GHz</p> <p>Start Freq 5.82140000 GHz</p> <p>Stop Freq 5.82170000 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 5.821 550 0 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode


<p>5745</p>	<p>Agilent R T Freq/Channel          Mkr1 5.743 175 5 GHz          Ref 20 dBm Atten 20 dB          #Peak -15.57 dBm          Center Freq 5.74310000 GHz          Start Freq 5.74295000 GHz          Stop Freq 5.74325000 GHz          CF Step 30.0000000 kHz          Freq Offset 0.00000000 Hz          Signal Track On Off          Center 5.743 100 0 GHz Span 300 kHz          #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)          Copyright 2000-2005 Agilent Technologies</p>
<p>5785</p>	<p>Agilent R L Freq/Channel          Mkr1 5.787 503 4 GHz          Ref 20 dBm Atten 20 dB          #Peak -15.04 dBm          Center Freq 5.78755000 GHz          Start Freq 5.78740000 GHz          Stop Freq 5.78770000 GHz          CF Step 30.0000000 kHz          Freq Offset 0.00000000 Hz          Signal Track On Off          Center 5.787 550 0 GHz Span 300 kHz          #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)          Copyright 2000-2005 Agilent Technologies</p>
<p>5825</p>	<p>Agilent R T Freq/Channel          Mkr1 5.822 503 3 GHz          Ref 20 dBm Atten 20 dB          #Peak -14.82 dBm          Center Freq 5.82255000 GHz          Start Freq 5.82240000 GHz          Stop Freq 5.82270000 GHz          CF Step 30.0000000 kHz          Freq Offset 0.00000000 Hz          Signal Track On Off          Center 5.822 550 0 GHz Span 300 kHz          #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)          Copyright 2000-2005 Agilent Technologies</p>

## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

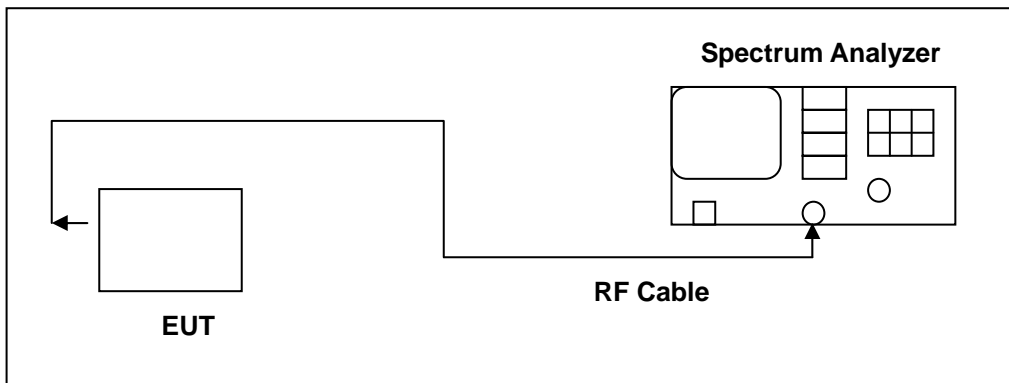

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)

9.5. Test Graphs

Mode 3: IEEE 802.11b Link Mode																																																																																																																						
2412	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 GHz</td> <td>5.976 dBm</td> <td></td> <td></td> <td></td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>12</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 GHz	5.976 dBm				2									3									4									5									6									7									8									9									10									11									12								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																														
1	N	1	f	2.412 GHz	5.976 dBm																																																																																																																	
2																																																																																																																						
3																																																																																																																						
4																																																																																																																						
5																																																																																																																						
6																																																																																																																						
7																																																																																																																						
8																																																																																																																						
9																																																																																																																						
10																																																																																																																						
11																																																																																																																						
12																																																																																																																						
2437	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 GHz</td> <td>6.928 dBm</td> <td></td> <td></td> <td></td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>12</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 GHz	6.928 dBm				2									3									4									5									6									7									8									9									10									11									12								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																														
1	N	1	f	2.437 GHz	6.928 dBm																																																																																																																	
2																																																																																																																						
3																																																																																																																						
4																																																																																																																						
5																																																																																																																						
6																																																																																																																						
7																																																																																																																						
8																																																																																																																						
9																																																																																																																						
10																																																																																																																						
11																																																																																																																						
12																																																																																																																						
2462	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.462 GHz</td> <td>5.697 dBm</td> <td></td> <td></td> <td></td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>12</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.462 GHz	5.697 dBm				2									3									4									5									6									7									8									9									10									11									12								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																														
1	N	1	f	2.462 GHz	5.697 dBm																																																																																																																	
2																																																																																																																						
3																																																																																																																						
4																																																																																																																						
5																																																																																																																						
6																																																																																																																						
7																																																																																																																						
8																																																																																																																						
9																																																																																																																						
10																																																																																																																						
11																																																																																																																						
12																																																																																																																						

Mode 4: IEEE 802.11g Link Mode

2412



2437




2462



Mode 5: draft 802.11n Standard-20MHz Link Mode

2412

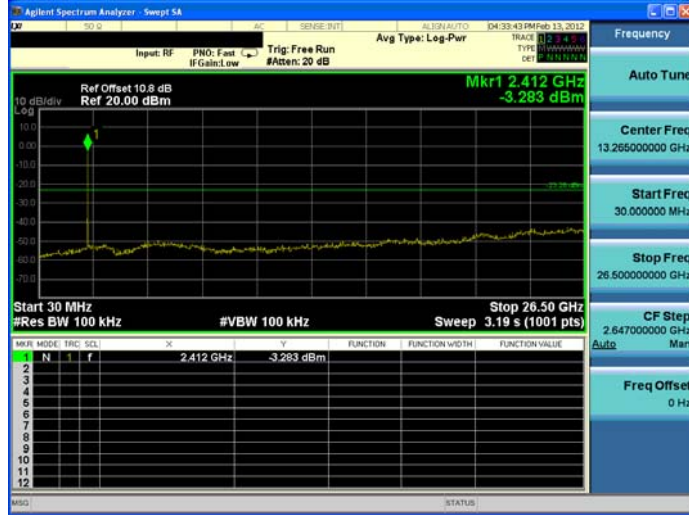

2437




2462






Mode 6: IEEE 802.11a U-NII Band IV Link Mode


5745

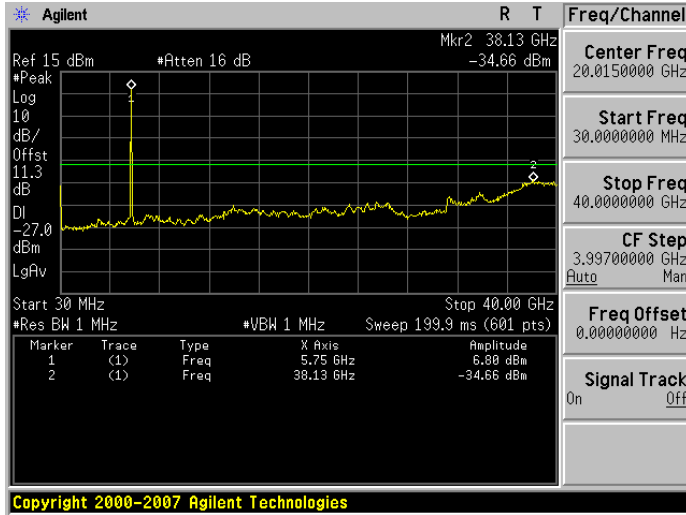

5785

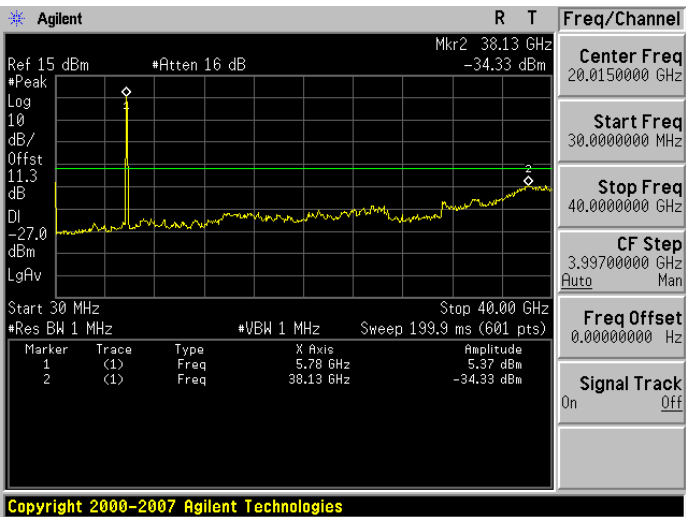


5825

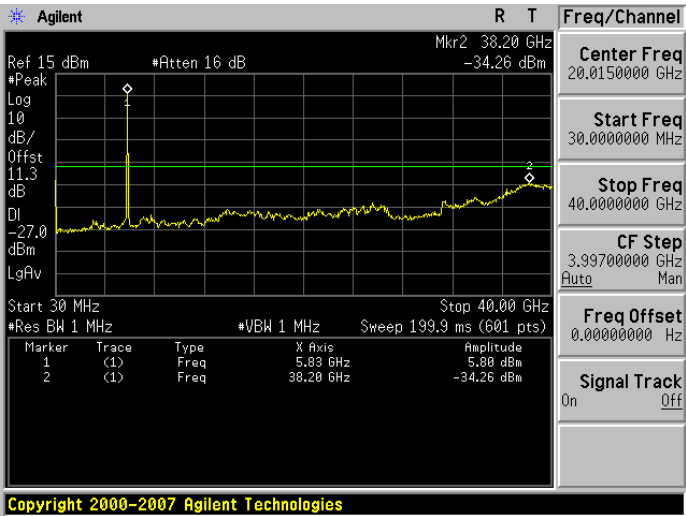


Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode


5745

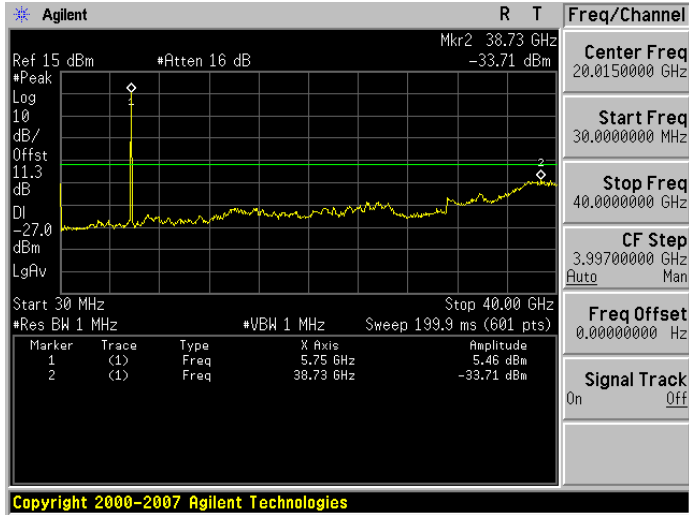

5785

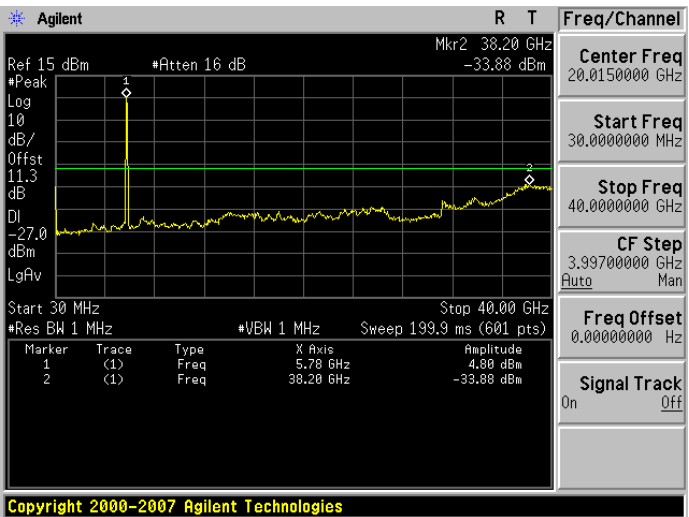

5825

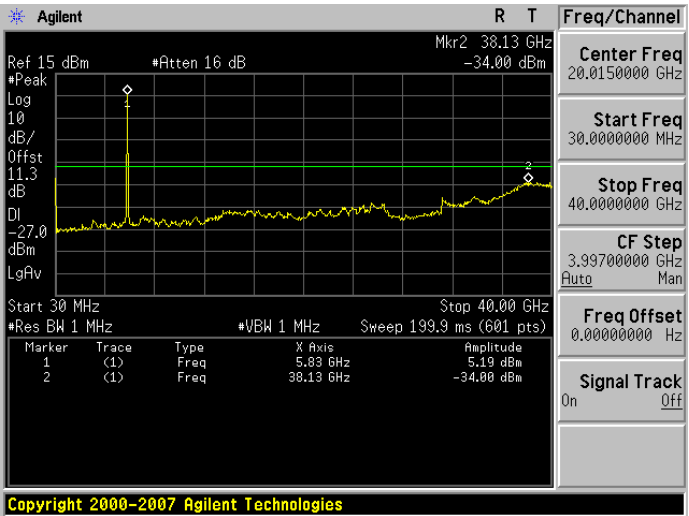


## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

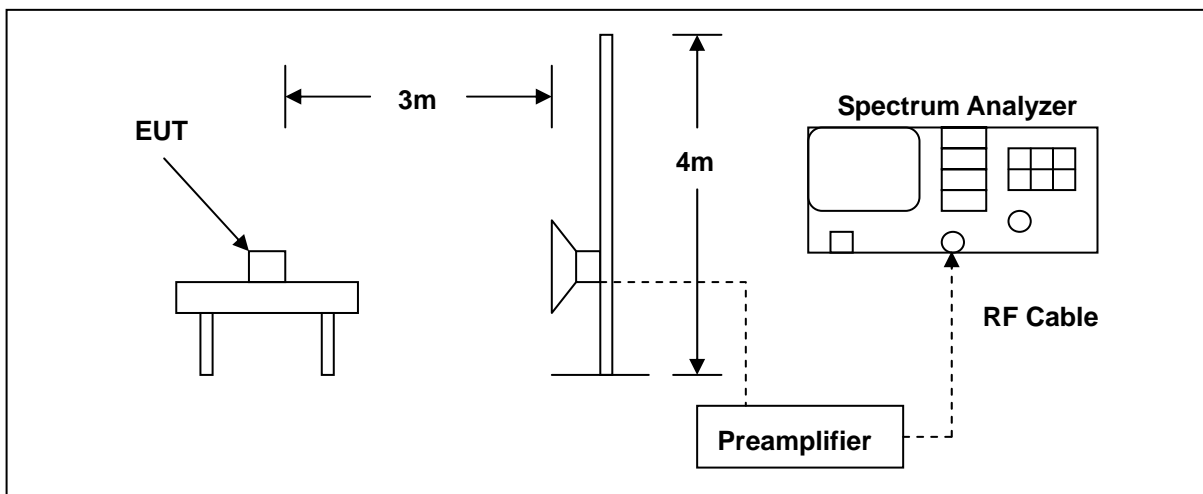

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/20/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### **10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


**10.5.Test Result**

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

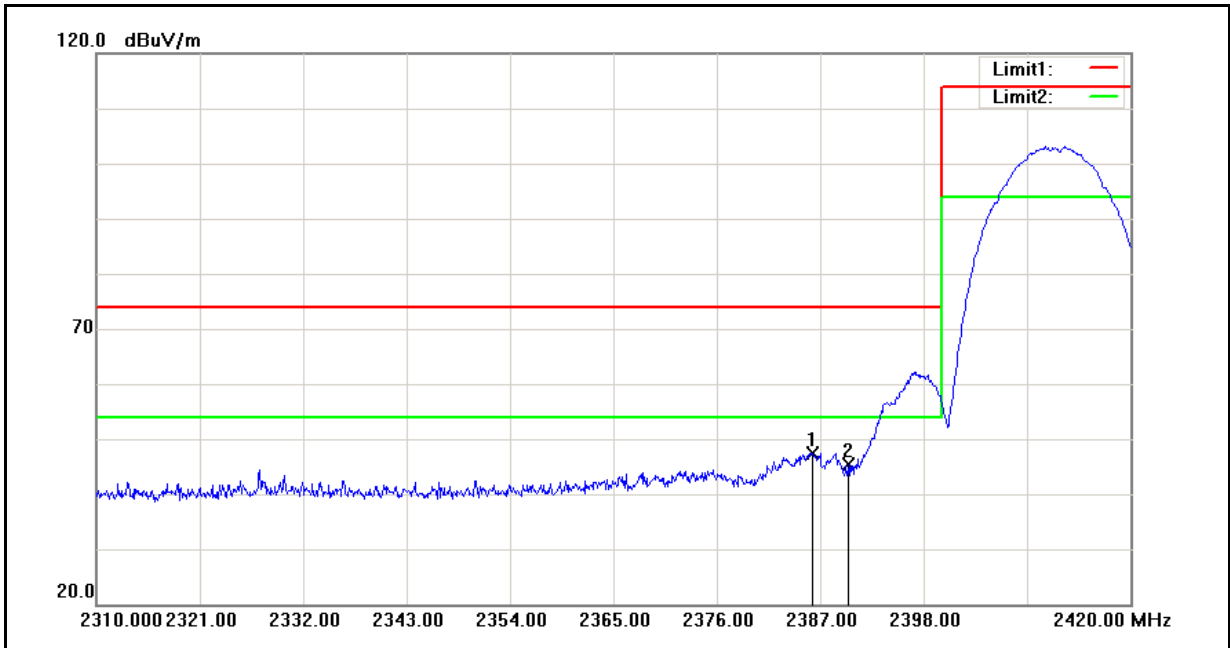


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.120	47.51	-0.08	47.43	74.00	-26.57	peak
2	2390.000	45.42	-0.06	45.36	74.00	-28.64	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

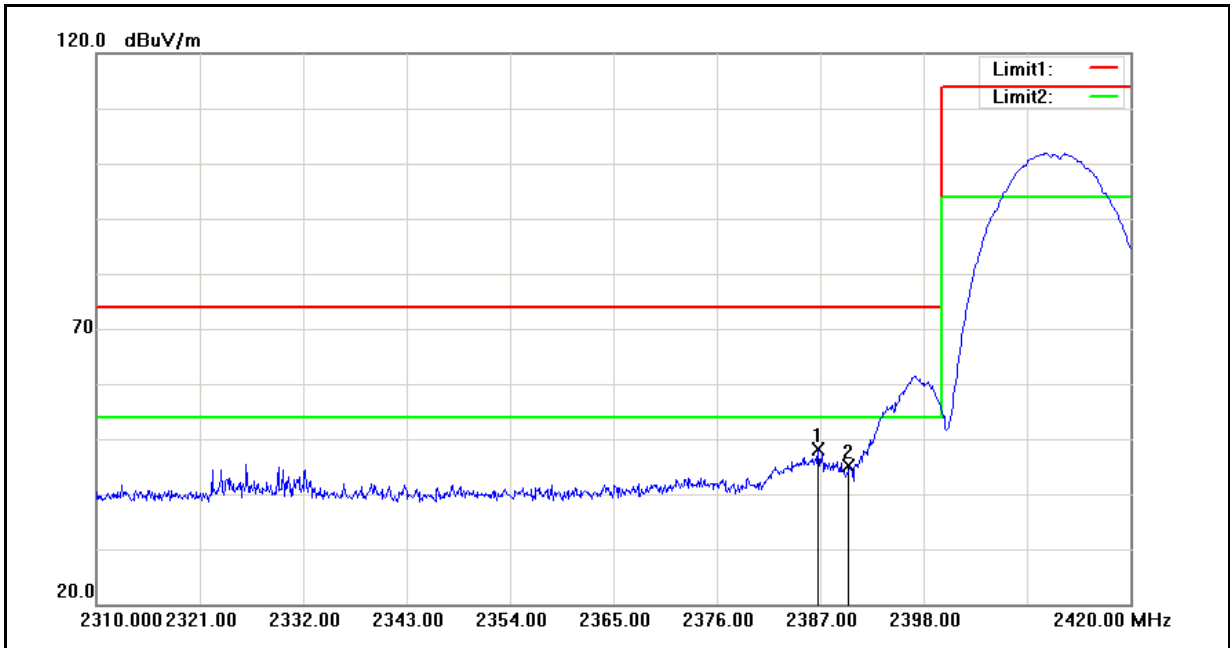


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.780	48.20	-0.07	48.13	74.00	-25.87	peak
2	2390.000	45.15	-0.06	45.09	74.00	-28.91	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

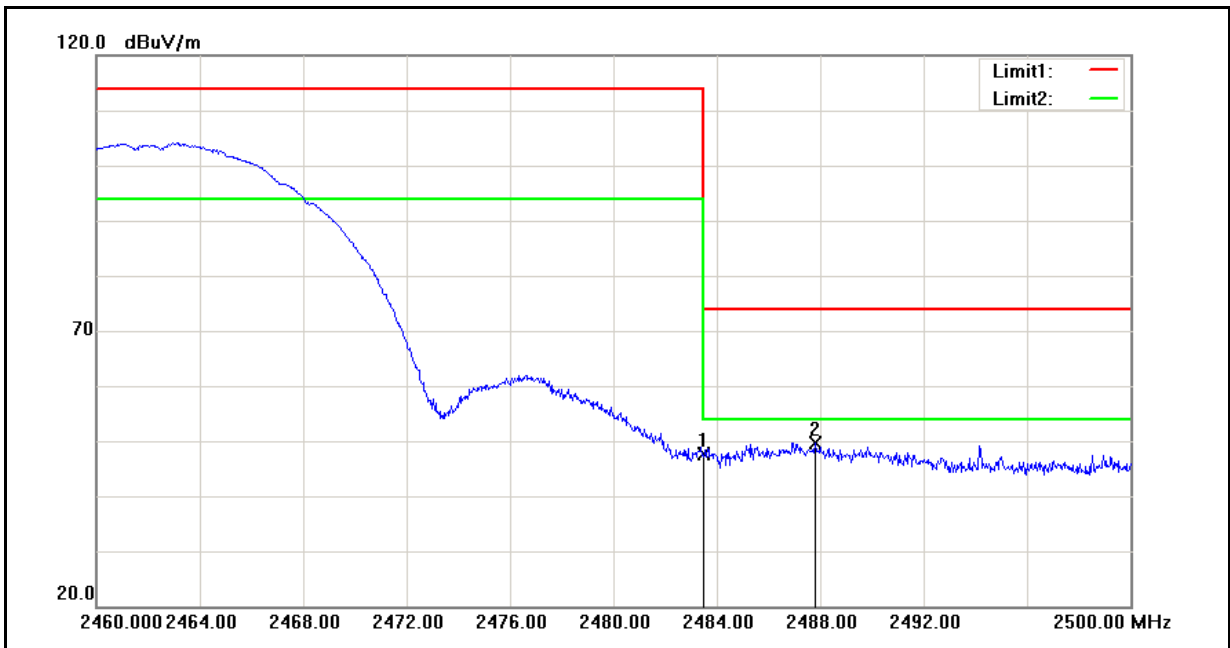

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.21	0.35	47.56	74.00	-26.44	peak
2	2487.800	49.24	0.37	49.61	74.00	-24.39	peak


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

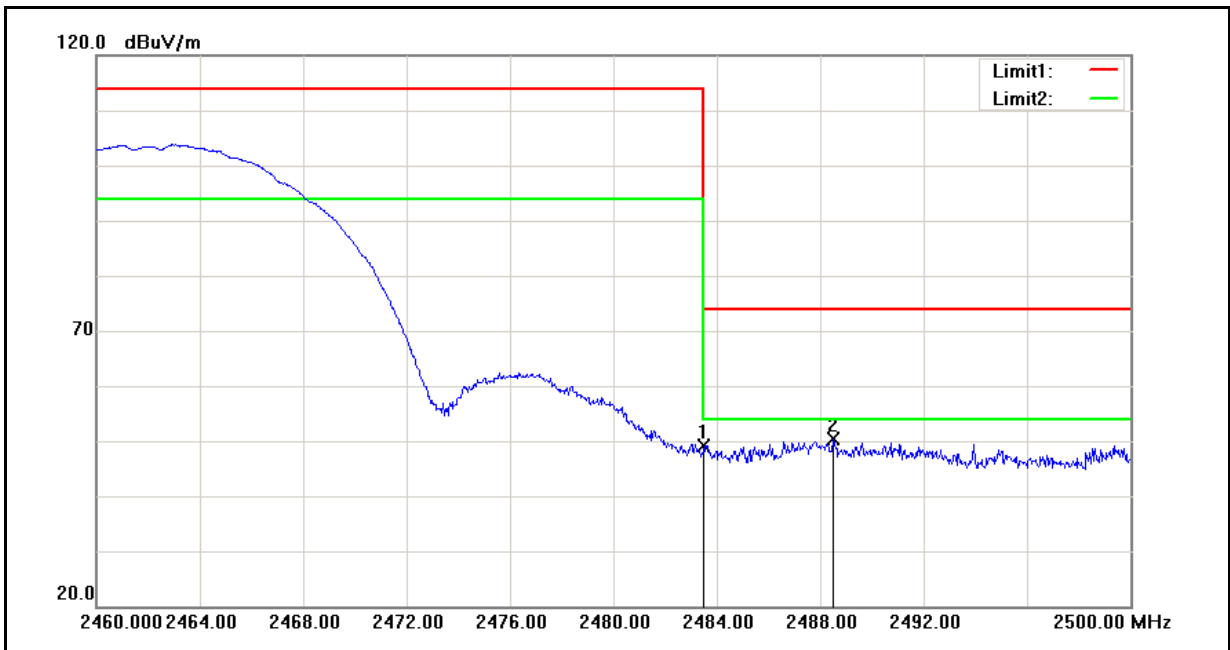

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.68	0.35	49.03	74.00	-24.97	peak
2	2488.480	50.03	0.38	50.41	74.00	-23.59	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

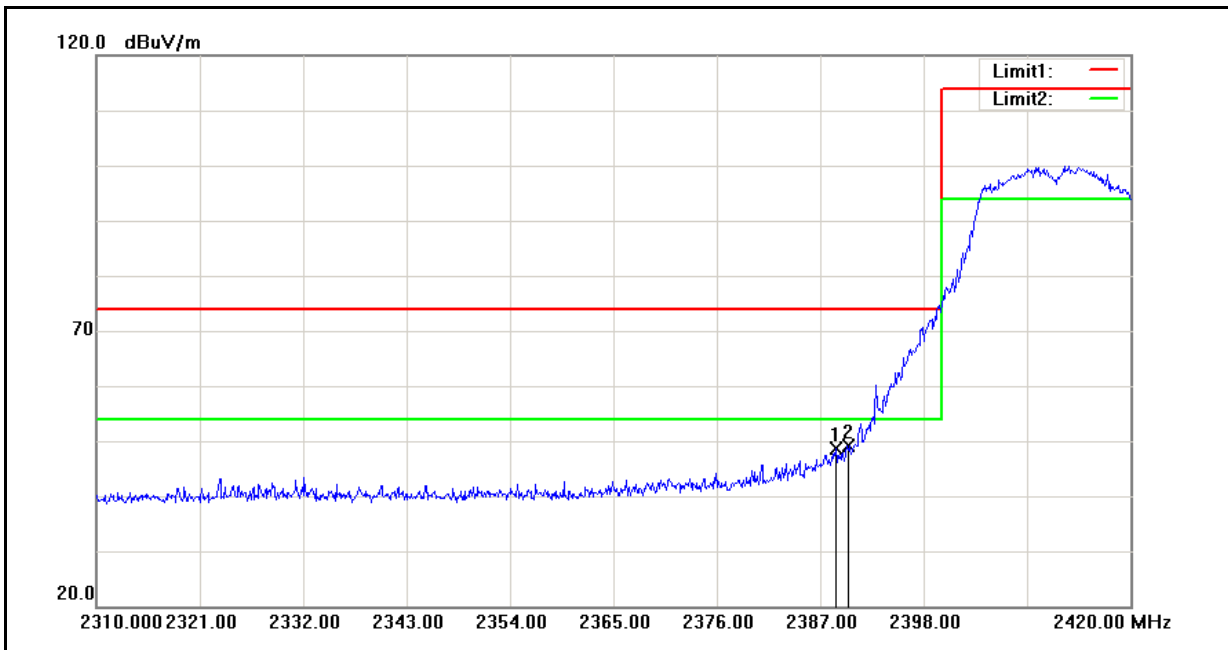


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.650	48.73	-0.06	48.67	74.00	-25.33	peak
2	2390.000	49.18	-0.06	49.12	74.00	-24.88	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

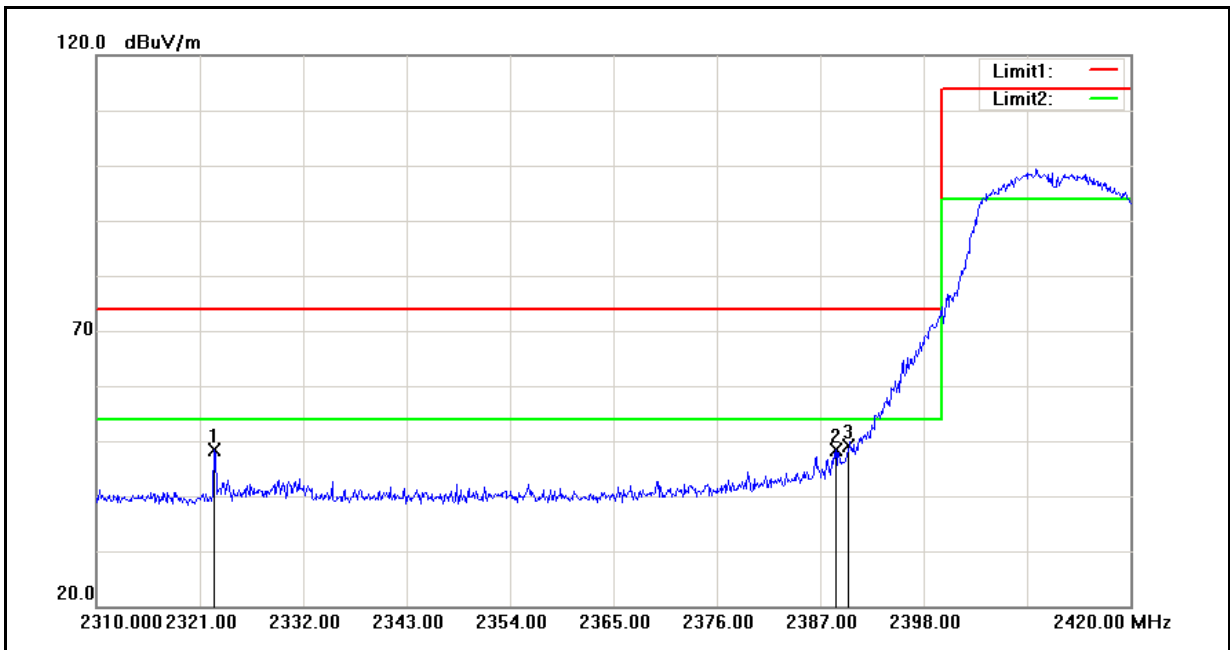


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2322.540	48.62	-0.36	48.26	74.00	-25.74	peak
2	2388.650	48.36	-0.06	48.30	74.00	-25.70	peak
3	2390.000	49.09	-0.06	49.03	74.00	-24.97	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

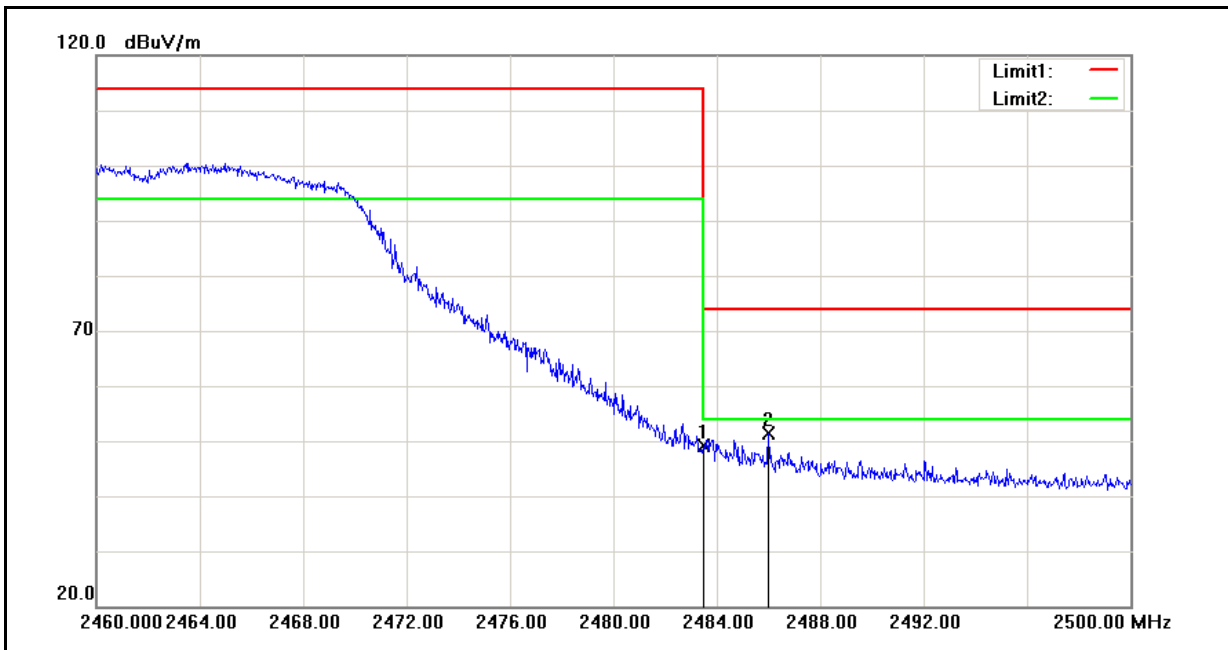


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.85	0.35	49.20	74.00	-24.80	peak
2	2486.000	50.99	0.37	51.36	74.00	-22.64	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

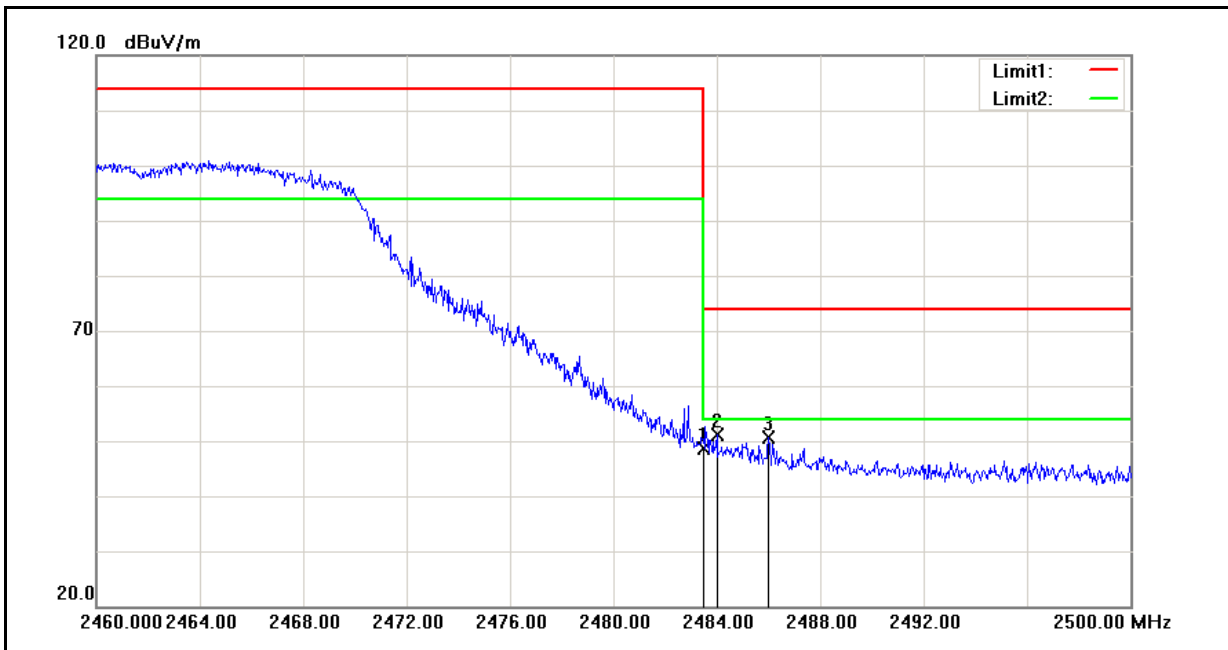


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.28	0.35	48.63	74.00	-25.37	peak
2	2484.000	50.88	0.35	51.23	74.00	-22.77	peak
3	2486.000	50.23	0.37	50.60	74.00	-23.40	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

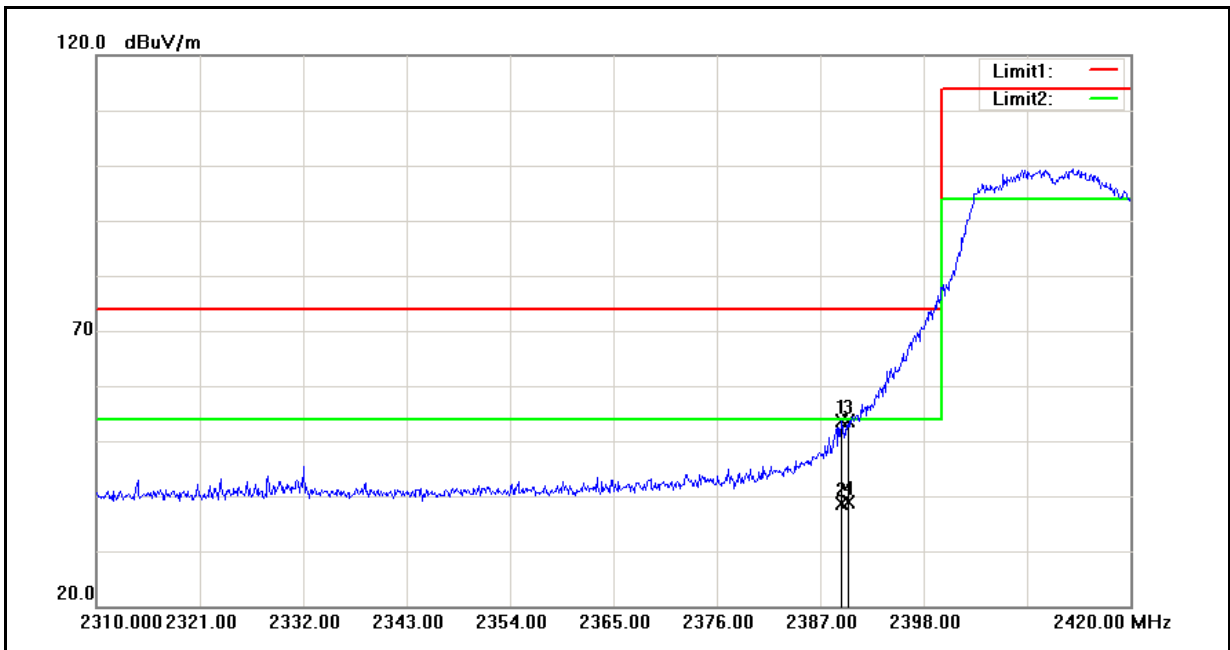


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	53.71	-0.06	53.65	74.00	-20.35	peak
2	2389.200	38.66	-0.06	38.60	54.00	-15.40	AVG
3	2390.000	53.63	-0.06	53.57	74.00	-20.43	peak
4	2390.000	39.04	-0.06	38.98	54.00	-15.02	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/18/2012
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

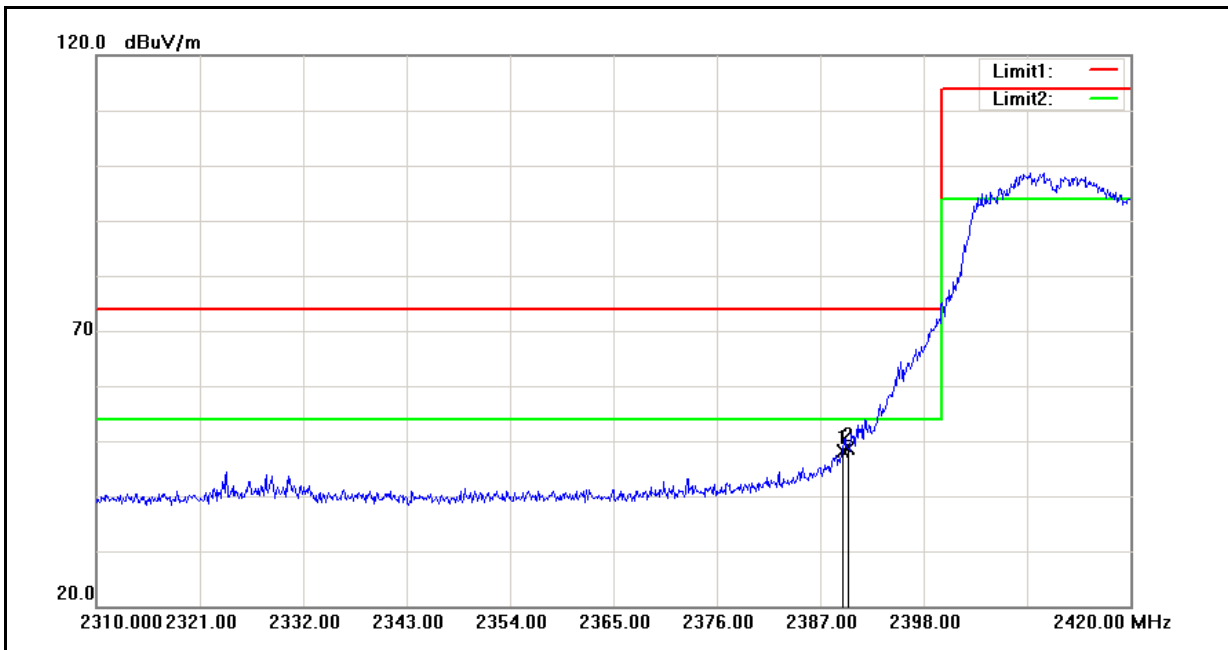


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	48.19	-0.06	48.13	74.00	-25.87	peak
2	2390.000	48.63	-0.06	48.57	74.00	-25.43	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

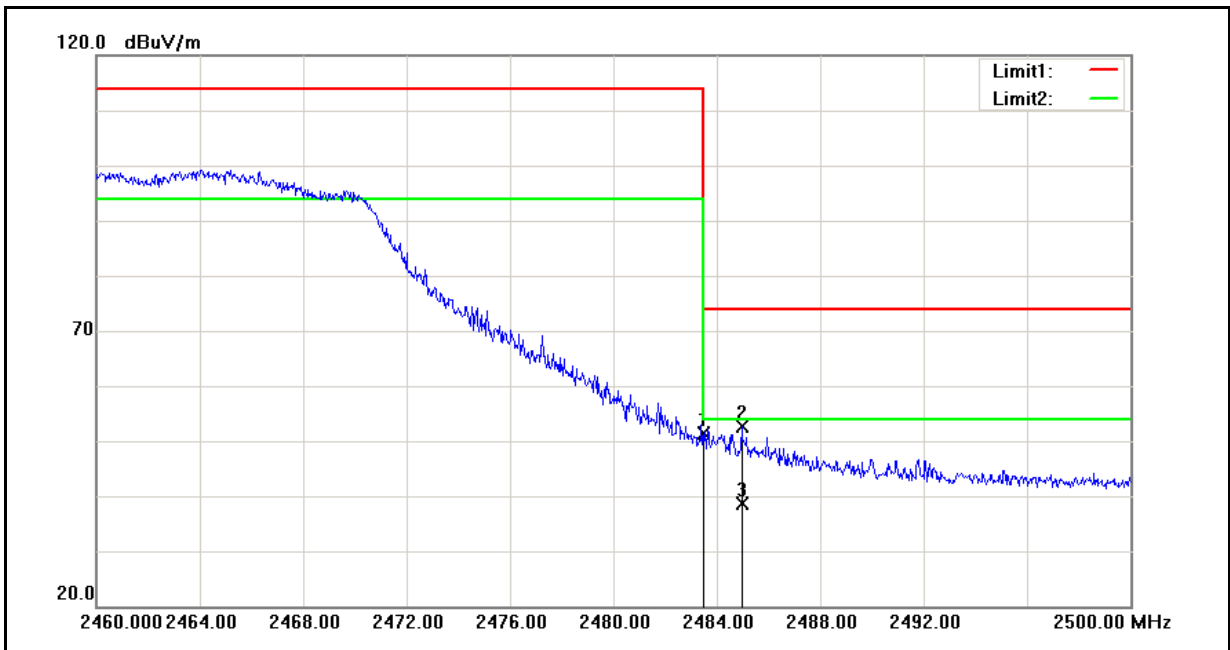

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.15	0.35	51.50	74.00	-22.50	peak
2	2484.960	52.25	0.35	52.60	74.00	-21.40	peak
3	2484.960	38.24	0.35	38.59	54.00	-15.41	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/18/2012
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

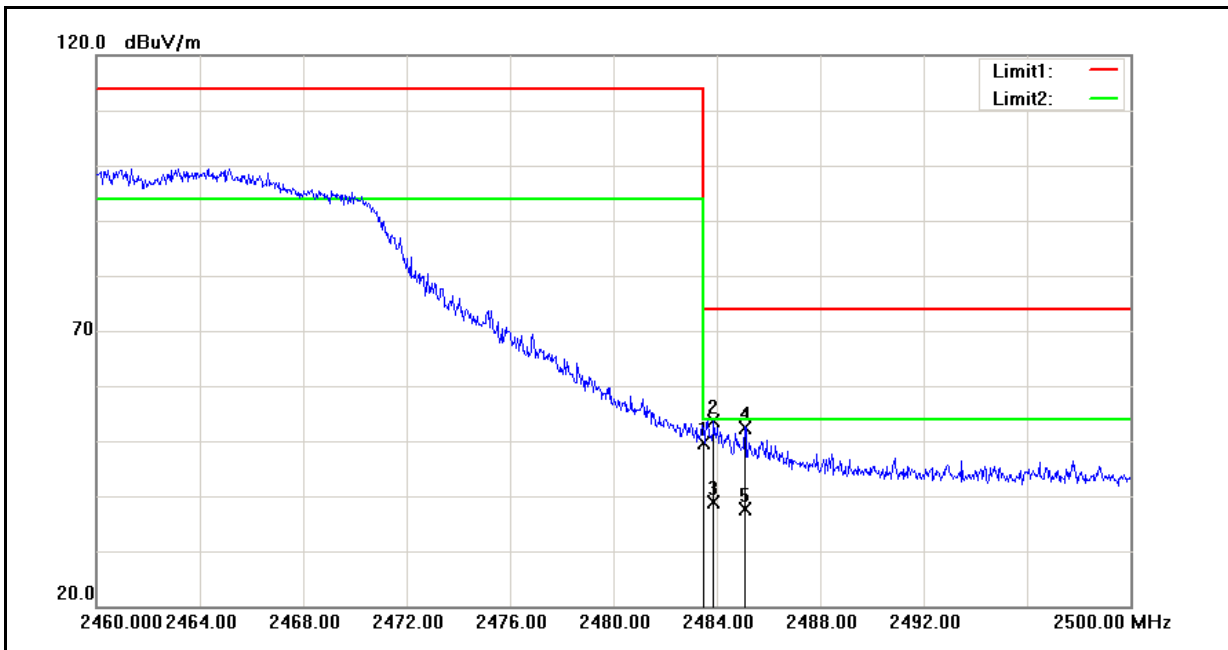

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.36	0.35	49.71	74.00	-24.29	peak
2	2483.880	53.19	0.35	53.54	74.00	-20.46	peak
3	2483.880	38.46	0.35	38.81	54.00	-15.19	AVG
4	2485.080	52.14	0.36	52.50	74.00	-21.50	peak
5	2485.080	37.19	0.36	37.55	54.00	-16.45	AVG




## 11 99 % Occupied Bandwidth Measurement

### 11.1.Limit

N/A

### 11.2.Test Setup

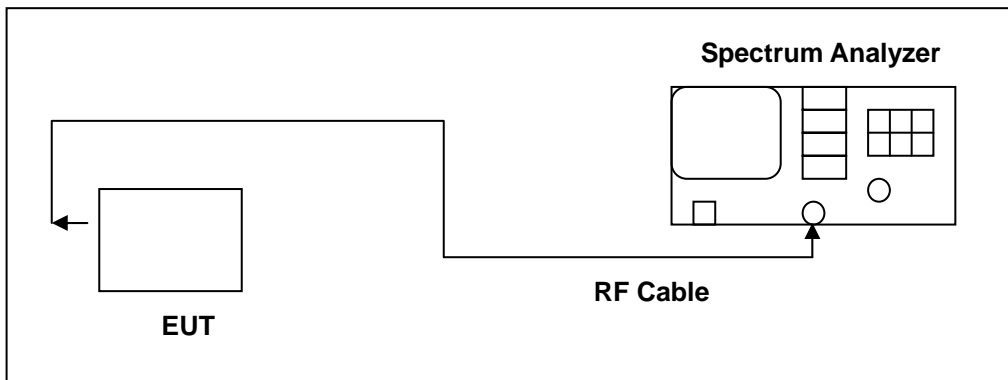

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**11.5.Test Result**

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	02/02/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	13.9325	-----
	2437	13.9653	-----
	2462	13.9824	-----

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	02/02/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	16.6319	-----
	2437	16.5967	-----
	2462	16.6287	-----

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	02/02/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	17.7883	-----
	2437	17.8073	-----
	2462	17.8129	-----




Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 6: IEEE 802.11a U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	5745	16.6935	-----
	5785	16.6802	-----
	5825	16.6434	-----

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode		
Date of Test	07/20/2011	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	5745	17.8735	-----
	5785	17.8611	-----
	5825	17.9396	-----

**11.6. Test Graphs**

Mode 3: IEEE 802.11b Link Mode	
2412	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 13.9325 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth -6.00 dB</p> <p>Transmit Freq Error 14.226 kHz</p> <p>x dB Bandwidth 9.246 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2437	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.437 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 13.9653 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth -6.00 dB</p> <p>Transmit Freq Error 12.580 kHz</p> <p>x dB Bandwidth 9.247 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2462	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.462 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 13.9824 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth -6.00 dB</p> <p>Transmit Freq Error -18.792 kHz</p> <p>x dB Bandwidth 9.245 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>

Mode 4: IEEE 802.11g Link Mode

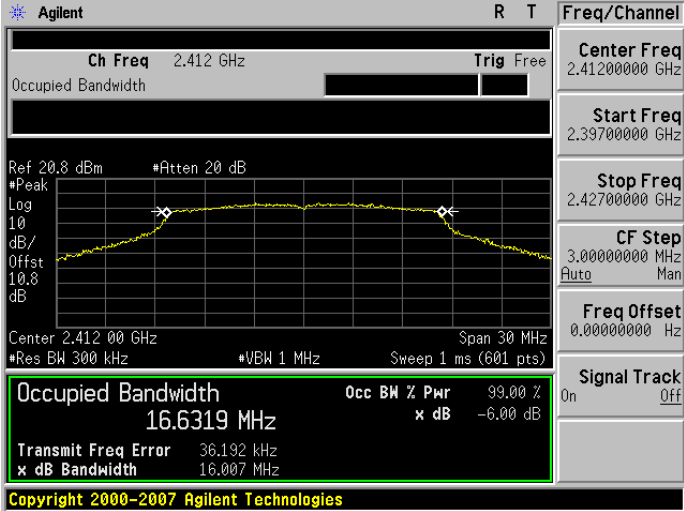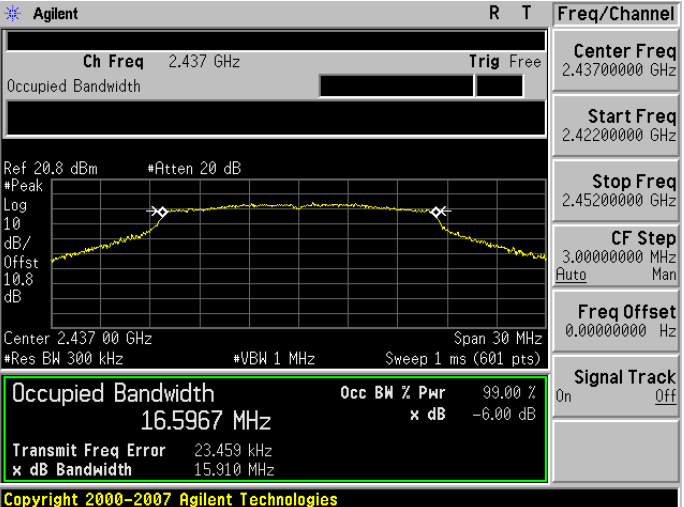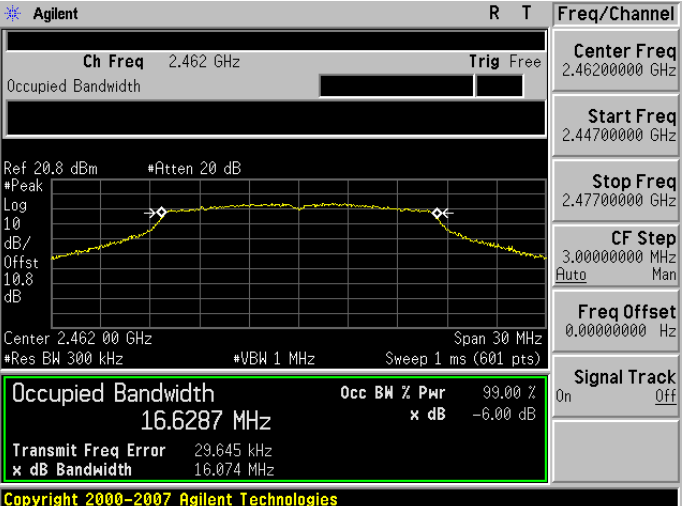2412	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 16.6319 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 36.192 kHz</p> <p>x dB Bandwidth 16.007 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2437	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.437 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 16.5967 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 23.459 kHz</p> <p>x dB Bandwidth 15.910 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2462	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20.8 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.8 dB</p> <p>Center 2.462 00 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 16.6287 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 29.645 kHz</p> <p>x dB Bandwidth 16.074 MHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

2412	
2437	
2462	

Mode 6: IEEE 802.11a U-NII Band IV Link Mode

<p>5745</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.745 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6935 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.506 kHz x dB Bandwidth 15.981 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.73000000 GHz</p> <p>Stop Freq 5.76000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5785</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.785 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6802 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 19.539 kHz x dB Bandwidth 15.994 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.77000000 GHz</p> <p>Stop Freq 5.80000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5825</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.825 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 16.6434 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 23.474 kHz x dB Bandwidth 16.010 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.81000000 GHz</p> <p>Stop Freq 5.84000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 7: draft 802.11n Standard-20MHz U-NII Band IV Link Mode

5745	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.745 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 17.8735 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -42.660 kHz x dB Bandwidth 17.166 MHz</p> <p>Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.73000000 GHz Stop Freq 5.76000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
5785	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.785 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 17.8611 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -11.402 kHz x dB Bandwidth 17.285 MHz</p> <p>Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.77000000 GHz Stop Freq 5.80000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
5825	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11.3 dBm #Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.3 dB</p> <p>Center 5.825 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 17.9396 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 25.910 kHz x dB Bandwidth 17.305 MHz</p> <p>Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.81000000 GHz Stop Freq 5.84000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>



## 12 Antenna Measurement

### 12.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 12.2.Antenna Connector Construction

For 2.4GHz antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **0.15 dBi**.

For 5GHz antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **1.18 dBi**.