

# FCC RF Test Report

APPLICANT : HTC Corporation  
EQUIPMENT : Smartphone  
MODEL NAME : PL80110  
FCC ID : NM8PL80110  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 26, 2012 and completely tested on Dec. 17, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PL80110

Page Number : 1 of 73

Report Issued Date : Dec. 21, 2012

Report Version : Rev. 01



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Testing Site..... 6

    1.6 Applied Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Descriptions of Test Mode ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 Description of RF Function Operation Test Setup..... 10

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 13**

    3.1 Number of Channel Measurement ..... 13

    3.2 Hopping Channel Separation Measurement ..... 15

    3.3 Dwell Time Measurement..... 22

    3.4 20dB Bandwidth Measurement ..... 25

    3.5 Peak Output Power Measurement ..... 32

    3.6 Conducted Band Edges Measurement..... 39

    3.7 Conducted Spurious Emission Measurement ..... 46

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 56

    3.9 AC Conducted Emission Measurement..... 67

    3.10 Antenna Requirements ..... 71

**4 LIST OF MEASURING EQUIPMENT..... 72**

**5 UNCERTAINTY OF EVALUATION..... 73**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O2633A	Rev. 01	Initial issue of report	Dec. 21, 2012



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	≤ 1 W for 1Mbps ≤ 125 mW for 2, 3Mbps	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.02 dB at 46.470 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 4.70 dB at 13.558 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

## 1.2 Manufacturer

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smartphone
<b>Model Name</b>	PL80110
<b>FCC ID</b>	NM8PL80110
<b>Sample 1</b>	EUT with LCD Panel 1, Camera Front 1, and 2nd Camera 1
<b>Sample 2</b>	EUT with LCD Panel 2, Camera Front 2, and 2nd Camera 2
<b>EUT supports Radios application</b>	CDMA/EV-DO / LTE WLAN 11abgn / Bluetooth 3.0/4.0 / NFC
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth (1Mbps) : 7.99 dBm (0.0063 W) Bluetooth EDR (2Mbps) : 6.54 dBm (0.0045 W) Bluetooth EDR (3Mbps) : 7.00 dBm (0.0050 W)
<b>Antenna Type</b>	PIFA Antenna type with gain -0.20 dBi
<b>Type of Modulation</b>	Bluetooth 3.0 BDR (1Mbps) : GFSK Bluetooth 3.0 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 3.0 EDR (3Mbps) : 8-DPSK

## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH02-HY	CO05-HY	03CH05-HY	722060/4086B-1

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.96 dBm	6.54 dBm	7.00 dBm
Ch39	2441MHz	<b>7.99 dBm</b>	6.37 dBm	6.84 dBm
Ch78	2480MHz	7.82 dBm	6.21 dBm	6.69 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

## 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated Test Cases</b>	Bluetooth 1Mbps GFSK		
	Mode 1: CH00_2402 MHz for Sample 1 Mode 2: CH39_2441 MHz for Sample 1 Mode 3: CH78_2480 MHz for Sample 1		
<b>AC Conducted Emission</b>	Mode 1 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1 Mode 2 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN (5G) Link + NFC + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1 Mode 3 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 2		
<b>Remark:</b>			
<ol style="list-style-type: none"> <li>For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission .</li> <li>The worst case of conducted emission is mode 1; only the test data of it was reported.</li> <li>For Radiated Test Cases, The tests were performance with Adapter 1, Earphone, Battery 2, and USB Cable 2.</li> </ol>			




## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

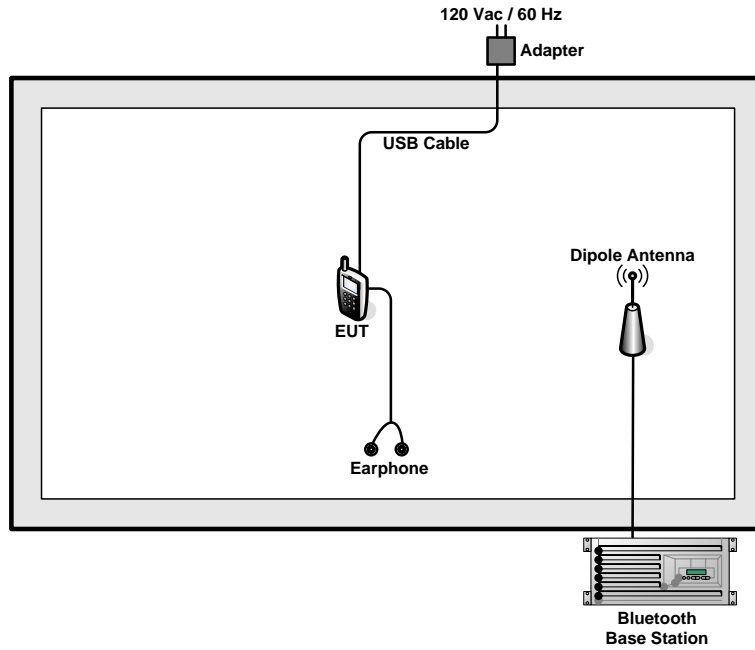

<AC Conducted Emission Mode>

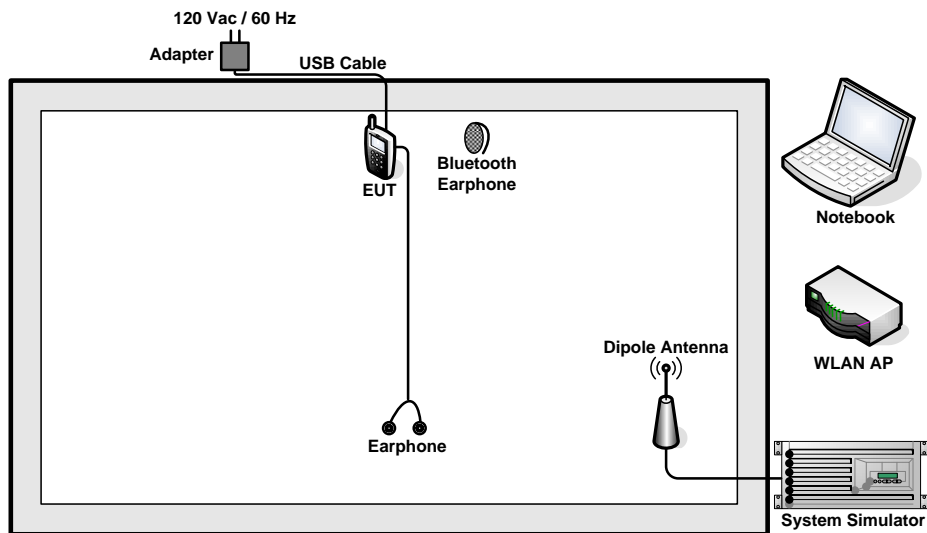

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
6.	SD Card	SanDisk	N/A	N/A	N/A	N/A

## 2.5 Description of RF Function Operation Test Setup

For Bluetooth function, the RF utility, "Bluetooth Test Mode" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.



## **2.6 Measurement Results Explanation Example**

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



**For radiated band edges and spurious emission test :**

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

$$\text{Average Emission Level(dBuV/m)} = \text{Peak Emission Level(dBuV/m)} + \text{Duty cycle correction factor(dB)}$$

$$\text{Duty cycle correction factor(dB)} = 20 * \log(\text{Duty cycle}).$$

Duty cycle = On time / 100 milliseconds

On time = worst case dwell time \* hopping number in 100 ms

For example : bluetooth with worst case dwell time 2.9ms and 2 hops in 100 ms, then

$$\text{Duty cycle correction factor(dB)} = 20 * \log( (2.9 * 2) / 100 ) = -24.73 \text{ dB}$$

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dBuV/m.

Example :

$$\begin{aligned} \text{Average Emission Level(dBuV/m)} &= \text{Peak Emission Level(dBuV/m)} + \text{duty cycle correction factor(dB)} \\ &= 45.61 + ( -24.73 ) = 20.88 \text{ (dBuV/m)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

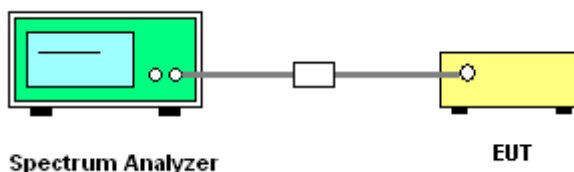


##### 3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	$\geq 20$	$> 15$	Pass



Number of Hopping Channel Plot on Channel 00 - 78

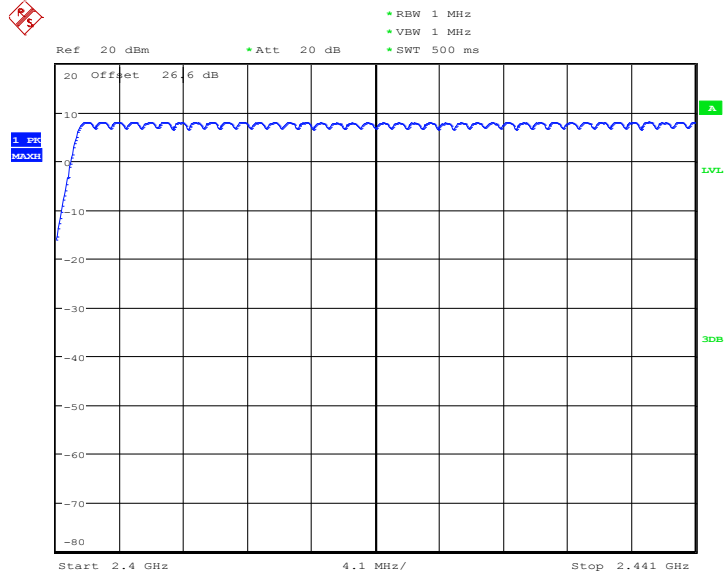

Date: 7.NOV.2012 00:35:38

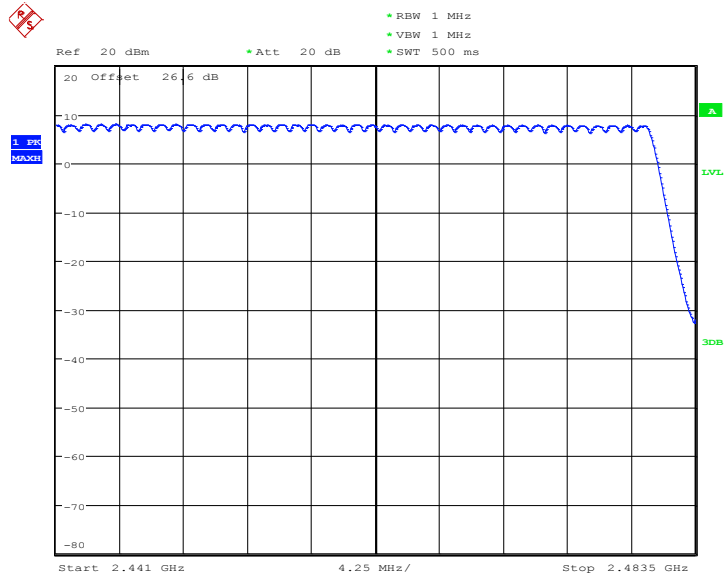

Date: 7.NOV.2012 00:42:07

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

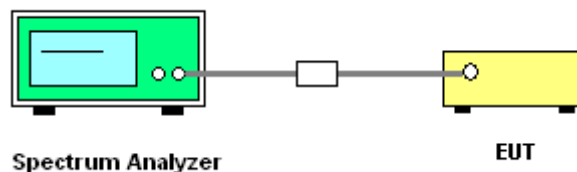




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.005	0.6496	Pass
39	2441	1.000	0.6496	Pass
78	2480	1.000	0.6496	Pass

Channel Separation Plot on Channel 00 - 01

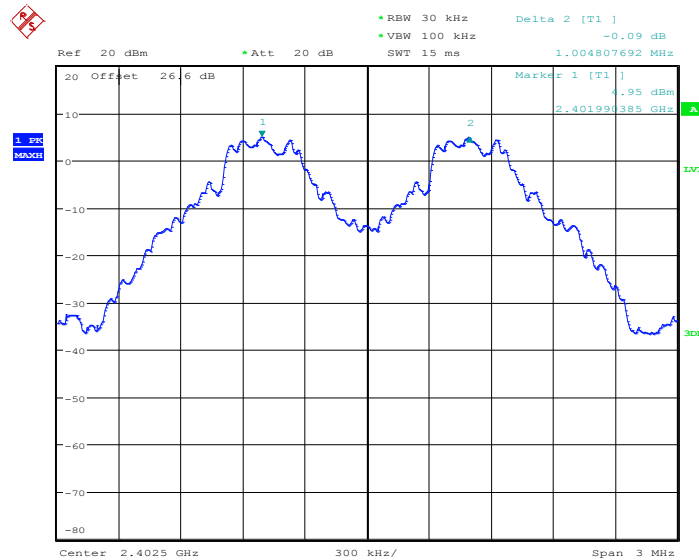


Date: 7.NOV.2012 01:11:13






Channel Separation Plot on Channel 39 - 40

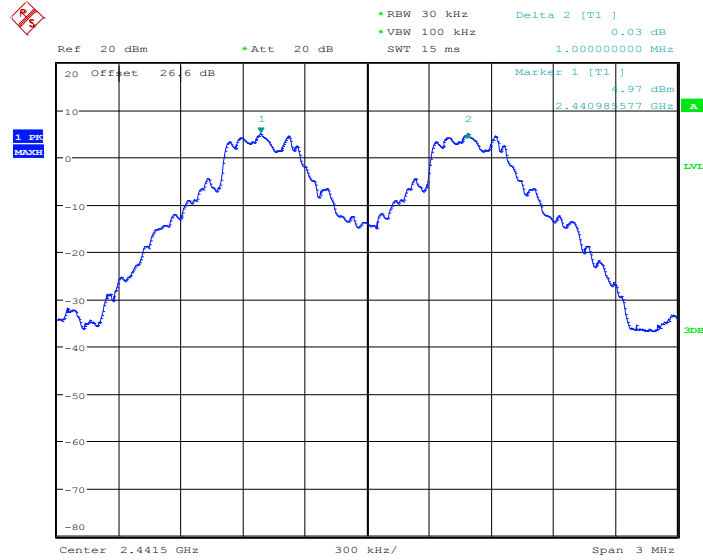

Date: 6.NOV.2012 23:56:25

Channel Separation Plot on Channel 77 - 78

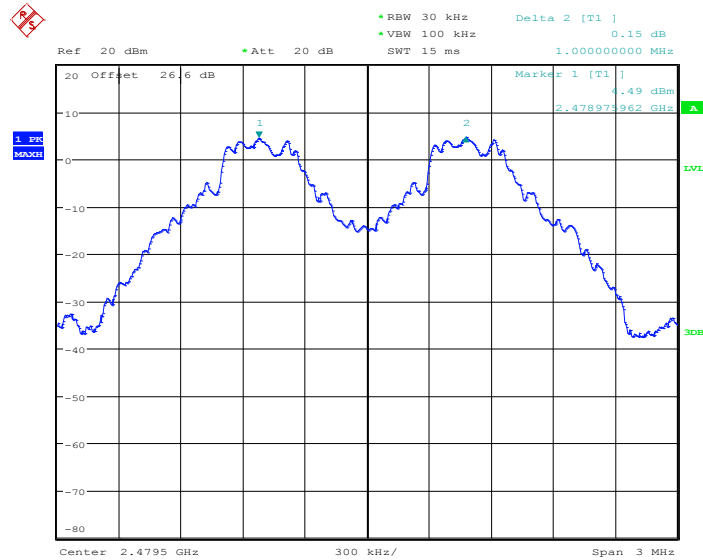


Date: 6.NOV.2012 23:57:08



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.9007	Pass
39	2441	1.000	0.9007	Pass
78	2480	1.005	0.8975	Pass


Channel Separation Plot on Channel 00 - 01

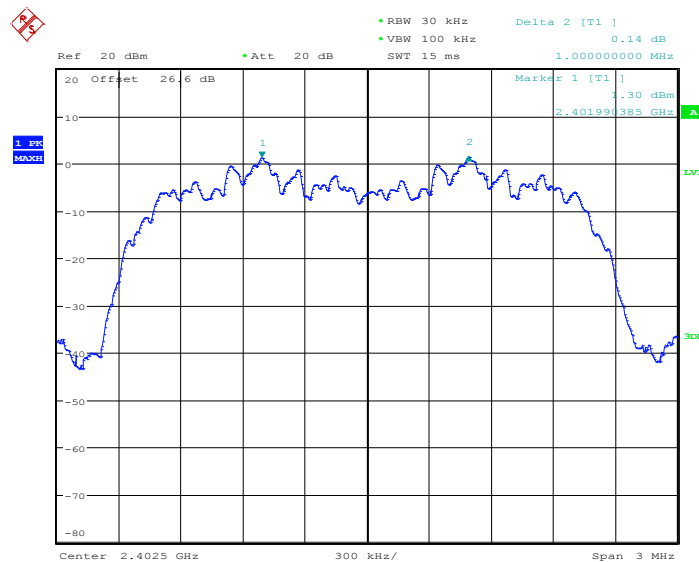

Date: 7.NOV.2012 00:00:29




### Channel Separation Plot on Channel 39 - 40

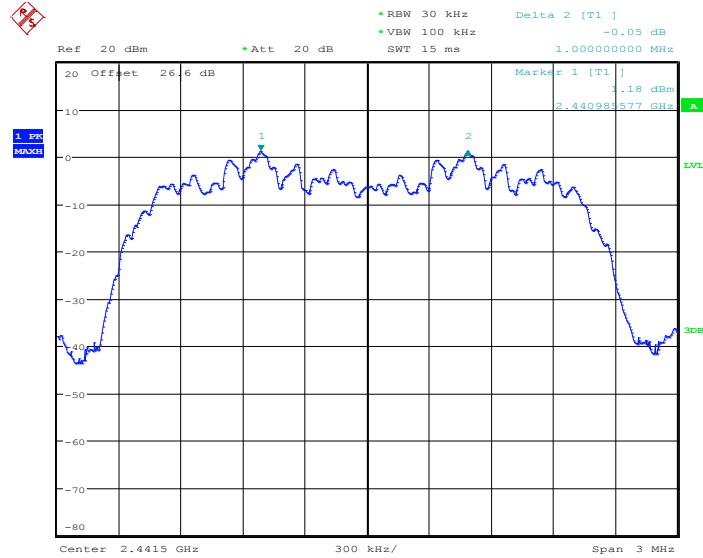

Date: 7.NOV.2012 00:02:07

### Channel Separation Plot on Channel 77 - 78

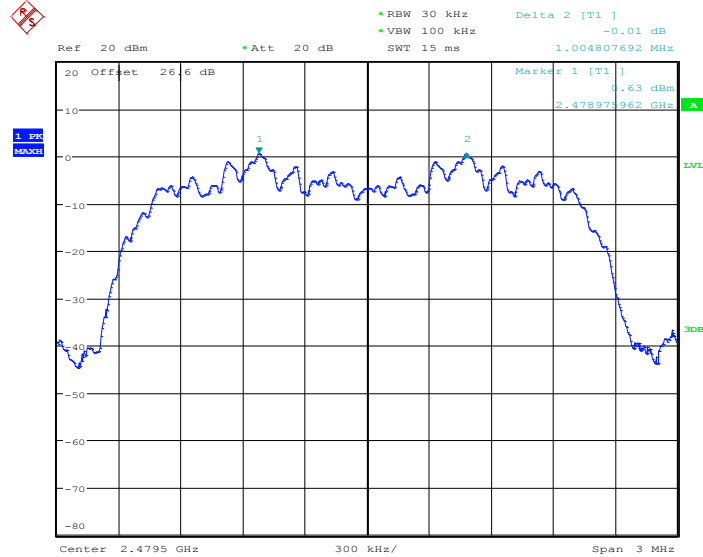


Date: 7.NOV.2012 00:02:51



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.8686	Pass
39	2441	1.005	0.8654	Pass
78	2480	1.005	0.8590	Pass


Channel Separation Plot on Channel 00 - 01

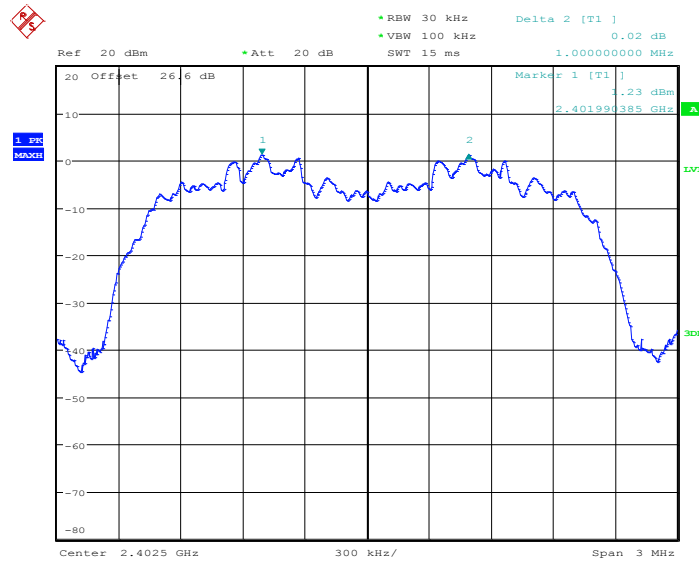

Date: 7.NOV.2012 00:03:39




### Channel Separation Plot on Channel 39 - 40

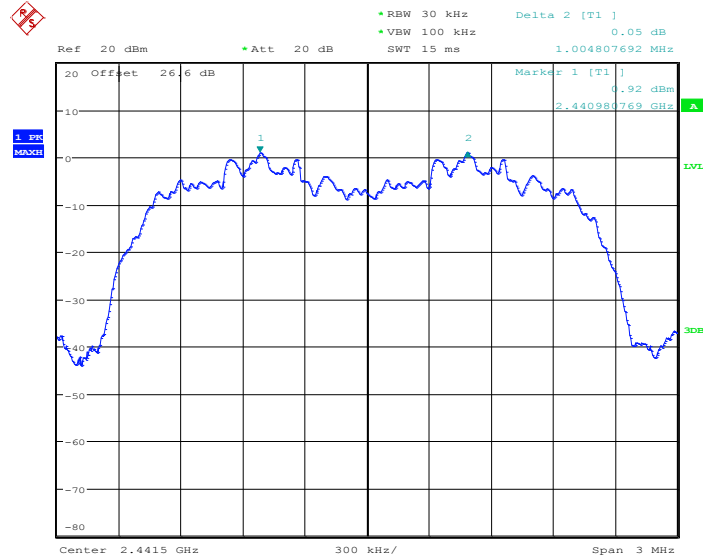

Date: 7.NOV.2012 00:04:30

### Channel Separation Plot on Channel 77 - 78

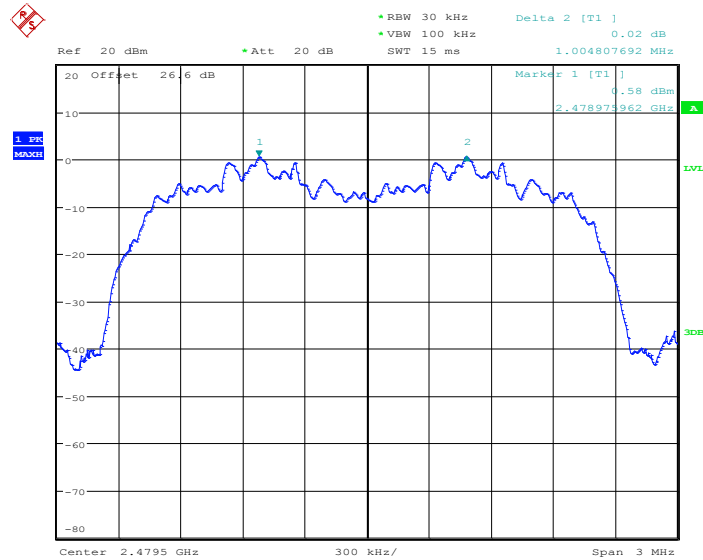

Date: 7.NOV.2012 00:05:16

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

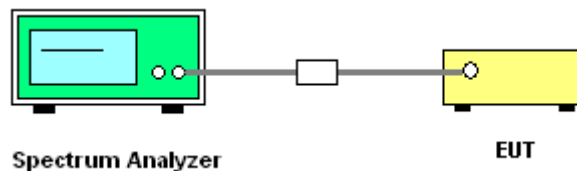



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2970.51	316.86	0.4	Pass
AFH	20	53.34	2970.51	158.45	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.34 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

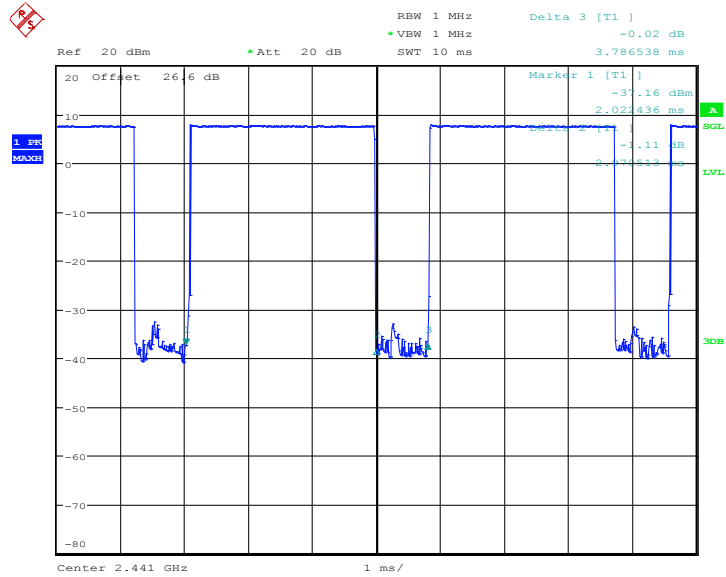

Date: 6.NOV.2012 23:52:33



### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

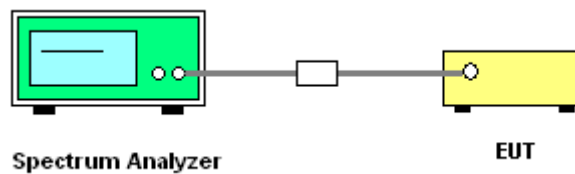




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.974
39	2441	0.974
78	2480	0.974


20 dB Bandwidth Plot on Channel 00

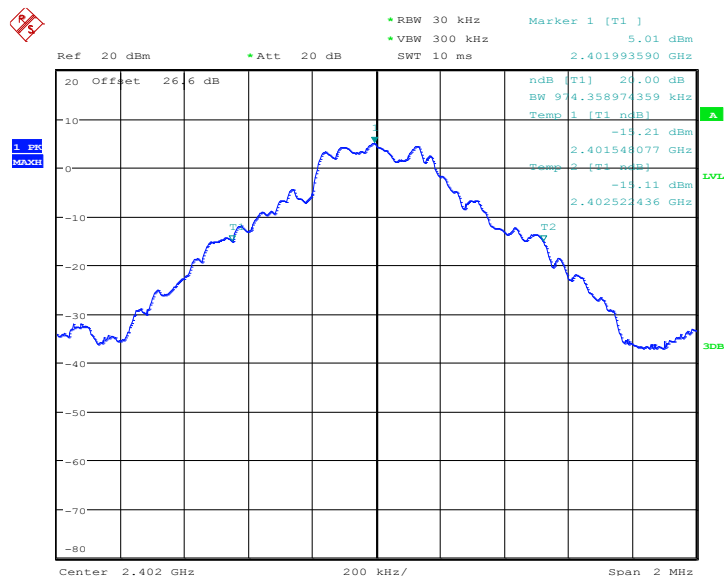

Date: 7.NOV.2012 00:07:44




20 dB Bandwidth Plot on Channel 39

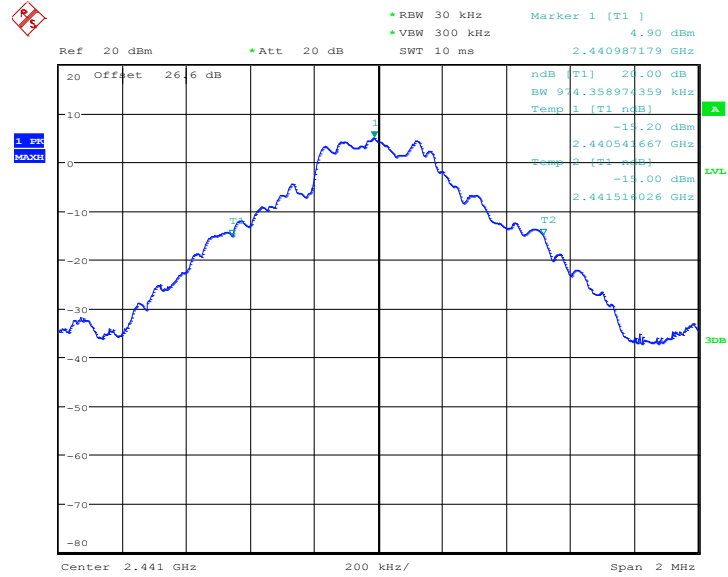

Date: 7.NOV.2012 00:08:02

20 dB Bandwidth Plot on Channel 78

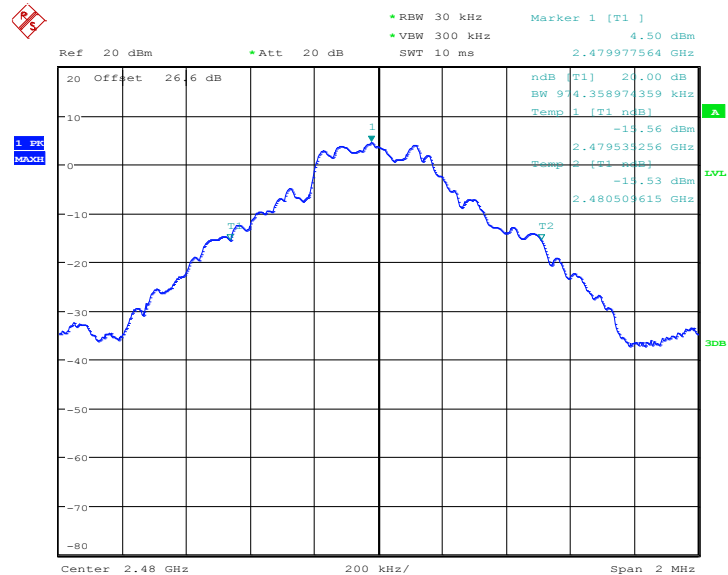


Date: 7.NOV.2012 00:09:17



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.351
39	2441	1.351
78	2480	1.346


20 dB Bandwidth Plot on Channel 00

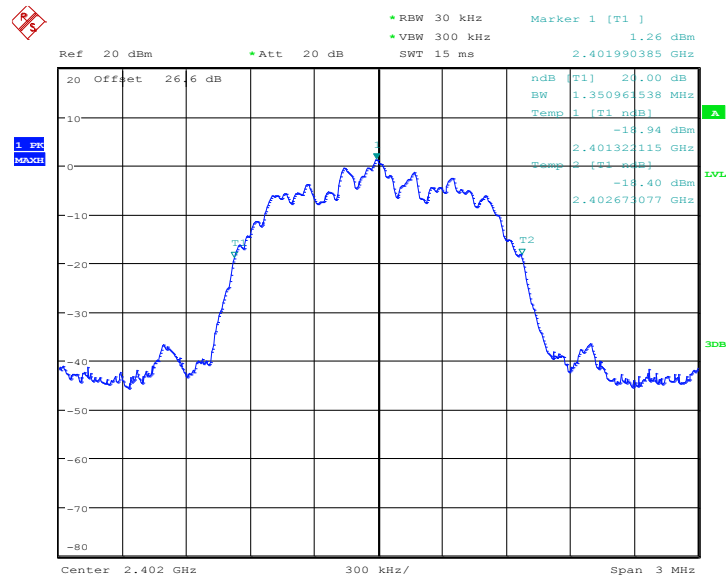

Date: 7.NOV.2012 00:10:13




20 dB Bandwidth Plot on Channel 39

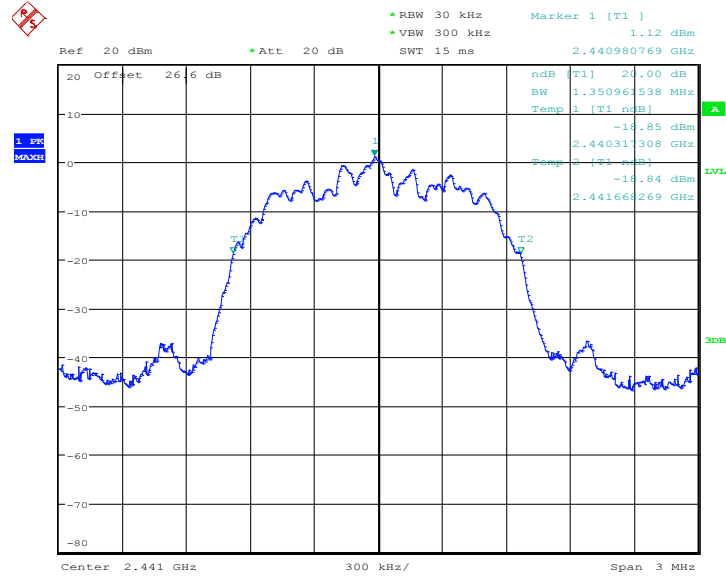

Date: 7.NOV.2012 00:11:24

20 dB Bandwidth Plot on Channel 78

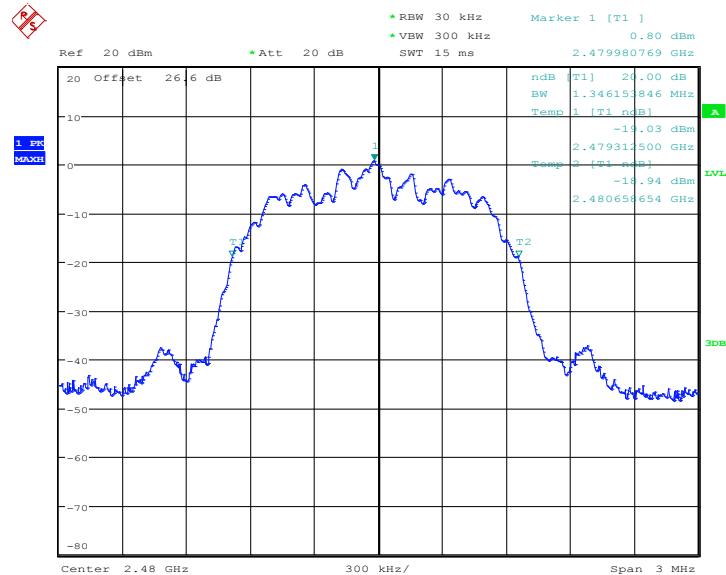


Date: 7.NOV.2012 00:11:51



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.303
39	2441	1.298
78	2480	1.289


20 dB Bandwidth Plot on Channel 00

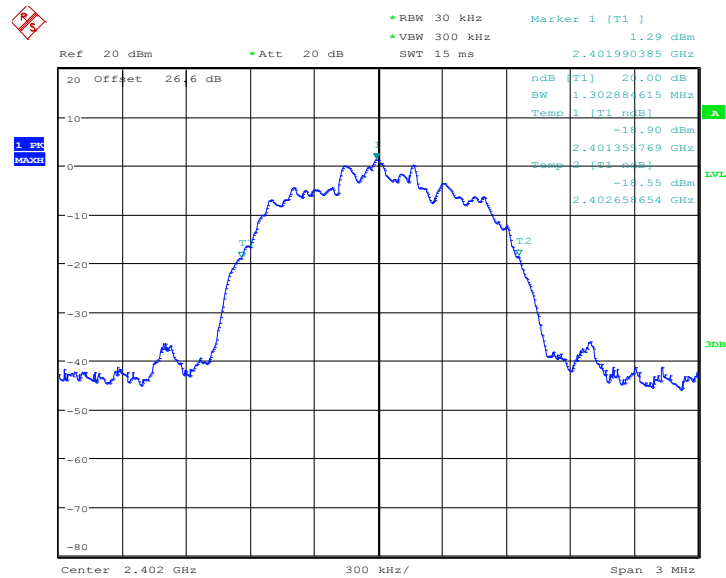

Date: 7.NOV.2012 00:12:42




20 dB Bandwidth Plot on Channel 39

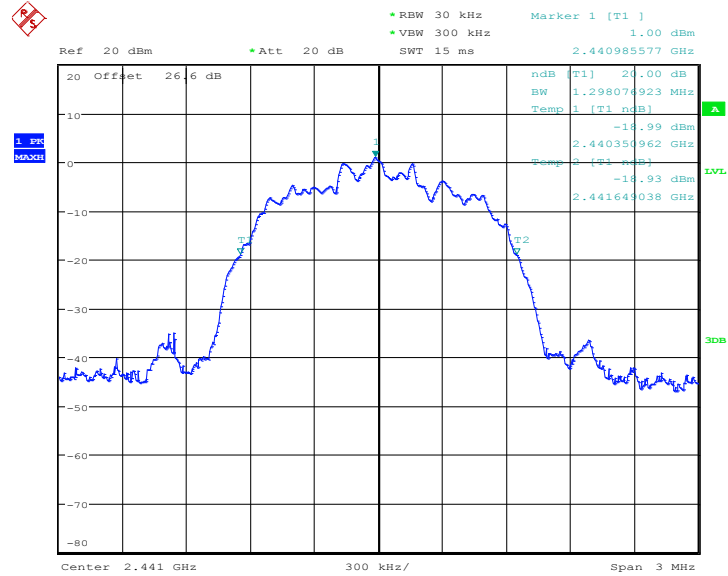

Date: 7.NOV.2012 00:13:26

20 dB Bandwidth Plot on Channel 78

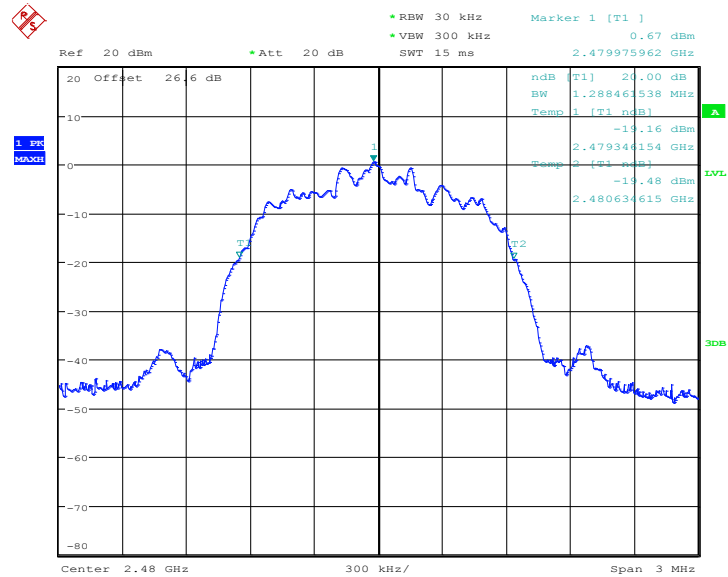

Date: 7.NOV.2012 00:13:52

## 3.5 Peak Output Power Measurement

### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

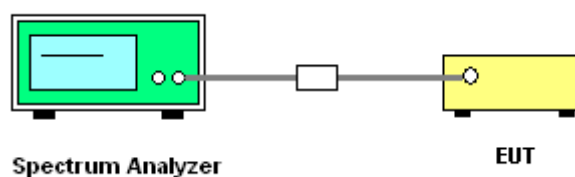






3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.96	20.97	Pass
39	2441	7.99	20.97	Pass
78	2480	7.82	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.


Peak Output Power Plot on Channel 00

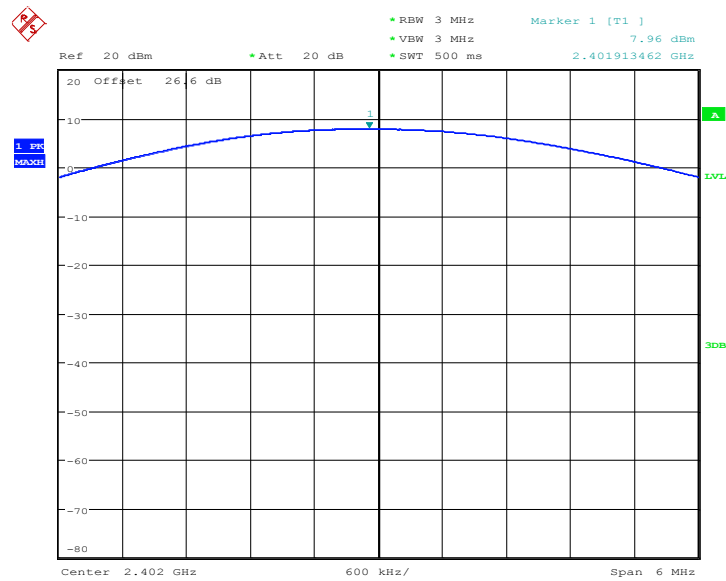

Date: 6.NOV.2012 23:38:37




Peak Output Power Plot on Channel 39

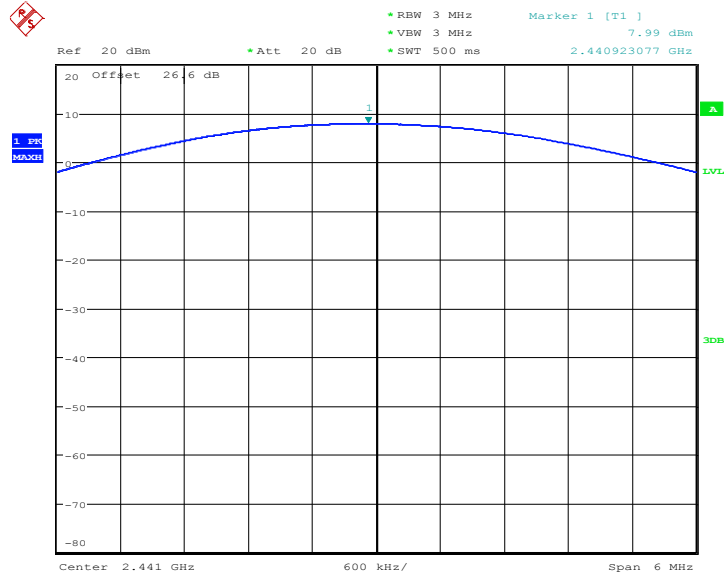

Date: 6.NOV.2012 23:39:50

Peak Output Power Plot on Channel 78

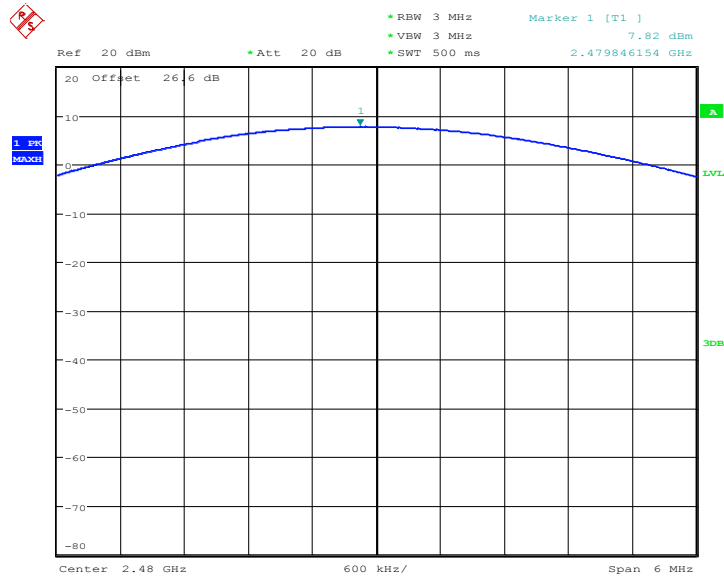


Date: 6.NOV.2012 23:41:02



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.54	20.97	Pass
39	2441	6.37	20.97	Pass
78	2480	6.21	20.97	Pass


Peak Output Power Plot on Channel 00

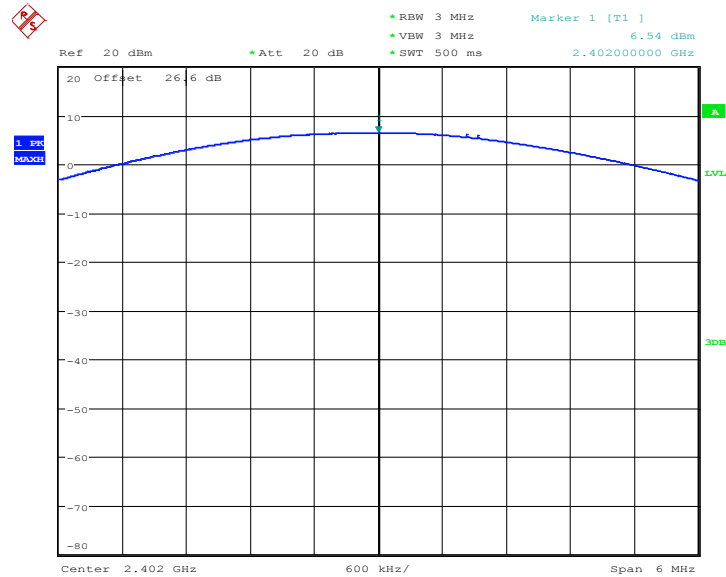

Date: 6.NOV.2012 23:39:01




Peak Output Power Plot on Channel 39

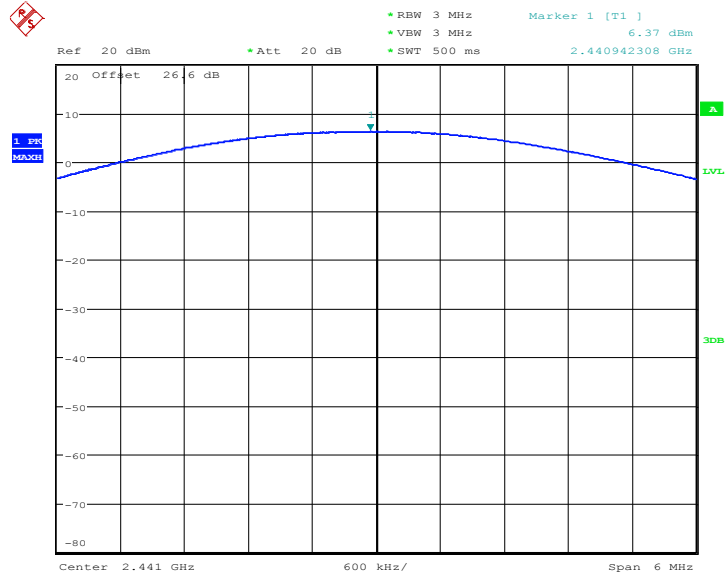

Date: 6.NOV.2012 23:40:14

Peak Output Power Plot on Channel 78

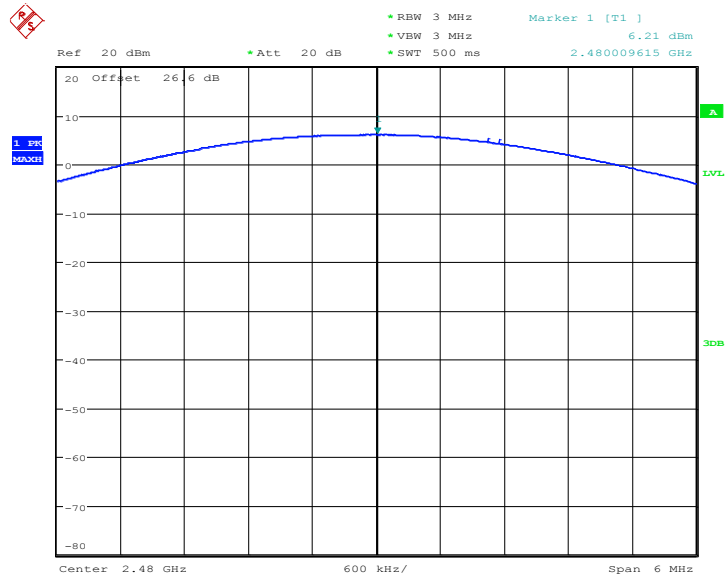


Date: 6.NOV.2012 23:41:27



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.00	20.97	Pass
39	2441	6.84	20.97	Pass
78	2480	6.69	20.97	Pass


Peak Output Power Plot on Channel 00

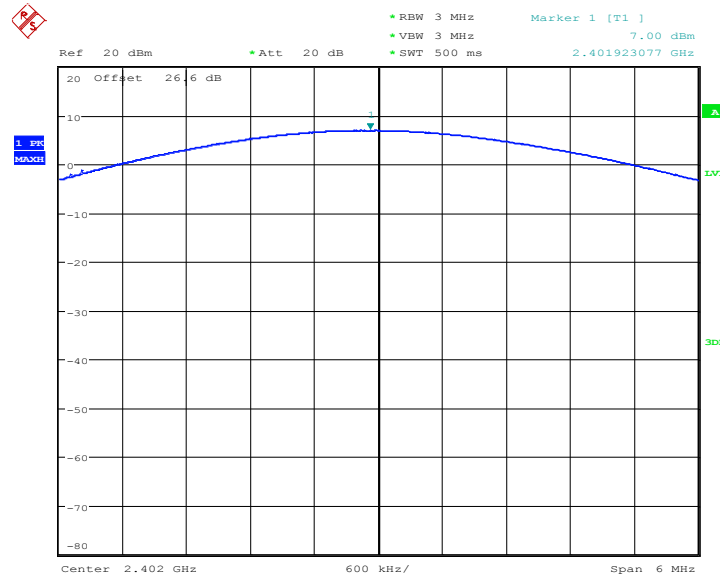

Date: 6.NOV.2012 23:39:26




Peak Output Power Plot on Channel 39

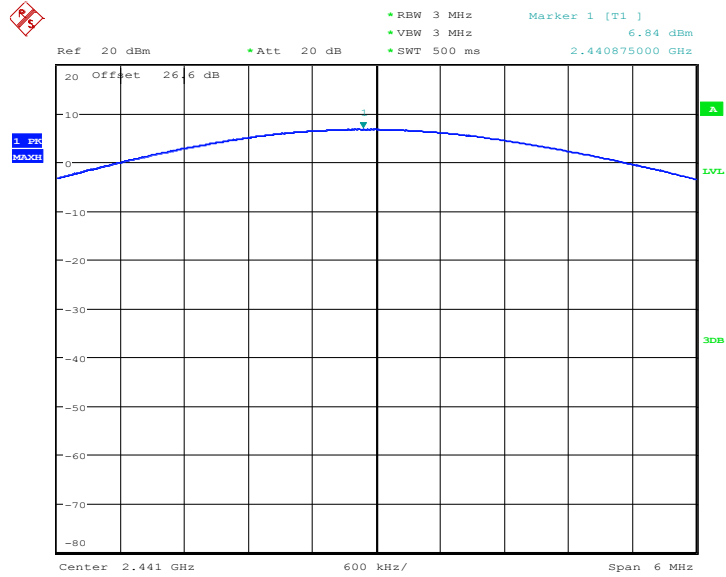

Date: 6.NOV.2012 23:40:38

Peak Output Power Plot on Channel 78

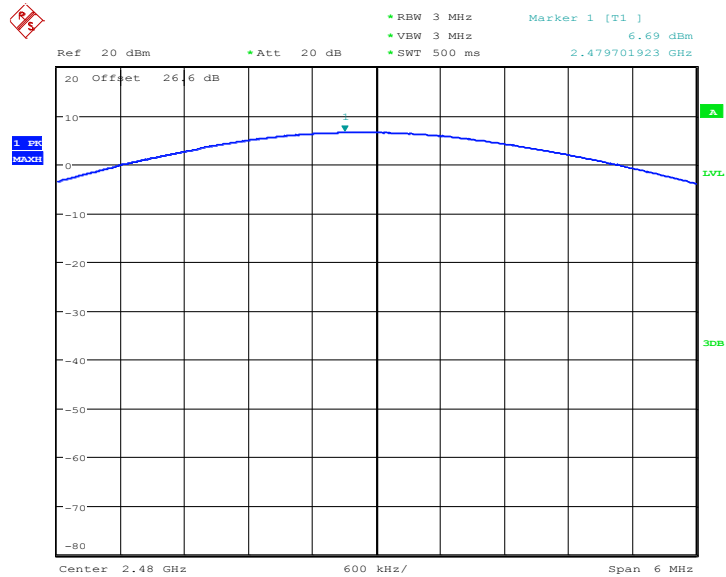

Date: 6.NOV.2012 23:41:51

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ( $\geq 1\%$  span=30MHz ), VBW = 300KHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

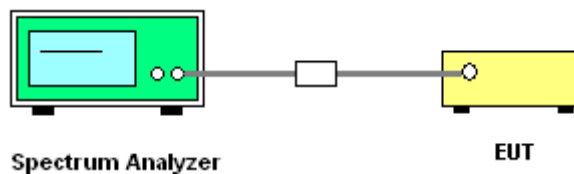




### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

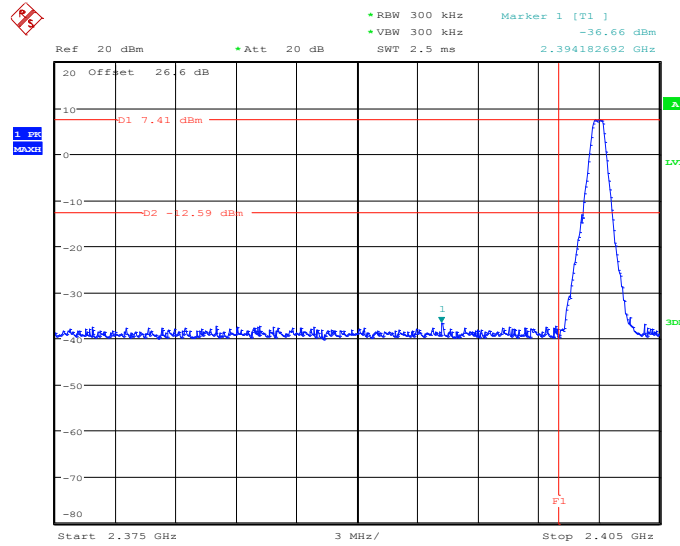

Date: 7.NOV.2012 01:16:38

High Band Edge Plot on Channel 78

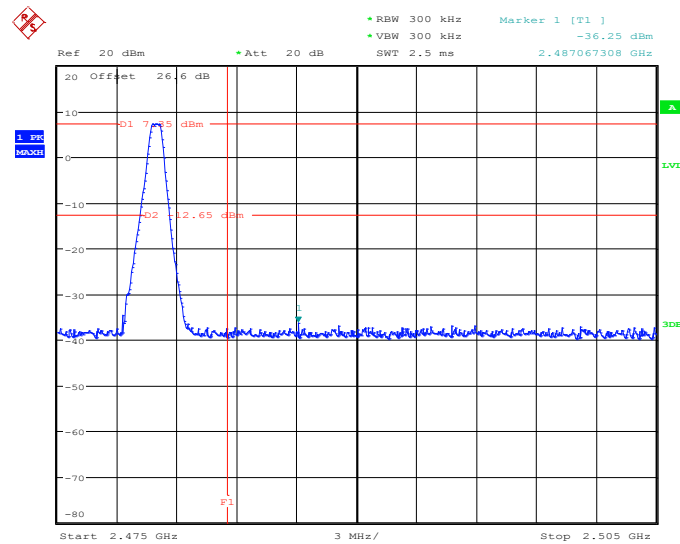


Date: 7.NOV.2012 00:16:43






Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

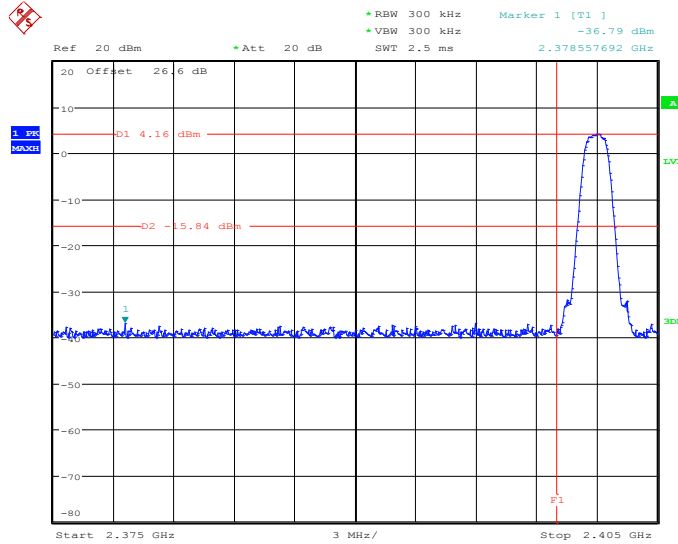

Date: 7.NOV.2012 00:17:27

High Band Edge Plot on Channel 78

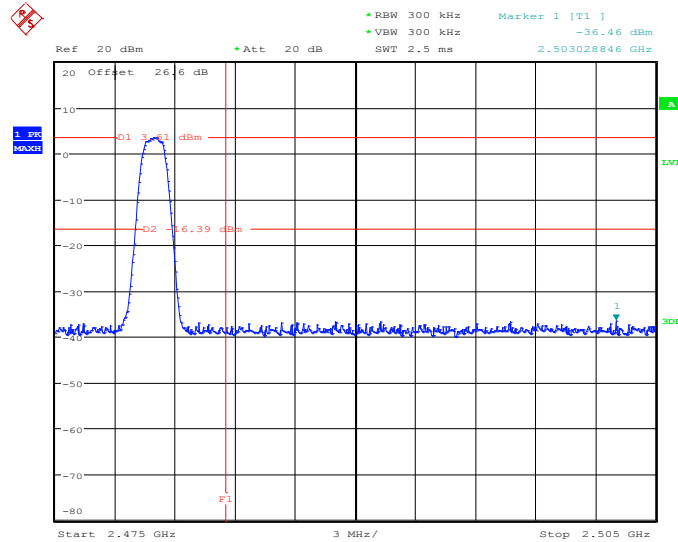


Date: 7.NOV.2012 00:17:07




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

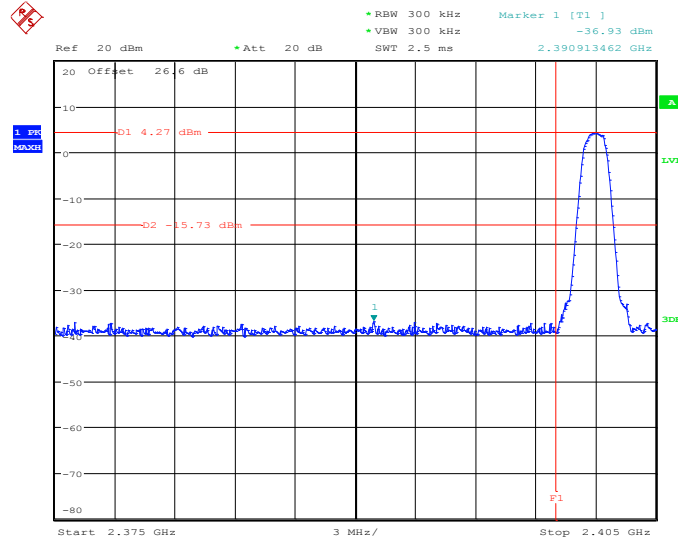

Date: 7.NOV.2012 00:18:05

High Band Edge Plot on Channel 78

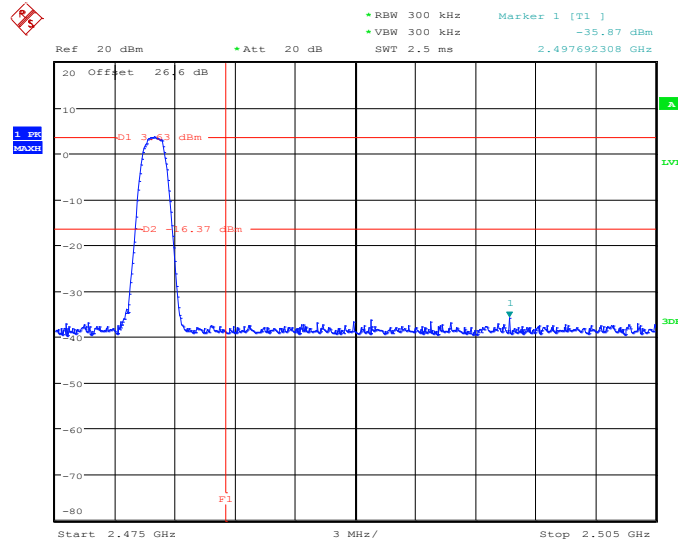


Date: 7.NOV.2012 00:18:43



### 3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

1Mbps Hopping Mode Low Band Edge Plot

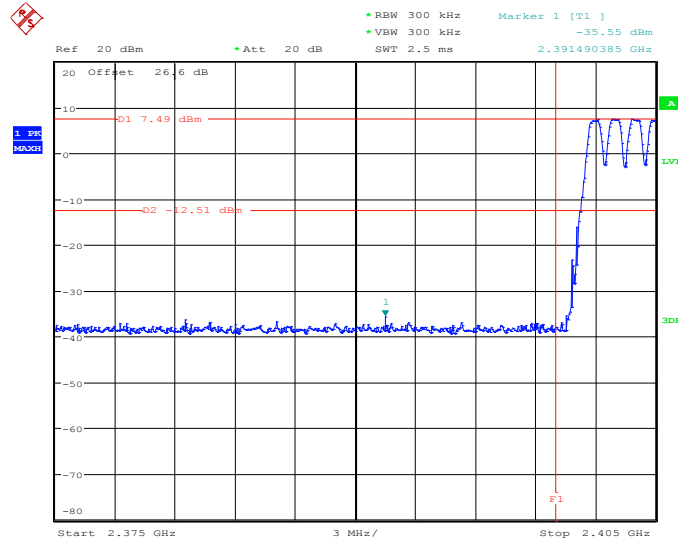

Date: 7.NOV.2012 01:28:25

1Mbps Hopping Mode High Band Edge Plot

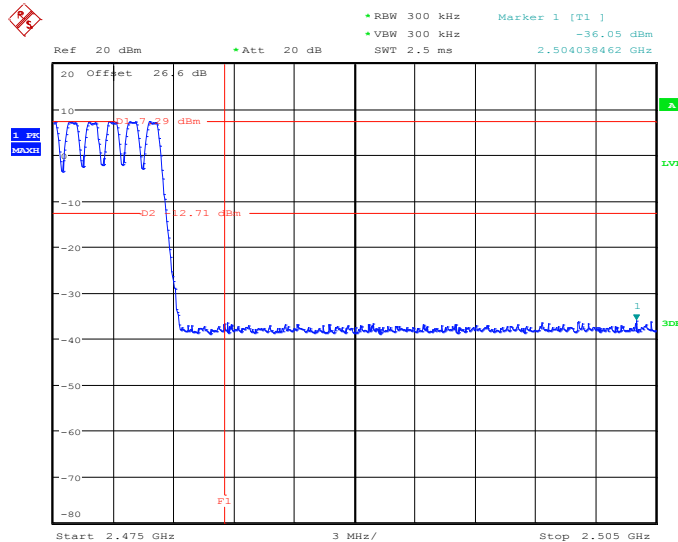


Date: 7.NOV.2012 01:29:58




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot

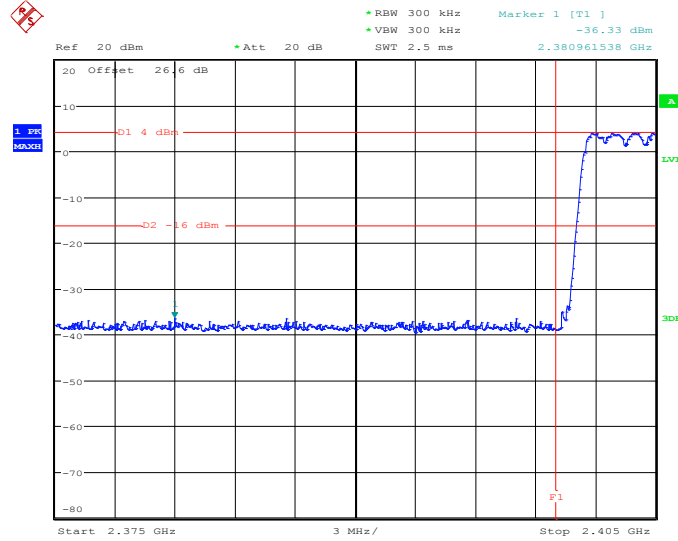

Date: 7.NOV.2012 01:32:23

2Mbps Hopping Mode High Band Edge Plot

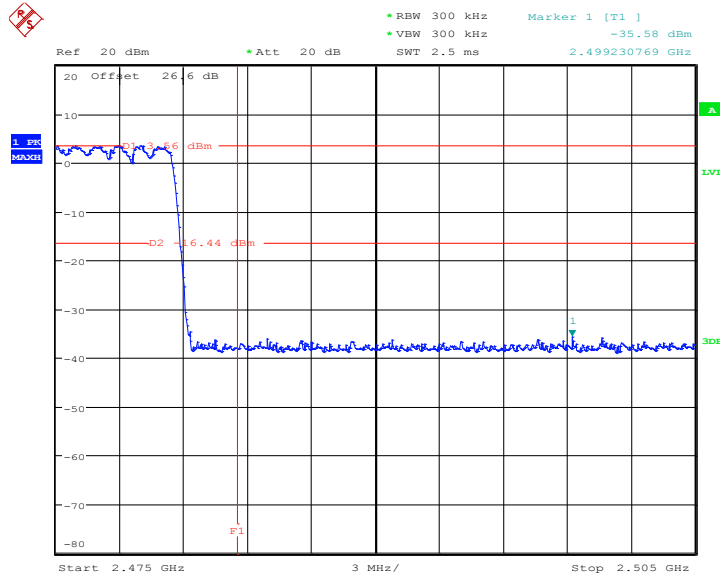


Date: 7.NOV.2012 01:31:12




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

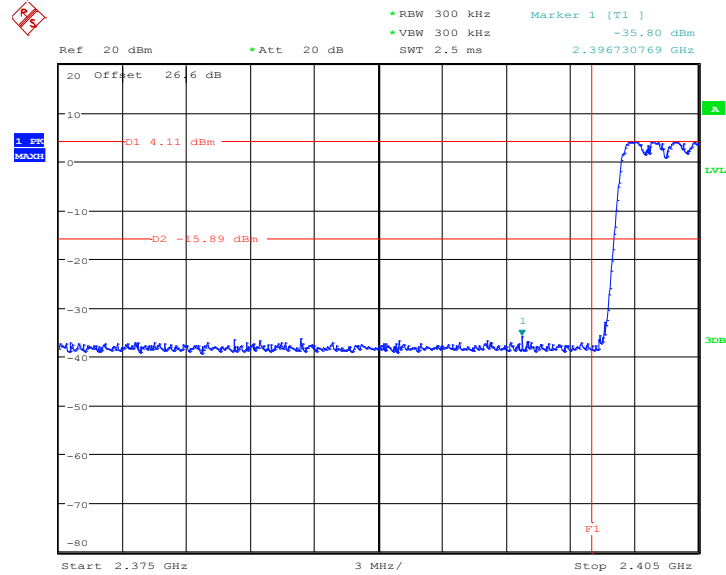

Date: 7.NOV.2012 01:34:15

3Mbps Hopping Mode High Band Edge Plot

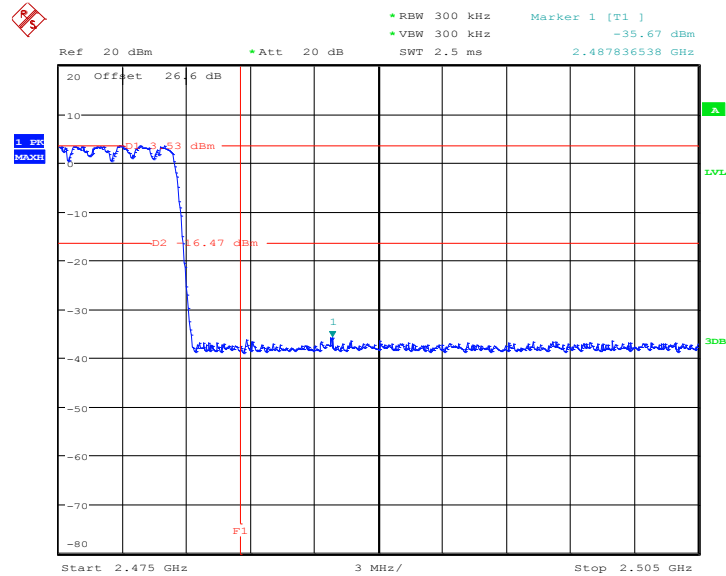

Date: 7.NOV.2012 01:35:56

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

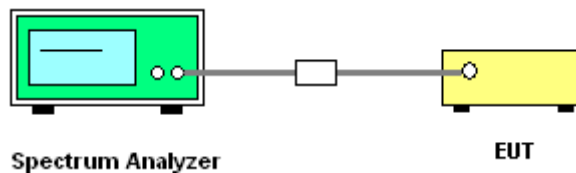

### 3.7.5 Test Result


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

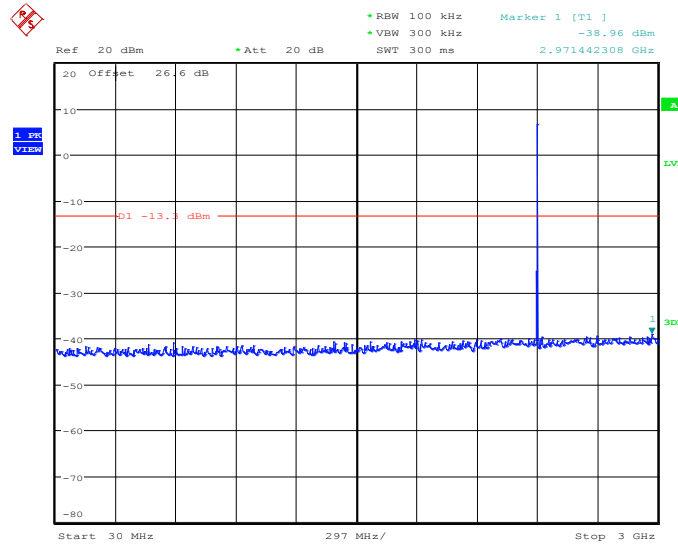

Date: 7.NOV.2012 01:39:07

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

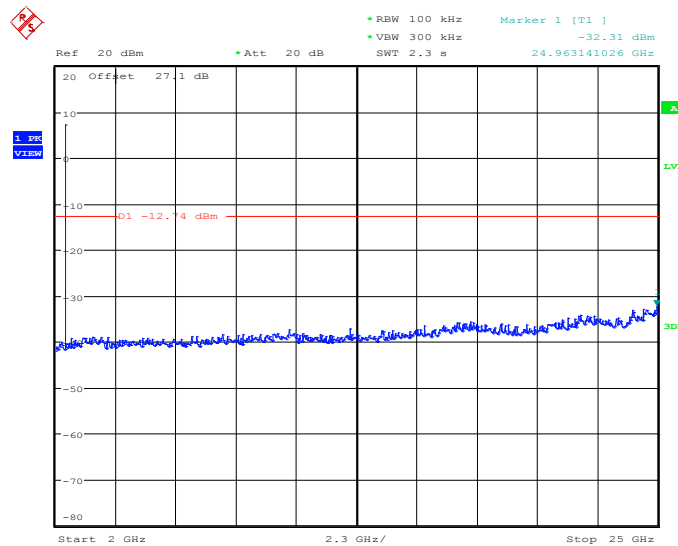


Date: 7.NOV.2012 01:39:29




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

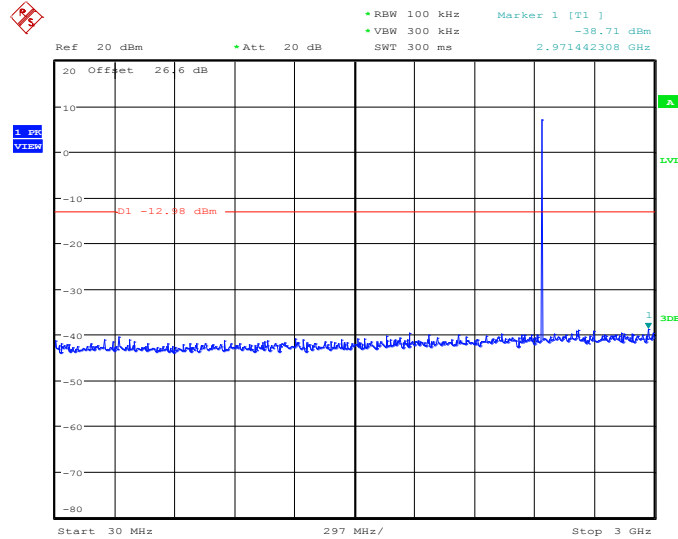

Date: 7.NOV.2012 01:38:19

1Mbps CSE Plot on Ch 39 Plot between 2 GHz ~ 25 GHz

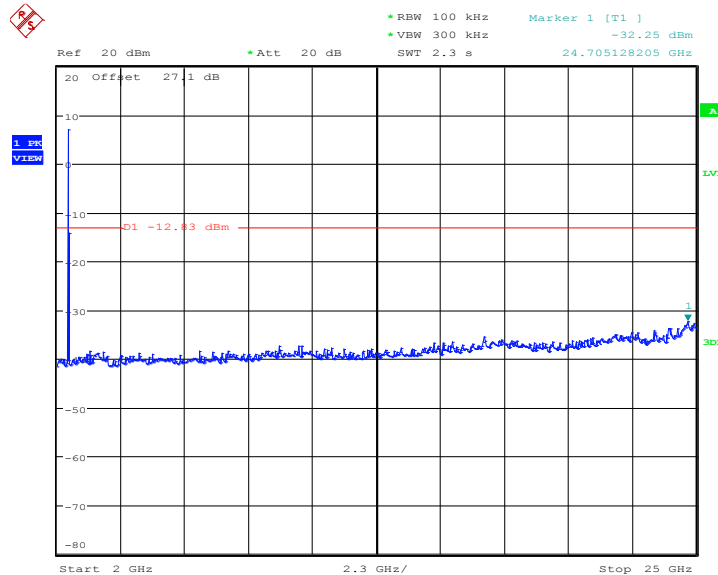


Date: 7.NOV.2012 01:38:40






Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 78 Plot between 30MHz ~ 3 GHz

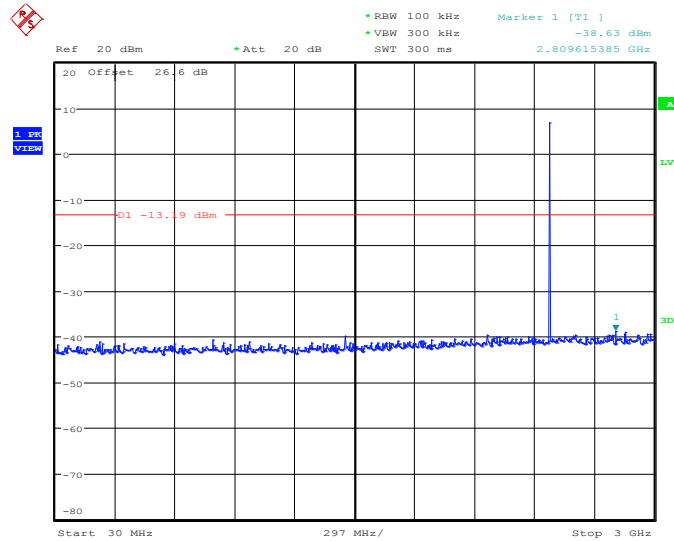

Date: 7.NOV.2012 01:37:31

1Mbps CSE Plot on Ch 78 Plot between 2 GHz ~ 25 GHz

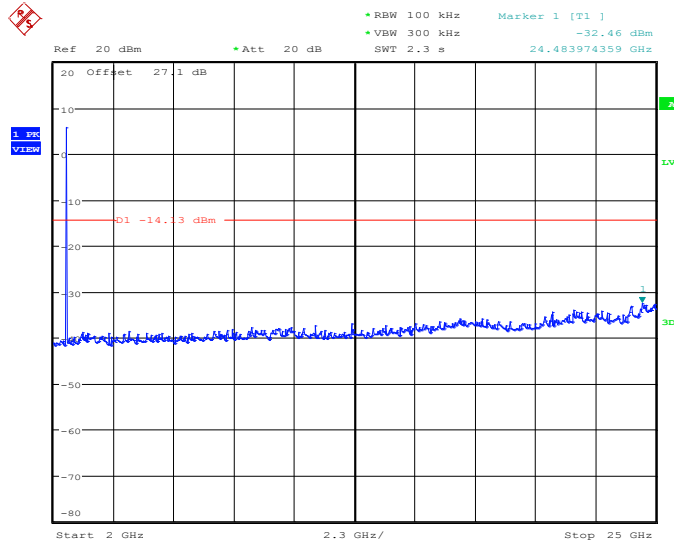


Date: 7.NOV.2012 01:37:52




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 00 Plot between 30MHz ~ 3 GHz

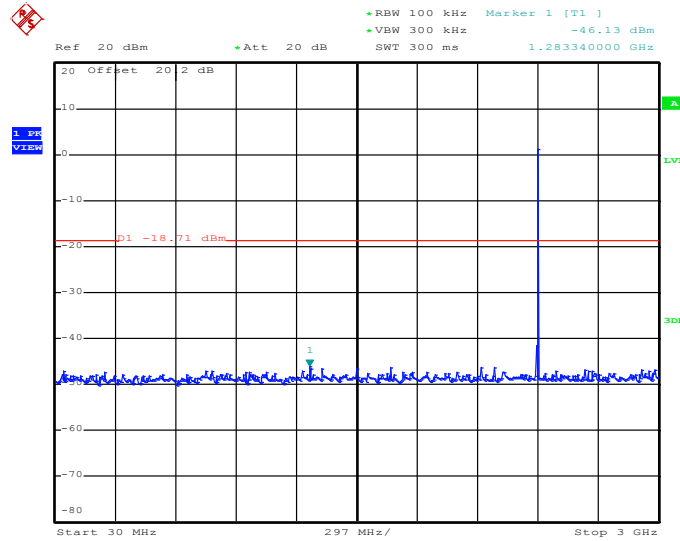

Date: 17.DEC.2012 16:33:01

2Mbps CSE Plot on Ch 00 Plot between 2 GHz ~ 25 GHz

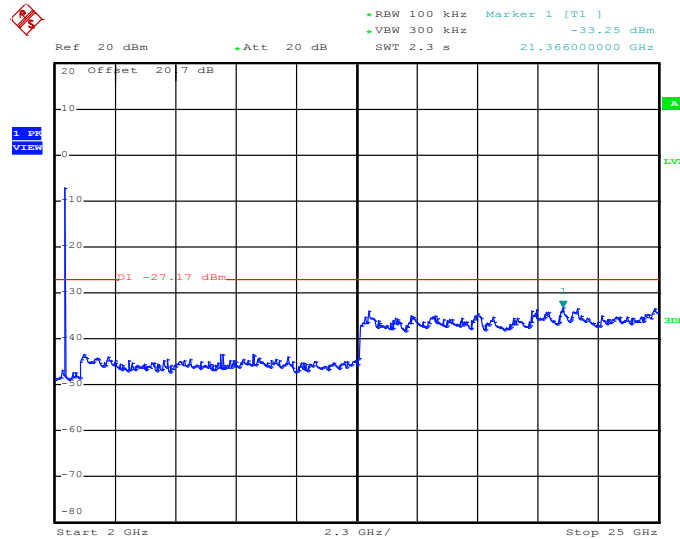


Date: 17.DEC.2012 16:33:23




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 39 Plot between 30MHz ~ 3 GHz

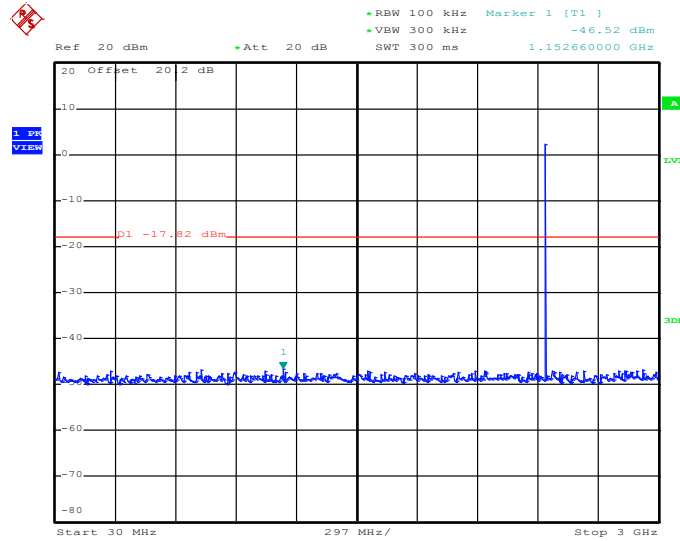

Date: 17.DEC.2012 16:34:10

2Mbps CSE Plot on Ch 39 Plot between 2 GHz ~ 25 GHz

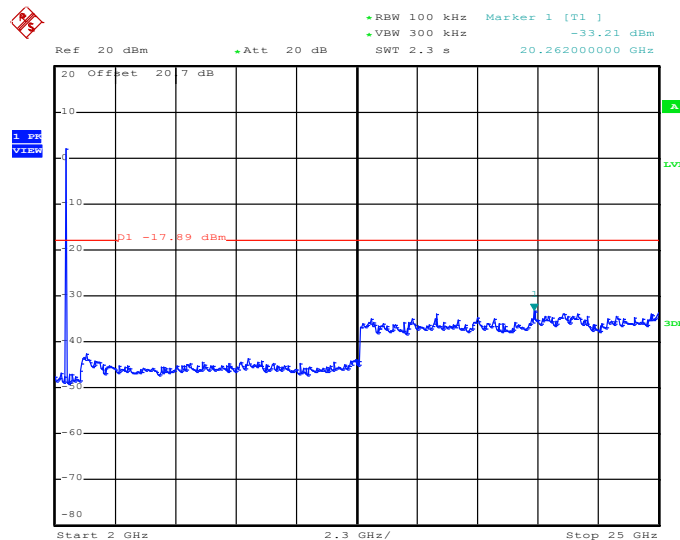


Date: 17.DEC.2012 16:34:36




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 78 Plot between 30MHz ~ 3 GHz

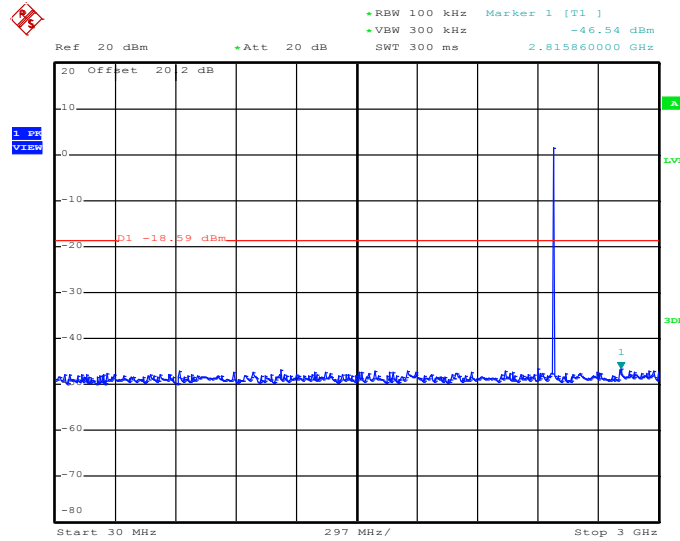

Date: 17.DEC.2012 16:35:17

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

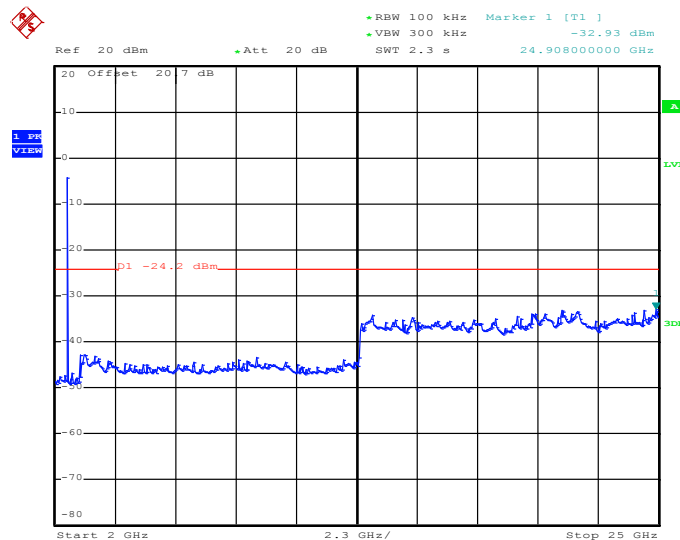


Date: 17.DEC.2012 16:35:43




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 00 Plot between 30MHz ~ 3 GHz

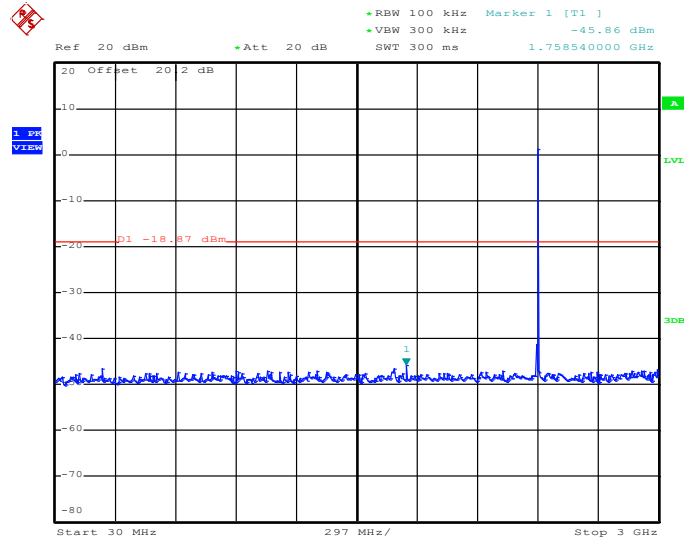

Date: 17.DEC.2012 16:39:28

3Mbps CSE Plot on Ch 00 Plot between 2 GHz ~ 25 GHz

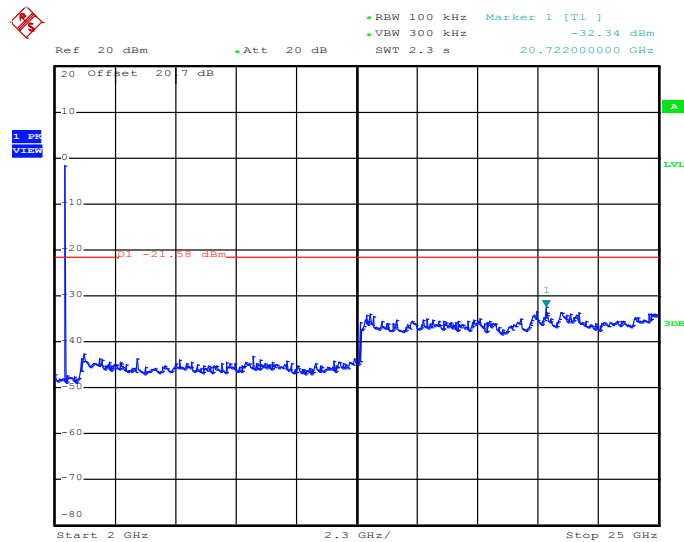


Date: 17.DEC.2012 16:39:54




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 39 Plot between 30MHz ~ 3 GHz

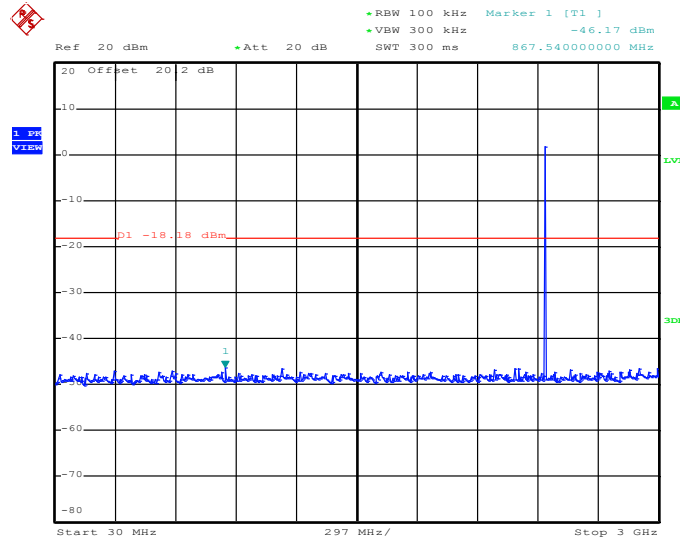

Date: 17.DEC.2012 16:38:16

3Mbps CSE Plot on Ch 39 Plot between 2 GHz ~ 25 GHz

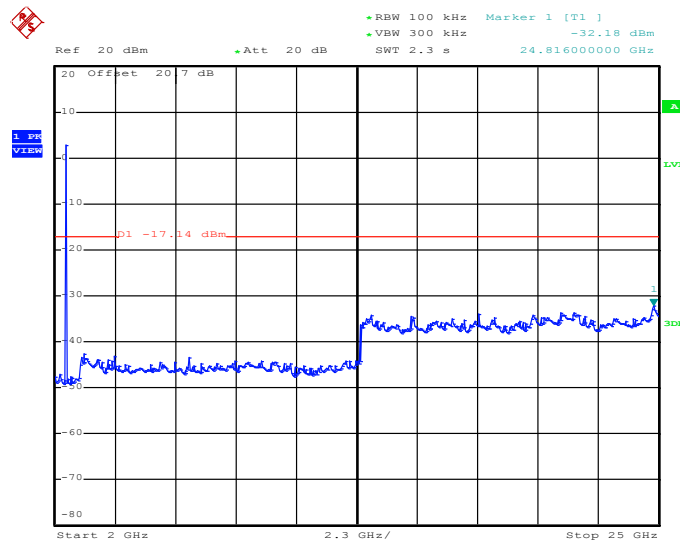


Date: 17.DEC.2012 16:38:41




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 78 Plot between 30MHz ~ 3 GHz

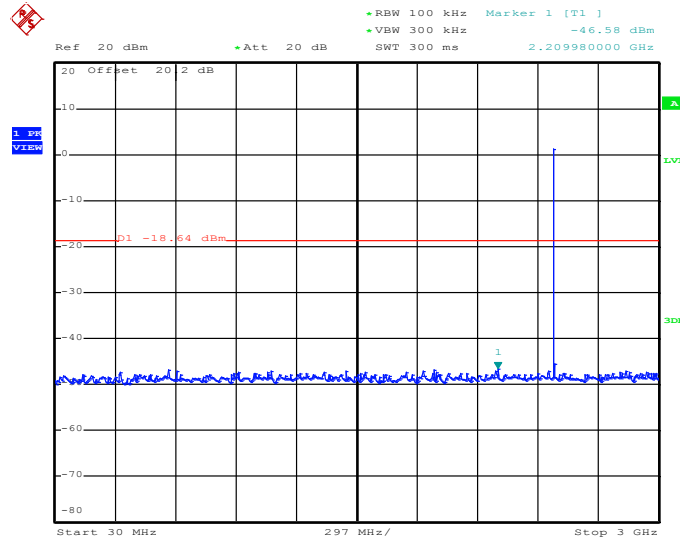

Date: 17.DEC.2012 16:36:45

3Mbps CSE Plot on Ch 78 Plot between 2 GHz ~ 25 GHz

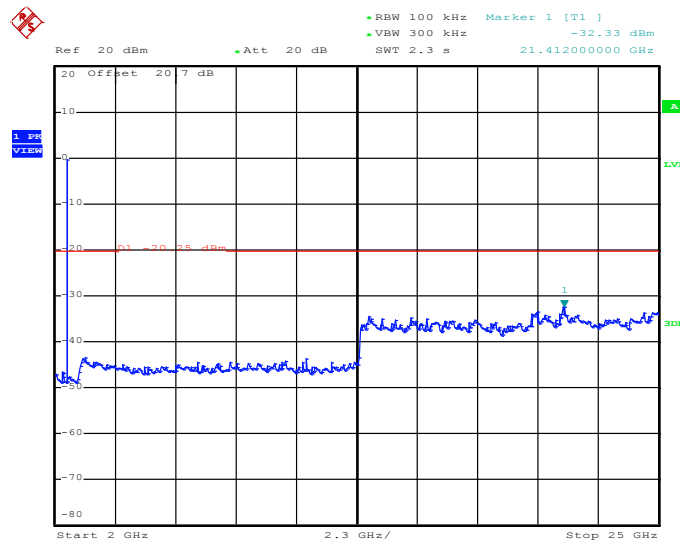

Date: 17.DEC.2012 16:37:08



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.






### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1 \text{ GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ .

### 3.8.4 Test Setup


For radiated emissions below 30MHz

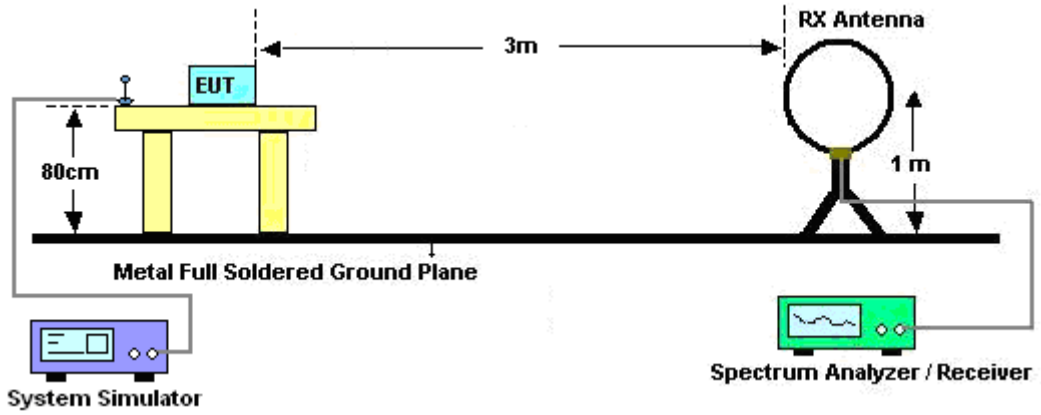

For radiated emissions from 30MHz to 1GHz

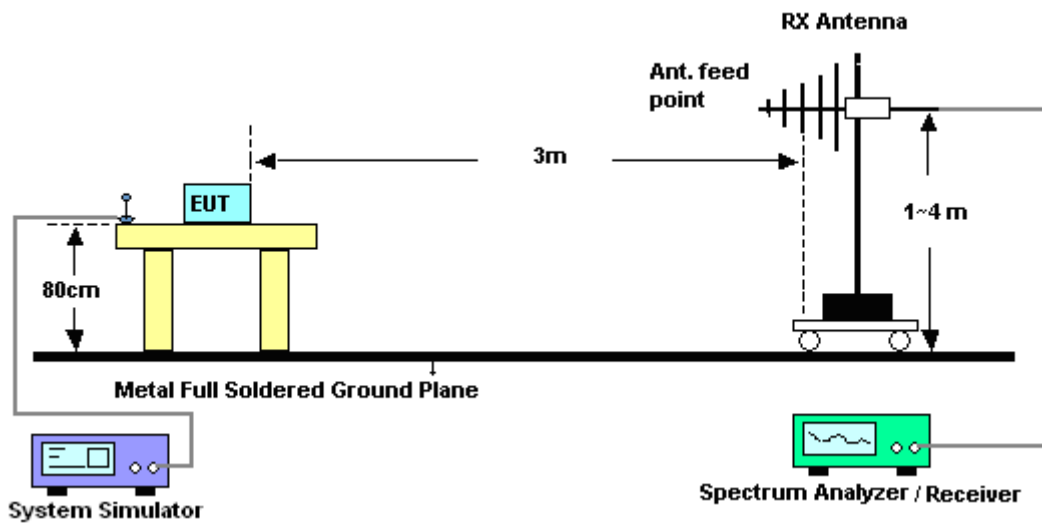

For radiated emissions above 1GHz

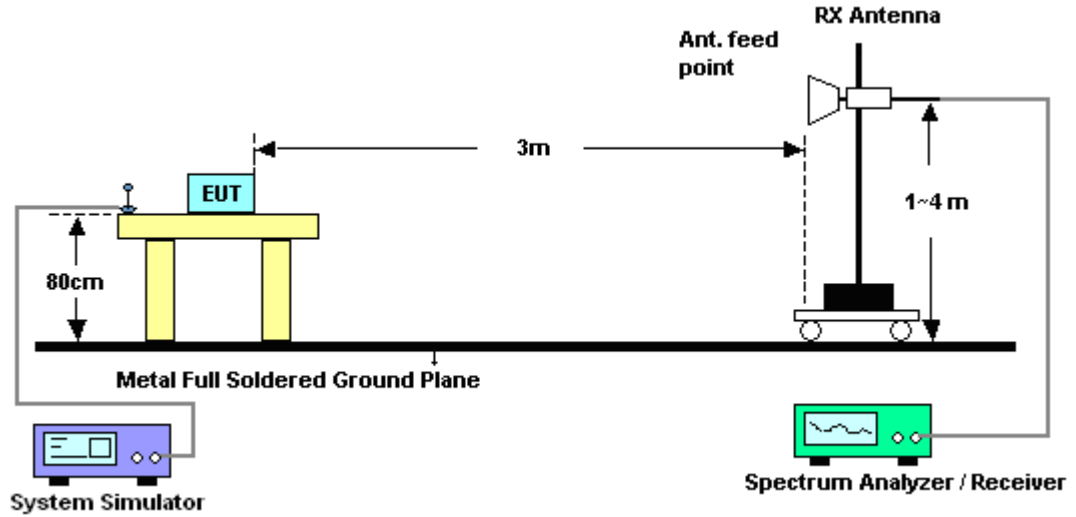


### 3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.8.6 Duty cycle correction factor for average measurement

#### DH5 on time/100ms (One Pulse) Plot on Channel 39

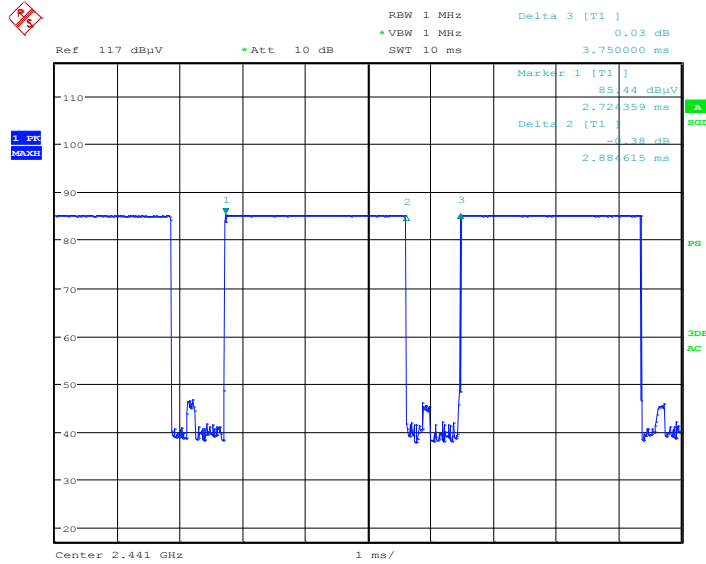

Date: 8.NOV.2012 22:33:44

#### DH5 on time/100ms (Count Pulses) Plot on Channel 39

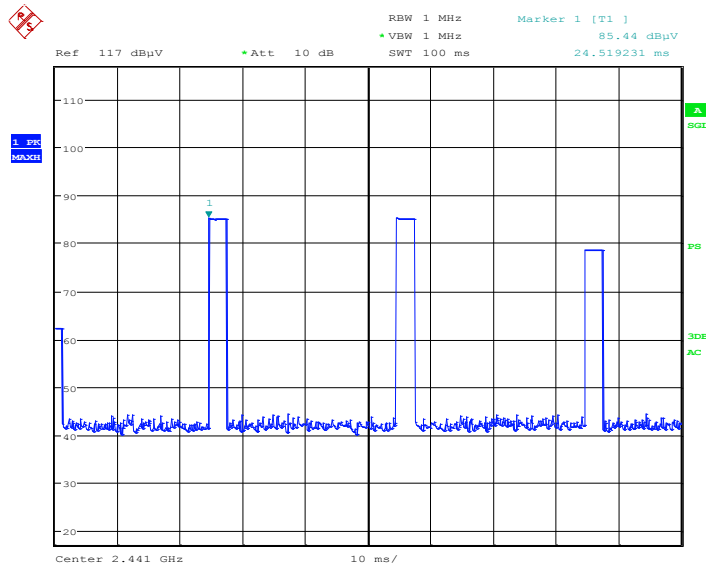

Date: 8.NOV.2012 22:37:20

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88ms \times 20 \text{ channels} = 56.00ms$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100ms / 57.6ms] = 2$  hops

Thus, the maximum possible ON time:

$$2.88ms \times 2 = 5.60ms$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.88ms/100ms) = -24.79 \text{ dB}$$



3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	52~57%
		Test Engineer :	David Ke

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2377.32	47.48	-26.52	74	46.63	32.16	4.57	35.88	109	267	Peak
2377.32	22.69	-31.31	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2350.05	46.47	-27.53	74	45.7	32.11	4.55	35.89	100	324	Peak
2350.05	21.68	-32.32	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	52~57%
		Test Engineer :	David Ke

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.02	-14.98	74	57.91	32.28	4.64	35.81	101	105	Peak
2483.5	34.23	-19.77	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	52.9	-21.1	74	51.79	32.28	4.64	35.81	100	45	Peak
2483.5	28.11	-25.89	54	-	-	-	-	-	-	Average



**3.8.8 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	52~57%
<b>Test Engineer :</b>	David Ke	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	100.11	-	-	99.21	32.18	4.58	35.86	109	267	Peak
2402	75.32	-	-	-	-	-	-	-	-	Average
4803	40.79	-33.21	74	59.09	34.26	6.5	59.06	100	0	Peak
4803	16	-38	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	52~57%
<b>Test Engineer :</b>	David Ke	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	93.81	-	-	92.91	32.18	4.58	35.86	100	324	Peak
2402	69.02	-	-	-	-	-	-	-	-	Average
4803	39.54	-34.46	74	57.84	34.26	6.5	59.06	100	0	Peak
4803	14.75	-39.25	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	52~57%
<b>Test Engineer :</b>	David Ke	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	101.96	-	-	100.94	32.24	4.61	35.83	162	101	Peak
2441	77.17	-	-	-	-	-	-	-	-	Average
4881	39.97	-34.03	74	58.03	34.28	6.54	58.88	100	0	Peak
4881	15.18	-38.82	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	52~57%
<b>Test Engineer :</b>	David Ke	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	97.28	-	-	96.26	32.24	4.61	35.83	100	45	Peak
2441	72.49	-	-	-	-	-	-	-	-	Average
4881	40.55	-33.45	74	58.61	34.28	6.54	58.88	100	0	Peak
4881	15.76	-38.24	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.





<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	52~57%
<b>Test Engineer :</b>	David Ke	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.24	27.08	-12.92	40	40.91	17.08	0.72	31.63	112	207	Peak
47.01	26.12	-13.88	40	47.01	9.8	0.79	31.48	-	-	Peak
151.5	27.87	-15.63	43.5	46.59	11.24	1.28	31.24	-	-	Peak
332.9	18.72	-27.28	46	34.21	13.71	1.86	31.06	-	-	Peak
571.6	21.02	-24.98	46	29.54	19.88	2.37	30.77	-	-	Peak
762	24.38	-21.62	46	29.61	22.1	2.77	30.1	-	-	Peak
2480	102.92	-	-	101.81	32.28	4.64	35.81	101	105	Peak
2480	78.13	-	-	-	-	-	-	-	-	Average
4959	40.19	-33.81	74	57.98	34.29	6.57	58.65	100	0	Peak
4959	15.4	-38.6	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	52~57%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.47	36.98	-3.02	40	57.47	10.23	0.78	31.5	100	294	Peak
106.95	27.02	-16.48	43.5	46.9	10.52	1.12	31.52	-	-	Peak
153.12	23.68	-19.82	43.5	42.51	11.12	1.29	31.24	-	-	Peak
413.4	17.57	-28.43	46	30.41	16.22	2.05	31.11	-	-	Peak
633.9	22.28	-23.72	46	29.54	20.4	2.54	30.2	-	-	Peak
832	25.88	-20.12	46	29.76	22.96	2.89	29.73	-	-	Peak
2480	96.49	-	-	95.38	32.28	4.64	35.81	100	45	Peak
2480	71.7	-	-	-	-	-	-	-	-	Average
4959	39.67	-34.33	74	57.46	34.29	6.57	58.65	100	0	Peak
4959	14.88	-39.12	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.9.4 Test Setup

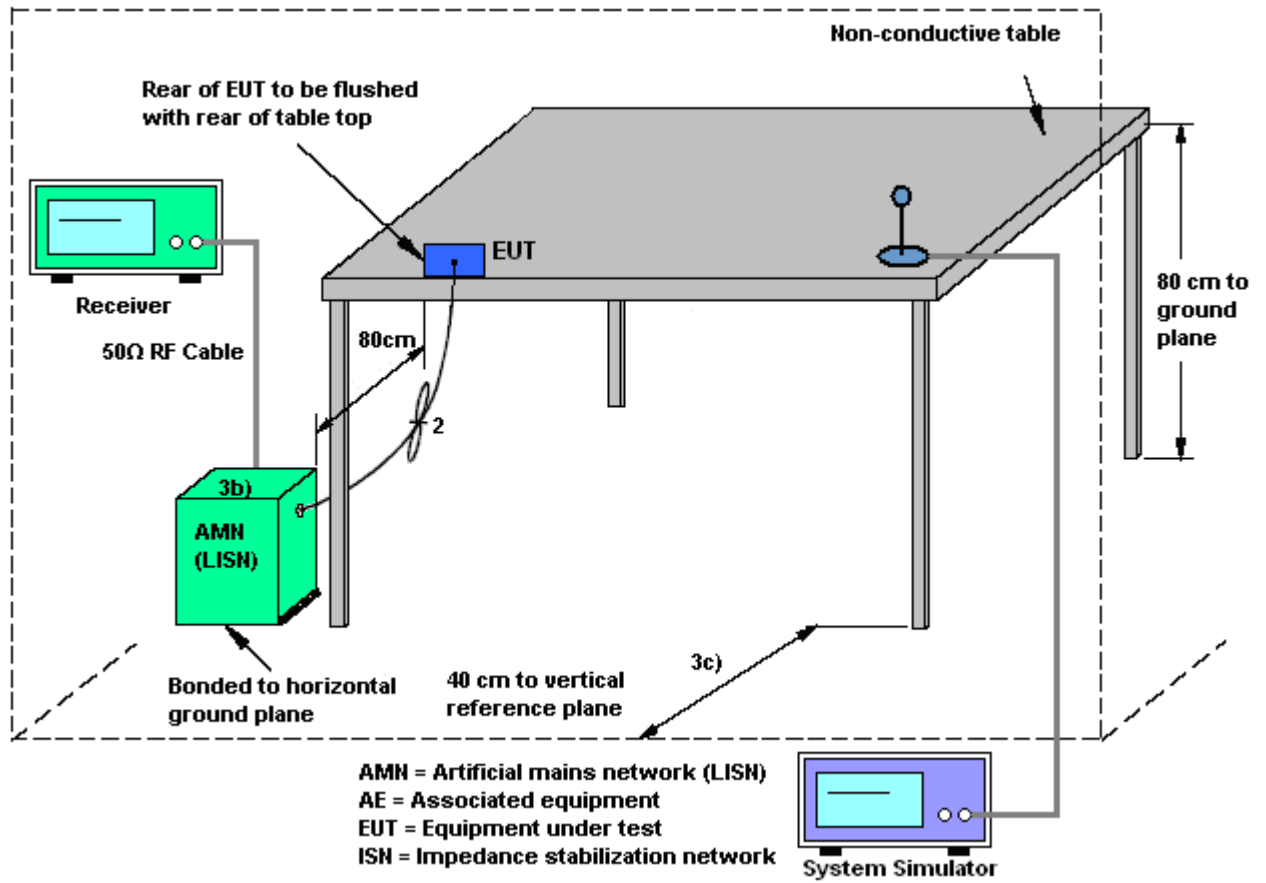

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

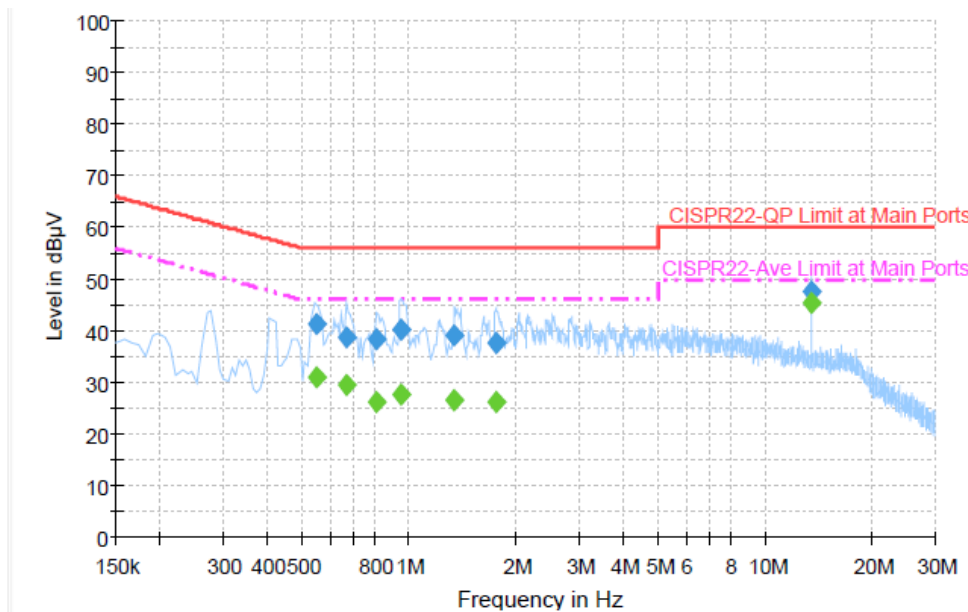


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.550000	41.2	Off	L1	19.4	14.8	56.0
0.670000	38.8	Off	L1	19.4	17.2	56.0
0.814000	38.3	Off	L1	19.4	17.7	56.0
0.950000	40.2	Off	L1	19.4	15.8	56.0
1.342000	39.2	Off	L1	19.4	16.8	56.0
1.750000	37.5	Off	L1	19.4	18.5	56.0
13.558000	47.7	Off	L1	19.6	12.3	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.550000	31.0	Off	L1	19.4	15.0	46.0
0.670000	29.5	Off	L1	19.4	16.5	46.0
0.814000	26.2	Off	L1	19.4	19.8	46.0
0.950000	27.5	Off	L1	19.4	18.5	46.0
1.342000	26.6	Off	L1	19.4	19.4	46.0
1.750000	26.2	Off	L1	19.4	19.8	46.0
13.558000	45.3	Off	L1	19.6	4.7	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

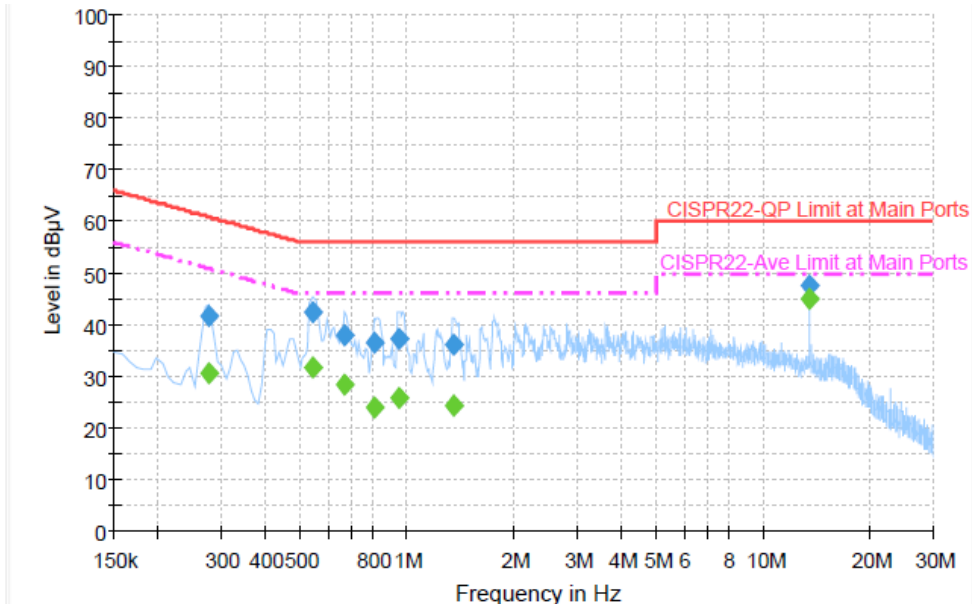

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.278000	41.9	Off	N	19.4	19.0	60.9
0.542000	42.4	Off	N	19.4	13.6	56.0
0.670000	38.0	Off	N	19.4	18.0	56.0
0.806000	36.4	Off	N	19.4	19.6	56.0
0.950000	37.4	Off	N	19.4	18.6	56.0
1.350000	36.0	Off	N	19.5	20.0	56.0
13.558000	47.4	Off	N	19.7	12.6	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.278000	30.8	Off	N	19.4	20.1	50.9
0.542000	31.6	Off	N	19.4	14.4	46.0
0.670000	28.4	Off	N	19.4	17.6	46.0
0.806000	24.1	Off	N	19.4	21.9	46.0
0.950000	25.9	Off	N	19.4	20.1	46.0
1.350000	24.4	Off	N	19.5	21.6	46.0
13.558000	45.1	Off	N	19.7	4.9	50.0



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

Non-standard connector used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Nov. 06, 2012 ~ Dec. 17, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 05, 2012	Nov. 06, 2012 ~ Dec. 17, 2012	Jun. 04, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz ~ 26.5GHz	Dec. 22, 2011	Nov. 06, 2012 ~ Nov. 09, 2012	Dec. 21, 2012	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~2GHz	Oct. 06, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Oct. 05, 2013	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Nov. 06, 2012 ~ Nov. 09, 2012	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Nov. 06, 2012 ~ Nov. 09, 2012	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz~18GHz	Aug. 10, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Aug. 09, 2013	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A02665	1GHz~26.5GHz	Aug. 28, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Aug. 27, 2013	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Sep. 27, 2013	Radiation (03CH05-HY)
Pre Amplifier	COM-POWER	PA-103	161075	10-1000MHz.32dB.GAIN	Feb. 27, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Feb. 26, 2013	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Jul. 02, 2013	Radiation (03CH05-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Feb. 09, 2012	Nov. 06, 2012 ~ Nov. 09, 2012	Feb. 08, 2014	Radiation (03CH05-HY)
EMI Test Receiver	R&S	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Nov. 07, 2012 ~ Nov. 29, 2012	Sep. 02, 2013	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Nov. 07, 2012 ~ Nov. 29, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Nov. 07, 2012 ~ Nov. 29, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Nov. 07, 2012 ~ Nov. 29, 2012	N/A	Conduction (CO05-HY)
System Simulator	Agilent	E5515C (8960)	MY48360820	N/A	Jan. 05, 2012	Nov. 07, 2012 ~ Nov. 29, 2012	Jan. 04, 2014	Conduction (CO05-HY)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------