



FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : Smartphone
Brand Name : HTC
Model No. : PL80120
Filing Type : New Application
Applicant : HTC Corporation
Manufacturer : No.23, Xinghua Rd., Taoyuan City,
Taoyuan County 330, Taiwan.
FCC ID : NM8PL80120
Received Date : Sep. 10, 2012
Final Test Date : Sep. 26, 2012

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. SUMMARY OF THE TEST RESULT	2
2. GENERAL INFORMATION	3
1.1 Product Details	3
2.1 Accessories	3
2.2 Test Manner	4
2.3 Table for Test Modes	4
1.2 Table for Testing Locations	4
1.3 Table for Supporting Units	4
2.4 Test Configurations	5
3. TEST RESULT	8
3.1 AC Power Line Conducted Emissions Measurement	8
3.2 Field Strength of Fundamental Emissions and Mask Measurement	14
3.3 20dB Spectrum Bandwidth Measurement	17
3.4 Radiated Emissions Measurement	20
3.5 Frequency Stability Measurement	26
3.6 Antenna Requirements	28
4. LIST OF MEASURING EQUIPMENTS	29
5. TEST LOCATION	31
6. TAF CERTIFICATE OF ACCREDITATION	32
APPENDIX A. TEST PHOTOS	A8
APPENDIX B. PHOTOGRAPHS OF EUT	B21



CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : **Smartphone**

Brand Name : **HTC**

Model No. : **PL80120**

Applicant : **HTC Corporation**

No.23, Xinghua Rd., Taoyuan City,
Taoyuan County 330, Taiwan.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 10, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	10.90 dB
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	74.92 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d)	Radiated Emissions	Complies	3.51 dB
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2. GENERAL INFORMATION

1.1 Product Details

Items	Description
Power Type	5Vdc from AC Adapter ; 3.8Vdc from Li-ion battery
Modulation	ASK
Channel Number	1
Max. Field Strength	49.08 dBuV/m at 3m (QP)
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	Integrate Antenna (Without any antenna connector)

2.1 Accessories

Accessories Information						
AC Adapter 1	Brand Name	HTC	Model Name	TC U250	P/N	79H00120-00M
	Manufacturer	Phihong				
	Power Rating	I/P: 100-240V~200mA 50-60Hz; O/P: 5V 1A				
AC Adapter 2	Brand Name	HTC	Model Name	TC U250	P/N	79H00108-13M
	Manufacturer	Salcomp				
	Power Rating	I/P: 100-240V~200mA 50-60Hz; O/P: 5V 1A				
Battery 1	Brand Name	HTC	Model Name	BM60100		
	Manufacturer	Formosa				
	Power Rating	3.8VDC, 1800mAh, 6.84Whr				
Battery 2	Brand Name	HTC	Model Name	BM60100		
	Manufacturer	WTE				
	Power Rating	3.8VDC, 1800mAh, 6.84Whr				
USB Cable 1	Brand Name	HTC	Model Name	DC M600		
	Manufacturer	Foxlink				
USB Cable 2	Brand Name	HTC	Model Name	DC M600		
	Manufacturer	Foxconn				

Remark: For accessories equipped with this EUT, please refer to the external photograph.

2.2 Test Manner

The following test modes were pretested for conducted and radiated emissions test:

Mode 1. EUT with AC Adapter 1 (Phihong / TC U250) and USB Cable 1 (Foxlink / DC M600)

Mode 2. EUT with AC Adapter 1 (Phihong / TC U250) and USB Cable 2 (Foxconn / DC M600)

The worst case was “Mode 2”.

From the above modes, **we chose the “Mode 2” USB Cable 2 with Salcomp Adapter to test:**

Mode 3. EUT with AC Adapter 2 (Salcomp / TC U250) and USB Cable 2 (Foxconn / DC M600)

From the above modes, **we chose the “Mode 2” USB Cable 2 with EUT to test:**

Mode 4. EUT with Cable 2 (Foxconn / DC M600)

The entire test, the worst case was “Mode 3” and “Mode 4”. It was reported as final data.

2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Transmitting mode	-
Radiated Emissions 30MHz~1GHz		
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note: CTX=continuously transmitting.

1.2 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya


Semi Anechoic Chamber (SAC).

1.3 Table for Supporting Units


The EUT was tested alone.

2.4 Test Configurations


For conducted emissions
Adapter Mode

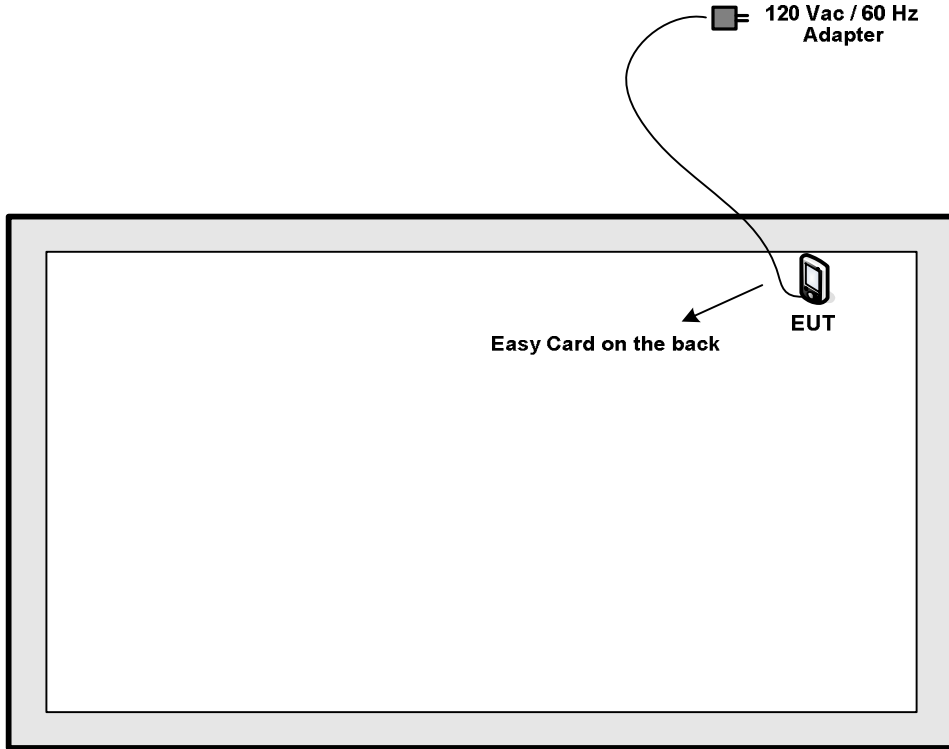


USB Mode

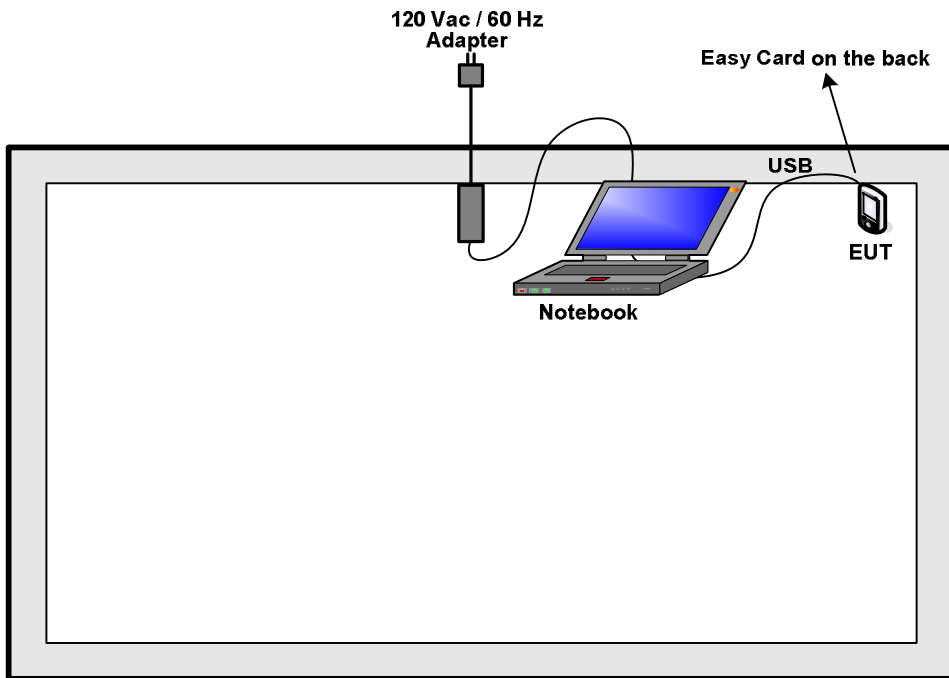


For radiated emissions 9kHz~30MHz

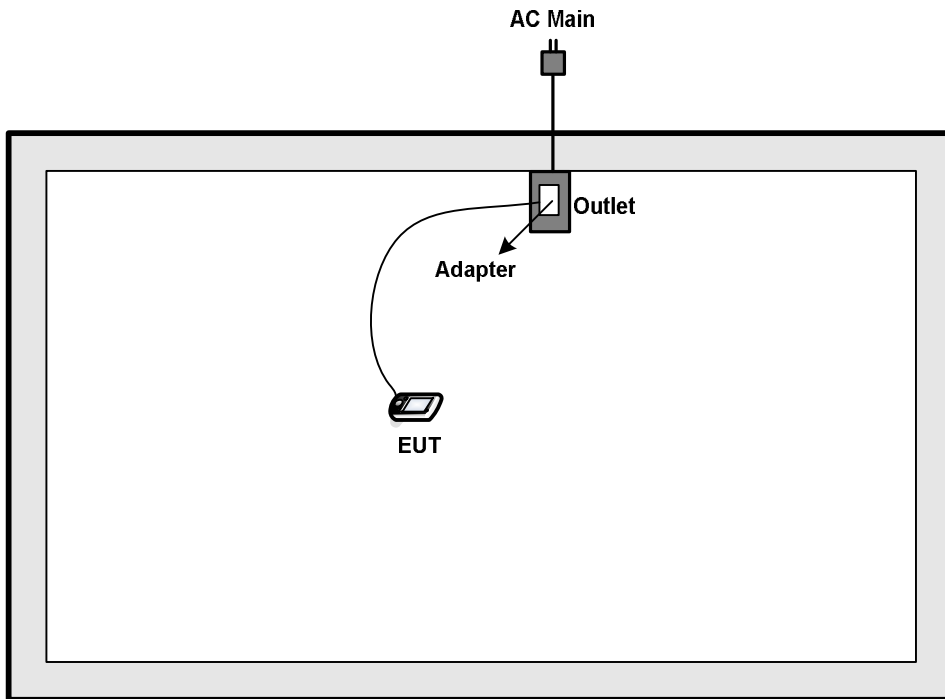

For radiated emissions 30MHz~1GHz
Adapter Mode

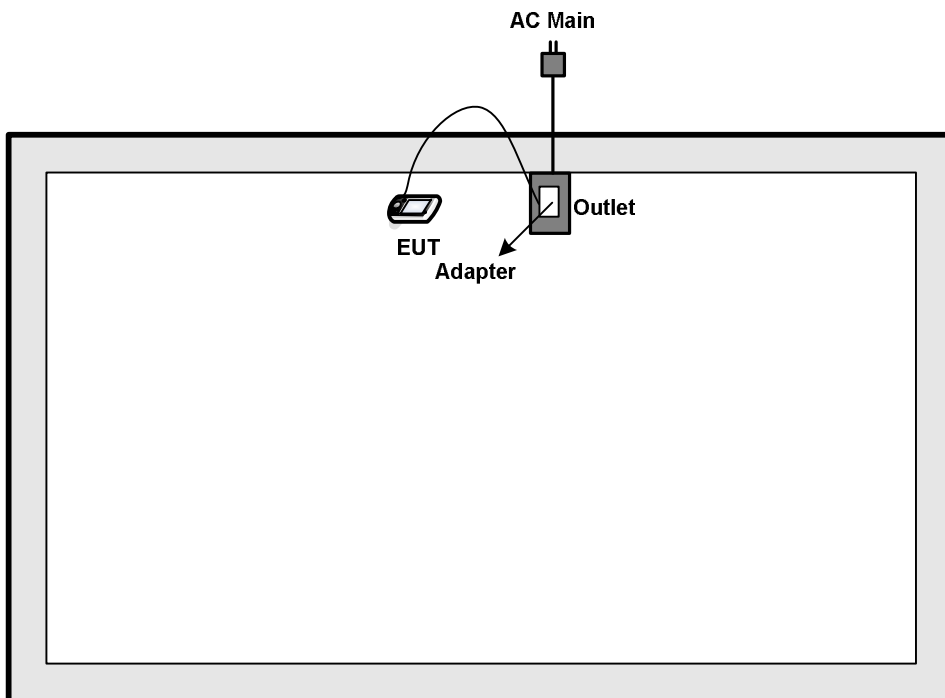

USB Mode

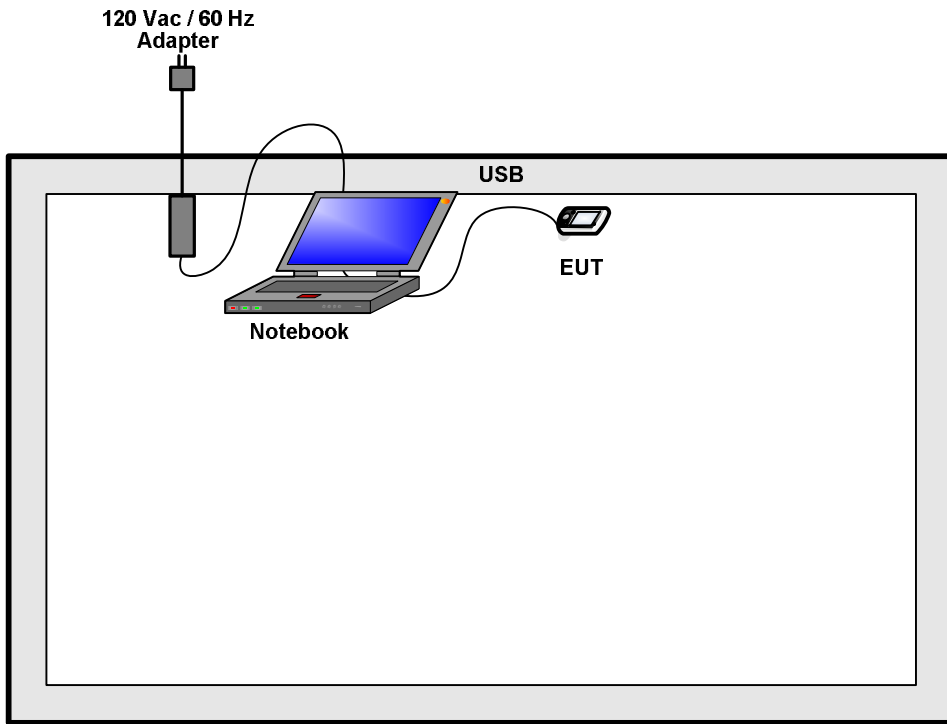

3. TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.3 Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connect to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.4 Test Setup Layout

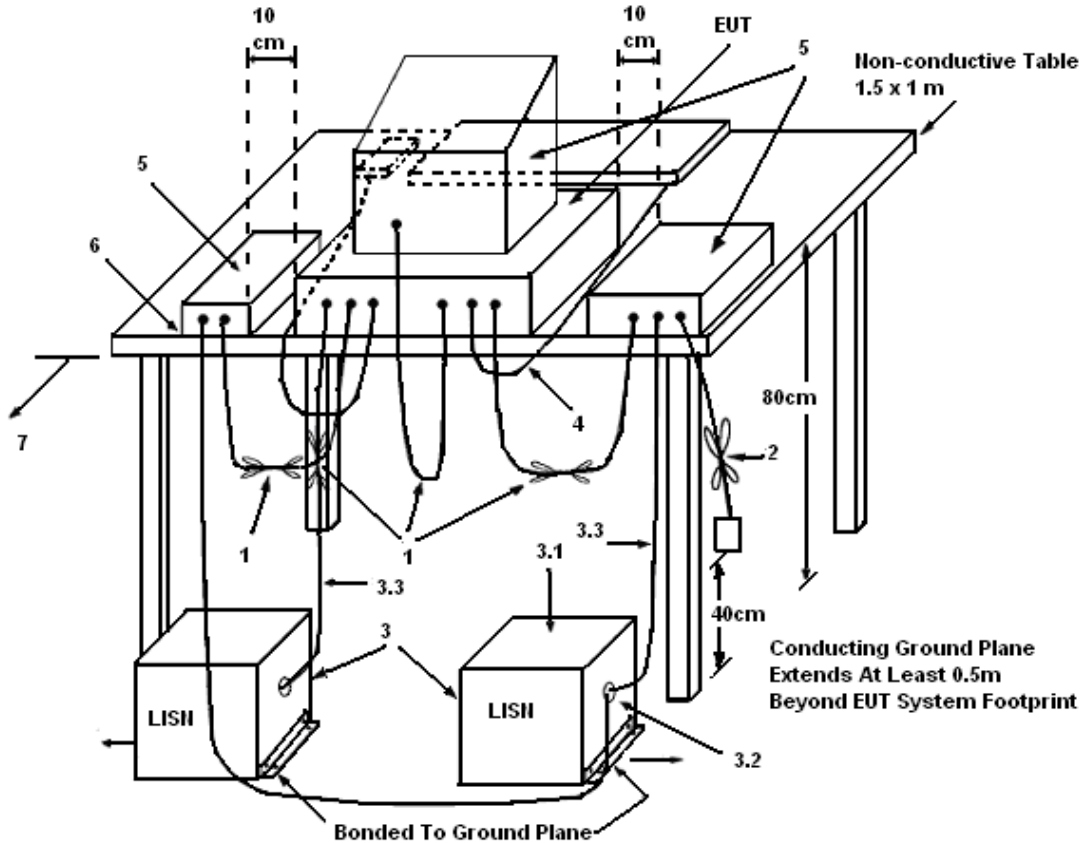

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.

3.1.6 EUT Operation during Test


The EUT was placed on the test table and programmed in transmitting function.



3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Sep. 10, 2012	Test Site No.	CO04-HY
Temperature	25.3°C	Humidity	51%
Test Engineer	Bill	Configuration	Transmitting mode (Mode 3)


Line

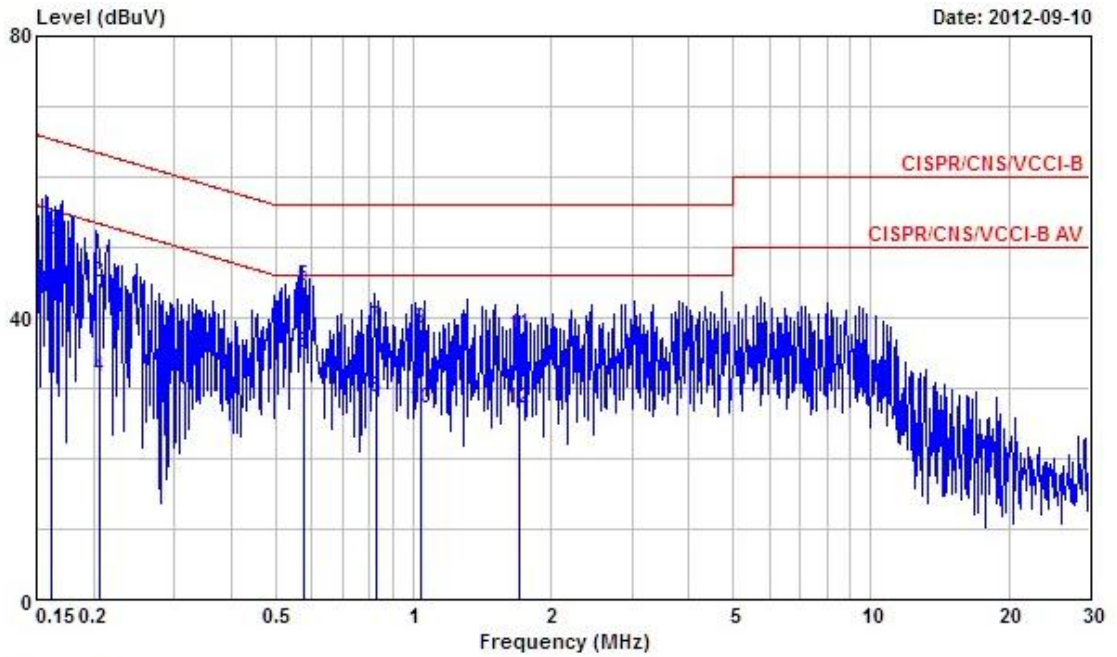

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1616950	37.56	-17.82	55.38	37.02	0.24	0.30	Average
2	0.1616950	51.07	-14.31	65.38	50.53	0.24	0.30	QP
3	0.2052850	44.87	-18.52	63.39	44.34	0.23	0.30	QP
4	0.2052850	31.56	-21.83	53.39	31.03	0.23	0.30	Average
5	0.5764910	44.53	-11.47	56.00	44.01	0.22	0.30	QP
6	0.5764910	35.10	-10.90	46.00	34.58	0.22	0.30	Average
7	0.8309160	38.69	-17.31	56.00	38.16	0.23	0.30	QP
8	0.8309160	28.57	-17.43	46.00	28.04	0.23	0.30	Average
9	1.038	38.47	-17.53	56.00	37.94	0.23	0.30	QP
10	1.038	26.98	-19.02	46.00	26.45	0.23	0.30	Average
11	1.706	37.75	-18.25	56.00	37.12	0.25	0.38	QP
12	1.706	27.12	-18.88	46.00	26.49	0.25	0.38	Average



Neutral

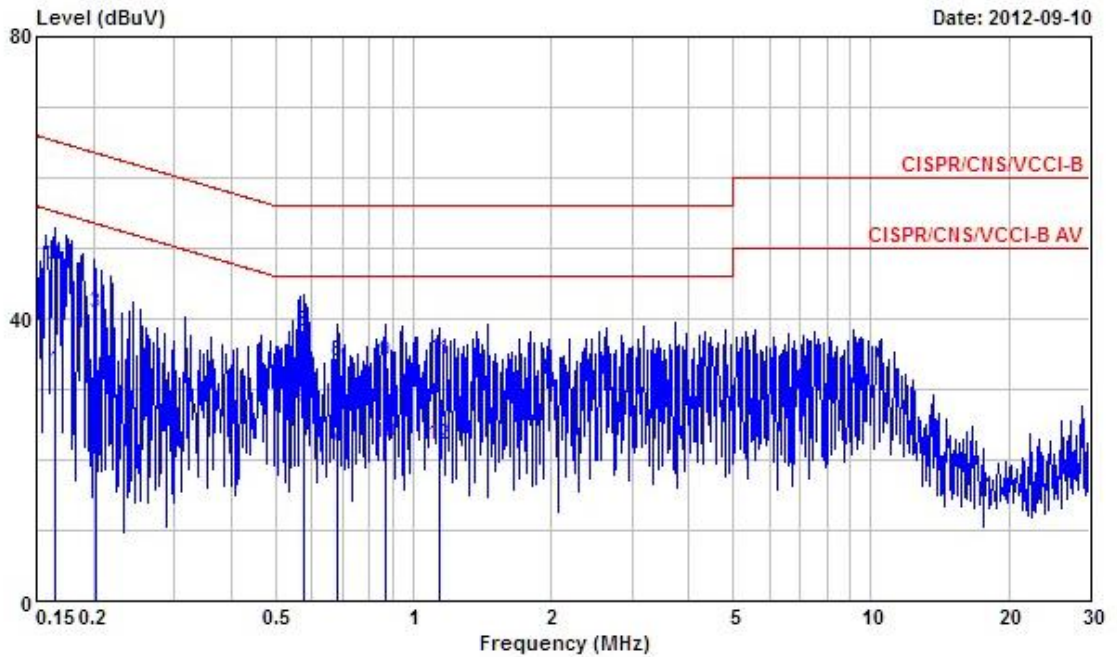

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1641380	32.60	-22.65	55.25	32.19	0.11	0.30	Average
2	0.1641380	47.51	-17.74	65.25	47.10	0.11	0.30	QP
3	0.2028860	40.92	-22.57	63.49	40.51	0.11	0.30	QP
4	0.2028860	25.23	-28.26	53.49	24.82	0.11	0.30	Average
5	0.5773730	38.18	-17.82	56.00	37.78	0.10	0.30	QP
6	0.5773730	27.37	-18.63	46.00	26.97	0.10	0.30	Average
7	0.6826310	21.88	-24.12	46.00	21.47	0.11	0.30	Average
8	0.6826310	33.89	-22.11	56.00	33.48	0.11	0.30	QP
9	0.8710300	33.85	-22.15	56.00	33.44	0.11	0.30	QP
10	0.8710300	22.27	-23.73	46.00	21.86	0.11	0.30	Average
11	1.140	34.33	-21.67	56.00	33.90	0.11	0.32	QP
12	1.140	22.12	-23.88	46.00	21.69	0.11	0.32	Average

Note:
Level = Read Level + LISN Factor + Cable Loss.




FCC RADIO TEST REPORT

Report No. : FR281609-01

Final Test Date	Sep. 20, 2012	Test Site No.	CO04-HY
Temperature	25.3°C	Humidity	51%
Test Engineer	Bill	Configuration	Transmitting mode (Mode 4)


Line

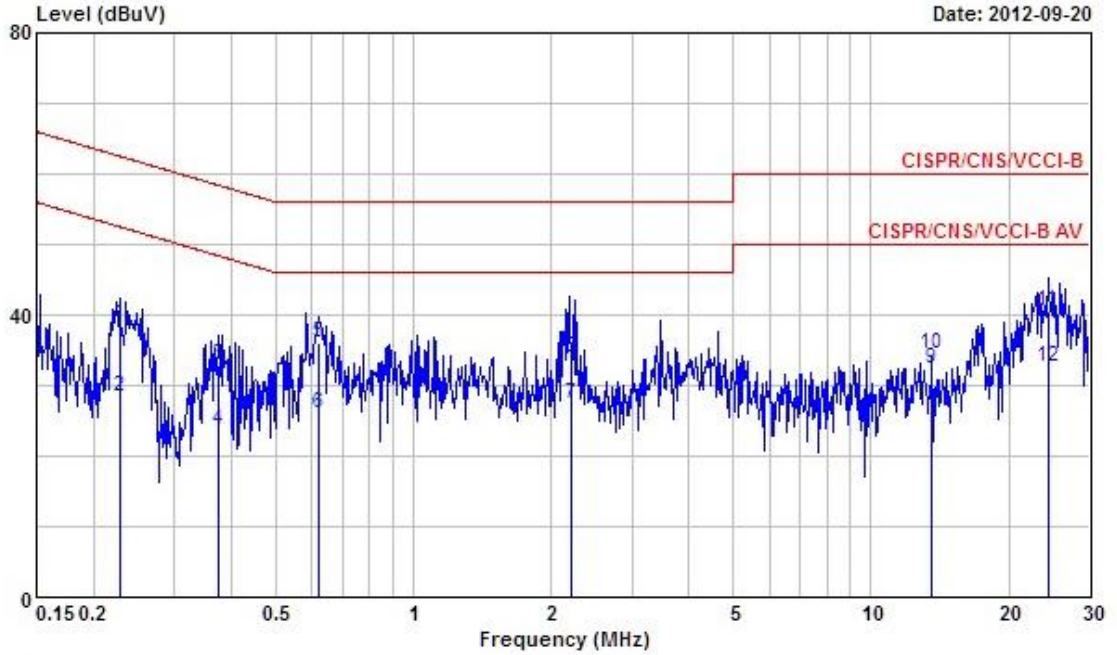

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2279670	38.67	-23.85	62.52	38.14	0.23	0.30	QP
2	0.2279670	28.51	-24.01	52.52	27.98	0.23	0.30	Average
3	0.3741300	32.92	-25.49	58.41	32.40	0.22	0.30	QP
4	0.3741300	23.62	-24.79	48.41	23.10	0.22	0.30	Average
5	0.6205370	36.12	-19.88	56.00	35.60	0.22	0.30	QP
6	0.6205370	25.92	-20.08	46.00	25.40	0.22	0.30	Average
7	2.220	27.24	-18.76	46.00	26.60	0.26	0.38	Average
8	2.220	34.04	-21.96	56.00	33.40	0.26	0.38	QP
9	13.560	32.38	-17.62	50.00	31.50	0.48	0.40	Average
10	13.560	34.48	-25.52	60.00	33.60	0.48	0.40	QP
11	24.400	40.54	-19.46	60.00	39.60	0.64	0.30	QP
12	24.400	32.68	-17.32	50.00	31.74	0.64	0.30	Average



Neutral

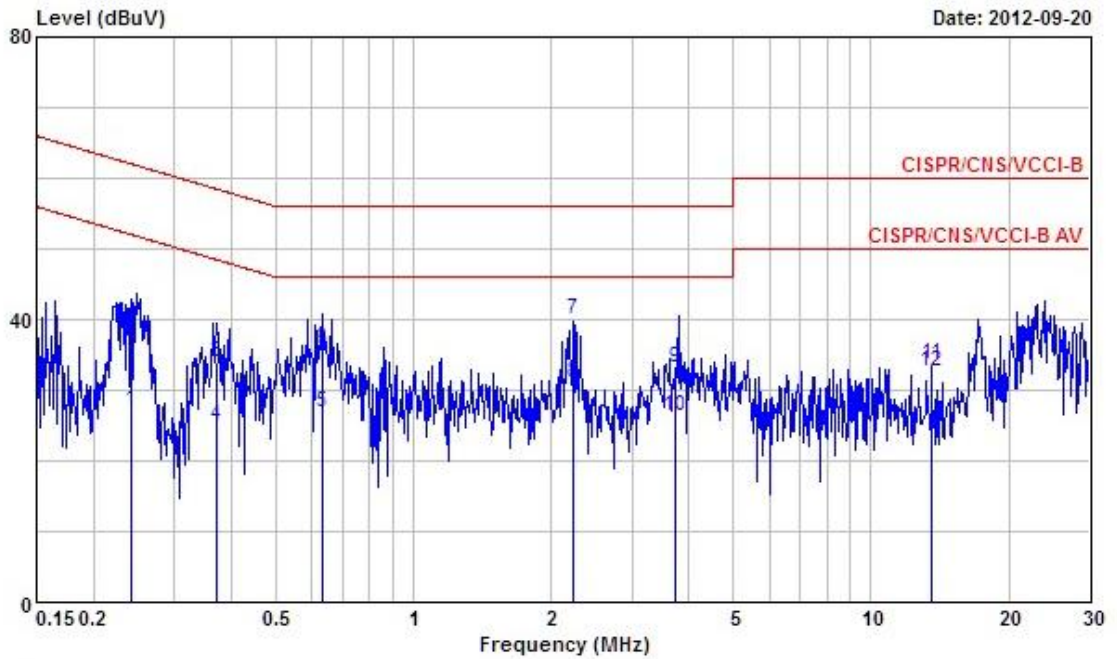

2012-09-20 10:00:00

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.2424540	27.11	-24.90	52.01	26.70	0.11	0.30	Average
2	0.2424540	38.58	-23.43	62.01	38.17	0.11	0.30	QP
3	0.3711650	33.90	-24.57	58.47	33.50	0.10	0.30	QP
4	0.3711650	25.10	-23.37	48.47	24.70	0.10	0.30	Average
5	0.6304790	26.86	-19.14	46.00	26.46	0.10	0.30	Average
6	0.6304790	35.70	-20.30	56.00	35.30	0.10	0.30	QP
7	2.243	40.12	-15.88	56.00	39.61	0.13	0.38	QP
8	2.243	31.13	-14.87	46.00	30.62	0.13	0.38	Average
9	3.740	33.16	-22.84	56.00	32.70	0.15	0.31	QP
10	3.740	26.26	-19.74	46.00	25.80	0.15	0.31	Average
11	13.560	33.71	-26.29	60.00	33.04	0.27	0.40	QP
12	13.560	32.54	-17.46	50.00	31.87	0.27	0.40	Average

Note:
Level = Read Level + LISN Factor + Cable Loss.

3.2 Field Strength of Fundamental Emissions and Mask Measurement

3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications		RSS-210 A2.6			
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dBuV/m) at 30m	Field Strength (dBuV/m) at 10m	Field Strength (dBuV/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5	

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	10 kHz
Detector	QP

3.2.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 10kHz for the band 13.553~13.567MHz.

3.2.4 Test Setup Layout

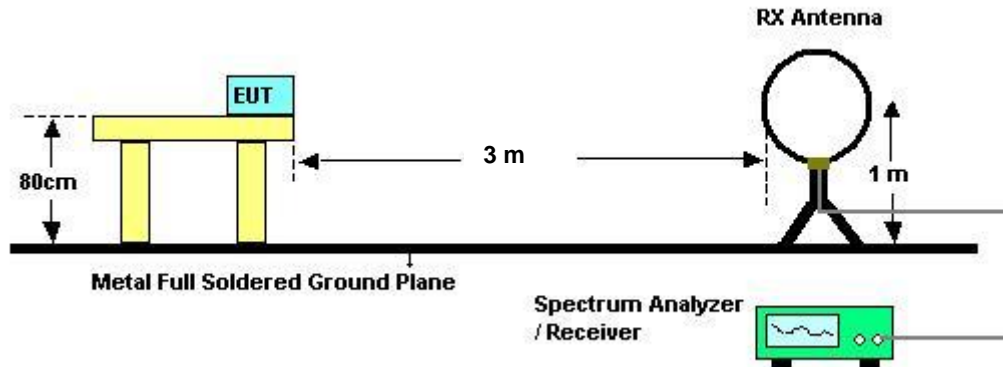

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.



3.2.7 Test Result of Field Strength of Fundamental Emissions

Final Test Date	Sep. 19, 2012	Test Site No.	03CH02-HY
Temperature	24.1°C	Humidity	63%
Test Engineer	Streak	Configurations	Ch. 1

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m) at 3m	Remark
13.56 MHz	49.08	74.92	124	QP

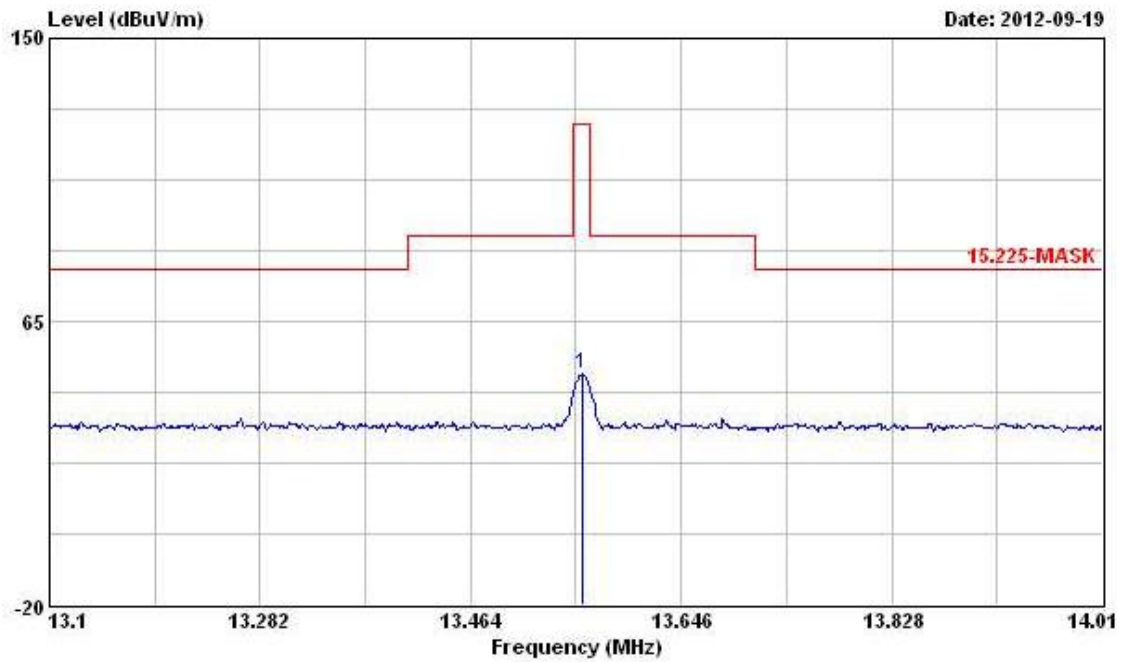

Note:
 Emission level (dBuV/m) = 20 log Emission level (uV/m).




3.3.7 Test Result of 20dB Spectrum Bandwidth

Final Test Date	Sep. 10, 2012	Test Site No.	TH01-HY
Temperature	26.7°C	Humidity	56%
Test Engineer	Shiming	Configurations	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) f _L > 13.553MHz	Frequency range (MHz) f _H < 13.567MHz	Test Result
13.56 MHz	2.46	2.11	13.5595	13.5620	Complies


20 dB Bandwidth Plot on 13.56 MHz

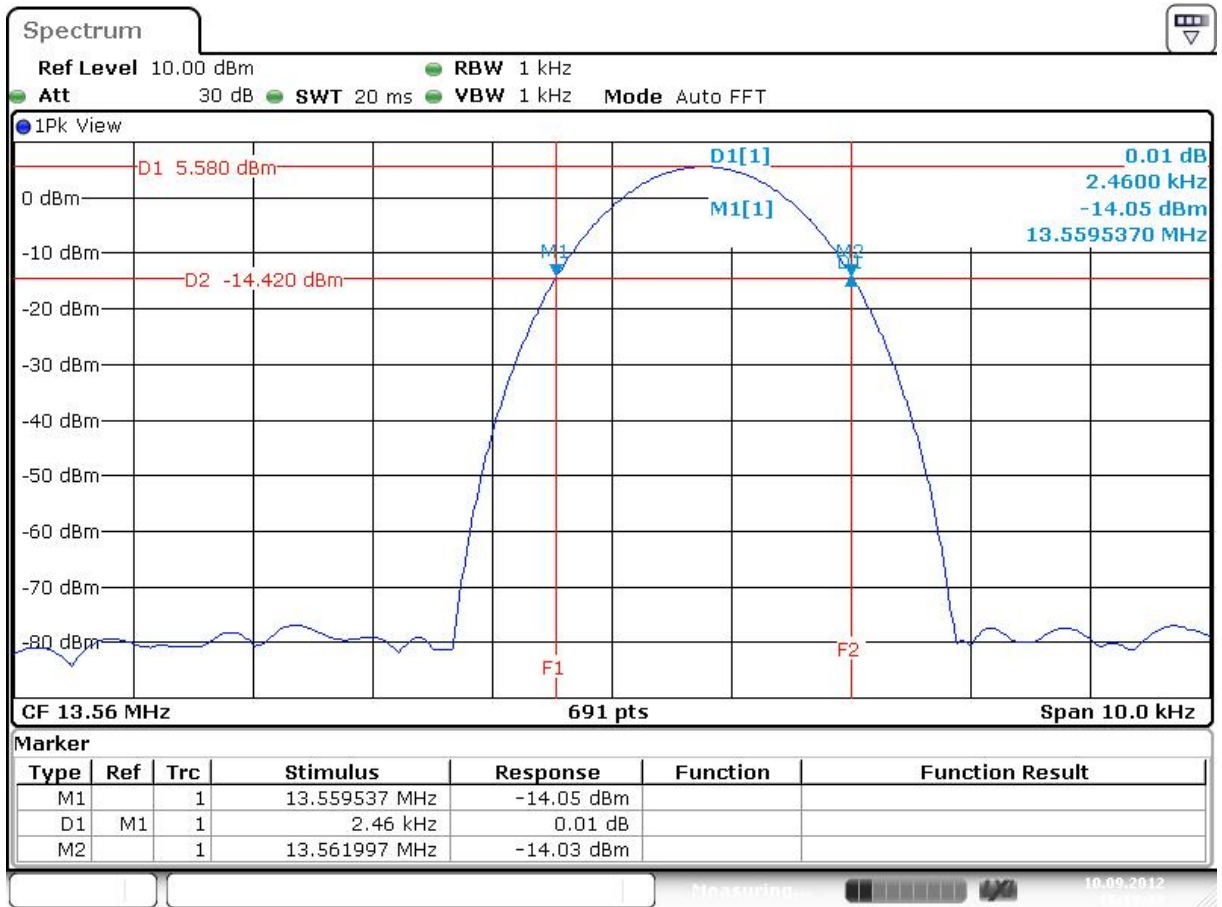

Date: 10.SEP.2012 15:19:23



99% Occupied Bandwidth Plot on 13.56 MHz

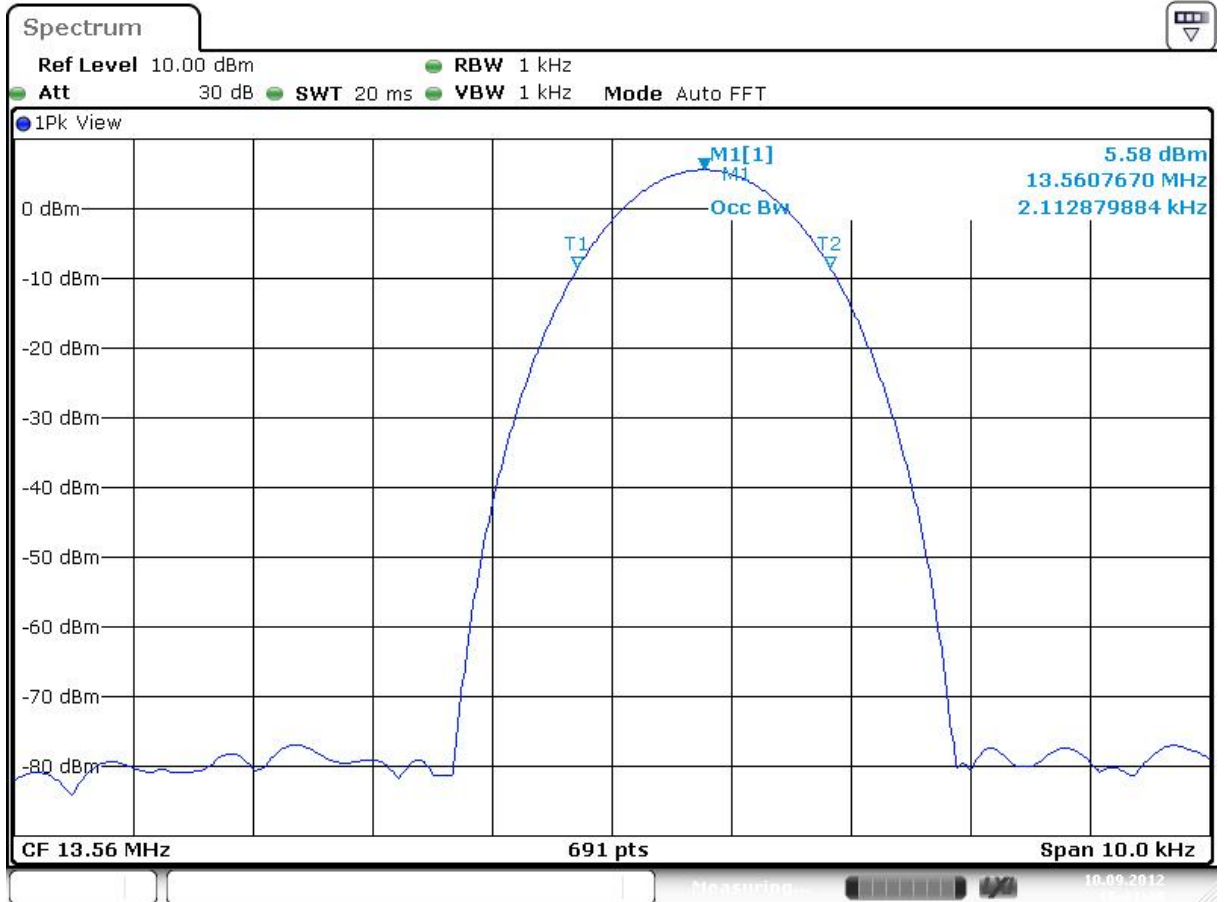

Date: 10.SEP.2012 15:21:49

3.4 Radiated Emissions Measurement

3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

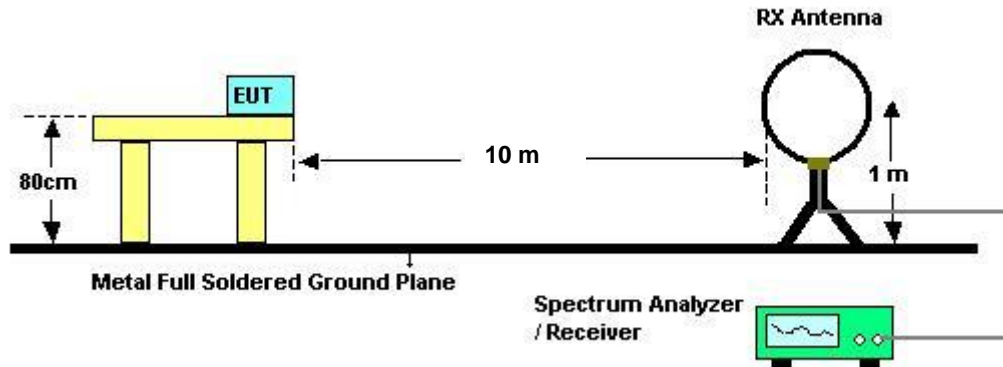

For radiated emissions above 30MHz

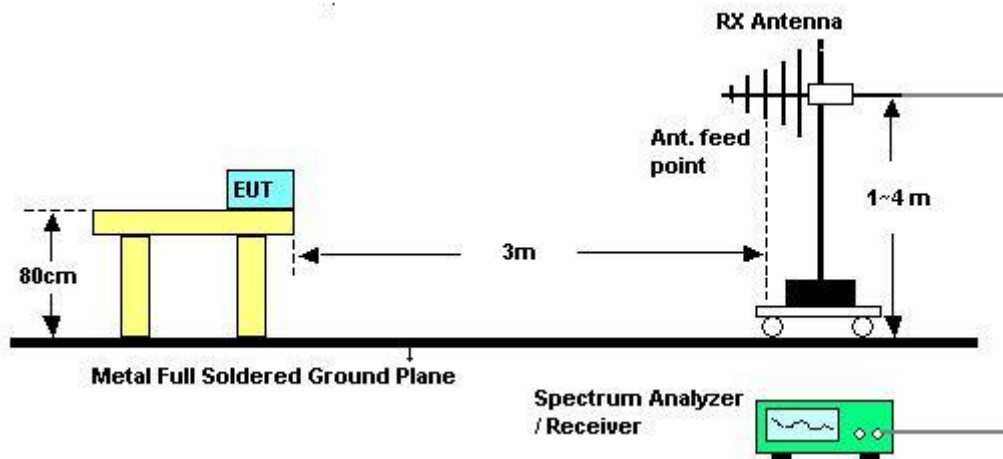

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Results of Transmitter Spurious Emissions (9kHz~30MHz)


All spurious emissions (9kHz-30MHz) are below fundamental emissions field strength and the levels exceed the level of 20 dB below the applicable limit.



3.4.8 Results for Radiated Emissions (30MHz~1GHz)

Final Test Date	Sep. 26, 2012	Test Site No.	03CH02-HY
Temperature	24.1°C	Humidity	63%
Test Engineer	Streak	Configuration	Ch.1 (Mode 3)


Horizontal

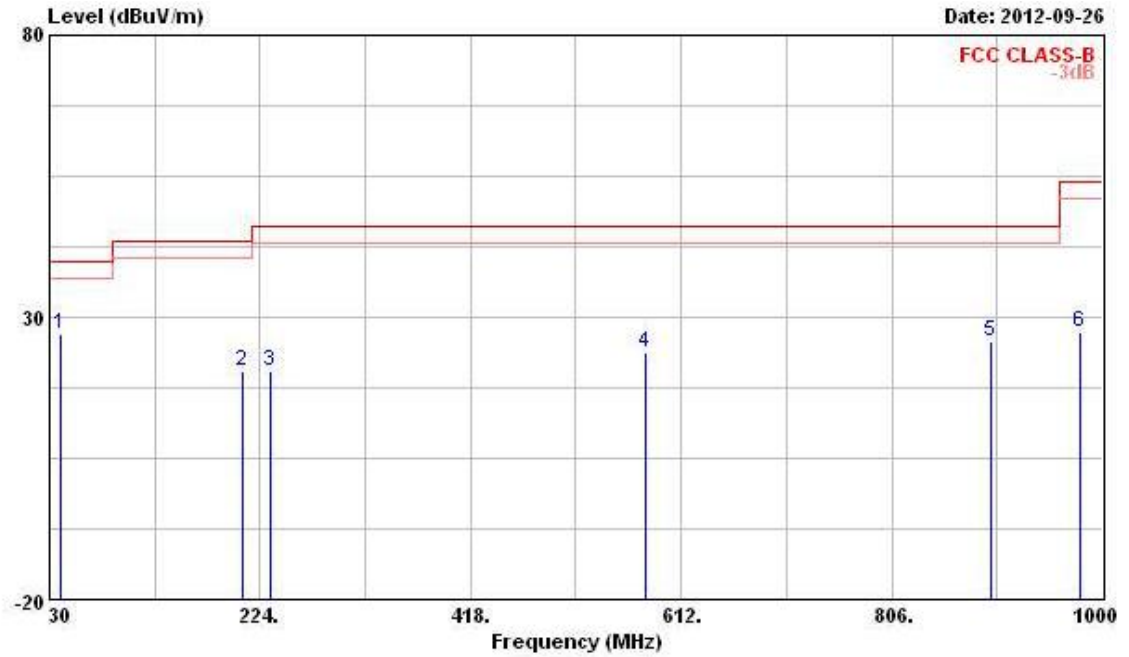

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	39.700	27.01	-12.99	40.00	40.63	13.25	1.03	27.90	Peak	---	---
2 @	207.510	20.58	-22.92	43.50	33.89	11.60	2.48	27.39	Peak	---	---
3 @	233.700	20.33	-25.67	46.00	32.53	12.46	2.67	27.33	Peak	---	---
4 @	579.020	23.66	-22.34	46.00	28.38	19.56	4.16	28.44	Peak	---	---
5 @	897.180	25.86	-20.14	46.00	28.20	20.03	5.24	27.61	Peak	---	---
6 @	978.660	27.30	-26.70	54.00	27.03	21.97	5.61	27.31	Peak	---	---



Vertical

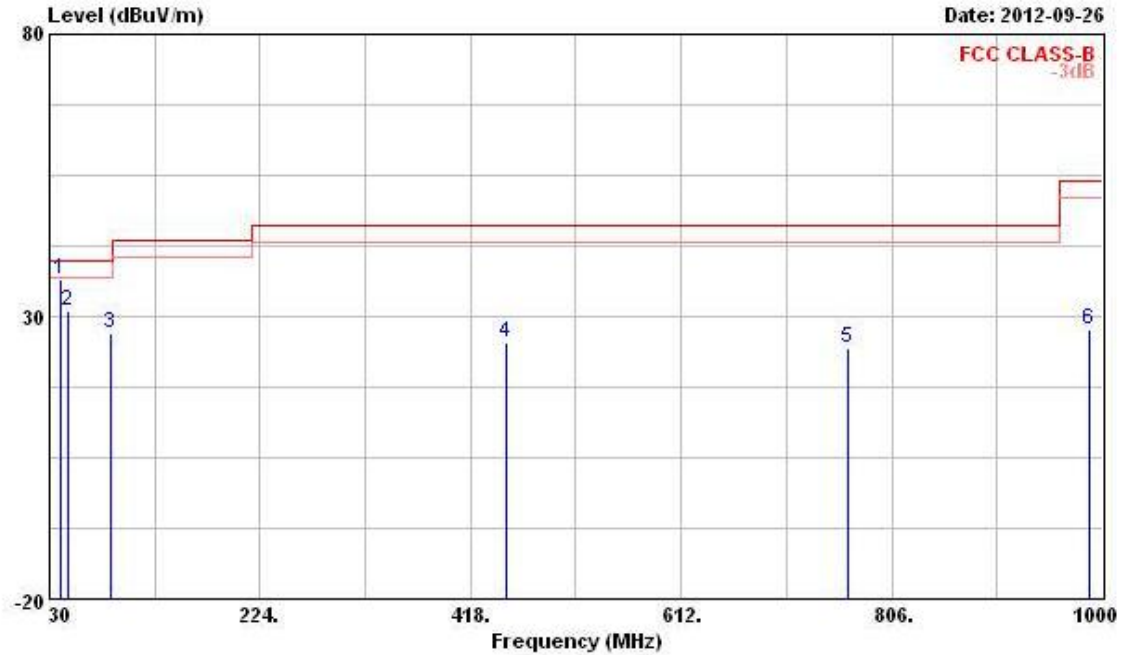

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	40.670	36.49	-3.51	40.00	50.33	13.01	1.05	27.90	Peak	---	---
2	47.460	30.99	-9.01	40.00	46.88	10.82	1.15	27.86	QP	---	---
3	86.260	27.06	-12.94	40.00	44.62	8.73	1.56	27.85	Peak	---	---
4	450.980	25.25	-20.75	46.00	33.51	16.29	3.58	28.13	Peak	---	---
5	765.260	24.40	-21.60	46.00	27.92	19.77	4.77	28.06	Peak	---	---
6	987.390	27.73	-26.27	54.00	27.17	22.19	5.64	27.27	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




FCC RADIO TEST REPORT

Report No. : FR281609-01

Final Test Date	Sep. 26, 2012	Test Site No.	03CH02-HY
Temperature	24.1°C	Humidity	63%
Test Engineer	Streak	Configuration	Ch.1 (Mode 4)

Horizontal

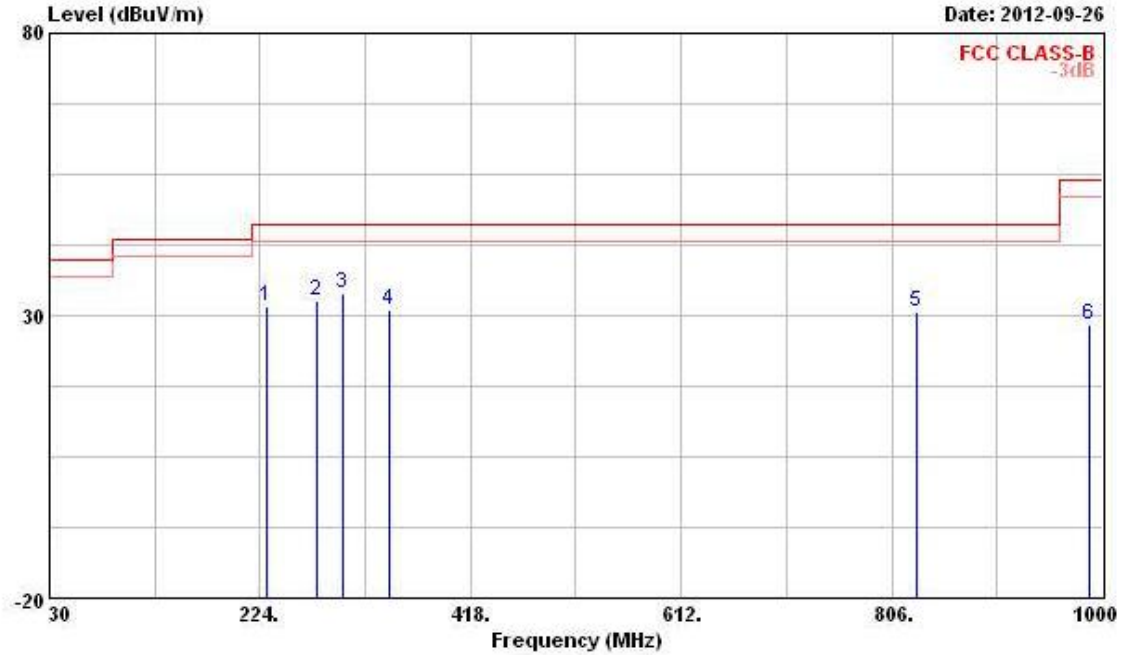

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	230.790	31.73	-14.27	46.00	44.05	12.37	2.64	27.33	Peak	---	---
2	276.380	32.61	-13.39	46.00	43.59	13.37	2.87	27.22	Peak	---	---
3	299.660	33.81	-12.19	46.00	44.31	13.70	2.96	27.16	Peak	---	---
4	343.310	30.90	-15.10	46.00	40.84	14.37	3.15	27.46	Peak	---	---
5	828.310	30.74	-15.26	46.00	33.40	20.20	4.98	27.84	Peak	---	---
6	987.390	28.29	-25.71	54.00	27.73	22.19	5.64	27.27	Peak	---	---



Vertical

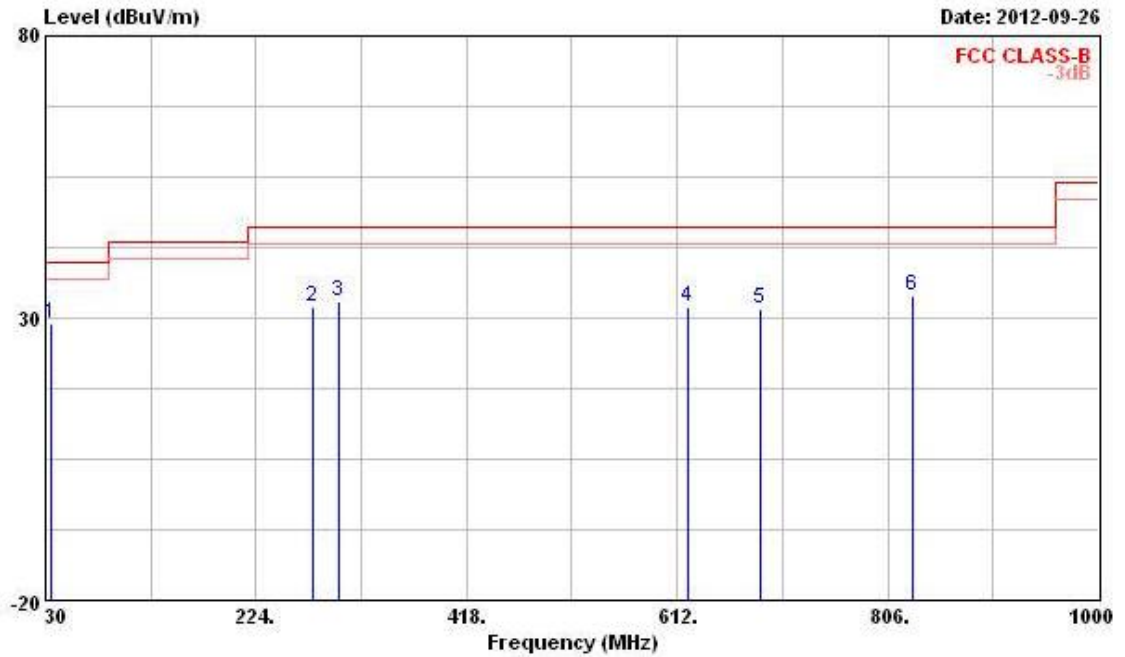


TABLE 01

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	35.820	28.96	-11.04	40.00	41.75	14.15	0.98	27.92	Peak	---	---
2	276.380	32.03	-13.97	46.00	43.01	13.37	2.87	27.22	Peak	---	---
3	299.660	33.02	-12.98	46.00	43.52	13.70	2.96	27.16	Peak	---	---
4	622.670	31.89	-14.11	46.00	36.12	19.88	4.31	28.42	Peak	---	---
5	688.630	31.52	-14.48	46.00	36.33	18.99	4.50	28.30	Peak	---	---
6	828.310	34.04	-11.96	46.00	36.70	20.20	4.98	27.84	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5 Frequency Stability Measurement

3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

3.5.4 Test Setup Layout

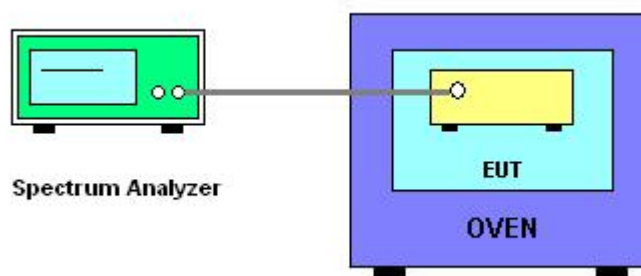

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.



3.5.7 Test Result of Frequency Stability

Final Test Date	Sep. 10, 2012	Test Site No.	TH01-HY
Temperature	26.7°C	Humidity	56%
Test Engineer	Shiming	Configurations	Ch. 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	13.56 MHz
4.37	13.560738
3.80	13.560738
3.23	13.560753
Max. Deviation (MHz)	0.000753
Max. Deviation (ppm)	55.5310

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	13.56 MHz
-20	13.560839
-10	13.560854
0	13.560839
10	13.560810
20	13.560796
30	13.560767
40	13.560724
50	13.560709
Max. Deviation (MHz)	0.000854
Max. Deviation (ppm)	62.9794



3.6 Antenna Requirements

3.6.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.6.2 Antenna Connector Construction

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



FCC RADIO TEST REPORT

Report No. : FR281609-01

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	TDK	SAC-10M	10CH02-HY	30 MHz ~ 1 GHz 10m,3m	Nov. 05, 2011	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10827	100 KHz ~ 1.3 GHz	May 03, 2012	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10828	100 KHz ~ 1.3 GHz	Apr. 23, 2012	Radiation (10CH02-HY)
Receiver	R&S	ESI	838496/008	20 Hz ~ 7 GHz	May 14, 2012	Radiation (10CH02-HY)
Spectrum Analyzer	R&S	FSP7	100645	9 KHz ~ 7 GHz	Apr. 25, 2012	Radiation (10CH02-HY)
Biconical Antenna	Schwarzbeck	VHBB 9124	287	30 MHz ~ 200 MHz	Dec. 17, 2011	Radiation (10CH02-HY)
Log Antenna	Schwarzbeck	VUSLP 9111	207	200 MHz ~ 1 GHz	Dec. 17, 2011	Radiation (10CH02-HY)
Turn Table	HD	DS 430	430/360	0 -360 degree	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/664	1 m - 4 m	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/667	1 m - 4 m	N/A	Radiation (10CH02-HY)
RF Cable-R10m	Jye Bao	RG142	CB027-INSIDE	30 MHz ~ 1 GHz	Feb. 11, 2012	Radiation (10CH02-HY)
RF Cable-R10m	Suhner Switzerland + BELDEN	RG223/U + RG8/U	CB026-DOOR	30 MHz ~ 1 GHz	Feb. 11, 2012	Radiation (10CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 12, 2011	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9kHz ~ 40GHz	Feb. 01, 2012	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Oct. 22, 2011	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 18, 2012	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz ~ 30 MHz	Jul. 03, 2012*	Radiation (10CH02-HY) (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages