

# FCC TEST REPORT (15.247: WLAN)

**REPORT NO.:** RF120801C12-3

**MODEL NO.:** PM23200

**FCC ID:** NM8PM23200

**RECEIVED:** Aug. 01, 2012

**TESTED:** Aug. 17~Aug. 22, 2012

**ISSUED:** Aug. 29, 2012

**APPLICANT:** HTC Corporation

**ADDRESS:** 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan ( R.O.C )

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by  
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION .....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3 DESCRIPTION OF SUPPORT UNITS .....	14
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST .....	14
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND) .....	15
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
4.1.2 TEST INSTRUMENTS .....	16
4.1.3 TEST PROCEDURES .....	17
4.1.4 DEVIATION FROM TEST STANDARD .....	17
4.1.5 TEST SETUP .....	18
4.1.6 EUT OPERATING CONDITIONS .....	18
4.1.7 TEST RESULTS .....	19
4.2 CONDUCTED EMISSION MEASUREMENT .....	45
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	45
4.2.2 TEST INSTRUMENTS .....	45
4.2.3 TEST PROCEDURES .....	46
4.2.4 DEVIATION FROM TEST STANDARD .....	46
4.2.5 TEST SETUP .....	47
4.2.6 EUT OPERATING CONDITIONS .....	47
4.2.7 TEST RESULTS .....	48
4.3 6dB BANDWIDTH MEASUREMENT .....	50
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	50
4.3.2 TEST SETUP .....	50
4.3.3 TEST INSTRUMENTS .....	50
4.3.4 TEST PROCEDURE .....	50
4.3.5 DEVIATION FROM TEST STANDARD .....	50
4.3.6 EUT OPERATING CONDITIONS .....	50
4.3.7 TEST RESULTS .....	51
4.4 CONDUCTED OUTPUT POWER .....	52
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	52
4.4.2 TEST SETUP .....	52
4.4.3 TEST INSTRUMENTS .....	52
4.4.4 TEST PROCEDURES .....	52
4.4.5 DEVIATION FROM TEST STANDARD .....	52
4.4.6 EUT OPERATING CONDITIONS .....	52
4.4.7 TEST RESULTS .....	53
4.5 POWER SPECTRAL DENSITY MEASUREMENT .....	54
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	54
4.5.2 TEST SETUP .....	54
4.5.3 TEST INSTRUMENTS .....	54



4.5.4	TEST PROCEDURE.....	54
4.5.5	DEVIATION FROM TEST STANDARD .....	54
4.5.6	EUT OPERATING CONDITION .....	54
4.5.7	TEST RESULTS .....	55
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	56
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	56
4.6.2	TEST SETUP.....	56
4.6.3	TEST INSTRUMENTS.....	56
4.6.4	TEST PROCEDURE.....	56
4.6.5	DEVIATION FROM TEST STANDARD .....	57
4.6.6	EUT OPERATING CONDITION .....	57
4.6.7	TEST RESULTS .....	57
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND) .....	62
5.1	RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	62
5.1.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	62
5.1.2	TEST INSTRUMENTS.....	63
5.1.3	TEST PROCEDURES .....	63
5.1.4	DEVIATION FROM TEST STANDARD .....	63
5.1.5	TEST SETUP.....	63
5.1.6	EUT OPERATING CONDITIONS .....	63
5.1.7	TEST RESULTS .....	64
5.2	CONDUCTED EMISSION MEASUREMENT .....	82
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	82
5.2.2	TEST INSTRUMENTS.....	82
5.2.3	TEST PROCEDURES .....	82
5.2.4	DEVIATION FROM TEST STANDARD .....	82
5.2.5	TEST SETUP.....	82
5.2.6	EUT OPERATING CONDITIONS .....	82
5.2.7	TEST RESULTS .....	83
5.3	6dB BANDWIDTH MEASUREMENT.....	85
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	85
5.3.2	TEST SETUP.....	85
5.3.3	TEST INSTRUMENTS.....	85
5.3.4	TEST PROCEDURE.....	85
5.3.5	DEVIATION FROM TEST STANDARD .....	85
5.3.6	EUT OPERATING CONDITIONS .....	85
5.3.7	TEST RESULTS .....	86
5.4	MAXIMUM OUTPUT POWER.....	87
5.4.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .....	87
5.4.2	TEST SETUP.....	87
5.4.3	INSTRUMENTS.....	87
5.4.4	TEST PROCEDURES .....	87
5.4.5	DEVIATION FROM TEST STANDARD .....	87
5.4.6	EUT OPERATING CONDITIONS .....	87
5.4.7	TEST RESULTS .....	88
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	89
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	89
5.5.2	TEST SETUP.....	89
5.5.3	TEST INSTRUMENTS.....	89
5.5.4	TEST PROCEDURE.....	89
5.5.5	DEVIATION FROM TEST STANDARD .....	89



5.5.6	EUT OPERATING CONDITION .....	89
5.5.7	TEST RESULTS .....	90
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	91
5.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	91
5.6.2	TEST SETUP.....	91
5.6.3	TEST INSTRUMENTS.....	91
5.6.4	TEST PROCEDURE.....	91
5.6.5	DEVIATION FROM TEST STANDARD .....	91
5.6.6	EUT OPERATING CONDITION .....	91
5.6.7	TEST RESULTS .....	91
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	95
7.	INFORMATION ON THE TESTING LABORATORIES .....	96
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	97



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120801C12-3	Original release	Aug. 29, 2012

## 1. CERTIFICATION

**PRODUCT:** Windows Phone  
**MODEL NO.:** PM23200  
**BRAND:** HTC  
**APPLICANT:** HTC Corporation  
**TESTED:** Aug. 17~Aug. 22, 2012  
**TEST SAMPLE:** Production Unit  
**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.10-2009

The above equipment (model: PM23200) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE :** Aug. 29, 2012  
Pettie Chen / Senior Specialist

**APPROVED BY :**  , **DATE :** Aug. 29, 2012  
Gary Chang / Technical Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -2.20dB at 13.56250MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.12dB at 2386.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Windows Phone
<b>MODEL NO.</b>	PM23200
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.75Vdc (Li-ion battery)
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 135.0Mbps
<b>OPERATING FREQUENCY</b>	<b>2.4GHz:</b> 2412 ~ 2462MHz <b>5.0GHz:</b> 5745 ~ 5805MHz
<b>NUMBER OF CHANNEL</b>	<b>2.4GHz:</b> 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) <b>5.0GHz:</b> 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
<b>OUTPUT POWER</b>	140.929mW for 2412 ~ 2462MHz 103.753mW for 5745 ~ 5805MHz
<b>ANTENNA TYPE</b>	<b>2.4GHz:</b> PIFA antenna with -2.93dBi gain <b>5.0GHz:</b> PIFA antenna with -2.2dBi gain
<b>ANTENNA CONNECTOR</b>	NA
<b>DATA CABLE</b>	Refer to Note as below
<b>I/O PORTS</b>	Refer to user's manual
<b>ACCESSORY DEVICES</b>	Refer to Note as below

#### NOTE:

- The EUT's accessories list refers to Ext Pho.pdf.  
\* Item 2, 3, 4, 6, 7, 8, 9, 10 were the worst for the final test.
- The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11a	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

- The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



## 3.2 DESCRIPTION OF TEST MODES

### FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### FOR 5.0GHz (5745 ~ 5805MHz):

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	157	5785MHz
153	5765MHz	161	5805MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

#### FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

#### RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6.0

#### POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6.0

\*Test condition: WIFI+Bluetooth+NFC

### **BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	13.5

### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
PLC	25deg. C, 65%RH	120Vac, 60Hz	David Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao

### FOR 5.0GHz (5745 ~ 5805MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

### RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 157, 161	OFDM	BPSK	6.0
802.11n (20MHz)	149 to 161	149, 157, 161	OFDM	BPSK	6.5
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

### RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149	OFDM	BPSK	6.0

### POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149	OFDM	BPSK	6.0

\*Test condition: WIFI+Bluetooth+NFC

#### **BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 161	OFDM	BPSK	6.0
802.11n (20MHz)	149 to 161	149, 161	OFDM	BPSK	6.5
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 157, 161	OFDM	BPSK	6.0
802.11n (20MHz)	149 to 161	149, 157, 161	OFDM	BPSK	6.5
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5


#### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
PLC	25deg. C, 65%RH	120Vac, 60Hz	David Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

#### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

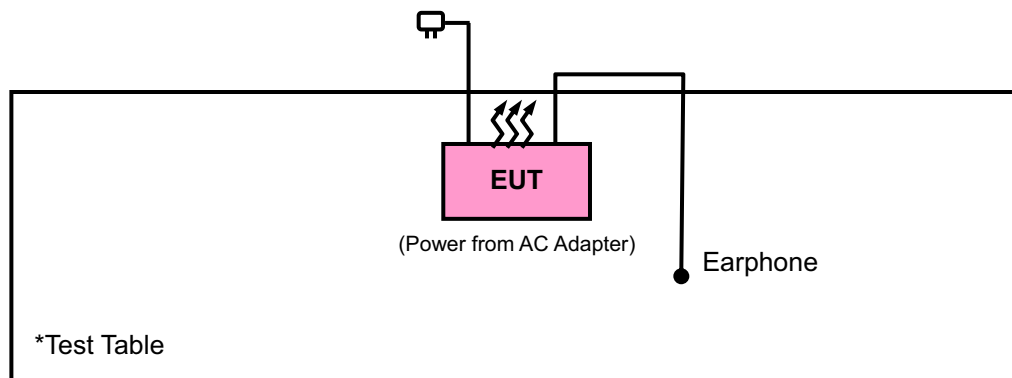

### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2009

KDB 558074 D01 DTS Meas Guidance v01

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 23, 2012	Mar. 22, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 29, 2011	Oct. 28, 2012
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 9.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 460141.
6. The IC Site Registration No. is IC 7450F-4.



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

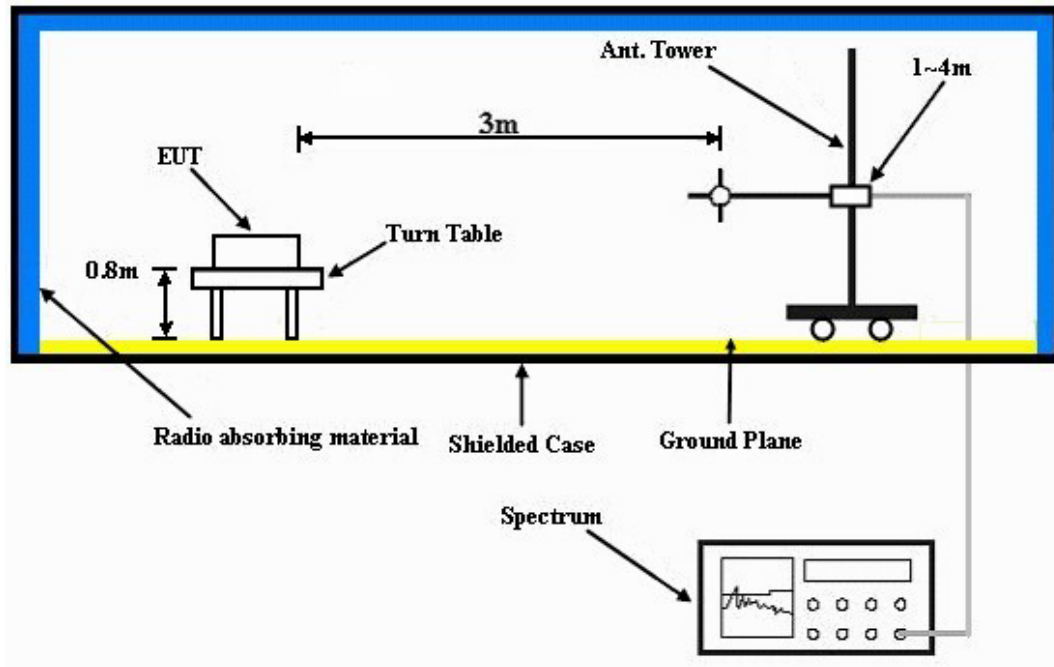

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 TEST RESULTS

### ABOVE 1GHz WORST-CASE DATA :


802.11b



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

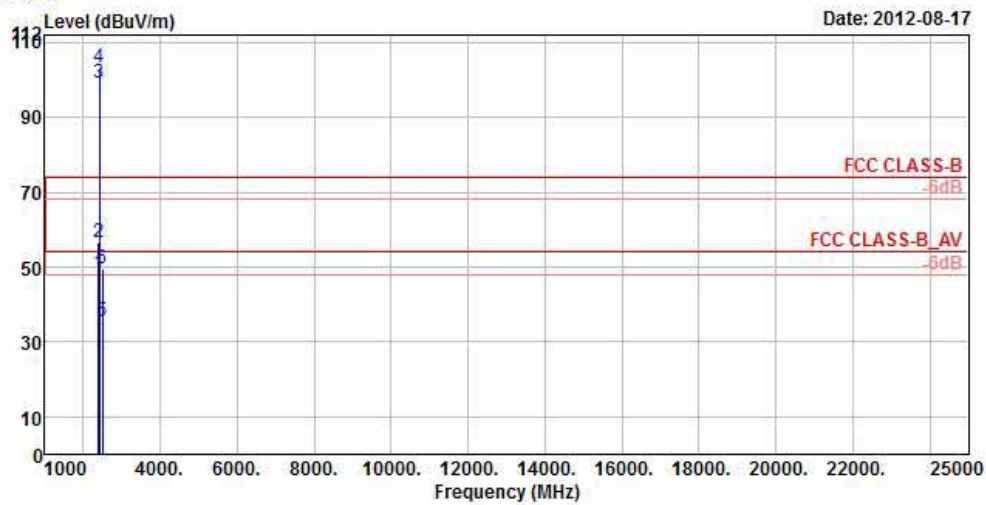

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11B TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 1M  
Power : 13


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1 !	2386.00	48.43	53.82	54.00	-5.57	27.26	4.85	37.50	100	15	Average
2	2386.00	56.61	62.00	74.00	-17.39	27.26	4.85	37.50	100	15	Peak
3 pp	2412.00	99.25	104.59			27.31	4.87	37.52	100	15	Average
4 pk	2412.00	103.39	108.73			27.31	4.87	37.52	100	15	Peak
5	2492.00	35.64	40.40	54.00	-18.36	27.55	4.94	37.25	100	15	Average
6	2492.00	49.42	54.18	74.00	-24.58	27.55	4.94	37.25	100	15	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

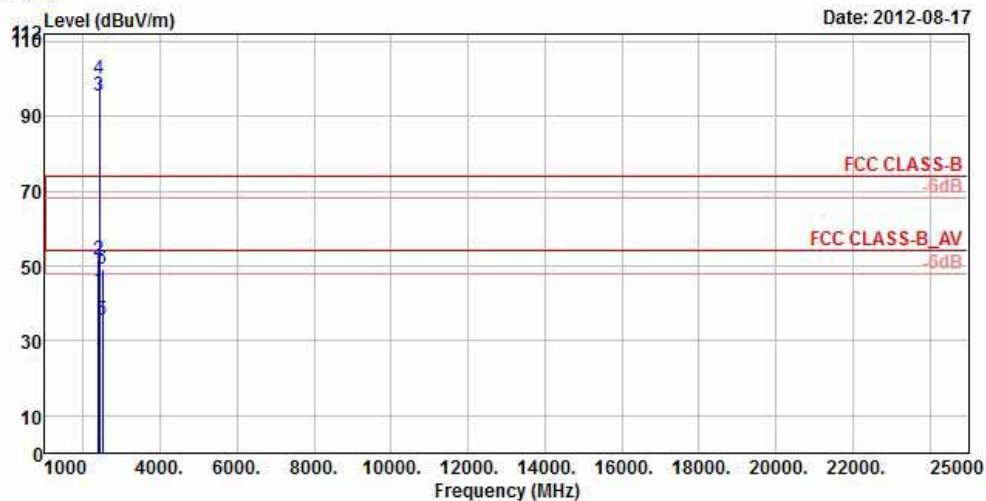


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11B TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : **1M**  
Power : 13

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2386.00	43.60	48.99	54.00	-10.40	27.26	4.85	37.50	100	272	Average
2	2386.00	51.82	57.21	74.00	-22.18	27.26	4.85	37.50	100	272	Peak
3 pp	2412.00	95.64	100.98			27.31	4.87	37.52	100	272	Average
4 pk	2412.00	99.88	105.22			27.31	4.87	37.52	100	272	Peak
5	2500.00	35.44	40.20	54.00	-18.56	27.55	4.94	37.25	100	272	Average
6	2500.00	49.03	53.79	74.00	-24.97	27.55	4.94	37.25	100	272	Peak



Data: 19

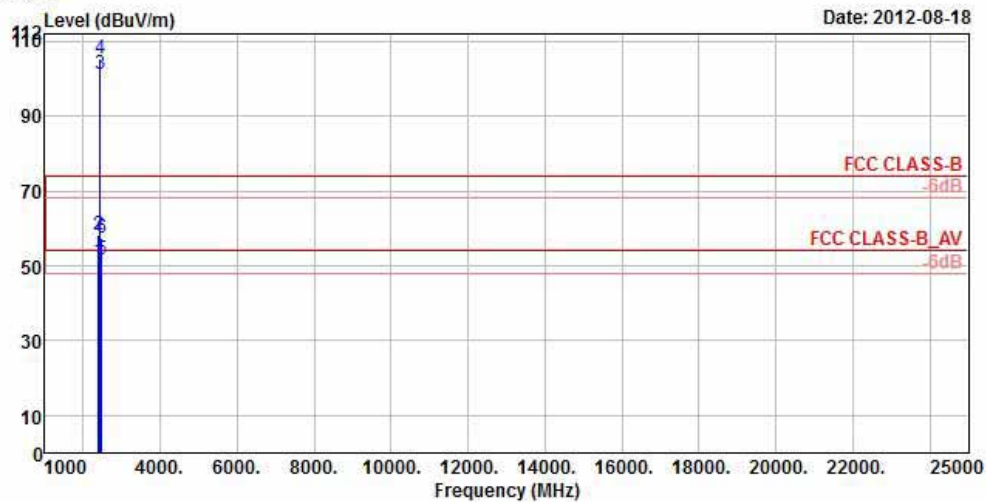


Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11B TX CH06  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : 7  
 Rate : **1M**  
 Power : 13

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1 !	2390.00	51.45	56.84	54.00	-2.55	27.26	4.87	37.52	100	14	Average
2	2390.00	58.21	63.60	74.00	-15.79	27.26	4.87	37.52	100	14	Peak
3 pp	2437.00	101.19	106.36			27.40	4.89	37.46	100	14	Average
4 pk	2437.00	105.36	110.53			27.40	4.89	37.46	100	14	Peak
5 !	2484.00	51.52	56.42	54.00	-2.48	27.50	4.92	37.32	100	14	Average
6	2484.00	57.34	62.24	74.00	-16.66	27.50	4.92	37.32	100	14	Peak

Data: 20

Date: 2012-08-18

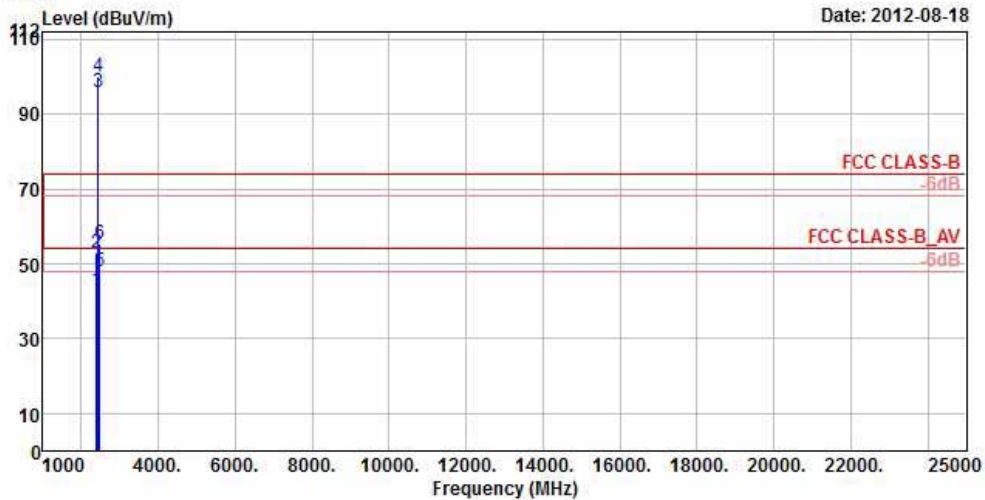

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11B TX CH06  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : 7  
Rate : 1M  
Power : 13

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	43.17	48.56	54.00	-10.83	27.26	4.87	37.52	100	272	Average
2	2390.00	52.75	58.14	74.00	-21.25	27.26	4.87	37.52	100	272	Peak
3 pp	2437.00	95.70	100.87			27.40	4.89	37.46	100	272	Average
4 pk	2437.00	99.87	105.04			27.40	4.89	37.46	100	272	Peak
5	2484.00	47.87	52.77	54.00	-6.13	27.50	4.92	37.32	100	272	Average
6	2484.00	55.30	60.20	74.00	-18.70	27.50	4.92	37.32	100	272	Peak






A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

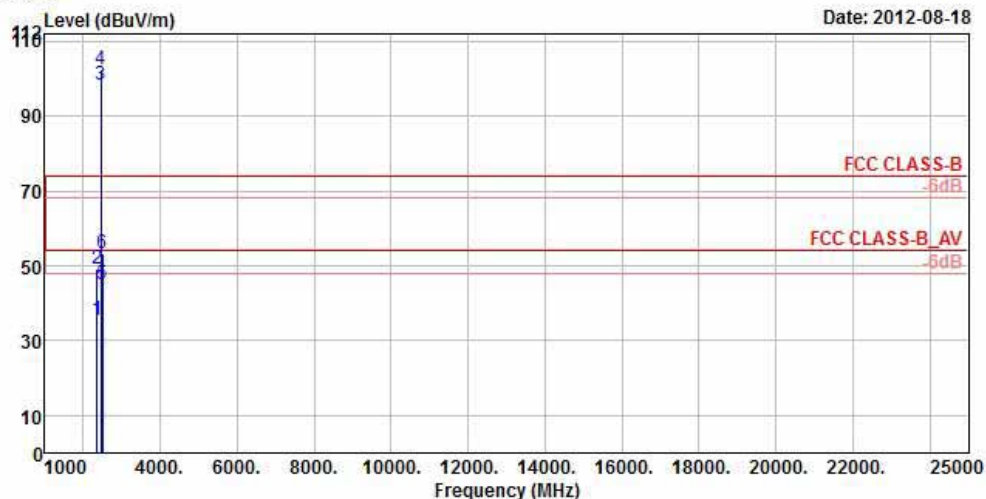


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11B TX CH11  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : 7  
Rate : **1M**  
Power : 13

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2352.00	35.45	40.96	54.00	-18.55	27.16	4.82	37.49	100	15	Average
2	2352.00	49.23	54.74	74.00	-24.77	27.16	4.82	37.49	100	15	Peak
3 pp	2462.00	98.34	103.37			27.45	4.91	37.39	100	15	Average
4 pk	2462.00	102.59	107.62			27.45	4.91	37.39	100	15	Peak
5	2488.00	44.87	49.72	54.00	-9.13	27.55	4.92	37.32	100	15	Average
6	2488.00	53.41	58.26	74.00	-20.59	27.55	4.92	37.32	100	15	Peak



Data: 20

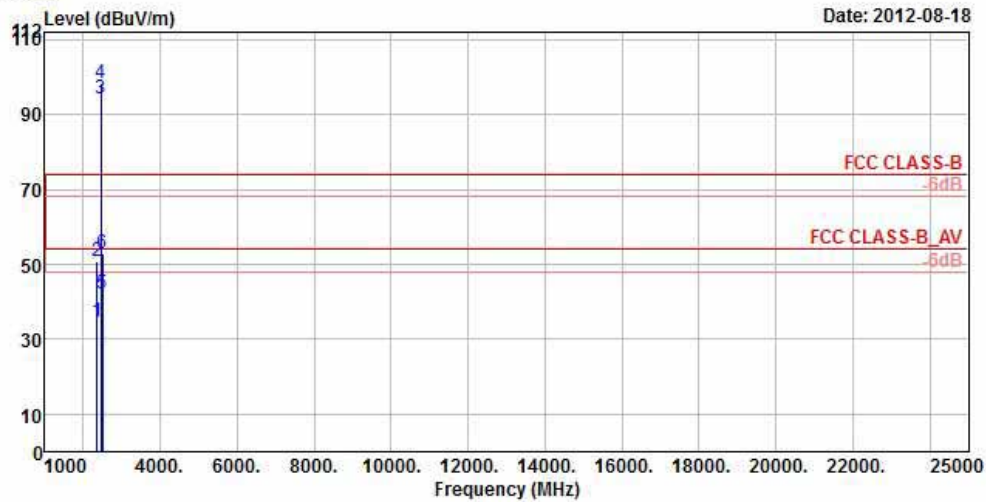

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11B TX CH11  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : 7  
 Rate : **1M**  
 Power : 13

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2362.00	34.73	40.24	54.00	-19.27	27.16	4.82	37.49	101	89	Average
2	2362.00	50.78	56.29	74.00	-23.22	27.16	4.82	37.49	101	89	Peak
3 pp	2462.00	94.05	99.08			27.45	4.91	37.39	101	89	Average
4 pk	2462.00	98.28	103.31			27.45	4.91	37.39	101	89	Peak
5	2488.00	42.26	47.11	54.00	-11.74	27.55	4.92	37.32	101	89	Average
6	2488.00	53.01	57.86	74.00	-20.99	27.55	4.92	37.32	101	89	Peak



802.11g




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

Date: 2012-08-17

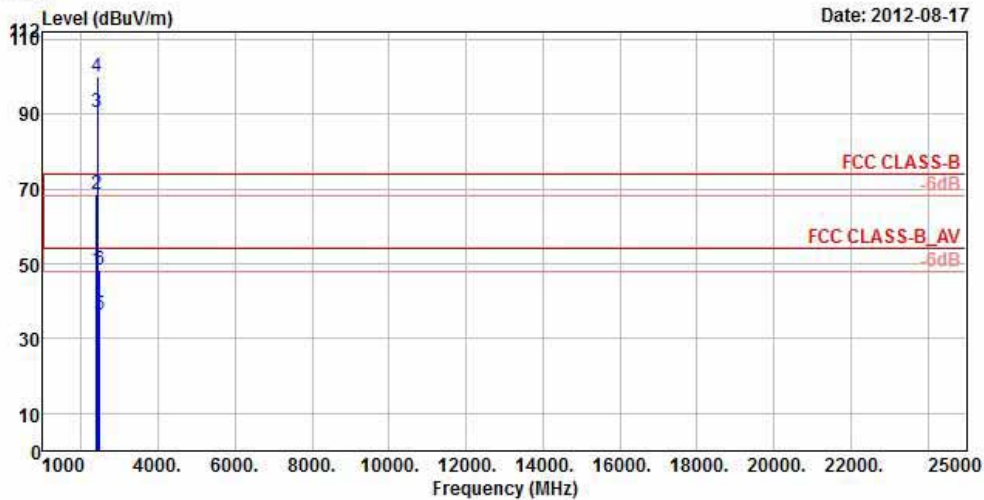

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11G TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 6M  
Power : 8


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1 !	2390.00	48.32	53.71	54.00	-5.68	27.26	4.87	37.52	100	15	Average
2 !	2390.00	68.80	74.19	74.00	-5.20	27.26	4.87	37.52	100	15	Peak
3 pp	2412.00	90.39	95.73			27.31	4.87	37.52	100	15	Average
4 pk	2412.00	100.20	105.54			27.31	4.87	37.52	100	15	Peak
5	2484.00	36.48	41.38	54.00	-17.52	27.50	4.92	37.32	100	15	Average
6	2484.00	48.49	53.39	74.00	-25.51	27.50	4.92	37.32	100	15	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

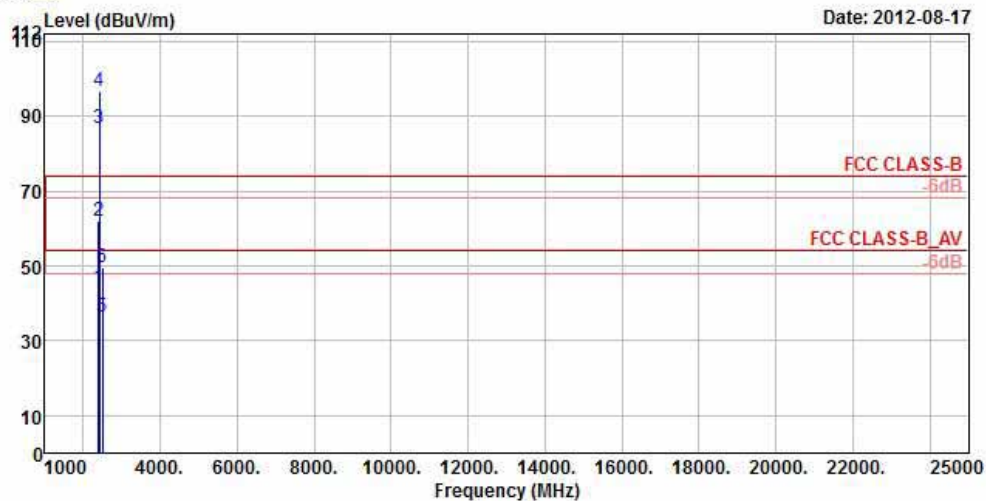


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11G TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 6M  
Power : 8

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	44.35	49.74	54.00	-9.65	27.26	4.87	37.52	100	270	Average
2	2390.00	62.15	67.54	74.00	-11.85	27.26	4.87	37.52	100	270	Peak
3 pp	2412.00	86.79	92.13			27.31	4.87	37.52	100	270	Average
4 pk	2412.00	96.75	102.09			27.31	4.87	37.52	100	270	Peak
5	2488.00	36.24	41.09	54.00	-17.76	27.55	4.92	37.32	100	270	Average
6	2488.00	49.54	54.39	74.00	-24.46	27.55	4.92	37.32	100	270	Peak



A D T

Data: 19

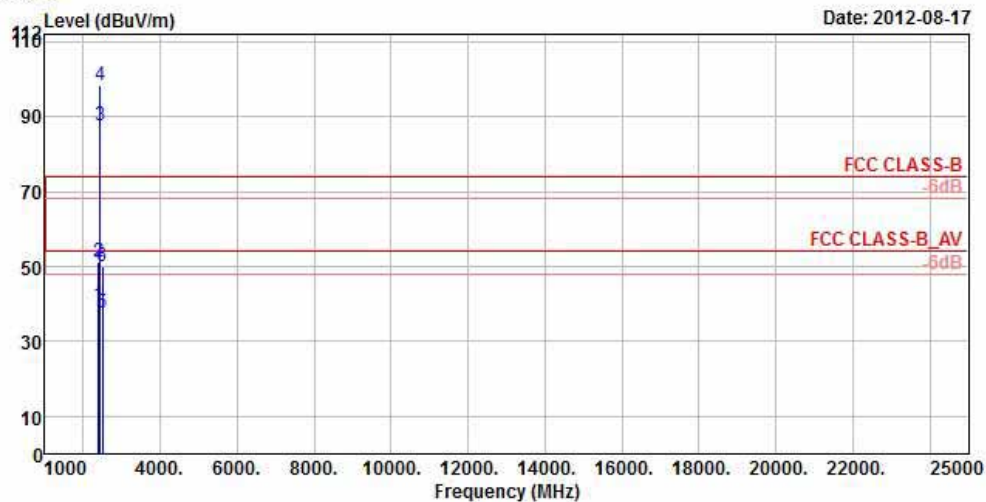

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11G TX CH06  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : Z  
 Rate : 6M  
 Power : 8


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2384.00	39.84	45.28	54.00	-14.16	27.21	4.85	37.50	100	15	Average
2	2384.00	51.13	56.57	74.00	-22.87	27.21	4.85	37.50	100	15	Peak
3 pp	2437.00	87.45	92.62			27.40	4.89	37.46	100	15	Average
4 pk	2437.00	98.31	103.48			27.40	4.89	37.46	100	15	Peak
5	2494.00	37.76	42.52	54.00	-16.24	27.55	4.94	37.25	100	15	Average
6	2494.00	49.84	54.60	74.00	-24.16	27.55	4.94	37.25	100	15	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

Date: 2012-08-17

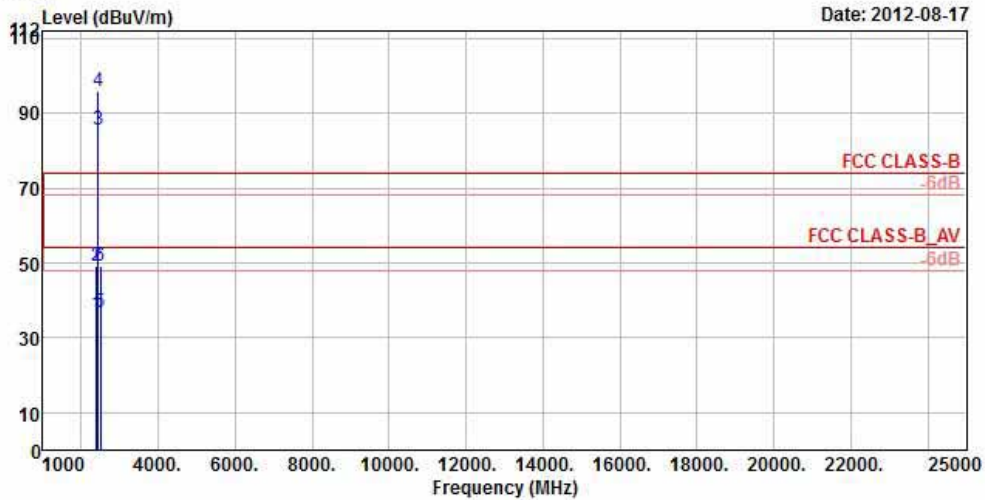

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11G TX CH06  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 6M  
Power : 8


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2386.00	36.54	41.93	54.00	-17.46	27.26	4.85	37.50	104	90	Average
2	2386.00	49.08	54.47	74.00	-24.92	27.26	4.85	37.50	104	90	Peak
3 pp	2437.00	85.40	90.57			27.40	4.89	37.46	104	90	Average
4 pk	2437.00	95.78	100.95			27.40	4.89	37.46	104	90	Peak
5	2490.00	36.89	41.74	54.00	-17.11	27.55	4.92	37.32	104	90	Average
6	2490.00	49.09	53.94	74.00	-24.91	27.55	4.92	37.32	104	90	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

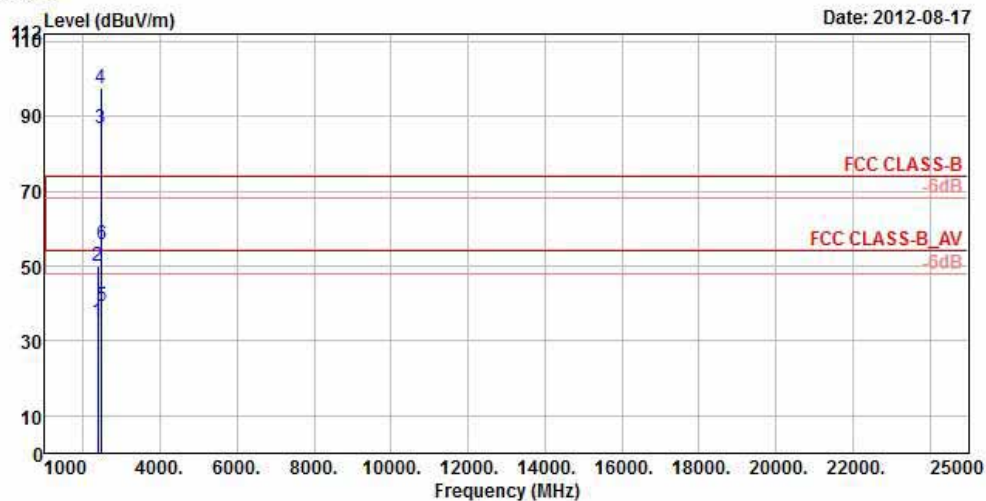

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11G TX CH11  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 6M  
Power : 8

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2372.00	35.01	40.45	54.00	-18.99	27.21	4.85	37.50	100	12	Average
2	2372.00	50.10	55.54	74.00	-23.90	27.21	4.85	37.50	100	12	Peak
3 pp	2462.00	86.98	92.01			27.45	4.91	37.39	100	12	Average
4 pk	2462.00	97.59	102.62			27.45	4.91	37.39	100	12	Peak
5	2484.00	39.31	44.21	54.00	-14.69	27.50	4.92	37.32	100	12	Average
6	2484.00	55.69	60.59	74.00	-18.31	27.50	4.92	37.32	100	12	Peak






Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

Date: 2012-08-17

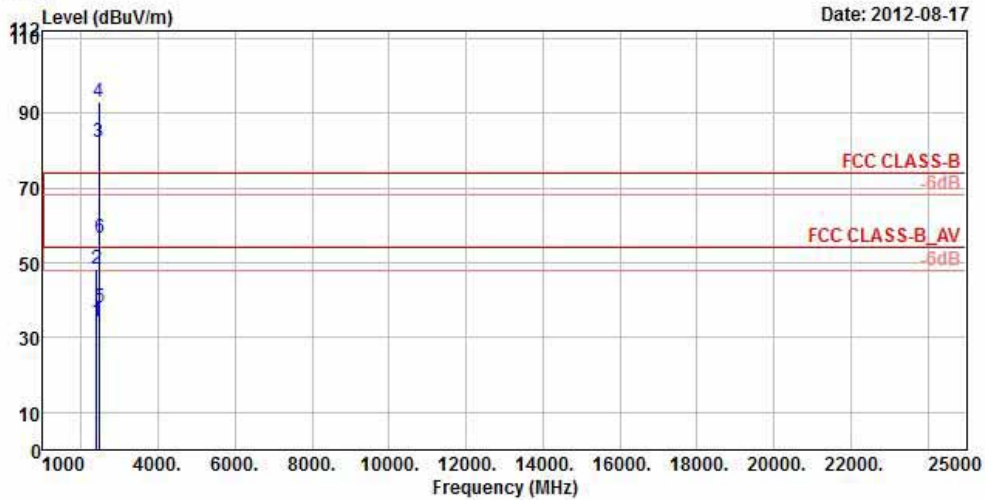

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11G TX CH11  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : 6M  
Power : 8

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2386.00	34.10	39.49	54.00	-19.90	27.26	4.85	37.50	100	272	Average
2	2386.00	48.53	53.92	74.00	-25.47	27.26	4.85	37.50	100	272	Peak
3 pp	2462.00	82.37	87.40			27.45	4.91	37.39	100	272	Average
4 pk	2462.00	93.15	98.18			27.45	4.91	37.39	100	272	Peak
5	2484.00	37.99	42.89	54.00	-16.01	27.50	4.92	37.32	100	272	Average
6	2484.00	56.83	61.73	74.00	-17.17	27.50	4.92	37.32	100	272	Peak

## 802.11n (20MHz)




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

Date: 2012-08-18

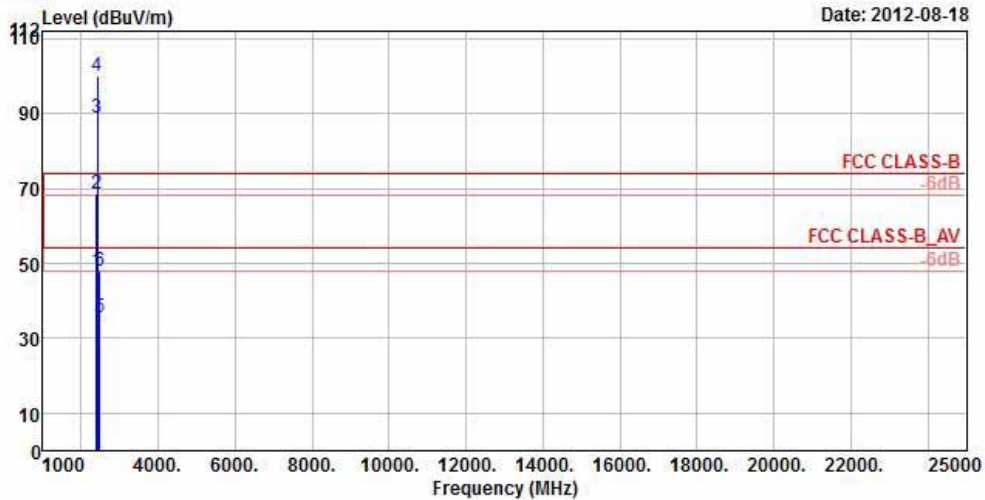

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11N\_HT20 TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : M0  
Power : 7


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	47.93	53.32	54.00	-6.07	27.26	4.87	37.52	100	17	Average
2 !	2390.00	68.68	74.07	74.00	-5.32	27.26	4.87	37.52	100	17	Peak
3 pp	2412.00	89.05	94.39			27.31	4.87	37.52	100	17	Average
4 pk	2412.00	100.00	105.34			27.31	4.87	37.52	100	17	Peak
5	2484.00	35.60	40.50	54.00	-18.40	27.50	4.92	37.32	100	17	Average
6	2484.00	48.04	52.94	74.00	-25.96	27.50	4.92	37.32	100	17	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

Date: 2012-08-18

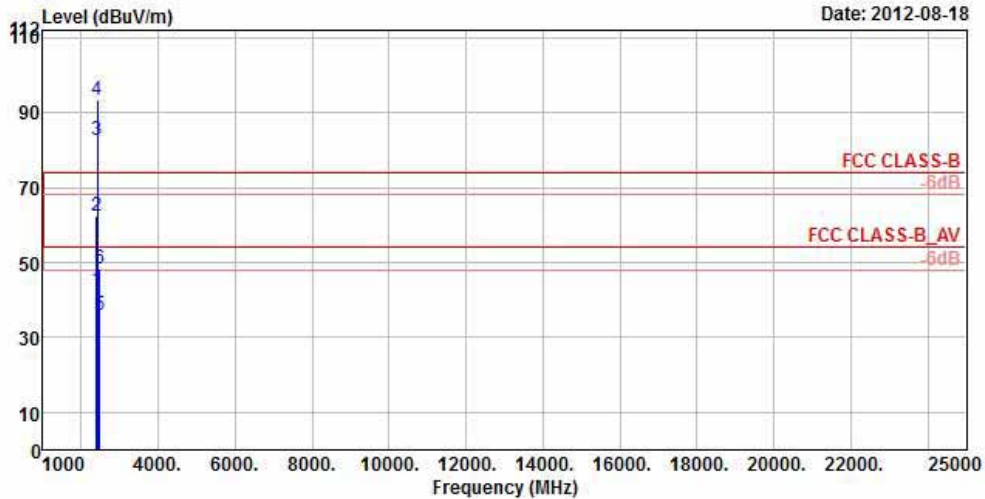


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11N\_HT20 TX CH01  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : M0  
Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg
1	2390.00	42.45	47.84	54.00	-11.55	27.26	4.87	37.52	100	271 Average
2	2390.00	62.52	67.91	74.00	-11.48	27.26	4.87	37.52	100	271 Peak
3 pp	2412.00	82.48	87.82			27.31	4.87	37.52	100	271 Average
4 pk	2412.00	93.37	98.71			27.31	4.87	37.52	100	271 Peak
5	2483.50	35.79	40.69	54.00	-18.21	27.50	4.92	37.32	100	271 Average
6	2483.50	48.24	53.14	74.00	-25.76	27.50	4.92	37.32	100	271 Peak



Data: 19

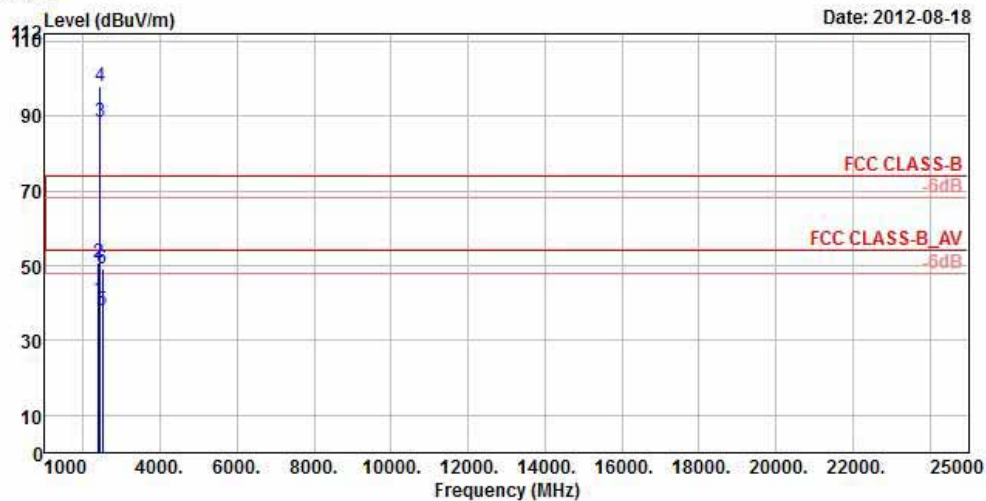


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11N\_HT20 TX CH06  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : M0  
Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	cm	deg	
1	2386.00	40.81	46.20	54.00	-13.19	27.26	4.85	37.50	100	14 Average
2	2386.00	51.03	56.42	74.00	-22.97	27.26	4.85	37.50	100	14 Peak
3 pp	2437.00	88.29	93.46			27.40	4.89	37.46	100	14 Average
4 pk	2437.00	98.13	103.30			27.40	4.89	37.46	100	14 Peak
5	2496.00	38.20	42.96	54.00	-15.80	27.55	4.94	37.25	100	14 Average
6	2496.00	49.23	53.99	74.00	-24.77	27.55	4.94	37.25	100	14 Peak

Data: 20

Date: 2012-08-18

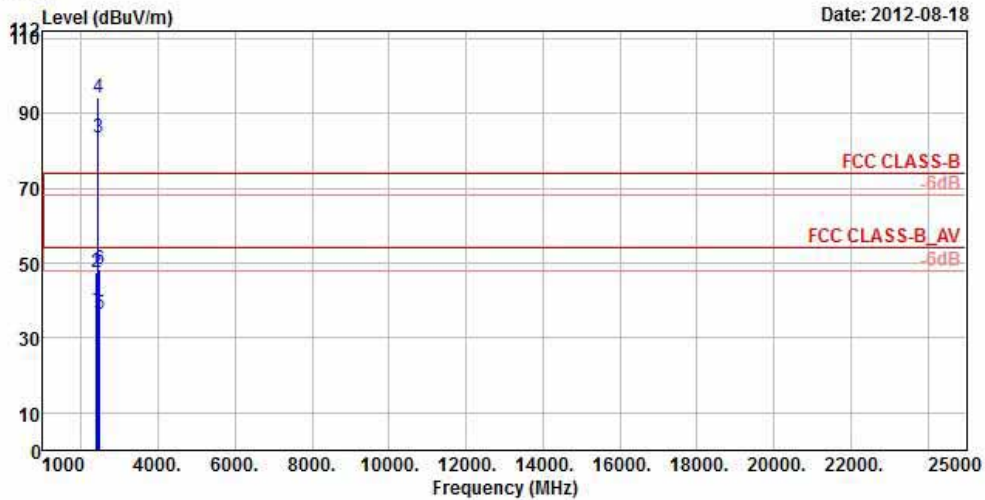

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11N\_HT20 TX CH06  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : M0  
Power : 7


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	37.75	43.14	54.00	-16.25	27.26	4.87	37.52	101	270	Average
2	2390.00	47.47	52.86	74.00	-26.53	27.26	4.87	37.52	101	270	Peak
3 pp	2437.00	83.47	88.64			27.40	4.89	37.46	101	270	Average
4 pk	2437.00	94.06	99.23			27.40	4.89	37.46	101	270	Peak
5	2483.50	36.52	41.42	54.00	-17.48	27.50	4.92	37.32	101	270	Average
6	2483.50	48.29	53.19	74.00	-25.71	27.50	4.92	37.32	101	270	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

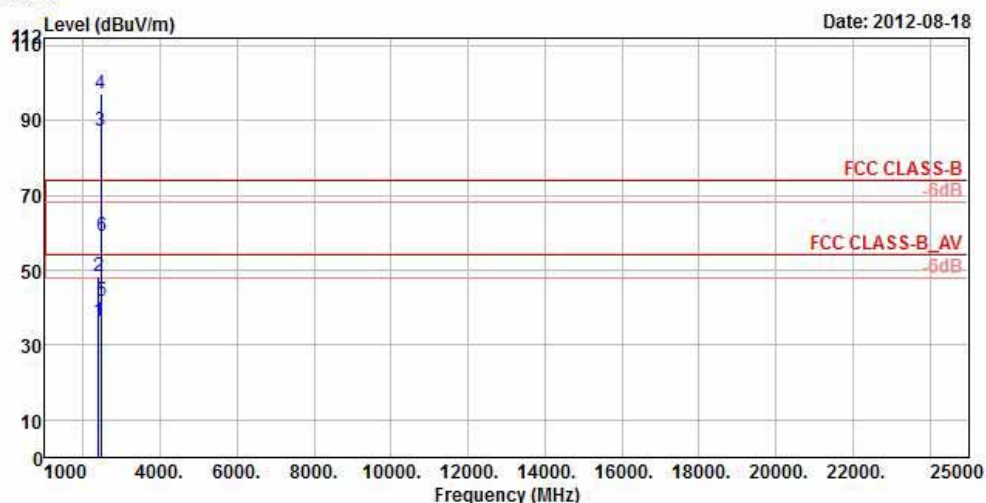

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11N\_HT20 TX CH11  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : M0  
Power : 7


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	36.25	41.64	54.00	-17.75	27.26	4.87	37.52	100	14	Average
2	2390.00	48.31	53.70	74.00	-25.69	27.26	4.87	37.52	100	14	Peak
3 pp	2462.00	87.30	92.33			27.45	4.91	37.39	100	14	Average
4 pk	2462.00	97.03	102.06			27.45	4.91	37.39	100	14	Peak
5	2483.50	41.93	46.83	54.00	-12.07	27.50	4.92	37.32	100	14	Average
6	2483.50	59.02	63.92	74.00	-14.98	27.50	4.92	37.32	100	14	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

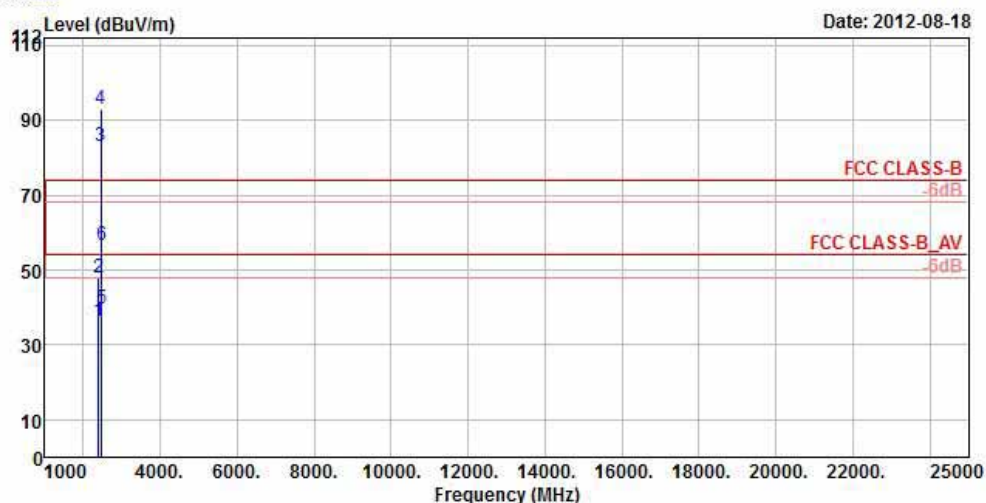

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11N\_HT20 TX CH11  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : Z  
 Rate : M0  
 Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	36.22	41.61	54.00	-17.78	27.26	4.87	37.52	100	242	Average
2	2390.00	48.09	53.48	74.00	-25.91	27.26	4.87	37.52	100	242	Peak
3 pp	2462.00	83.09	88.12			27.45	4.91	37.39	100	242	Average
4 pk	2462.00	93.05	98.08			27.45	4.91	37.39	100	242	Peak
5	2483.50	39.60	44.50	54.00	-14.40	27.50	4.92	37.32	100	242	Average
6	2483.50	56.66	61.56	74.00	-17.34	27.50	4.92	37.32	100	242	Peak


802.11n (40MHz)



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

Date: 2012-08-18

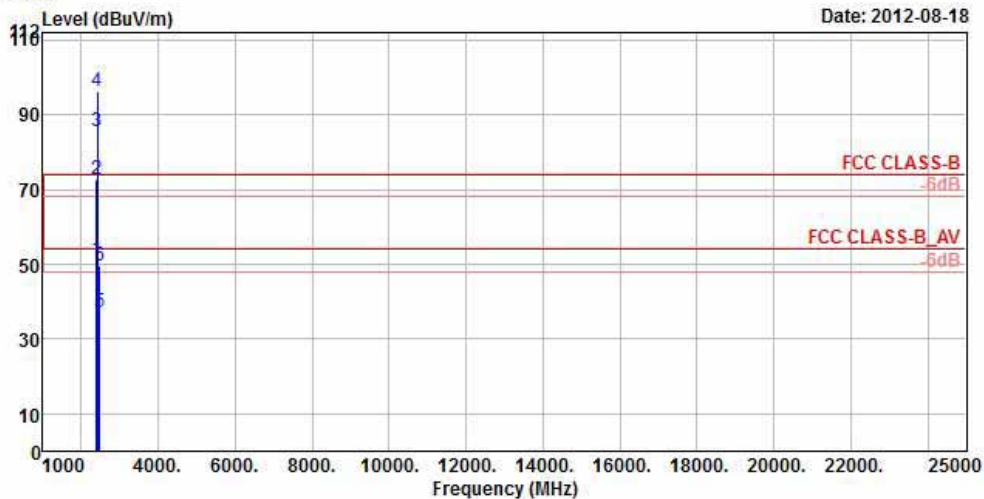

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11N\_HT40\_TX\_CH03  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : MCS0  
Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1 !	2386.00	51.13	56.52	54.00	-2.87	27.26	4.85	37.50	100	13	Average
2 !	2386.00	72.88	78.27	74.00	-1.12	27.26	4.85	37.50	100	13	Peak
3 pp	2422.00	85.35	90.57			27.35	4.89	37.46	100	13	Average
4 pk	2422.00	96.39	101.61			27.35	4.89	37.46	100	13	Peak
5	2483.50	37.20	42.10	54.00	-16.80	27.50	4.92	37.32	100	13	Average
6	2483.50	49.57	54.47	74.00	-24.43	27.50	4.92	37.32	100	13	Peak






Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 21

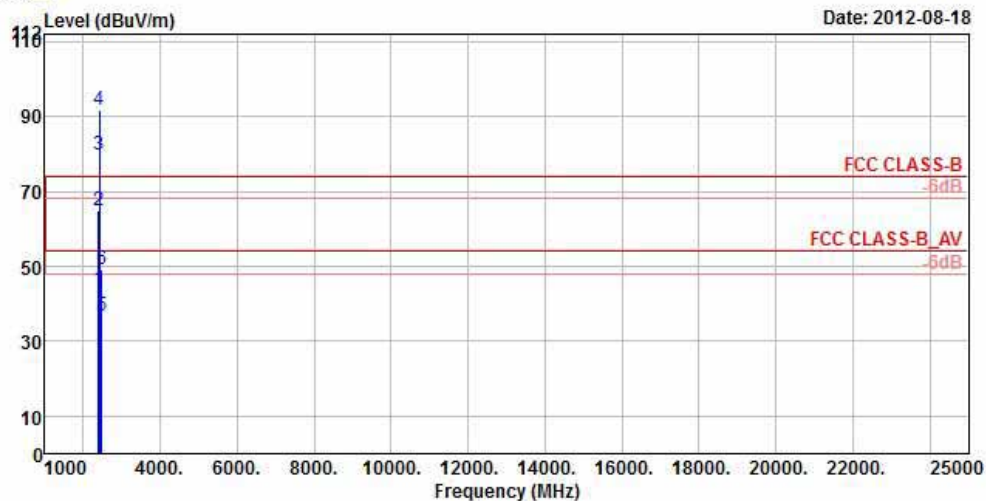

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11N\_HT40\_TX\_CH03  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : Z  
 Rate : MCS0  
 Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg
1	2388.00	43.66	49.05	54.00	-10.34	27.26	4.85	37.50	100	271 Average
2	2388.00	64.78	70.17	74.00	-9.22	27.26	4.85	37.50	100	271 Peak
3 pp	2422.00	79.70	84.92			27.35	4.89	37.46	100	271 Average
4 pk	2422.00	91.74	96.96			27.35	4.89	37.46	100	271 Peak
5	2483.50	36.65	41.55	54.00	-17.35	27.50	4.92	37.32	100	271 Average
6	2483.50	49.09	53.99	74.00	-24.91	27.50	4.92	37.32	100	271 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T


Data: 19

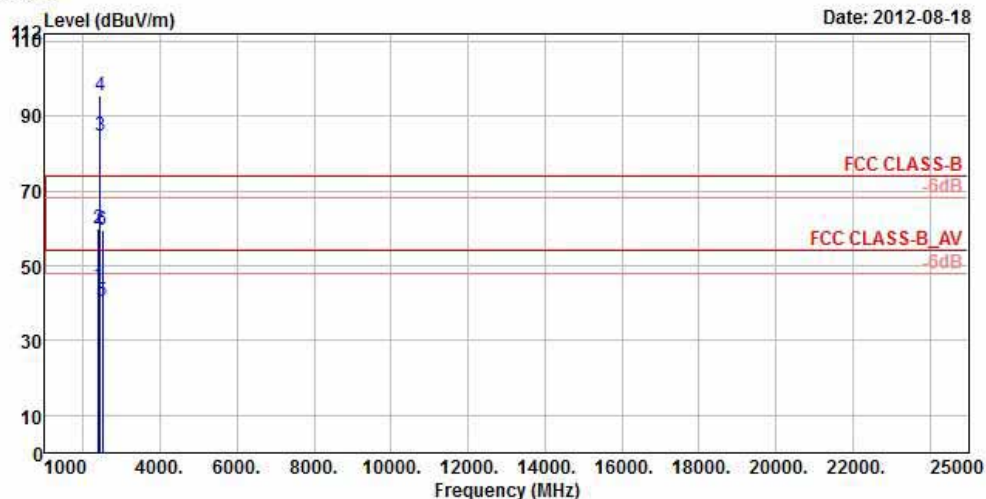

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11N\_HT40 TX CH06  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : MCS0  
Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	44.66	50.05	54.00	-9.34	27.26	4.87	37.52	120	166	Average
2	2390.00	60.04	65.43	74.00	-13.96	27.26	4.87	37.52	120	166	Peak
3 pp	2437.00	84.54	89.71			27.40	4.89	37.46	120	166	Average
4 pk	2437.00	95.40	100.57			27.40	4.89	37.46	120	166	Peak
5	2488.00	40.63	45.48	54.00	-13.37	27.55	4.92	37.32	120	166	Average
6	2488.00	59.65	64.50	74.00	-14.35	27.55	4.92	37.32	120	166	Peak

Data: 20

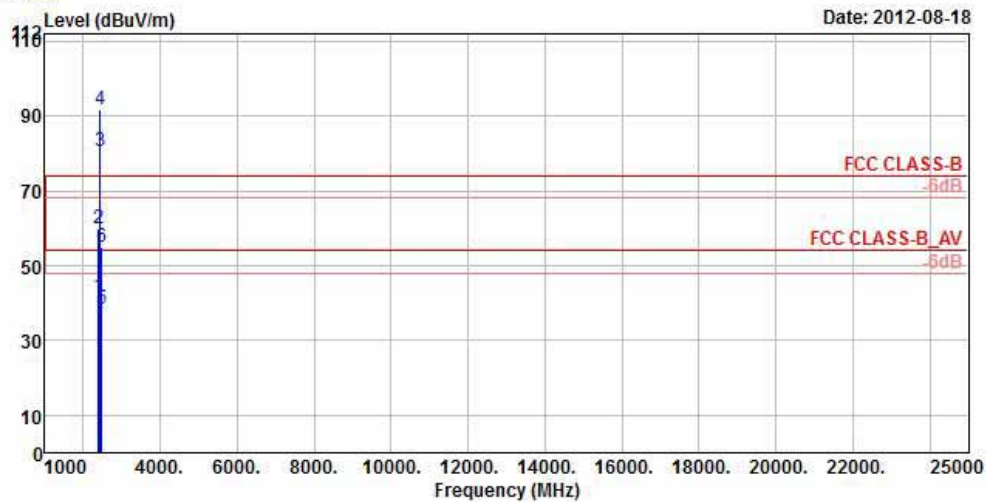

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11N\_HT40 TX CH06  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : Z  
 Rate : MCS0  
 Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	41.56	46.95	54.00	-12.44	27.26	4.87	37.52	100	272	Average
2	2390.00	59.73	65.12	74.00	-14.27	27.26	4.87	37.52	100	272	Peak
3 pp	2437.00	80.59	85.76			27.40	4.89	37.46	100	272	Average
4 pk	2437.00	91.80	96.97			27.40	4.89	37.46	100	272	Peak
5	2483.50	38.44	43.34	54.00	-15.56	27.50	4.92	37.32	100	272	Average
6	2483.50	55.15	60.05	74.00	-18.85	27.50	4.92	37.32	100	272	Peak






A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

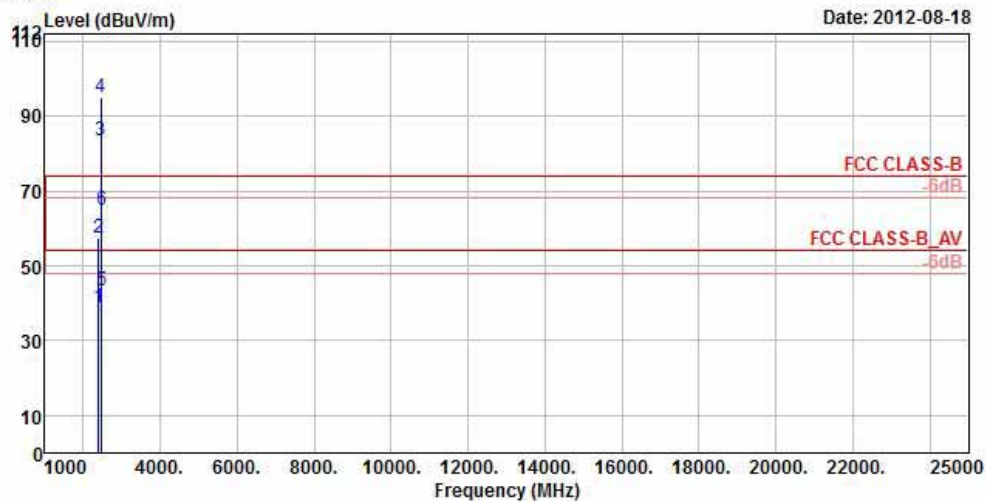

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11N\_HT40 TX CH09  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : Z  
 Rate : MCS0  
 Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	39.01	44.40	54.00	-14.99	27.26	4.87	37.52	100	13	Average
2	2390.00	57.48	62.87	74.00	-16.52	27.26	4.87	37.52	100	13	Peak
3 pp	2452.00	83.53	88.61			27.40	4.91	37.39	100	13	Average
4 pk	2452.00	94.93	100.01			27.40	4.91	37.39	100	13	Peak
5	2483.50	43.30	48.20	54.00	-10.70	27.50	4.92	37.32	100	13	Average
6	2483.50	64.81	69.71	74.00	-9.19	27.50	4.92	37.32	100	13	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

Date: 2012-08-18

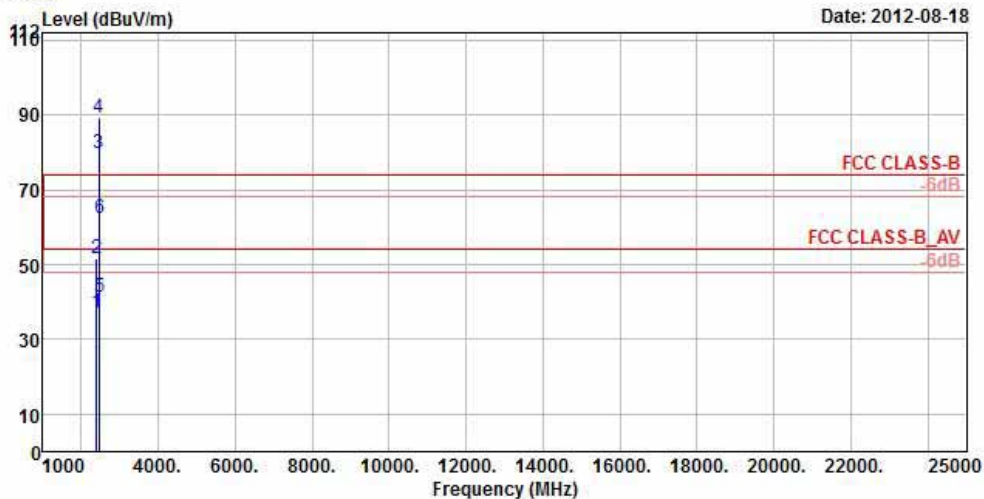

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11N\_HT40 TX CH09  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z  
Rate : MCS0  
Power : 7

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	37.01	42.40	54.00	-16.99	27.26	4.87	37.52	100	272	Average
2	2390.00	51.53	56.92	74.00	-22.47	27.26	4.87	37.52	100	272	Peak
3 pp	2452.00	79.65	84.73			27.40	4.91	37.39	100	272	Average
4 pk	2452.00	89.39	94.47			27.40	4.91	37.39	100	272	Peak
5	2483.50	41.23	46.13	54.00	-12.77	27.50	4.92	37.32	100	272	Average
6	2483.50	62.55	67.45	74.00	-11.45	27.50	4.92	37.32	100	272	Peak


## BELOW 1GHz WORST-CASE DATA : 802.11g



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

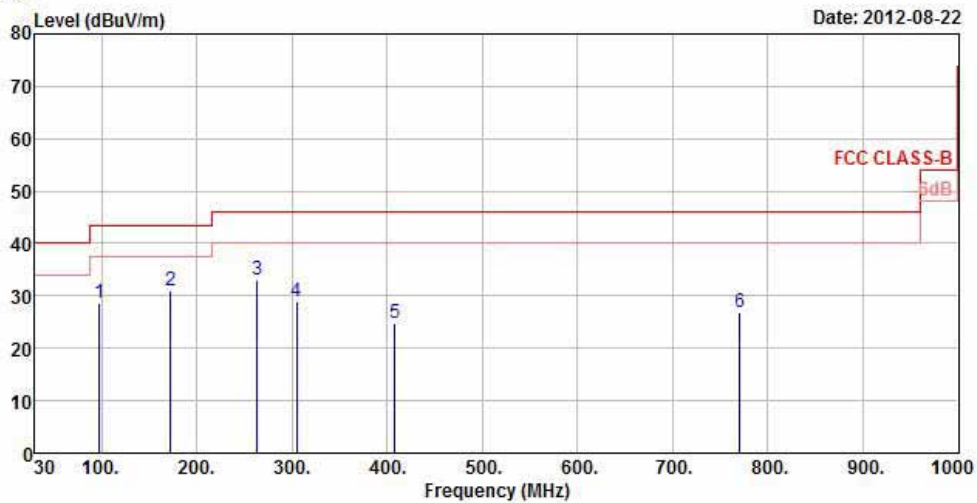

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_30M~1G\_LF HORIZONTAL  
Brand/Model: PM23200  
Remark : WIFI TX  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	97.50	28.50	50.49	43.50	-15.00	8.91	1.06	31.96	100	214	Peak
2 pp	172.29	31.04	49.87	43.50	-12.46	11.47	1.46	31.76	100	144	Peak
3	263.28	33.06	51.23	46.00	-12.94	11.85	1.88	31.90	112	298	Peak
4	304.90	29.06	45.82	46.00	-16.94	13.06	2.07	31.89	100	174	Peak
5	407.80	24.75	38.85	46.00	-21.25	15.48	2.45	32.03	100	153	Peak
6	770.40	26.85	32.72	46.00	-19.15	21.81	3.62	31.30	100	132	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 6

Date: 2012-08-22

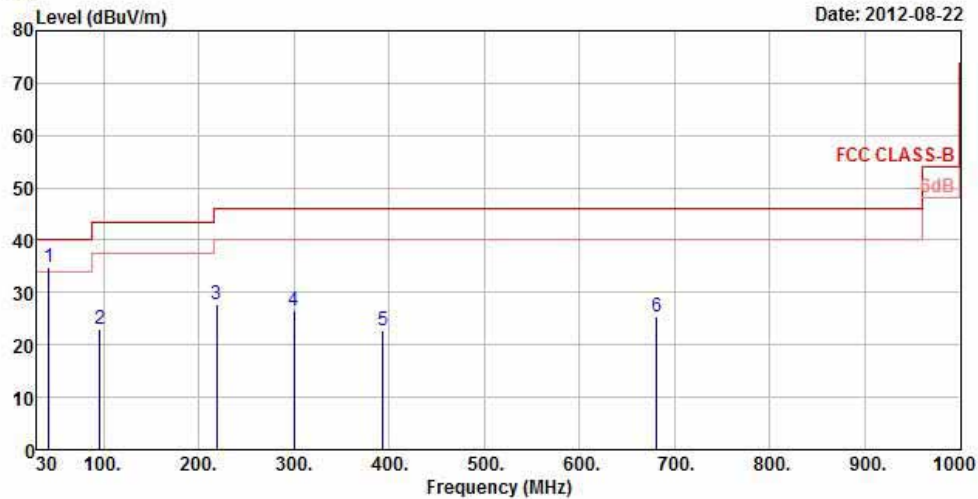

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_30M~1G\_LF VERTICAL  
Brand/Model: PM23200  
Remark : WIFI TX  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : Z

	Freq	Level	Read Level	Limit Line	OverLimit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1 pp	42.42	34.88	51.68	40.00	-5.12	13.58	0.70	31.08	120	136	Peak
2	96.42	22.94	45.09	43.50	-20.56	8.76	1.05	31.96	120	254	Peak
3	218.46	27.65	47.53	46.00	-18.35	10.13	1.68	31.69	100	146	Peak
4	300.00	26.49	43.34	46.00	-19.51	12.94	2.05	31.84	100	156	Peak
5	393.80	22.84	37.33	46.00	-23.16	15.19	2.40	32.08	100	148	Peak
6	680.80	25.37	33.26	46.00	-20.63	20.59	3.36	31.84	100	123	Peak

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 06, 2012	Jul. 05, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

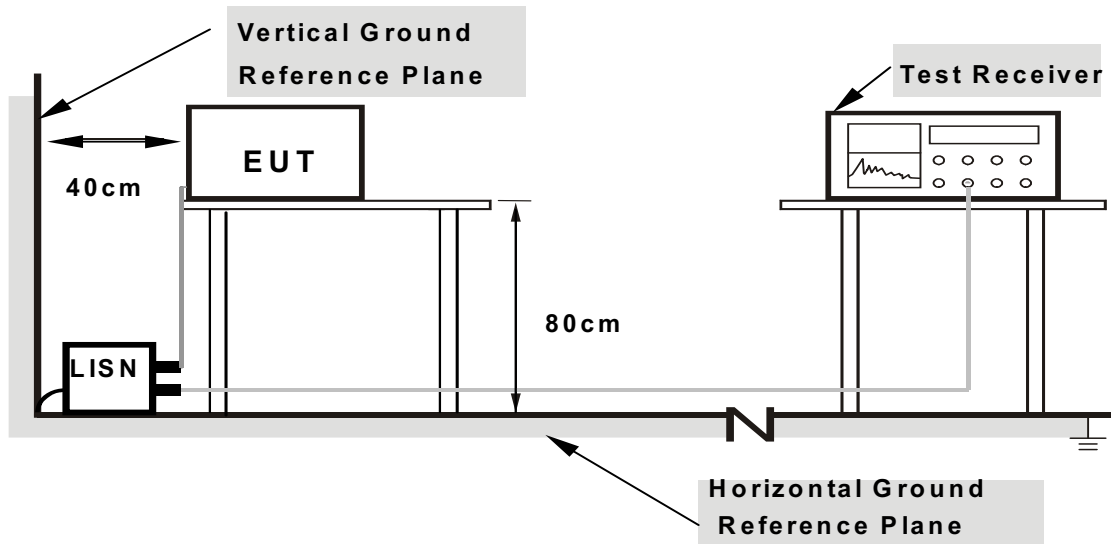

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



## 4.2.7 TEST RESULTS


### CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.25156	0.16	55.73	38.58	55.89	38.74	61.71	51.71	-5.82	-12.97
2	0.37266	0.17	45.38	29.18	45.55	29.35	58.44	48.44	-12.89	-19.09
3	0.64219	0.18	42.81	26.26	42.99	26.44	56.00	46.00	-13.01	-19.56
4	1.64844	0.24	39.78	22.76	40.02	23.00	56.00	46.00	-15.98	-23.00
5	3.66406	0.33	34.37	20.30	34.70	20.63	56.00	46.00	-21.30	-25.37
6	13.56250	0.50	52.02	47.30	52.52	47.80	60.00	50.00	-7.48	-2.20

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

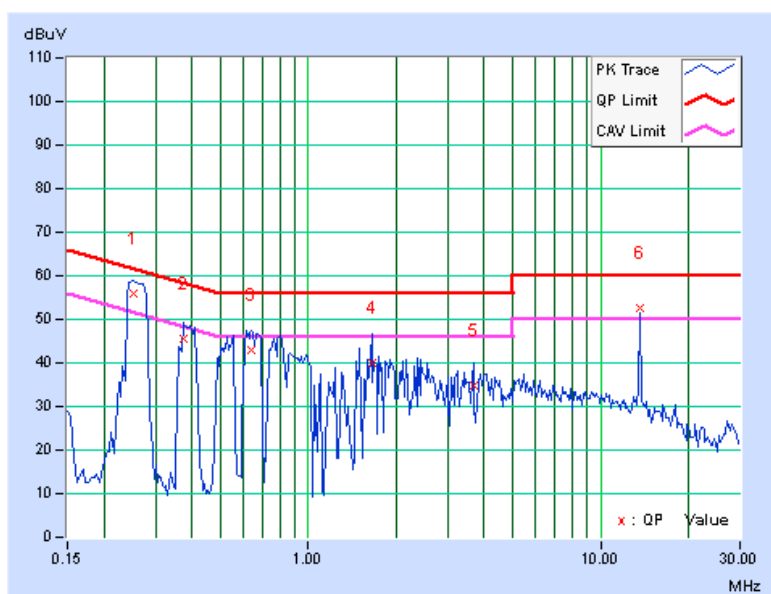




PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.25156	0.15	55.97	38.82	56.12	38.97	61.71	51.71	-5.59	-12.74
2	0.36875	0.16	45.92	28.13	46.08	28.29	58.53	48.53	-12.45	-20.24
3	0.63828	0.17	43.06	26.78	43.23	26.95	56.00	46.00	-12.77	-19.05
4	1.73047	0.24	40.11	23.67	40.35	23.91	56.00	46.00	-15.65	-22.09
5	3.51563	0.33	33.97	19.39	34.30	19.72	56.00	46.00	-21.70	-26.28
6	13.55859	0.57	51.96	46.86	52.53	47.43	60.00	50.00	-7.47	-2.57

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

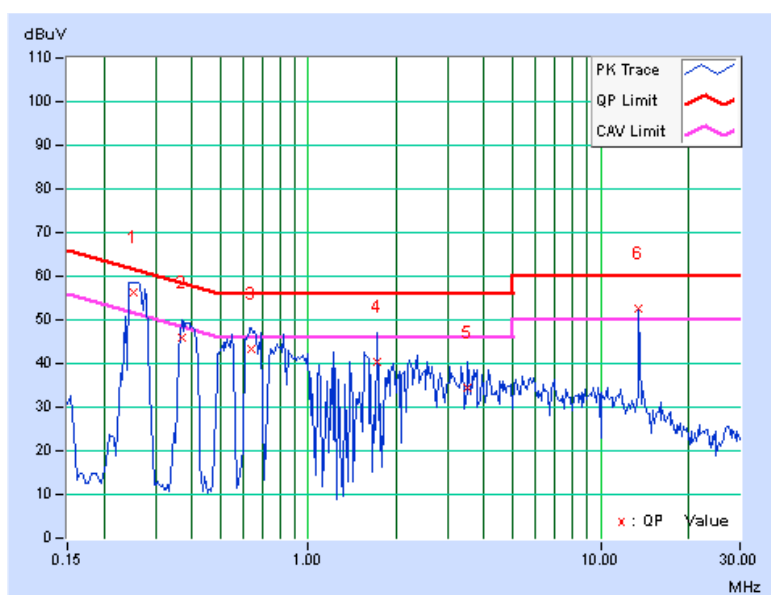


### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST SETUP



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 TEST RESULTS

##### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.15	0.5	PASS
6	2437	8.31	0.5	PASS
11	2462	8.71	0.5	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.49	0.5	PASS
6	2437	16.59	0.5	PASS
11	2462	16.57	0.5	PASS

##### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.72	0.5	PASS
6	2437	17.91	0.5	PASS
11	2462	17.78	0.5	PASS

##### 802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.14	0.5	PASS
6	2437	36.17	0.5	PASS
9	2452	26.28	0.5	PASS

## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 TEST SETUP

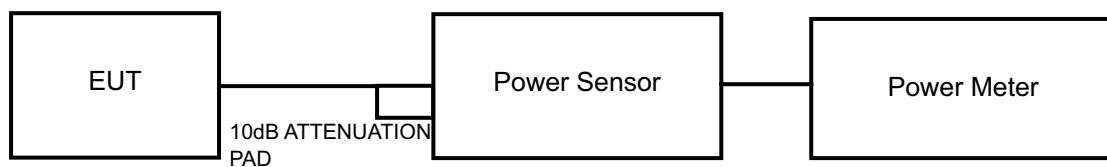

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

#### 4.4.7 TEST RESULTS

##### 802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	107.647	20.32	30	PASS
6	2437	118.032	20.72	30	PASS
11	2462	123.310	20.91	30	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	123.027	20.90	30	PASS
6	2437	133.660	21.26	30	PASS
11	2462	140.929	21.49	30	PASS

##### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	115.345	20.62	30	PASS
6	2437	123.027	20.90	30	PASS
11	2462	133.968	21.27	30	PASS

##### 802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	121.339	20.84	30	PASS
6	2437	126.765	21.03	30	PASS
9	2452	130.017	21.14	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

## 4.5.7 TEST RESULTS

### 802.11b

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	9.92	-5.31	8	PASS
6	2437	11.44	-3.79	8	PASS
11	2462	10.79	-4.44	8	PASS

### 802.11g

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	1.62	-13.61	8	PASS
6	2437	1.79	-13.44	8	PASS
11	2462	1.70	-13.53	8	PASS

### 802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	0.59	-14.64	8	PASS
6	2437	0.72	-14.51	8	PASS
11	2462	0.72	-14.51	8	PASS

### 802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-2.29	-17.52	8	PASS
6	2437	-2.25	-17.48	8	PASS
9	2452	-2.29	-17.52	8	PASS




## 4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP



### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION


Same as Item 4.3.6

### 4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b


## CH 1

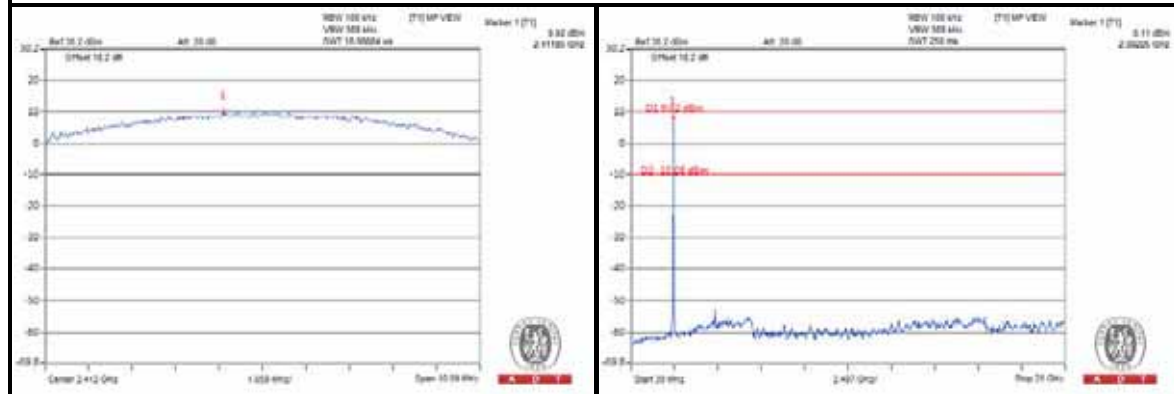

## CH 6

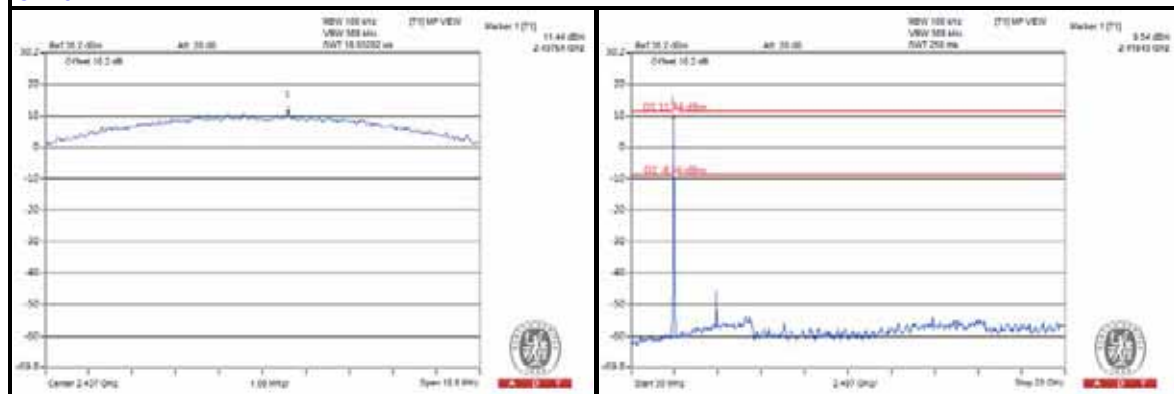


## CH 11

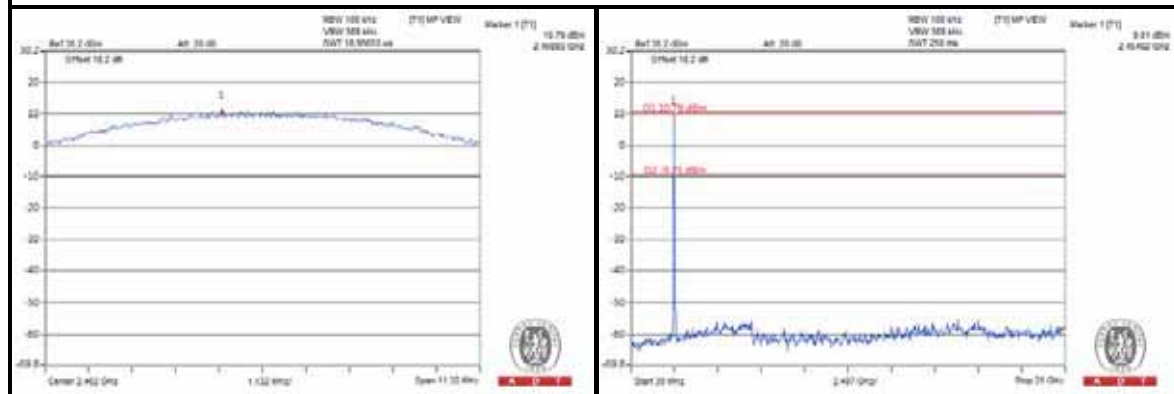


802.11g


### CH 1

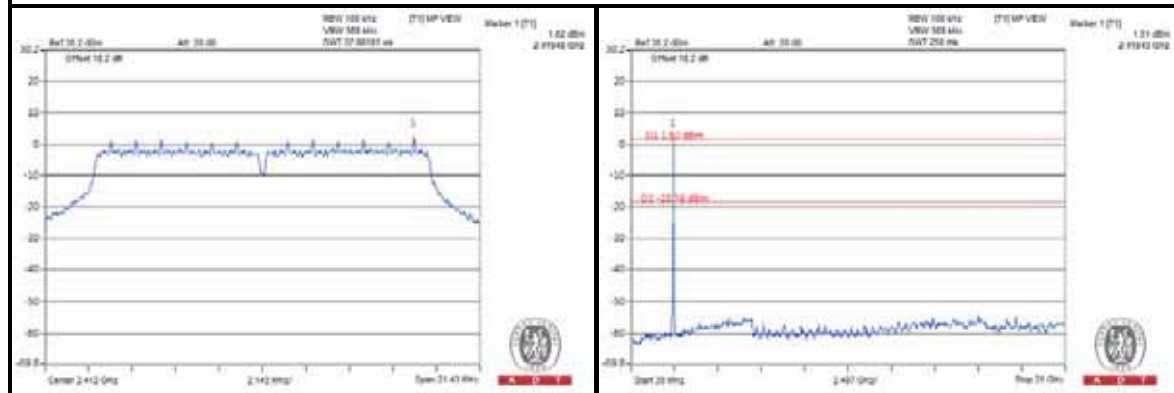

### CH 6

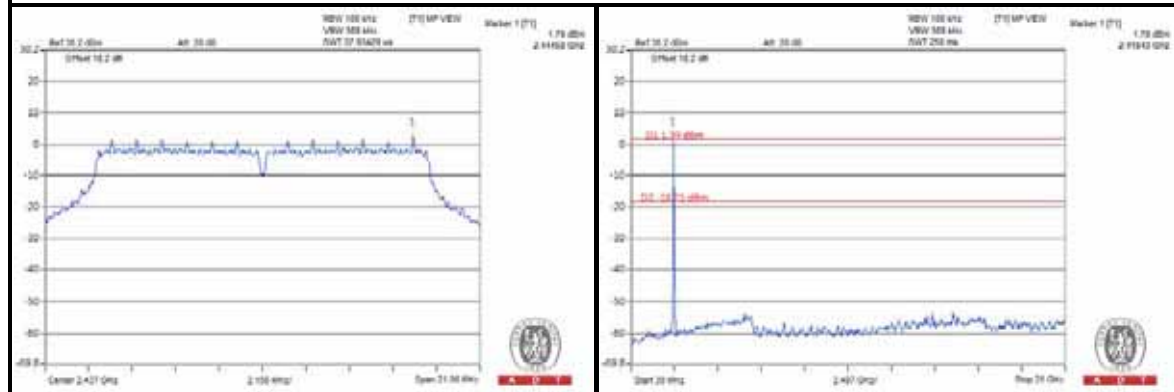


### CH 11

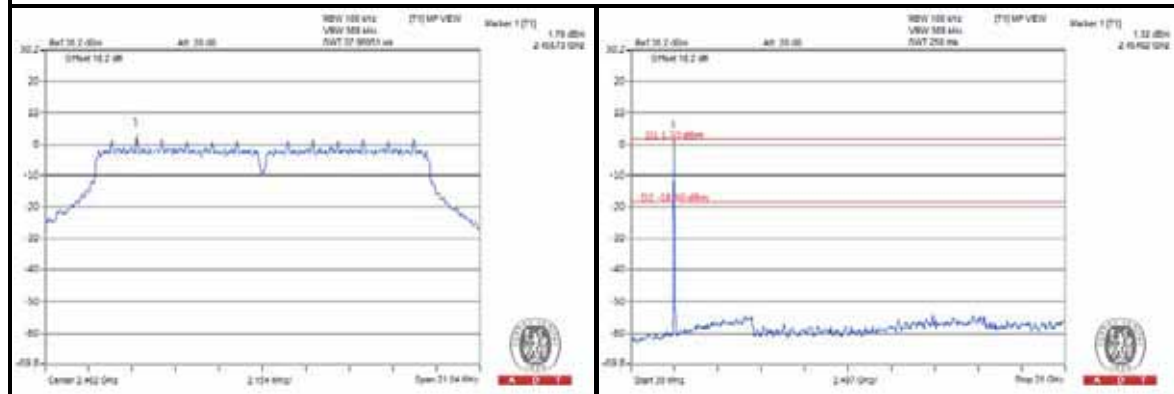




## 802.11n (40MHz)


### CH 3

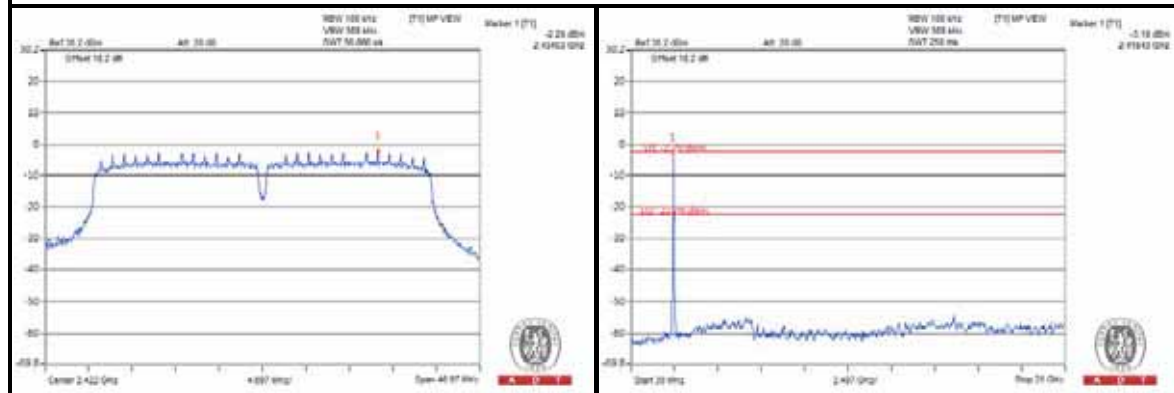

### CH 6

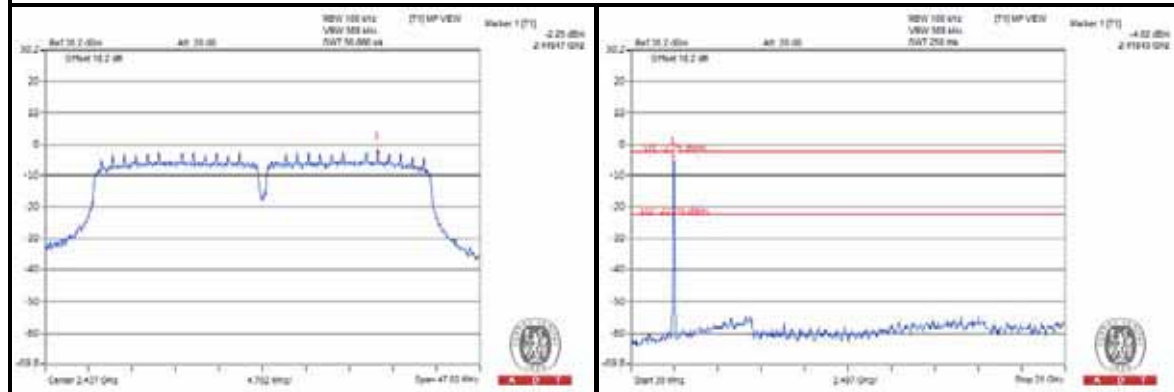

### CH 9

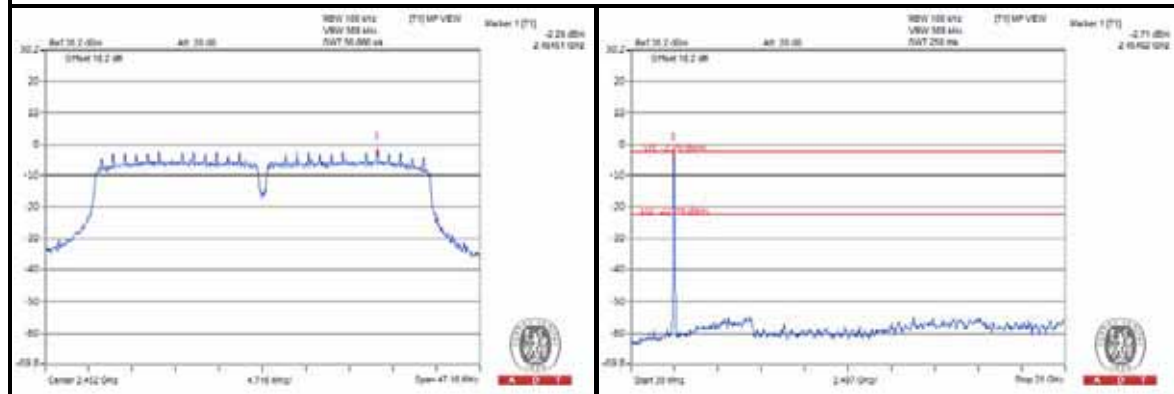

## 5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

### 5.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 5.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

### 5.1.3 TEST PROCEDURES

Same as item 4.1.3.

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.1.5 TEST SETUP

Same as item 4.1.5.

### 5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

## 5.1.7 TEST RESULTS

### ABOVE 1GHz WORST-CASE DATA :


802.11a



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

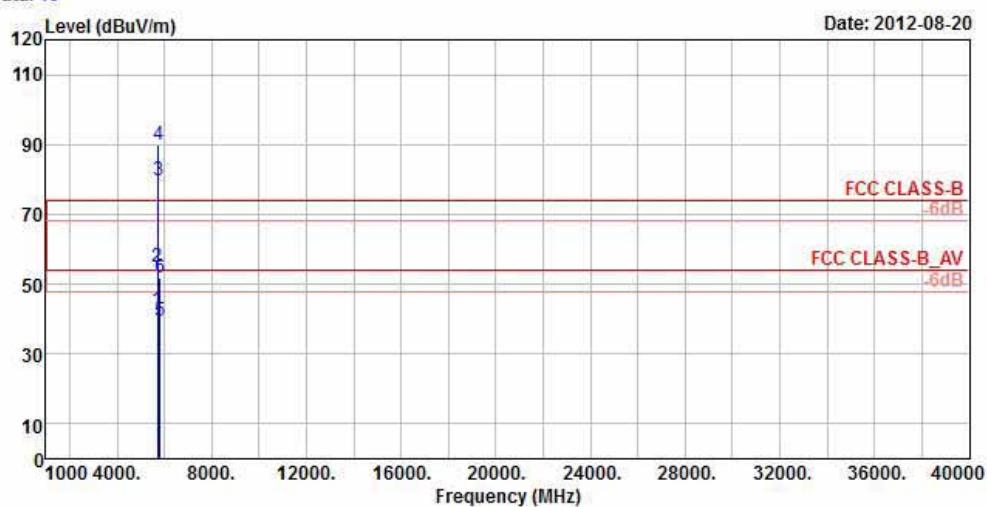

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11A TX CH149  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : 6M  
Power : X


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	42.66	40.02	59.78	-17.12	32.36	7.71	37.43	105	322	Average
2	5725.00	54.98	52.34	70.05	-15.07	32.36	7.71	37.43	105	322	Peak
3 pp	5745.00	79.78	77.13			32.38	7.74	37.47	105	322	Average
4 pk	5745.00	90.05	87.40			32.38	7.74	37.47	105	322	Peak
5	5825.00	39.55	36.75	59.78	-20.23	32.51	7.82	37.53	105	322	Average
6	5825.00	52.01	49.21	70.05	-18.04	32.51	7.82	37.53	105	322	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

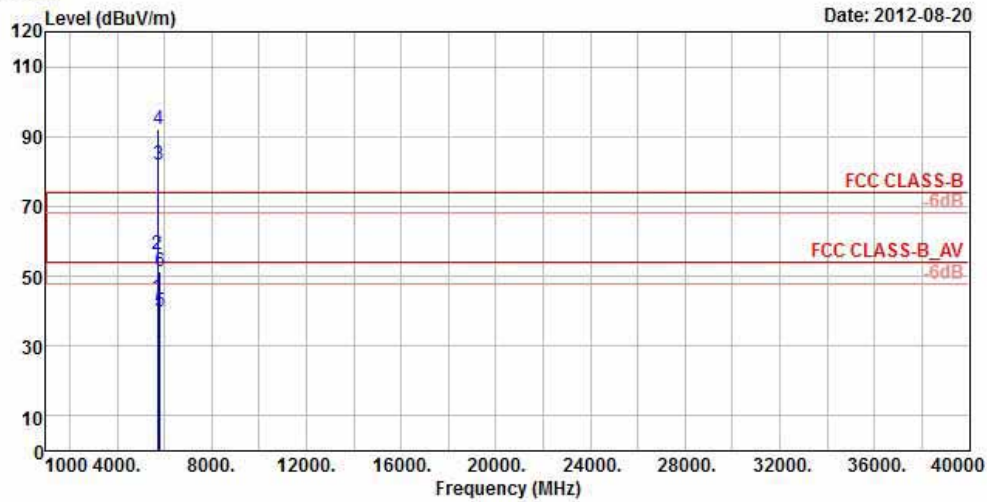

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11A TX CH149  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : 6M  
Power : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	cm	deg	
1	5725.00	43.77	41.13	61.73	-17.96	32.36	7.71	37.43	100	24 Average
2	5725.00	56.27	53.63	72.04	-15.77	32.36	7.71	37.43	100	24 Peak
3 pp	5745.00	81.73	79.08			32.38	7.74	37.47	100	24 Average
4 pk	5745.00	92.04	89.39			32.38	7.74	37.47	100	24 Peak
5	5825.00	39.64	36.84	61.73	-22.09	32.51	7.82	37.53	100	24 Average
6	5825.00	51.31	48.51	72.04	-20.73	32.51	7.82	37.53	100	24 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

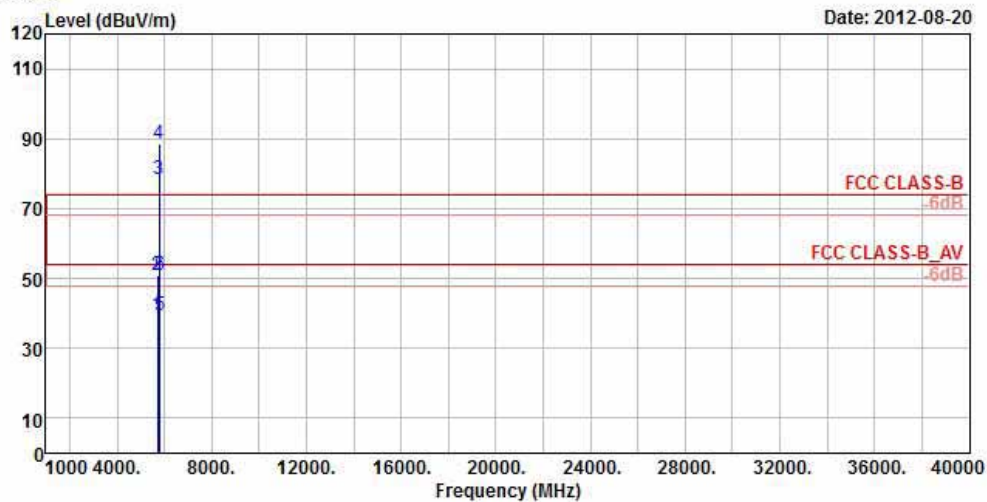

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11A TX CH157  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : 6M  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	39.54	36.90	58.36	-18.82	32.36	7.71	37.43	105	322	Average
2	5725.00	50.73	48.09	68.35	-17.62	32.36	7.71	37.43	105	322	Peak
3 pp	5785.00	78.36	75.67			32.43	7.80	37.54	105	322	Average
4 pk	5785.00	88.35	85.66			32.43	7.80	37.54	105	322	Peak
5	5825.00	39.56	36.76	58.36	-18.80	32.51	7.82	37.53	105	322	Average
6	5825.00	50.71	47.91	68.35	-17.64	32.51	7.82	37.53	105	322	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

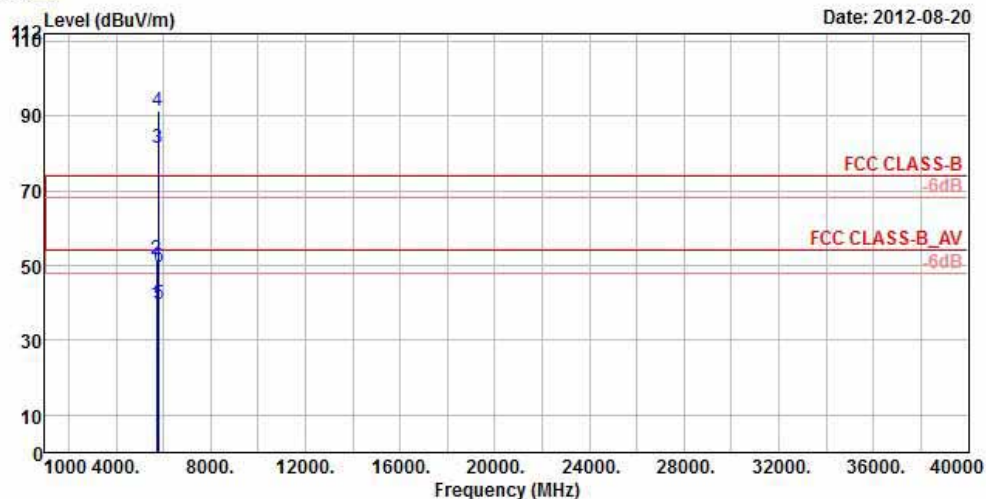


Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11A TX CH157  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : 6M  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	39.58	36.94	61.22	-21.64	32.36	7.71	37.43	110	172	Average
2	5725.00	51.54	48.90	71.44	-19.90	32.36	7.71	37.43	110	172	Peak
3 pp	5785.00	81.22	78.53			32.43	7.80	37.54	110	172	Average
4 pk	5785.00	91.44	88.75			32.43	7.80	37.54	110	172	Peak
5	5825.00	39.65	36.85	61.22	-21.57	32.51	7.82	37.53	110	172	Average
6	5825.00	49.75	46.95	71.44	-21.69	32.51	7.82	37.53	110	172	Peak



Data: 19

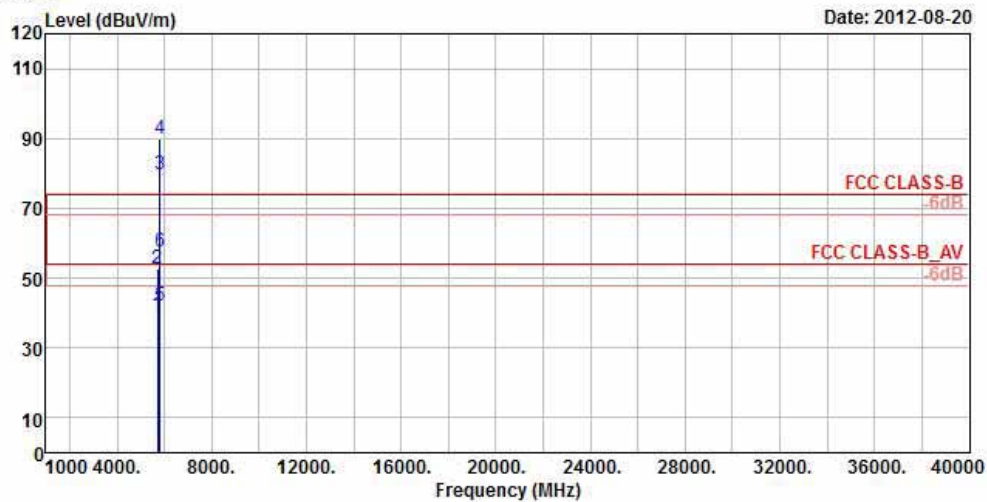


Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11A TX CH161  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : 6M  
 Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	cm	deg	
1	5725.00	39.54	36.90	59.50	-19.96	32.36	7.71	37.43	104	324 Average
2	5725.00	52.52	49.88	69.73	-17.21	32.36	7.71	37.43	104	324 Peak
3 pp	5805.00	79.50	76.76			32.48	7.80	37.54	104	324 Average
4 pk	5805.00	89.73	86.99			32.48	7.80	37.54	104	324 Peak
5	5825.00	42.03	39.23	59.50	-17.47	32.51	7.82	37.53	104	324 Average
6	5825.00	57.50	54.70	69.73	-12.23	32.51	7.82	37.53	104	324 Peak



Data: 20

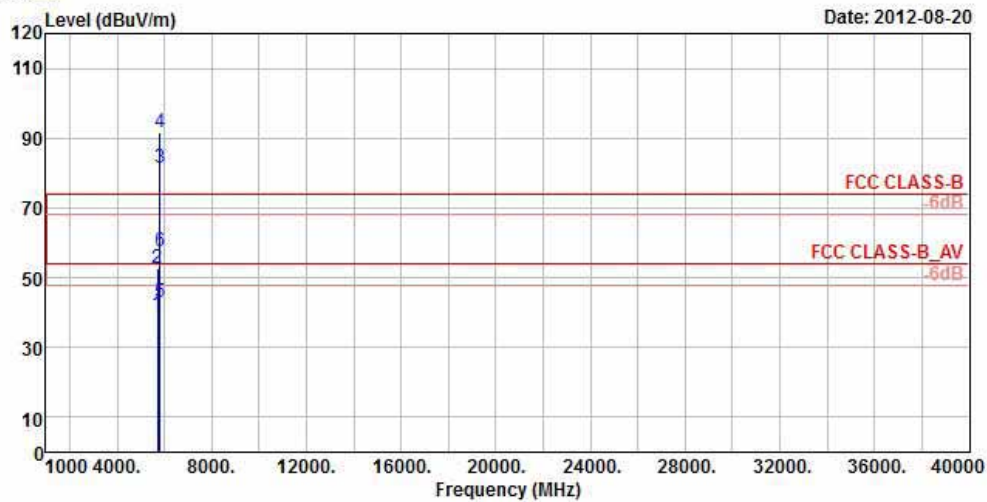

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11A TX CH161  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : 6M  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	cm	deg	
1	5725.00	39.51	36.87	61.48	-21.97	32.36	7.71	37.43	100	2 Average
2	5725.00	52.52	49.88	71.51	-18.99	32.36	7.71	37.43	100	2 Peak
3 pp	5805.00	81.48	78.74			32.48	7.80	37.54	100	2 Average
4 pk	5805.00	91.51	88.77			32.48	7.80	37.54	100	2 Peak
5	5825.00	42.84	40.04	61.48	-18.64	32.51	7.82	37.53	100	2 Average
6	5825.00	57.47	54.67	71.51	-14.04	32.51	7.82	37.53	100	2 Peak


# 802.11n (20MHz)



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

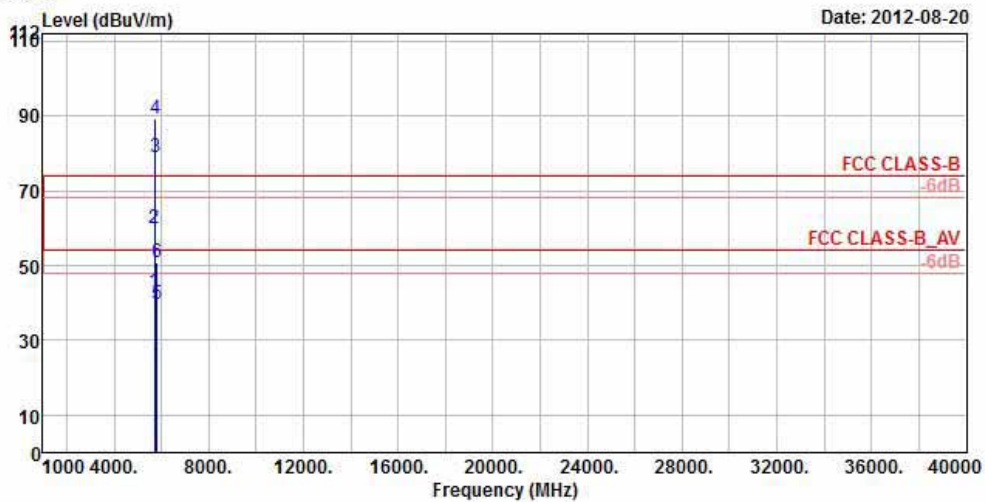

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11A\_HT20 TX CH149  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : MCS0  
Power : 4


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	43.03	40.39	59.03	-16.00	32.36	7.71	37.43	136	321	Average
2	5725.00	60.06	57.42	69.23	-9.17	32.36	7.71	37.43	136	321	Peak
3 pp	5745.00	79.03	76.38			32.38	7.74	37.47	136	321	Average
4 pk	5745.00	89.23	86.58			32.38	7.74	37.47	136	321	Peak
5	5825.00	39.60	36.80	59.03	-19.43	32.51	7.82	37.53	136	321	Average
6	5825.00	51.03	48.23	69.23	-18.20	32.51	7.82	37.53	136	321	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

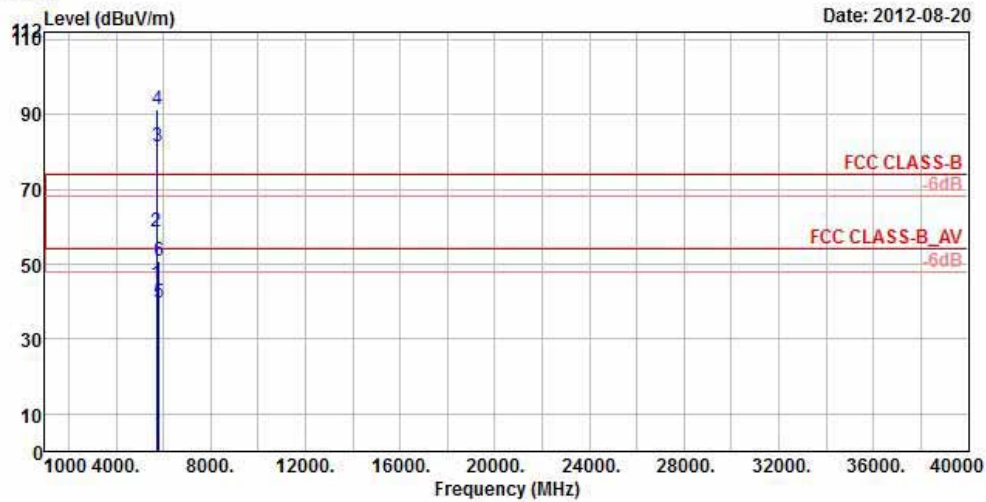

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11A\_HT20 TX CH149  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : MCS0  
 Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	44.47	41.83	61.24	-16.77	32.36	7.71	37.43	100	23	Average
2	5725.00	58.68	56.04	71.41	-12.73	32.36	7.71	37.43	100	23	Peak
3 pp	5745.00	81.24	78.59			32.38	7.74	37.47	100	23	Average
4 pk	5745.00	91.41	88.76			32.38	7.74	37.47	100	23	Peak
5	5825.00	39.52	36.72	61.24	-21.72	32.51	7.82	37.53	100	23	Average
6	5825.00	50.82	48.02	71.41	-20.59	32.51	7.82	37.53	100	23	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

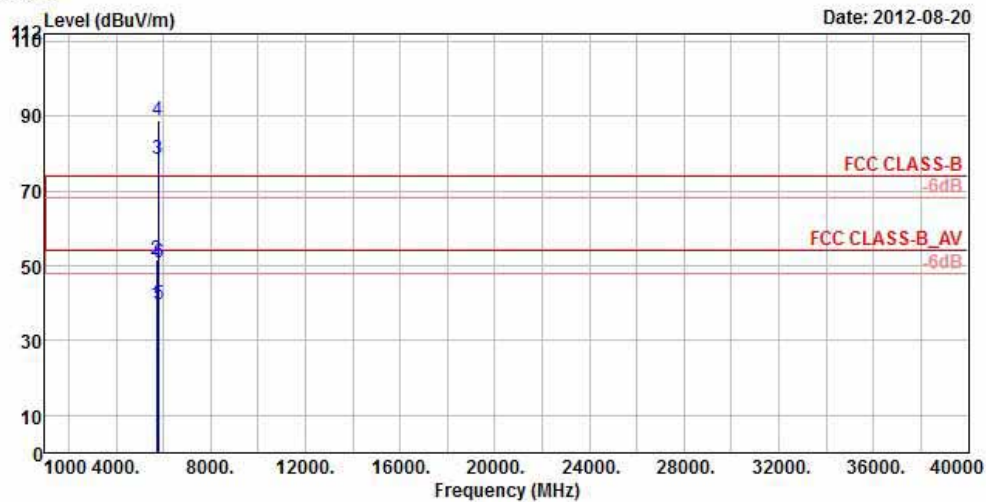

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11A\_HT20 TX CH157  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : MCS0  
 Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	39.54	36.90	58.53	-18.99	32.36	7.71	37.43	107	322	Average
2	5725.00	51.54	48.90	68.79	-17.25	32.36	7.71	37.43	107	322	Peak
3 pp	5785.00	78.53	75.84			32.43	7.80	37.54	107	322	Average
4 pk	5785.00	88.79	86.10			32.43	7.80	37.54	107	322	Peak
5	5825.00	39.56	36.76	58.53	-18.97	32.51	7.82	37.53	107	322	Average
6	5825.00	50.76	47.96	68.79	-18.03	32.51	7.82	37.53	107	322	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

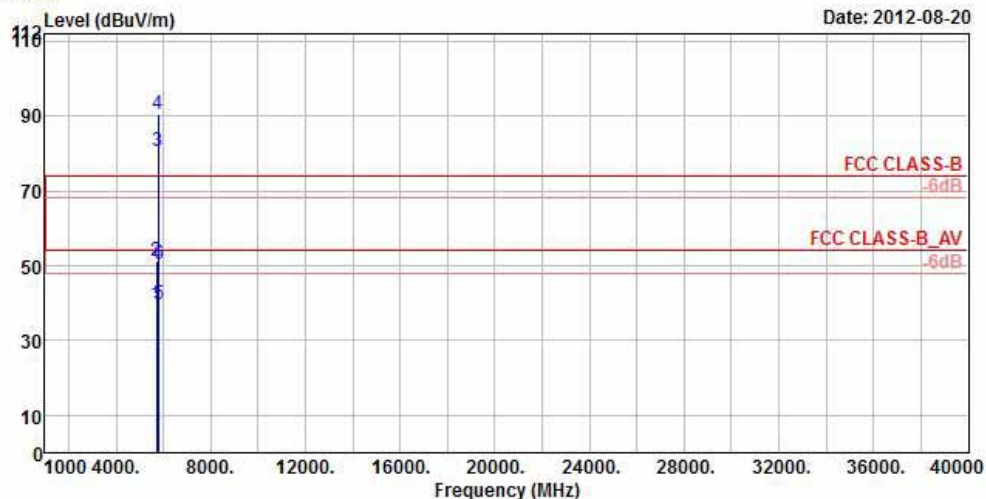


Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11A\_HT20 TX CH157  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : MCS0  
 Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	39.62	36.98	60.47	-20.85	32.36	7.71	37.43	100		2 Average
2	5725.00	51.26	48.62	70.58	-19.32	32.36	7.71	37.43	100		2 Peak
3 pp	5785.00	80.47	77.78			32.43	7.80	37.54	100		2 Average
4 pk	5785.00	90.58	87.89			32.43	7.80	37.54	100		2 Peak
5	5825.00	39.58	36.78	60.47	-20.89	32.51	7.82	37.53	100		2 Average
6	5825.00	50.50	47.70	70.58	-20.08	32.51	7.82	37.53	100		2 Peak



Data: 19

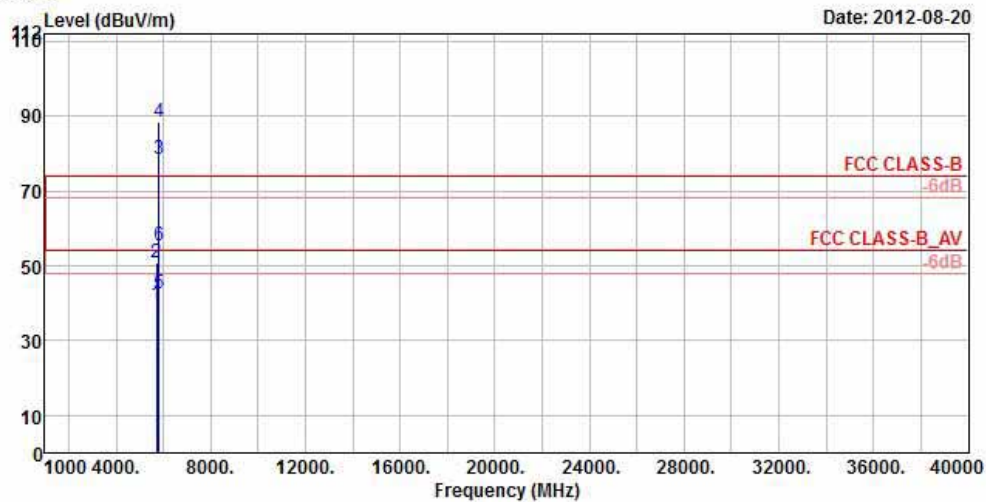

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11A\_HT20 TX CH161  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : MCS0  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg
1	5725.00	39.55	36.91	58.70	-19.15	32.36	7.71	37.43	103	324 Average
2	5725.00	50.72	48.08	68.60	-17.88	32.36	7.71	37.43	103	324 Peak
3 pp	5805.00	78.70	75.96			32.48	7.80	37.54	103	324 Average
4 pk	5805.00	88.60	85.86			32.48	7.80	37.54	103	324 Peak
5	5825.00	42.55	39.75	58.70	-16.15	32.51	7.82	37.53	103	324 Average
6	5825.00	55.27	52.47	68.60	-13.33	32.51	7.82	37.53	103	324 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

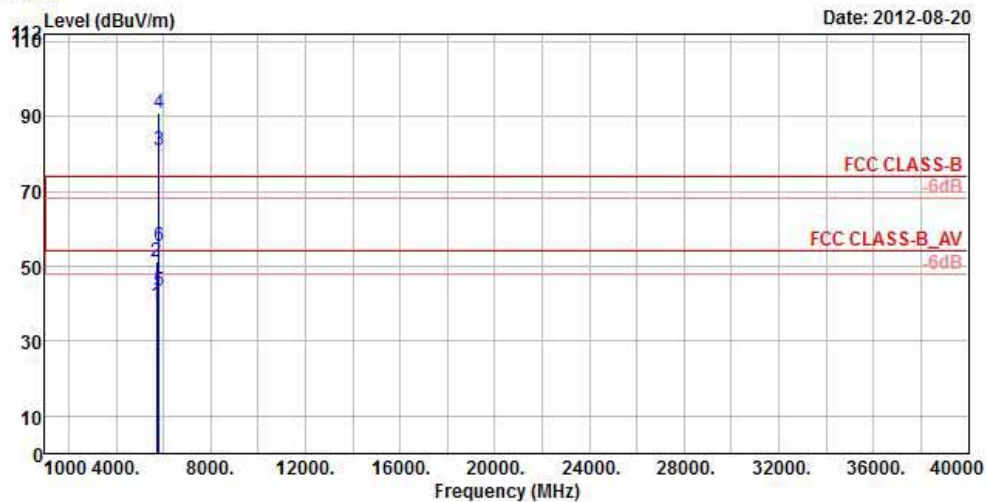

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
 Brand/Model: PM23200  
 Remark : 11A\_HT20 TX CH161  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : MCS0  
 Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	39.58	36.94	60.91	-21.33	32.36	7.71	37.43	100	3	Average
2	5725.00	51.39	48.75	71.08	-19.69	32.36	7.71	37.43	100	3	Peak
3 pp	5805.00	80.91	78.17			32.48	7.80	37.54	100	3	Average
4 pk	5805.00	91.08	88.34			32.48	7.80	37.54	100	3	Peak
5	5825.00	43.54	40.74	60.91	-17.37	32.51	7.82	37.53	100	3	Average
6	5825.00	55.39	52.59	71.08	-15.69	32.51	7.82	37.53	100	3	Peak




## 802.11n (40MHz)



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

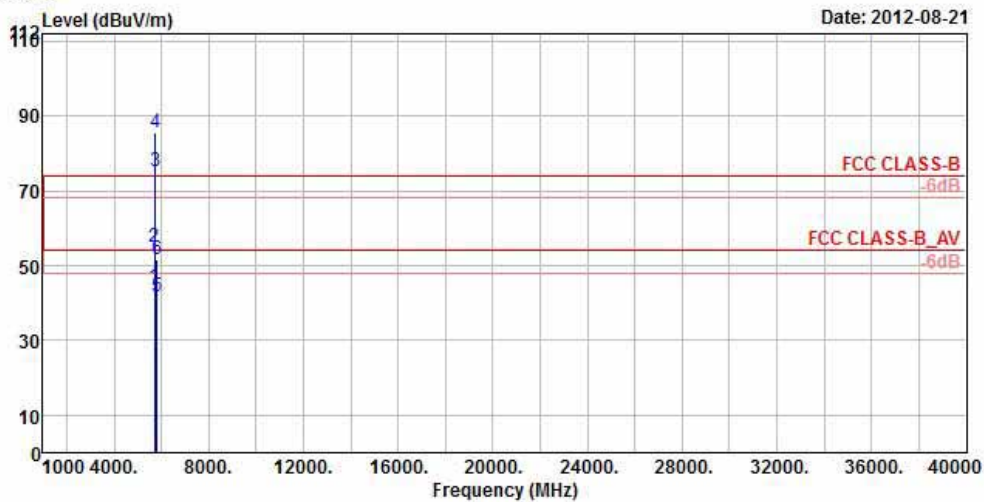

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
Brand/Model: PM23200  
Remark : 11A\_HT40 TX CH151  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : MCS0  
Power : 4


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	44.26	41.62	55.18	-10.92	32.36	7.71	37.43	107	322	Average
2	5725.00	54.85	52.21	65.68	-10.83	32.36	7.71	37.43	107	322	Peak
3 pp	5755.00	75.18	72.50			32.41	7.74	37.47	107	322	Average
4 pk	5755.00	85.68	83.00			32.41	7.74	37.47	107	322	Peak
5	5825.00	41.63	38.83	55.18	-13.55	32.51	7.82	37.53	107	322	Average
6	5825.00	51.64	48.84	65.68	-14.04	32.51	7.82	37.53	107	322	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

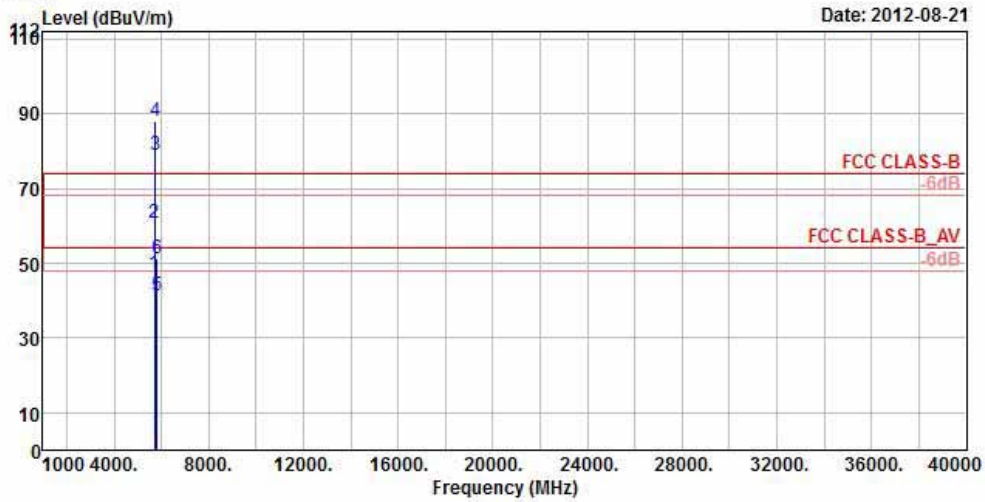

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11A\_HT40 TX CH151  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : MCS0  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	cm	deg	
1	5725.00	47.04	44.40	58.76	-11.73	32.36	7.71	37.43	100	162 Average
2	5725.00	60.63	57.99	67.83	-7.20	32.36	7.71	37.43	100	162 Peak
3 pp	5755.00	78.76	76.08			32.41	7.74	37.47	100	162 Average
4 pk	5755.00	87.83	85.15			32.41	7.74	37.47	100	162 Peak
5	5825.00	41.42	38.62	58.76	-17.34	32.51	7.82	37.53	100	162 Average
6	5825.00	51.42	48.62	67.83	-16.41	32.51	7.82	37.53	100	162 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

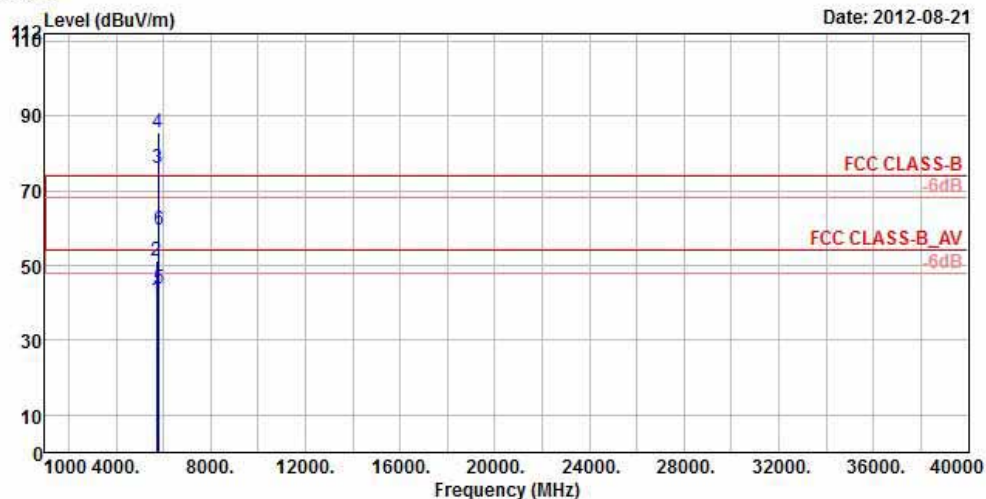

Site : 966 Chamber 5  
 Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF HORIZONTAL  
 Brand/Model: PM23200  
 Remark : 11A\_HT40 TX CH159  
 Tested by : Kay Wu  
 Temperature : 25°C  
 Humidity : 65%  
 Plane : X  
 Rate : MCS0  
 Power : 4


	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	40.95	38.31	56.08	-15.13	32.36	7.71	37.43	105	321	Average
2	5725.00	51.23	48.59	65.56	-14.33	32.36	7.71	37.43	105	321	Peak
3 pp	5795.00	76.08	73.36			32.46	7.80	37.54	105	321	Average
4 pk	5795.00	85.56	82.84			32.46	7.80	37.54	105	321	Peak
5	5825.00	43.96	41.16	56.08	-12.12	32.51	7.82	37.53	105	321	Average
6	5825.00	59.49	56.69	65.56	-6.07	32.51	7.82	37.53	105	321	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

Date: 2012-08-21

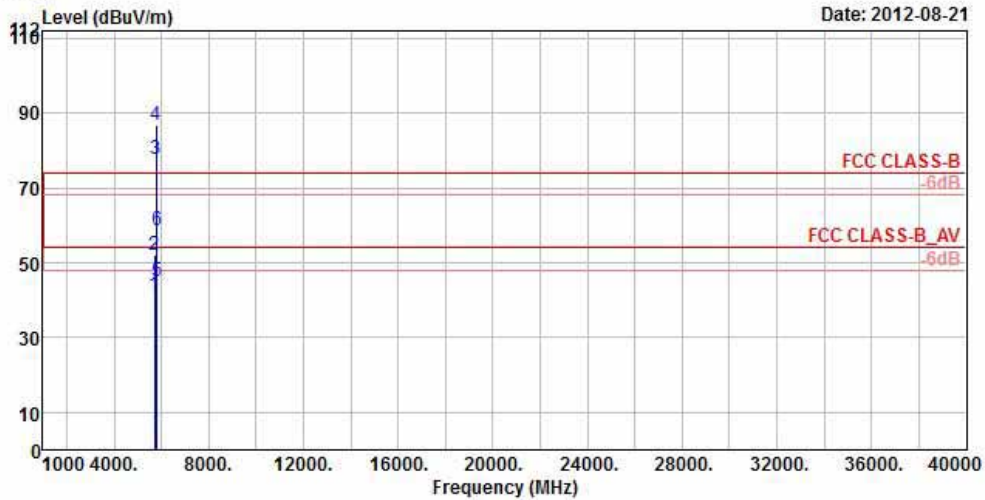

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_18G~40G\_HF VERTICAL  
Brand/Model: PM23200  
Remark : 11A\_HT40 TX CH159  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X  
Rate : MCS0  
Power : 4

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	5725.00	41.20	38.56	57.88	-16.68	32.36	7.71	37.43	100	10	Average
2	5725.00	52.05	49.41	66.88	-14.83	32.36	7.71	37.43	100	10	Peak
3 pp	5795.00	77.88	75.16			32.46	7.80	37.54	100	10	Average
4 pk	5795.00	86.88	84.16			32.46	7.80	37.54	100	10	Peak
5	5825.00	45.05	42.25	57.88	-12.83	32.51	7.82	37.53	100	10	Average
6	5825.00	58.61	55.81	66.88	-8.27	32.51	7.82	37.53	100	10	Peak


# BELOW 1GHz WORST-CASE DATA : 802.11a



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

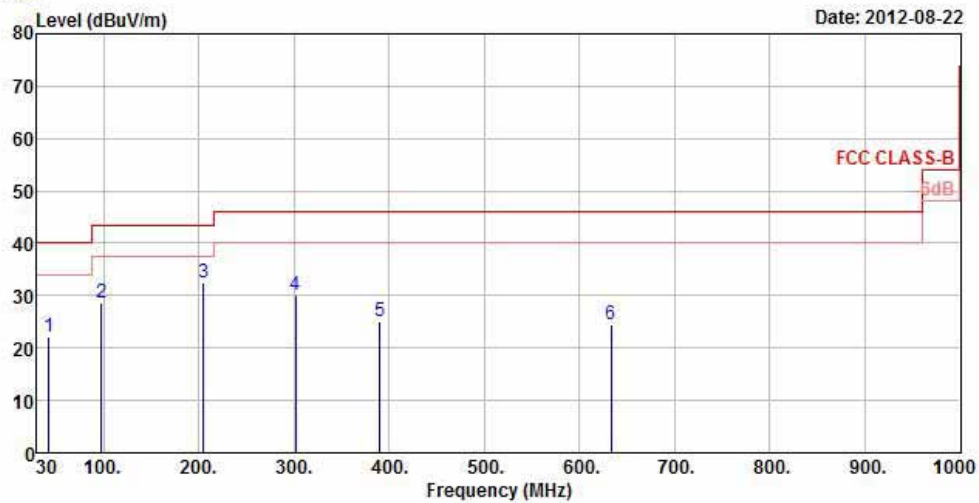

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_30M~1G\_LF HORIZONTAL  
Brand/Model: PM23200  
Remark : 5G TX  
Tested by : Kay Wu  
Temprature : 25°C  
Humidity : 65%  
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg
1	42.42	22.07	38.87	40.00	-17.93	13.58	0.70	31.08	100	15 Peak
2	98.04	28.74	50.73	43.50	-14.76	8.91	1.06	31.96	100	236 Peak
3 pp	205.23	32.55	53.00	43.50	-10.95	9.60	1.62	31.67	120	253 Peak
4	301.40	30.18	46.99	46.00	-15.82	12.99	2.06	31.86	100	165 Peak
5	390.30	25.04	39.60	46.00	-20.96	15.10	2.38	32.04	100	145 Peak
6	633.20	24.55	33.47	46.00	-21.45	20.01	3.19	32.12	100	112 Peak






Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 6

Date: 2012-08-22

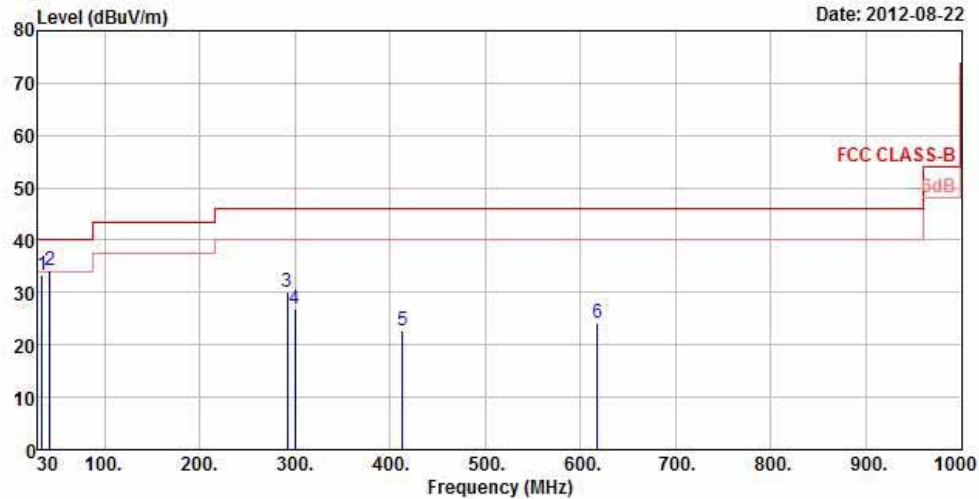

Site : 966 Chamber 5  
Condition : FCC CLASS-B 3m ANT\_30M~1G\_LF VERTICAL  
Brand/Model: PM23200  
Remark : 5G TX  
Tested by : Kay Wu  
Temperature : 25°C  
Humidity : 65%  
Plane : X

	Freq	Level	Read Level	Limit Line	OverLimit	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	34.32	33.26	51.12	40.00	-6.74	12.63	0.59	31.08	110	23	Peak
2 pp	42.15	34.36	51.16	40.00	-5.64	13.58	0.70	31.08	100	125	Peak
3	291.63	30.02	47.00	46.00	-15.98	12.71	2.01	31.70	120	230	Peak
4	300.00	26.73	43.58	46.00	-19.27	12.94	2.05	31.84	100	214	Peak
5	412.70	22.62	36.55	46.00	-23.38	15.60	2.48	32.01	100	136	Peak
6	617.80	24.34	33.53	46.00	-21.66	19.82	3.14	32.15	100	109	Peak

## 5.2 CONDUCTED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

### 5.2.3 TEST PROCEDURES

Same as item 4.2.3.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.2.5 TEST SETUP

Same as item 4.2.5.

### 5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6



## 5.2.7 TEST RESULTS


### CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24766	0.15	55.77	37.89	55.92	38.04	61.84	51.84	-5.91	-13.79
2	0.40000	0.17	44.64	28.40	44.81	28.57	57.85	47.85	-13.04	-19.28
3	0.61875	0.18	42.90	27.21	43.08	27.39	56.00	46.00	-12.92	-18.61
4	1.96875	0.26	38.47	21.56	38.73	21.82	56.00	46.00	-17.27	-24.18
5	3.42969	0.32	34.81	21.45	35.13	21.77	56.00	46.00	-20.87	-24.23
6	13.56250	0.50	51.80	46.39	52.30	46.89	60.00	50.00	-7.70	-3.11

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

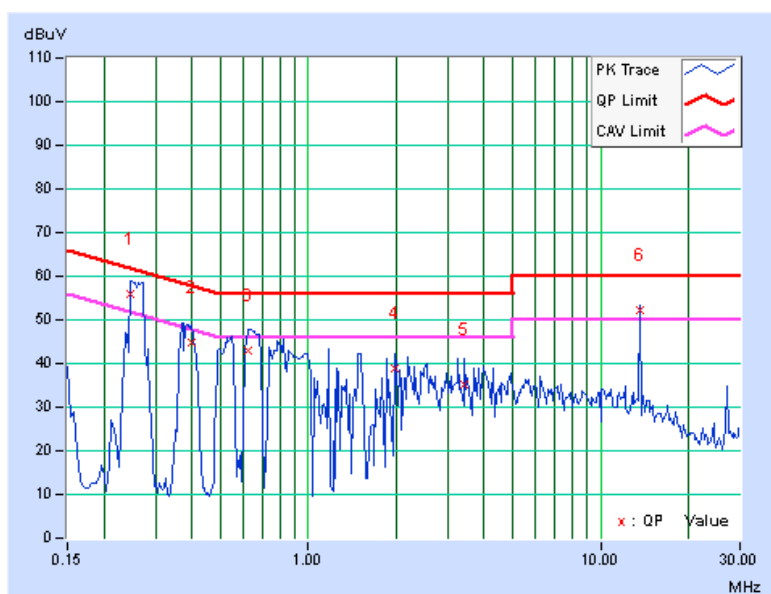


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.25938	0.15	55.57	38.09	55.72	38.24	61.45	51.45	-5.74	-13.22
2	0.36484	0.16	44.71	23.81	44.87	23.97	58.62	48.62	-13.75	-24.65
3	0.63828	0.17	43.16	26.96	43.33	27.13	56.00	46.00	-12.67	-18.87
4	1.74609	0.24	40.10	23.52	40.34	23.76	56.00	46.00	-15.66	-22.24
5	3.78125	0.34	35.54	20.64	35.88	20.98	56.00	46.00	-20.12	-25.02
6	13.55859	0.57	51.96	46.57	52.53	47.14	60.00	50.00	-7.47	-2.86

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

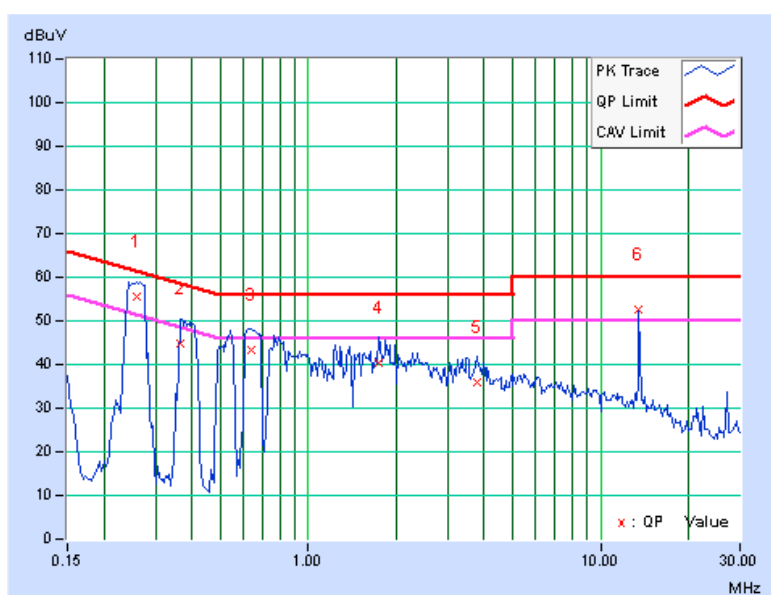

### **5.3 6dB BANDWIDTH MEASUREMENT**

#### **5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT**

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### **5.3.2 TEST SETUP**

Same as item 4.3.2.

#### **5.3.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

#### **5.3.4 TEST PROCEDURE**

Same as item 4.3.4.

#### **5.3.5 DEVIATION FROM TEST STANDARD**

No deviation.

#### **5.3.6 EUT OPERATING CONDITIONS**

Same as item 4.3.6.

### 5.3.7 TEST RESULTS

#### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.62	0.5	PASS
157	5785	16.64	0.5	PASS
161	5805	16.68	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	17.80	0.5	PASS
157	5785	17.82	0.5	PASS
161	5805	17.90	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
151	5755	36.16	0.5	PASS
159	5795	36.16	0.5	PASS

## **5.4 MAXIMUM OUTPUT POWER**

### **5.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT**

For systems using digital modulation in the 5725–5850 MHz bands: 1 Watt (30dBm)

### **5.4.2 TEST SETUP**

Same as Item 4.4.2.

### **5.4.3 INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.4.4 TEST PROCEDURES**

Same as Item 4.4.4.

### **5.4.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.4.6 EUT OPERATING CONDITIONS**

Same as Item 4.3.6.

## 5.4.7 TEST RESULTS

### 802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	102.329	20.10	30	PASS
157	5785	102.094	20.09	30	PASS
161	5805	97.051	19.87	30	PASS

### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	101.625	20.07	30	PASS
157	5785	98.401	19.93	30	PASS
161	5805	99.083	19.96	30	PASS

### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
151	5755	103.753	20.16	30	PASS
159	5795	103.753	20.16	30	PASS

## **5.5 POWER SPECTRAL DENSITY MEASUREMENT**

### **5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT**

The Maximum of Power Spectral Density Measurement is 8dBm.

### **5.5.2 TEST SETUP**

Same as item 4.5.2.

### **5.5.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.5.4 TEST PROCEDURE.**

Same as item 4.5.4.

### **5.5.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.5.6 EUT OPERATING CONDITION**

Same as item 4.3.6.



## 5.5.7 TEST RESULTS

### 802.11a

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	1.77	-13.46	8	PASS
157	5785	1.64	-13.59	8	PASS
161	5805	1.50	-13.73	8	PASS

### 802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	1.65	-13.58	8	PASS
157	5785	1.59	-13.64	8	PASS
161	5805	1.39	-13.84	8	PASS

### 802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
151	5755	-1.84	-17.07	8	PASS
159	5795	-2.07	-17.30	8	PASS

## **5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT**

### **5.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT**

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### **5.6.2 TEST SETUP**

Same as Item 4.6.2

### **5.6.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.6.4 TEST PROCEDURE**

Same as Item 4.6.4

### **5.6.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.6.6 EUT OPERATING CONDITION**


Same as Item 4.3.6

### **5.6.7 TEST RESULTS**


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11a


### CH 149

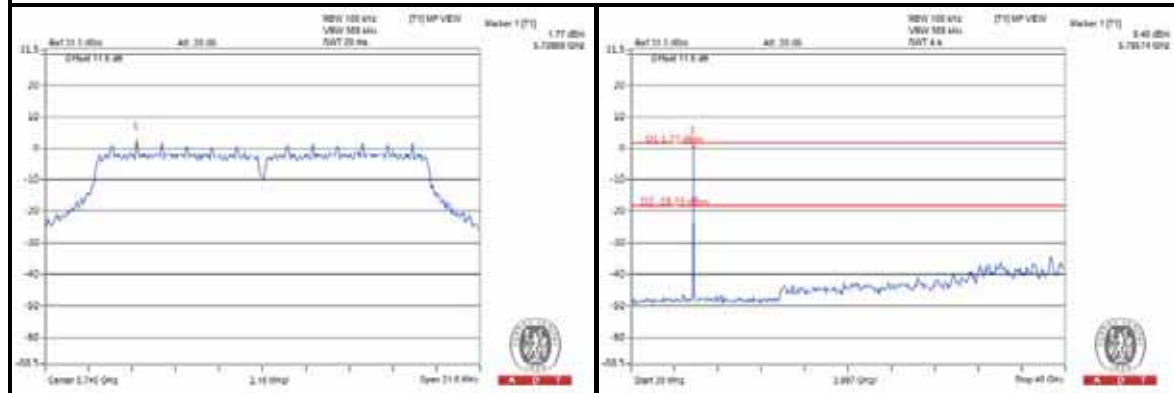

### CH 157

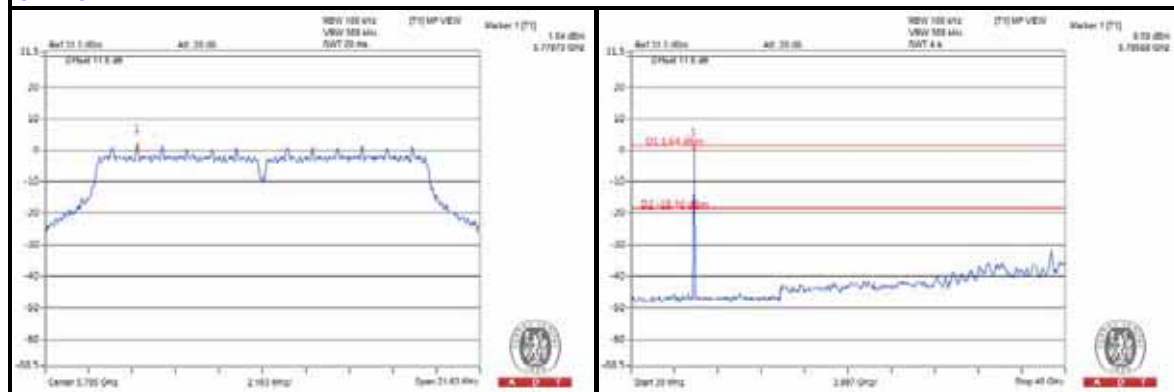


### CH 161

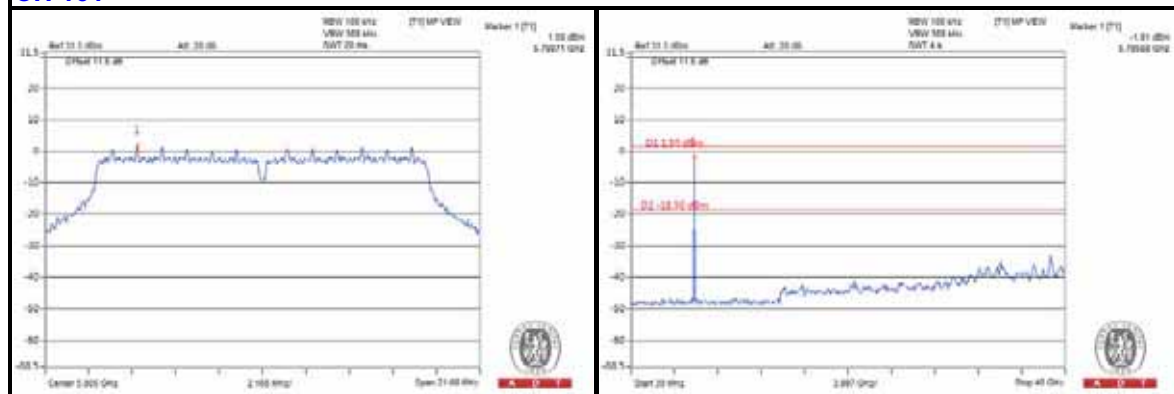


802.11n(20MHz)


### CH 149

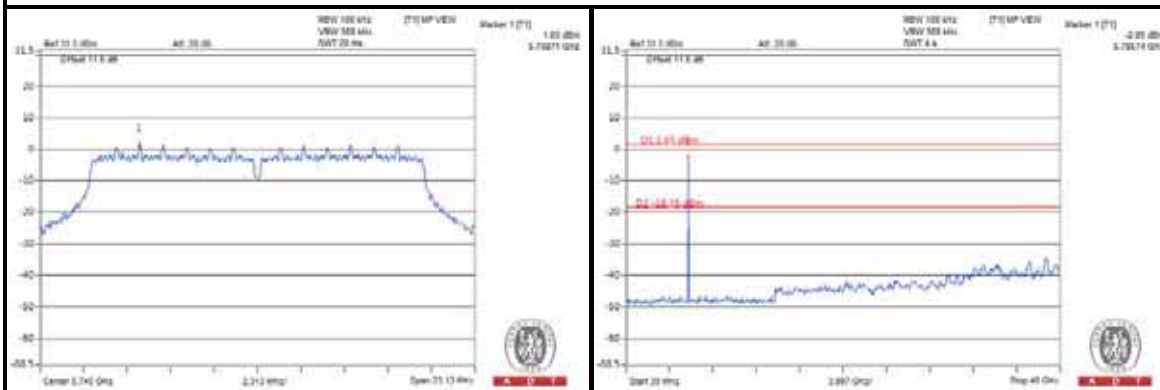

### CH 157

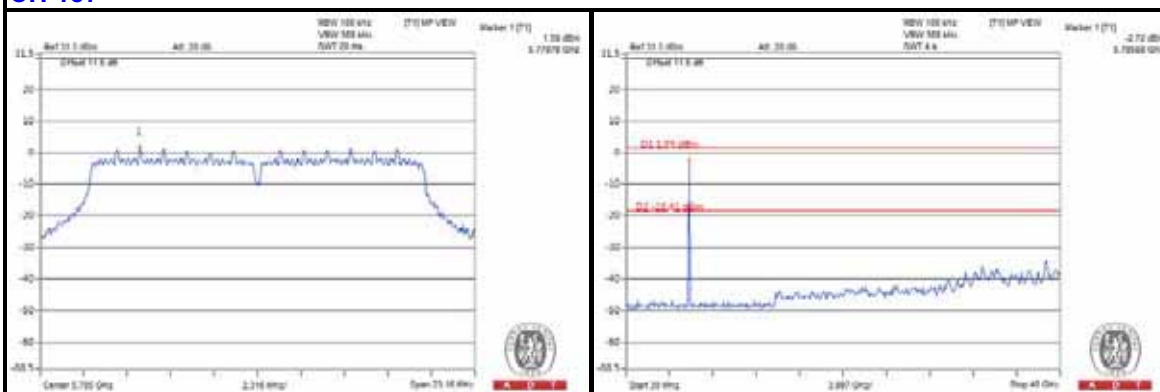


### CH 161

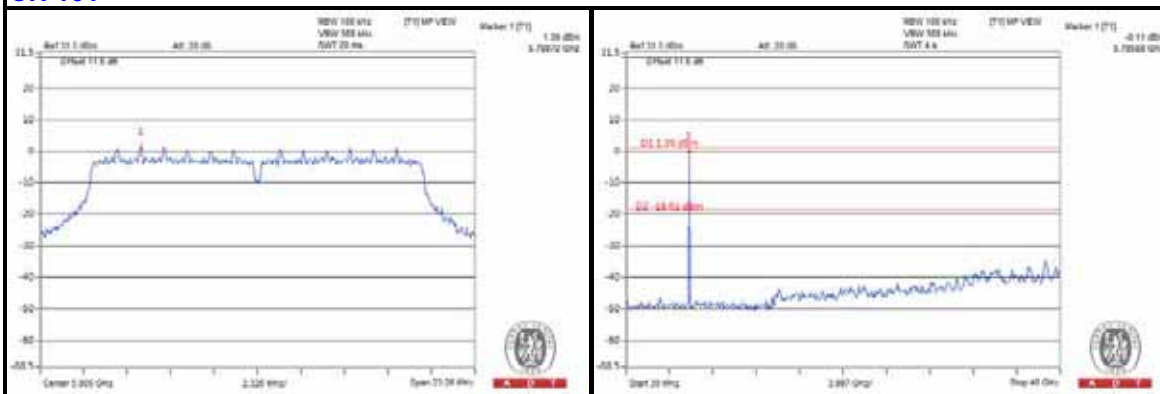


802.11n(40MHz)

### CH 151

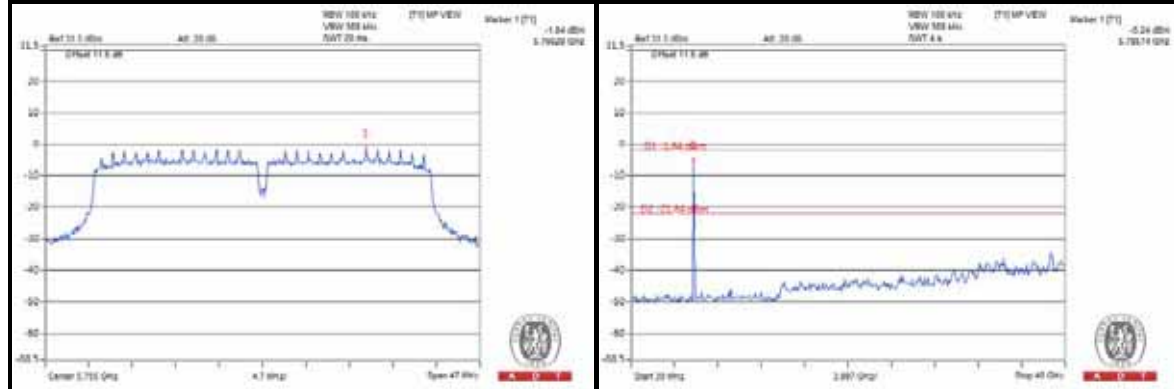

### CH 159

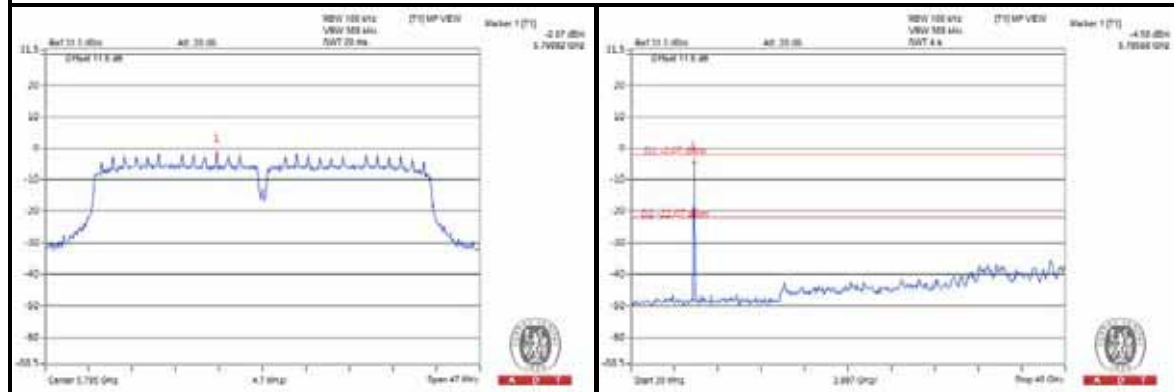



## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## 8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---