



A D T

FCC TEST REPORT

(PART 27)

REPORT NO.: RF120626C35-2

MODEL NO.: PM63100

FCC ID: NM8PM63100

RECEIVED: Jun. 26, 2012

TESTED: Jul. 11 ~ Jul. 16, 2012

ISSUED: Jul. 25, 2012

APPLICANT: HTC Corporation

ADDRESS: 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
2.2 TEST SITE AND INSTRUMENTS	8
3 GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 CONFIGURATION OF SYSTEM UNDER TEST	11
3.3 DESCRIPTION OF TEST MODES	13
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
4 TEST TYPES AND RESULTS	16
4.1 OUTPUT POWER MEASUREMENT	16
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	16
4.1.2 TEST PROCEDURES	16
4.1.3 TEST SETUP	17
4.1.4 TEST RESULTS	18
4.2 FREQUENCY STABILITY MEASUREMENT	24
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	24
4.2.2 TEST PROCEDURE	24
4.2.3 TEST SETUP	24
4.2.4 TEST RESULTS	25
4.3 OCCUPIED BANDWIDTH MEASUREMENT	26
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	26
4.3.2 TEST SETUP	26
4.3.3 TEST PROCEDURES	26
4.3.4 TEST RESULTS	27
4.4 PEAK TO AVERAGE RATIO	29
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	29
4.4.2 TEST SETUP	29
4.4.3 TEST PROCEDURES	29
4.4.4 TEST RESULTS	30
4.5 BAND EDGE MEASUREMENT	32
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	32
4.5.2 TEST SETUP	32
4.5.3 TEST PROCEDURES	33
4.5.4 TEST RESULTS	34
4.6 CONDUCTED SPURIOUS EMISSIONS	38
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	38
4.6.2 TEST PROCEDURE	38
4.6.3 TEST SETUP	38



A D T

4.6.4	TEST RESULTS.....	39
4.7	RADIATED EMISSION MEASUREMENT	42
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	42
4.7.2	TEST PROCEDURES.....	42
4.7.3	DEVIATION FROM TEST STANDARD	42
4.7.4	TEST SETUP	43
4.7.5	TEST RESULTS.....	44
5	INFORMATION ON THE TESTING LABORATORIES	76
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	77



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120626C35-2	Original release	Jul. 25, 2012



A D T

1 CERTIFICATION

PRODUCT: Smart Phone

MODEL NO.: PM63100

BRAND: HTC

APPLICANT: HTC Corporation

TESTED: Jul. 11 ~ Jul. 16, 2012

TEST SAMPLE: Production Unit

TEST STANDARDS: FCC Part 27, Subpart C, L

FCC Part 2

ANSI C63.4-2003

The above equipment (model: PM63100) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE:** Jul. 25, 2012
Ivonne Wu / Senior Specialist

APPROVED BY : Gary Chang , **DATE:** Jul. 25, 2012
Gary Chang / Technical Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

OPERATING BAND: 704–716 MHz			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(C)(10)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -7.47dB at 1428.00MHz.

OPERATING BAND: 1710~1755 MHz			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(d)(4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -30.23dB at 42.42MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 23, 2012	Mar. 22, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY50266653	Sep. 28, 2011	Sep. 27, 2012
Radio Communication Analyzer	MT8820C	6201010284	Aug. 01, 2011	Jul. 31, 2012

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC 7450F-4.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smart Phone	
MODEL NO.	PM63100	
POWER SUPPLY	5Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TECHNOLOGY	LTE Band 17	QPSK, 16QAM
	LTE Band 4	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709MHz ~ 711MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715.0MHz ~1750.0MHz
EMISSION DESIGNATOR	LTE Band 17 Channel Bandwidth: 5MHz	QPSK: 4M50G7D
		16QAM: 4M51W7D
	LTE Band 17 Channel Bandwidth: 10MHz	QPSK: 8M92G7D
		16QAM: 8M90W7D
	LTE Band 4 Channel Bandwidth: 5MHz	QPSK: 4M51G7D
		16QAM: 4M50W7D
MAX. ERP POWER (W)	LTE Band 17 Channel Bandwidth: 5MHz	41.98mW
	LTE Band 17 Channel Bandwidth: 10MHz	48.42mW
MAX. EIRP POWER (W)	LTE Band 4 Channel Bandwidth: 5MHz	186.64mW
	LTE Band 4 Channel Bandwidth: 10MHz	190.99mW
CATEGORY	LTE: 3	


ANTENNA TYPE	LTE Band 17: Fixed Internal antenna with -4.5dBi gain LTE Band 4: Fixed Internal antenna with -1dBi gain
DATA CABLE	Refer to Note as below
I/O PORTS	Refer to users' manual
ACCESSORY DEVICES	Refer to Note as below

NOTE:


1. The EUT's accessories list refers to Ext Pho.pdf.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

<For Radiated Emission Test>

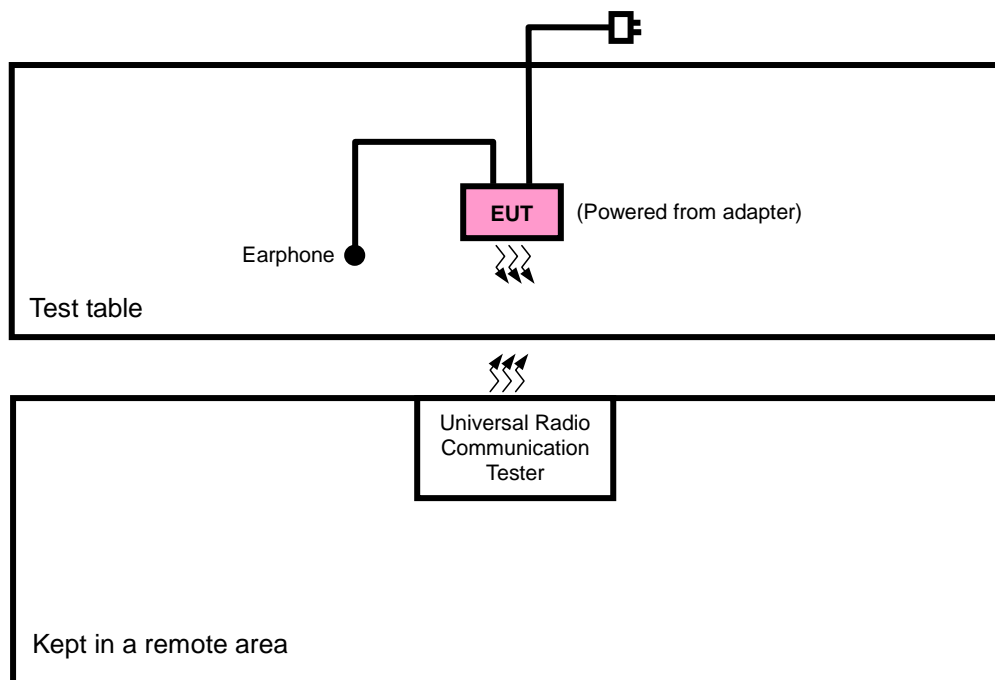

<For Output Power Test>

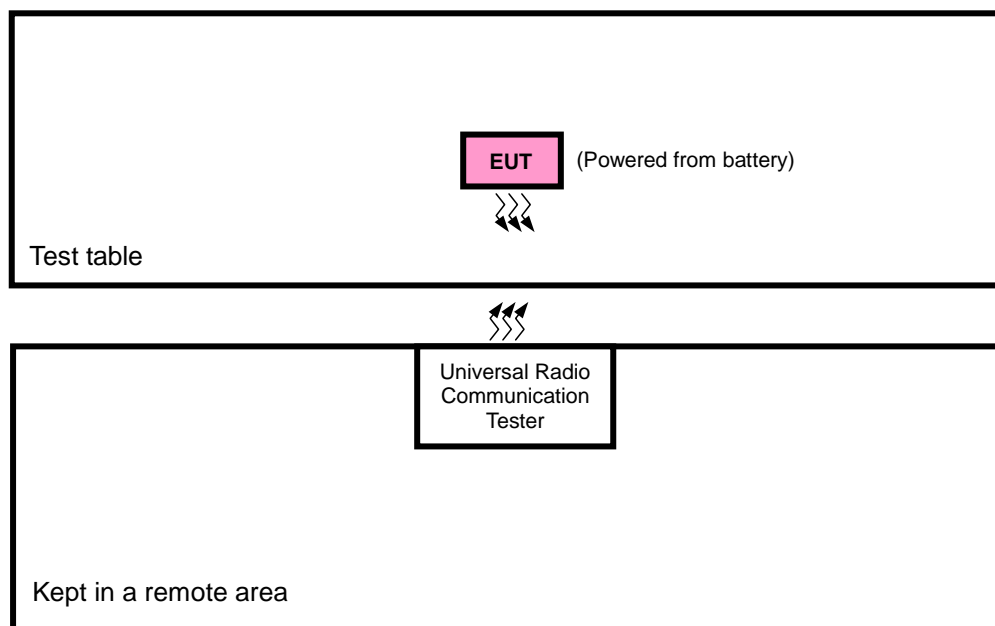

**A D T**

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Earphone	Merry	HS250	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.1m audio cable

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for ERP and Y-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 17

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK	1 RB / 49 RB Offset
FREQUENCY STABILITY	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23790	10MHz	QPSK	1 RB / 49 RB Offset
OCCUPIED BANDWIDTH	23755 to 23825	23790	5MHz	QPSK, 16QAM	50 RB / 0 RB Offset
	23780 to 23800	23790	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
PEAK TO AVERAGE RATIO	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset
BAND EDGE	23755 to 23825	23755, 23825	5MHz	QPSK	1 RB / 0 RB Offset
					1 RB / 24 RB Offset
					25 RB / 0 RB Offset
	23780 to 23800	23780, 23800	10MHz	QPSK	1 RB / 0 RB Offset
					1 RB / 49 RB Offset
					50 RB / 0 RB Offset
CONDUCTED EMISSION	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23790	10MHz	QPSK	1 RB / 49 RB Offset
RADIATED EMISSION	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
					25 RB / 0 RB Offset
				16QAM	1 RB / 0 RB Offset
					25 RB / 0 RB Offset
	23780 to 23800	23790	10MHz	QPSK	1 RB / 49 RB Offset
					50 RB / 0 RB Offset
				16QAM	1 RB / 49 RB Offset
					50 RB / 0 RB Offset

LTE Band 4

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 24 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
FREQUENCY STABILITY	19975 to 20375	20175	5MHz	QPSK	1 RB / 24 RB Offset
	20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	19975 to 20375	20175	5MHz	QPSK, 16QAM	25 RB / 24 RB Offset
	20000 to 20350	20175	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
PEAK TO AVERAGE RATIO	19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
BAND EDGE	19975 to 20375	19975, 20375	5MHz	QPSK	1 RB, / 0 RB Offset
					1 RB / 24 RB Offset
					25 RB / 0 RB Offset
	20000 to 20350	20000, 20350	10MHz	QPSK	1 RB / 0 RB Offset
					1 RB / 49 RB Offset
					50 RB / 0 RB Offset
CONDCUDED EMISSION	19975 to 20375	20175	5MHz	QPSK	1 RB / 24 RB Offset
	20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	19975 to 20375	20175	5MHz	QPSK	1 RB / 24 RB Offset
					25 RB / 0 RB Offset
				16QAM	1 RB / 24 RB Offset
					25 RB / 0 RB Offset
	20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
					50 RB / 0 RB Offset
				16QAM	1 RB / 0 RB Offset
					50 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP/EIRP	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
FREQUENCY STABILITY	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
OCCUPIED BANDWIDTH	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
BAND EDGE	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
CONDCUDED EMISSION	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 704-716 MHz band are limited to 3 watts ERP

4.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RBW and VBW is 10MHz for LTE.
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e. $E.R.P = E.I.R.P - 2.15 \text{ dB}$

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

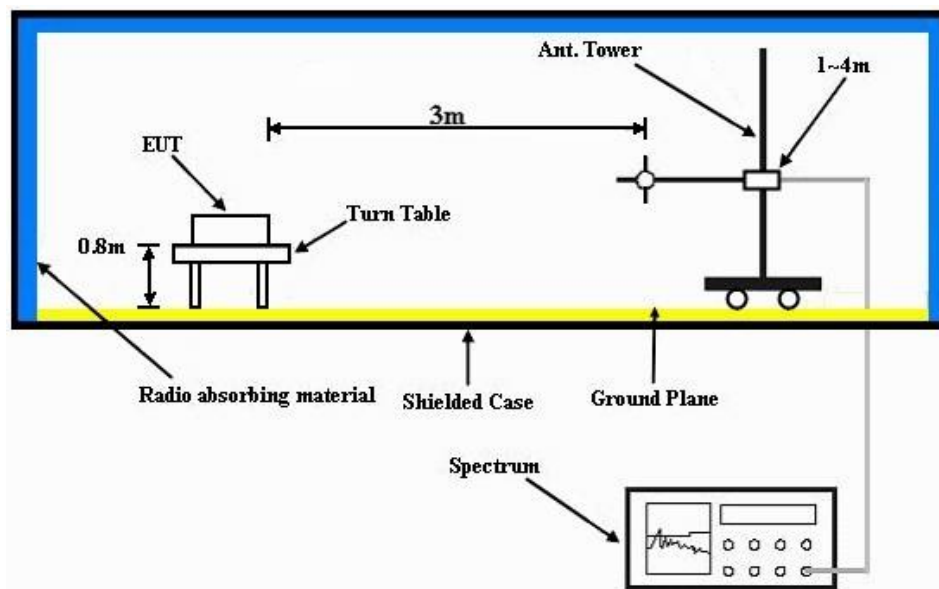

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 17								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
5 MHz	QPSK	23755	706.5	1	0	0	23	22.86
		23790	710	1	0	0	23	22.71
		23825	713.5	1	0	0	23	22.72
		23755	706.5	1	24	0	23	22.8
		23790	710	1	24	0	23	22.72
		23825	713.5	1	24	0	23	22.74
		23755	706.5	12	6	1	23	21.55
		23790	710	12	6	1	23	21.43
		23825	713.5	12	6	1	23	21.53
		23755	706.5	25	0	1	23	21.57
		23790	710	25	0	1	23	21.56
		23825	713.5	25	0	1	23	21.54
	16QAM	23755	706.5	1	0	1	23	22.04
		23790	710	1	0	1	23	22.01
		23825	713.5	1	0	1	23	21.93
		23755	706.5	1	24	1	23	22.02
		23790	710	1	24	1	23	21.99
		23825	713.5	1	24	1	23	21.97
		23755	706.5	12	6	2	23	20.56
		23790	710	12	6	2	23	20.41
		23825	713.5	12	6	2	23	20.55
		23755	706.5	25	0	2	23	20.99
		23790	710	25	0	2	23	20.87
		23825	713.5	25	0	2	23	20.97

LTE Band 17								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
10MHz	QPSK	23780	709	1	0	0	23	22.75
		23790	710	1	0	0	23	22.69
		23800	711	1	0	0	23	22.74
		23780	709	1	49	0	23	22.81
		23790	710	1	49	0	23	22.76
		23800	711	1	49	0	23	22.64
		23780	709	25	12	1	23	21.63
		23790	710	25	12	1	23	21.57
		23800	711	25	12	1	23	21.54
		23780	709	50	0	1	23	21.63
		23790	710	50	0	1	23	21.56
		23800	711	50	0	1	23	21.54
	16QAM	23780	709	1	0	1	23	22.1
		23790	710	1	0	1	23	21.99
		23800	711	1	0	1	23	22
		23780	709	1	49	1	23	22.13
		23790	710	1	49	1	23	22.09
		23800	711	1	49	1	23	22.02
		23780	709	25	12	2	23	20.79
		23790	710	25	12	2	23	20.71
		23800	711	25	12	2	23	20.78
		23780	709	50	0	2	23	20.6
		23790	710	50	0	2	23	20.57
		23800	711	50	0	2	23	20.58

LTE Band 4								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
5 MHz	QPSK	19975	1712.5	1	0	0	23.7	23.5
		20175	1732.5	1	0	0	23.7	23.07
		20375	1752.5	1	0	0	23.7	23.56
		19975	1712.5	1	24	0	23.7	23.39
		20175	1732.5	1	24	0	23.7	23.12
		20375	1752.5	1	24	0	23.7	23.6
		19975	1712.5	12	6	1	23.7	22.41
		20175	1732.5	12	6	1	23.7	22.14
		20375	1752.5	12	6	1	23.7	22.62
		19975	1712.5	25	0	1	23.7	22.47
		20175	1732.5	25	0	1	23.7	21.99
		20375	1752.5	25	0	1	23.7	22.44
	16QAM	19975	1712.5	1	0	1	23.7	22.41
		20175	1732.5	1	0	1	23.7	22.03
		20375	1752.5	1	0	1	23.7	22.53
		19975	1712.5	1	24	1	23.7	22.38
		20175	1732.5	1	24	1	23.7	22.05
		20375	1752.5	1	24	1	23.7	22.57
		19975	1712.5	12	6	2	23.7	21.5
		20175	1732.5	12	6	2	23.7	21.15
		20375	1752.5	12	6	2	23.7	21.67
		19975	1712.5	25	0	2	23.7	21.36
		20175	1732.5	25	0	2	23.7	20.99
		20375	1752.5	25	0	2	23.7	21.47

LTE Band 4								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
10MHz	QPSK	20000	1715	1	0	0	23.7	23.49
		20175	1732.5	1	0	0	23.7	23.2
		20350	1750	1	0	0	23.7	23.61
		20000	1715	1	49	0	23.7	23.33
		20175	1732.5	1	49	0	23.7	23.1
		20350	1750	1	49	0	23.7	23.59
		20000	1715	25	12	1	23.7	22.34
		20175	1732.5	25	12	1	23.7	22.03
		20350	1750	25	12	1	23.7	22.54
		20000	1715	50	0	1	23.7	22.15
		20175	1732.5	50	0	1	23.7	21.87
		20350	1750	50	0	1	23.7	22.27
	16QAM	20000	1715	1	0	1	23.7	22.44
		20175	1732.5	1	0	1	23.7	22.2
		20350	1750	1	0	1	23.7	22.56
		20000	1715	1	49	1	23.7	22.31
		20175	1732.5	1	49	1	23.7	22.09
		20350	1750	1	49	1	23.7	22.48
		20000	1715	25	12	2	23.7	21.3
		20175	1732.5	25	12	2	23.7	20.99
		20350	1750	25	12	2	23.7	21.53
		20000	1715	50	0	2	23.7	21.13
		20175	1732.5	50	0	2	23.7	20.86
		20350	1750	50	0	2	23.7	21.32

AVERAGE ERP (dBm)

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz QPSK (1 RB / 0 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23755	706.5	-12.00	30.36	16.21	41.78	H
	23790	710.0	-11.79	30.17	16.23	41.98	
	23825	713.5	-12.54	30.17	15.48	35.32	
	23755	706.5	-22.00	32.03	7.88	6.14	V
	23790	710.0	-22.57	31.98	7.26	5.32	
	23825	713.5	-22.64	32.06	7.27	5.33	

CHANNEL BANDWIDTH: 10MHz QPSK (1 RB / 49 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23780	709.0	-11.46	30.17	16.56	45.29	H
	23790	710.0	-11.17	30.17	16.85	48.42	
	23800	711.0	-11.39	30.18	16.64	46.13	
	23780	709.0	-21.98	31.96	7.83	6.07	V
	23790	710.0	-21.83	31.98	8.00	6.31	
	23800	711.0	-21.08	32.03	8.80	7.59	

AVERAGE EIRP (dBm)

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz QPSK (1 RB / 24 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	19975	1712.5	-18.79	37.90	19.11	81.47	H
	20175	1732.5	-18.97	37.99	19.02	79.80	
	20375	1752.5	-18.33	38.31	19.98	99.54	
	19975	1712.5	-15.21	37.81	22.60	181.97	V
	20175	1732.5	-15.56	38.00	22.44	175.39	
	20375	1752.5	-15.51	38.22	22.71	186.64	

CHANNEL BANDWIDTH: 10MHz QPSK (1 RB / 0 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	20000	1715.0	-18.57	37.99	19.42	87.50	H
	20175	1732.5	-18.12	37.99	19.87	97.05	
	20350	1750.0	-18.62	38.36	19.74	94.19	
	20000	1715.0	-15.10	37.91	22.81	190.99	V
	20175	1732.5	-15.56	38.00	22.44	175.39	
	20350	1750.0	-15.76	38.28	22.52	178.65	

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

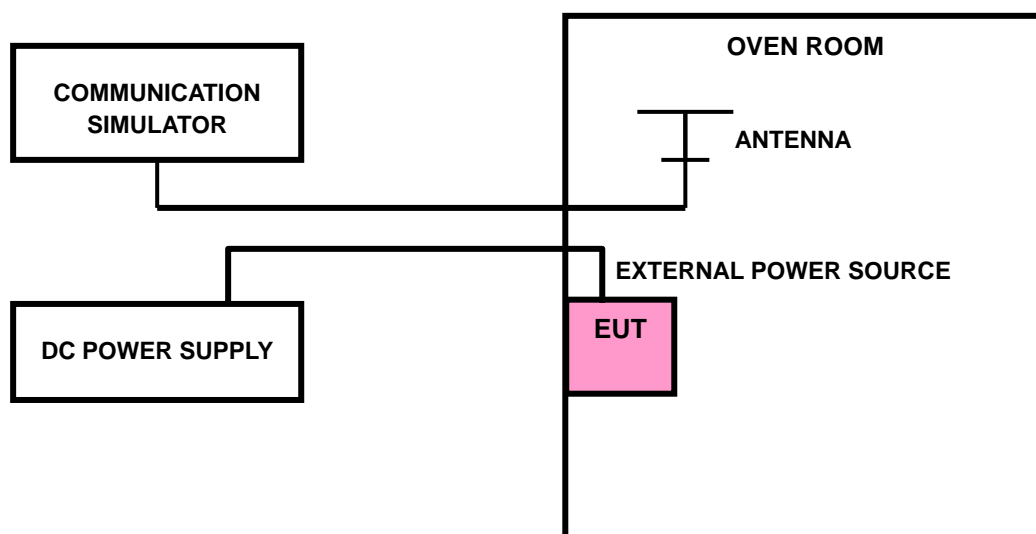

4.2.4 TEST RESULTS

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)				LIMIT (ppm)
	LTE BAND 17		LTE BAND 4		
	5MHz	10MHz	5MHz	10MHz	
3.8	0.0015	-0.0028	-0.0002	0.0009	2.5
3.6	0.0025	-0.0024	-0.0004	0.0054	2.5
4.2	-0.0058	0.0030	0.0027	-0.0002	2.5

NOTE: The applicant defined the normal working voltage of the host equipment is from 3.6Vdc to 4.2Vdc.


TEMP. (°C)	FREQUENCY ERROR (ppm)				LIMIT (ppm)
	LTE BAND 17		LTE BAND 4		
	5MHz	10MHz	5MHz	10MHz	
-10	0.0021	-0.0021	0.0009	-0.0018	2.5
0	-0.0077	0.0001	-0.0039	0.0021	2.5
10	0.0028	-0.0028	-0.0020	0.0044	2.5
20	-0.0045	0.0020	-0.0003	-0.0002	2.5
30	0.0004	0.0010	0.0012	-0.0016	2.5
40	0.0017	0.0075	0.0002	0.0003	2.5
50	-0.0025	-0.0017	-0.0003	-0.0008	2.5
55	-0.0031	-0.0006	-0.0039	0.0053	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.2 TEST SETUP

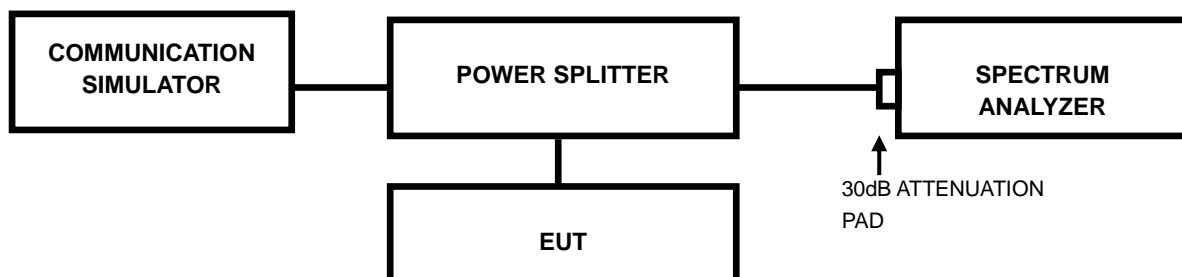


4.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.4 TEST RESULTS

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23790	710.0	4.50	4.51	23790	710.0	8.92	8.90

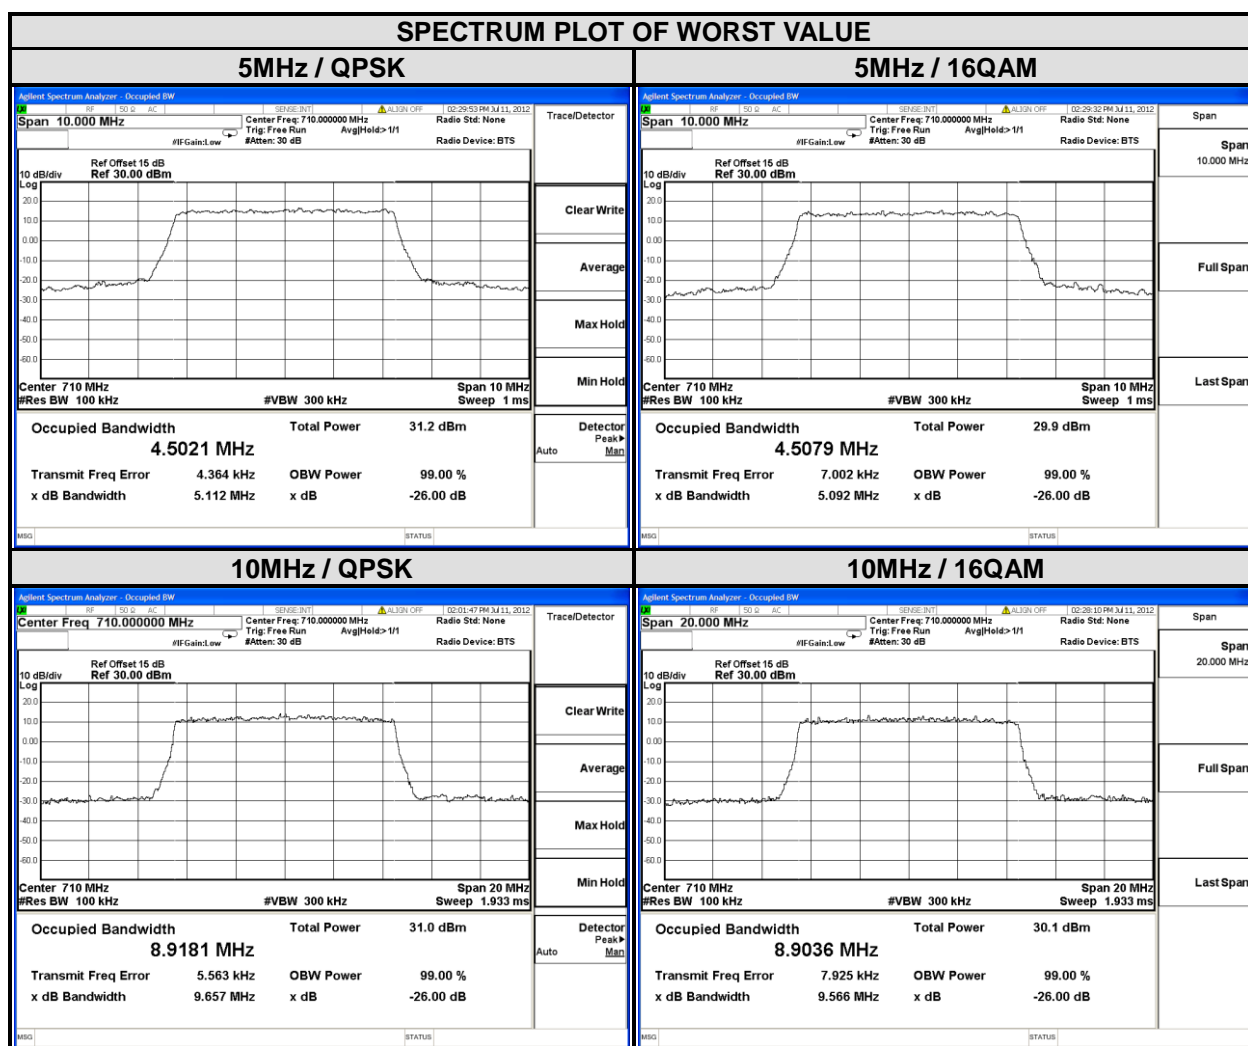




A D T

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
20175	1732.5	4.51	4.50	20175	1732.5	8.94	8.92

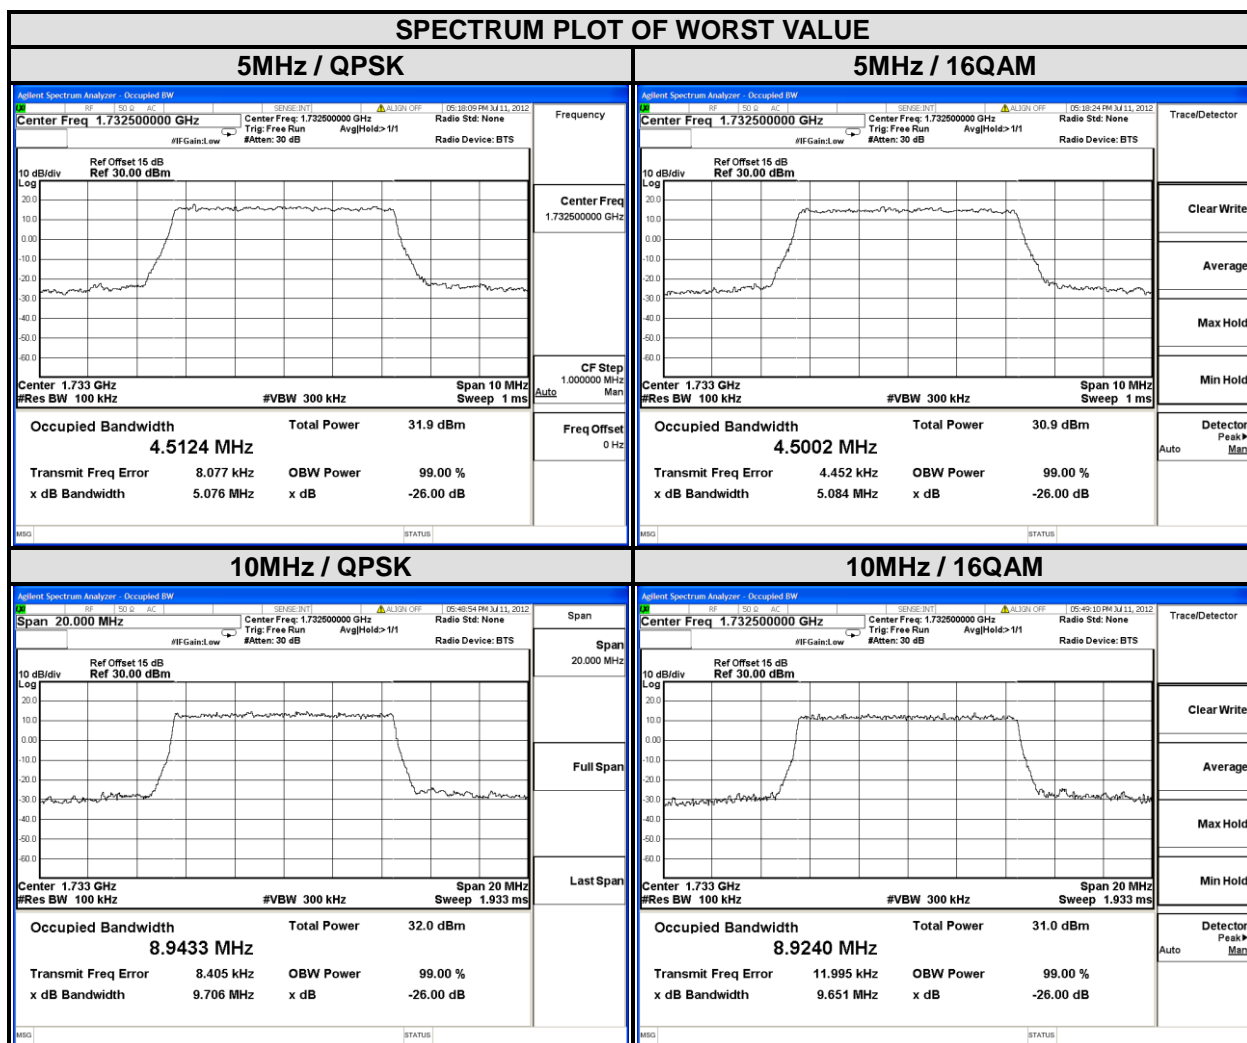


4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 TEST SETUP

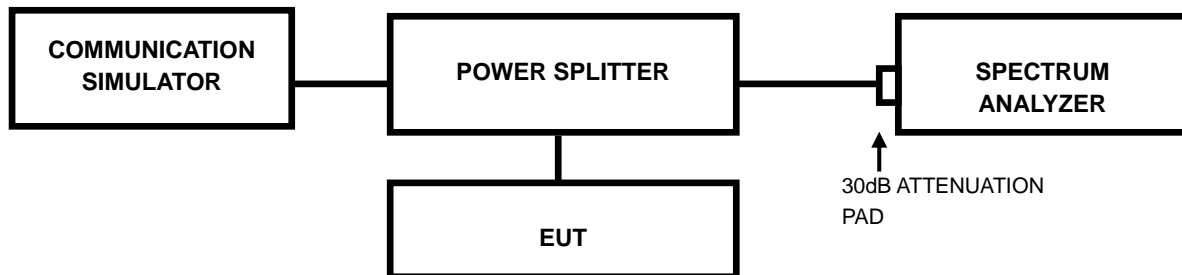


4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 TEST RESULTS

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	5.92	7.14	23780	709.0	5.40	6.08
23790	710.0	5.04	5.77	23790	710.0	5.62	6.39
23825	713.5	4.79	5.99	23800	711.0	6.39	6.68

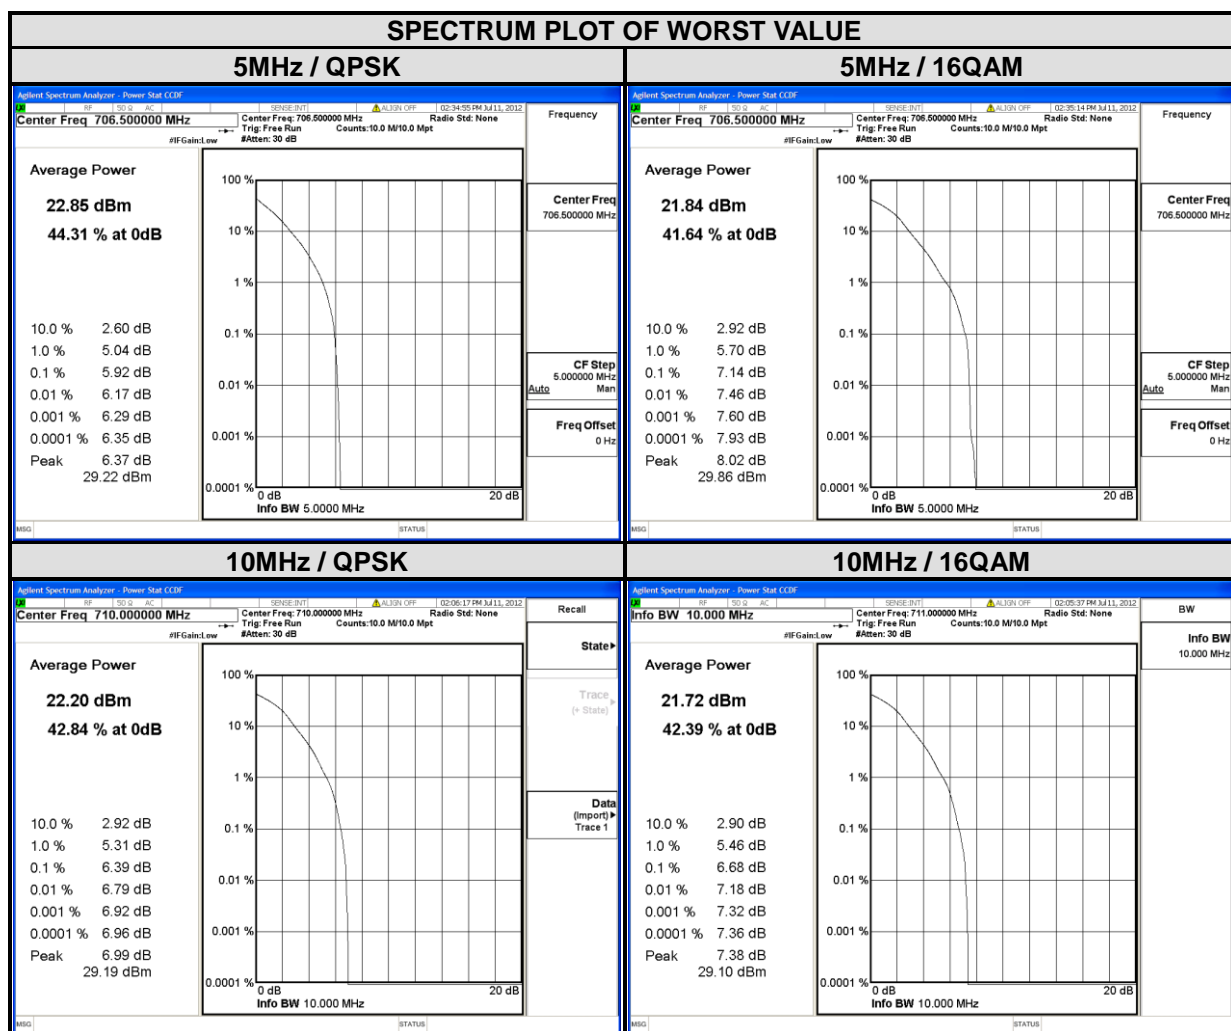




A D T

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	5.24	6.37	20000	1715.0	5.09	6.22
20175	1732.5	4.36	5.44	20175	1732.5	4.78	5.83
20375	1752.5	4.90	6.00	20350	1750.0	4.57	5.63

SPECTRUM PLOT OF WORST VALUE

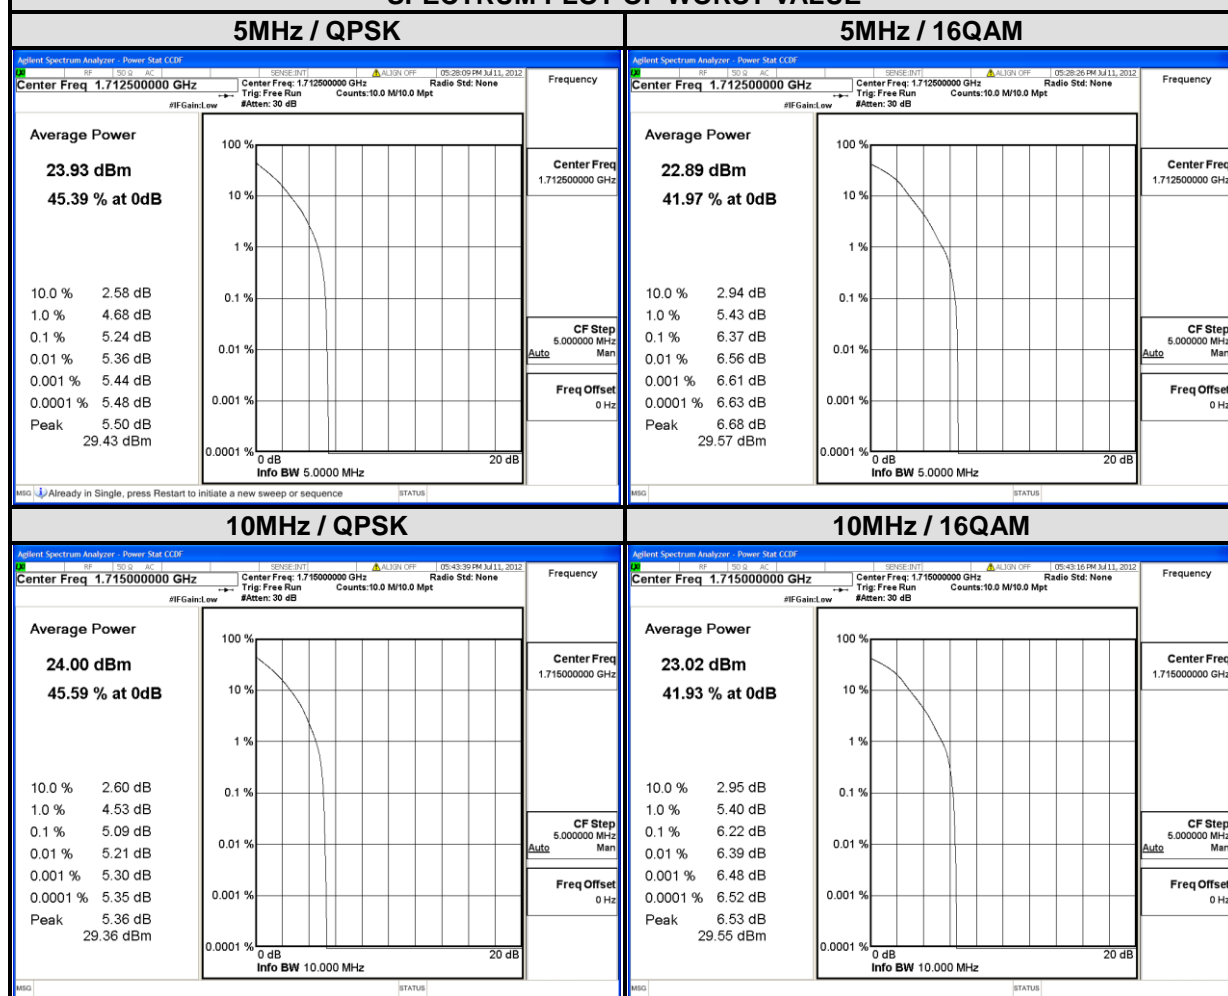


4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

For operations in the 704-716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710 – 1755 MHz MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

4.5.2 TEST SETUP

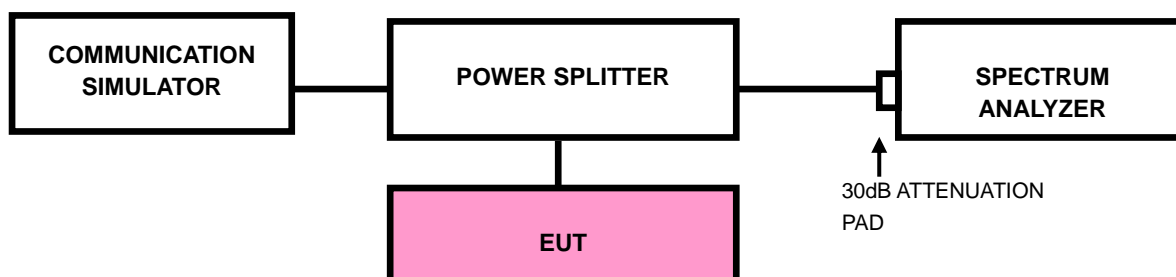


4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz.
- d. Record the max trace plot into the test report.


4.5.4 TEST RESULTS

LTE BAND 17

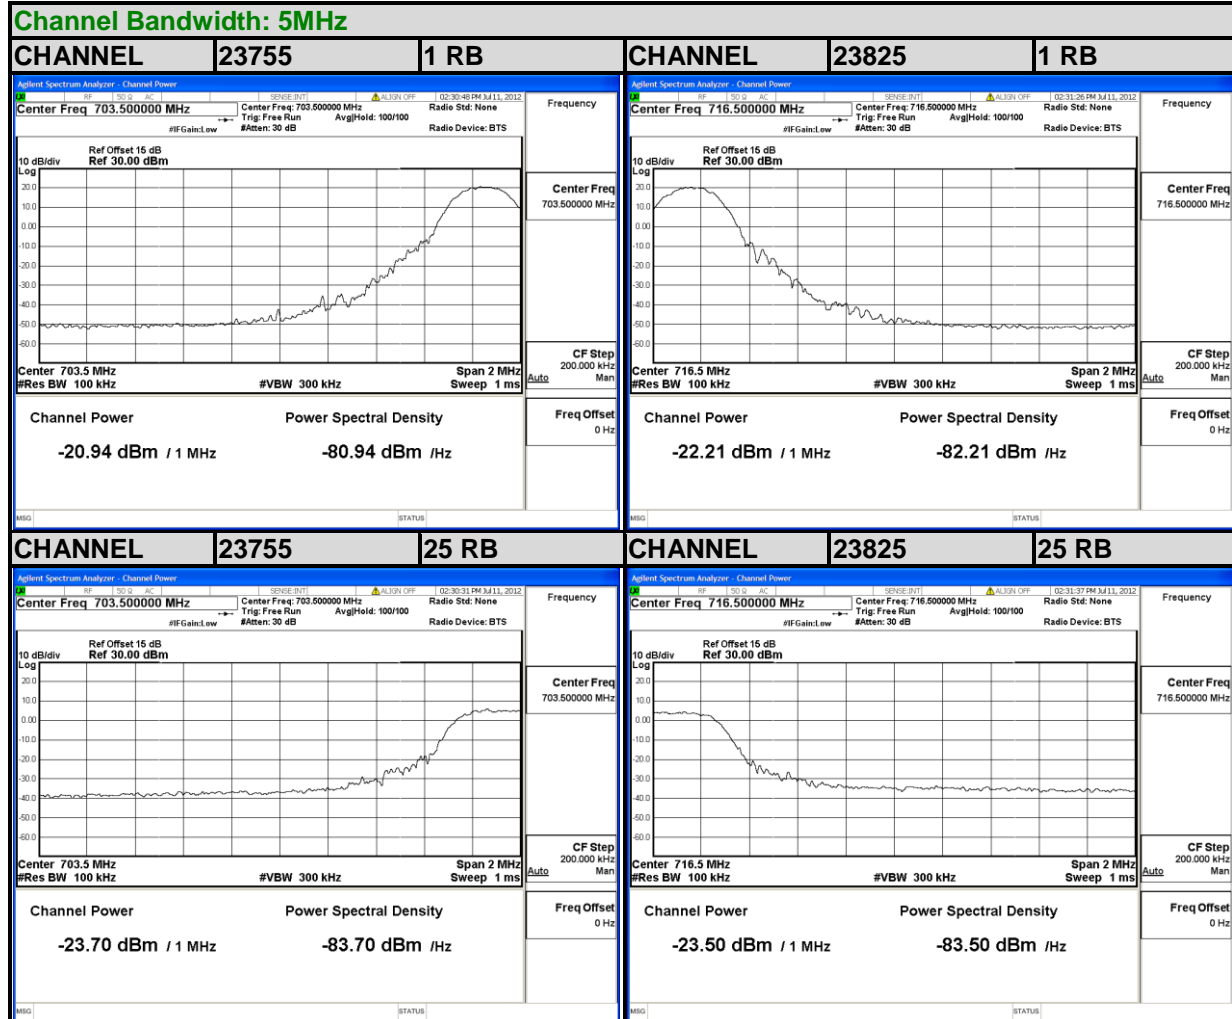








A D T

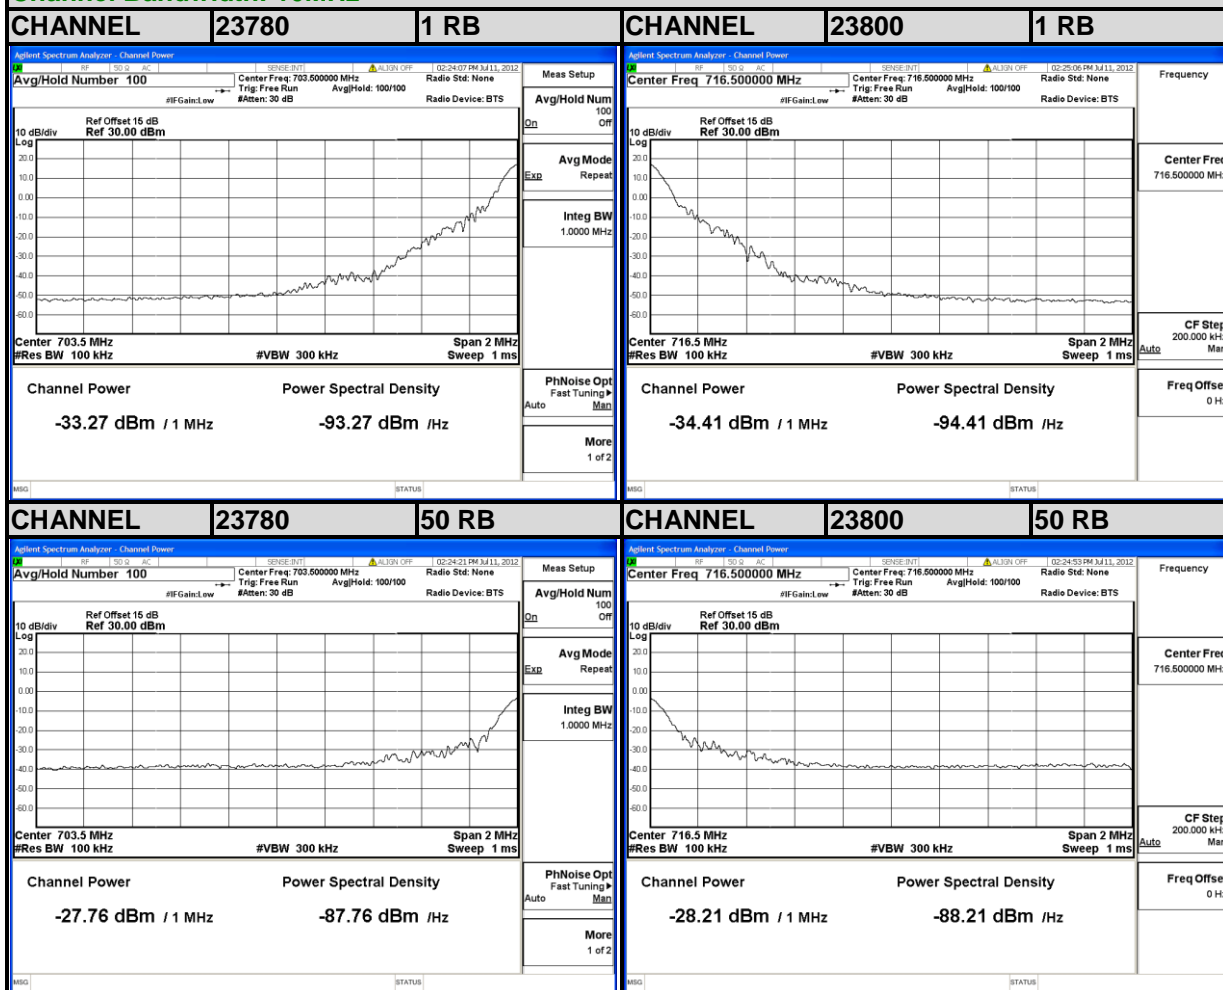Channel Bandwidth: 10MHz

LTE BAND 4

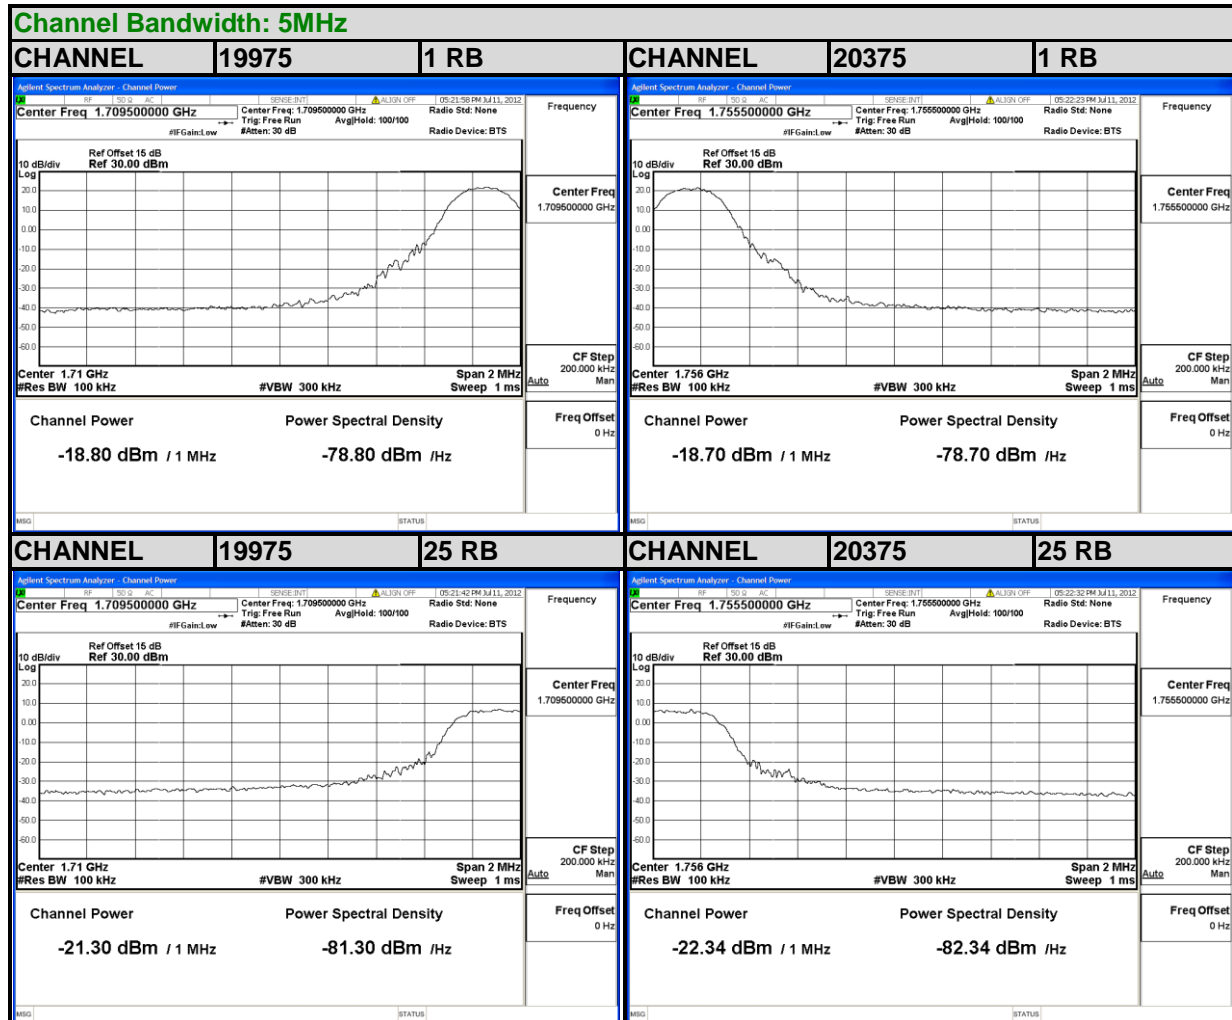

Channel Bandwidth: 10MHz

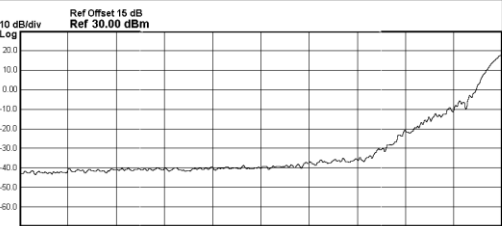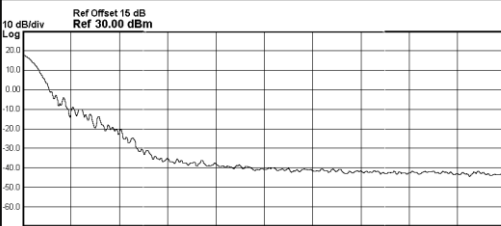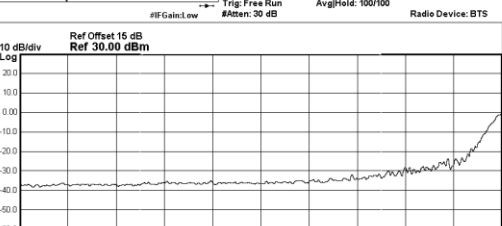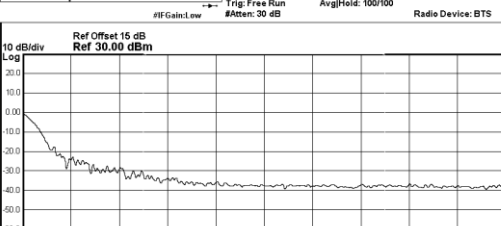CHANNEL	20000	1 RB	CHANNEL	20350	1 RB
<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 1.709500000 GHz</p> <p>Ref Offset 15 dB Ref 30.00 dBm</p> <p>10 dB/div Log</p>  <p>Center 1.71 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1 ms</p> <p>Channel Power -28.28 dBm / 1 MHz</p> <p>Power Spectral Density -88.28 dBm /Hz</p> <p>Frequency Center Freq 1.709500000 GHz CF Step 200.000 kHz Freq Offset 0 Hz</p>			<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 1.755500000 GHz</p> <p>Ref Offset 15 dB Ref 30.00 dBm</p> <p>10 dB/div Log</p>  <p>Center 1.756 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1 ms</p> <p>Channel Power -28.97 dBm / 1 MHz</p> <p>Power Spectral Density -88.97 dBm /Hz</p> <p>Frequency Center Freq 1.755500000 GHz CF Step 200.000 kHz Freq Offset 0 Hz</p>		
CHANNEL	20000	50 RB	CHANNEL	20350	50 RB
<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 1.709500000 GHz</p> <p>Ref Offset 15 dB Ref 30.00 dBm</p> <p>10 dB/div Log</p>  <p>Center 1.71 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1 ms</p> <p>Channel Power -25.68 dBm / 1 MHz</p> <p>Power Spectral Density -85.68 dBm /Hz</p> <p>Frequency Center Freq 1.709500000 GHz CF Step 200.000 kHz Freq Offset 0 Hz</p>			<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 1.755500000 GHz</p> <p>Ref Offset 15 dB Ref 30.00 dBm</p> <p>10 dB/div Log</p>  <p>Center 1.756 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1 ms</p> <p>Channel Power -26.97 dBm / 1 MHz</p> <p>Power Spectral Density -86.97 dBm /Hz</p> <p>Frequency Center Freq 1.755500000 GHz CF Step 200.000 kHz Freq Offset 0 Hz</p>		

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.6.2 TEST PROCEDURE


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 7.2GHz for LTE Band 17 and from 30MHz to 18GHz for LTE Band 4. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

4.6.3 TEST SETUP

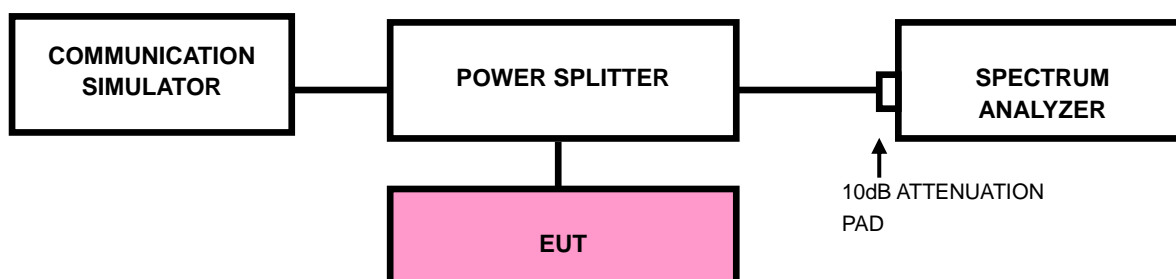

4.6.4 TEST RESULTS

LTE BAND 17

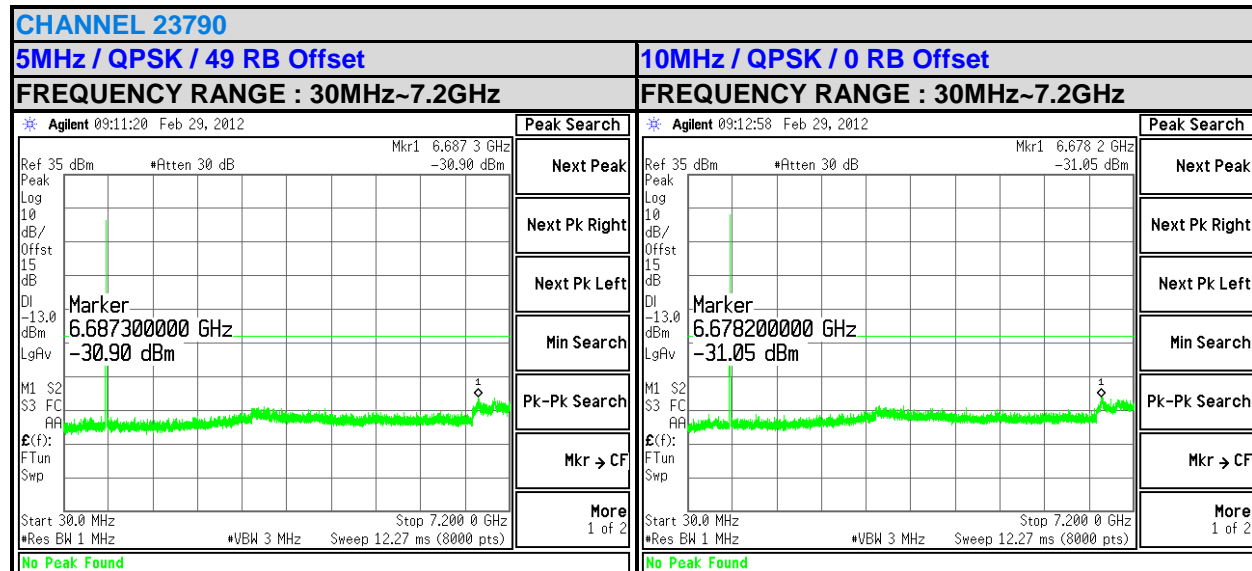



A D T


LTE BAND 4

CHANNEL 23790

5MHz / QPSK / 24 RB Offset

FREQUENCY RANGE : 30MHz~7GHz

* Agilent 10:55:16 Feb 29, 2012

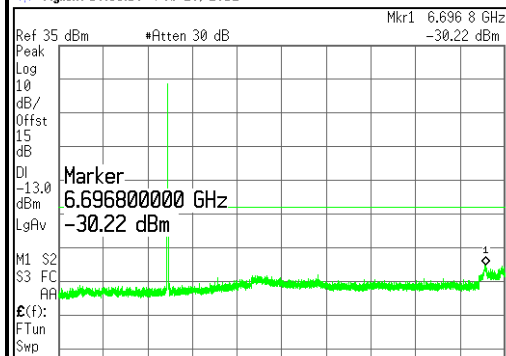

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More 1 of 2

File Operation Status, A:\SCREN033.GIF file saved

FREQUENCY RANGE : 7GHz~14GHz

* Agilent 10:56:14 Feb 29, 2012

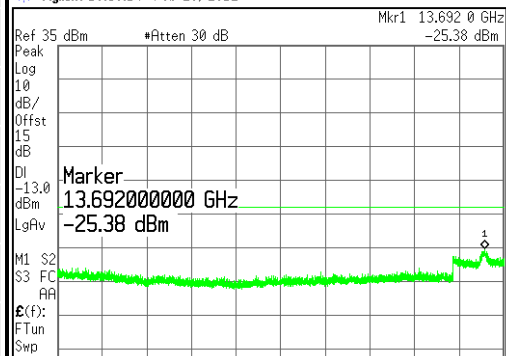

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More 1 of 2

File Operation Status, A:\SCREN034.GIF file saved

FREQUENCY RANGE : 14GHz~18GHz

* Agilent 11:06:08 Feb 29, 2012

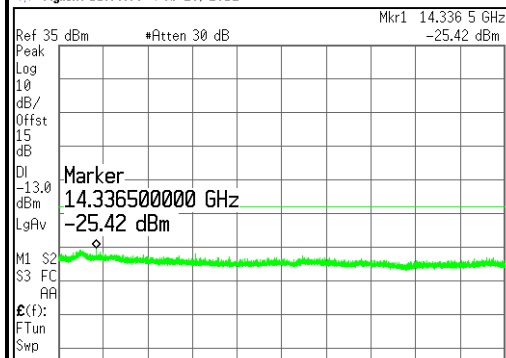

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More 1 of 2

File Operation Status, A:\SCREN035.GIF file saved




A D T

CHANNEL 23790

10MHz / QPSK / 0 RB Offset

FREQUENCY RANGE : 30MHz~7GHz

* Agilent 10:53:20 Feb 29, 2012

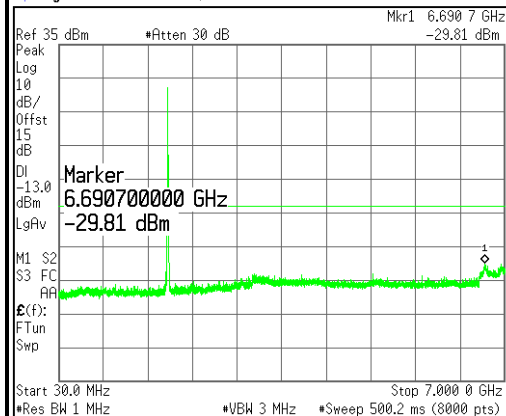

File Operation Status, A:\SCREN032.0IF file saved

Marker

Select Marker 1 2 3 4

Normal

Delta

Delta Pair (Tracking Ref)


Span Pair Center

Off

More 1 of 2

FREQUENCY RANGE : 7GHz~14GHz

* Agilent 10:51:04 Feb 29, 2012

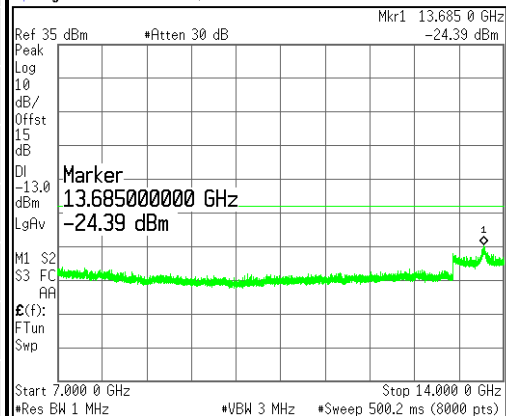

File Operation Status, A:\SCREN031.0IF file saved

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search


Pk-Pk Search

Mkr → CF

More 1 of 2

FREQUENCY RANGE : 14GHz~18GHz

* Agilent 10:50:03 Feb 29, 2012

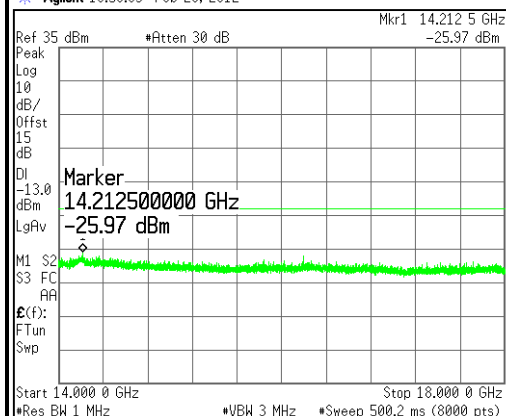

File Operation Status, A:\SCREN030.0IF file saved

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More 1 of 2

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

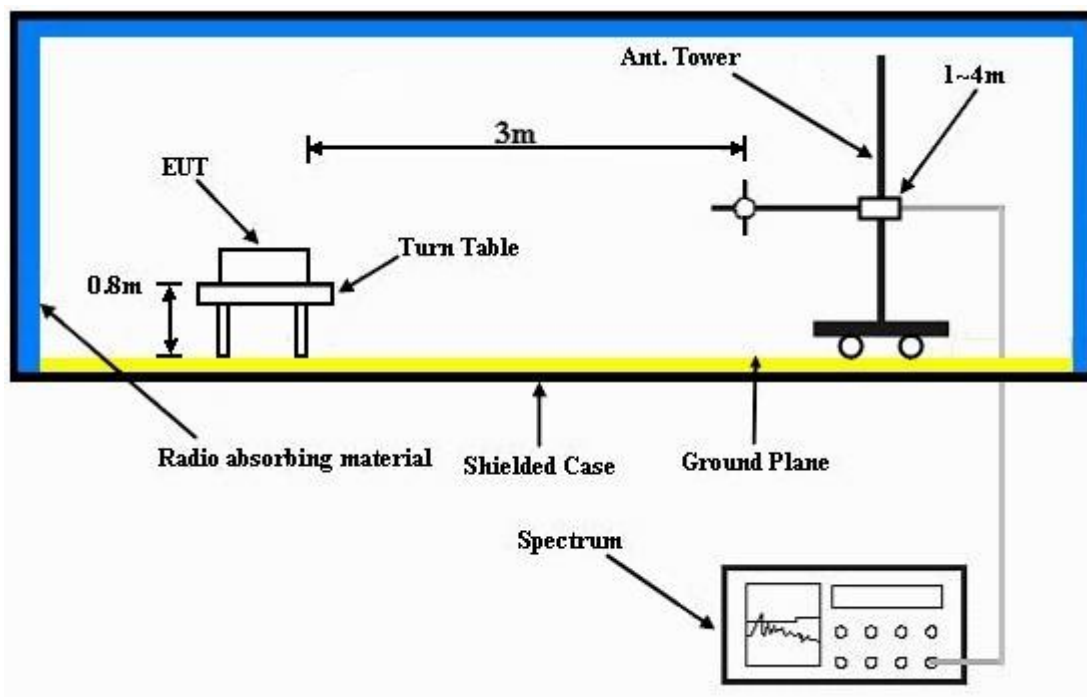

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 TEST RESULTS

LTE BAND 17


CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

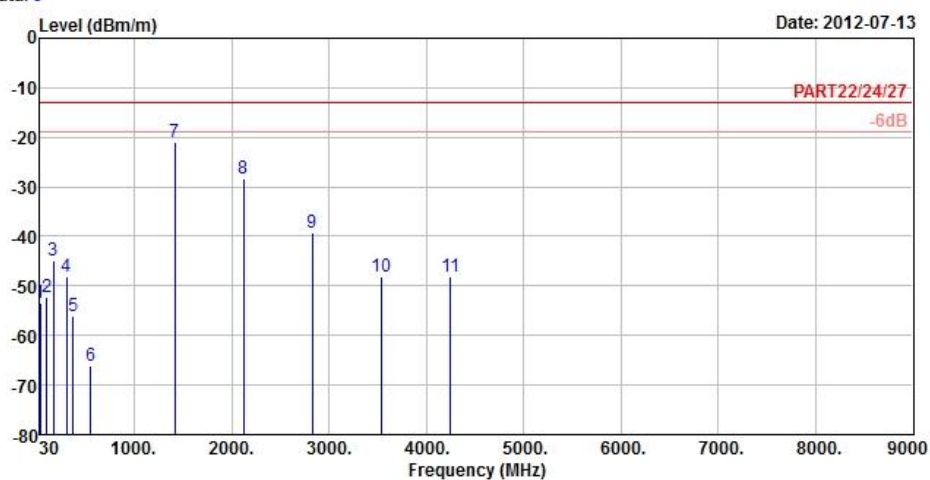

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(QPSK1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.97	-53.51	-52.40	-13.00	-40.51	-1.11 Peak
2	98.31	-52.26	-41.82	-13.00	-39.26	-10.44 Peak
3	167.97	-44.77	-38.11	-13.00	-31.77	-6.66 Peak
4	300.70	-48.22	-41.85	-13.00	-35.22	-6.37 Peak
5	370.70	-55.97	-50.11	-13.00	-42.97	-5.86 Peak
6	554.10	-66.15	-64.52	-13.00	-53.15	-1.63 Peak
7 pp	1415.60	-21.06	-8.55	-13.00	-8.06	-12.51 Peak
8	2123.40	-28.27	-17.78	-13.00	-15.27	-10.49 Peak
9	2831.20	-39.26	-31.16	-13.00	-26.26	-8.10 Peak
10	3539.00	-48.21	-40.95	-13.00	-35.21	-7.26 Peak
11	4246.80	-47.99	-42.69	-13.00	-34.99	-5.30 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-07-13

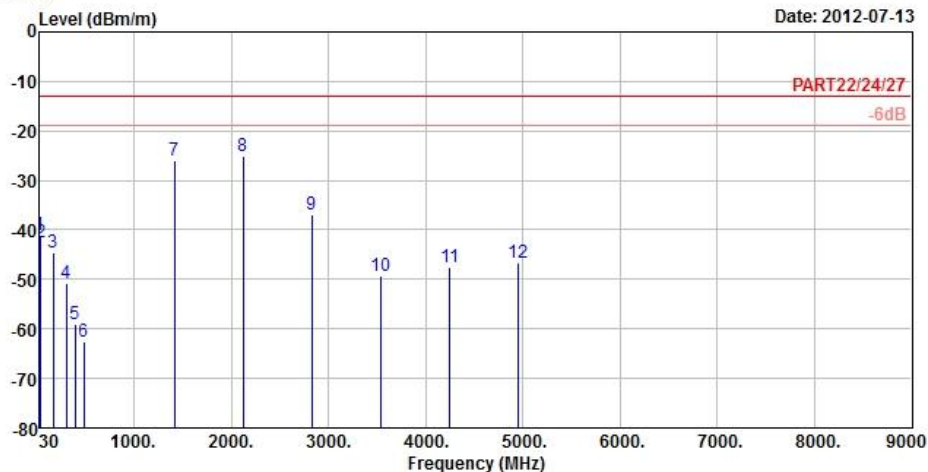

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(QPSK1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.43	-41.18	-40.07	-13.00	-28.18	-1.11 Peak
2	40.26	-42.64	-41.18	-13.00	-29.64	-1.46 Peak
3	167.43	-44.71	-38.05	-13.00	-31.71	-6.66 Peak
4	300.00	-50.88	-44.50	-13.00	-37.88	-6.38 Peak
5	394.50	-59.15	-53.47	-13.00	-46.15	-5.68 Peak
6	484.80	-62.53	-59.05	-13.00	-49.53	-3.48 Peak
7	1415.60	-26.08	-13.57	-13.00	-13.08	-12.51 Peak
8 pp	2123.40	-24.95	-14.46	-13.00	-11.95	-10.49 Peak
9	2831.20	-36.96	-28.86	-13.00	-23.96	-8.10 Peak
10	3539.00	-49.30	-42.04	-13.00	-36.30	-7.26 Peak
11	4246.80	-47.58	-42.28	-13.00	-34.58	-5.30 Peak
12	4954.60	-46.53	-44.81	-13.00	-33.53	-1.72 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

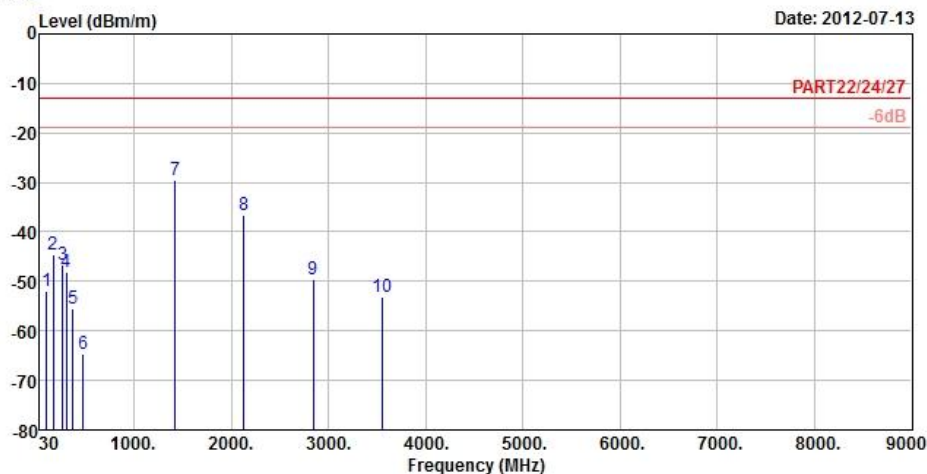

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	99.12	-51.99	-41.57	-13.00	-38.99	-10.42 Peak
2	168.24	-44.71	-38.03	-13.00	-31.71	-6.68 Peak
3	262.20	-46.49	-40.65	-13.00	-33.49	-5.84 Peak
4	300.70	-48.15	-41.78	-13.00	-35.15	-6.37 Peak
5	367.20	-55.37	-49.49	-13.00	-42.37	-5.88 Peak
6	479.20	-64.65	-61.02	-13.00	-51.65	-3.63 Peak
7 pp	1420.00	-29.63	-17.12	-13.00	-16.63	-12.51 Peak
8	2130.00	-36.50	-26.14	-13.00	-23.50	-10.36 Peak
9	2840.00	-49.45	-41.35	-13.00	-36.45	-8.10 Peak
10	3550.00	-53.24	-45.98	-13.00	-40.24	-7.26 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-07-13

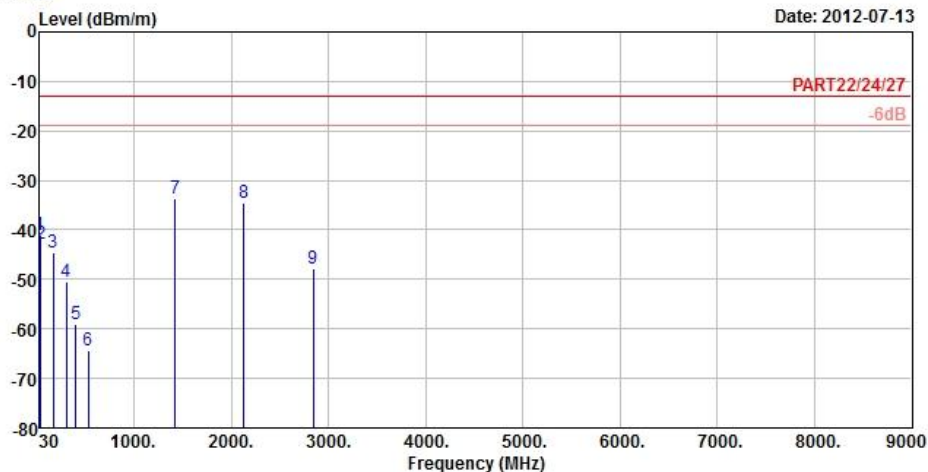

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.16	-41.12	-40.73	-13.00	-28.12	-0.39 Peak
2	42.69	-42.68	-41.35	-13.00	-29.68	-1.33 Peak
3	167.43	-44.71	-38.05	-13.00	-31.71	-6.66 Peak
4	300.70	-50.61	-44.24	-13.00	-37.61	-6.37 Peak
5	398.00	-59.12	-53.47	-13.00	-46.12	-5.65 Peak
6	529.60	-64.32	-62.03	-13.00	-51.32	-2.29 Peak
7 pp	1420.00	-33.66	-21.15	-13.00	-20.66	-12.51 Peak
8	2130.00	-34.53	-24.17	-13.00	-21.53	-10.36 Peak
9	2840.00	-47.80	-39.70	-13.00	-34.80	-8.10 Peak



A D T


CHANNEL BANDWIDTH: 5MHz / 16QAM



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

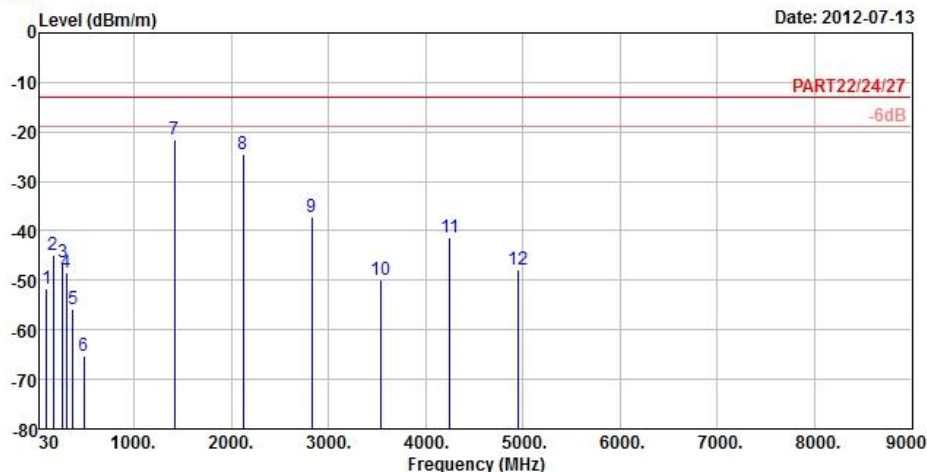

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(16QAM1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.31	-51.72	-41.28	-13.00	-38.72	-10.44 Peak
2	167.43	-44.81	-38.15	-13.00	-31.81	-6.66 Peak
3	266.52	-46.31	-40.40	-13.00	-33.31	-5.91 Peak
4	300.00	-48.39	-42.01	-13.00	-35.39	-6.38 Peak
5	373.50	-55.78	-49.95	-13.00	-42.78	-5.83 Peak
6	481.30	-65.33	-61.75	-13.00	-52.33	-3.58 Peak
7 pp	1415.60	-21.68	-9.17	-13.00	-8.68	-12.51 Peak
8	2123.40	-24.57	-14.08	-13.00	-11.57	-10.49 Peak
9	2831.20	-37.32	-29.22	-13.00	-24.32	-8.10 Peak
10	3539.00	-49.78	-42.52	-13.00	-36.78	-7.26 Peak
11	4246.80	-41.41	-36.11	-13.00	-28.41	-5.30 Peak
12	4954.60	-47.75	-46.03	-13.00	-34.75	-1.72 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

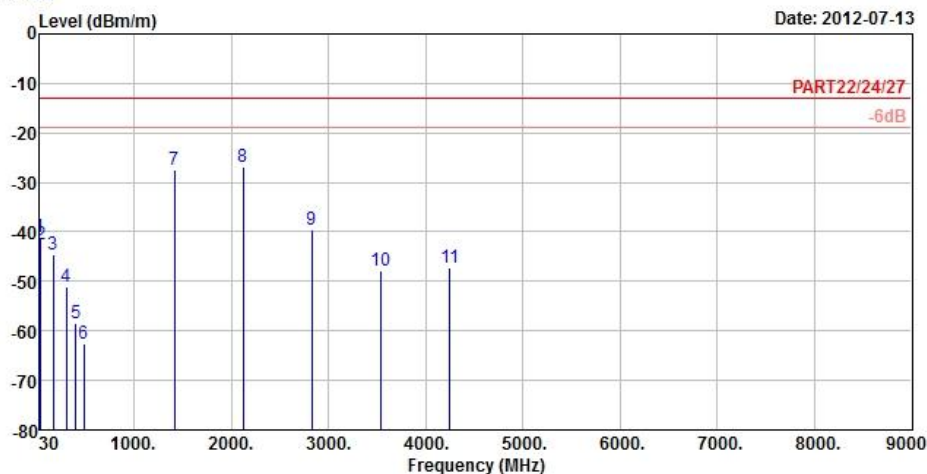

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(16QAM1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.16	-41.08	-40.69	-13.00	-28.08	-0.39 Peak
2	40.26	-42.43	-40.97	-13.00	-29.43	-1.46 Peak
3	167.43	-44.65	-37.99	-13.00	-31.65	-6.66 Peak
4	300.00	-51.01	-44.63	-13.00	-38.01	-6.38 Peak
5	401.50	-58.57	-52.98	-13.00	-45.57	-5.59 Peak
6	480.60	-62.50	-58.92	-13.00	-49.50	-3.58 Peak
7	1415.60	-27.37	-14.86	-13.00	-14.37	-12.51 Peak
8 pp	2123.40	-26.76	-16.27	-13.00	-13.76	-10.49 Peak
9	2831.20	-39.47	-31.37	-13.00	-26.47	-8.10 Peak
10	3539.00	-47.82	-40.56	-13.00	-34.82	-7.26 Peak
11	4246.80	-47.23	-41.93	-13.00	-34.23	-5.30 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

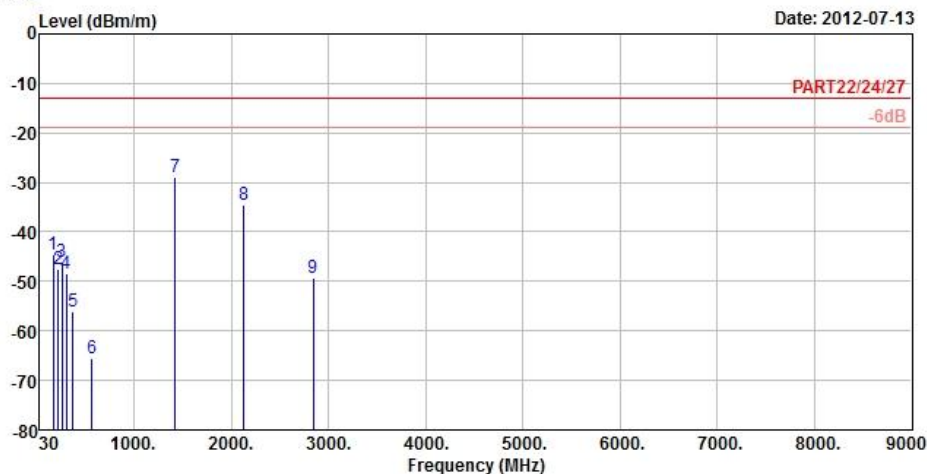

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	168.24	-44.70	-38.02	-13.00	-31.70	-6.68 Peak
2	222.24	-47.45	-40.50	-13.00	-34.45	-6.95 Peak
3	261.39	-46.19	-40.35	-13.00	-33.19	-5.84 Peak
4	300.00	-48.32	-41.94	-13.00	-35.32	-6.38 Peak
5	368.60	-56.10	-50.23	-13.00	-43.10	-5.87 Peak
6	564.60	-65.66	-64.33	-13.00	-52.66	-1.33 Peak
7 pp	1420.00	-28.84	-16.33	-13.00	-15.84	-12.51 Peak
8	2130.00	-34.40	-24.04	-13.00	-21.40	-10.36 Peak
9	2840.00	-49.22	-41.12	-13.00	-36.22	-8.10 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-07-13

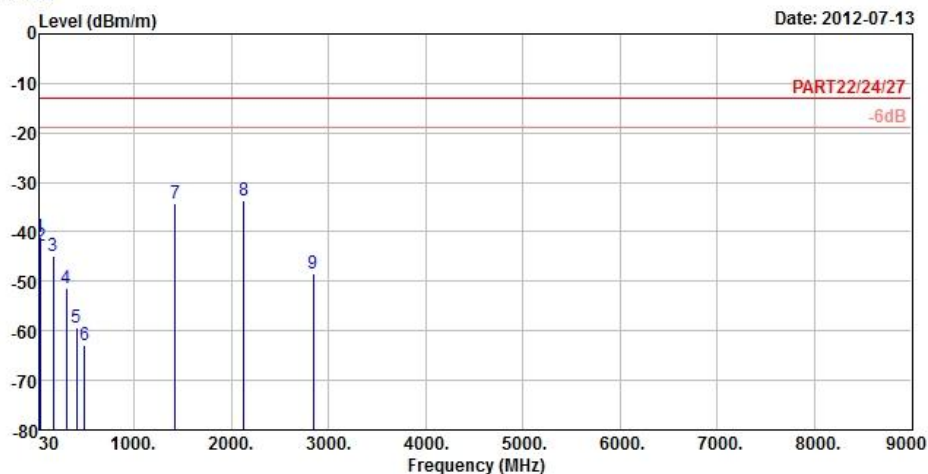

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.16	-41.13	-40.74	-13.00	-28.13	-0.39 Peak
2	42.42	-42.68	-41.35	-13.00	-29.68	-1.33 Peak
3	167.43	-44.78	-38.12	-13.00	-31.78	-6.66 Peak
4	300.00	-51.51	-45.13	-13.00	-38.51	-6.38 Peak
5	404.30	-59.41	-53.89	-13.00	-46.41	-5.52 Peak
6	491.10	-62.83	-59.49	-13.00	-49.83	-3.34 Peak
7	1420.00	-34.17	-21.66	-13.00	-21.17	-12.51 Peak
8 pp	2130.00	-33.54	-23.18	-13.00	-20.54	-10.36 Peak
9	2840.00	-48.48	-40.38	-13.00	-35.48	-8.10 Peak



A D T


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

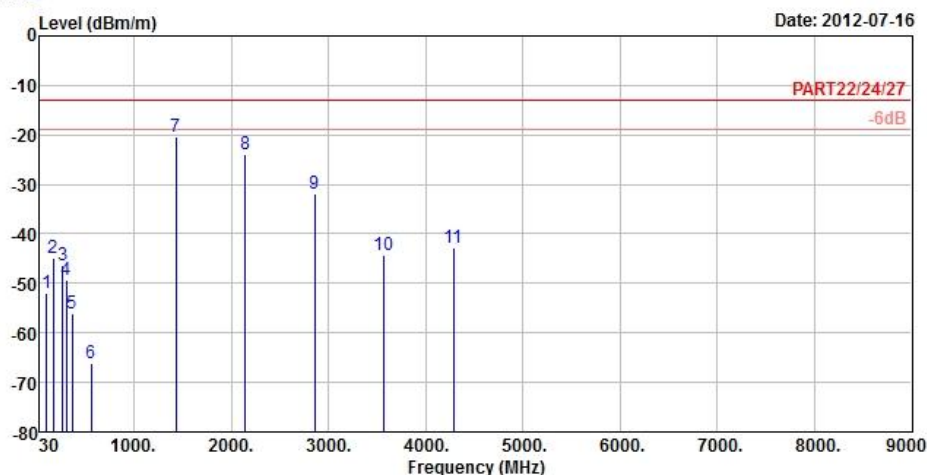

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(QPSK1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.85	-51.91	-41.49	-13.00	-38.91	-10.42	Peak
2	167.70	-44.75	-38.09	-13.00	-31.75	-6.66	Peak
3	267.33	-46.31	-40.38	-13.00	-33.31	-5.93	Peak
4	301.40	-49.21	-42.84	-13.00	-36.21	-6.37	Peak
5	364.40	-56.18	-50.28	-13.00	-43.18	-5.90	Peak
6	559.70	-65.99	-64.52	-13.00	-52.99	-1.47	Peak
7 pp	1428.00	-20.50	-7.98	-13.00	-7.50	-12.52	Peak
8	2142.00	-24.03	-13.67	-13.00	-11.03	-10.36	Peak
9	2856.00	-31.84	-23.70	-13.00	-18.84	-8.14	Peak
10	3570.00	-44.16	-36.95	-13.00	-31.16	-7.21	Peak
11	4284.00	-42.73	-37.69	-13.00	-29.73	-5.04	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

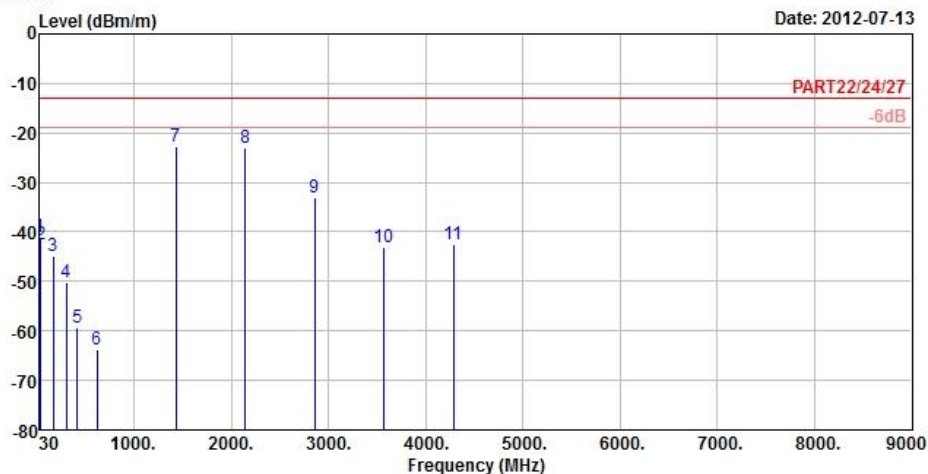

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(QPSK1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.70	-41.14	-40.03	-13.00	-28.14	-1.11 Peak
2	42.15	-42.60	-41.27	-13.00	-29.60	-1.33 Peak
3	167.97	-44.85	-38.19	-13.00	-31.85	-6.66 Peak
4	300.00	-50.27	-43.89	-13.00	-37.27	-6.38 Peak
5	414.10	-59.19	-53.92	-13.00	-46.19	-5.27 Peak
6	617.10	-63.71	-63.66	-13.00	-50.71	-0.05 Peak
7 pp	1428.00	-22.79	-10.27	-13.00	-9.79	-12.52 Peak
8	2142.00	-23.03	-12.67	-13.00	-10.03	-10.36 Peak
9	2856.00	-33.17	-25.03	-13.00	-20.17	-8.14 Peak
10	3570.00	-43.24	-36.03	-13.00	-30.24	-7.21 Peak
11	4284.00	-42.51	-37.47	-13.00	-29.51	-5.04 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

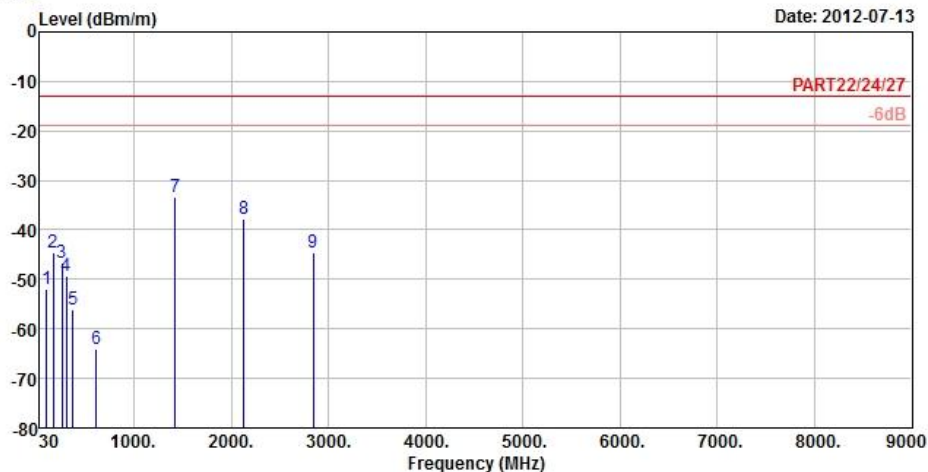

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	99.12	-51.91	-41.49	-13.00	-38.91	-10.42 Peak
2	167.97	-44.68	-38.02	-13.00	-31.68	-6.66 Peak
3	261.39	-46.52	-40.68	-13.00	-33.52	-5.84 Peak
4	301.40	-49.24	-42.87	-13.00	-36.24	-6.37 Peak
5	367.20	-56.18	-50.30	-13.00	-43.18	-5.88 Peak
6	613.60	-64.10	-63.99	-13.00	-51.10	-0.11 Peak
7 pp	1420.00	-33.49	-20.98	-13.00	-20.49	-12.51 Peak
8	2130.00	-37.73	-27.37	-13.00	-24.73	-10.36 Peak
9	2840.00	-44.71	-36.61	-13.00	-31.71	-8.10 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

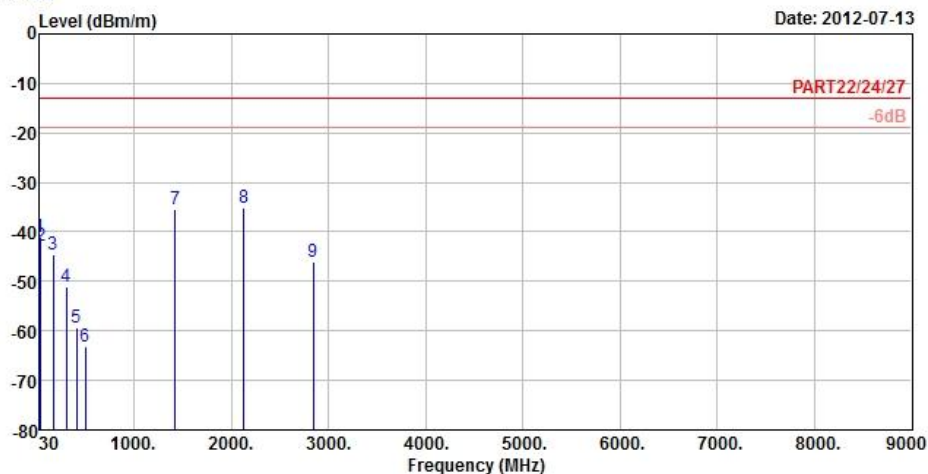

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.16	-41.18	-40.79	-13.00	-28.18	-0.39 Peak
2	42.96	-42.91	-41.58	-13.00	-29.91	-1.33 Peak
3	167.43	-44.72	-38.06	-13.00	-31.72	-6.66 Peak
4	300.00	-51.14	-44.76	-13.00	-38.14	-6.38 Peak
5	405.70	-59.25	-53.76	-13.00	-46.25	-5.49 Peak
6	495.30	-63.20	-59.99	-13.00	-50.20	-3.21 Peak
7	1420.00	-35.35	-22.84	-13.00	-22.35	-12.51 Peak
8 pp	2130.00	-35.14	-24.78	-13.00	-22.14	-10.36 Peak
9	2840.00	-46.07	-37.97	-13.00	-33.07	-8.10 Peak



A D T

CHANNEL BANDWIDTH: 10MHz / 16QAM




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2012-07-13

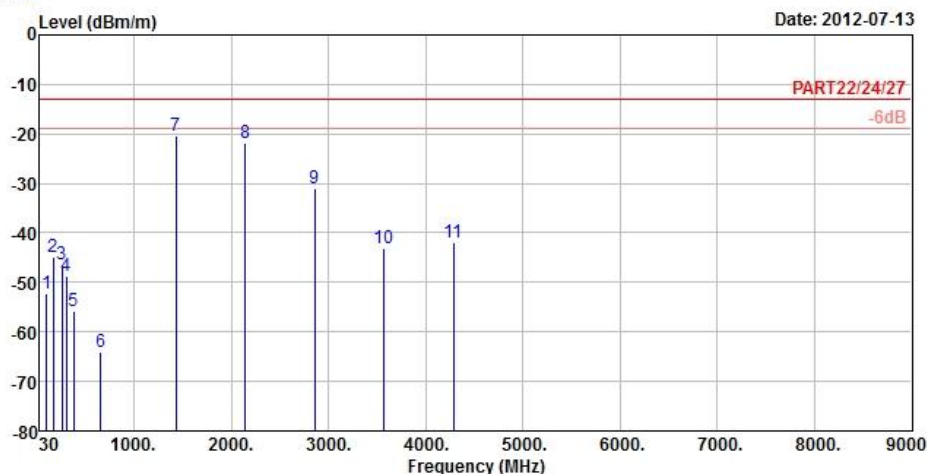

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(16QAM1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.31	-52.15	-41.71	-13.00	-39.15	-10.44 Peak
2	167.97	-44.90	-38.24	-13.00	-31.90	-6.66 Peak
3	261.12	-46.43	-40.60	-13.00	-33.43	-5.83 Peak
4	300.00	-48.69	-42.31	-13.00	-35.69	-6.38 Peak
5	377.70	-55.80	-49.99	-13.00	-42.80	-5.81 Peak
6	652.80	-64.07	-64.66	-13.00	-51.07	0.59 Peak
7 pp	1428.00	-20.47	-7.95	-13.00	-7.47	-12.52 Peak
8	2142.00	-21.73	-11.37	-13.00	-8.73	-10.36 Peak
9	2856.00	-31.03	-22.89	-13.00	-18.03	-8.14 Peak
10	3570.00	-43.21	-36.00	-13.00	-30.21	-7.21 Peak
11	4284.00	-42.04	-37.00	-13.00	-29.04	-5.04 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-07-13

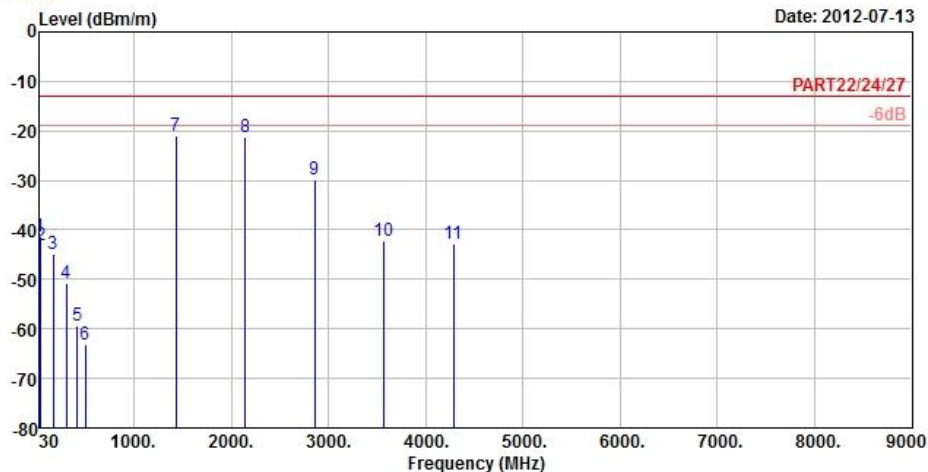

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(16QAM1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.43	-41.31	-40.20	-13.00	-28.31	-1.11 Peak
2	42.69	-42.96	-41.63	-13.00	-29.96	-1.33 Peak
3	166.89	-44.82	-38.18	-13.00	-31.82	-6.64 Peak
4	300.00	-50.65	-44.27	-13.00	-37.65	-6.38 Peak
5	417.60	-59.46	-54.29	-13.00	-46.46	-5.17 Peak
6	498.80	-63.23	-60.09	-13.00	-50.23	-3.14 Peak
7 pp	1428.00	-20.86	-8.34	-13.00	-7.86	-12.52 Peak
8	2142.00	-21.31	-10.95	-13.00	-8.31	-10.36 Peak
9	2856.00	-29.67	-21.53	-13.00	-16.67	-8.14 Peak
10	3570.00	-42.35	-35.14	-13.00	-29.35	-7.21 Peak
11	4284.00	-42.92	-37.88	-13.00	-29.92	-5.04 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

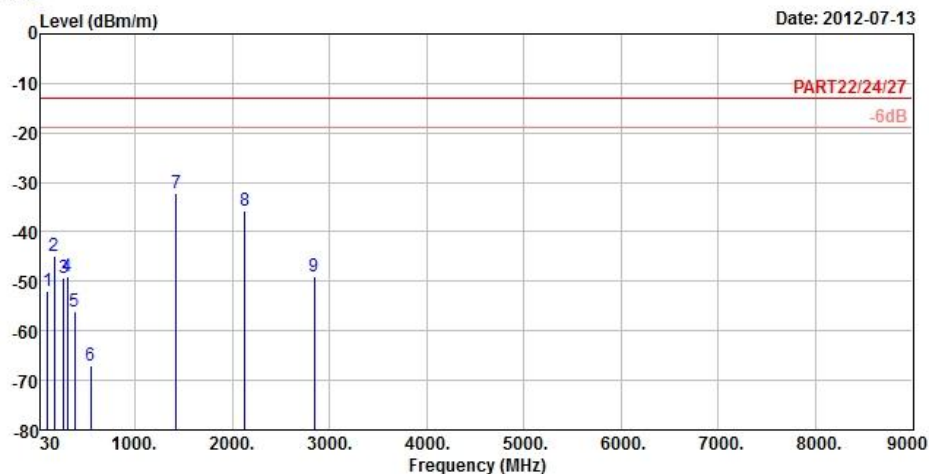

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.85	-52.10	-41.68	-13.00	-39.10	-10.42 Peak
2	168.24	-44.82	-38.14	-13.00	-31.82	-6.68 Peak
3	261.93	-49.44	-43.60	-13.00	-36.44	-5.84 Peak
4	306.30	-49.06	-42.73	-13.00	-36.06	-6.33 Peak
5	379.10	-55.98	-50.19	-13.00	-42.98	-5.79 Peak
6	546.40	-67.16	-65.32	-13.00	-54.16	-1.84 Peak
7 pp	1420.00	-32.23	-19.72	-13.00	-19.23	-12.51 Peak
8	2130.00	-35.59	-25.23	-13.00	-22.59	-10.36 Peak
9	2840.00	-49.01	-40.91	-13.00	-36.01	-8.10 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-07-13

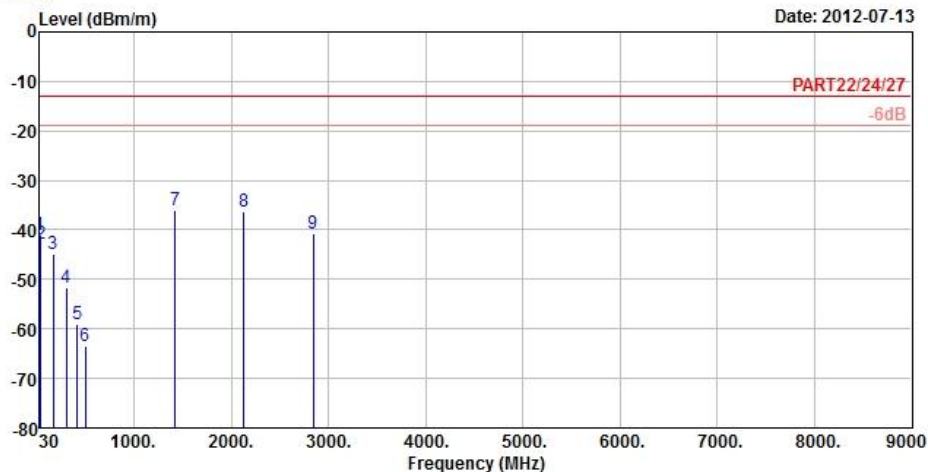

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 17_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	32.70	-40.90	-39.79	-13.00	-27.90	-1.11 Peak
2	39.99	-42.79	-41.26	-13.00	-29.79	-1.53 Peak
3	166.89	-44.88	-38.24	-13.00	-31.88	-6.64 Peak
4	300.70	-51.60	-45.23	-13.00	-38.60	-6.37 Peak
5	418.30	-59.13	-53.96	-13.00	-46.13	-5.17 Peak
6	498.80	-63.51	-60.37	-13.00	-50.51	-3.14 Peak
7 pp	1420.00	-36.00	-23.49	-13.00	-23.00	-12.51 Peak
8	2130.00	-36.24	-25.88	-13.00	-23.24	-10.36 Peak
9	2840.00	-40.78	-32.68	-13.00	-27.78	-8.10 Peak



A D T

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-12

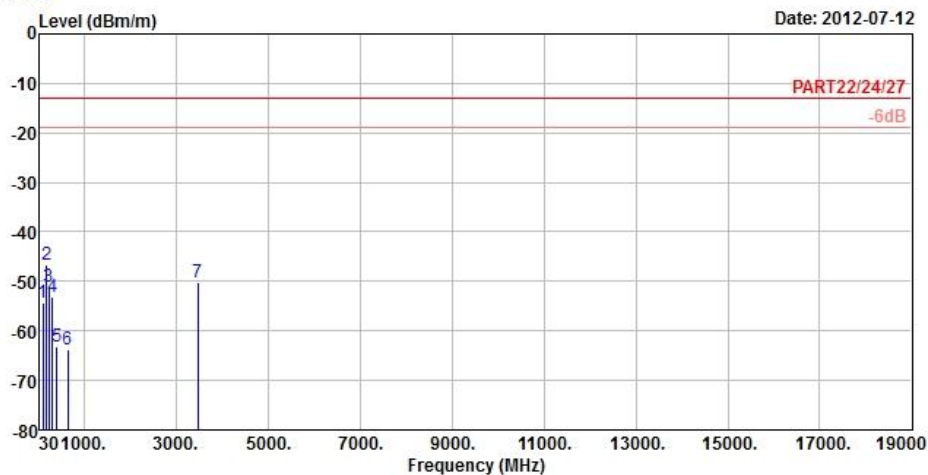

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(QPSK1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.04	-54.35	-43.91	-13.00	-41.35	-10.44 Peak
2 pp	171.21	-46.51	-39.78	-13.00	-33.51	-6.73 Peak
3	230.61	-51.18	-44.63	-13.00	-38.18	-6.55 Peak
4	308.40	-53.12	-46.80	-13.00	-40.12	-6.32 Peak
5	393.80	-63.03	-57.35	-13.00	-50.03	-5.68 Peak
6	636.70	-63.69	-63.99	-13.00	-50.69	0.30 Peak
7	3469.20	-50.16	-42.53	-13.00	-37.16	-7.63 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

Date: 2012-07-12

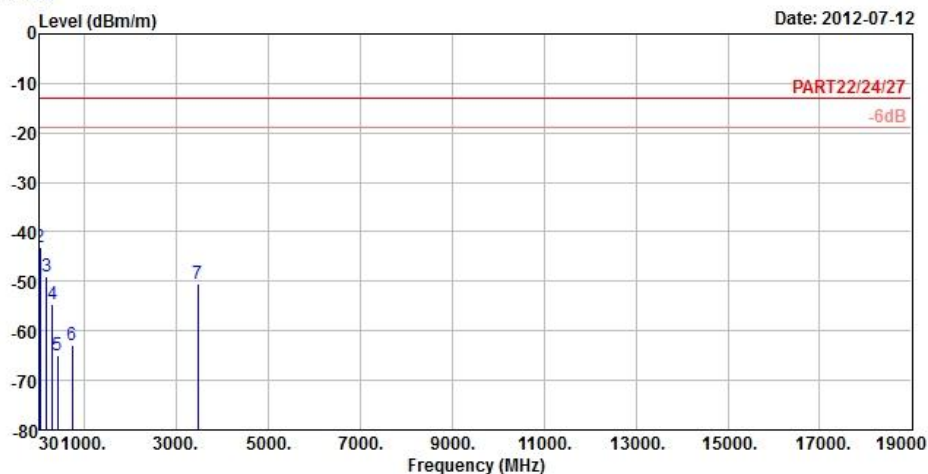

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(QPSK1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	31.35	-49.79	-50.13	-13.00	-36.79	0.34 Peak
2 pp	42.42	-43.23	-41.90	-13.00	-30.23	-1.33 Peak
3	170.13	-48.96	-42.26	-13.00	-35.96	-6.70 Peak
4	300.70	-54.70	-48.33	-13.00	-41.70	-6.37 Peak
5	419.70	-65.01	-59.88	-13.00	-52.01	-5.13 Peak
6	736.10	-62.82	-64.51	-13.00	-49.82	1.69 Peak
7	3469.20	-50.55	-42.92	-13.00	-37.55	-7.63 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-12

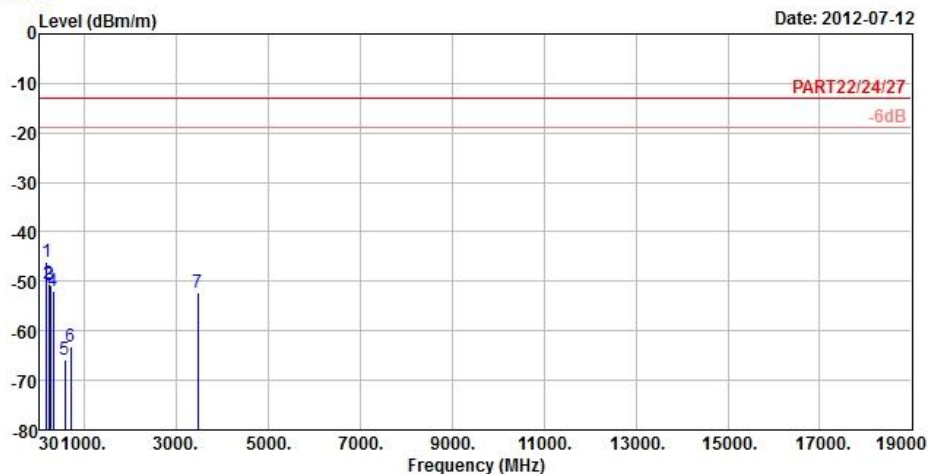

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp	171.48	-45.95	-39.22	-13.00	-32.95	-6.73	Peak
2	230.07	-50.60	-44.00	-13.00	-37.60	-6.60	Peak
3	259.50	-50.90	-45.08	-13.00	-37.90	-5.82	Peak
4	316.10	-52.10	-45.84	-13.00	-39.10	-6.26	Peak
5	580.00	-65.85	-64.94	-13.00	-52.85	-0.91	Peak
6	706.00	-63.25	-64.74	-13.00	-50.25	1.49	Peak
7	3465.00	-52.38	-44.75	-13.00	-39.38	-7.63	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

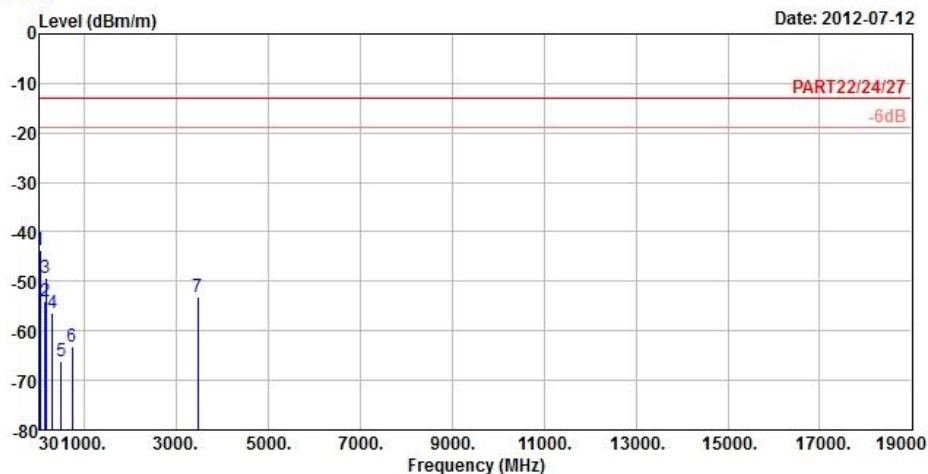

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	42.15	-43.83	-42.50	-13.00	-30.83	-1.33 Peak
2	151.77	-54.03	-47.64	-13.00	-41.03	-6.39 Peak
3	169.32	-49.38	-42.68	-13.00	-36.38	-6.70 Peak
4	301.40	-56.26	-49.89	-13.00	-43.26	-6.37 Peak
5	489.70	-65.99	-62.63	-13.00	-52.99	-3.36 Peak
6	738.20	-63.24	-64.95	-13.00	-50.24	1.71 Peak
7	3465.00	-53.24	-45.61	-13.00	-40.24	-7.63 Peak



A D T

CHANNEL BANDWIDTH: 5MHz / 16QAM




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-12

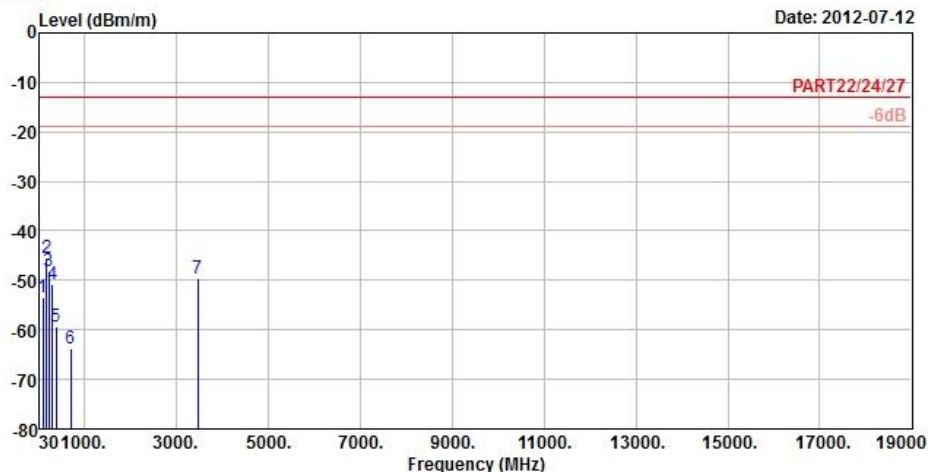

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(16QAM1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	Factor	Remark
			Level	Line	Limit		
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-53.33	-42.89	-13.00	-40.33	-10.44	Peak
2 pp	170.67	-45.54	-38.82	-13.00	-32.54	-6.72	Peak
3	221.43	-48.14	-41.15	-13.00	-35.14	-6.99	Peak
4	304.90	-50.79	-44.45	-13.00	-37.79	-6.34	Peak
5	381.90	-59.44	-53.67	-13.00	-46.44	-5.77	Peak
6	704.60	-63.75	-65.23	-13.00	-50.75	1.48	Peak
7	3469.20	-49.53	-41.90	-13.00	-36.53	-7.63	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

Date: 2012-07-12

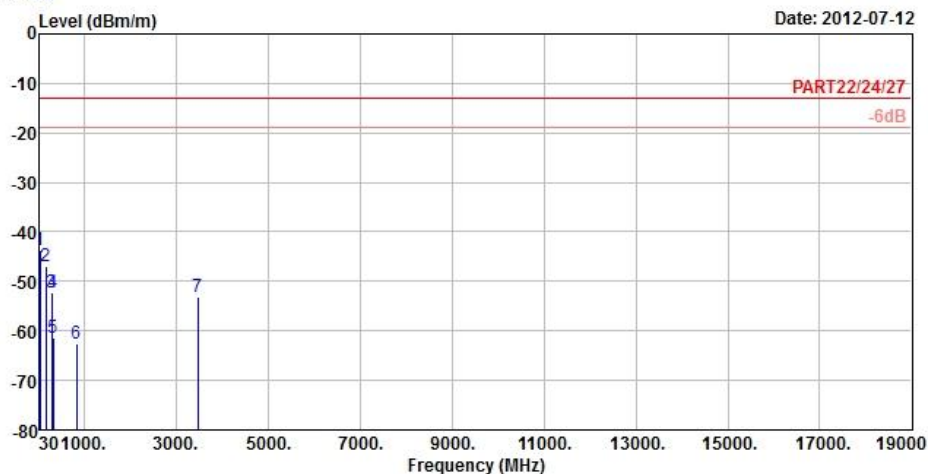

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(16QAM1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	42.42	-43.58	-42.25	-13.00	-30.58	-1.33 Peak
2	165.27	-46.98	-40.38	-13.00	-33.98	-6.60 Peak
3	292.17	-52.17	-45.90	-13.00	-39.17	-6.27 Peak
4	300.70	-52.31	-45.94	-13.00	-39.31	-6.37 Peak
5	320.30	-61.36	-55.13	-13.00	-48.36	-6.23 Peak
6	826.40	-62.51	-64.79	-13.00	-49.51	2.28 Peak
7	3469.20	-53.20	-45.57	-13.00	-40.20	-7.63 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

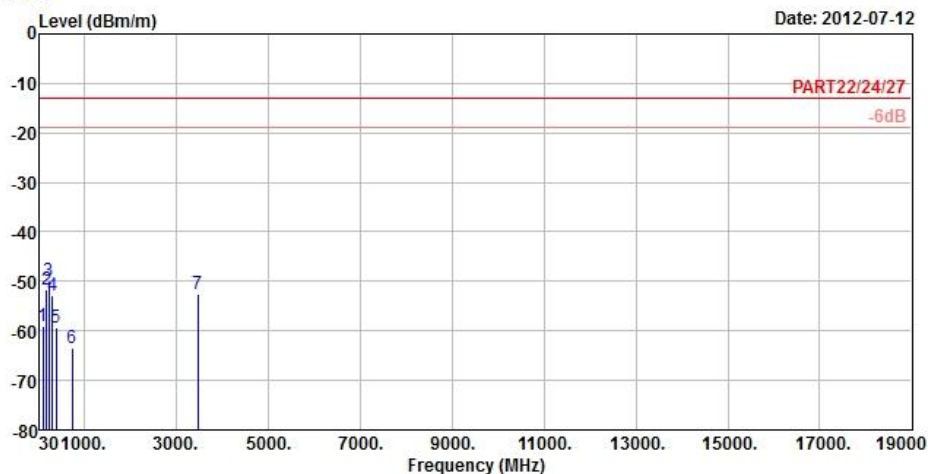

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1	100.74	-59.05	-48.63	-13.00	-46.05	-10.42	Peak
2	171.75	-51.55	-44.82	-13.00	-38.55	-6.73	Peak
3 pp	226.02	-49.85	-43.08	-13.00	-36.85	-6.77	Peak
4	302.80	-52.92	-46.56	-13.00	-39.92	-6.36	Peak
5	391.70	-59.39	-53.69	-13.00	-46.39	-5.70	Peak
6	734.00	-63.37	-65.05	-13.00	-50.37	1.68	Peak
7	3465.00	-52.49	-44.86	-13.00	-39.49	-7.63	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

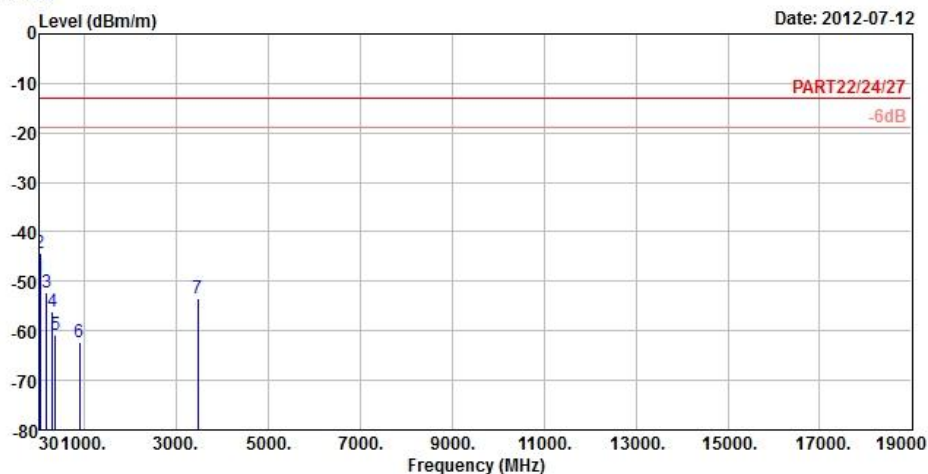

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	31.08	-49.45	-49.79	-13.00	-36.45	0.34 Peak
2 pp	42.69	-44.38	-43.05	-13.00	-31.38	-1.33 Peak
3	172.02	-52.37	-45.64	-13.00	-39.37	-6.73 Peak
4	300.00	-55.94	-49.56	-13.00	-42.94	-6.38 Peak
5	370.70	-60.89	-55.03	-13.00	-47.89	-5.86 Peak
6	890.10	-62.24	-64.88	-13.00	-49.24	2.64 Peak
7	3465.00	-53.31	-45.68	-13.00	-40.31	-7.63 Peak



A D T


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

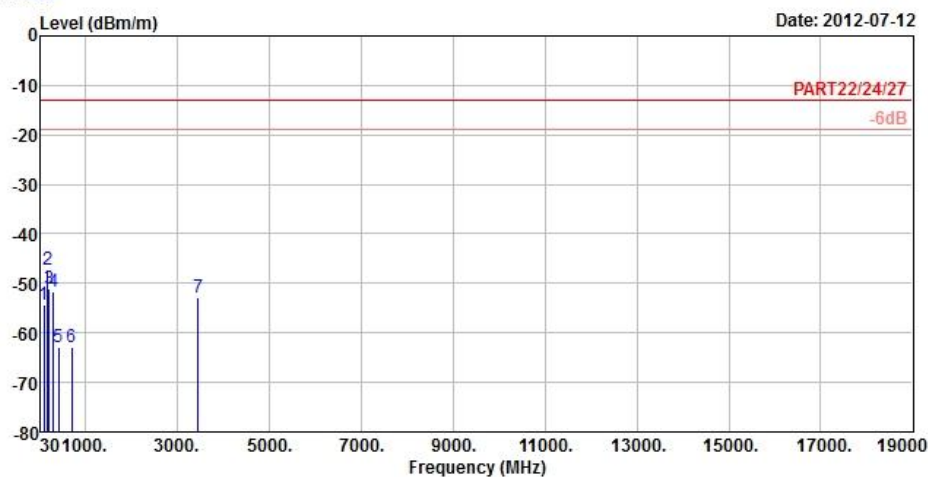

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(QPSK1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.04	-54.20	-43.76	-13.00	-41.20	-10.44 Peak
2 pp	170.40	-47.26	-40.54	-13.00	-34.26	-6.72 Peak
3	210.09	-51.09	-43.62	-13.00	-38.09	-7.47 Peak
4	307.00	-51.70	-45.38	-13.00	-38.70	-6.32 Peak
5	414.80	-62.92	-57.67	-13.00	-49.92	-5.25 Peak
6	699.70	-62.86	-64.29	-13.00	-49.86	1.43 Peak
7	3456.00	-52.70	-45.04	-13.00	-39.70	-7.66 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

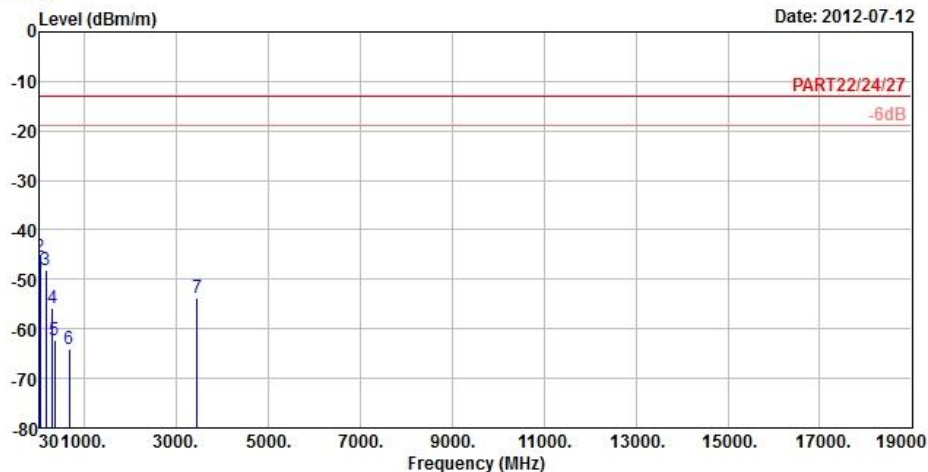

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(QPSK1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m
1	30.54	-48.70	-49.04	-13.00	-35.70	0.34 Peak
2 pp	42.15	-45.58	-44.25	-13.00	-32.58	-1.33 Peak
3	165.27	-48.11	-41.51	-13.00	-35.11	-6.60 Peak
4	301.40	-55.71	-49.34	-13.00	-42.71	-6.37 Peak
5	359.50	-62.21	-56.28	-13.00	-49.21	-5.93 Peak
6	671.00	-63.93	-64.86	-13.00	-50.93	0.93 Peak
7	3456.00	-53.64	-45.98	-13.00	-40.64	-7.66 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

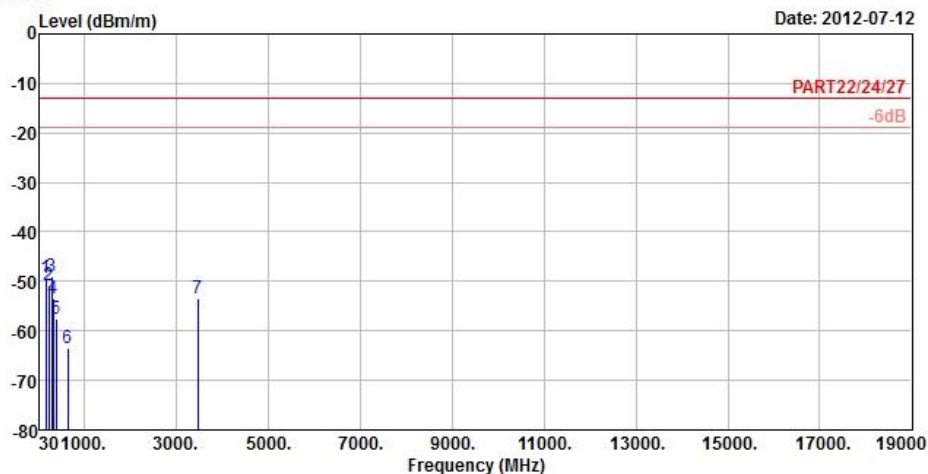

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1	169.86	-49.18	-42.48	-13.00	-36.18	-6.70	Peak
2	231.15	-50.89	-44.34	-13.00	-37.89	-6.55	Peak
3 pp	297.03	-48.93	-42.59	-13.00	-35.93	-6.34	Peak
4	315.40	-53.33	-47.06	-13.00	-40.33	-6.27	Peak
5	378.40	-57.55	-51.75	-13.00	-44.55	-5.80	Peak
6	636.70	-63.39	-63.69	-13.00	-50.39	0.30	Peak
7	3465.00	-53.51	-45.88	-13.00	-40.51	-7.63	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

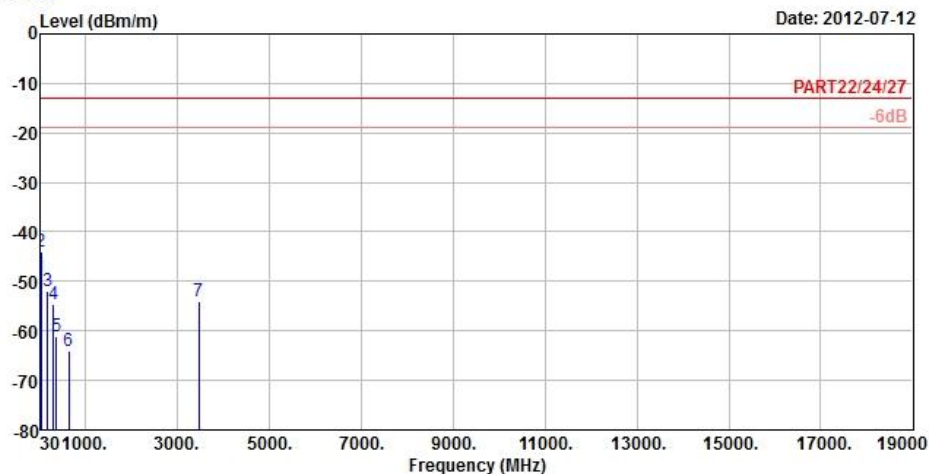

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	30.54	-48.99	-49.33	-13.00	-35.99	0.34 Peak
2 pp	42.42	-43.93	-42.60	-13.00	-30.93	-1.33 Peak
3	170.40	-51.94	-45.22	-13.00	-38.94	-6.72 Peak
4	300.00	-54.64	-48.26	-13.00	-41.64	-6.38 Peak
5	372.10	-61.21	-55.37	-13.00	-48.21	-5.84 Peak
6	636.70	-64.02	-64.32	-13.00	-51.02	0.30 Peak
7	3465.00	-54.01	-46.38	-13.00	-41.01	-7.63 Peak



A D T

CHANNEL BANDWIDTH: 10MHz / 16QAM




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-12

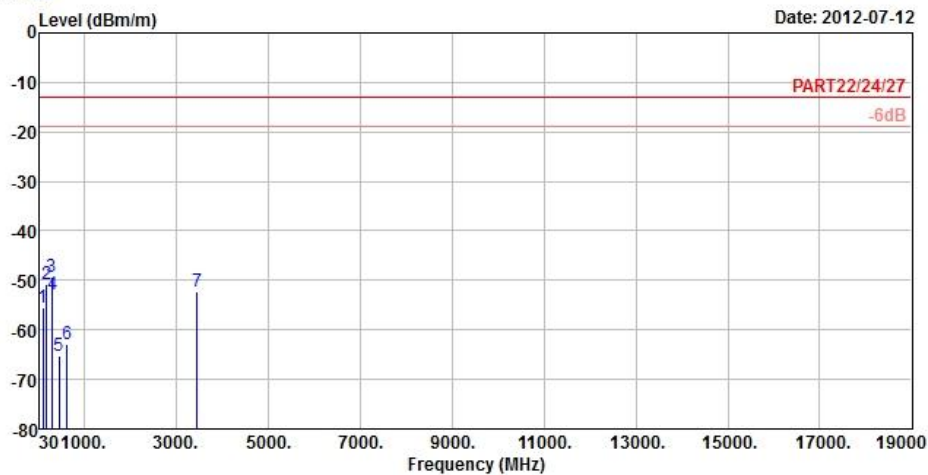

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(16QAM1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	98.31	-55.53	-45.09	-13.00	-42.53	-10.44 Peak
2	172.56	-50.66	-43.91	-13.00	-37.66	-6.75 Peak
3 pp	293.25	-49.21	-42.93	-13.00	-36.21	-6.28 Peak
4	300.00	-52.93	-46.55	-13.00	-39.93	-6.38 Peak
5	450.50	-65.16	-60.82	-13.00	-52.16	-4.34 Peak
6	629.00	-62.99	-63.16	-13.00	-49.99	0.17 Peak
7	3456.00	-52.38	-44.72	-13.00	-39.38	-7.66 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

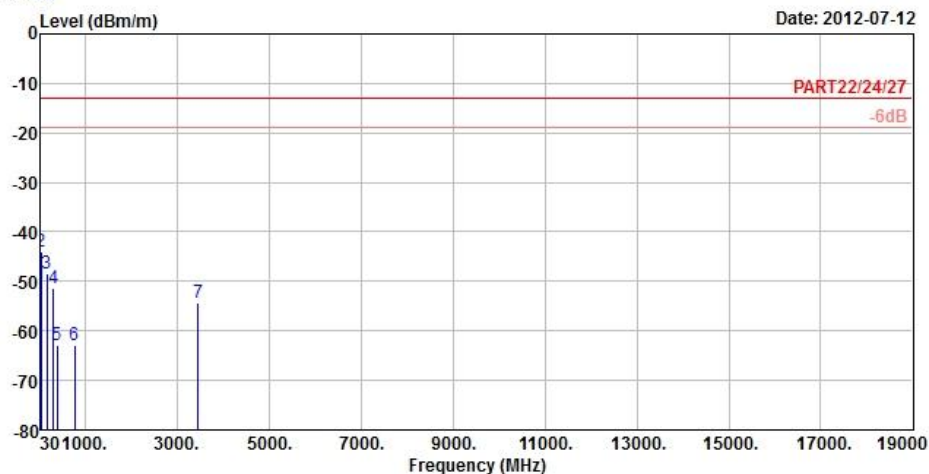

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(16QAM1,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-50.43	-51.50	-13.00	-37.43	1.07	Peak
2 pp	42.42	-43.85	-42.52	-13.00	-30.85	-1.33	Peak
3	166.89	-48.38	-41.74	-13.00	-35.38	-6.64	Peak
4	300.70	-51.32	-44.95	-13.00	-38.32	-6.37	Peak
5	380.50	-62.87	-57.09	-13.00	-49.87	-5.78	Peak
6	762.00	-62.79	-64.66	-13.00	-49.79	1.87	Peak
7	3456.00	-54.34	-46.68	-13.00	-41.34	-7.66	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

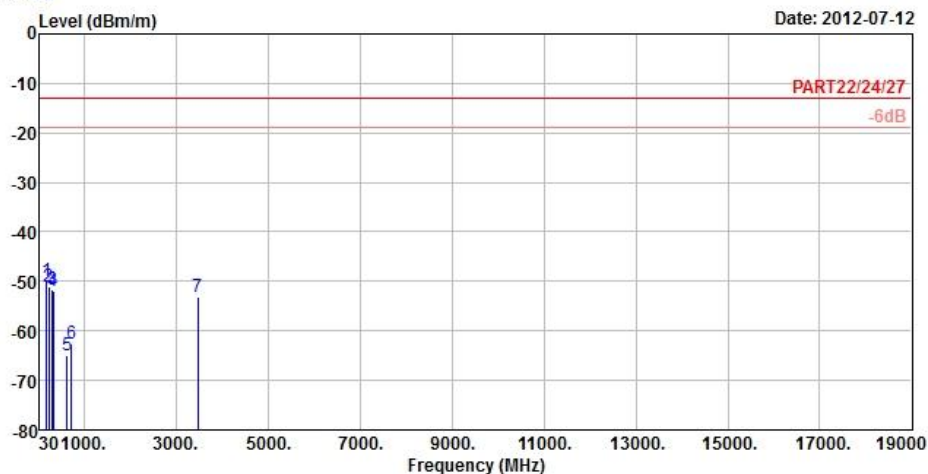

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	172.83	-49.94	-43.19	-13.00	-36.94	-6.75 Peak
2	227.37	-51.20	-44.47	-13.00	-38.20	-6.73 Peak
3	299.73	-51.79	-45.41	-13.00	-38.79	-6.38 Peak
4	314.00	-51.81	-45.54	-13.00	-38.81	-6.27 Peak
5	616.40	-65.07	-65.02	-13.00	-52.07	-0.05 Peak
6	720.70	-62.63	-64.22	-13.00	-49.63	1.59 Peak
7	3465.00	-53.19	-45.56	-13.00	-40.19	-7.63 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

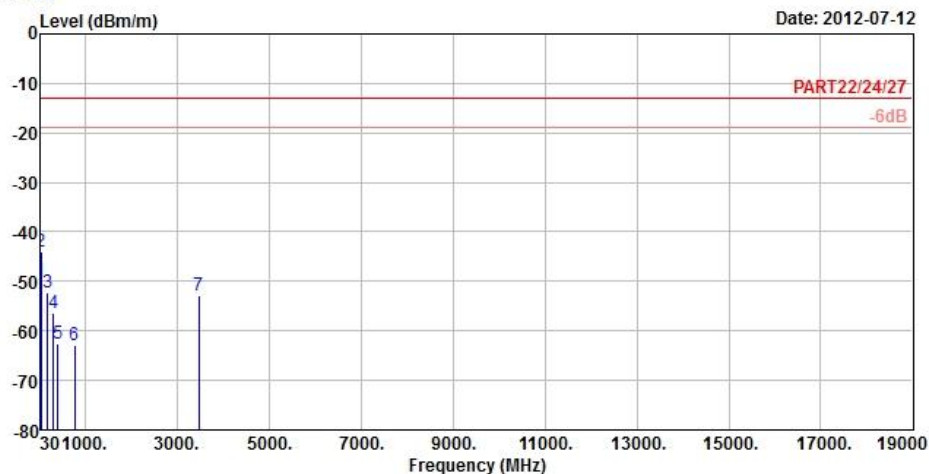

Site : 966 Chamber 5
Condition : PART22/24/27 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 4_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	30.54	-49.99	-50.33	-13.00	-36.99	0.34 Peak
2 pp	42.42	-43.90	-42.57	-13.00	-30.90	-1.33 Peak
3	171.48	-52.19	-45.46	-13.00	-39.19	-6.73 Peak
4	300.70	-56.31	-49.94	-13.00	-43.31	-6.37 Peak
5	398.00	-62.51	-56.86	-13.00	-49.51	-5.65 Peak
6	766.20	-62.94	-64.84	-13.00	-49.94	1.90 Peak
7	3465.00	-52.92	-45.29	-13.00	-39.92	-7.63 Peak

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---