



A D T

FCC HAC (RF Emission) Test Report

Report No. : SA121129C09-1
Applicant : HTC Corporation
Address : 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.
Product : Smartphone
FCC ID : NM8PN07130
Brand : HTC
Model No. : PN07130
Standards : FCC 47 CFR Part 20.19
ANSI C63.19-2007
Date of Testing : Dec. 19, 2012 ~ Jan. 15, 2013
Summary M-Rating : M3

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's HAC characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :

Vera Huang / Specialist

Approved By :

Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

Release Control Record	3
1. Summary of Maximum M-Rating	4
2. Description of Equipment Under Test	5
3. HAC RF Emission Measurement System	6
3.1 SPEAG DASY System	6
3.1.1 Robot.....	7
3.1.2 Probes.....	7
3.1.3 Data Acquisition Electronics (DAE)	8
3.1.4 Phantoms	8
3.1.5 Device Holder.....	8
3.1.6 RF Emission Calibration Dipoles.....	8
3.2 DASY System Verification	9
3.3 EUT Measurements Reference and Plane.....	10
3.4 HAC RF Emission Measurement Procedure	11
3.5 Probe Modulation Factor.....	13
4. HAC Measurement Evaluation.....	15
4.1 M-Rating Category	15
4.2 EUT Configuration and Setting.....	16
4.3 System Verification.....	16
4.4 Conducted Power Results.....	17
4.5 HAC RF Emission Testing Results	18
4.5.1 E-Field Emissions	18
4.5.2 H-Field Emissions	19
5. Calibration of Test Equipment.....	20
6. Measurement Uncertainty	21
7. Information on the Testing Laboratories	22
Appendix A. Plots of System Verification	
Appendix B. Plots of HAC RF Emission Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	



Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Initial release	Jan. 03, 2013
R02	Update report for second source of EUT	Jan. 29, 2013

**FCC HAC (RF Emission) Test Report****1. Summary of Maximum M-Rating**

Mode / Band	Maximum Field		M-Rating
GSM850	E-Field (V/m)	144.0	M4
	H-Field (A/m)	0.5539	M3
GSM1900	E-Field (V/m)	82.01	M3
	H-Field (A/m)	0.2368	M3
WCDMA Band II	E-Field (V/m)	36.73	M4
	H-Field (A/m)	0.1109	M4
WCDMA Band IV	E-Field (V/m)	39.72	M4
	H-Field (A/m)	0.1318	M4
WCDMA Band V	E-Field (V/m)	49.50	M4
	H-Field (A/m)	0.2181	M4
Summary			M3

Note:

The HAC RF emission limit (**M-rating Category M3**) is specified in FCC 47 CFR part 20.19 and ANSI C63.19.

**FCC HAC (RF Emission) Test Report****2. Description of Equipment Under Test**

EUT Type	Smartphone
FCC ID	NM8PN07130
Brand Name	HTC
Model Name	PN07130
EUT Configurations	EUT 1: Phone + 1st Battery + 1st Front Camera EUT 2: Phone + 2nd Battery + 2nd Front Camera
Tx Frequency Bands (Unit: MHz)	GSM850 : 824 ~ 849 GSM1900 : 1850 ~ 1910 WCDMA Band II : 1850 ~ 1910 WCDMA Band IV : 1710 ~ 1755 WCDMA Band V : 824 ~ 849
Uplink Modulations	GSM : GMSK WCDMA : QPSK, BPSK
Maximum AVG Conducted Power (Unit: dBm)	GSM850 : 33.09 GSM1900 : 30.04 WCDMA Band II : 23.24 WCDMA Band IV : 23.47 WCDMA Band V : 23.32
Antenna Type	Fixed Internal Antenna
EUT Stage	Identical Prototype

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

Air Interfaces/Bands List						
Air Interface	Band	Type	C63.19 Tested	Simultaneous Transmissions	Reduced Power	VOIP
GSM	850	Voice	Yes	WLAN/BT	N/A	N/A
	1900	Voice	Yes	WLAN/BT	N/A	N/A
WCDMA	II	Voice	Yes	WLAN/BT	N/A	N/A
	IV	Voice	Yes	WLAN/BT	N/A	N/A
	V	Voice	Yes	WLAN/BT	N/A	N/A
GSM	850	Data	N/A	WLAN/BT	N/A	Yes
	1900	Data	N/A	WLAN/BT	N/A	Yes
WCDMA	II	Data	N/A	WLAN/BT	N/A	Yes
	IV	Data	N/A	WLAN/BT	N/A	Yes
	V	Data	N/A	WLAN/BT	N/A	Yes
LTE	4	Data	N/A	WLAN/BT	N/A	Yes
	17	Data	N/A	WLAN/BT	N/A	Yes
WLAN	2.4G	Data	N/A	WWAN	N/A	Yes
	5G	Data	N/A	WWAN	N/A	Yes
Bluetooth	2450	Data	N/A	WWAN	N/A	N/A

Note: The HAC rating was evaluated for voice mode only.

3. HAC RF Emission Measurement System

3.1 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

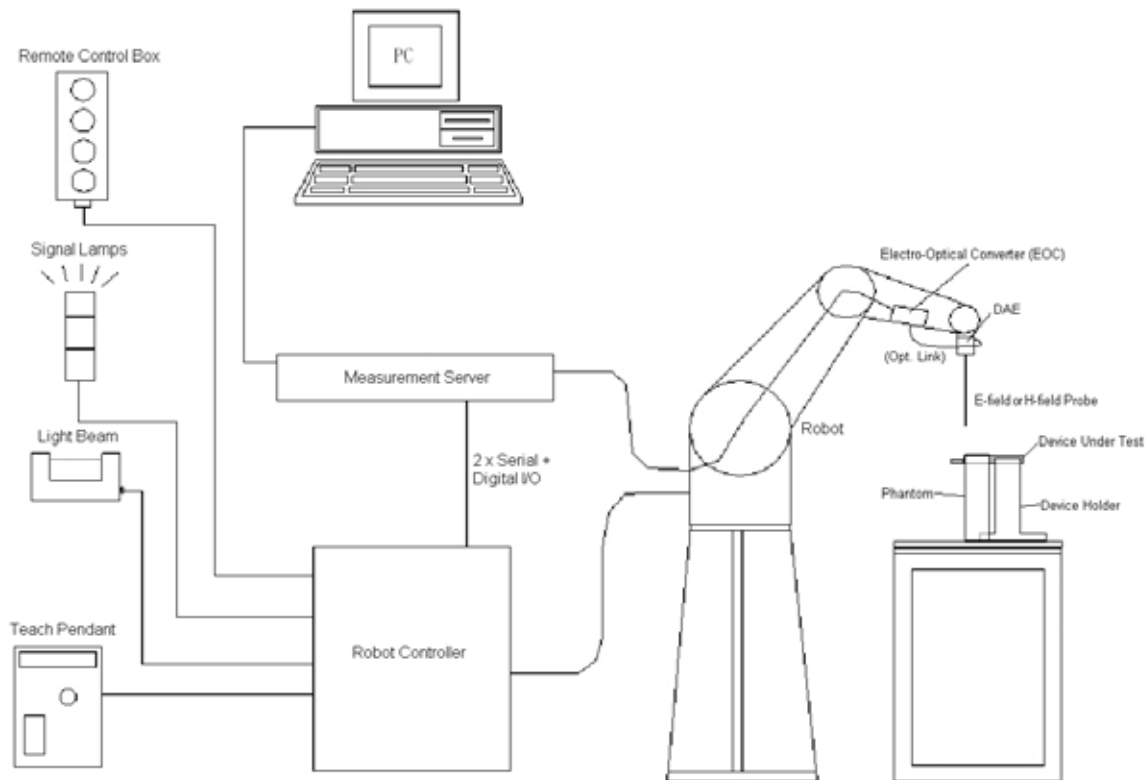


Fig-3.1 DASY System Setup

FCC HAC (RF Emission) Test Report

3.1.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY4



Fig-3.3 DASY5

3.1.2 Probes

Model	ER3DV6	
Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges	
Frequency	40 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to 1000 V/m Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm	

Model	H3DV6	
Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges	
Frequency	200 MHz to 3 GHz Output Linearized	
Directivity	± 0.2 dB (spherical isotropy error)	
Dynamic Range	10 mA/m to 2 A/m at 1GHz	
E-Field Interference	< 10 % at 3 GHz (for plane wave)	
Dimensions	Overall length: 337 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm	

FCC HAC (RF Emission) Test Report

3.1.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

3.1.4 Phantoms

Model	Test Arch	
Construction	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	Length : 370 mm Width : 370 mm Height : 370 mm	

3.1.5 Device Holder

Model	Mounting Device	
Construction	The Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to ANSI C63.19.	
Material	POM	


3.1.6 RF Emission Calibration Dipoles

Model	CD-Serial	
Construction	Free space antenna Hearing Aid susceptibility measurements according to ANSI C63.19. Validation of Hearing Aid RF setup for wireless device emission measurements according to ANSI C63.19	
Frequency	CD835V3 : 800 ~ 960 MHz CD1880V3 : 1710 ~ 2000 MHz CD2450 : 2250 ~ 2650 MHz	
Return Loss	CD835V3 : > 15 dB (835 MHz > 25 dB) CD1880V3 : > 18 dB (1880 MHz > 20 dB) CD2450V3 : > 18 dB (2450 MHz > 25 dB)	
Power Capability	> 40 W continuous	

FCC HAC (RF Emission) Test Report

3.2 DASY System Verification

The system check verifies that the system operates within its specifications. It is performed before every E-field or H-field measurement. The system check uses normal measurements in the center section of the arch phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

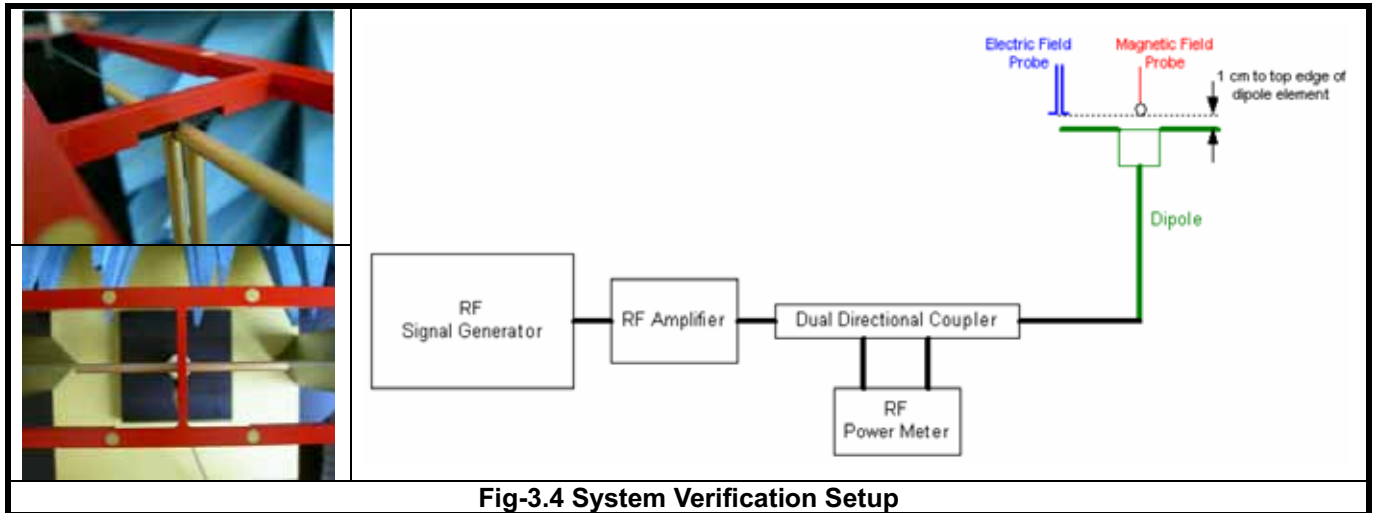

The validation dipole is placed beneath the center of arch phantom. The power meter measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power, 100 mW (20 dBm) at the dipole connector and the RF power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at RF power meter.

After system check testing, the E-field or H-field result will be compared with the reference value derived from validation dipole certificate report. The deviation of system check should be within 25 %.

The result of system verification is shown in section 4.3 of this report.

FCC HAC (RF Emission) Test Report

3.3 EUT Measurements Reference and Plane

The EUT is mounted in the device holder. The acoustic output of the EUT will coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. Then EUT will be moved vertically upwards until it touches the frame.

Fig-3.5 and Fig-3.6 illustrate the references and reference plane that is used in the RF emissions measurement.

- (a) The grid is 50 mm by 50 mm area that is divided into nine evenly sized blocks or sub-grids.
- (b) The grid is centered on the audio frequency output transducer of the EUT.
- (c) The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which in normal handset use rest against the ear.
- (d) The measurement plane is parallel to and 15 mm in front of the reference plane.



Fig-3.5 EUT Reference and Plane

FCC HAC (RF Emission) Test Report

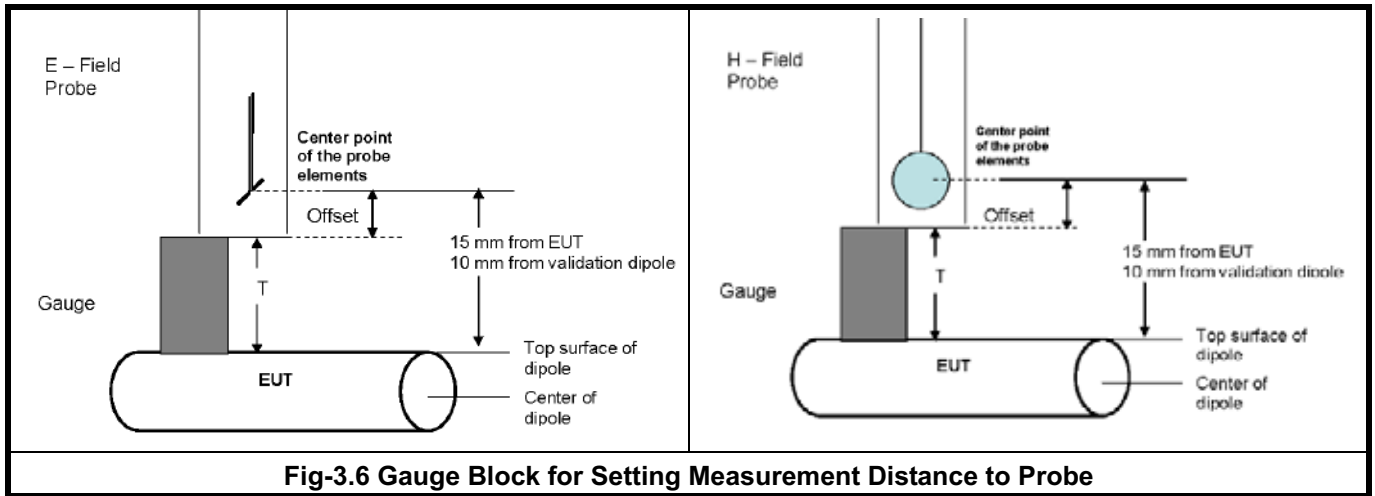


Fig-3.6 Gauge Block for Setting Measurement Distance to Probe

3.4 HAC RF Emission Measurement Procedure

The RF emissions test procedure for wireless communications device is as below.

1. Position the EUT in its intended test position.
2. Configure the EUT normal operation for maximum rated RF output power, at the desired channel and other operating parameters as intended for the test.
3. The center sub-grid shall center on the center of the acoustic output. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane.
4. Record the reading.
5. Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
6. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the EUT's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field and H-field measurements for the EUT output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field and H-field measurements.
7. Identify the maximum field reading within the non-excluded sub-grids identified in Step 6.
8. Convert the maximum field strength reading identified in Step 7 to V/m or A/m as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor.
9. Repeat step 1 through step 9 for both the E-field and H-field measurements.
10. Compare this reading to the categories and record the resulting category.

FCC HAC (RF Emission) Test Report

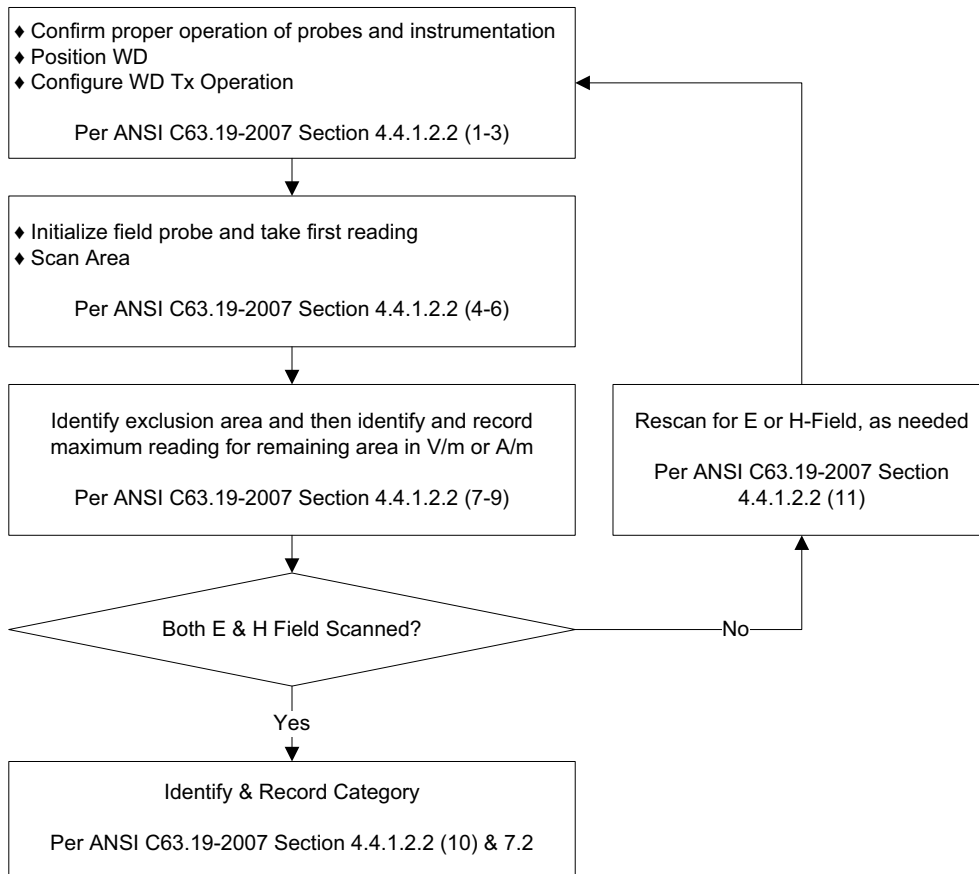


Fig-3.7 WD Near-Field Emission Test Flowchart

FCC HAC (RF Emission) Test Report

3.5 Probe Modulation Factor

The HAC standard ANSI C63.19-2007 requires measurement of the peak envelope E-field and H-field of the wireless device. Paragraph 4.2.2.1 and C.3.1 of that standard describes the probe modulation factor that shall be applied to convert the probe reading to peak envelope field.

The PMF measurement procedure is as follows.

1. Install a validation dipole for the appropriate frequency band under the Test Arch Phantom and select the proper phantom section according to the probe type installed (E-field or H-field). Move the probe to the point with the highest field, with very similar field contributions from all channels. Switch the arm power off and do not move the probe between the subsequent CW and modulated measurement.
2. The modulated signal to the dipole must be monitored to record peak amplitude and compared to a CW signal with the same peak envelope level.
3. Do not move the setup after the coupler between the modulated and the CW measurement.
4. For modulated signal measurement, connect the modulated signal using the appropriate frequency via the cable to the dipole.
5. Run the multi-meter in the procedure with the corresponding modulation setting in continuous mode.
6. Adjust the signal amplitude to achieve the same field level display in the multi-meter as during the WD field scan. Read the multi-meter display and note it together with the probe ID, modulation type and frequency.
7. Read the envelope peak on the monitor in order to adjust the CW signal later to the same level.
8. Switch the signal source off and verify that the ambient and instrumentation noise level is at least 10 dB lower.
9. For CW measurement, change the signal to CW at the same center frequency, without touching or moving the dipole or probe in the setup.
10. Adjust the CW signal amplitude to the same peak level on the spectrum analyzer.
11. Run the multi-meter in the CW procedure in continuous mode.
12. Read the multi-meter total field display and note it together with the probe ID, modulation type and frequency.
13. Calculate the PMF as the ratio between the CW multi-meter field reading and the reading for the applicable modulation.

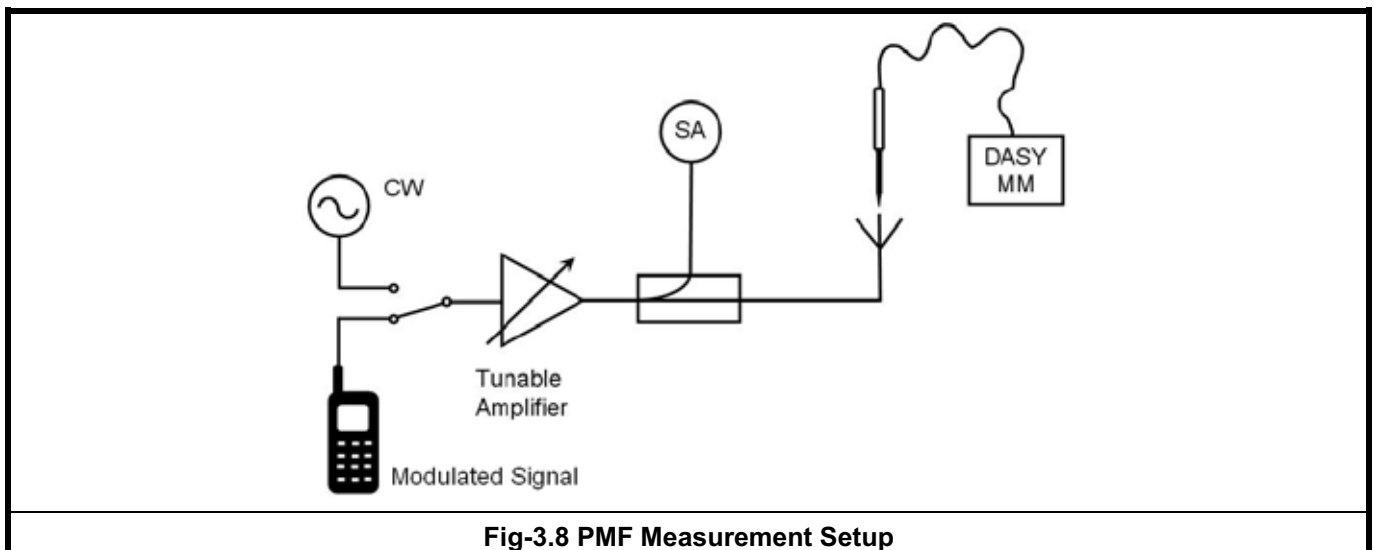


Fig-3.8 PMF Measurement Setup



FCC HAC (RF Emission) Test Report

The probe modulation factor has calibrated by SPEAG and the detailed parameter can be found in the probe calibration report in appendix C.

Modulation Type	PMF
GSM	2.948
WCDMA	1.020
CDMA2000	1.023



FCC HAC (RF Emission) Test Report

4. HAC Measurement Evaluation

4.1 M-Rating Category

The HAC Standard ANSI C63.19-2007 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

The following AWF (Articulation Weighting Factor) factors shall be used for the standard transmission protocols.

Standard	Technology	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50 Hz)	0
J-STD-007	GSM	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0
iDEN	TDMA (22 and 11 Hz)	0

Category		Telephone RF Parameters < 960 MHz	
Near Field	AWF	E-Field Emissions (V/m)	H-Field Emissions (A/m)
Category M1	0	631.0 – 1122.0	1.91 – 3.39
	-5	473.2 – 841.4	1.43 – 2.54
Category M2	0	354.8 – 631.0	1.07 – 1.91
	-5	266.1 – 473.2	0.80 – 1.43
Category M3	0	199.5 – 354.8	0.60 – 1.07
	-5	149.6 – 266.1	0.45 – 0.80
Category M4	0	< 199.5	< 0.60
	-5	< 149.6	< 0.45

Category		Telephone RF Parameters > 960 MHz	
Near Field	AWF	E-Field Emissions (V/m)	H-Field Emissions (A/m)
Category M1	0	199.5 – 354.8	0.60 – 1.07
	-5	149.6 – 266.1	0.45 – 0.80
Category M2	0	112.2 – 199.5	0.34 – 0.60
	-5	84.1 – 149.6	0.25 – 0.45
Category M3	0	63.1 – 112.2	0.19 – 0.34
	-5	47.3 – 84.1	0.14 – 0.25
Category M4	0	< 63.1	< 0.19
	-5	< 47.3	< 0.14



FCC HAC (RF Emission) Test Report

A D T

4.2 EUT Configuration and Setting

For HAC RF emission testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during HAC testing.

4.3 System Verification

The measuring results for system check are shown as below.

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field 1 (V/m)	E-Field 2 (V/m)	Average E-Field (V/m)	Deviation (%)	Test Date
835	20	161.5	172.7	170.2	171.45	6.16	Dec. 19, 2012
835	20	161.5	170.7	167.8	169.25	4.80	Jan. 15, 2013
1880	20	140.1	139.6	140.9	140.25	0.11	Dec. 19, 2012
1880	20	140.1	130.6	131.9	131.25	-6.32	Jan. 15, 2013
Frequency (MHz)	Input Power (dBm)	Target Value (A/m)	H-Field (A/m)		Deviation (%)	Test Date	
835	20	0.455	0.4428		-2.68	Dec. 20, 2012	
835	20	0.455	0.4437		-2.48	Jan. 15, 2013	
1880	20	0.461	0.4621		0.24	Dec. 20, 2012	
1880	20	0.461	0.4393		-4.71	Jan. 15, 2013	

Note:

1. Comparing to the reference target value provided by SPEAG, the validation data should be within its specification of 25 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.
2. For E-Field, the deviation is $[(E\text{-Field } 1 + E\text{-Field } 2) / 2 - \text{Target Value}] / \text{Target Value} \times 100\%$
3. For H-Field, the deviation is $(H\text{-Field} - \text{Target Value}) / \text{Target Value} \times 100\%$



FCC HAC (RF Emission) Test Report

4.4 Conducted Power Results

The measuring conducted power (Unit: dBm) are shown as below.

<WWAN Antenna 0>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Uplink)	32.99	33.09	33.06	29.81	29.96	30.04

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.4	846.6
RMC 12.2K	23.22	23.14	23.24	23.18	23.32	23.11

Band	WCDMA Band VI		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.33	23.47	23.45

<WWAN Antenna 1>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Uplink)	32.77	32.71	32.62	29.81	29.72	29.85

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.4	846.6
RMC 12.2K	23.23	22.71	23.04	23.10	23.04	22.76

Band	WCDMA Band VI		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.25	23.41	23.24



FCC HAC (RF Emission) Test Report

A D T

4.5 HAC RF Emission Testing Results

4.5.1 E-Field Emissions

Plot No.	Band	Mode	Channel	EUT Configurations	Tx Antenna Status	Peak E-Field (V/m)	M-Rating
16	GSM850	GSM	128	1	0	127.2	M4
17	GSM850	GSM	189	1	0	126.2	M4
18	GSM850	GSM	251	1	0	121.1	M4
71	GSM850	GSM	128	2	0	144.0	M4
1	GSM850	GSM	128	1	1	122.4	M4
2	GSM850	GSM	189	1	1	118.9	M4
3	GSM850	GSM	251	1	1	118.5	M4
66	GSM850	GSM	128	2	1	67.27	M4
19	GSM1900	GSM	512	1	0	71.66	M3
20	GSM1900	GSM	661	1	0	74.06	M3
21	GSM1900	GSM	810	1	0	76.33	M3
62	GSM1900	GSM	810	2	0	82.01	M3
4	GSM1900	GSM	512	1	1	60.66	M3
5	GSM1900	GSM	661	1	1	58.92	M3
6	GSM1900	GSM	810	1	1	55.48	M3
67	GSM1900	GSM	512	2	1	45.88	M4
22	WCMDA II	RMC12.2K	9262	1	0	35.95	M4
23	WCMDA II	RMC12.2K	9400	1	0	36.22	M4
24	WCMDA II	RMC12.2K	9538	1	0	36.73	M4
63	WCMDA II	RMC12.2K	9538	2	0	35.77	M4
7	WCMDA II	RMC12.2K	9262	1	1	29.53	M4
8	WCMDA II	RMC12.2K	9400	1	1	28.77	M4
9	WCMDA II	RMC12.2K	9538	1	1	27.30	M4
68	WCMDA II	RMC12.2K	9262	2	1	22.84	M4
28	WCDMA IV	RMC12.2K	1312	1	0	32.77	M4
29	WCDMA IV	RMC12.2K	1413	1	0	30.04	M4
30	WCDMA IV	RMC12.2K	1537	1	0	32.05	M4
65	WCDMA IV	RMC12.2K	1312	2	0	37.59	M4
13	WCDMA IV	RMC12.2K	1312	1	1	39.72	M4
14	WCDMA IV	RMC12.2K	1413	1	1	39.45	M4
15	WCDMA IV	RMC12.2K	1537	1	1	37.13	M4
70	WCDMA IV	RMC12.2K	1312	2	1	33.72	M4
25	WCDMA V	RMC12.2K	4132	1	0	44.26	M4
26	WCDMA V	RMC12.2K	4182	1	0	42.51	M4
27	WCDMA V	RMC12.2K	4233	1	0	43.43	M4
64	WCDMA V	RMC12.2K	4132	2	0	47.81	M4
10	WCDMA V	RMC12.2K	4132	1	1	49.50	M4
11	WCDMA V	RMC12.2K	4182	1	1	44.94	M4
12	WCDMA V	RMC12.2K	4233	1	1	44.78	M4
69	WCDMA V	RMC12.2K	4132	2	1	33.67	M4



FCC HAC (RF Emission) Test Report

4.5.2 H-Field Emissions

Plot No.	Band	Mode	Channel	EUT Configurations	Tx Antenna Status	Peak H-Field (A/m)	M-Rating
31	GSM850	GSM	128	1	0	0.2598	M4
32	GSM850	GSM	189	1	0	0.2662	M4
33	GSM850	GSM	251	1	0	0.2576	M4
74	GSM850	GSM	189	2	0	0.2965	M4
46	GSM850	GSM	128	1	1	0.5539	M3
47	GSM850	GSM	189	1	1	0.5284	M3
48	GSM850	GSM	251	1	1	0.5150	M3
75	GSM850	GSM	128	2	1	0.2874	M4
34	GSM1900	GSM	512	1	0	0.1893	M3
35	GSM1900	GSM	661	1	0	0.2368	M3
36	GSM1900	GSM	810	1	0	0.2352	M3
76	GSM1900	GSM	661	2	0	0.2244	M3
49	GSM1900	GSM	512	1	1	0.2055	M3
50	GSM1900	GSM	661	1	1	0.2061	M3
51	GSM1900	GSM	810	1	1	0.1956	M3
77	GSM1900	GSM	661	2	1	0.1766	M3
37	WCMDA II	RMC12.2K	9262	1	0	0.09400	M4
38	WCMDA II	RMC12.2K	9400	1	0	0.1109	M4
39	WCMDA II	RMC12.2K	9538	1	0	0.1105	M4
78	WCMDA II	RMC12.2K	9400	2	0	0.1029	M4
52	WCMDA II	RMC12.2K	9262	1	1	0.1045	M4
53	WCMDA II	RMC12.2K	9400	1	1	0.1034	M4
54	WCMDA II	RMC12.2K	9538	1	1	0.09860	M4
79	WCMDA II	RMC12.2K	9262	2	1	0.09141	M4
43	WCDMA IV	RMC12.2K	1312	1	0	0.1011	M4
44	WCDMA IV	RMC12.2K	1413	1	0	0.08858	M4
45	WCDMA IV	RMC12.2K	1513	1	0	0.09008	M4
82	WCDMA IV	RMC12.2K	1312	2	0	0.1189	M4
58	WCDMA IV	RMC12.2K	1312	1	1	0.1270	M4
59	WCDMA IV	RMC12.2K	1413	1	1	0.1318	M4
60	WCDMA IV	RMC12.2K	1513	1	1	0.1248	M4
83	WCDMA IV	RMC12.2K	1413	2	1	0.09766	M4
40	WCDMA V	RMC12.2K	4132	1	0	0.09093	M4
41	WCDMA V	RMC12.2K	4182	1	0	0.09201	M4
42	WCDMA V	RMC12.2K	4233	1	0	0.09507	M4
80	WCDMA V	RMC12.2K	4233	2	0	0.09191	M4
55	WCDMA V	RMC12.2K	4132	1	1	0.2181	M4
56	WCDMA V	RMC12.2K	4182	1	1	0.1982	M4
57	WCDMA V	RMC12.2K	4233	1	1	0.1916	M4
81	WCDMA V	RMC12.2K	4132	2	1	0.09314	M4

Test Engineer : Sam Onn and Ulysses Liu



5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
835MHz Calibration Dipole	SPEAG	CD835V3	1041	Mar. 19, 2012	Annual
1880MHz Calibration Dipole	SPEAG	CD1880V3	1032	Apr. 26, 2012	Annual
Isotropic E-Field Probe	SPEAG	ER3DV6	2445	Jun. 22, 2012	Annual
Isotropic H-Field Probe	SPEAG	H3DV6	6274	Feb. 17, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE3	579	Apr. 27, 2012	Annual
Test Arch Phantom	SPEAG	Arch	N/A	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50266628	Nov. 22, 2012	Biennial
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	May 06, 2012	Annual
Power Meter	Anritsu	ML2495A	1218009	May 07, 2012	Annual
Power Sensor	Anritsu	MA2411B	1207252	May 07, 2012	Annual
EXA Spectrum Analyzer	Agilent	N9010A	MY52100136	Apr. 23, 2012	Annual
Directional Coupler	Woken	0110A05602O-10	11122702	Apr. 19, 2012	Annual
Power Amplifier	AR	5S1G4	0339656	Apr. 23, 2012	Annual
Attenuator	Woken	00800A1G01L-03	N/A	Apr. 19, 2012	Annual



FCC HAC (RF Emission) Test Report

6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (E)	Ci (H)	Standard Uncertainty (E)	Standard Uncertainty (H)
Measurement System							
Probe Calibration	5.1	Normal	1	1	1	± 5.1 %	± 5.1 %
Axial Isotropy	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
Sensor Displacement	16.5	Rectangular	√3	1	0.145	± 9.5 %	± 1.4 %
Boundary Effects	2.4	Rectangular	√3	1	1	± 1.4 %	± 1.4 %
Phantom Boundary Effect	7.2	Rectangular	√3	1	0	± 4.1 %	± 0.0 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
Scaling with PMR Calibration	10.0	Rectangular	√3	1	1	± 5.8 %	± 5.8 %
System Detection Limit	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Conditions	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Reflections	12.0	Rectangular	√3	1	1	± 6.9 %	± 6.9 %
Probe Positioner	1.2	Rectangular	√3	1	0.67	± 0.7 %	± 0.5 %
Probe Positioning	4.7	Rectangular	√3	1	0.67	± 2.7 %	± 1.8 %
Extrap. and Interpolation	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning Vertical	4.7	Rectangular	√3	1	0.67	± 2.7 %	± 1.8 %
Device Positioning Lateral	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Device Holder and Phantom	2.4	Rectangular	√3	1	1	± 1.4 %	± 1.4 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup Related							
Phantom Thickness	2.4	Rectangular	√3	1	0.67	± 1.4 %	± 0.9 %
Combined Standard Uncertainty						± 16.3 %	± 12.3 %
Coverage Factor for 95 %						K = 2	
Expanded Uncertainty						± 32.6 %	± 24.6 %

Uncertainty budget for HAC RF Emission



A D T

FCC HAC (RF Emission) Test Report

7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---



Appendix A. Plots of System Verification

The plots for system verification are shown as follows.

System Check_E-Field_835_121219

DUT: HAC Dipole 835 MHz; Type: CD835V3; SN: 1041

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 127.0 V/m; Power Drift = -0.03 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 172.7 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 169.1 V/m	Grid 2 M4 172.7 V/m	Grid 3 M4 162.6 V/m
Grid 4 M4 90.00 V/m	Grid 5 M4 91.76 V/m	Grid 6 M4 87.96 V/m
Grid 7 M4 167.1 V/m	Grid 8 M4 170.2 V/m	Grid 9 M4 160.3 V/m

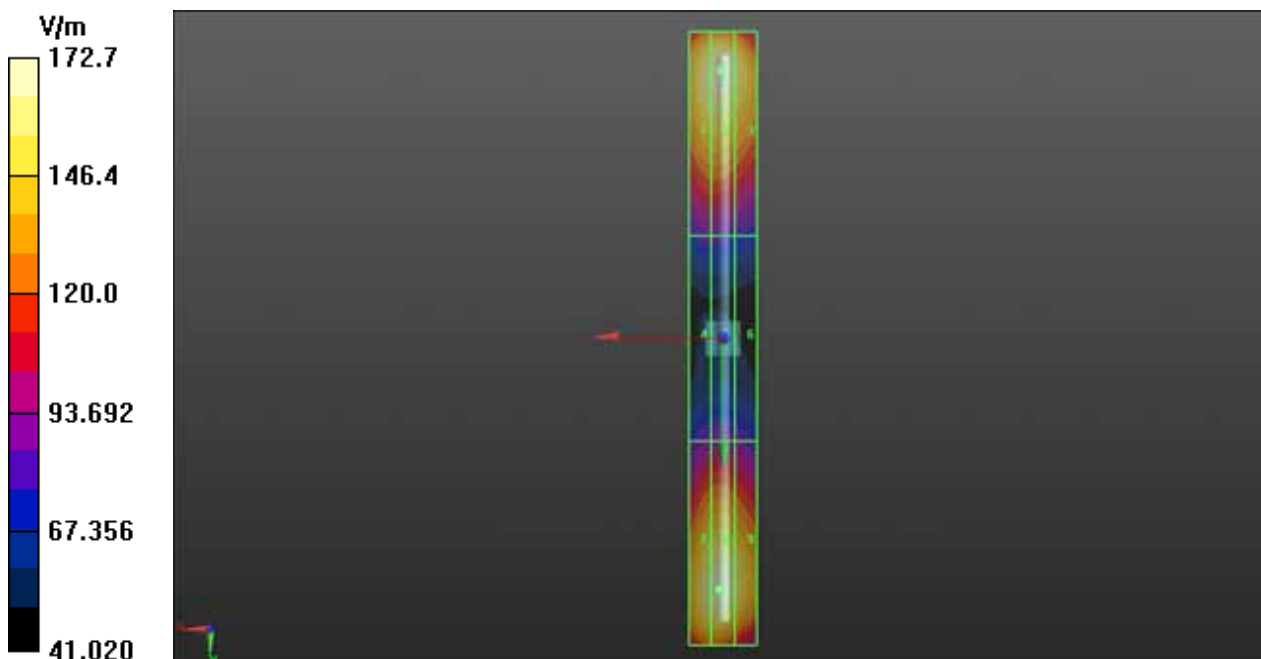

System Check_E-Field_835_130115

DUT: HAC Dipole 835 MHz; Type: CD835V3; SN: 1041

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 124.4 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 170.7 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 167.6 V/m	Grid 2 M4 170.7 V/m	Grid 3 M4 160.1 V/m
Grid 4 M4 88.92 V/m	Grid 5 M4 90.28 V/m	Grid 6 M4 86.35 V/m
Grid 7 M4 165.4 V/m	Grid 8 M4 167.8 V/m	Grid 9 M4 157.5 V/m

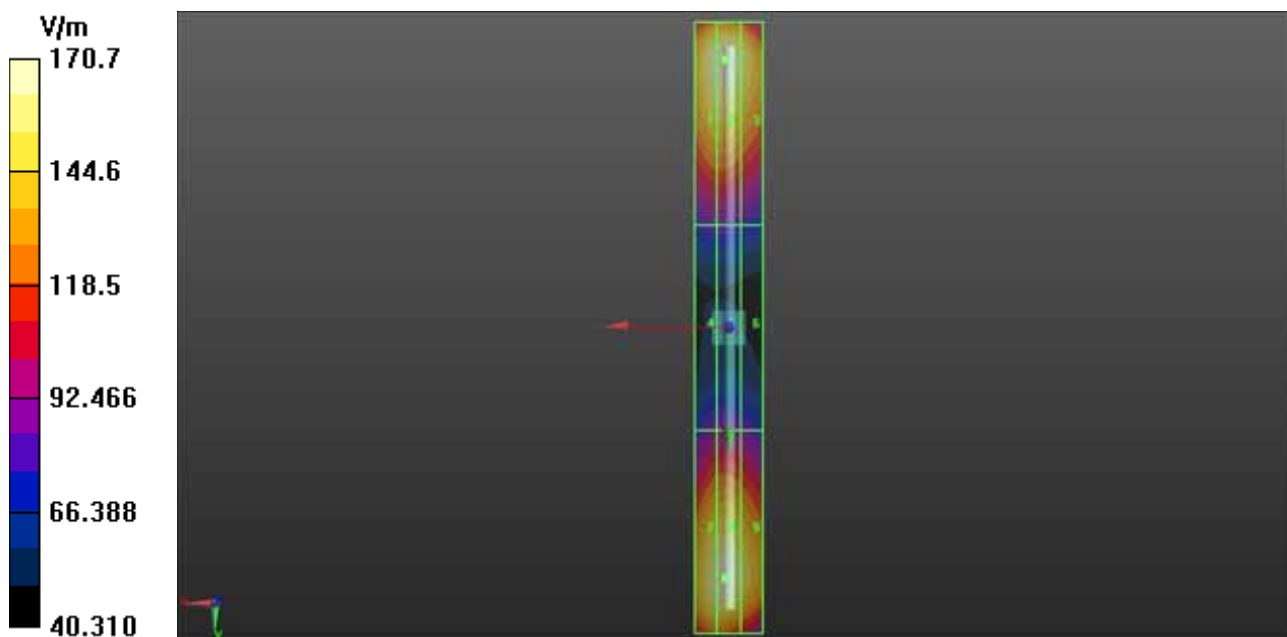

System Check_E-Field_1880_121219

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; SN: 1032

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 145.2 V/m; Power Drift = -0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 140.9 V/m

Near-field category: M2 (AWF 0 dB)

Grid 1 M2 137.8 V/m	Grid 2 M2 139.6 V/m	Grid 3 M2 129.6 V/m
Grid 4 M3 92.16 V/m	Grid 5 M3 95.14 V/m	Grid 6 M3 92.76 V/m
Grid 7 M2 138.9 V/m	Grid 8 M2 140.9 V/m	Grid 9 M2 133.1 V/m

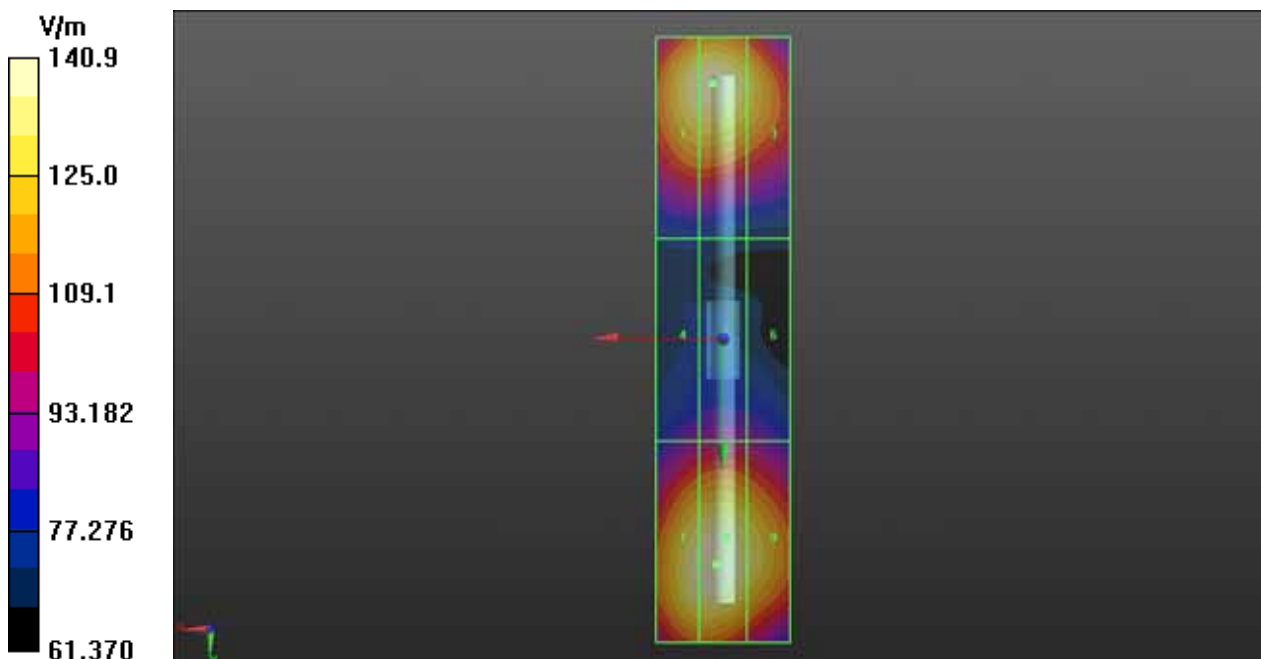

System Check_E-Field_1880_130115

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; SN: 1032

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 135.1 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 131.9 V/m

Near-field category: M2 (AWF 0 dB)

Grid 1 M2 129.2 V/m	Grid 2 M2 130.6 V/m	Grid 3 M2 120.8 V/m
Grid 4 M3 86.41 V/m	Grid 5 M3 88.84 V/m	Grid 6 M3 86.55 V/m
Grid 7 M2 130.2 V/m	Grid 8 M2 131.9 V/m	Grid 9 M2 124.3 V/m

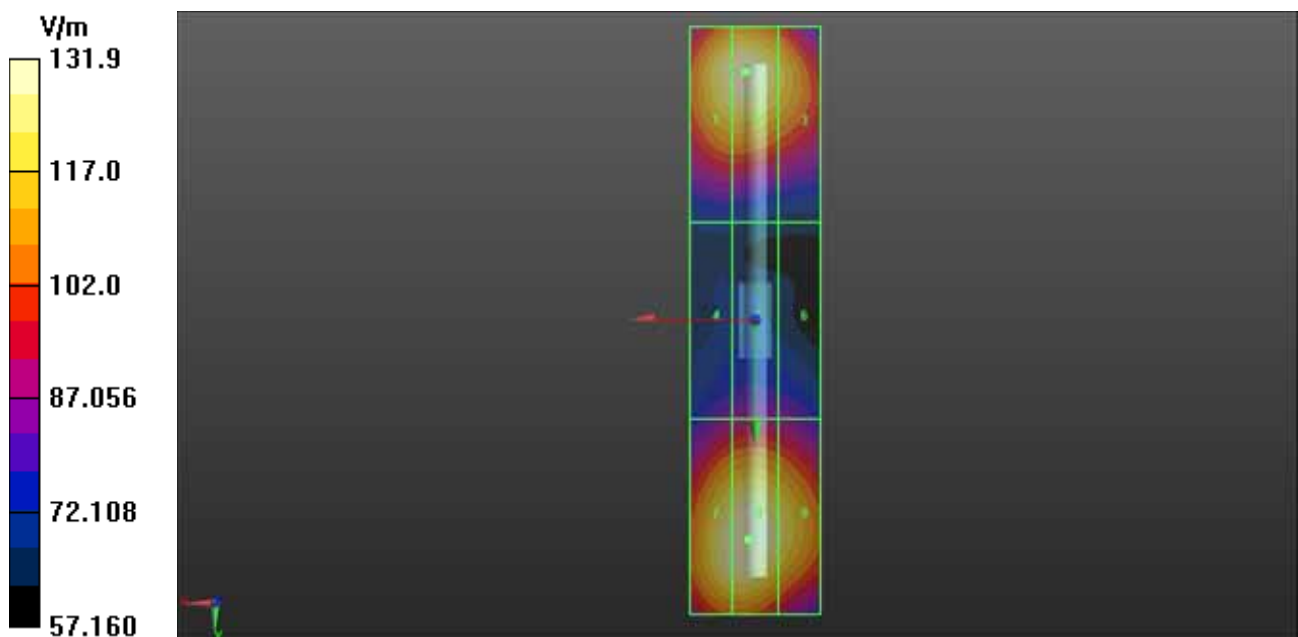

System Check_H-Field_835_121220

DUT: HAC Dipole 835 MHz; Type: CD835V3; SN: 1041

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.4740 A/m; Power Drift = -0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4428 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.373 A/m	Grid 2 M4 0.386 A/m	Grid 3 M4 0.365 A/m
Grid 4 M4 0.426 A/m	Grid 5 M4 0.443 A/m	Grid 6 M4 0.419 A/m
Grid 7 M4 0.374 A/m	Grid 8 M4 0.389 A/m	Grid 9 M4 0.371 A/m

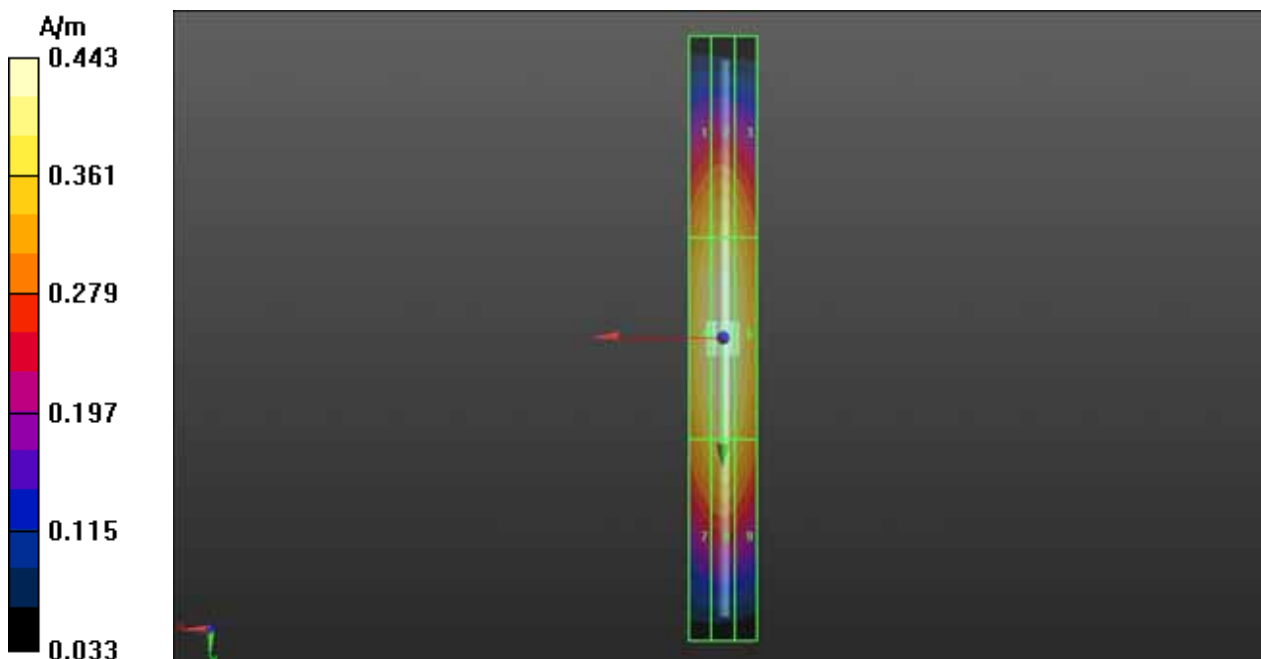

System Check_H-Field_835_130115

DUT: HAC Dipole 835 MHz; Type: CD835V3; SN: 1041

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.4740 A/m; Power Drift = -0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4437 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.374 A/m	Grid 2 M4 0.387 A/m	Grid 3 M4 0.366 A/m
Grid 4 M4 0.427 A/m	Grid 5 M4 0.444 A/m	Grid 6 M4 0.420 A/m
Grid 7 M4 0.375 A/m	Grid 8 M4 0.391 A/m	Grid 9 M4 0.373 A/m

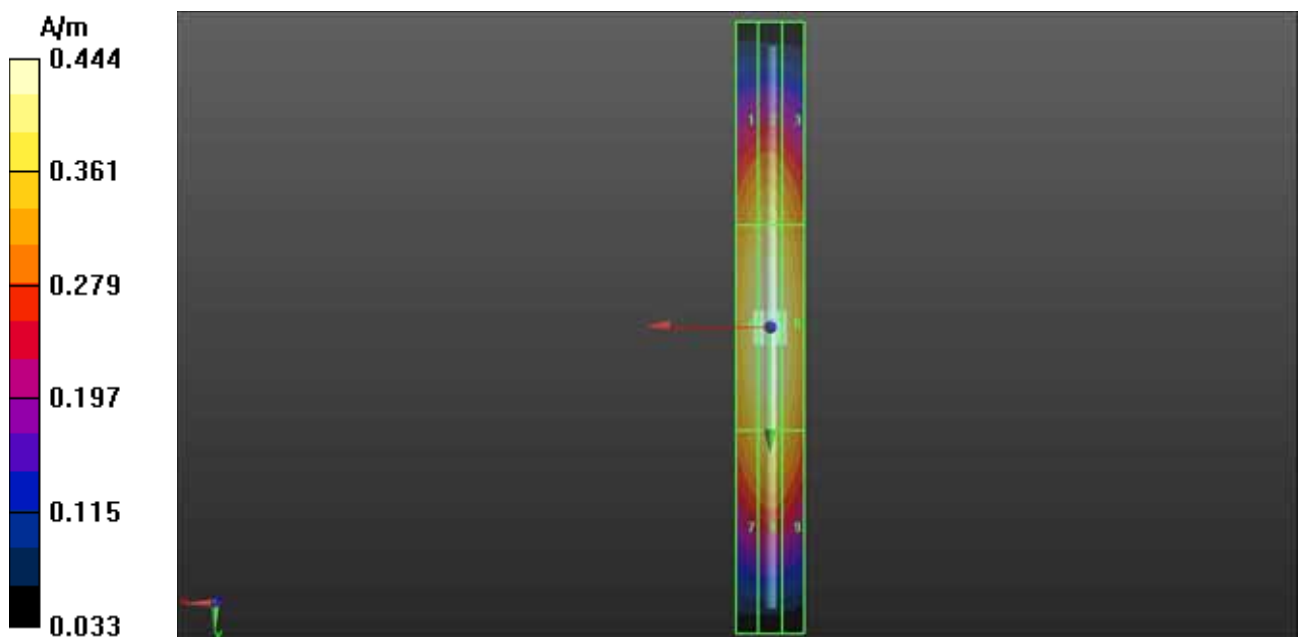

System Check_H-Field_1880_121220

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; SN: 1032

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.4870 A/m; Power Drift = -0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4621 A/m

Near-field category: M2 (AWF 0 dB)

Grid 1 M2 0.408 A/m	Grid 2 M2 0.417 A/m	Grid 3 M2 0.398 A/m
Grid 4 M2 0.451 A/m	Grid 5 M2 0.462 A/m	Grid 6 M2 0.440 A/m
Grid 7 M2 0.414 A/m	Grid 8 M2 0.426 A/m	Grid 9 M2 0.402 A/m

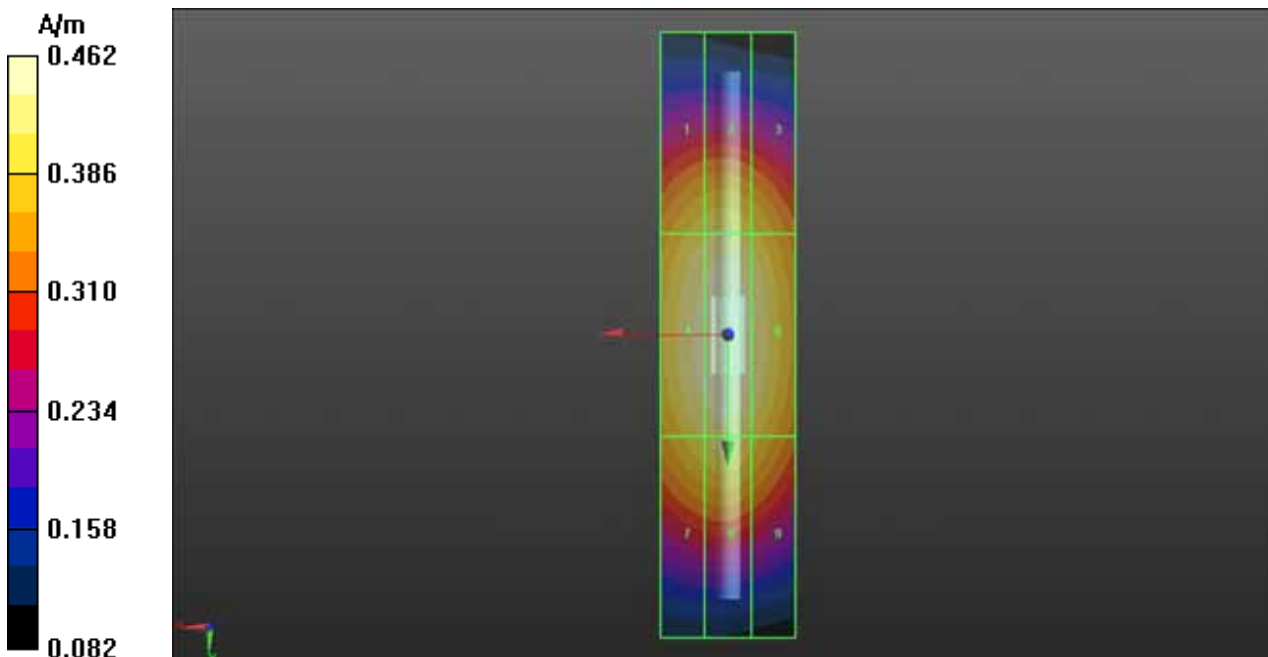

System Check_H-Field_1880_130115

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; SN: 1032

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Hearing Aid Compatibility (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm



Reference Value = 0.4630 A/m; Power Drift = -0.03 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4393 A/m

Near-field category: M2 (AWF 0 dB)

Grid 1 M2 0.388 A/m	Grid 2 M2 0.397 A/m	Grid 3 M2 0.377 A/m
Grid 4 M2 0.428 A/m	Grid 5 M2 0.439 A/m	Grid 6 M2 0.418 A/m
Grid 7 M2 0.392 A/m	Grid 8 M2 0.405 A/m	Grid 9 M2 0.383 A/m

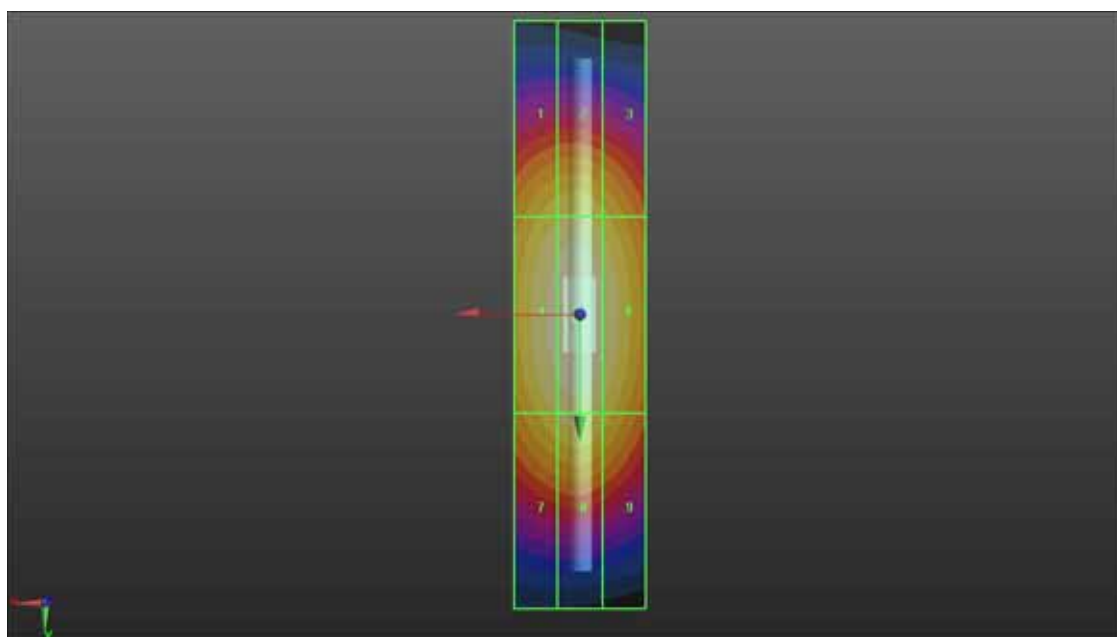



Appendix B. Plots of HAC RF Emission Measurement

The plots for HAC measurement are shown as follows.

P16 E_Field GSM850_GSM_Ch128_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 51.92 V/m; Power Drift = -0.05 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 127.2 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 109.1 V/m	Grid 2 M4 135.2 V/m	Grid 3 M4 134.5 V/m
Grid 4 M4 98.61 V/m	Grid 5 M4 127.2 V/m	Grid 6 M4 127.2 V/m
Grid 7 M4 88.32 V/m	Grid 8 M4 117.6 V/m	Grid 9 M4 117.7 V/m

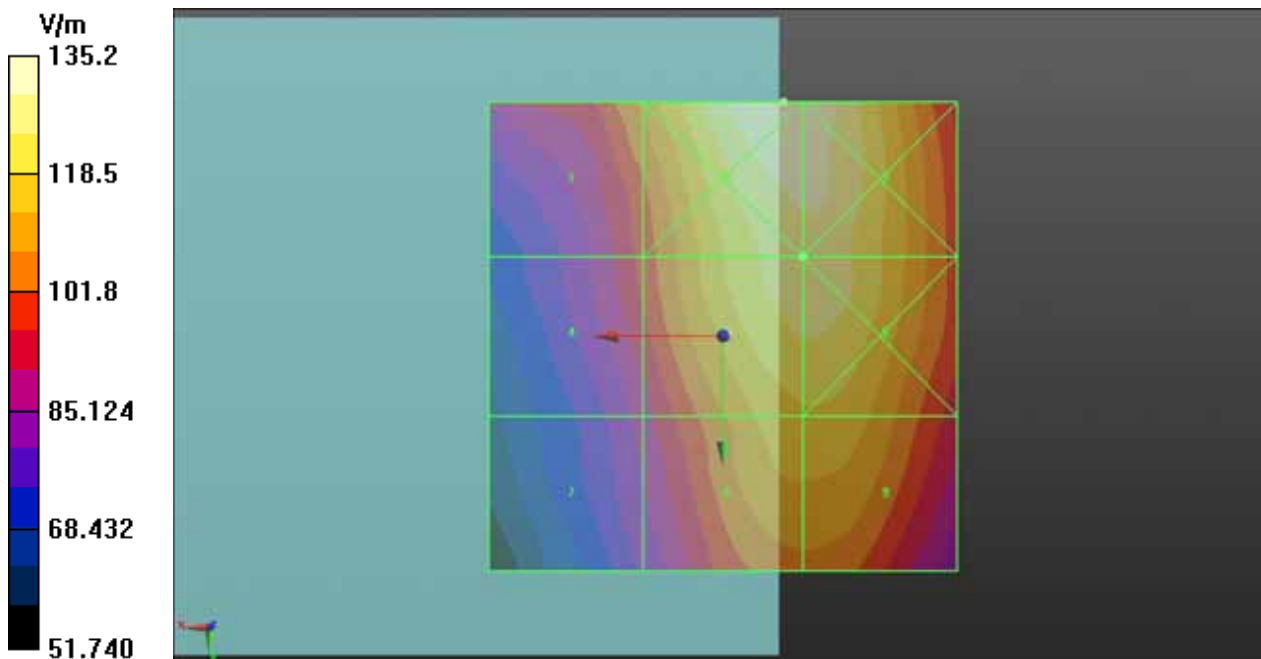

P17 E_Field GSM850_GSM_Ch189_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch189/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 52.13 V/m; Power Drift = -0.06 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 126.2 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 109.5 V/m	Grid 2 M4 133.3 V/m	Grid 3 M4 132.3 V/m
Grid 4 M4 97.31 V/m	Grid 5 M4 126.2 V/m	Grid 6 M4 126.2 V/m
Grid 7 M4 88.40 V/m	Grid 8 M4 115.9 V/m	Grid 9 M4 116.0 V/m

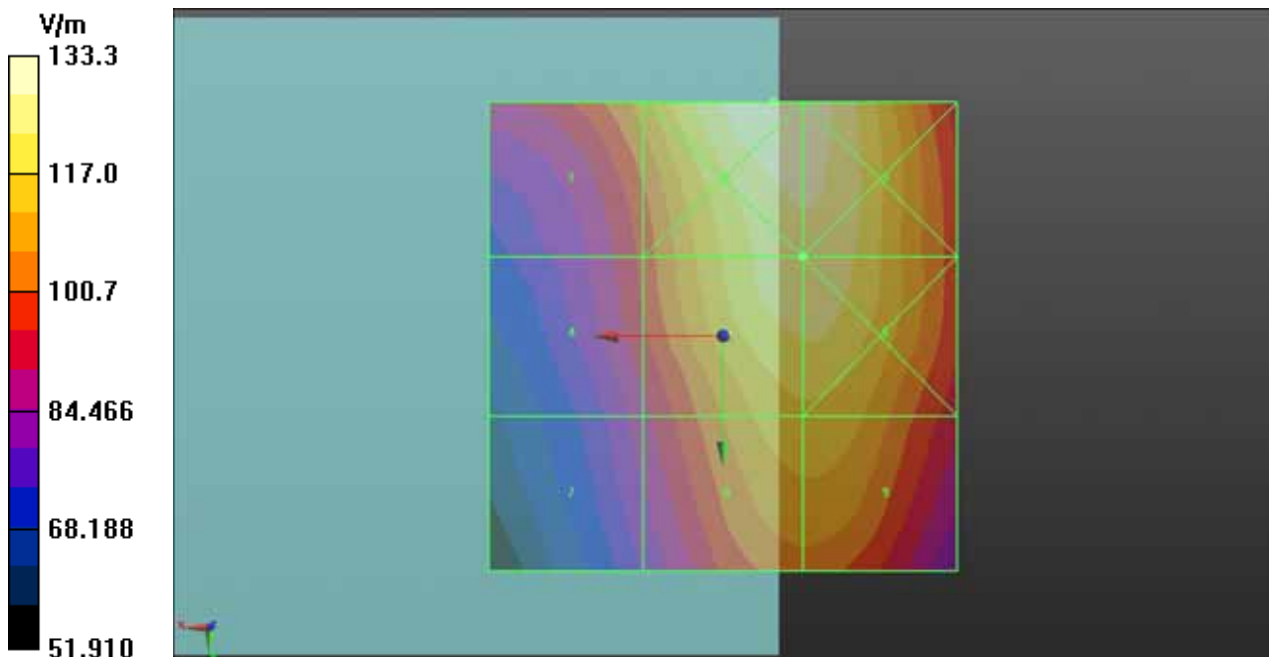

P18 E_Field GSM850_GSM_Ch251_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch251/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 50.12 V/m; Power Drift = -0.13 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 121.1 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 104.0 V/m	Grid 2 M4 127.4 V/m	Grid 3 M4 126.4 V/m
Grid 4 M4 93.15 V/m	Grid 5 M4 121.1 V/m	Grid 6 M4 121.1 V/m
Grid 7 M4 83.05 V/m	Grid 8 M4 110.5 V/m	Grid 9 M4 110.5 V/m

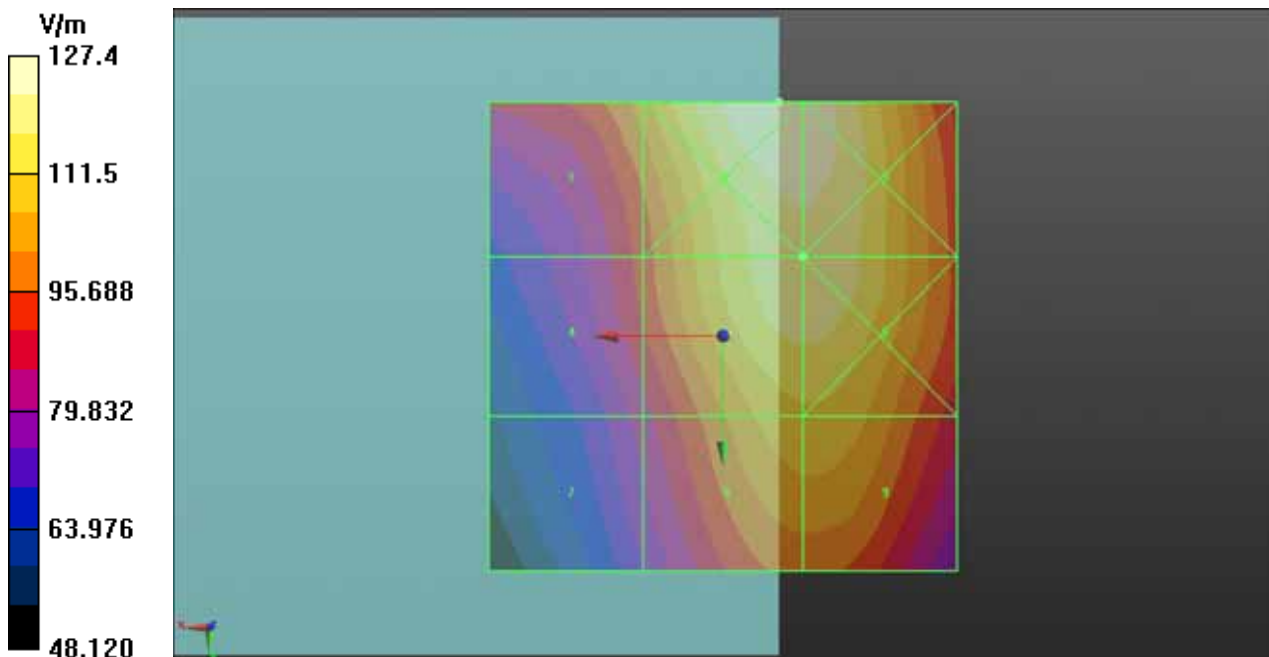

P71 E_Field GSM850_Ch128_ANT0

DUT: 121129C10

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 60.02 V/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 144.0 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 131.9 V/m	Grid 2 M4 149.4 V/m	Grid 3 M4 146.1 V/m
Grid 4 M4 120.2 V/m	Grid 5 M4 144.0 V/m	Grid 6 M4 143.4 V/m
Grid 7 M4 110.4 V/m	Grid 8 M4 135.2 V/m	Grid 9 M4 135.0 V/m

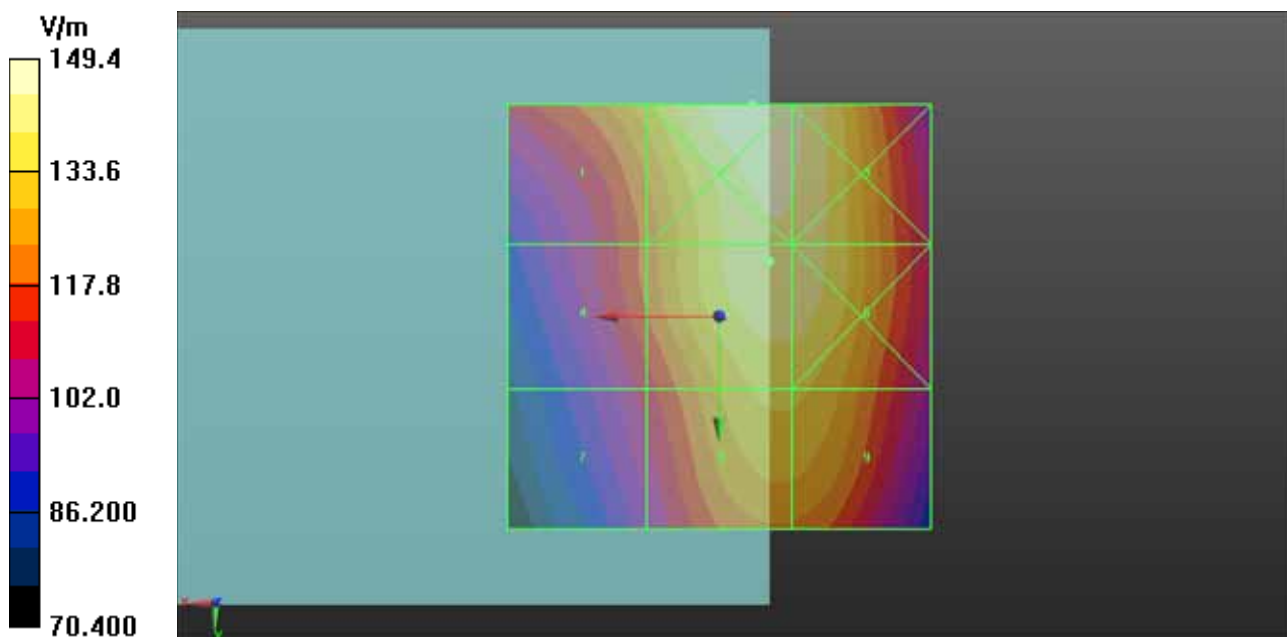

P01 E_Field GSM850_GSM_Ch128_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 49.05 V/m; Power Drift = -0.09 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 122.4 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 142.8 V/m	Grid 2 M3 157.1 V/m	Grid 3 M4 110.3 V/m
Grid 4 M4 111.6 V/m	Grid 5 M4 122.4 V/m	Grid 6 M4 90.74 V/m
Grid 7 M4 64.25 V/m	Grid 8 M4 71.35 V/m	Grid 9 M4 68.19 V/m

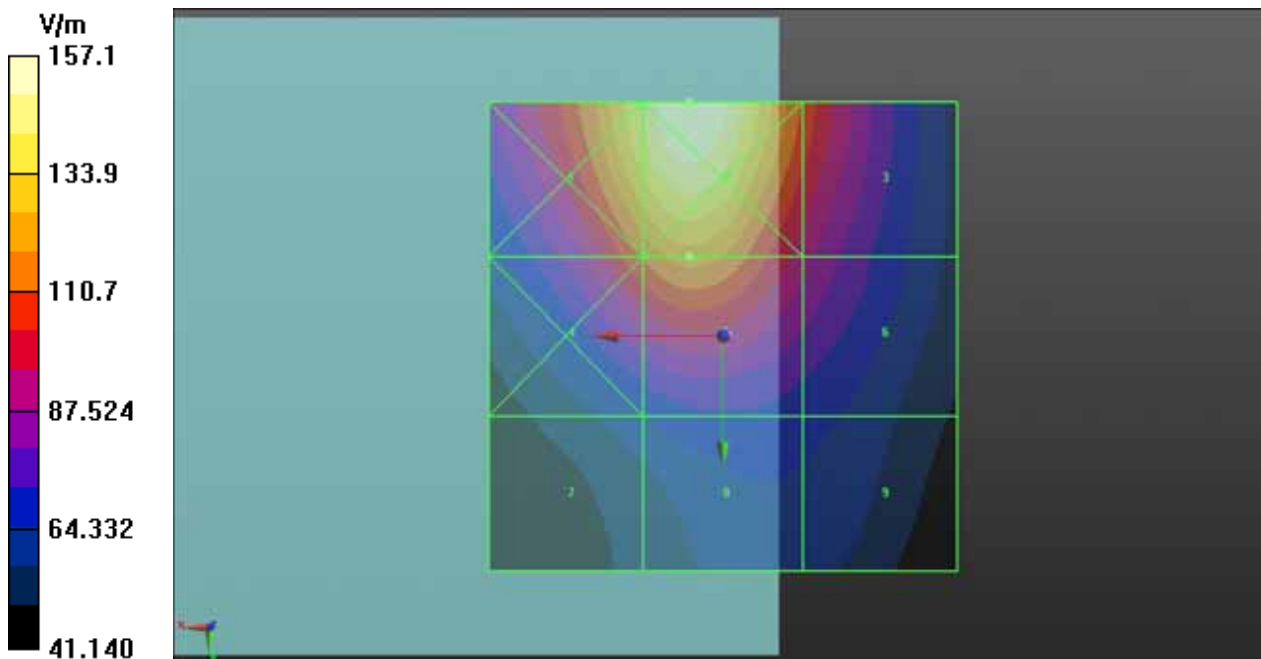

P02 E_Field GSM850_GSM_Ch189_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch189/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 47.63 V/m; Power Drift = -0.01 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 118.9 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 138.7 V/m	Grid 2 M3 152.7 V/m	Grid 3 M4 107.9 V/m
Grid 4 M4 108.6 V/m	Grid 5 M4 118.9 V/m	Grid 6 M4 89.19 V/m
Grid 7 M4 63.57 V/m	Grid 8 M4 70.49 V/m	Grid 9 M4 67.44 V/m

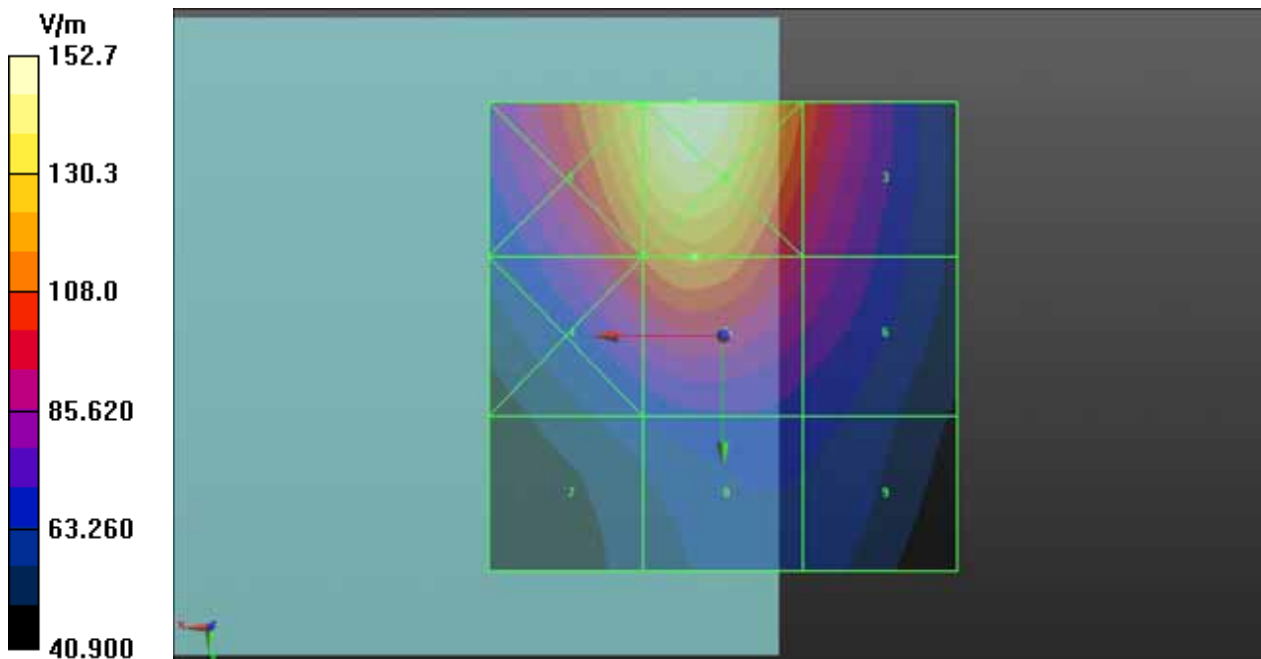

P03 E_Field GSM850_GSM_Ch251_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch251/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 47.12 V/m; Power Drift = -0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 118.5 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 138.9 V/m	Grid 2 M3 151.8 V/m	Grid 3 M4 106.1 V/m
Grid 4 M4 108.8 V/m	Grid 5 M4 118.5 V/m	Grid 6 M4 87.60 V/m
Grid 7 M4 63.69 V/m	Grid 8 M4 69.88 V/m	Grid 9 M4 66.45 V/m

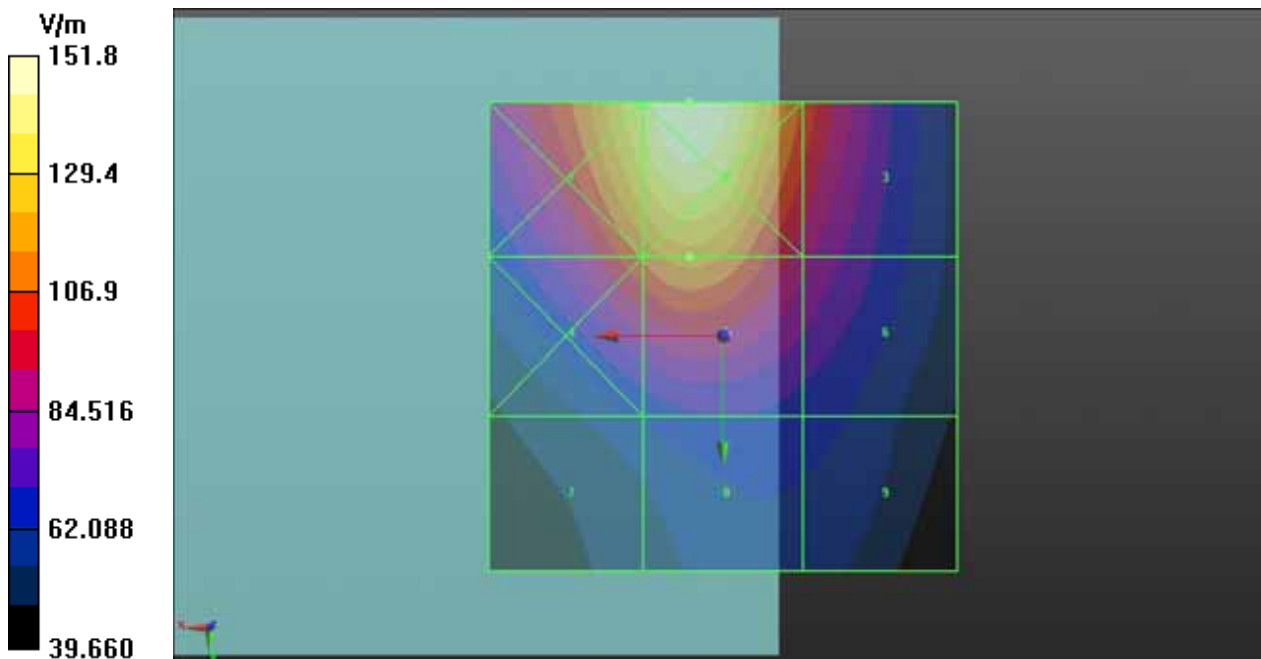

P66 E_Field GSM850_Ch128_ANT1

DUT: 121129C10

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 26.55 V/m; Power Drift = -0.04 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 67.27 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 77.15 V/m	Grid 2 M4 84.11 V/m	Grid 3 M4 59.10 V/m
Grid 4 M4 61.57 V/m	Grid 5 M4 67.27 V/m	Grid 6 M4 50.44 V/m
Grid 7 M4 37.68 V/m	Grid 8 M4 41.44 V/m	Grid 9 M4 40.06 V/m

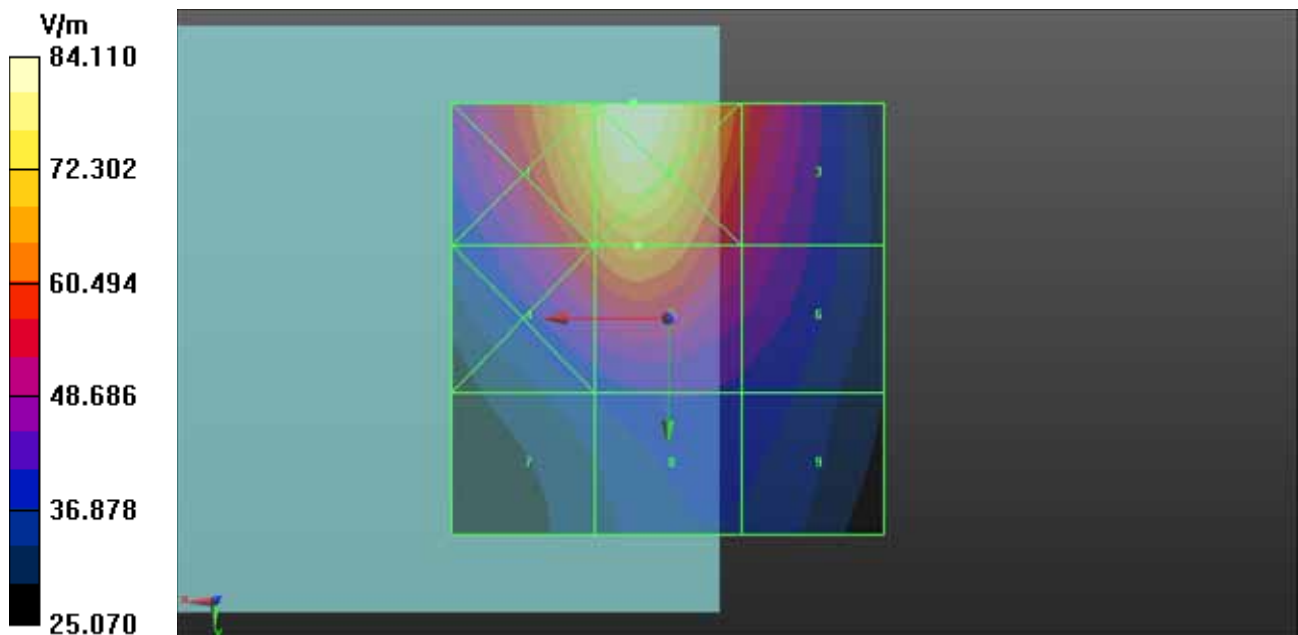

P19 E_Field GSM1900_GSM_Ch512_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch512/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 21.04 V/m; Power Drift = -0.10 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 71.66 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 77.77 V/m	Grid 2 M3 76.87 V/m	Grid 3 M3 52.52 V/m
Grid 4 M3 57.61 V/m	Grid 5 M3 65.43 V/m	Grid 6 M3 66.48 V/m
Grid 7 M4 44.73 V/m	Grid 8 M3 71.15 V/m	Grid 9 M3 71.66 V/m

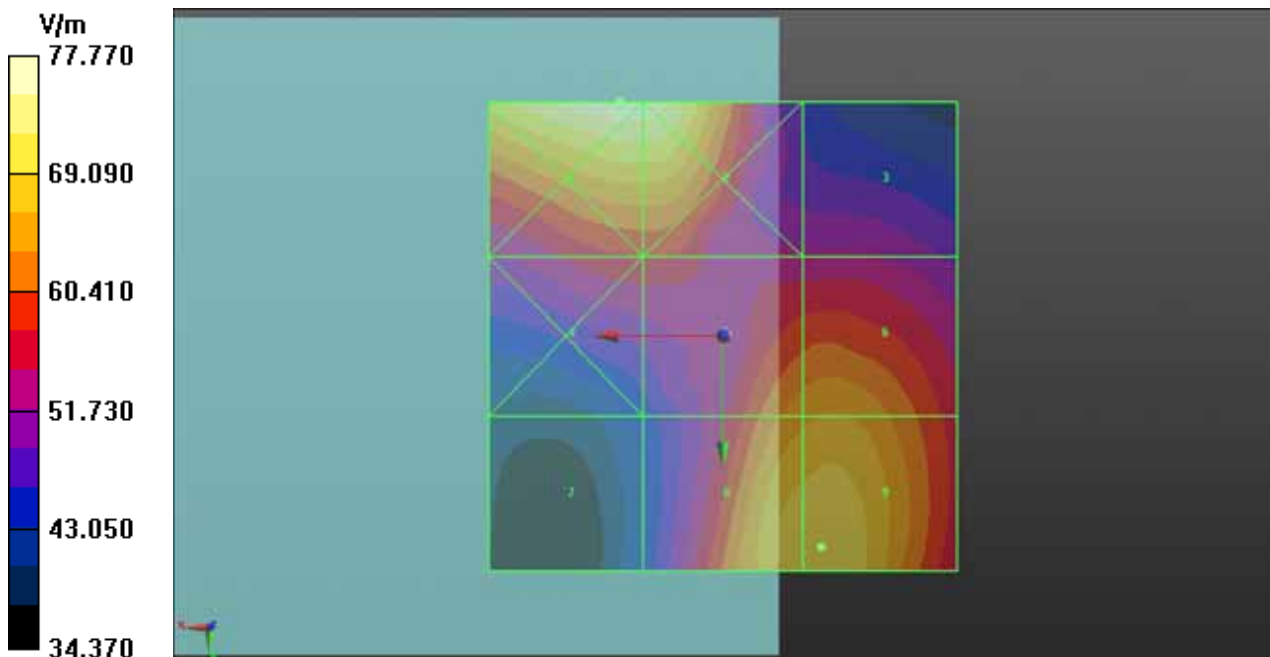

P20 E_Field GSM1900_GSM_Ch661_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 22.19 V/m; Power Drift = -0.09 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 74.06 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 73.72 V/m	Grid 2 M3 74.06 V/m	Grid 3 M3 57.48 V/m
Grid 4 M3 53.80 V/m	Grid 5 M3 71.11 V/m	Grid 6 M3 72.85 V/m
Grid 7 M4 45.56 V/m	Grid 8 M3 78.04 V/m	Grid 9 M3 79.05 V/m

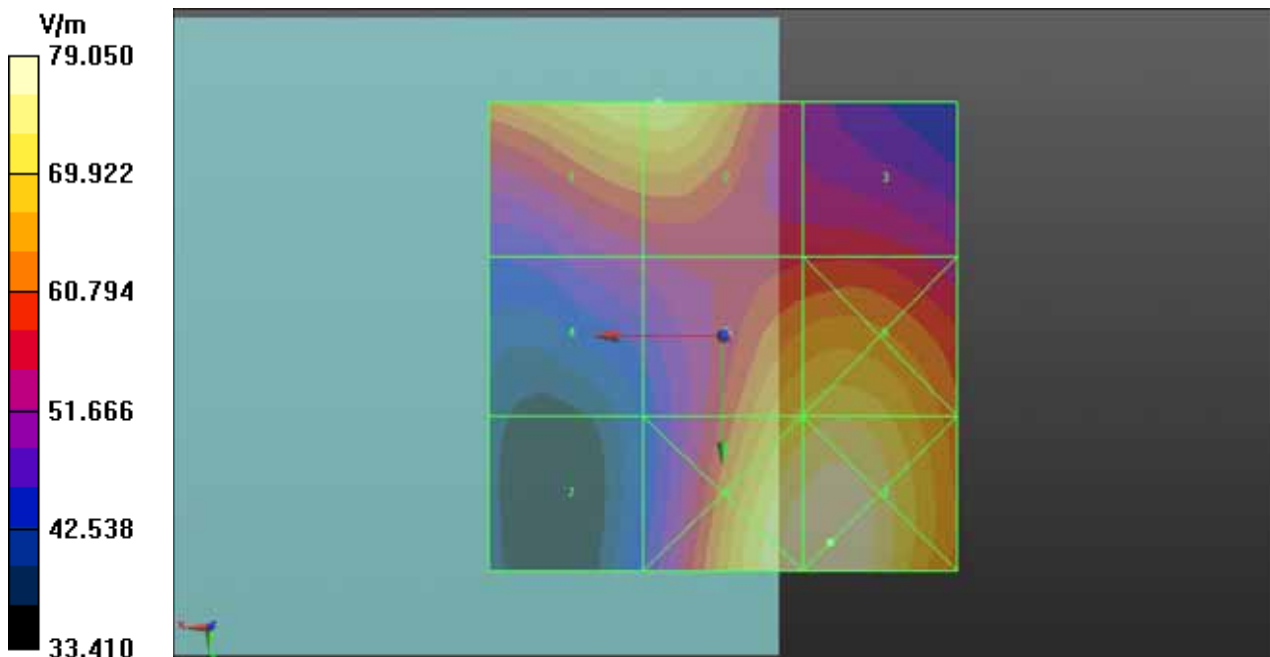

P21 E_Field GSM1900_GSM_Ch810_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch810/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 23.06 V/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 76.33 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 75.78 V/m	Grid 2 M3 76.33 V/m	Grid 3 M3 64.06 V/m
Grid 4 M3 55.55 V/m	Grid 5 M3 73.87 V/m	Grid 6 M3 76.24 V/m
Grid 7 M4 44.39 V/m	Grid 8 M3 78.21 V/m	Grid 9 M3 80.12 V/m

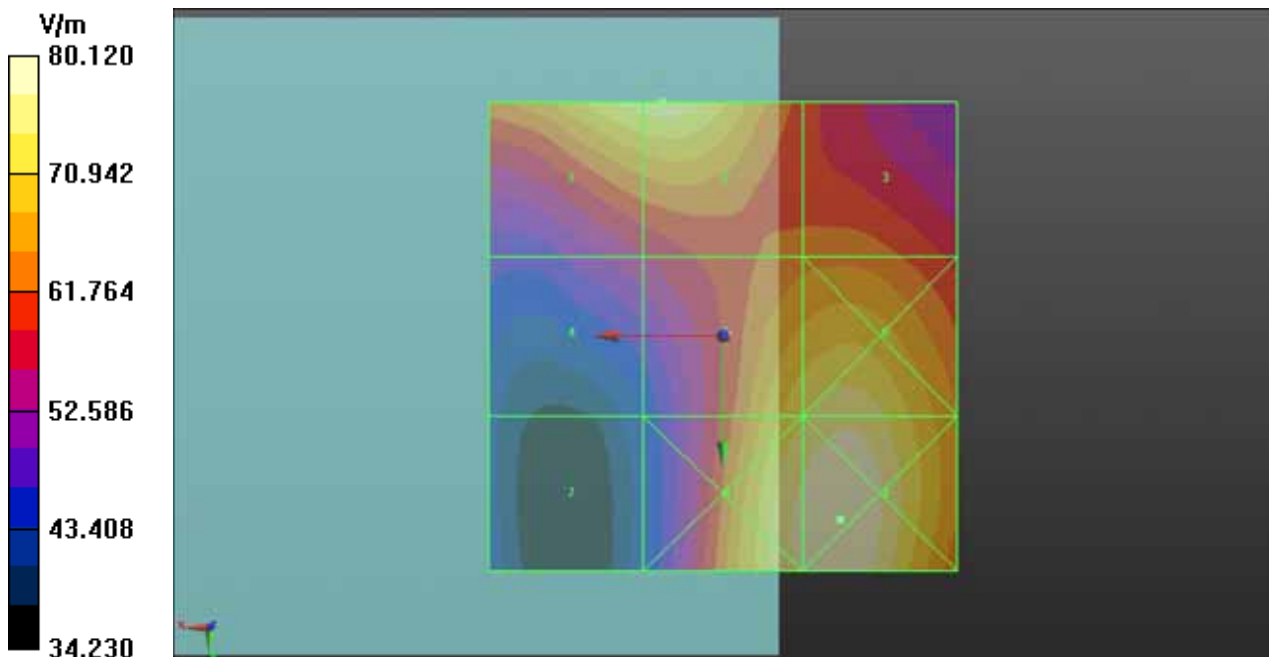

P62 E_Field GSM1900_Ch810_ANT0

DUT: 121129C10

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch810/Hearing Aid Compatibility (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 26.12 V/m; Power Drift = 0.04 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 82.01 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 69.62 V/m	Grid 2 M3 68.47 V/m	Grid 3 M3 69.86 V/m
Grid 4 M3 48.65 V/m	Grid 5 M3 82.01 V/m	Grid 6 M3 83.97 V/m
Grid 7 M3 47.87 V/m	Grid 8 M2 87.08 V/m	Grid 9 M2 88.41 V/m

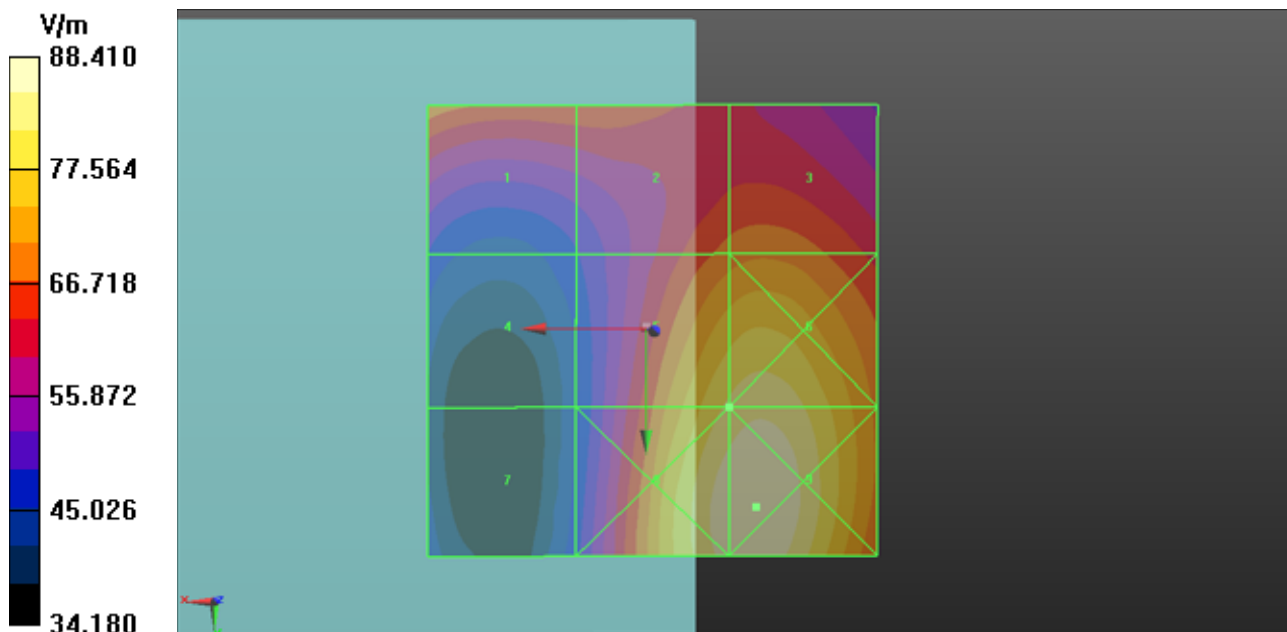

P04 E_Field GSM1900_GSM_Ch512_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch512/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 24.20 V/m; Power Drift = -0.03 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 60.66 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 82.70 V/m	Grid 2 M2 90.73 V/m	Grid 3 M3 68.90 V/m
Grid 4 M3 56.42 V/m	Grid 5 M3 60.66 V/m	Grid 6 M3 51.11 V/m
Grid 7 M4 32.28 V/m	Grid 8 M4 38.16 V/m	Grid 9 M4 37.95 V/m

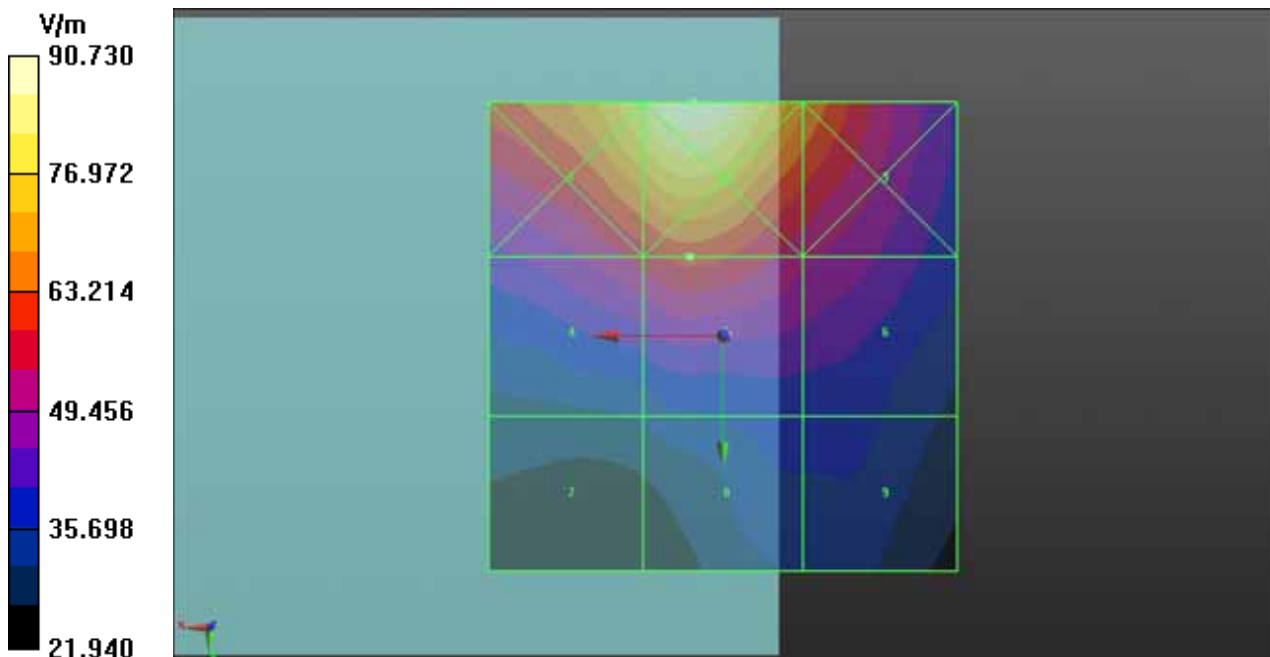

P05 E_Field GSM1900_GSM_Ch661_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 23.75 V/m; Power Drift = 0.00 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 58.92 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 79.74 V/m	Grid 2 M2 88.21 V/m	Grid 3 M3 69.30 V/m
Grid 4 M3 54.07 V/m	Grid 5 M3 58.92 V/m	Grid 6 M3 51.96 V/m
Grid 7 M4 31.12 V/m	Grid 8 M4 39.08 V/m	Grid 9 M4 39.20 V/m

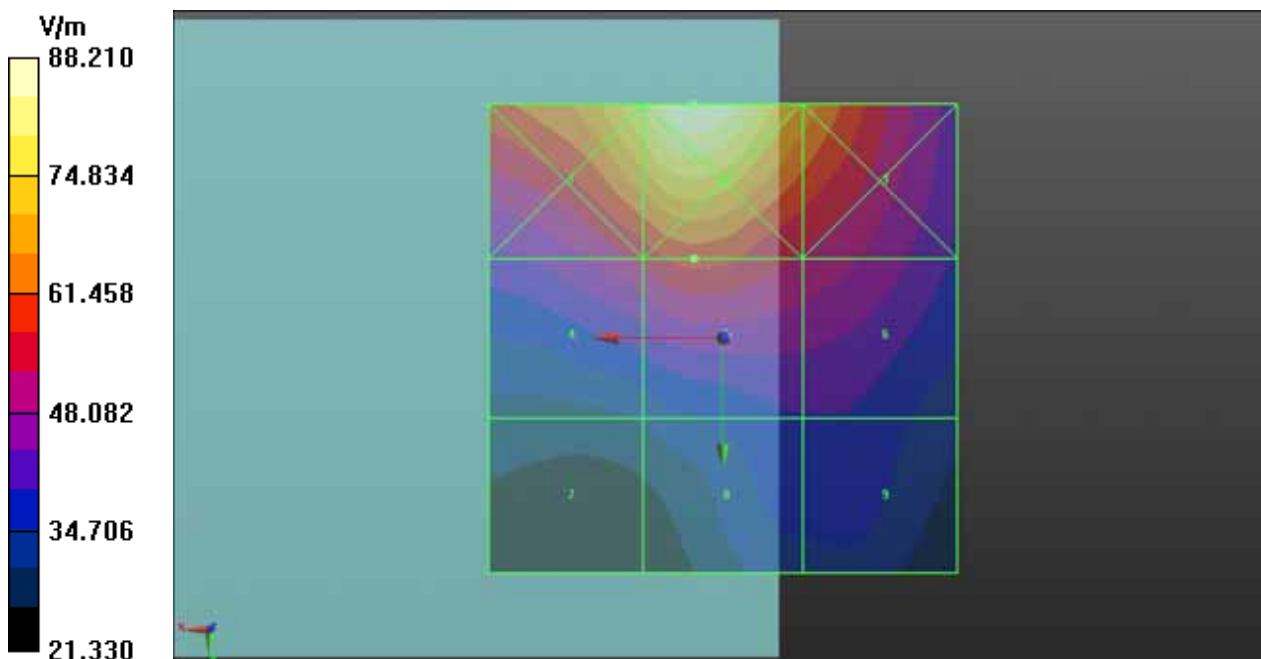

P06 E_Field GSM1900_GSM_Ch810_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch810/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 22.43 V/m; Power Drift = -0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 55.48 V/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 74.19 V/m	Grid 2 M3 82.57 V/m	Grid 3 M3 66.28 V/m
Grid 4 M3 50.59 V/m	Grid 5 M3 55.48 V/m	Grid 6 M3 50.38 V/m
Grid 7 M4 29.97 V/m	Grid 8 M4 38.22 V/m	Grid 9 M4 38.28 V/m

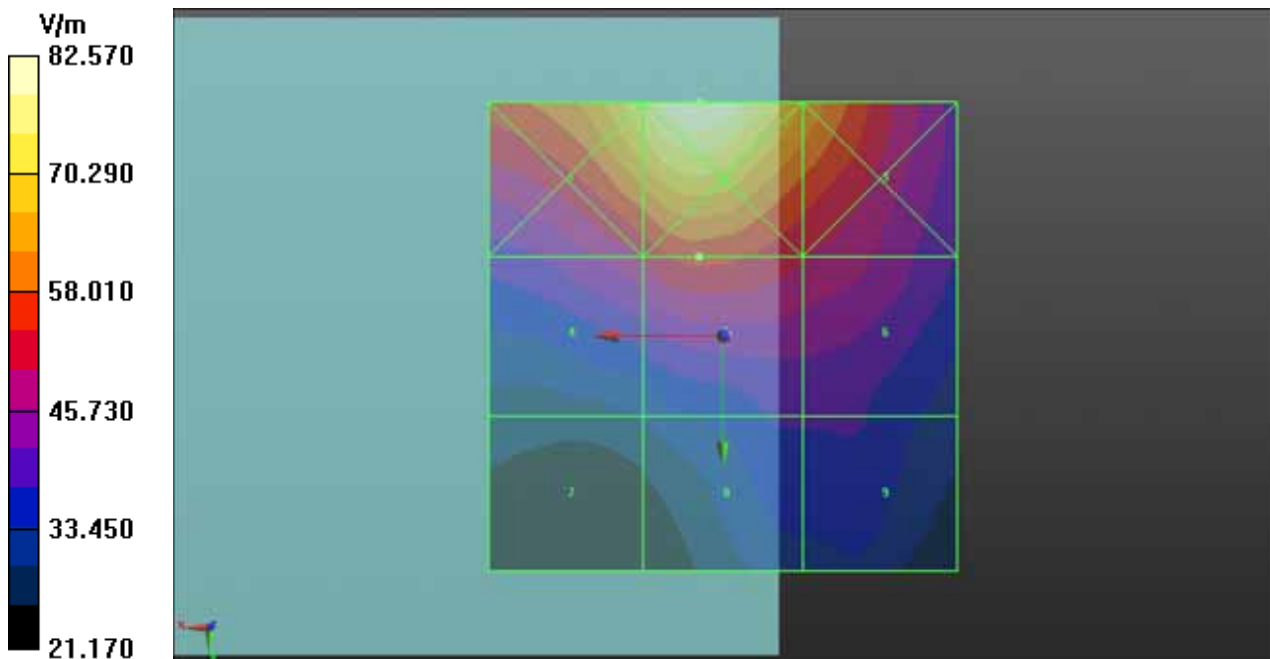

P67 E_Field GSM1900_Ch512_ANT1

DUT: 121129C10

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch512/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 17.80 V/m; Power Drift = 0.12 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

E-field emissions = 45.88 V/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M3 66.68 V/m	Grid 2 M3 71.49 V/m	Grid 3 M3 52.25 V/m
Grid 4 M4 43.58 V/m	Grid 5 M4 45.88 V/m	Grid 6 M4 38.46 V/m
Grid 7 M4 25.38 V/m	Grid 8 M4 27.35 V/m	Grid 9 M4 27.51 V/m

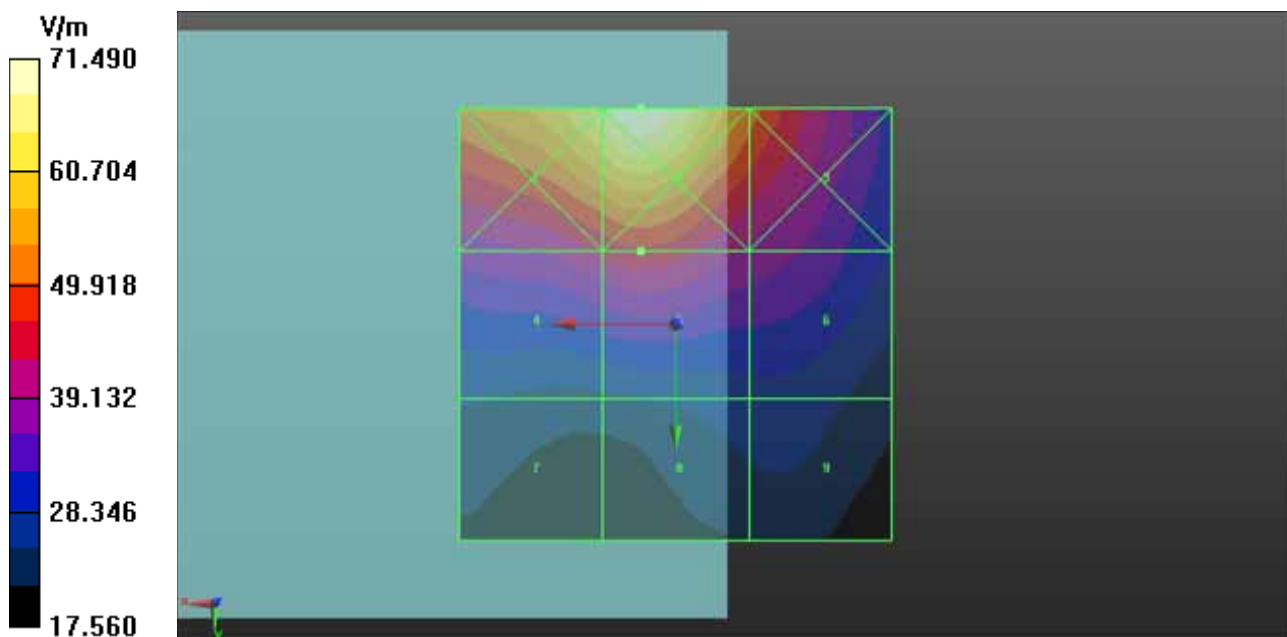

P25 E_Field WCDMA V_RMC12.2K_Ch4132_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 51.57 V/m; Power Drift = 0.04 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 44.26 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 37.25 V/m	Grid 2 M4 46.43 V/m	Grid 3 M4 46.35 V/m
Grid 4 M4 33.19 V/m	Grid 5 M4 44.26 V/m	Grid 6 M4 44.26 V/m
Grid 7 M4 30.41 V/m	Grid 8 M4 40.53 V/m	Grid 9 M4 40.58 V/m

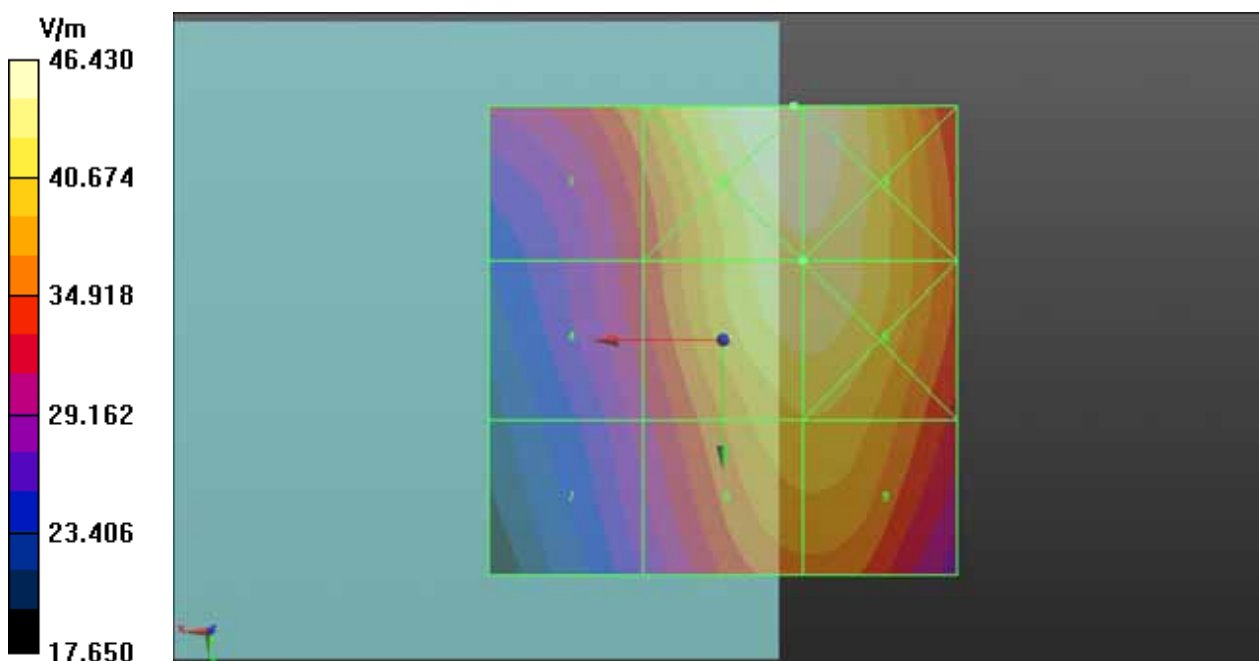

P26 E_Field WCDMA V_RMC12.2K_Ch4182_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4182/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 49.78 V/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 42.51 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 36.66 V/m	Grid 2 M4 44.88 V/m	Grid 3 M4 44.63 V/m
Grid 4 M4 32.38 V/m	Grid 5 M4 42.51 V/m	Grid 6 M4 42.52 V/m
Grid 7 M4 29.08 V/m	Grid 8 M4 38.83 V/m	Grid 9 M4 38.89 V/m

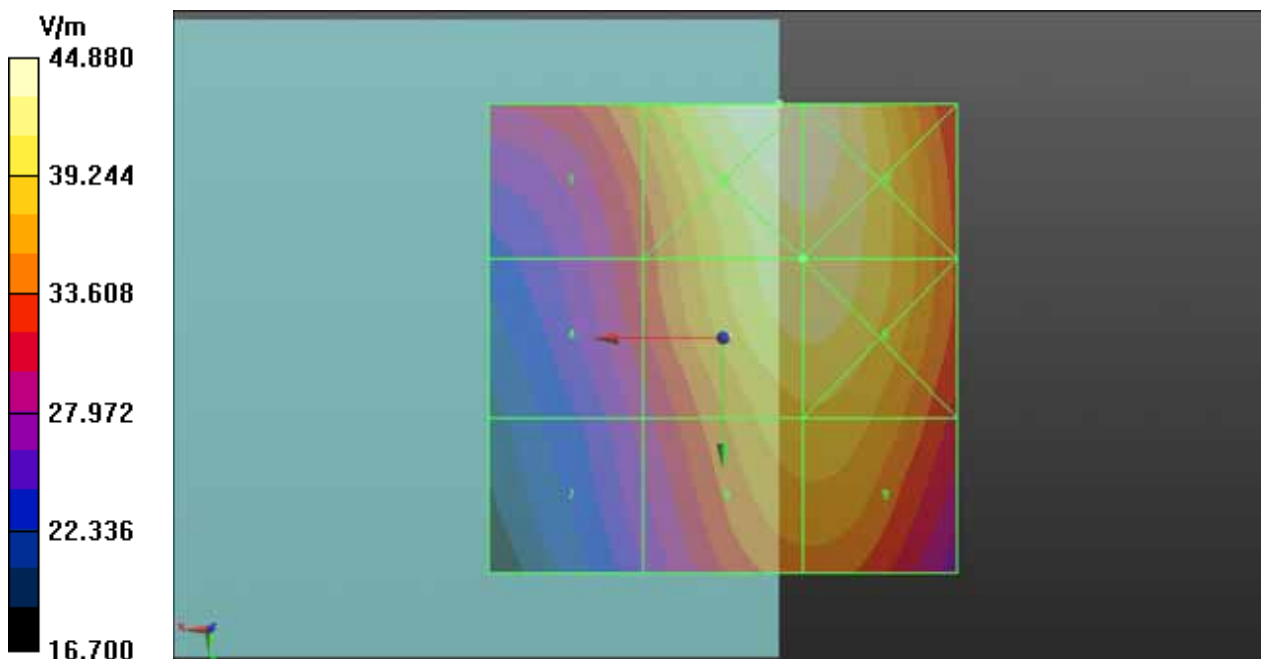

P27 E_Field WCDMA V_RMC12.2K_Ch4233_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4233/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 50.90 V/m; Power Drift = -0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 43.43 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 37.39 V/m	Grid 2 M4 45.63 V/m	Grid 3 M4 45.61 V/m
Grid 4 M4 32.95 V/m	Grid 5 M4 43.43 V/m	Grid 6 M4 43.57 V/m
Grid 7 M4 29.23 V/m	Grid 8 M4 39.42 V/m	Grid 9 M4 39.66 V/m

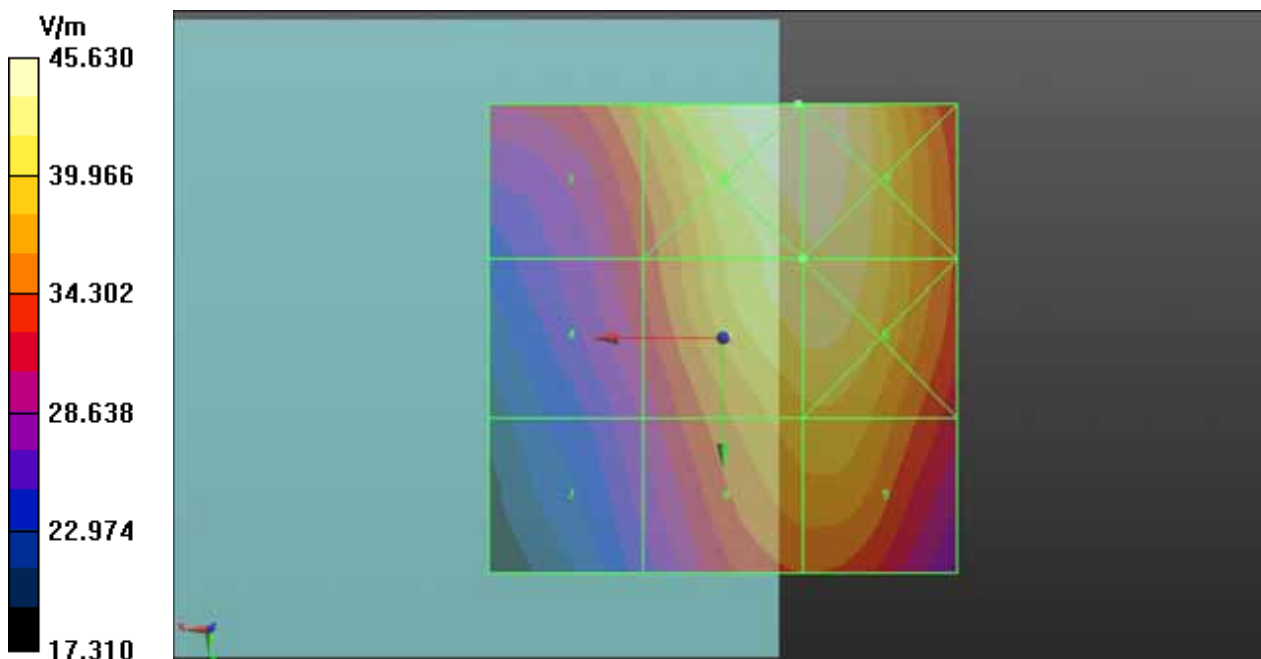

P64 E_Field WCDMA V_RMC12.2K_Ch4132_ANT0

DUT: 121129C10

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 57.16 V/m; Power Drift = 0.09 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 47.81 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 44.05 V/m	Grid 2 M4 49.75 V/m	Grid 3 M4 48.76 V/m
Grid 4 M4 39.88 V/m	Grid 5 M4 47.81 V/m	Grid 6 M4 47.65 V/m
Grid 7 M4 36.50 V/m	Grid 8 M4 44.83 V/m	Grid 9 M4 44.80 V/m

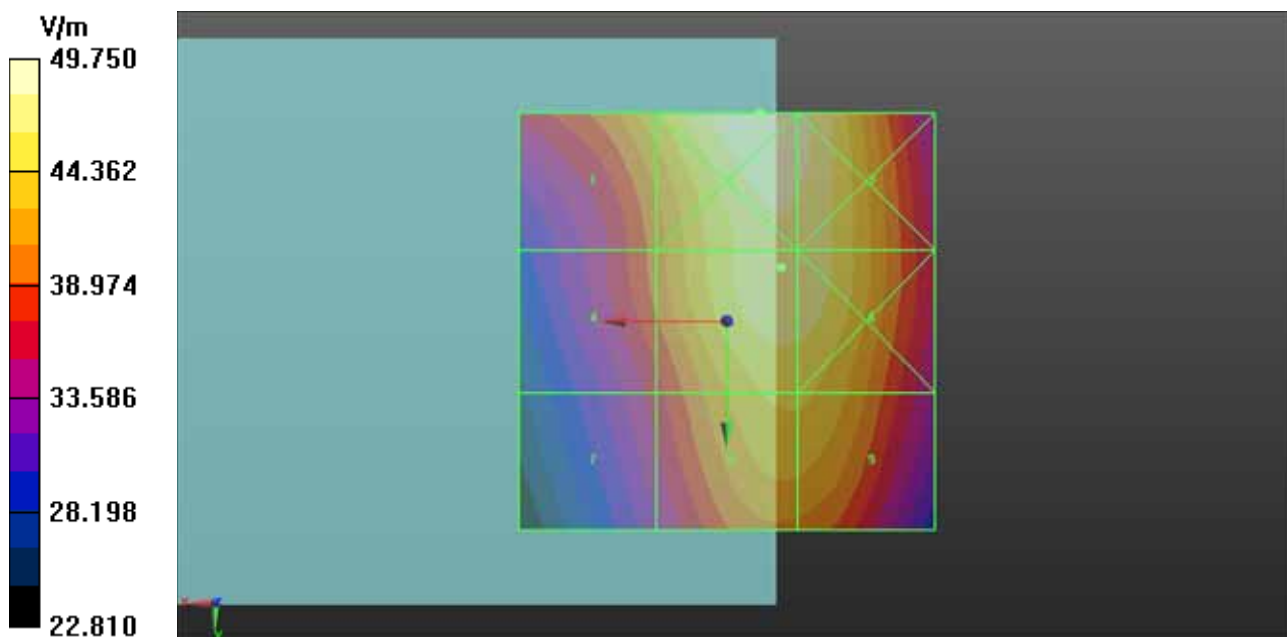

P10 E_Field WCDMA V_RMC12.2K_Ch4132_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 56.69 V/m; Power Drift = -0.04 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 49.50 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 57.86 V/m	Grid 2 M4 63.33 V/m	Grid 3 M4 43.58 V/m
Grid 4 M4 45.34 V/m	Grid 5 M4 49.50 V/m	Grid 6 M4 35.89 V/m
Grid 7 M4 26.33 V/m	Grid 8 M4 28.82 V/m	Grid 9 M4 27.11 V/m

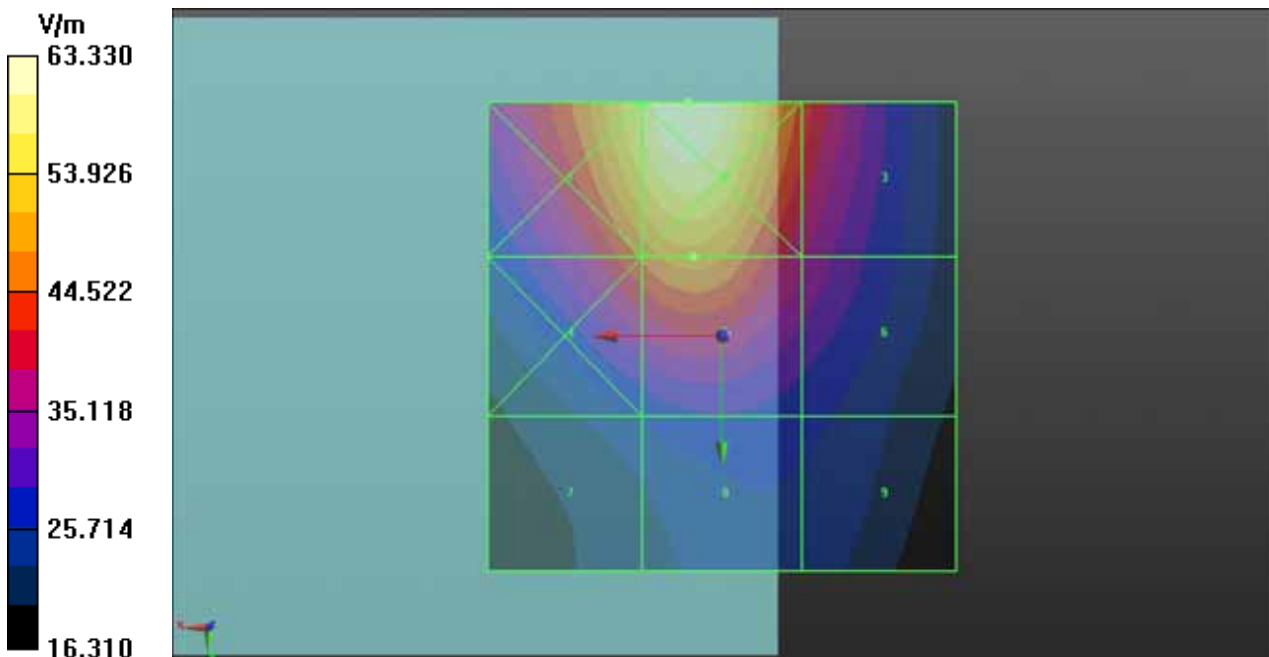

P11 E_Field WCDMA V_RMC12.2K_Ch4182_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4182/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 51.10 V/m; Power Drift = 0.08 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 44.94 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 52.40 V/m	Grid 2 M4 57.45 V/m	Grid 3 M4 39.79 V/m
Grid 4 M4 41.19 V/m	Grid 5 M4 44.94 V/m	Grid 6 M4 32.77 V/m
Grid 7 M4 24.24 V/m	Grid 8 M4 26.44 V/m	Grid 9 M4 24.81 V/m

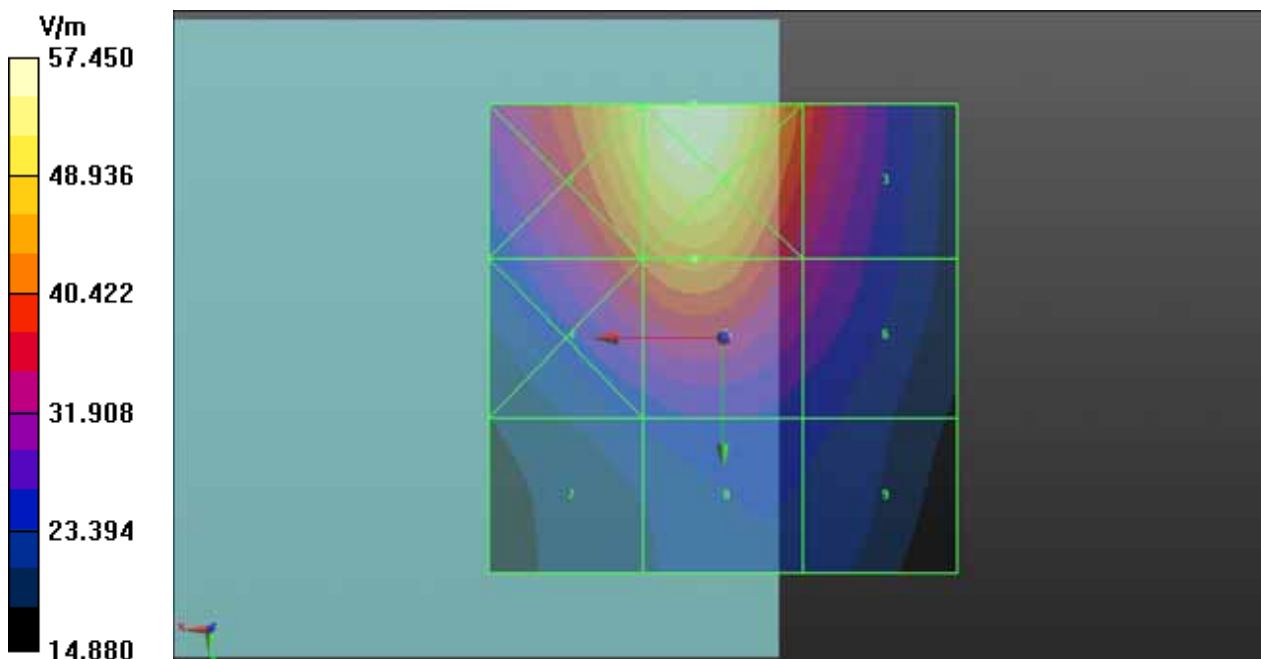

P12 E_Field WCDMA V_RMC12.2K_Ch4233_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4233/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 50.28 V/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 44.78 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 52.88 V/m	Grid 2 M4 57.47 V/m	Grid 3 M4 39.01 V/m
Grid 4 M4 41.10 V/m	Grid 5 M4 44.78 V/m	Grid 6 M4 31.94 V/m
Grid 7 M4 23.80 V/m	Grid 8 M4 25.58 V/m	Grid 9 M4 23.84 V/m

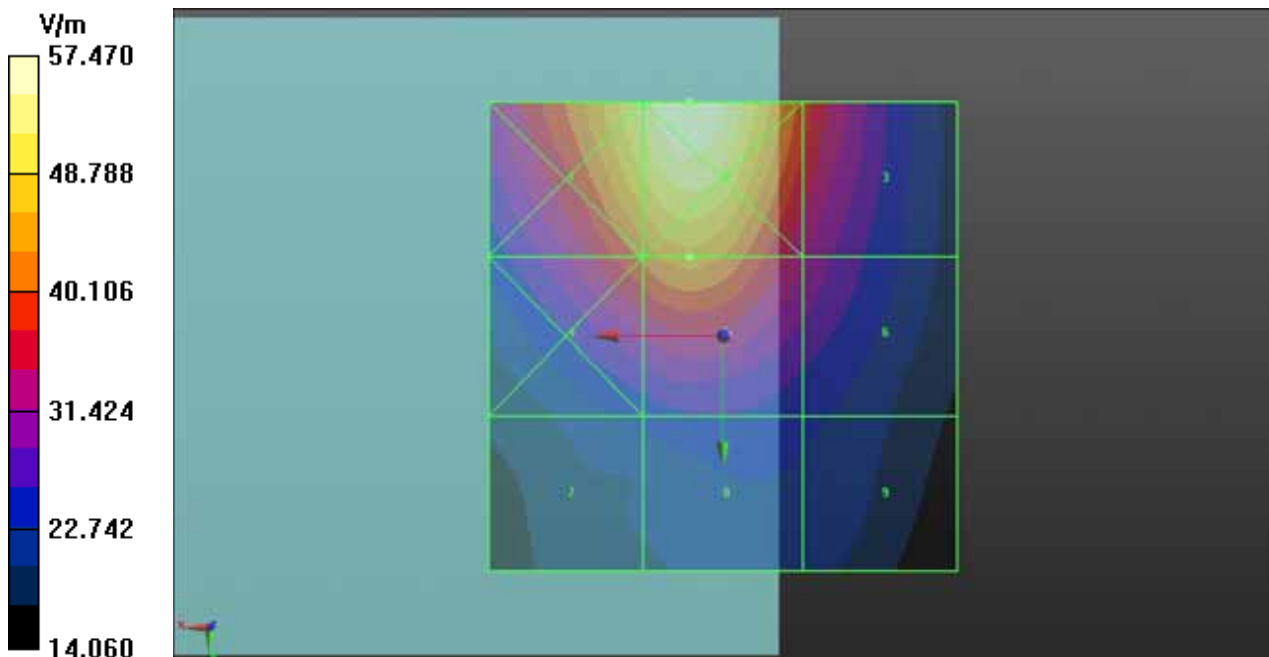

P69 E_Field WCDMA V_RMC12.2K_Ch4132_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 38.83 V/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 33.67 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 38.32 V/m	Grid 2 M4 41.72 V/m	Grid 3 M4 29.89 V/m
Grid 4 M4 30.91 V/m	Grid 5 M4 33.67 V/m	Grid 6 M4 25.83 V/m
Grid 7 M4 19.85 V/m	Grid 8 M4 21.85 V/m	Grid 9 M4 21.05 V/m

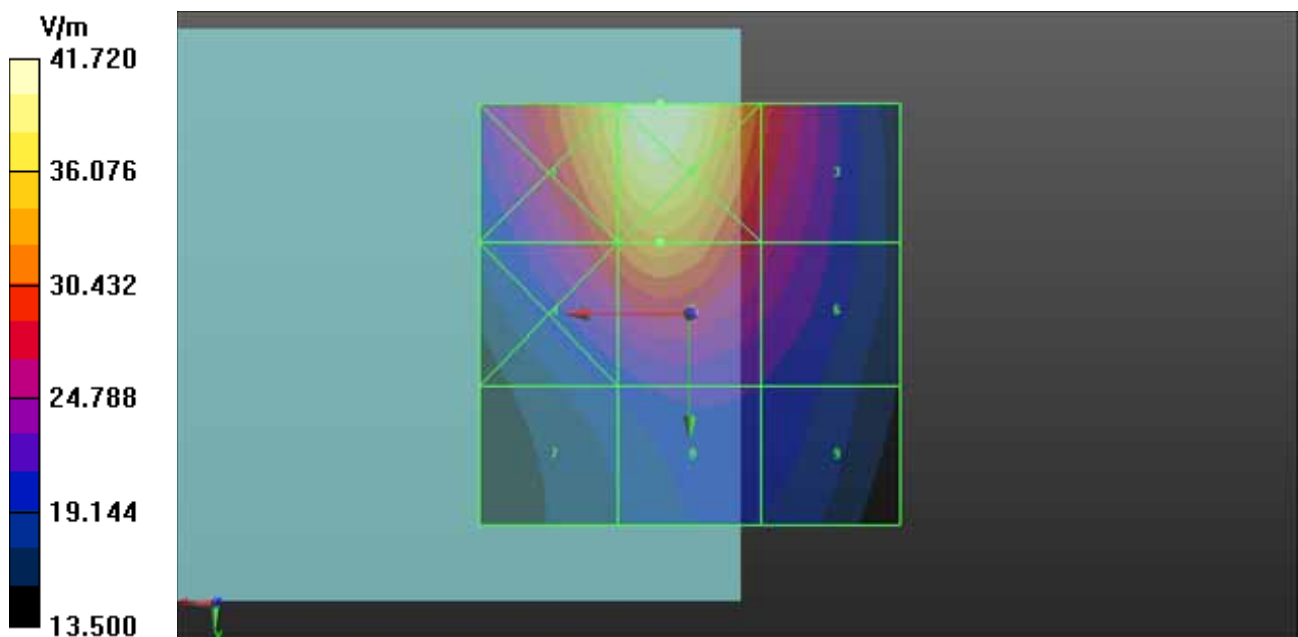

P28 E_Field WCDMA IV_RMC12.2K_Ch1312_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 32.56 V/m; Power Drift = -0.07 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 32.77 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 32.77 V/m	Grid 2 M4 29.96 V/m	Grid 3 M4 30.76 V/m
Grid 4 M4 23.48 V/m	Grid 5 M4 32.00 V/m	Grid 6 M4 32.73 V/m
Grid 7 M4 19.36 V/m	Grid 8 M4 32.14 V/m	Grid 9 M4 32.79 V/m

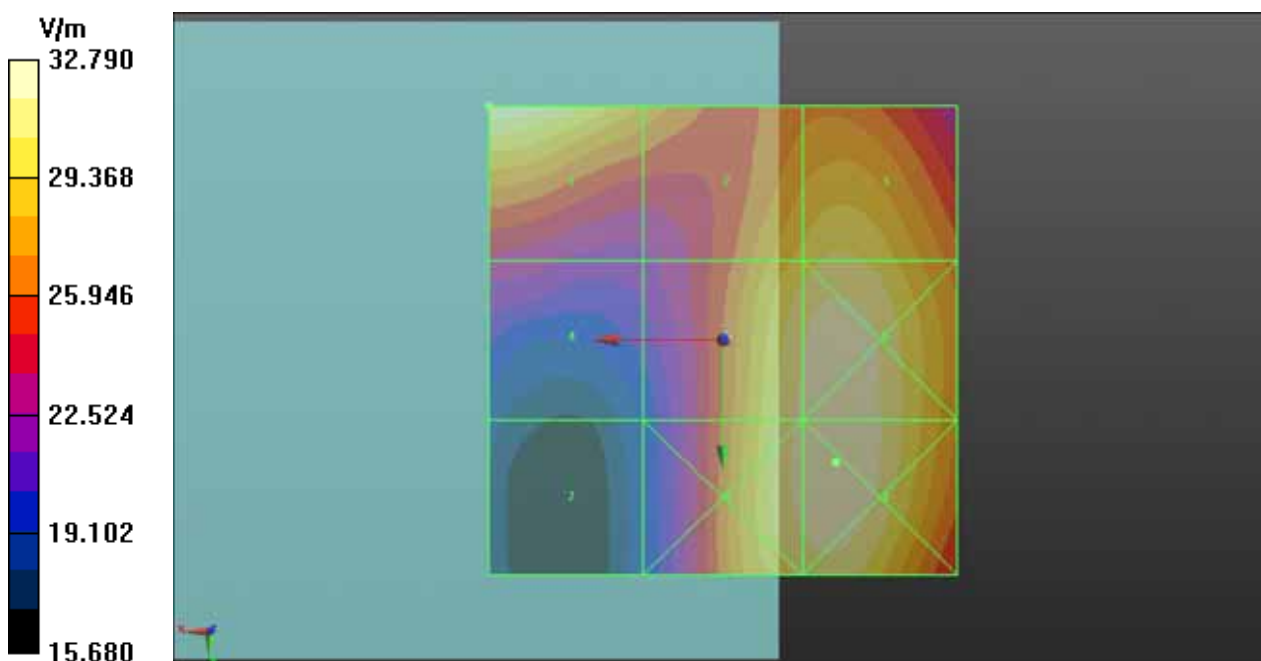

P29 E_Field WCDMA IV_RMC12.2K_Ch1413_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1413/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 28.77 V/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 30.04 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 31.39 V/m	Grid 2 M4 26.61 V/m	Grid 3 M4 27.79 V/m
Grid 4 M4 22.57 V/m	Grid 5 M4 29.04 V/m	Grid 6 M4 29.91 V/m
Grid 7 M4 18.11 V/m	Grid 8 M4 29.32 V/m	Grid 9 M4 30.04 V/m

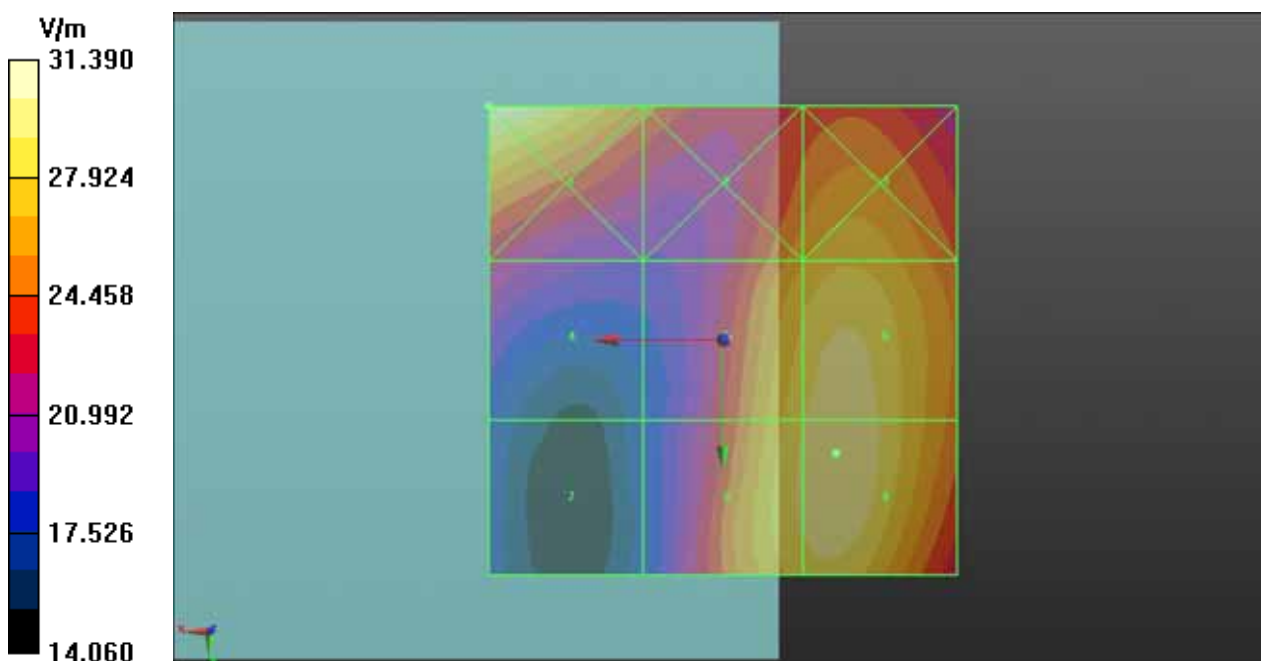

P30 E_Field WCDMA IV_RMC12.2K_Ch1513_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1513/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 30.56 V/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 32.05 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 34.03 V/m	Grid 2 M4 27.87 V/m	Grid 3 M4 29.23 V/m
Grid 4 M4 24.10 V/m	Grid 5 M4 30.80 V/m	Grid 6 M4 31.75 V/m
Grid 7 M4 19.01 V/m	Grid 8 M4 31.42 V/m	Grid 9 M4 32.05 V/m

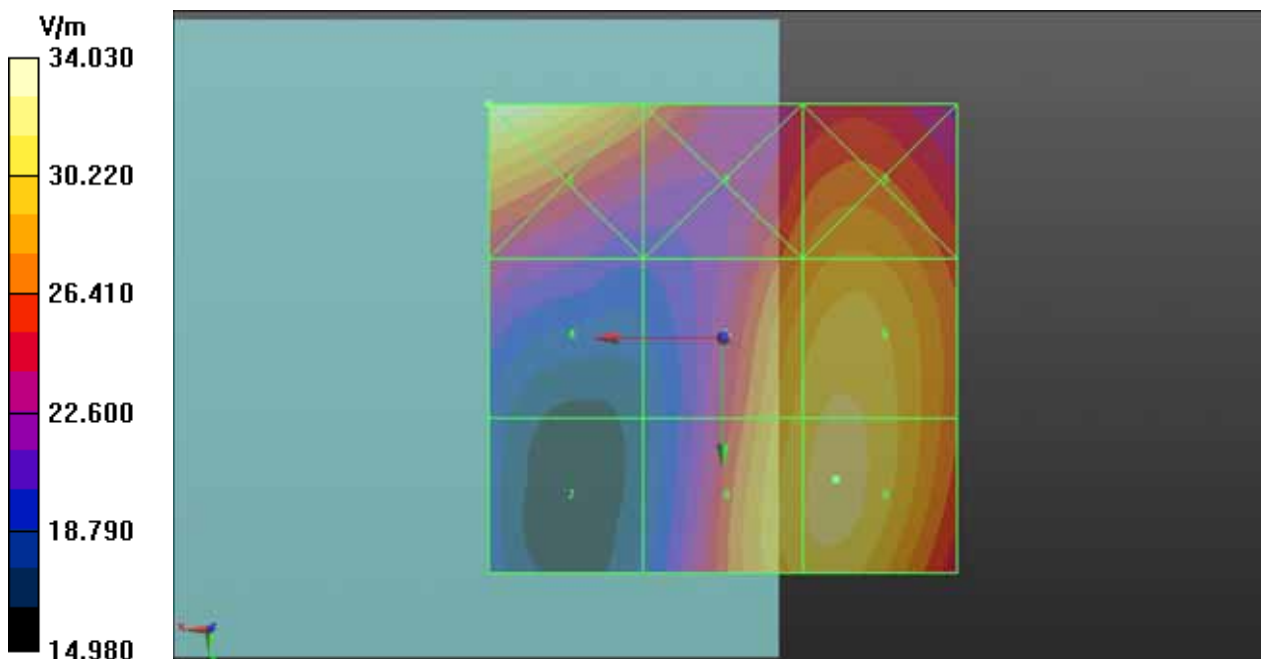

P65 E_Field WCDMA IV_RMC12.2K_Ch1312_ANT0

DUT: 121129C10

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 38.62 V/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 37.59 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4	Grid 2 M4	Grid 3 M4
30.89 V/m	36.78 V/m	37.44 V/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
25.29 V/m	37.59 V/m	38.34 V/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
21.32 V/m	37.25 V/m	38.08 V/m

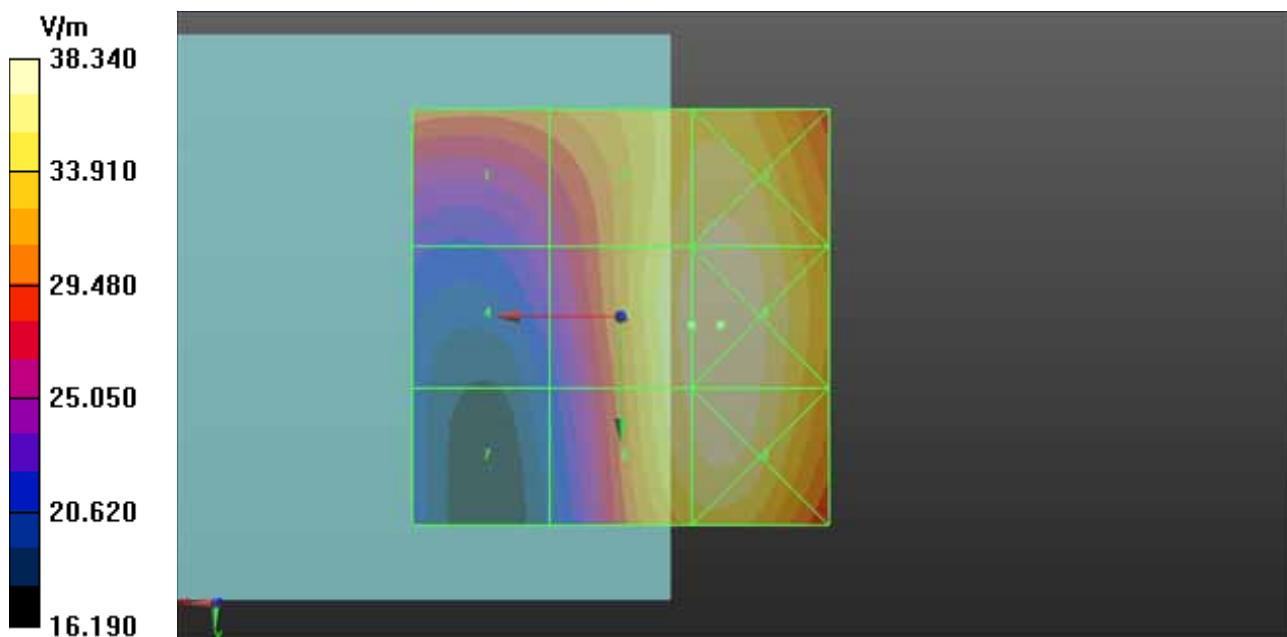

P13 E_Field WCDMA IV_RMC12.2K_Ch1312_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 46.02 V/m; Power Drift = -0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 39.72 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 51.36 V/m	Grid 2 M4 56.52 V/m	Grid 3 M4 41.22 V/m
Grid 4 M4 36.33 V/m	Grid 5 M4 39.72 V/m	Grid 6 M4 32.37 V/m
Grid 7 M4 20.36 V/m	Grid 8 M4 25.21 V/m	Grid 9 M4 24.90 V/m

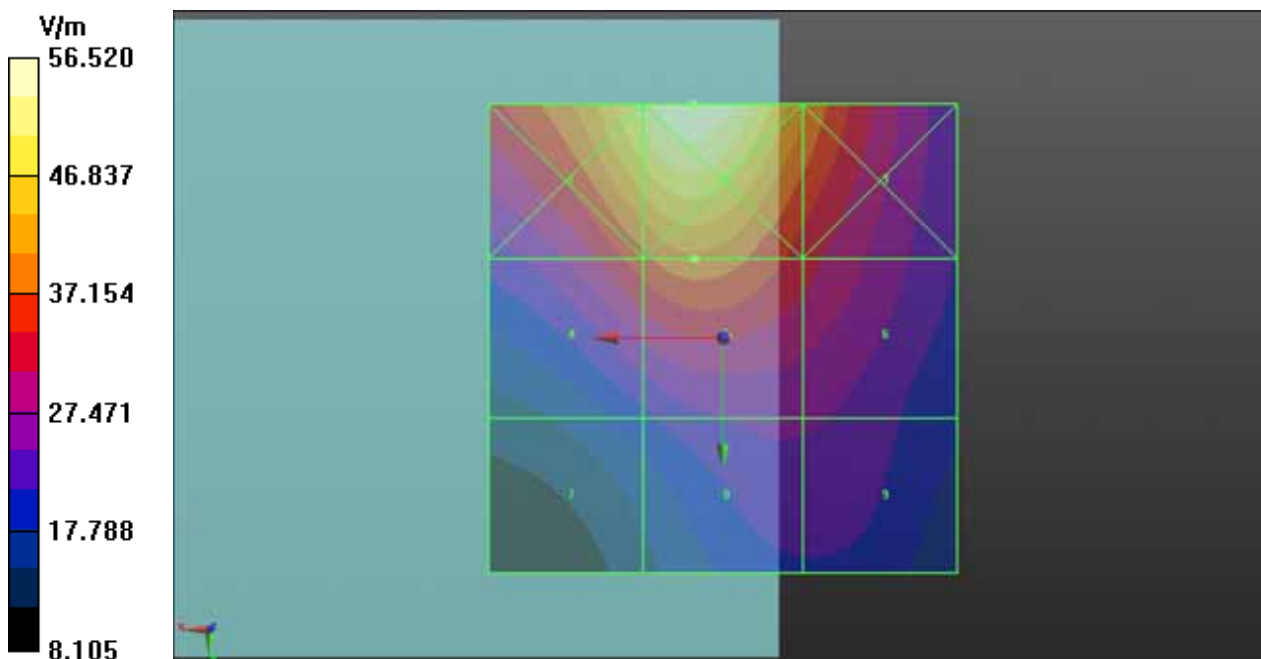

P14 E_Field WCDMA IV_RMC12.2K_Ch1413_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1413/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 45.86 V/m; Power Drift = -0.09 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 39.45 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 51.46 V/m	Grid 2 M4 56.80 V/m	Grid 3 M4 41.03 V/m
Grid 4 M4 35.94 V/m	Grid 5 M4 39.45 V/m	Grid 6 M4 31.57 V/m
Grid 7 M4 20.22 V/m	Grid 8 M4 24.62 V/m	Grid 9 M4 24.40 V/m

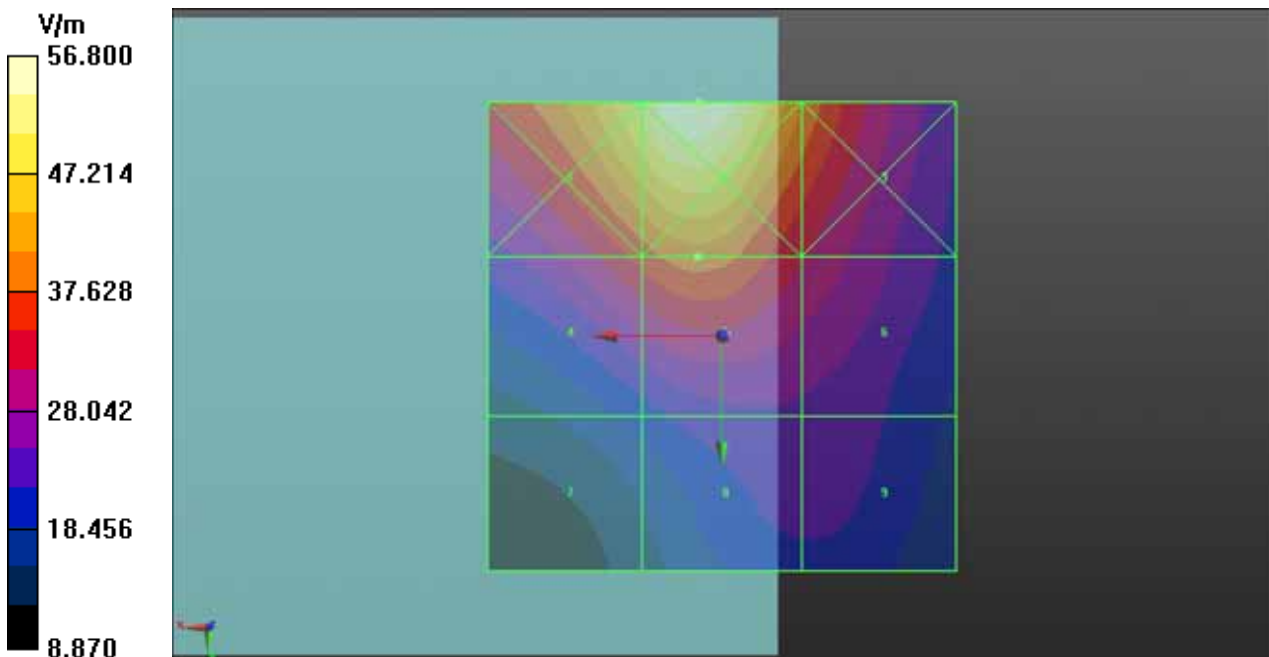

P15 E_Field WCDMA IV_RMC12.2K_Ch1513_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1513/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 43.06 V/m; Power Drift = 0.08 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 37.13 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 48.67 V/m	Grid 2 M4 53.43 V/m	Grid 3 M4 39.09 V/m
Grid 4 M4 34.10 V/m	Grid 5 M4 37.13 V/m	Grid 6 M4 30.27 V/m
Grid 7 M4 19.40 V/m	Grid 8 M4 24.10 V/m	Grid 9 M4 23.58 V/m

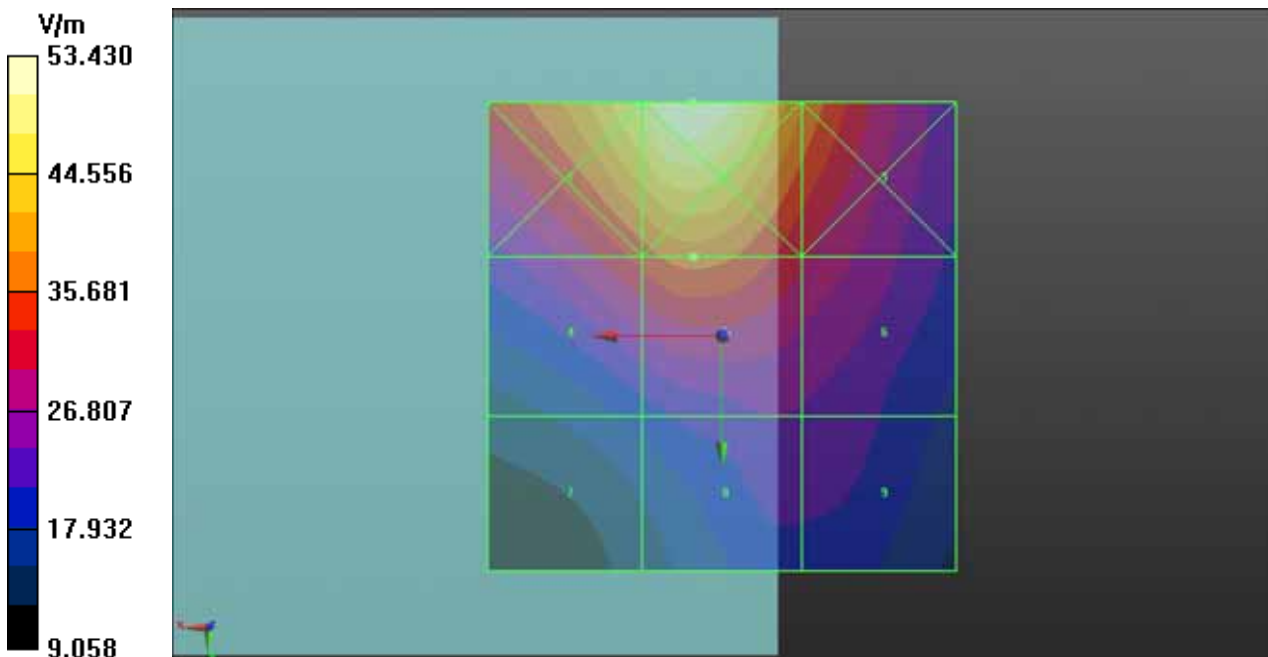

P70 E_Field WCDMA IV_RMC12.2K_Ch1312_ANT1

DUT: 121129C10

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 38.81 V/m; Power Drift = -0.00 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 33.72 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 44.68 V/m	Grid 2 M4 48.11 V/m	Grid 3 M4 33.62 V/m
Grid 4 M4 31.38 V/m	Grid 5 M4 33.72 V/m	Grid 6 M4 27.00 V/m
Grid 7 M4 18.90 V/m	Grid 8 M4 22.14 V/m	Grid 9 M4 22.02 V/m

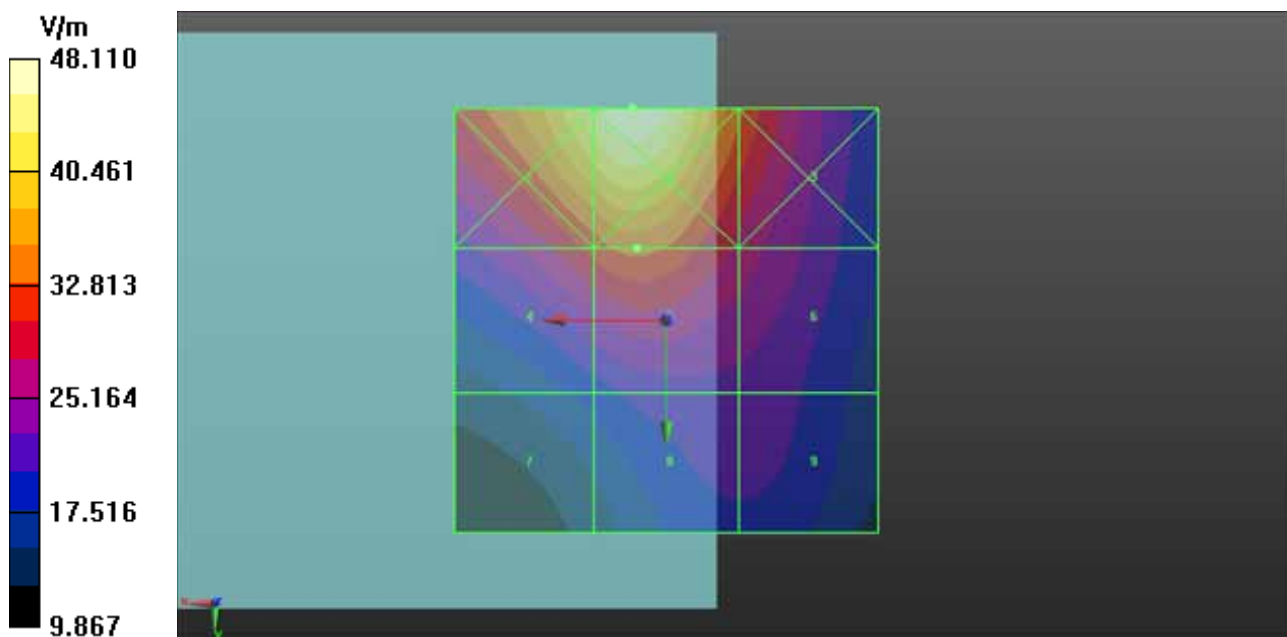

P22 E_Field WCDMA II_RMC12.2K_Ch9262_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 29.91 V/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 35.95 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 38.89 V/m	Grid 2 M4 38.50 V/m	Grid 3 M4 25.70 V/m
Grid 4 M4 27.88 V/m	Grid 5 M4 32.38 V/m	Grid 6 M4 32.85 V/m
Grid 7 M4 22.42 V/m	Grid 8 M4 35.77 V/m	Grid 9 M4 35.95 V/m

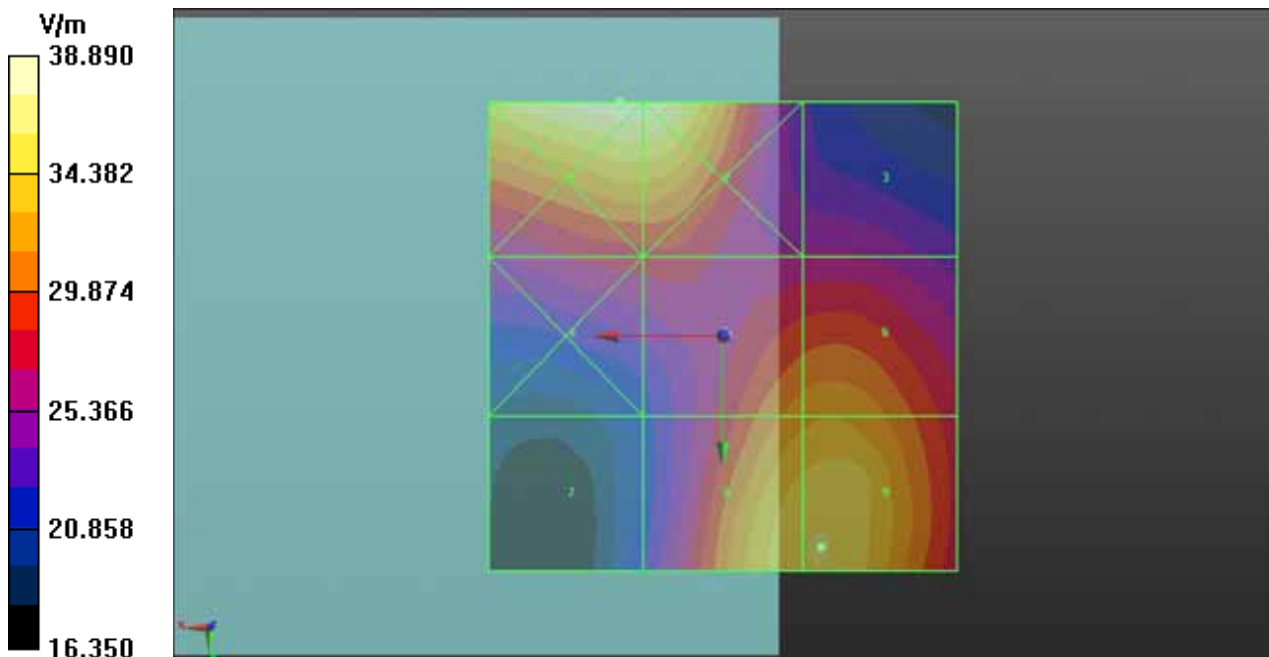

P23 E_Field WCDMA II_RMC12.2K_Ch9400_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9400/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 31.76 V/m; Power Drift = -0.12 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 36.22 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 36.16 V/m	Grid 2 M4 36.22 V/m	Grid 3 M4 27.95 V/m
Grid 4 M4 26.22 V/m	Grid 5 M4 34.60 V/m	Grid 6 M4 35.38 V/m
Grid 7 M4 22.85 V/m	Grid 8 M4 37.99 V/m	Grid 9 M4 38.41 V/m

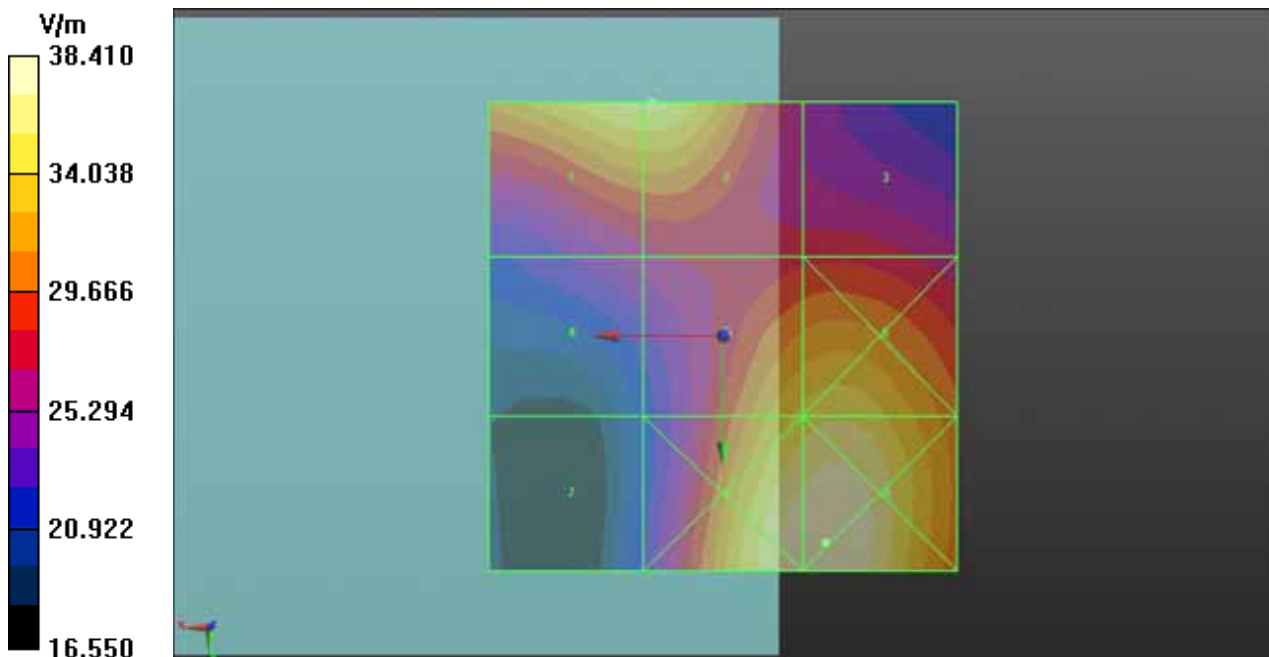

P24 E_Field WCDMA II_RMC12.2K_Ch9538_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9538/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 32.10 V/m; Power Drift = -0.12 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 36.73 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 36.58 V/m	Grid 2 M4 36.73 V/m	Grid 3 M4 29.94 V/m
Grid 4 M4 26.32 V/m	Grid 5 M4 34.94 V/m	Grid 6 M4 35.79 V/m
Grid 7 M4 20.74 V/m	Grid 8 M4 37.41 V/m	Grid 9 M4 38.12 V/m

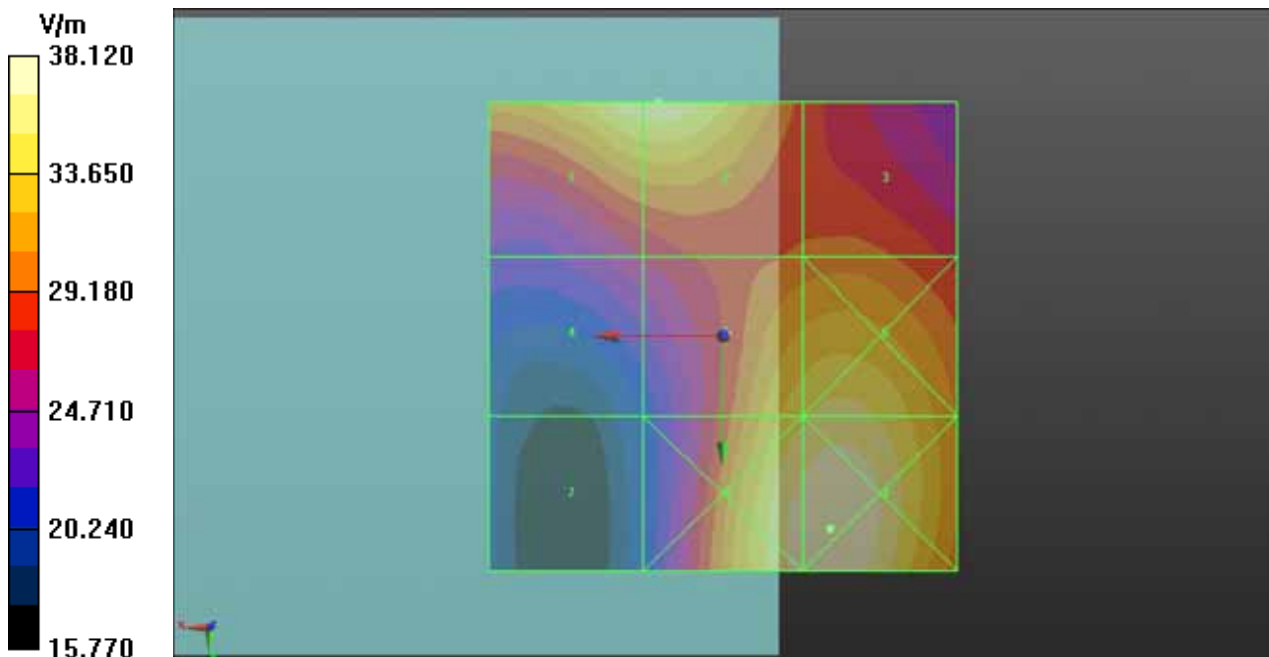

P63 E_Field WCDMA II_RMC12.2K_Ch9538_ANT0

DUT: 121129C10

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9538/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 33.70 V/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 35.77 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 27.59 V/m	Grid 2 M4 29.96 V/m	Grid 3 M4 30.50 V/m
Grid 4 M4 20.90 V/m	Grid 5 M4 35.77 V/m	Grid 6 M4 36.37 V/m
Grid 7 M4 21.15 V/m	Grid 8 M4 37.30 V/m	Grid 9 M4 37.71 V/m

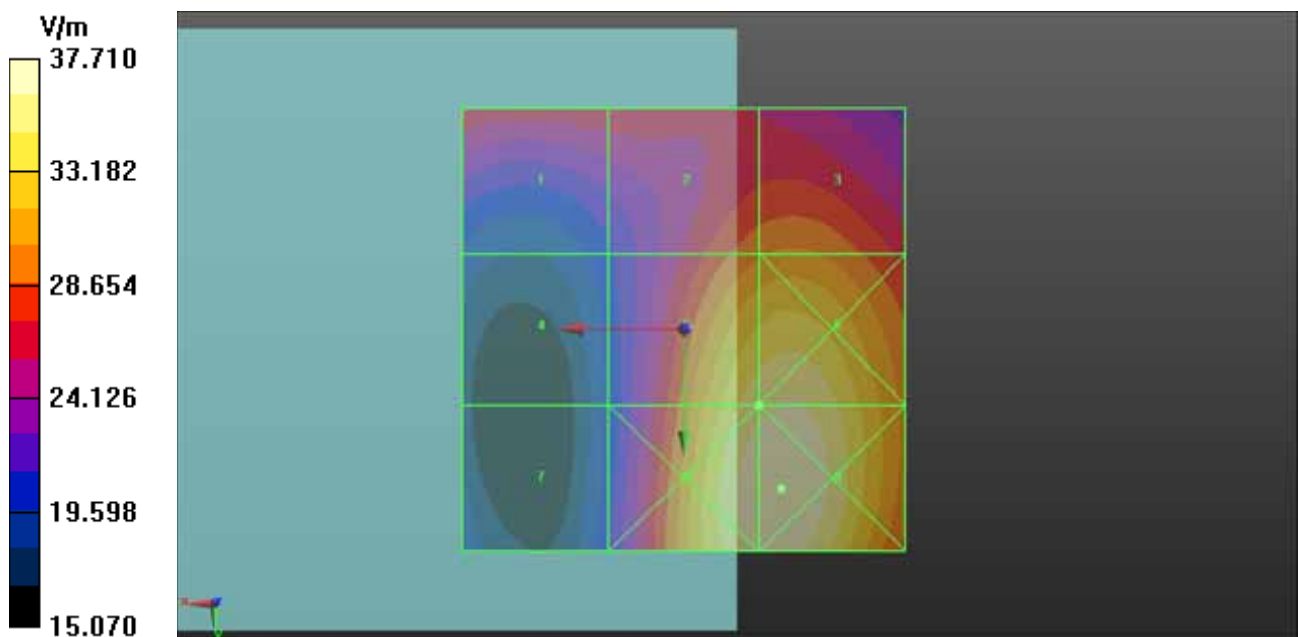

P07 E_Field WCDMA II_RMC12.2K_Ch9262_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 35.03 V/m; Power Drift = -0.19 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 29.53 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 39.71 V/m	Grid 2 M4 43.90 V/m	Grid 3 M4 33.85 V/m
Grid 4 M4 27.12 V/m	Grid 5 M4 29.53 V/m	Grid 6 M4 25.01 V/m
Grid 7 M4 15.43 V/m	Grid 8 M4 18.42 V/m	Grid 9 M4 18.30 V/m

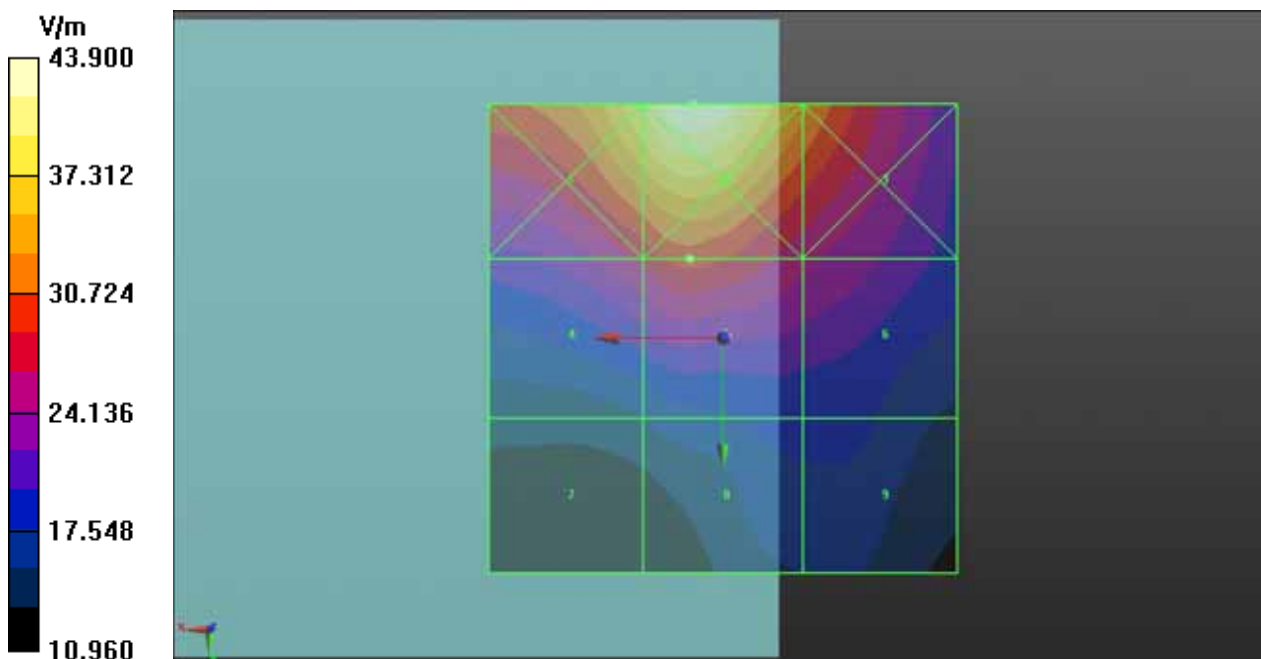

P08 E_Field WCDMA II_RMC12.2K_Ch9400_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9400/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 34.05 V/m; Power Drift = -0.02 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 28.77 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 38.66 V/m	Grid 2 M4 43.19 V/m	Grid 3 M4 34.48 V/m
Grid 4 M4 26.22 V/m	Grid 5 M4 28.77 V/m	Grid 6 M4 25.77 V/m
Grid 7 M4 14.94 V/m	Grid 8 M4 18.91 V/m	Grid 9 M4 19.28 V/m

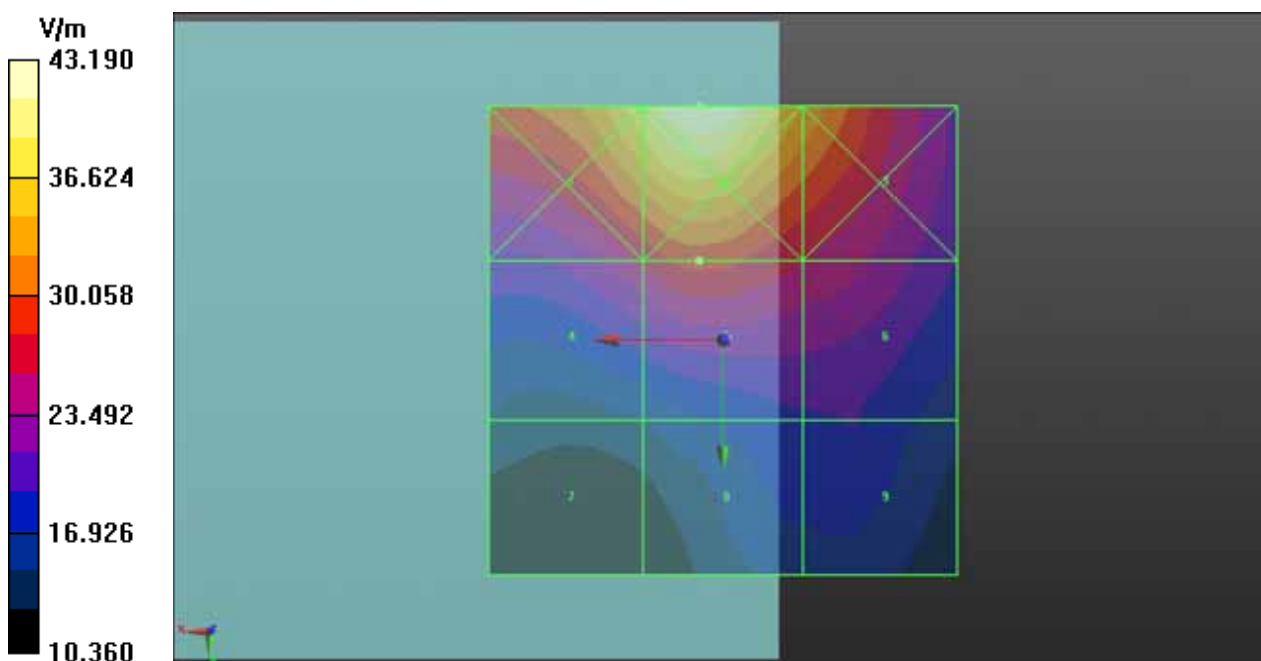

P09 E_Field WCDMA II_RMC12.2K_Ch9538_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9538/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 32.50 V/m; Power Drift = -0.05 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 27.30 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 36.03 V/m	Grid 2 M4 40.64 V/m	Grid 3 M4 33.35 V/m
Grid 4 M4 24.58 V/m	Grid 5 M4 27.30 V/m	Grid 6 M4 25.20 V/m
Grid 7 M4 14.48 V/m	Grid 8 M4 18.95 V/m	Grid 9 M4 19.00 V/m

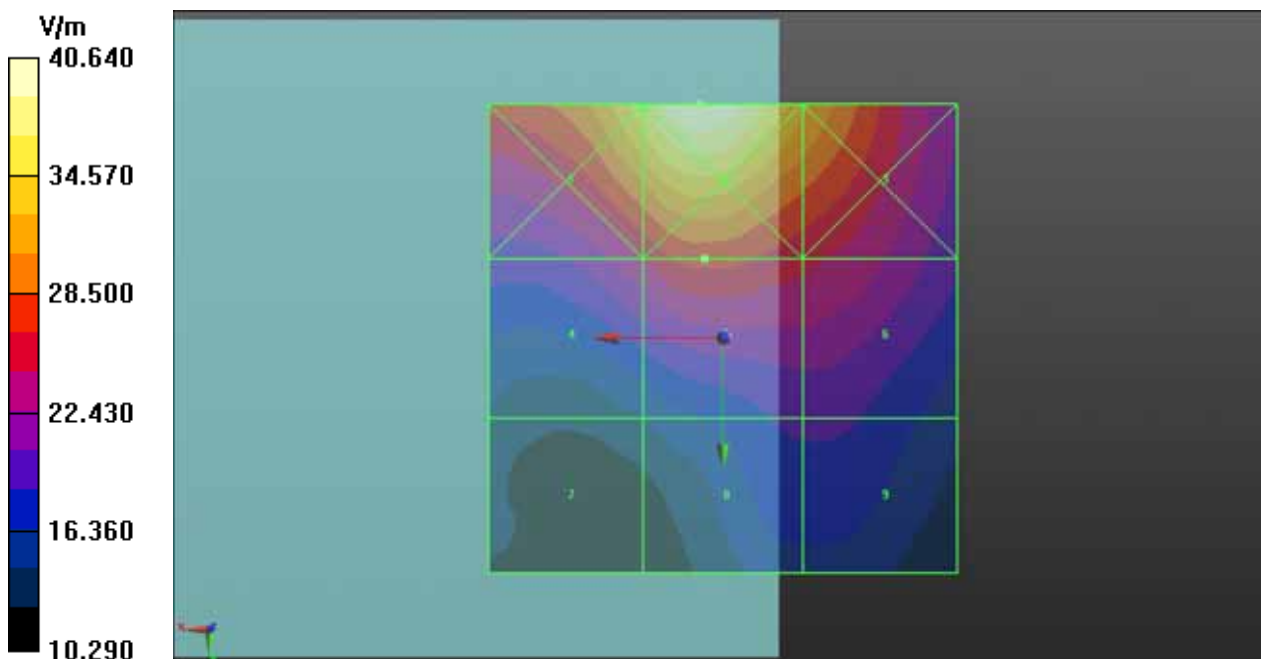

P68 E_Field WCDMA II_RMC12.2K_Ch9262_ANT1

DUT: 121129C10

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: ER3DV6 - SN2445; ConvF(1, 1, 1); Calibrated: 2012/6/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 26.01 V/m; Power Drift = -0.05 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

E-field emissions = 22.84 V/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 33.04 V/m	Grid 2 M4 35.40 V/m	Grid 3 M4 25.74 V/m
Grid 4 M4 21.65 V/m	Grid 5 M4 22.84 V/m	Grid 6 M4 18.85 V/m
Grid 7 M4 12.58 V/m	Grid 8 M4 13.41 V/m	Grid 9 M4 13.50 V/m

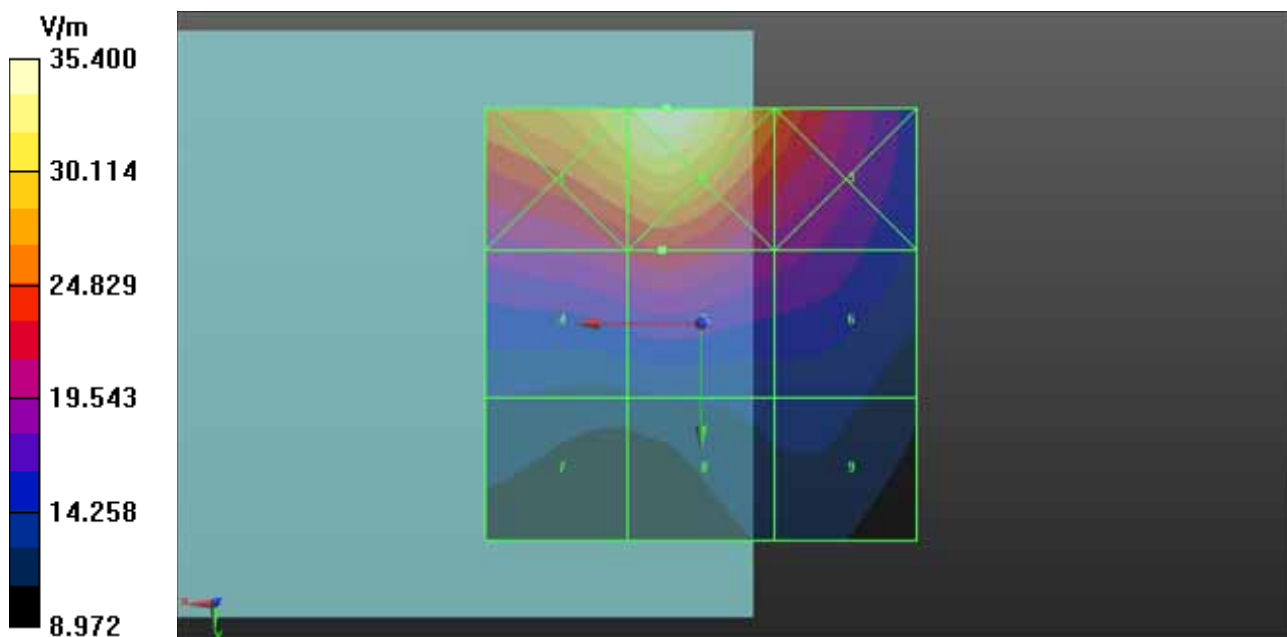

P31 H_Field GSM850_Ch128_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08800 A/m; Power Drift = -0.13 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2598 A/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 0.275 A/m	Grid 2 M4 0.232 A/m	Grid 3 M4 0.147 A/m
Grid 4 M4 0.260 A/m	Grid 5 M4 0.237 A/m	Grid 6 M4 0.152 A/m
Grid 7 M4 0.256 A/m	Grid 8 M4 0.232 A/m	Grid 9 M4 0.151 A/m

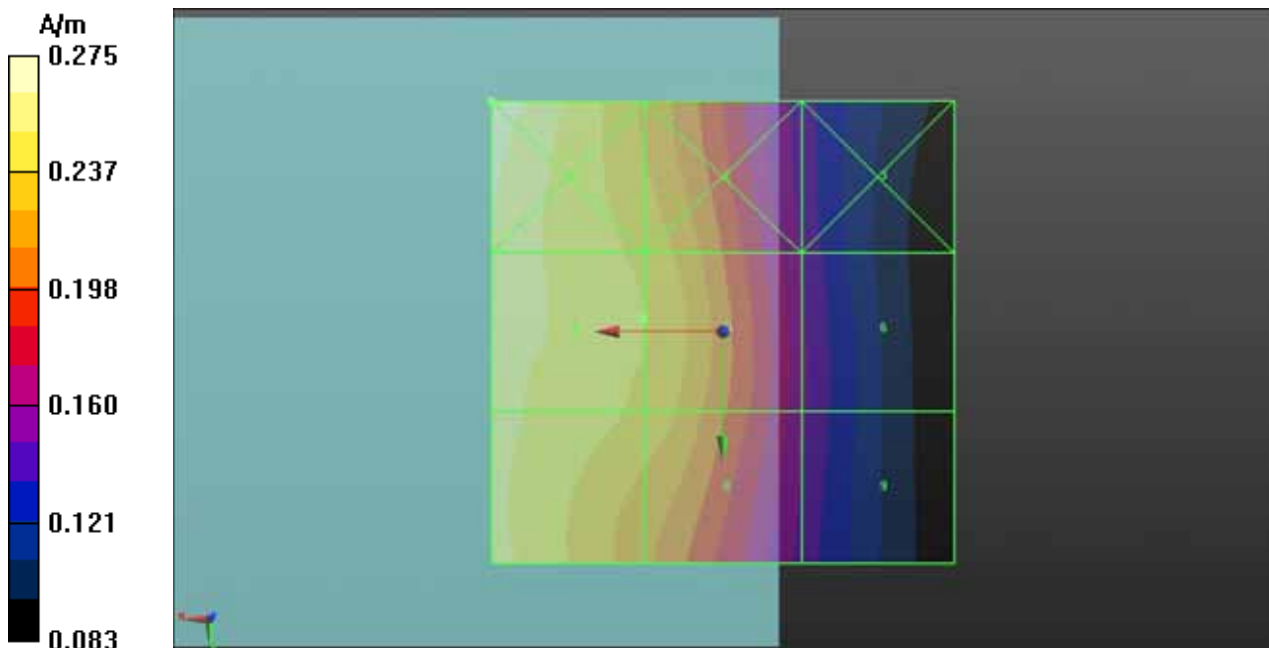

P32 H_Field GSM850_Ch189_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch189/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.09400 A/m; Power Drift = -0.03 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2662 A/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 0.274 A/m	Grid 2 M4 0.245 A/m	Grid 3 M4 0.151 A/m
Grid 4 M4 0.266 A/m	Grid 5 M4 0.252 A/m	Grid 6 M4 0.161 A/m
Grid 7 M4 0.266 A/m	Grid 8 M4 0.246 A/m	Grid 9 M4 0.160 A/m

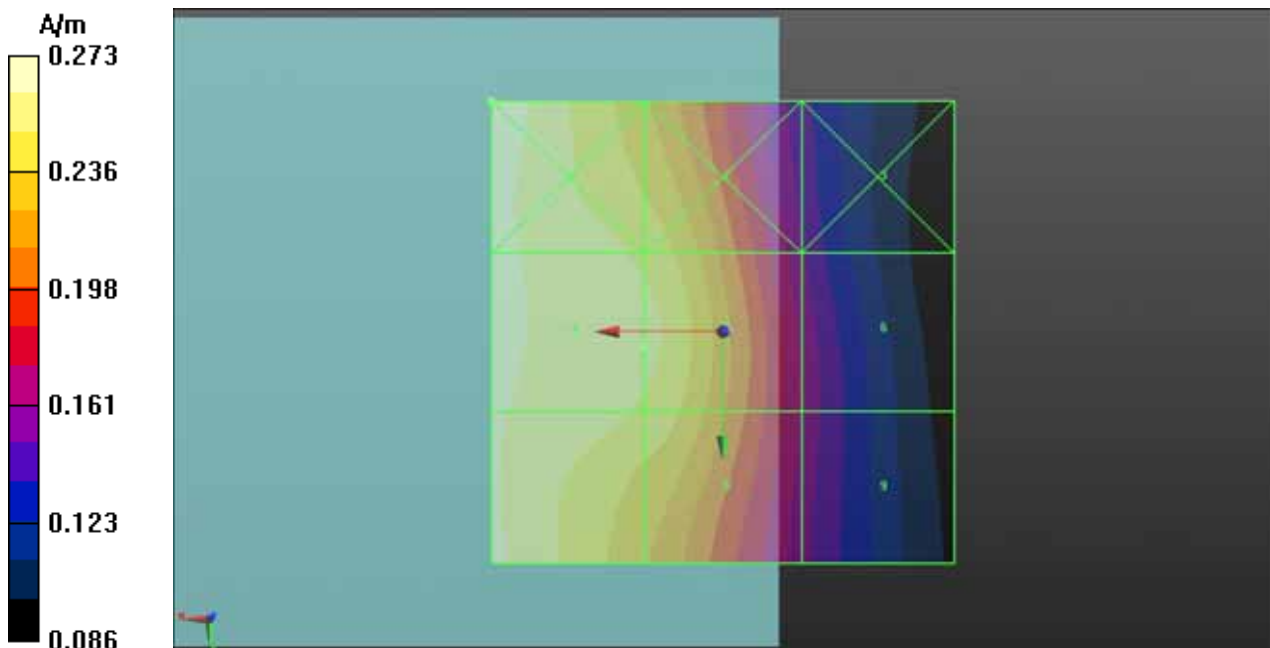

P33 H_Field GSM850_Ch251_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch251/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.09700 A/m; Power Drift = -0.00 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2576 A/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 0.262 A/m	Grid 2 M4 0.240 A/m	Grid 3 M4 0.143 A/m
Grid 4 M4 0.256 A/m	Grid 5 M4 0.246 A/m	Grid 6 M4 0.155 A/m
Grid 7 M4 0.258 A/m	Grid 8 M4 0.239 A/m	Grid 9 M4 0.155 A/m

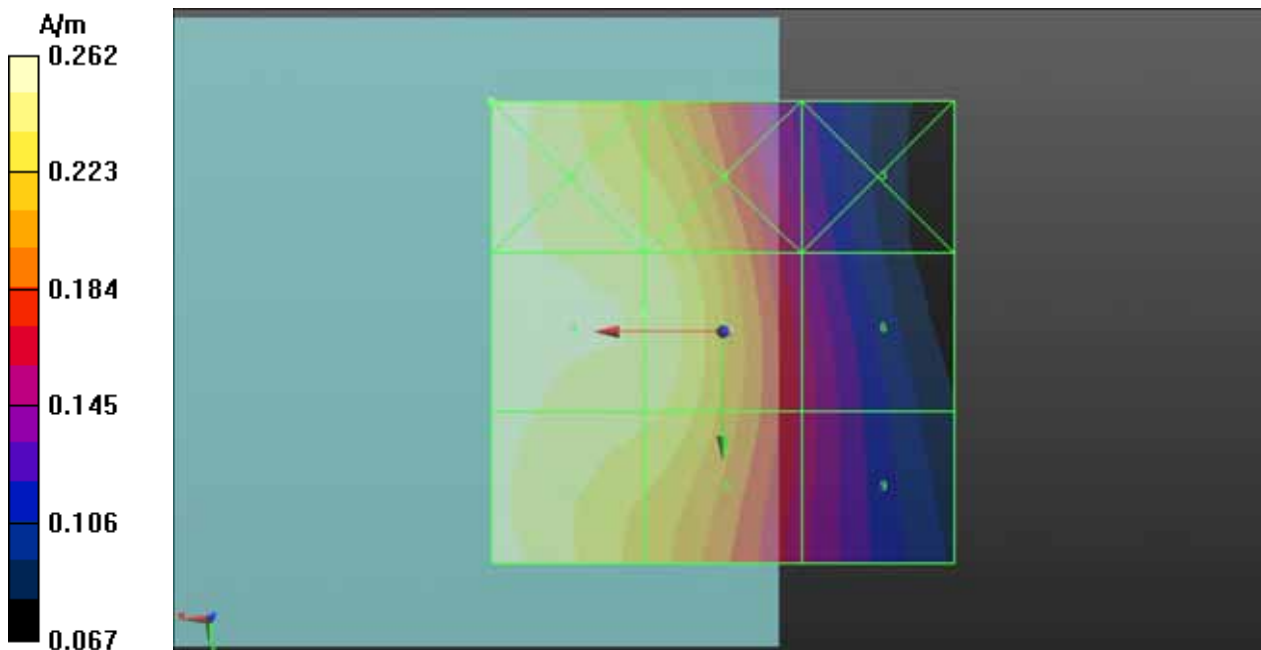

P74 H_Field GSM850_Ch189_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch189/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07300 A/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2965 A/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 0.330 A/m	Grid 2 M4 0.254 A/m	Grid 3 M4 0.161 A/m
Grid 4 M4 0.297 A/m	Grid 5 M4 0.242 A/m	Grid 6 M4 0.146 A/m
Grid 7 M4 0.285 A/m	Grid 8 M4 0.230 A/m	Grid 9 M4 0.144 A/m

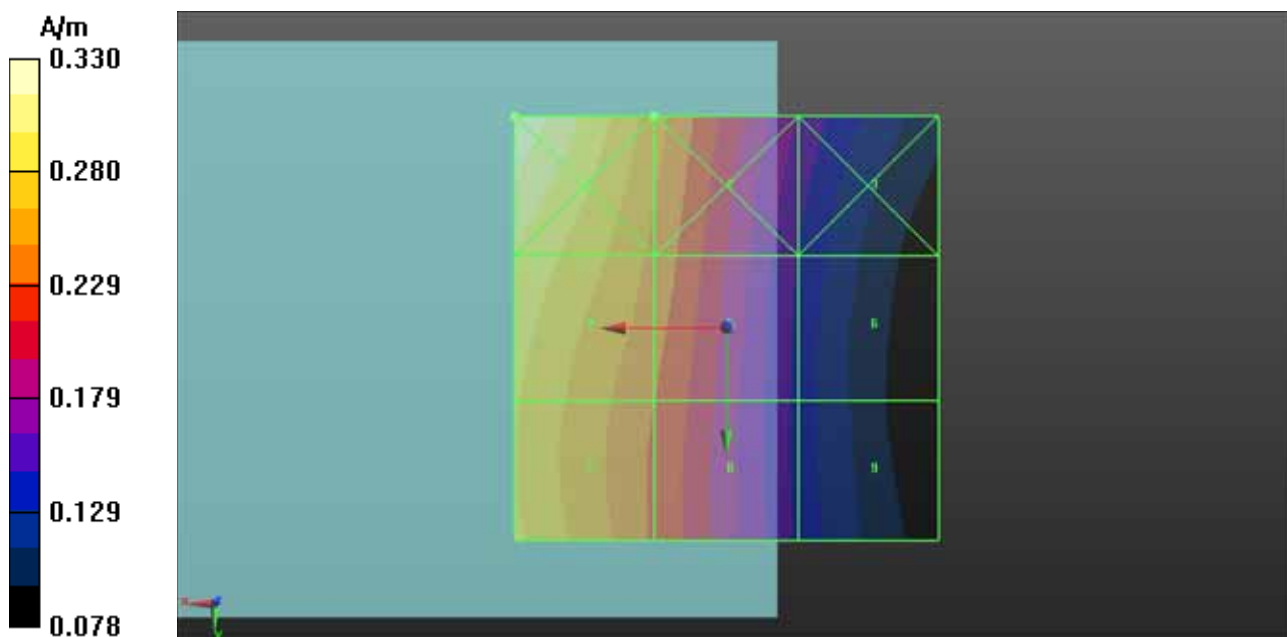

P46 H_Field GSM850_Ch128_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.2830 A/m; Power Drift = -0.06 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.5539 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.523 A/m	Grid 2 M3 0.536 A/m	Grid 3 M4 0.307 A/m
Grid 4 M3 0.539 A/m	Grid 5 M3 0.554 A/m	Grid 6 M4 0.317 A/m
Grid 7 M4 0.439 A/m	Grid 8 M3 0.450 A/m	Grid 9 M4 0.269 A/m

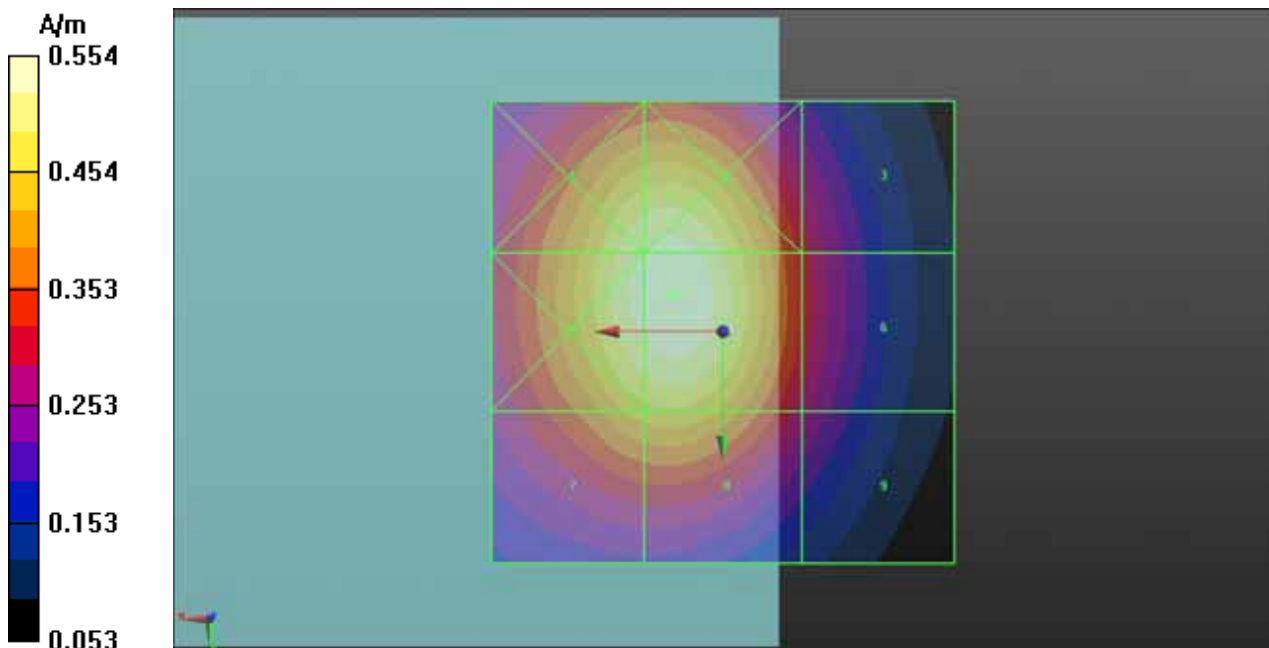

P47 H_Field GSM850_Ch189_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch189/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.2730 A/m; Power Drift = -0.17 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.5284 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.498 A/m	Grid 2 M3 0.512 A/m	Grid 3 M4 0.295 A/m
Grid 4 M3 0.513 A/m	Grid 5 M3 0.528 A/m	Grid 6 M4 0.305 A/m
Grid 7 M4 0.421 A/m	Grid 8 M4 0.430 A/m	Grid 9 M4 0.257 A/m

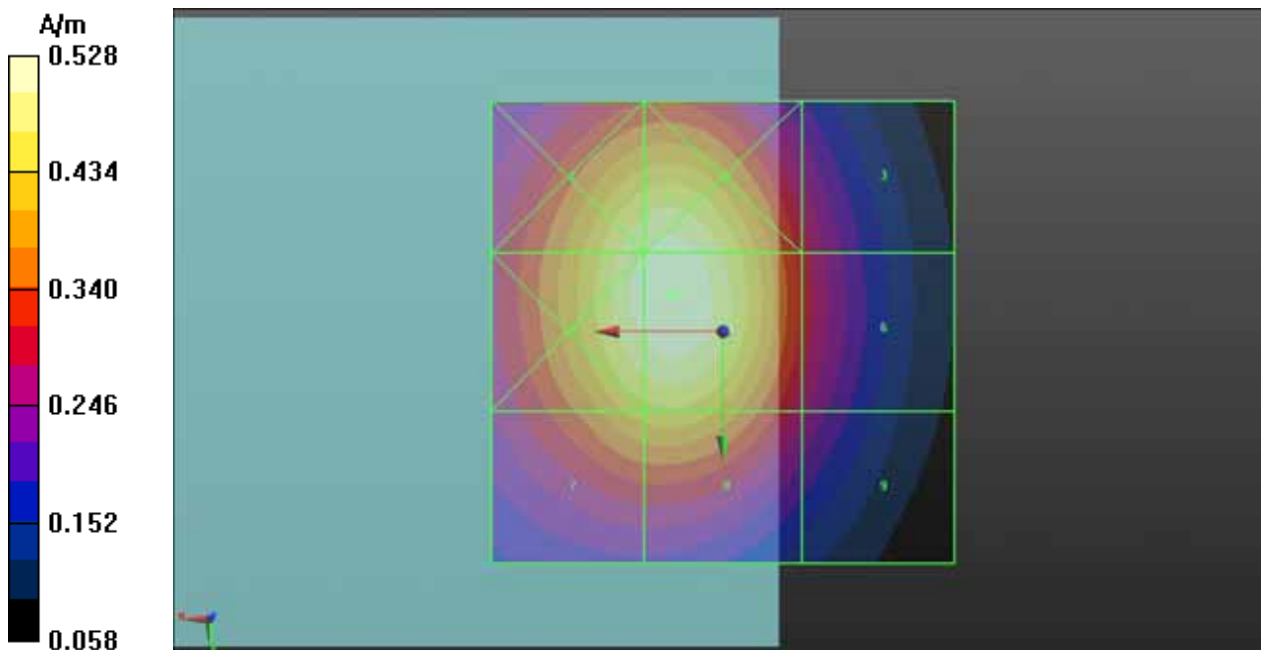

P48 H_Field GSM850_Ch251_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch251/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.2620 A/m; Power Drift = -0.08 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.5150 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.486 A/m	Grid 2 M3 0.499 A/m	Grid 3 M4 0.287 A/m
Grid 4 M3 0.500 A/m	Grid 5 M3 0.515 A/m	Grid 6 M4 0.295 A/m
Grid 7 M4 0.411 A/m	Grid 8 M4 0.422 A/m	Grid 9 M4 0.250 A/m

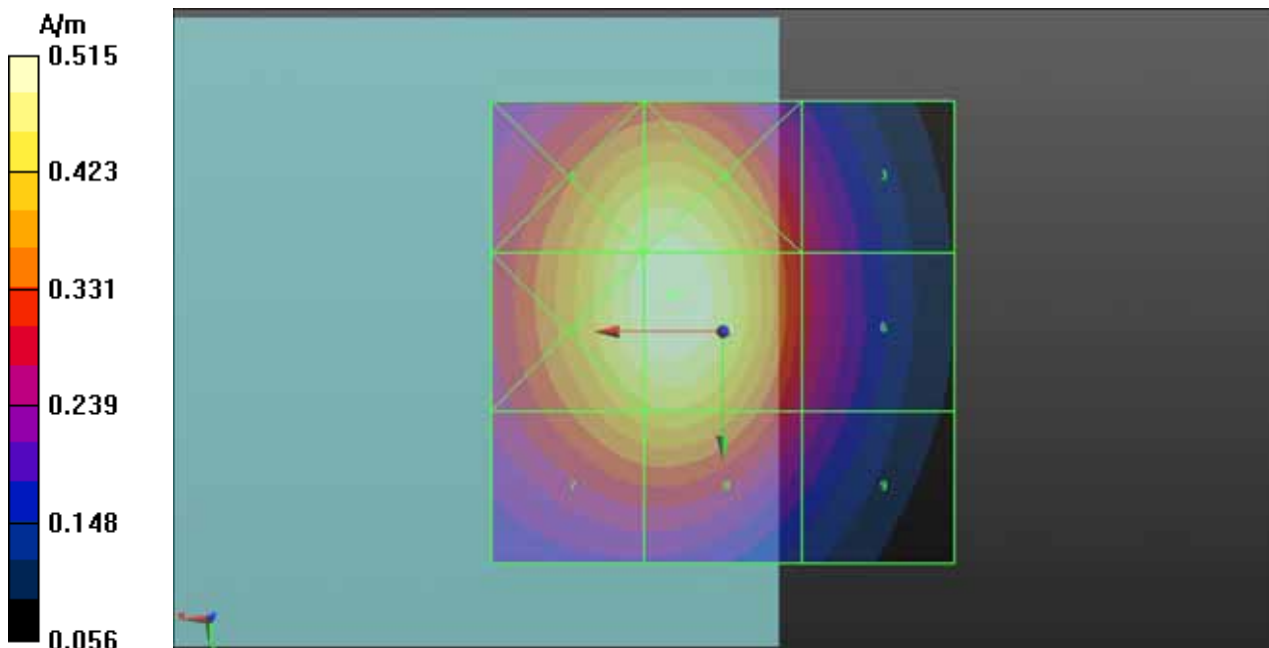

P75 H_Field GSM850_Ch128_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch128/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1450 A/m; Power Drift = 0.09 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2874 A/m

Near-field category: M4 (AWF -5 dB)

Grid 1 M4 0.269 A/m	Grid 2 M4 0.280 A/m	Grid 3 M4 0.169 A/m
Grid 4 M4 0.275 A/m	Grid 5 M4 0.287 A/m	Grid 6 M4 0.172 A/m
Grid 7 M4 0.227 A/m	Grid 8 M4 0.234 A/m	Grid 9 M4 0.144 A/m

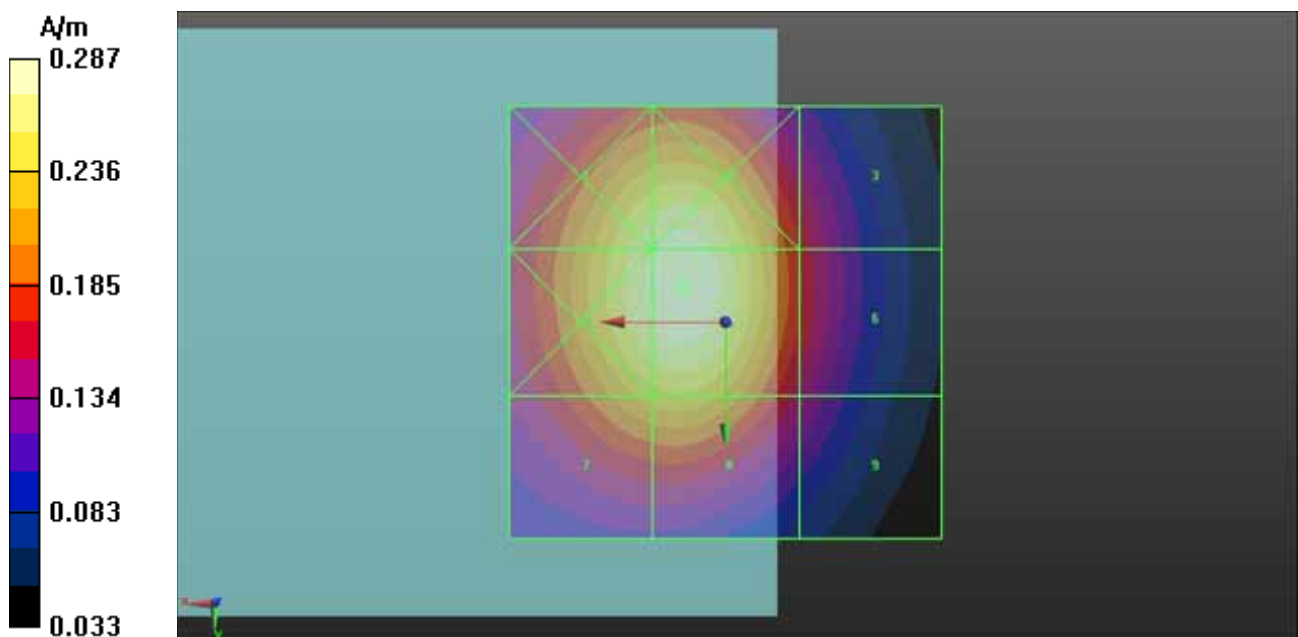

P34 H_Field GSM1900_Ch512_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch512/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.06200 A/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.1893 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.216 A/m	Grid 2 M3 0.158 A/m	Grid 3 M3 0.142 A/m
Grid 4 M3 0.181 A/m	Grid 5 M3 0.162 A/m	Grid 6 M4 0.140 A/m
Grid 7 M3 0.203 A/m	Grid 8 M3 0.189 A/m	Grid 9 M4 0.129 A/m

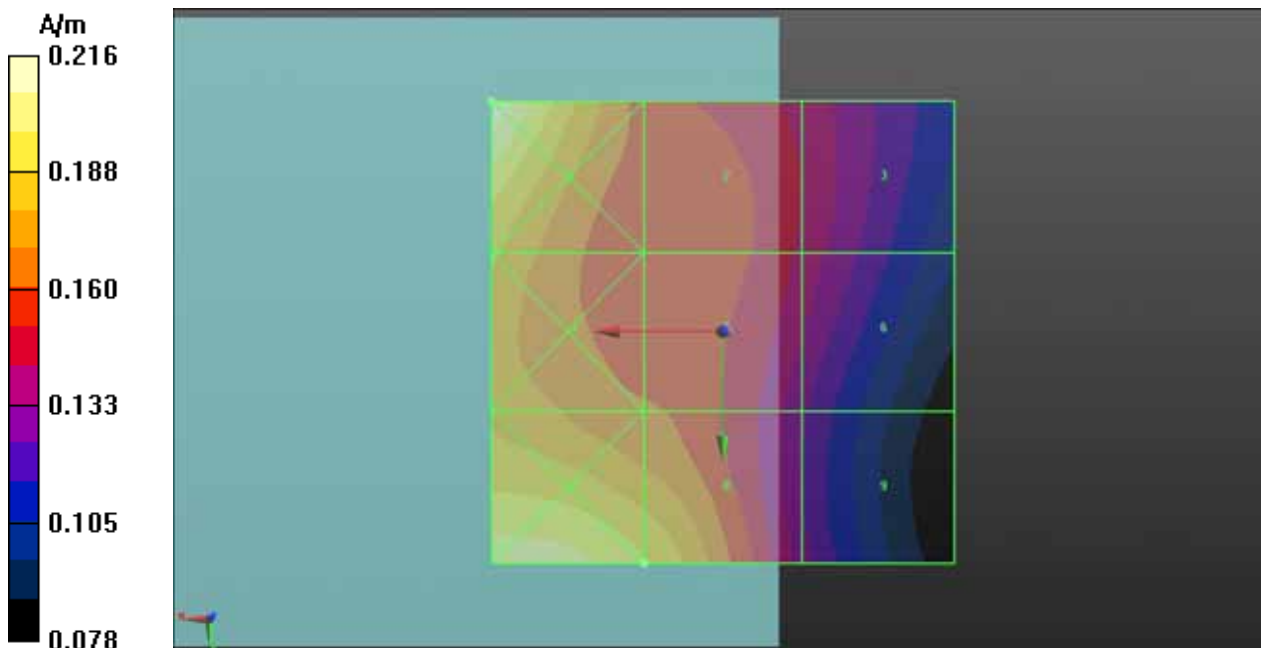

P35 H_Field GSM1900_Ch661_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.06100 A/m; Power Drift = -0.01 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2368 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.237 A/m	Grid 2 M3 0.179 A/m	Grid 3 M3 0.149 A/m
Grid 4 M3 0.199 A/m	Grid 5 M3 0.181 A/m	Grid 6 M3 0.145 A/m
Grid 7 M3 0.223 A/m	Grid 8 M3 0.213 A/m	Grid 9 M3 0.144 A/m

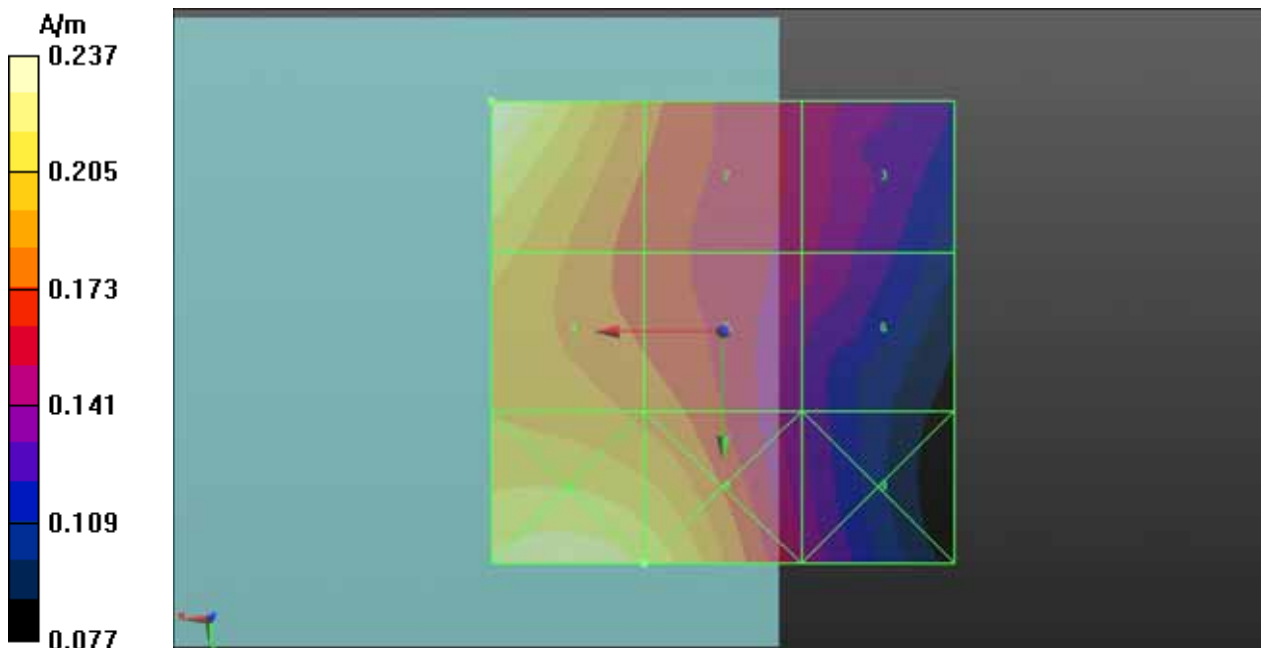

P36 H_Field GSM1900_Ch810_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch810/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.05400 A/m; Power Drift = -0.07 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2352 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.235 A/m	Grid 2 M3 0.178 A/m	Grid 3 M3 0.148 A/m
Grid 4 M3 0.190 A/m	Grid 5 M3 0.168 A/m	Grid 6 M4 0.135 A/m
Grid 7 M3 0.207 A/m	Grid 8 M3 0.201 A/m	Grid 9 M4 0.138 A/m

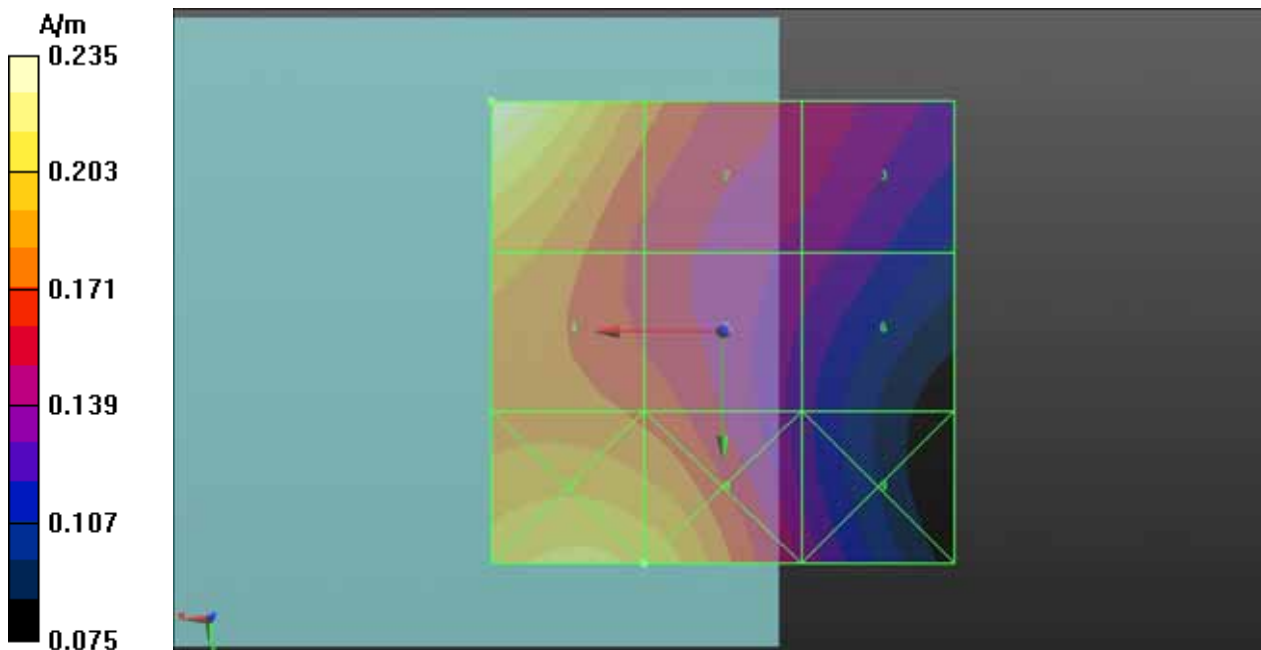

P76 H_Field GSM1900_Ch661_ANT0

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.05500 A/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2244 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.224 A/m	Grid 2 M3 0.192 A/m	Grid 3 M3 0.158 A/m
Grid 4 M3 0.186 A/m	Grid 5 M3 0.173 A/m	Grid 6 M3 0.143 A/m
Grid 7 M3 0.204 A/m	Grid 8 M3 0.199 A/m	Grid 9 M4 0.135 A/m

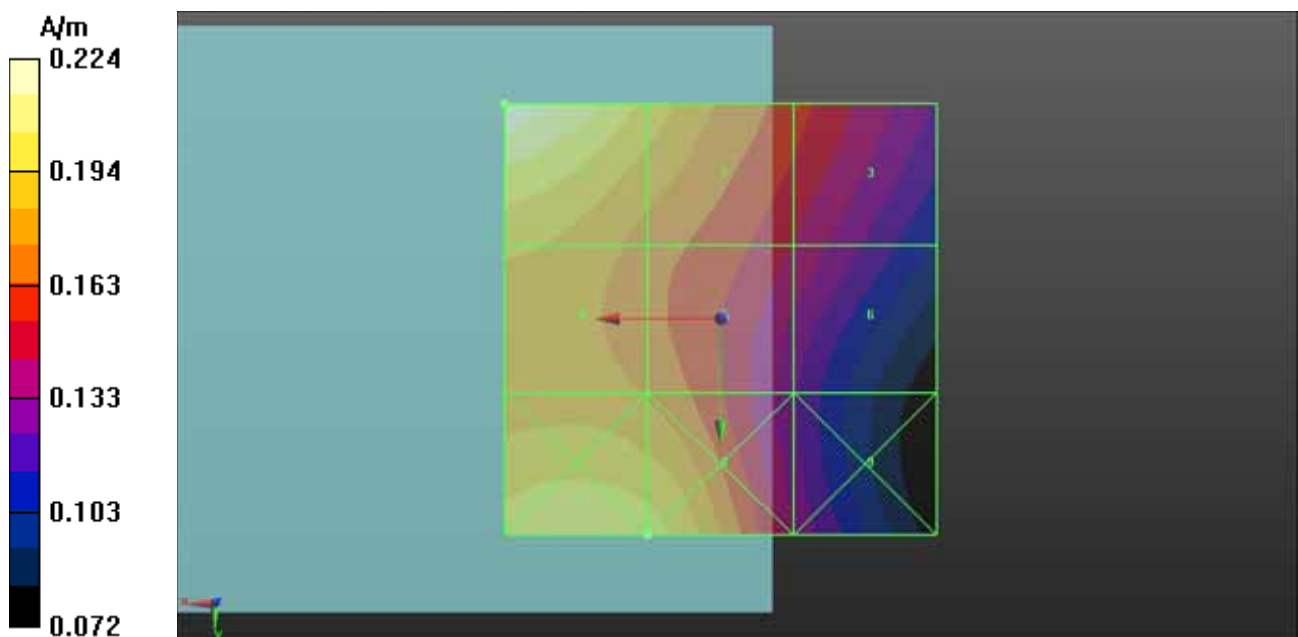

P49 H_Field GSM1900_Ch512_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch512/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08200 A/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2055 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.216 A/m	Grid 2 M3 0.220 A/m	Grid 3 M3 0.155 A/m
Grid 4 M3 0.200 A/m	Grid 5 M3 0.205 A/m	Grid 6 M3 0.154 A/m
Grid 7 M3 0.153 A/m	Grid 8 M3 0.158 A/m	Grid 9 M4 0.125 A/m

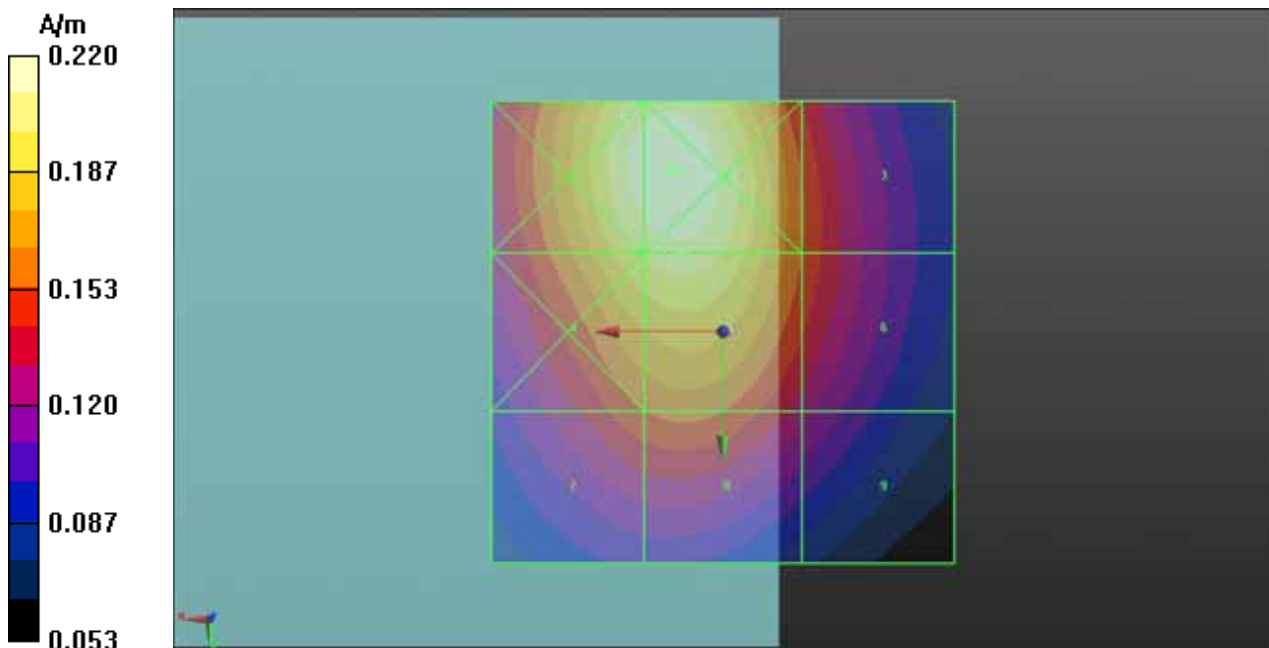

P50 H_Field GSM1900_Ch661_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08100 A/m; Power Drift = 0.05 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.2061 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.219 A/m	Grid 2 M3 0.223 A/m	Grid 3 M3 0.158 A/m
Grid 4 M3 0.201 A/m	Grid 5 M3 0.206 A/m	Grid 6 M3 0.155 A/m
Grid 7 M3 0.154 A/m	Grid 8 M3 0.159 A/m	Grid 9 M4 0.127 A/m

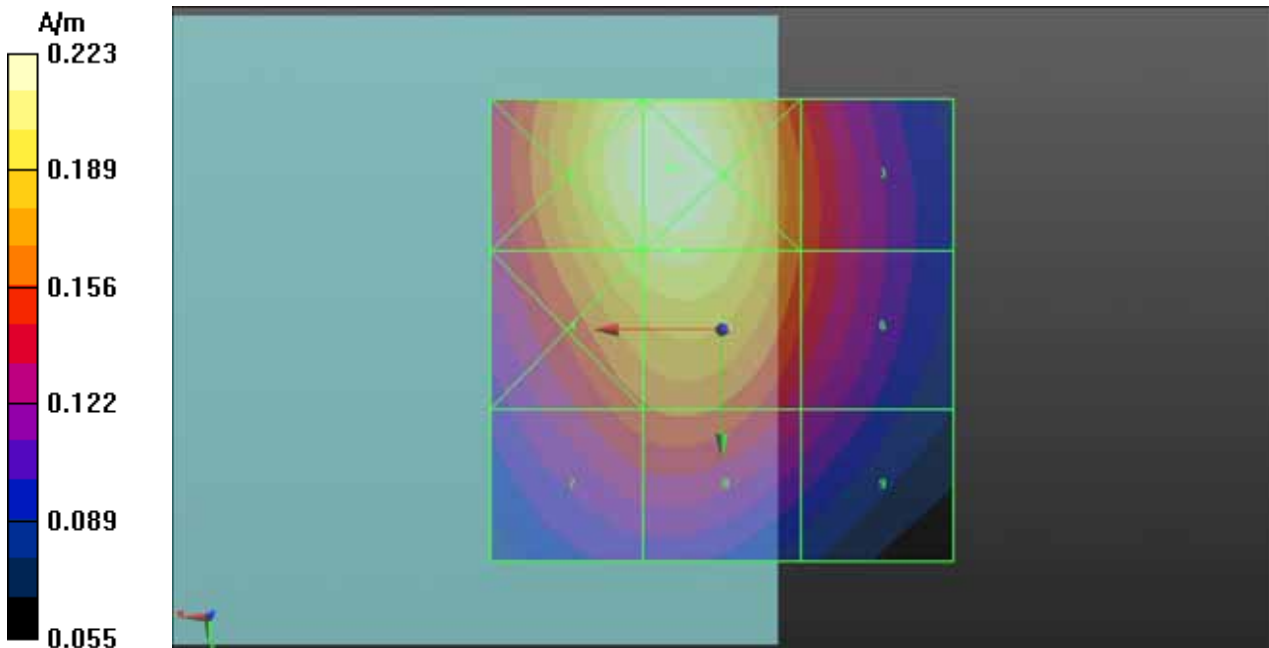

P51 H_Field GSM1900_Ch810_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch810/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07700 A/m; Power Drift = -0.03 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.1956 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.209 A/m	Grid 2 M3 0.213 A/m	Grid 3 M3 0.153 A/m
Grid 4 M3 0.190 A/m	Grid 5 M3 0.196 A/m	Grid 6 M3 0.150 A/m
Grid 7 M3 0.144 A/m	Grid 8 M3 0.150 A/m	Grid 9 M4 0.122 A/m

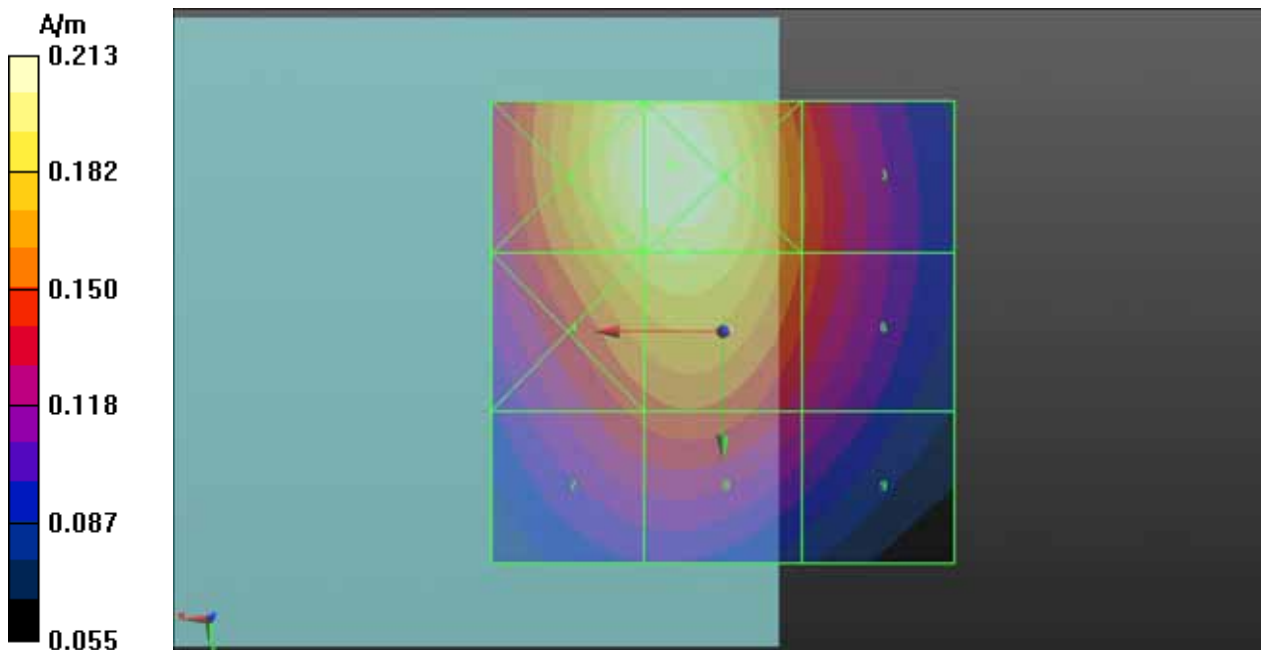

P77 H_Field GSM1900_Ch661_ANT1

DUT: 121129C09

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.70964

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/0/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch661/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.06100 A/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 2.948 is applied.

H-field emissions = 0.1766 A/m

Near-field category: M3 (AWF -5 dB)

Grid 1 M3 0.195 A/m	Grid 2 M3 0.203 A/m	Grid 3 M4 0.138 A/m
Grid 4 M3 0.169 A/m	Grid 5 M3 0.177 A/m	Grid 6 M4 0.132 A/m
Grid 7 M4 0.112 A/m	Grid 8 M4 0.117 A/m	Grid 9 M4 0.101 A/m

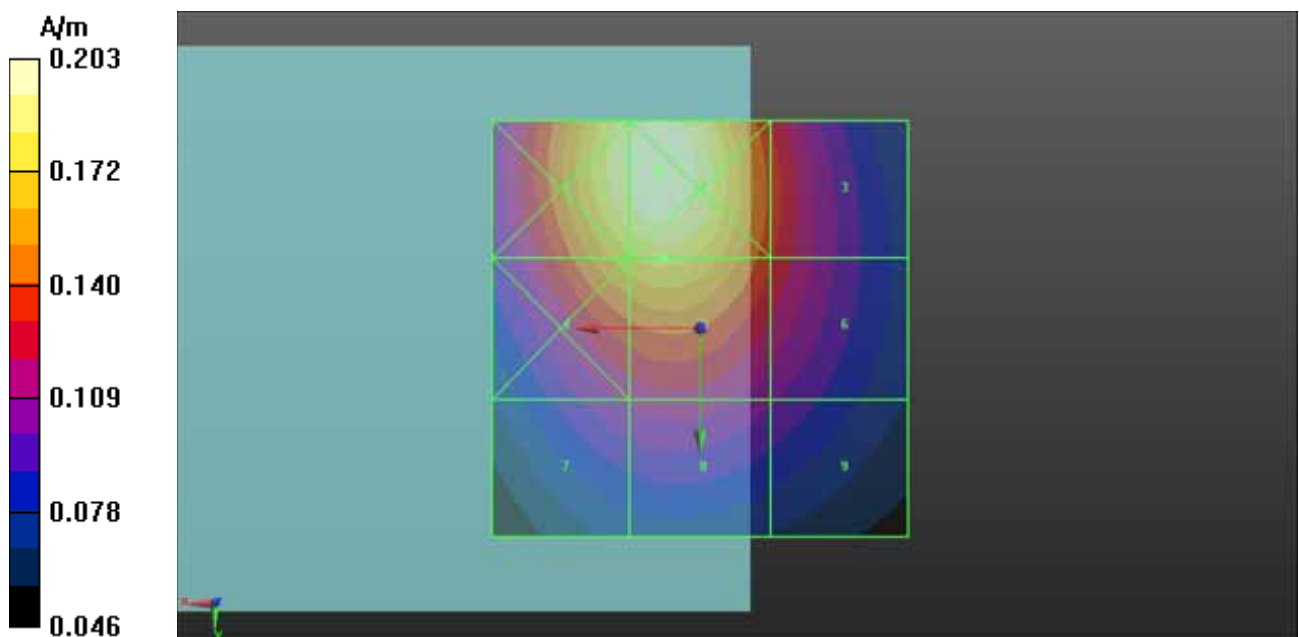

P40 H_Field WCDMA V_RMC12.2K_Ch4132_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.09000 A/m; Power Drift = -0.16 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09093 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.096 A/m	Grid 2 M4 0.082 A/m	Grid 3 M4 0.052 A/m
Grid 4 M4 0.091 A/m	Grid 5 M4 0.084 A/m	Grid 6 M4 0.055 A/m
Grid 7 M4 0.090 A/m	Grid 8 M4 0.082 A/m	Grid 9 M4 0.055 A/m

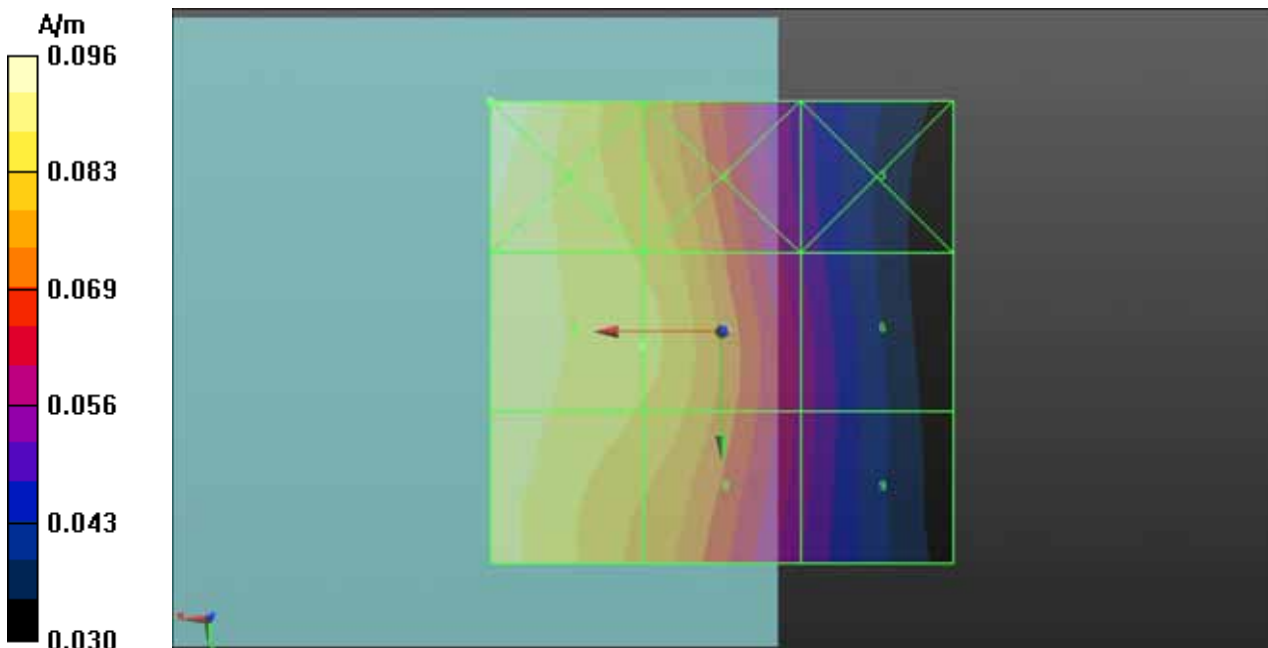

P41 H_Field WCDMA V_RMC12.2K_Ch4182_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4182/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.09400 A/m; Power Drift = -0.07 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09201 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.095 A/m	Grid 2 M4 0.085 A/m	Grid 3 M4 0.053 A/m
Grid 4 M4 0.092 A/m	Grid 5 M4 0.088 A/m	Grid 6 M4 0.056 A/m
Grid 7 M4 0.092 A/m	Grid 8 M4 0.086 A/m	Grid 9 M4 0.056 A/m

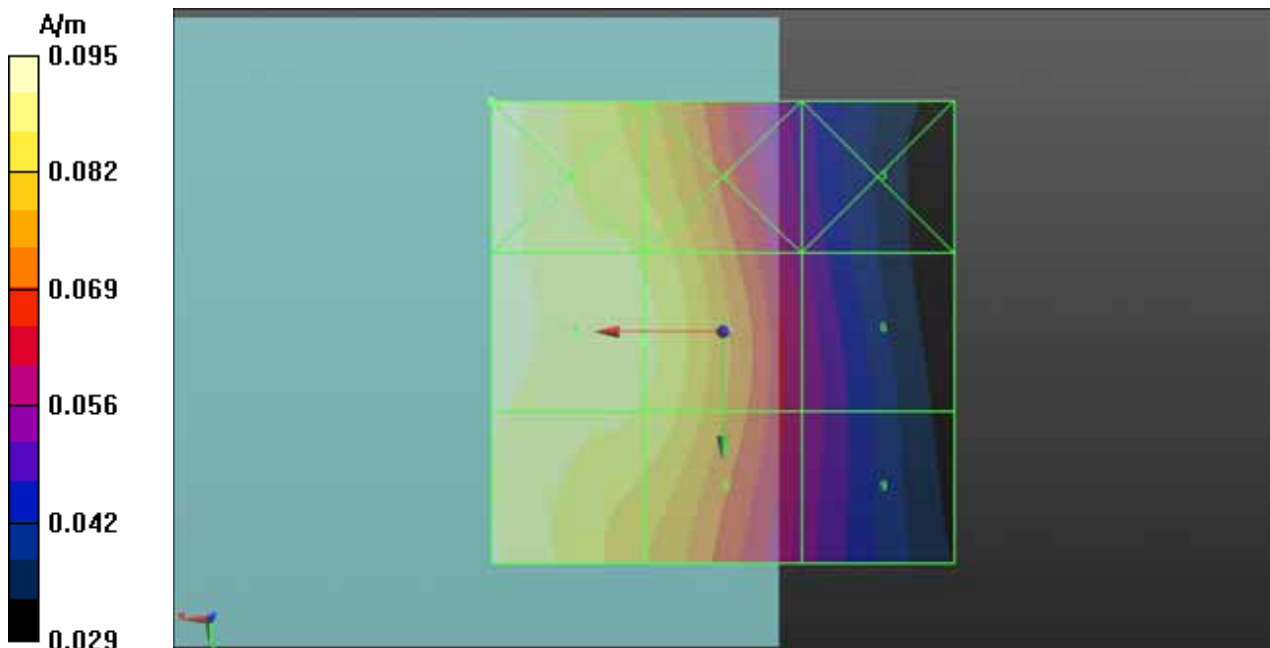

P42 H_Field WCDMA V_RMC12.2K_Ch4233_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4233/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1040 A/m; Power Drift = -0.14 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09507 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.097 A/m	Grid 2 M4 0.088 A/m	Grid 3 M4 0.053 A/m
Grid 4 M4 0.095 A/m	Grid 5 M4 0.091 A/m	Grid 6 M4 0.058 A/m
Grid 7 M4 0.095 A/m	Grid 8 M4 0.088 A/m	Grid 9 M4 0.058 A/m

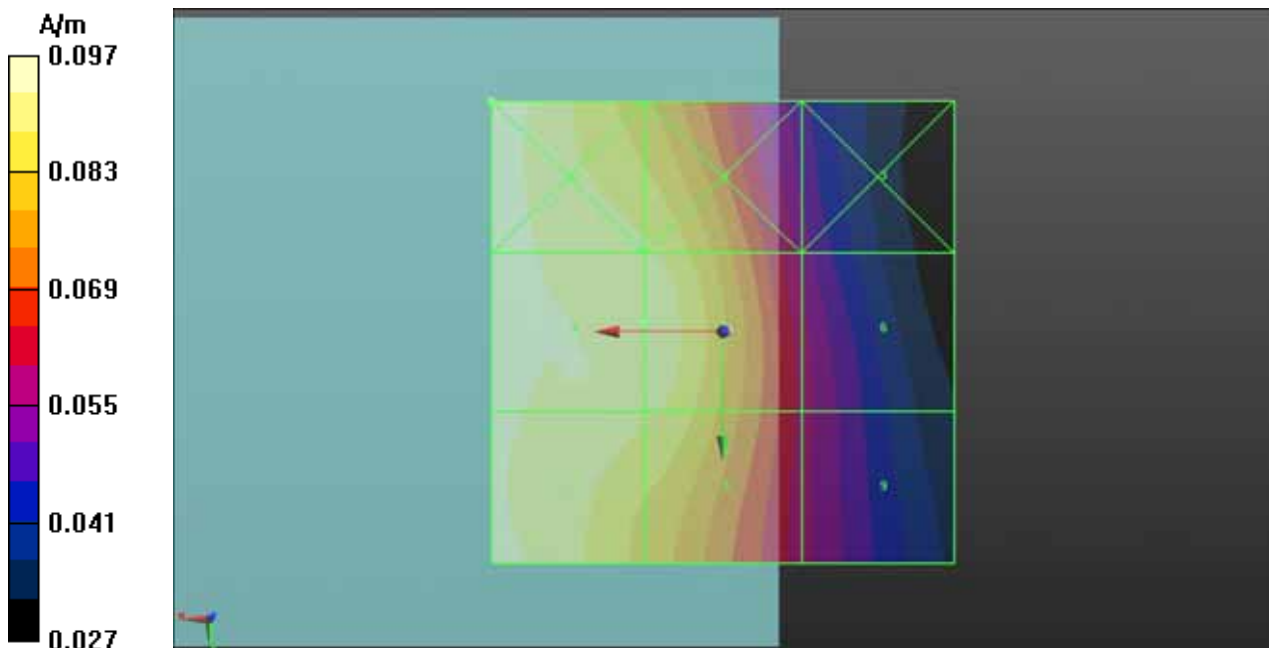

P80 H_Field WCMDA V_RMC12.2K_Ch4233_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4233/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.06800 A/m; Power Drift = 0.04 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09191 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.102 A/m	Grid 2 M4 0.081 A/m	Grid 3 M4 0.052 A/m
Grid 4 M4 0.092 A/m	Grid 5 M4 0.077 A/m	Grid 6 M4 0.048 A/m
Grid 7 M4 0.087 A/m	Grid 8 M4 0.072 A/m	Grid 9 M4 0.046 A/m

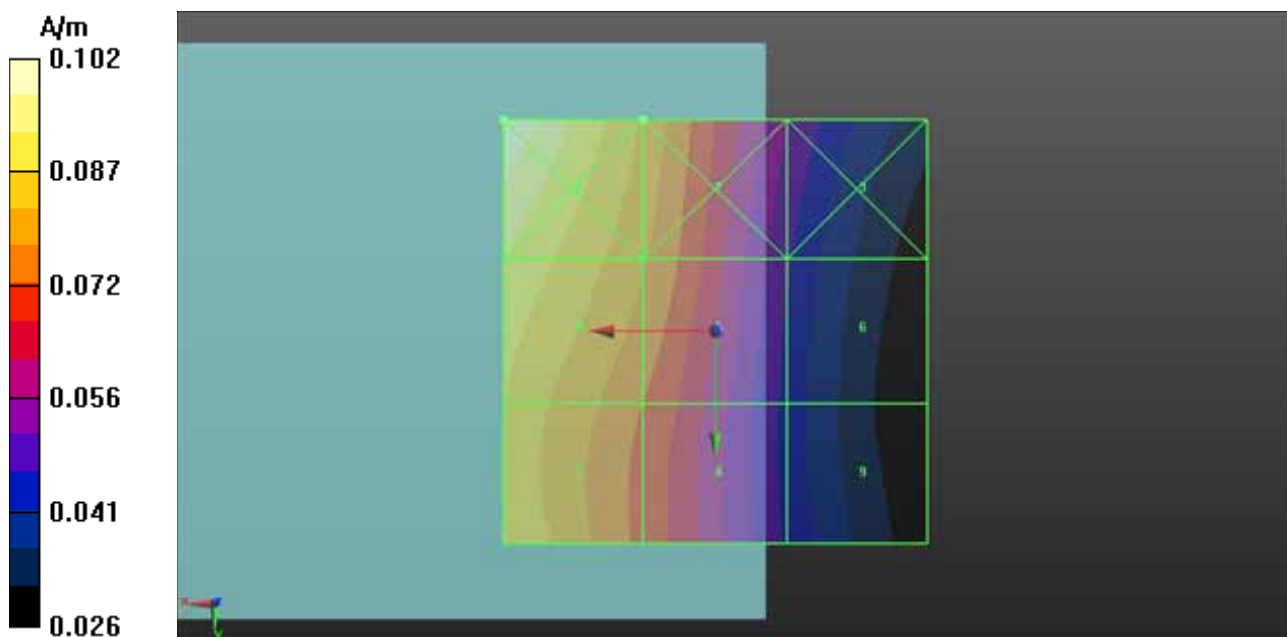

P55 H_Field WCDMA V_RMC12.2K_Ch4132_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.3160 A/m; Power Drift = 0.07 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.2181 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.205 A/m	Grid 2 M4 0.210 A/m	Grid 3 M4 0.119 A/m
Grid 4 M4 0.213 A/m	Grid 5 M4 0.218 A/m	Grid 6 M4 0.124 A/m
Grid 7 M4 0.177 A/m	Grid 8 M4 0.181 A/m	Grid 9 M4 0.106 A/m

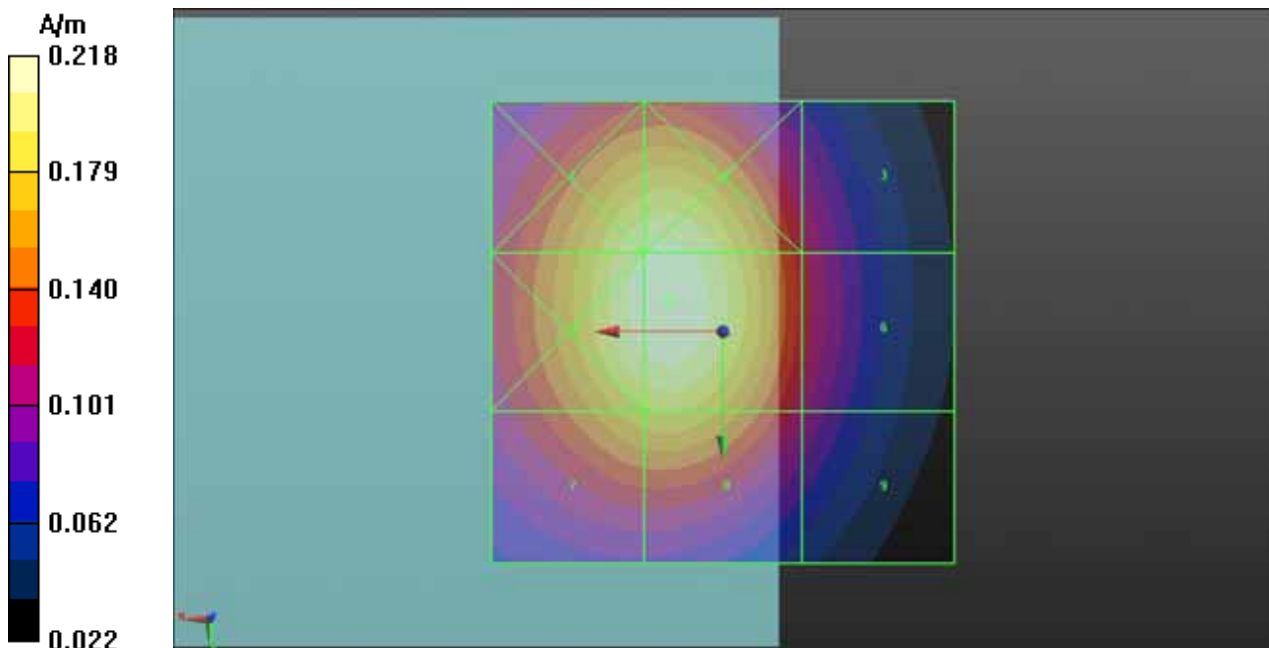

P56 H_Field WCDMA V_RMC12.2K_Ch4182_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4182/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.2870 A/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1982 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.187 A/m	Grid 2 M4 0.191 A/m	Grid 3 M4 0.108 A/m
Grid 4 M4 0.193 A/m	Grid 5 M4 0.198 A/m	Grid 6 M4 0.112 A/m
Grid 7 M4 0.161 A/m	Grid 8 M4 0.164 A/m	Grid 9 M4 0.096 A/m

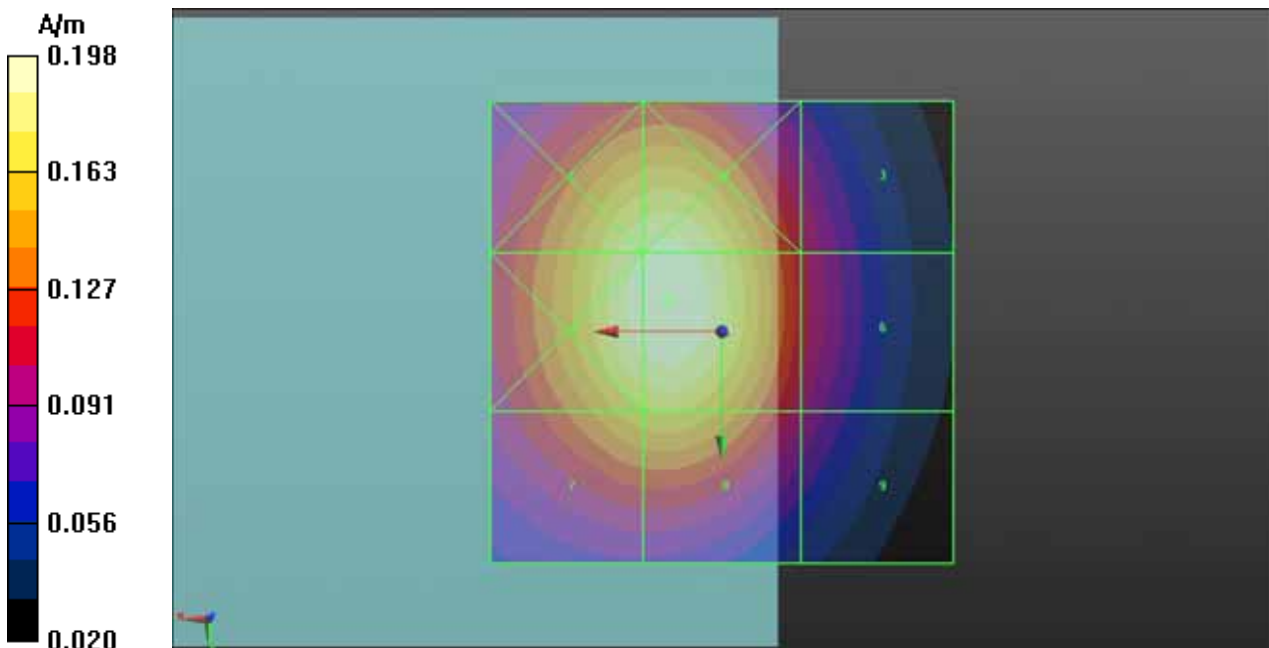

P57 H_Field WCDMA V_RMC12.2K_Ch4233_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4233/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.2750 A/m; Power Drift = 0.07 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1916 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.181 A/m	Grid 2 M4 0.185 A/m	Grid 3 M4 0.103 A/m
Grid 4 M4 0.187 A/m	Grid 5 M4 0.192 A/m	Grid 6 M4 0.107 A/m
Grid 7 M4 0.155 A/m	Grid 8 M4 0.158 A/m	Grid 9 M4 0.091 A/m

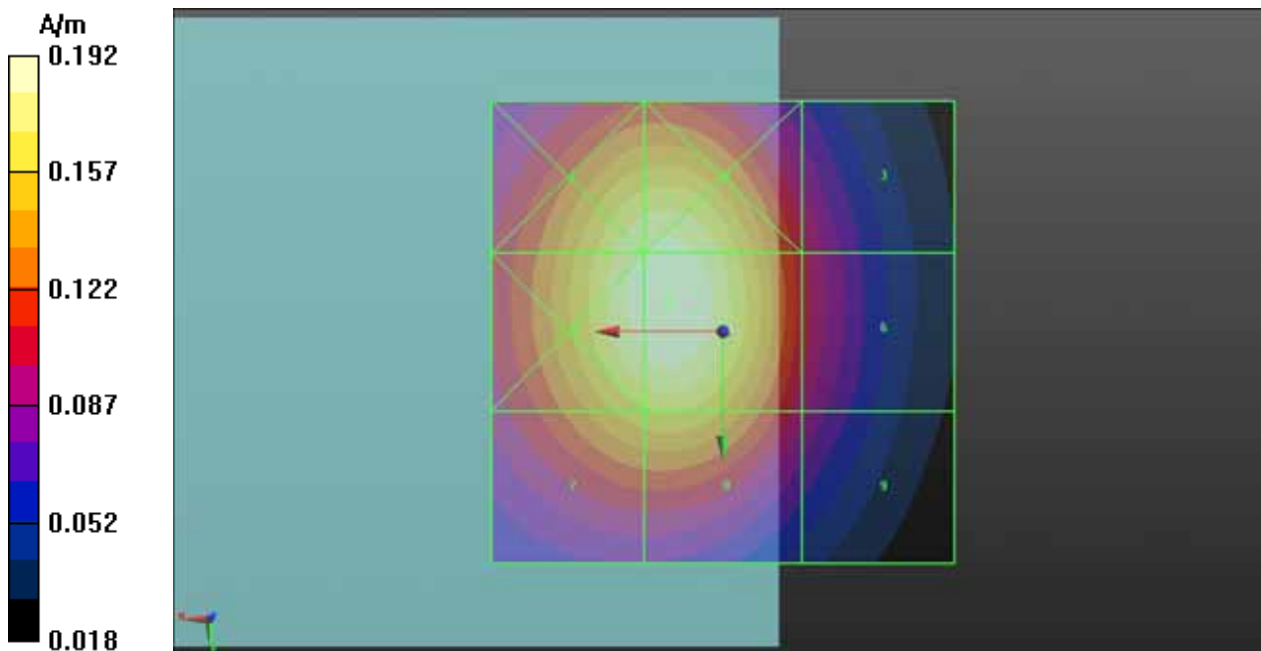

P81 H_Field WCDMA V_RMC12.2K_Ch4132_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch4132/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.06900 A/m; Power Drift = 0.04 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09314 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.104 A/m	Grid 2 M4 0.080 A/m	Grid 3 M4 0.048 A/m
Grid 4 M4 0.096 A/m	Grid 5 M4 0.078 A/m	Grid 6 M4 0.046 A/m
Grid 7 M4 0.093 A/m	Grid 8 M4 0.074 A/m	Grid 9 M4 0.046 A/m

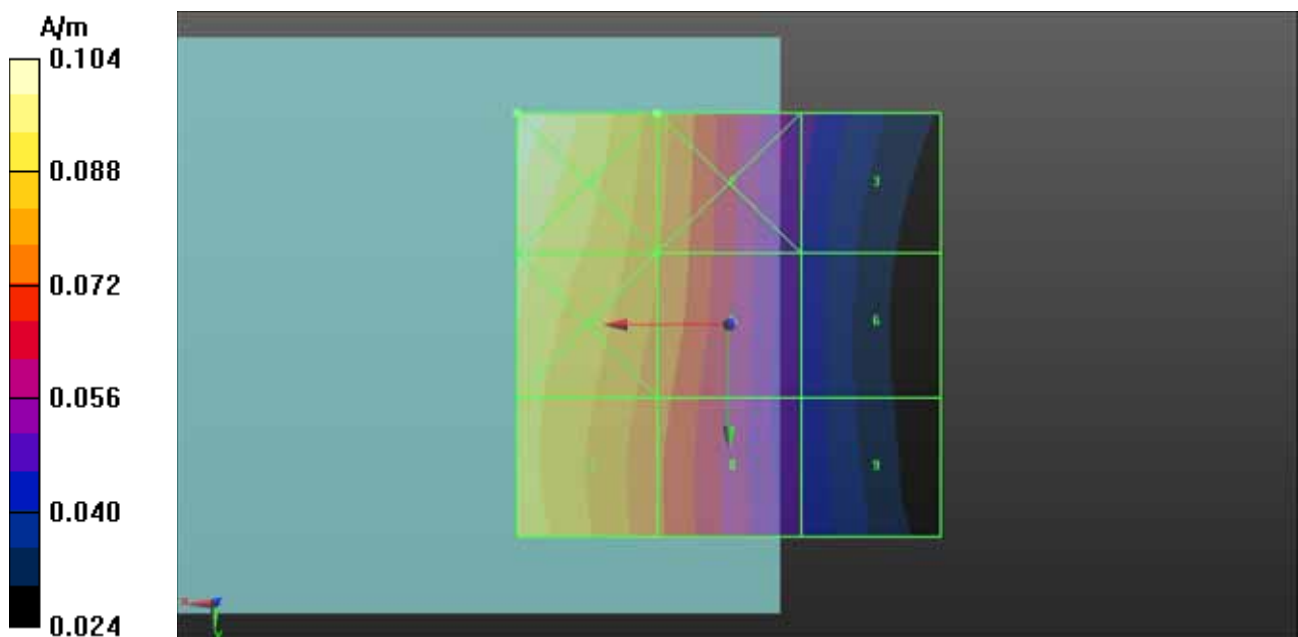

P43 H_Field WCDMA IV_RMC12.2K_Ch1312_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08000 A/m; Power Drift = -0.08 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1011 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.101 A/m	Grid 2 M4 0.090 A/m	Grid 3 M4 0.070 A/m
Grid 4 M4 0.090 A/m	Grid 5 M4 0.086 A/m	Grid 6 M4 0.064 A/m
Grid 7 M4 0.098 A/m	Grid 8 M4 0.092 A/m	Grid 9 M4 0.062 A/m

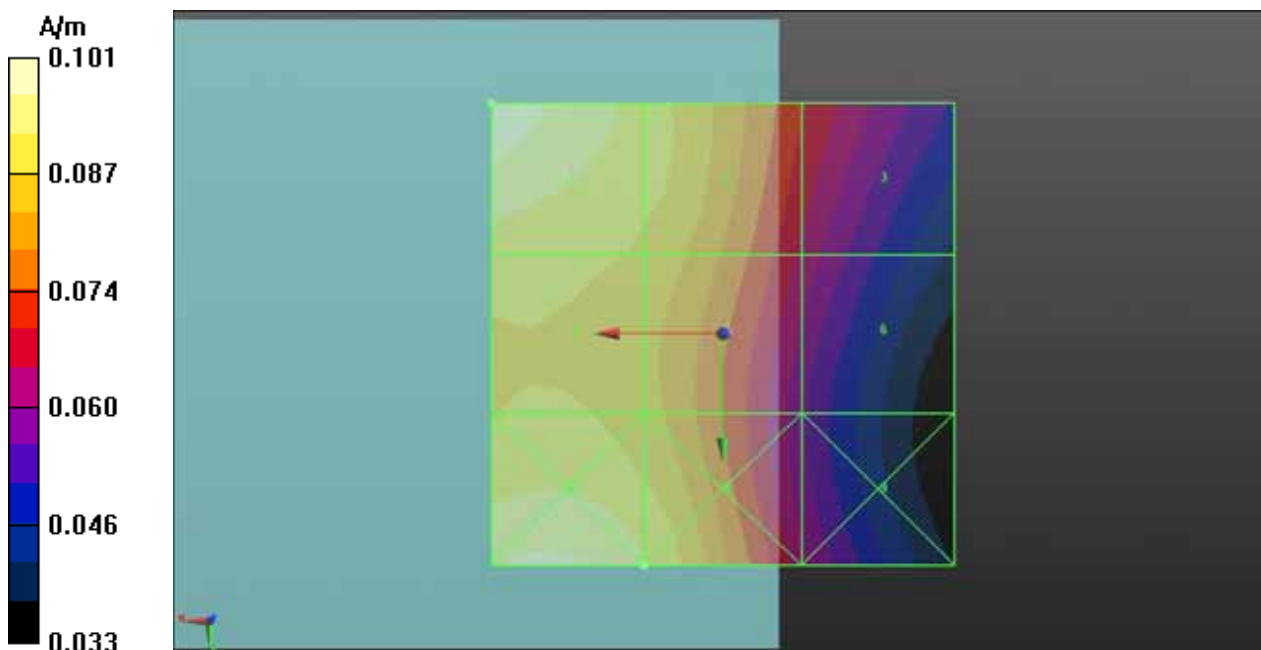

P44 H_Field WCDMA IV_RMC12.2K_Ch1413_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1413/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07800 A/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.08858 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.093 A/m	Grid 2 M4 0.085 A/m	Grid 3 M4 0.066 A/m
Grid 4 M4 0.083 A/m	Grid 5 M4 0.082 A/m	Grid 6 M4 0.062 A/m
Grid 7 M4 0.089 A/m	Grid 8 M4 0.086 A/m	Grid 9 M4 0.061 A/m

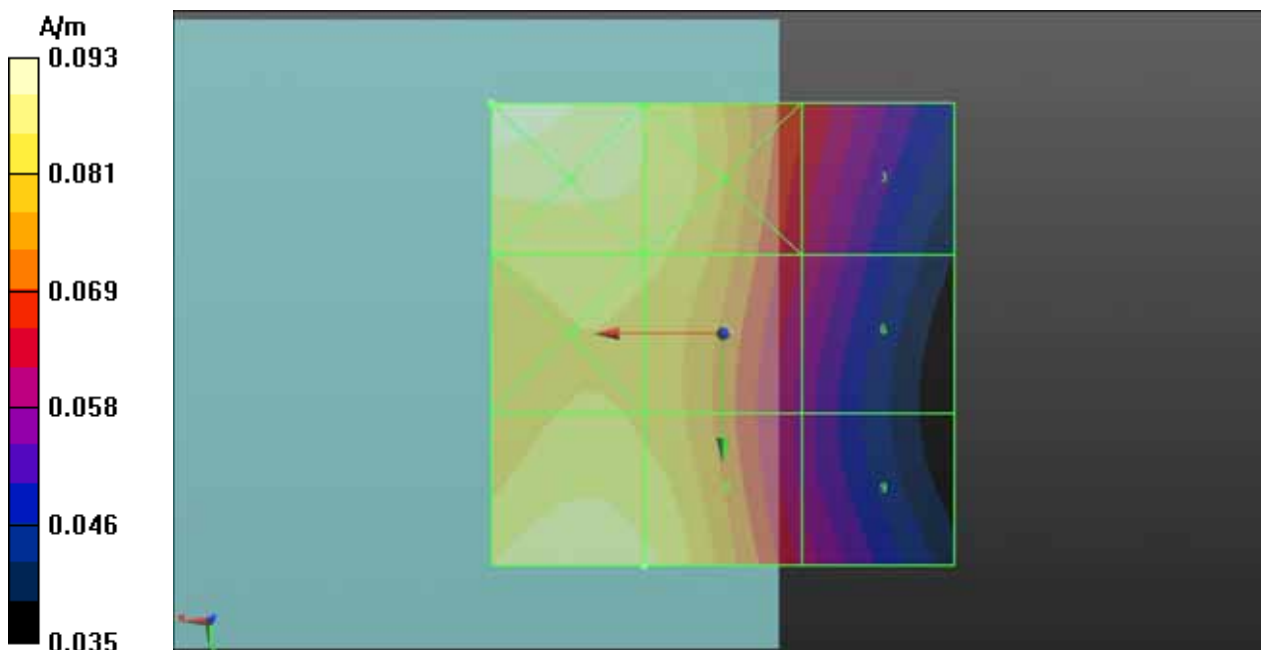

P45 H_Field WCDMA IV_RMC12.2K_Ch1513_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1513/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08200 A/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09008 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.092 A/m	Grid 2 M4 0.089 A/m	Grid 3 M4 0.070 A/m
Grid 4 M4 0.085 A/m	Grid 5 M4 0.085 A/m	Grid 6 M4 0.065 A/m
Grid 7 M4 0.090 A/m	Grid 8 M4 0.087 A/m	Grid 9 M4 0.059 A/m

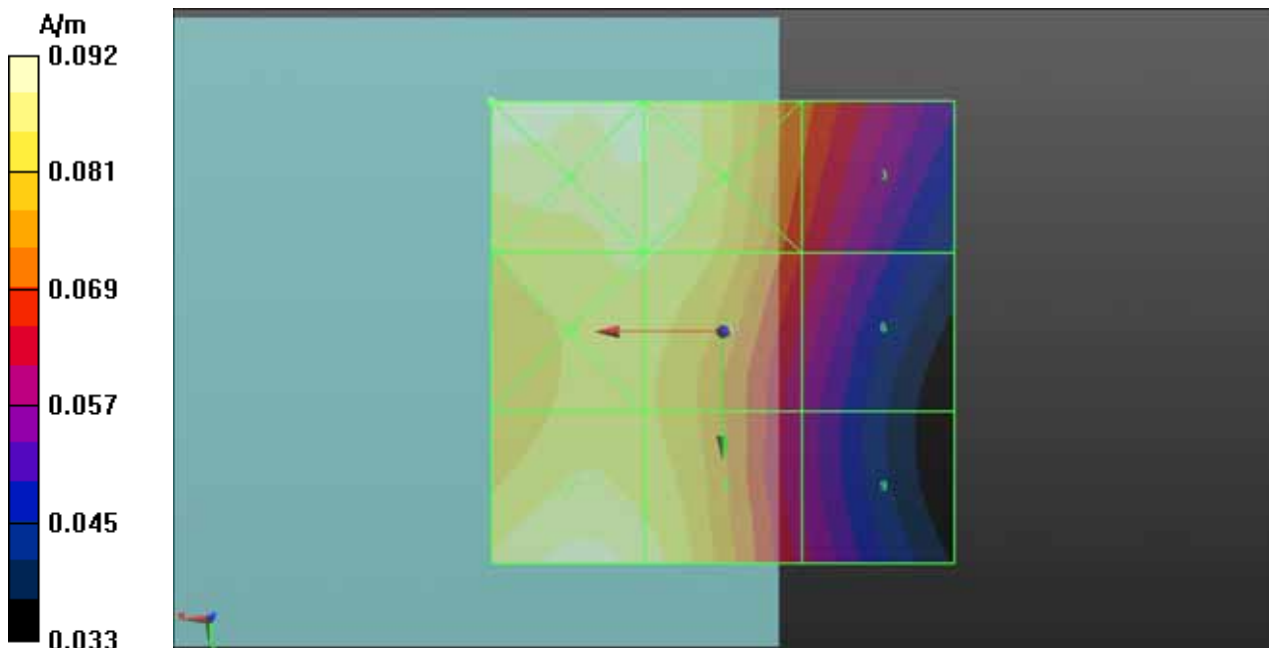

P82 H_Field WCDMA IV_RMC12.2K_Ch1312_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07900 A/m; Power Drift = -0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1189 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.119 A/m	Grid 2 M4 0.103 A/m	Grid 3 M4 0.075 A/m
Grid 4 M4 0.104 A/m	Grid 5 M4 0.093 A/m	Grid 6 M4 0.067 A/m
Grid 7 M4 0.105 A/m	Grid 8 M4 0.100 A/m	Grid 9 M4 0.070 A/m

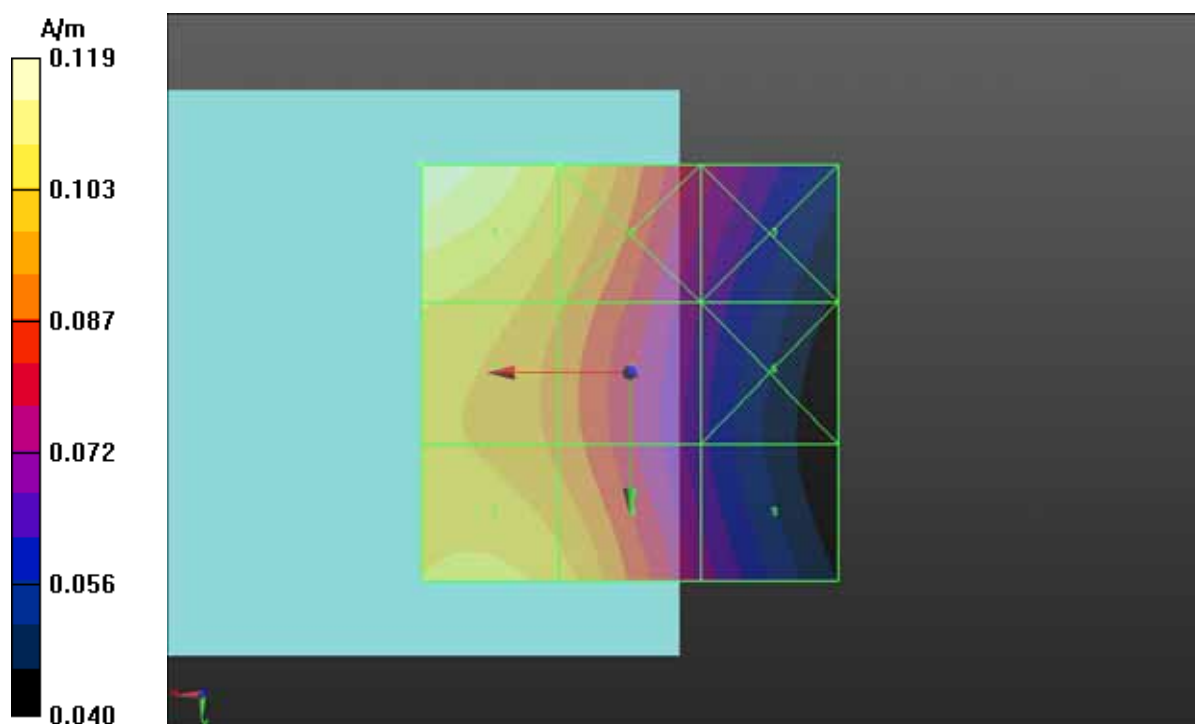

P58 H_Field WCDMA IV_RMC12.2K_Ch1312_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1312/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1450 A/m; Power Drift = 0.12 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1270 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.131 A/m	Grid 2 M4 0.132 A/m	Grid 3 M4 0.089 A/m
Grid 4 M4 0.125 A/m	Grid 5 M4 0.127 A/m	Grid 6 M4 0.088 A/m
Grid 7 M4 0.098 A/m	Grid 8 M4 0.099 A/m	Grid 9 M4 0.071 A/m

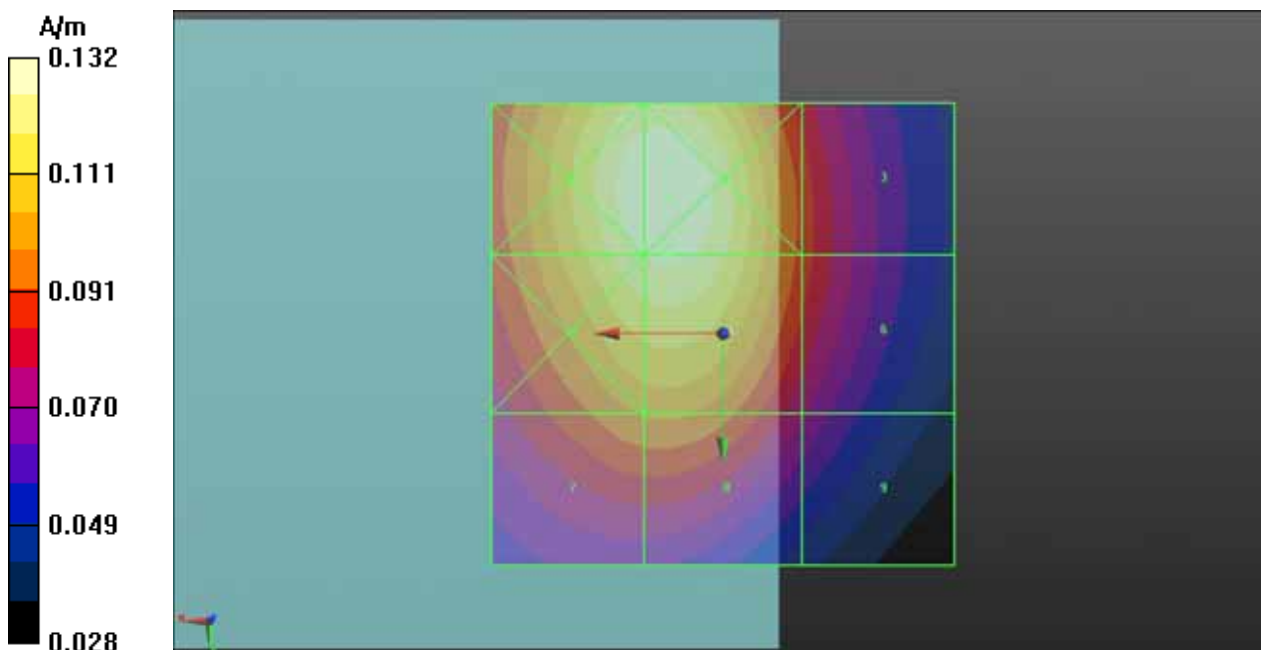

P59 H_Field WCDMA IV_RMC12.2K_Ch1413_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1413/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1520 A/m; Power Drift = 0.02 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1318 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.134 A/m	Grid 2 M4 0.138 A/m	Grid 3 M4 0.094 A/m
Grid 4 M4 0.129 A/m	Grid 5 M4 0.132 A/m	Grid 6 M4 0.093 A/m
Grid 7 M4 0.100 A/m	Grid 8 M4 0.102 A/m	Grid 9 M4 0.075 A/m

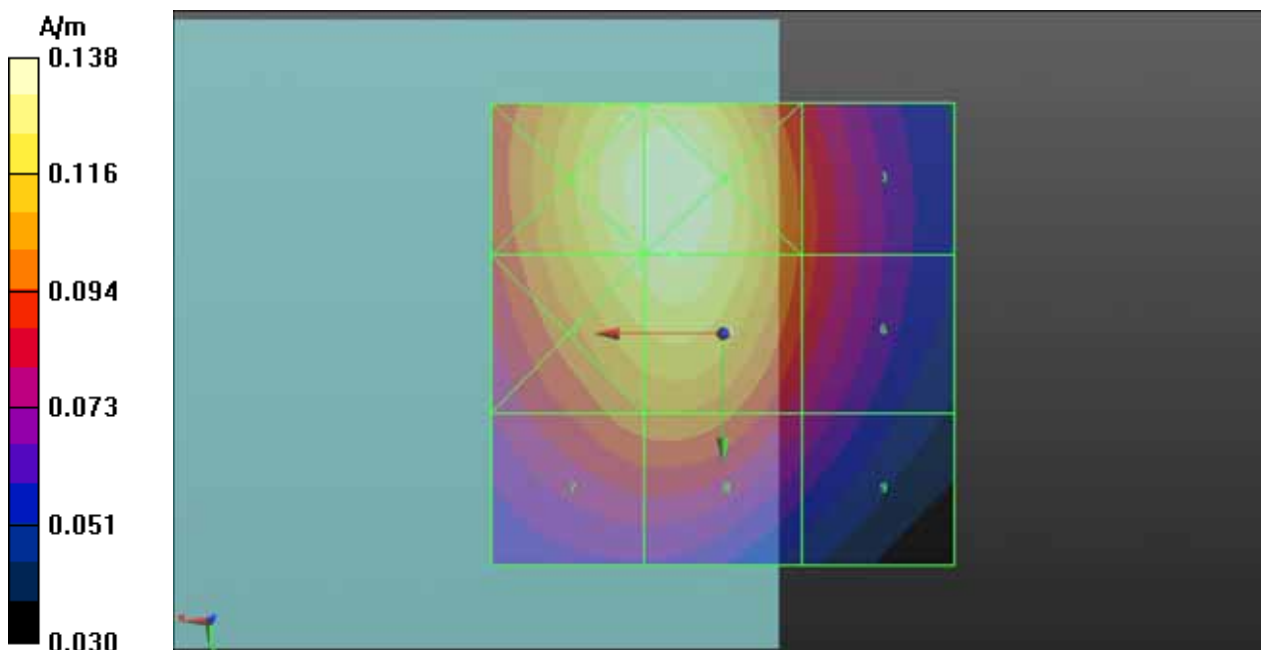

P60 H_Field WCDMA IV_RMC12.2K_Ch1513_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1513/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1430 A/m; Power Drift = -0.00 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1248 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.129 A/m	Grid 2 M4 0.131 A/m	Grid 3 M4 0.088 A/m
Grid 4 M4 0.123 A/m	Grid 5 M4 0.125 A/m	Grid 6 M4 0.087 A/m
Grid 7 M4 0.096 A/m	Grid 8 M4 0.097 A/m	Grid 9 M4 0.070 A/m

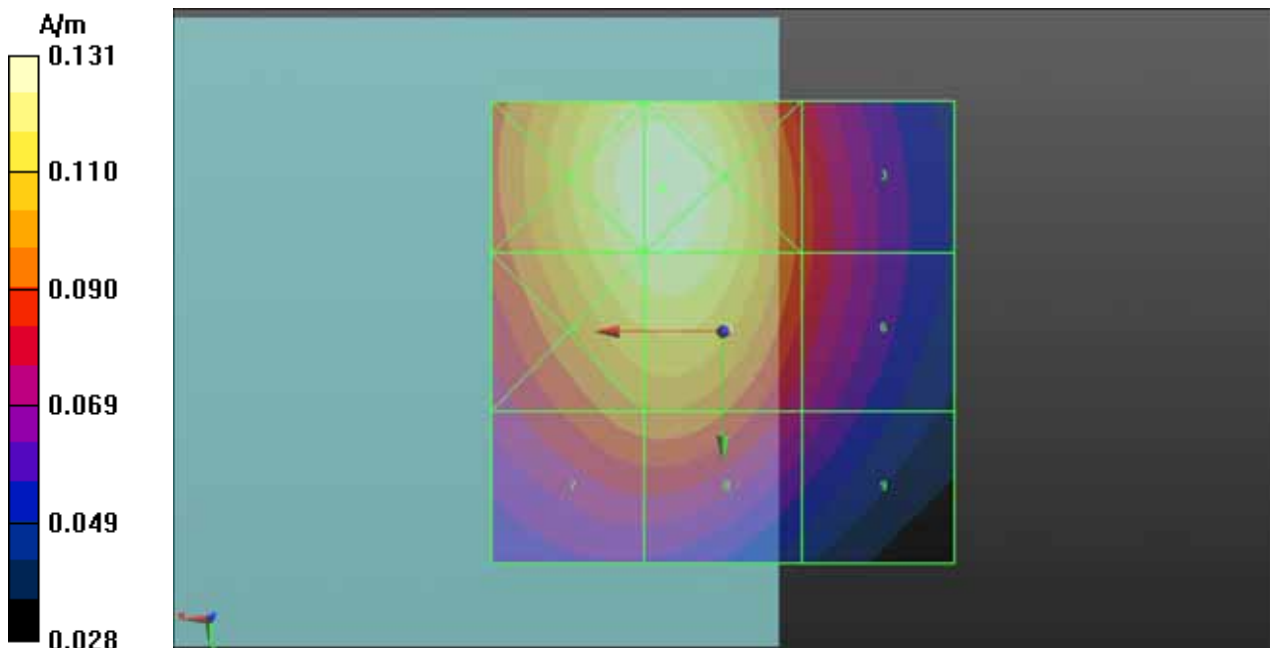

P83 H_Field WCDMA IV_RMC12.2K_Ch1413_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch1413/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07500 A/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09766 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.107 A/m	Grid 2 M4 0.095 A/m	Grid 3 M4 0.070 A/m
Grid 4 M4 0.095 A/m	Grid 5 M4 0.088 A/m	Grid 6 M4 0.064 A/m
Grid 7 M4 0.098 A/m	Grid 8 M4 0.093 A/m	Grid 9 M4 0.065 A/m

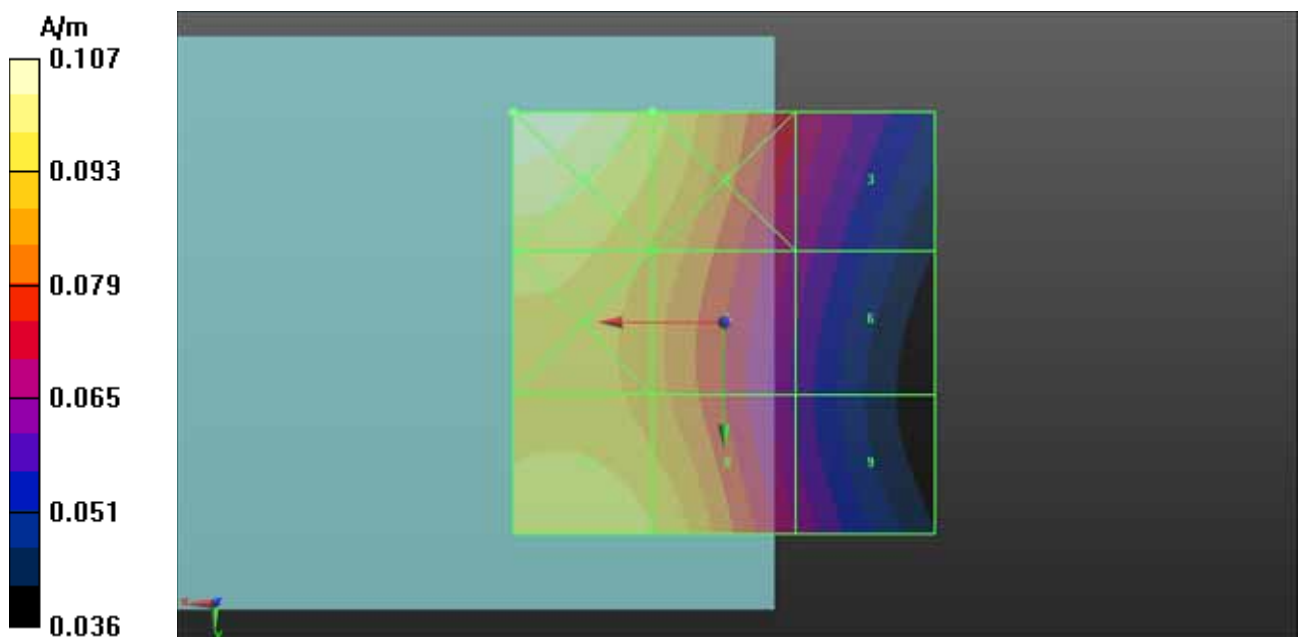

P37 H_Field WCDMA II_RMC12.2K_Ch9262_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08600 A/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09400 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.108 A/m	Grid 2 M4 0.080 A/m	Grid 3 M4 0.071 A/m
Grid 4 M4 0.090 A/m	Grid 5 M4 0.081 A/m	Grid 6 M4 0.070 A/m
Grid 7 M4 0.100 A/m	Grid 8 M4 0.094 A/m	Grid 9 M4 0.064 A/m

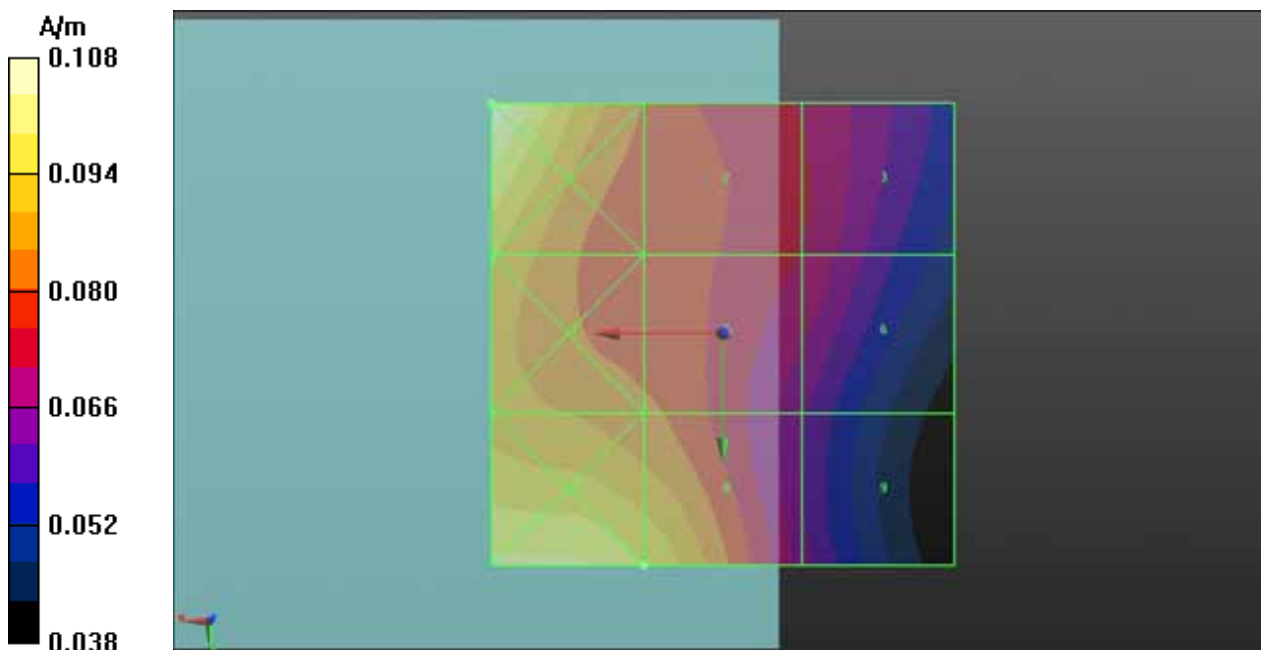

P38 H_Field WCDMA II_RMC12.2K_Ch9400_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9400/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.08500 A/m; Power Drift = 0.03 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1109 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.111 A/m	Grid 2 M4 0.084 A/m	Grid 3 M4 0.073 A/m
Grid 4 M4 0.093 A/m	Grid 5 M4 0.085 A/m	Grid 6 M4 0.072 A/m
Grid 7 M4 0.106 A/m	Grid 8 M4 0.100 A/m	Grid 9 M4 0.067 A/m

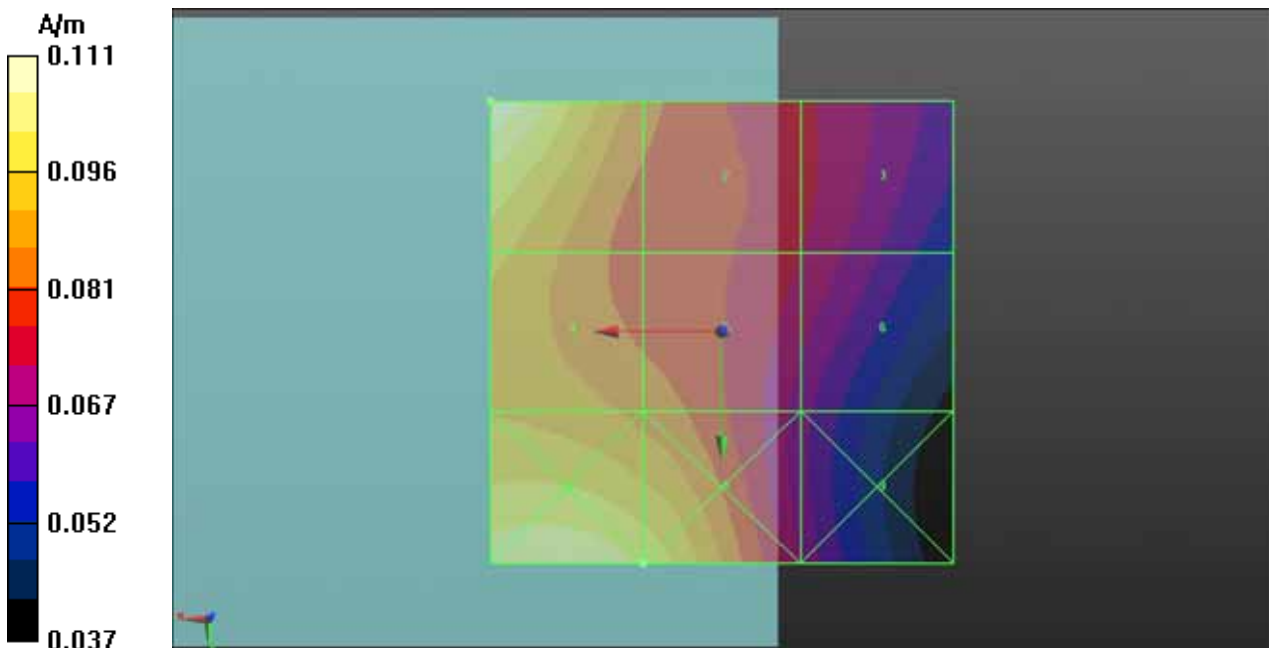

P39 H_Field WCDMA II_RMC12.2K_Ch9538_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9538/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07900 A/m; Power Drift = -0.06 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1105 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.111 A/m	Grid 2 M4 0.085 A/m	Grid 3 M4 0.074 A/m
Grid 4 M4 0.089 A/m	Grid 5 M4 0.081 A/m	Grid 6 M4 0.070 A/m
Grid 7 M4 0.099 A/m	Grid 8 M4 0.096 A/m	Grid 9 M4 0.065 A/m

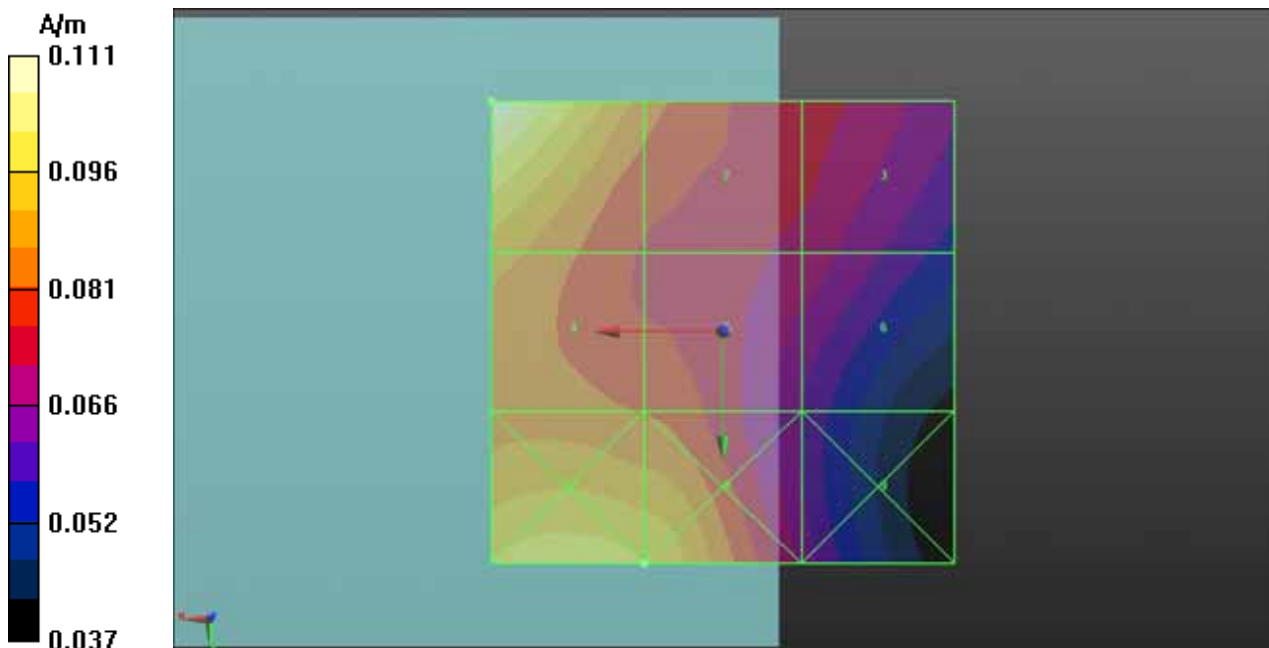

P78 H_Field WCDMA II_RMC12.2K_Ch9400_ANT0

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9400/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07500 A/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1029 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.103 A/m	Grid 2 M4 0.090 A/m	Grid 3 M4 0.074 A/m
Grid 4 M4 0.085 A/m	Grid 5 M4 0.082 A/m	Grid 6 M4 0.067 A/m
Grid 7 M4 0.097 A/m	Grid 8 M4 0.094 A/m	Grid 9 M4 0.064 A/m

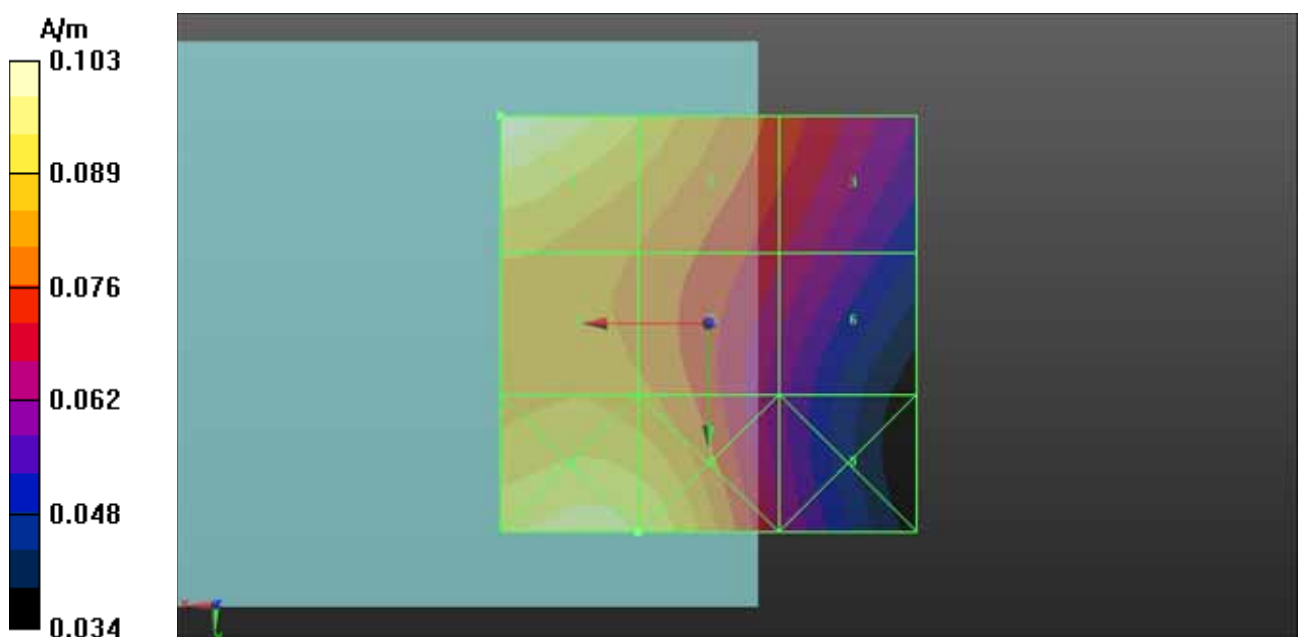

P52 H_Field WCDMA II_RMC12.2K_Ch9262_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1230 A/m; Power Drift = -0.06 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1045 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.110 A/m	Grid 2 M4 0.112 A/m	Grid 3 M4 0.079 A/m
Grid 4 M4 0.102 A/m	Grid 5 M4 0.105 A/m	Grid 6 M4 0.078 A/m
Grid 7 M4 0.076 A/m	Grid 8 M4 0.079 A/m	Grid 9 M4 0.064 A/m

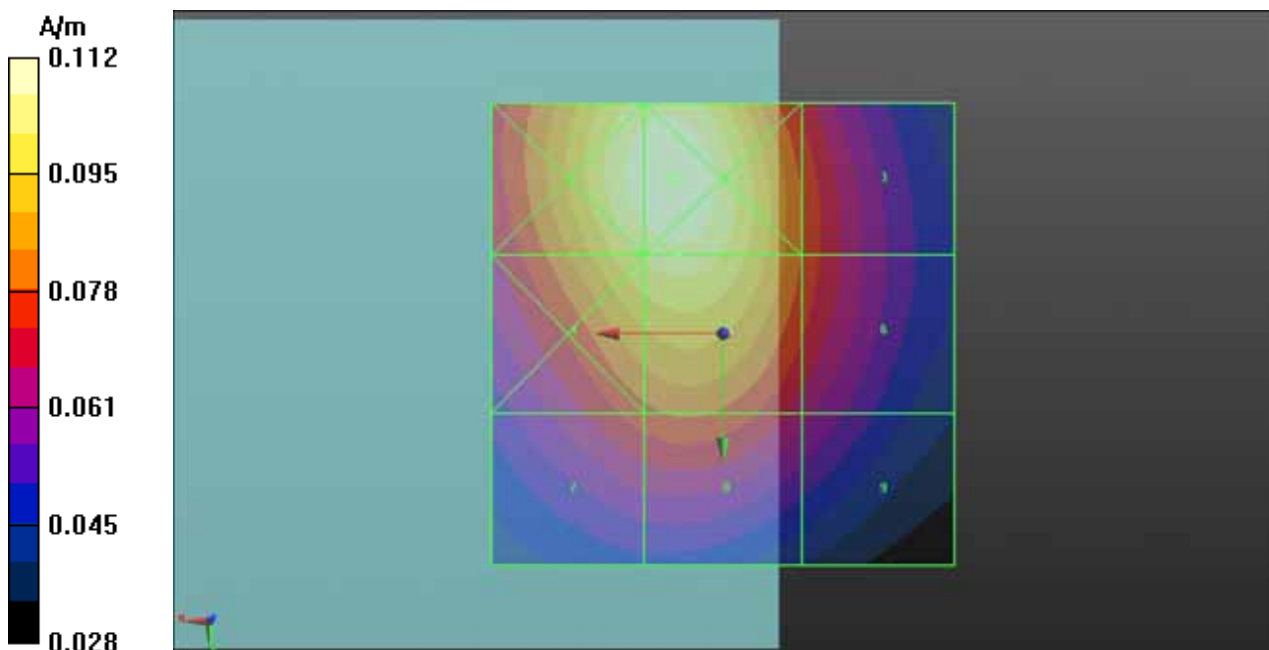

P53 H_Field WCDMA II_RMC12.2K_Ch9400_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:2.18776
 Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9400/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1180 A/m; Power Drift = 0.06 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.1034 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.109 A/m	Grid 2 M4 0.111 A/m	Grid 3 M4 0.079 A/m
Grid 4 M4 0.101 A/m	Grid 5 M4 0.103 A/m	Grid 6 M4 0.078 A/m
Grid 7 M4 0.075 A/m	Grid 8 M4 0.078 A/m	Grid 9 M4 0.064 A/m

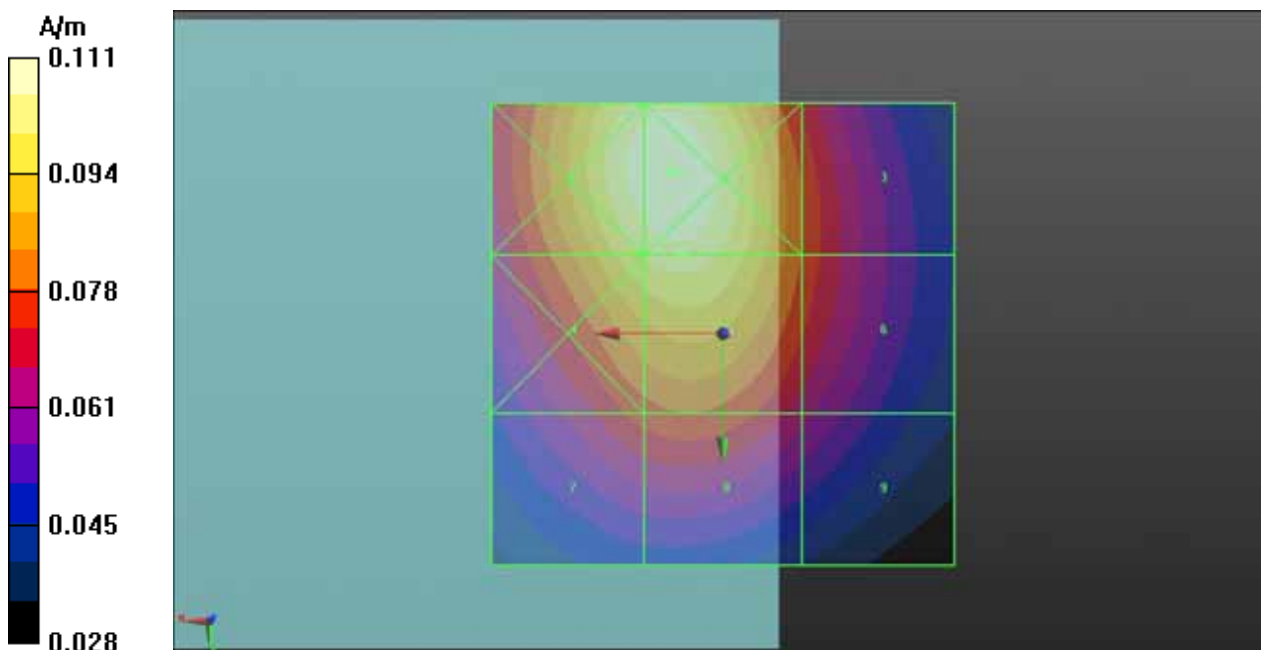

P54 H_Field WCDMA II_RMC12.2K_Ch9538_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.2 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9538/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.1130 A/m; Power Drift = -0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09860 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.105 A/m	Grid 2 M4 0.107 A/m	Grid 3 M4 0.077 A/m
Grid 4 M4 0.096 A/m	Grid 5 M4 0.099 A/m	Grid 6 M4 0.076 A/m
Grid 7 M4 0.071 A/m	Grid 8 M4 0.075 A/m	Grid 9 M4 0.063 A/m

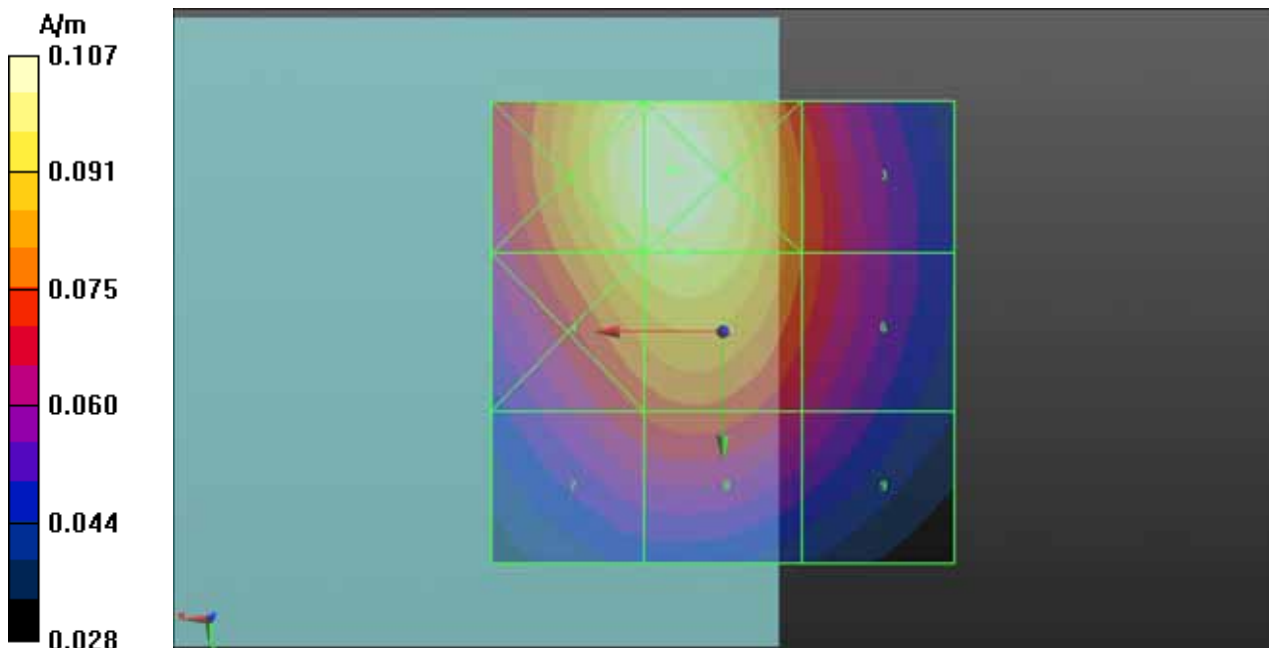

P79 H_Field WCDMA II_RMC12.2K_Ch9262_ANT1

DUT: 121129C09

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 21.6°C

DASY5 Configuration:

- Probe: H3DV6 - SN6274; ; Calibrated: 2012/2/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2012/4/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Ch9262/Hearing Aid Compatibility (101x101x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.07200 A/m; Power Drift = -0.01 dB

PMR calibrated. Calibrated PMF = 1.020 is applied.

H-field emissions = 0.09141 A/m

Near-field category: M4 (AWF 0 dB)

Grid 1 M4 0.093 A/m	Grid 2 M4 0.084 A/m	Grid 3 M4 0.070 A/m
Grid 4 M4 0.080 A/m	Grid 5 M4 0.078 A/m	Grid 6 M4 0.063 A/m
Grid 7 M4 0.091 A/m	Grid 8 M4 0.090 A/m	Grid 9 M4 0.064 A/m

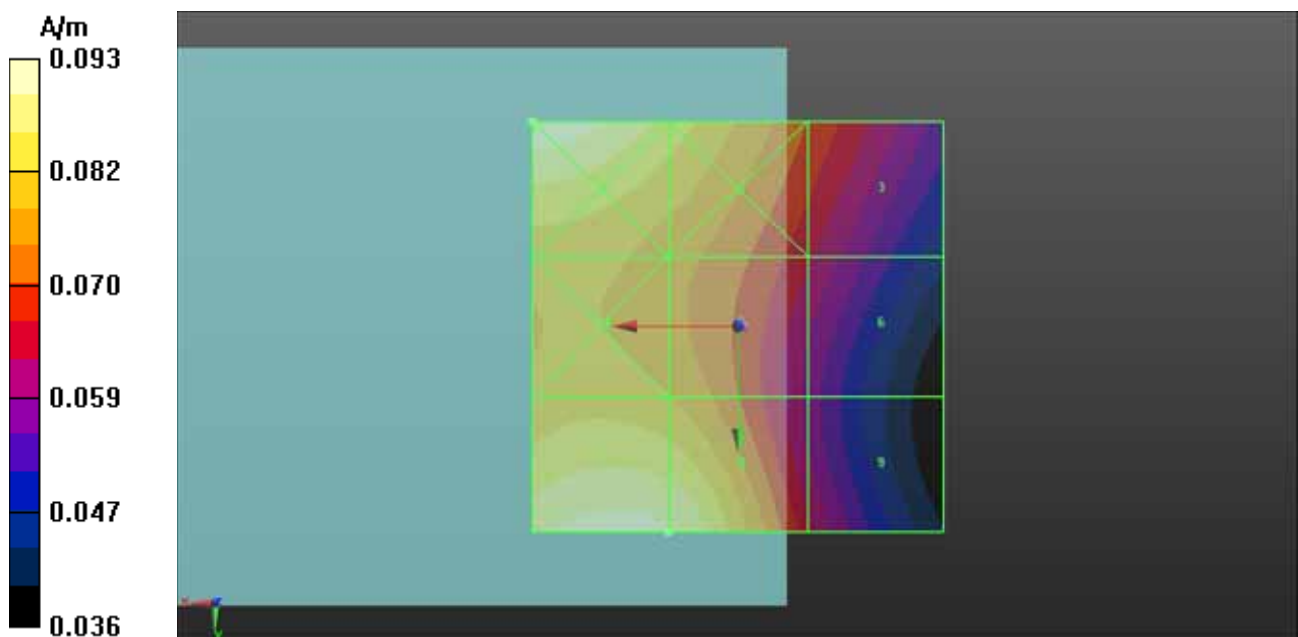



A D T

FCC HAC (RF Emission) Test Report

Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **CD835V3-1041_Mar12**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1041**

Calibration procedure(s) **QA CAL-20.v6
Calibration procedure for dipoles in air**

Calibration date: **March 19, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Probe ER3DV6	SN: 2336	29-Dec-11 (No. ER3-2336_Dec11)	Dec-12
Probe H3DV6	SN: 6065	29-Dec-11 (No. H3-6065_Dec11)	Dec-12
DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12
RF generator E4433B	MY 41000675	03-Nov-04 (in house check Oct-11)	In house check: Oct-13

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Signature

Approved by: **Fin Bomholt** Name: Fin Bomholt R&D Director

Issued: March 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.0
Extrapolation	Advanced Extrapolation	
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	10mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz \pm 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW input power	0.455 A / m \pm 8.2 % (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	163.6 V / m
Maximum measured above low end	100 mW input power	159.3 V / m
Averaged maximum above arm	100 mW input power	161.5 V / m \pm 12.8 % (k=2)

Appendix

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	15.7 dB	42.5 Ω - 13.5 j Ω
835 MHz	28.7 dB	48.0 Ω + 3.0 j Ω
900 MHz	16.6 dB	57.5 Ω - 14.1 j Ω
950 MHz	17.3 dB	45.3 Ω + 12.2 j Ω
960 MHz	13.0 dB	56.0 Ω + 23.6 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

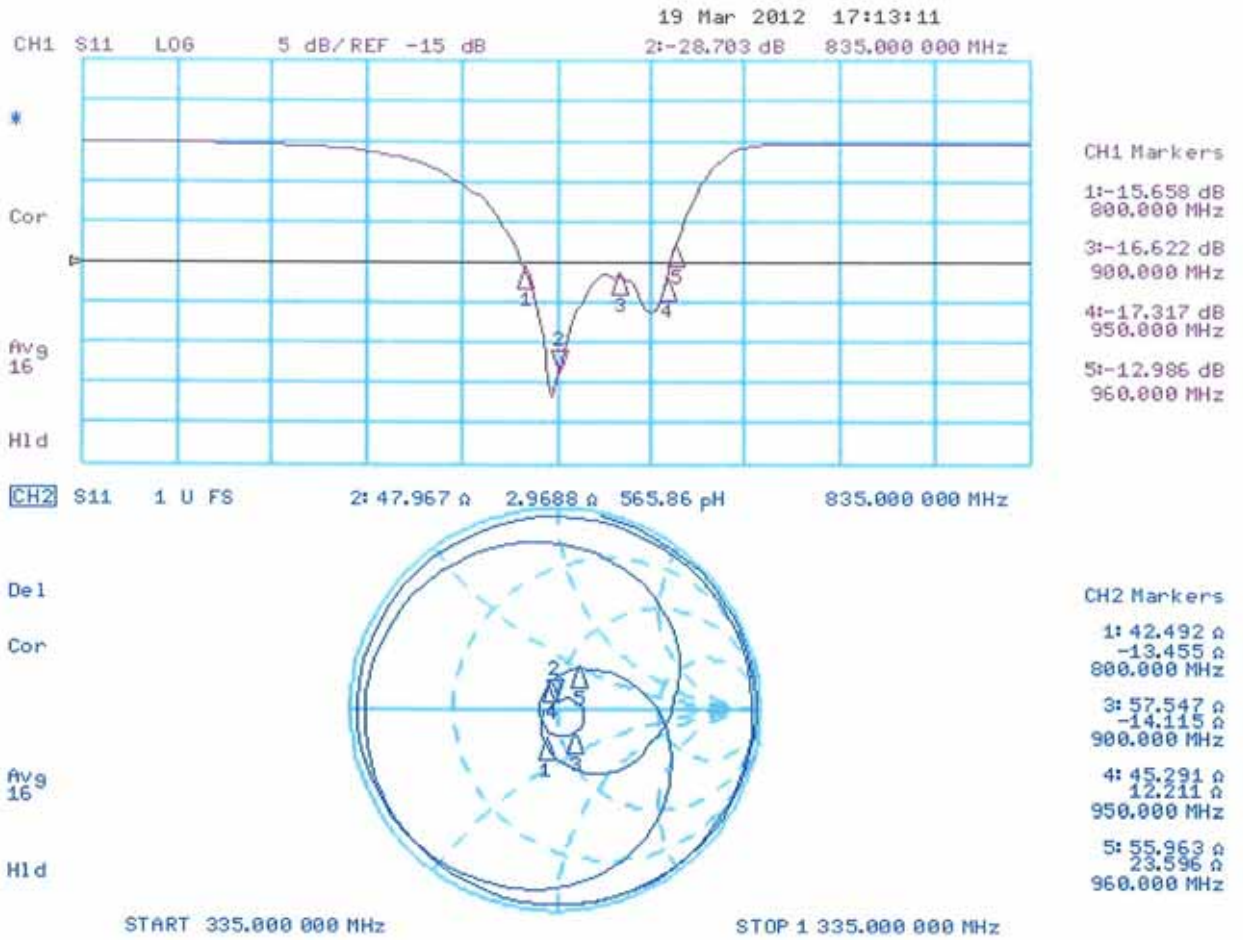

DASY5 H-field Result

Date: 19.03.2012

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1041

Communication System: CW; Frequency: 835 MHz
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:


- Probe: H3DV6 - SN6065; ; Calibrated: 29.12.2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole H-Field measurement @ 835MHz/H-Scan - 835MHz d=10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 0.48 V/m; Power Drift = -0.00 dB
PMR not calibrated. PMF = 1.000 is applied.
H-field emissions = 0.46 A/m
Near-field category: M4 (AWF 0 dB)

PMF scaled H-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
0.37 A/m	0.40 A/m	0.39 A/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
0.42 A/m	0.46 A/m	0.44 A/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
0.36 A/m	0.40 A/m	0.39 A/m

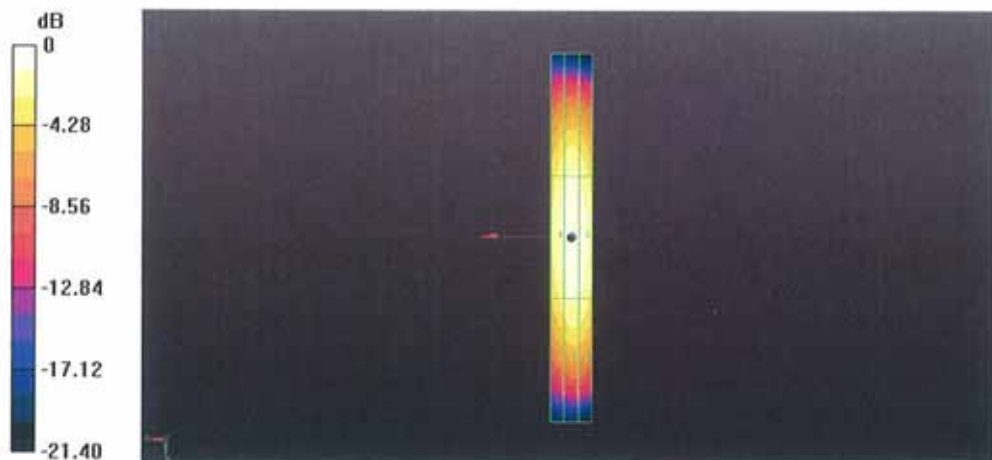

0 dB = 0.46A/m = -6.74 dB A/m

DASY5 E-field Result

Date: 19.03.2012

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1041

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 29.12.2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 106.2 V/m; Power Drift = 0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 163.6 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
155.3 V/m	159.3 V/m	154.2 V/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
84.98 V/m	87.25 V/m	85.11 V/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
150.4 V/m	163.6 V/m	163.2 V/m

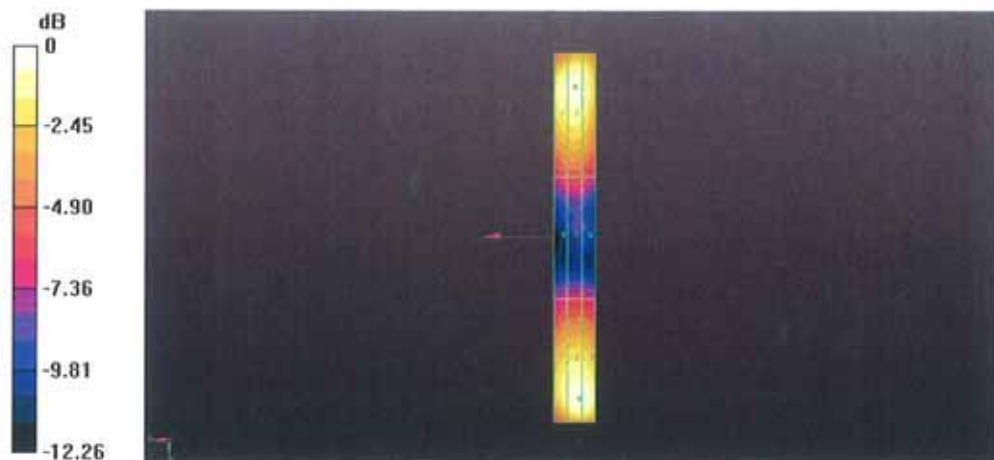

0 dB = 163.6V/m = 44.28 dB V/m



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **CD1880V3-1032_Apr12**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1032**

Calibration procedure(s) **QA CAL-20.v6
 Calibration procedure for dipoles in air**

Calibration date: **April 26, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Probe ER3DV6	SN: 2336	29-Dec-11 (No. ER3-2336_Dec11)	Dec-12
Probe H3DV6	SN: 6065	29-Dec-11 (No. H3-6065_Dec11)	Dec-12
DAE4	SN: 781	25-Apr-12 (No. DAE4-781_Apr12)	Apr-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-11)	In house check: Oct-12
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12
RF generator E4433B	MY 41000675	03-Nov-04 (in house check Oct-11)	In house check: Oct-13

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Fin Bornholt	Function R&D Director	

Issued: April 27, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm (15 mm for [2]) above the top metal edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1] and [2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (15 mm for [2]) (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.1
Extrapolation	Advanced Extrapolation	
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	10mm 15mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz \pm 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1880 MHz

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW input power	0.461 A / m \pm 8.2 % (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	142.2 V / m
Maximum measured above low end	100 mW input power	138.0 V / m
Averaged maximum above arm	100 mW input power	140.1 V / m \pm 12.8 % (k=2)

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	88.6 V / m
Maximum measured above low end	100 mW input power	87.8 V / m
Averaged maximum above arm	100 mW input power	88.2 V / m \pm 12.8 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Appendix

Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	24.9 dB	$50.9 \Omega + 5.7 j\Omega$
1880 MHz	20.8 dB	$51.6 \Omega + 9.2 j\Omega$
1900 MHz	21.0 dB	$54.4 \Omega + 8.2 j\Omega$
1950 MHz	27.6 dB	$54.3 \Omega + 0.6 j\Omega$
2000 MHz	21.8 dB	$42.8 \Omega + 2.2 j\Omega$

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

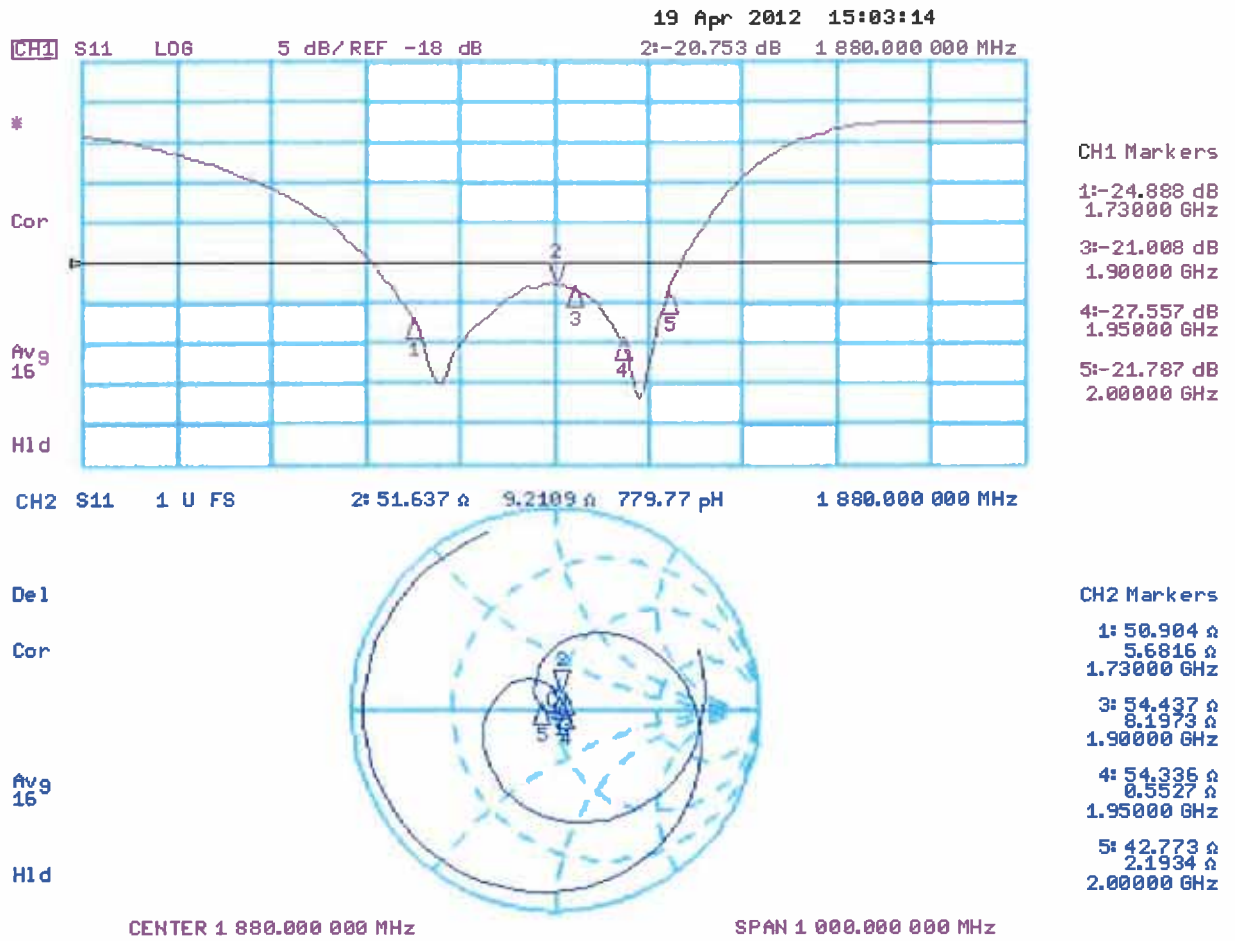

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 157.1 V/m; Power Drift = -0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.77 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3 86.19 V/m	Grid 2 M3 87.77 V/m	Grid 3 M3 86.19 V/m
Grid 4 M3 67.85 V/m	Grid 5 M3 68.46 V/m	Grid 6 M3 67.31 V/m
Grid 7 M3 87.74 V/m	Grid 8 M3 88.63 V/m	Grid 9 M3 86.31 V/m

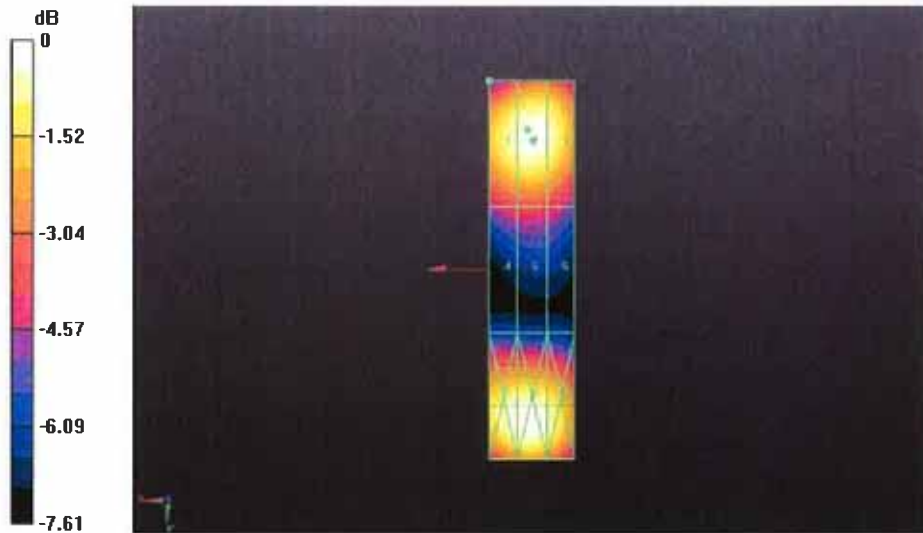

0 dB = 142.2 V/m = 43.06 dB V/m



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B. V. ADT (Auden)**

Certificate No: **ER3-2445_Jun12**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2445**

Calibration procedure(s) **QA CAL-02.v6, QA CAL-25.v4
Calibration procedure for E-field probes optimized for close near field
evaluations in air**



Calibration date: **June 22, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ER3DV6	SN: 2328	11-Oct-11 (No. ER3-2328 Oct11)	Oct-12
DAE4	SN: 789	30-Jan-12 (No. DAE4-789 Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: June 22, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Glossary:

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- CTIA Test Plan for Hearing Aid Compatibility, April 2010.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart).
- DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}*: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe ER3DV6

SN:2445

Manufactured: January 22, 2008
Calibrated: June 22, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2445

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$)	1.48	1.70	1.83	$\pm 10.1 \%$
DCP (mV) ^B	98.3	98.0	101.5	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
0	CW	0.00	X	0.00	0.00	1.00	189.0	$\pm 3.0 \%$
			Y	0.00	0.00	1.00	161.6	
			Z	0.00	0.00	1.00	150.1	
10012	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	1.87	X	2.68	66.6	18.0	113.3	$\pm 1.2 \%$
			Y	2.75	67.3	18.5	134.4	
			Z	3.45	71.8	20.6	123.0	
10013	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	9.47	X	11.72	71.8	24.4	110.7	$\pm 3.5 \%$
			Y	11.96	72.6	24.9	134.8	
			Z	11.80	72.0	24.2	122.0	
10062	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	8.69	X	10.93	70.5	23.1	111.6	$\pm 3.0 \%$
			Y	11.18	71.2	23.5	136.6	
			Z	10.78	70.2	22.7	120.9	
10114	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	8.10	X	10.57	69.7	22.1	114.5	$\pm 4.9 \%$
			Y	11.09	71.4	23.3	140.0	
			Z	10.48	69.6	22.0	123.9	
10011	UMTS-FDD (WCDMA)	3.40	X	3.24	64.1	17.0	110.1	$\pm 0.7 \%$
			Y	3.39	65.0	17.6	130.2	
			Z	3.30	64.9	17.4	117.2	
10021	GSM-FDD (TDMA, GMSK)	9.40	X	17.79	99.7	28.4	147.3	$\pm 2.5 \%$
			Y	13.58	97.6	27.9	115.6	
			Z	13.80	92.0	25.6	120.2	
10039	CDMA2000 (1xRTT, RC1)	4.57	X	4.42	64.9	17.9	111.5	$\pm 1.2 \%$
			Y	4.64	66.3	18.8	131.9	
			Z	4.40	65.4	18.2	117.5	
10056	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	11.01	X	11.49	96.6	37.3	116.8	$\pm 4.6 \%$
			Y	11.57	100.0	39.5	130.5	
			Z	14.18	99.0	36.9	133.6	
10081	CDMA2000 (1xRTT, RC3)	3.96	X	3.63	64.4	17.5	108.7	$\pm 0.9 \%$
			Y	3.77	65.2	18.0	128.1	
			Z	3.66	64.9	17.7	115.1	
10082	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	4.77	X	4.12	73.4	14.2	146.7	$\pm 1.7 \%$
			Y	53.33	99.7	21.4	120.4	
			Z	10.52	79.8	15.8	115.1	
10100	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	5.66	X	6.22	66.7	19.3	125.0	$\pm 2.5 \%$
			Y	6.62	68.5	20.5	146.5	
			Z	6.23	67.0	19.4	130.8	

10101	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	6.41	X	7.48	67.9	20.3	132.2	±2.7 %
			Y	7.29	67.4	20.1	110.4	
			Z	7.40	67.8	20.2	140.9	
10108	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	5.79	X	6.20	66.8	19.6	121.8	±2.7 %
			Y	6.51	68.3	20.6	144.1	
			Z	6.14	66.8	19.4	129.4	
10109	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	6.42	X	7.21	67.5	20.2	128.9	±2.7 %
			Y	7.04	67.1	20.0	108.0	
			Z	7.12	67.4	20.0	136.4	
10110	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	5.75	X	5.90	66.3	19.3	118.9	±2.2 %
			Y	6.14	67.5	20.2	140.7	
			Z	5.80	66.2	19.2	125.6	
10111	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	6.44	X	6.99	67.4	20.2	125.4	±3.5 %
			Y	7.28	68.7	21.1	148.3	
			Z	6.87	67.3	20.0	132.5	
10148	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	5.83	X	6.23	66.7	19.5	122.2	±2.7 %
			Y	6.58	68.3	20.6	144.9	
			Z	6.19	66.7	19.4	129.4	
10149	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	6.42	X	7.25	67.7	20.3	129.0	±3.0 %
			Y	7.06	67.1	20.1	108.3	
			Z	7.10	67.3	20.0	136.5	
10154	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	5.76	X	5.85	66.0	19.1	119.1	±2.2 %
			Y	6.13	67.4	20.1	140.9	
			Z	5.79	66.1	19.1	125.8	
10155	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	6.43	X	6.83	66.6	19.6	125.5	±2.5 %
			Y	7.10	67.8	20.4	148.9	
			Z	6.84	67.2	19.9	132.5	
10156	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	5.79	X	5.66	65.8	19.1	116.4	±2.2 %
			Y	5.93	67.2	20.1	137.2	
			Z	5.58	65.9	19.1	122.9	
10157	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	6.49	X	6.71	67.2	20.1	121.0	±2.7 %
			Y	6.83	67.6	20.4	143.2	
			Z	6.57	67.0	19.9	127.4	
10160	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	5.81	X	6.31	66.8	19.5	123.4	±2.7 %
			Y	6.63	68.2	20.5	146.6	
			Z	6.23	66.7	19.4	130.7	
10161	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	6.42	X	7.16	67.0	19.8	130.2	±2.7 %
			Y	7.16	67.4	20.2	108.6	
			Z	7.14	67.4	20.0	137.3	
10163	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	5.68	X	5.47	65.7	19.0	115.2	±2.2 %
			Y	5.77	67.2	20.0	135.6	
			Z	5.40	65.7	18.9	121.5	
10164	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	6.44	X	6.42	66.3	19.5	119.4	±2.5 %
			Y	6.73	67.9	20.5	140.6	
			Z	6.48	67.2	20.0	125.9	


10166	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	5.45	X	4.84	65.1	18.6	109.7	±1.7 %
			Y	5.07	66.5	19.5	128.4	
			Z	4.86	65.6	18.8	116.5	
10167	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	6.21	X	5.84	66.6	19.7	112.3	±2.7 %
			Y	6.11	68.1	20.7	131.3	
			Z	5.78	66.7	19.6	118.4	
10042	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	7.78	X	5.22	71.1	15.9	141.1	±3.3 %
			Y	36.99	99.8	25.4	114.1	
			Z	8.36	76.2	18.3	118.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

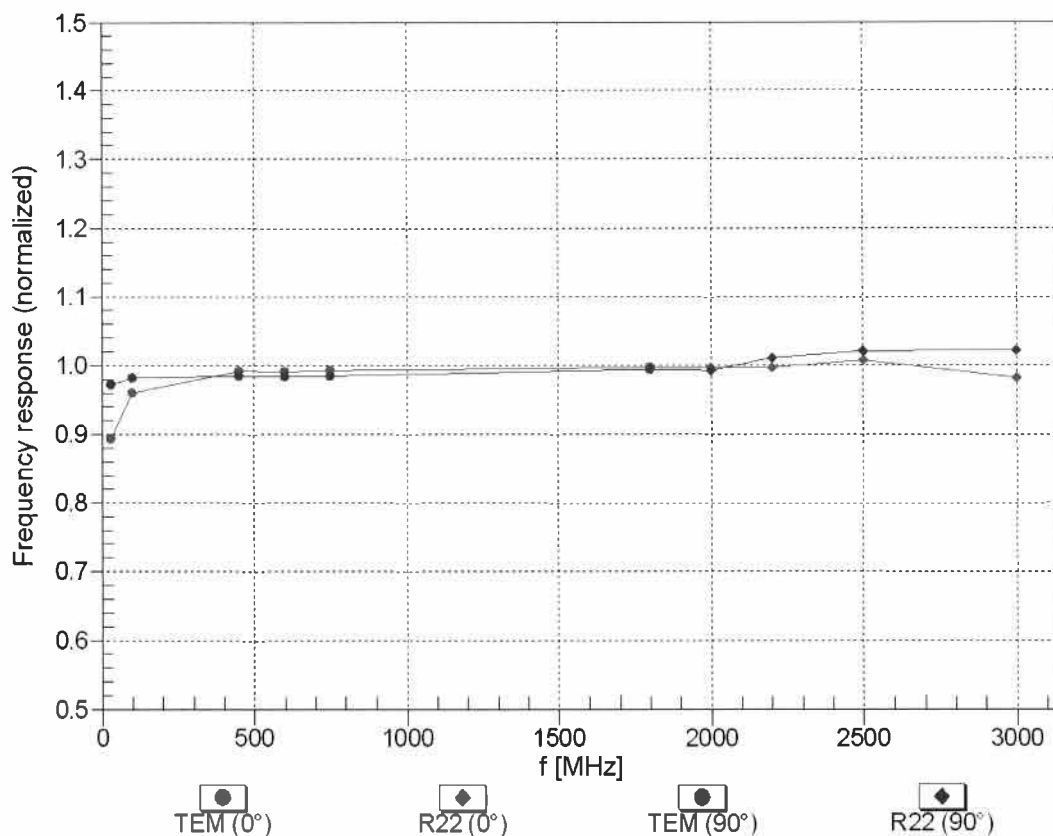


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM,0°

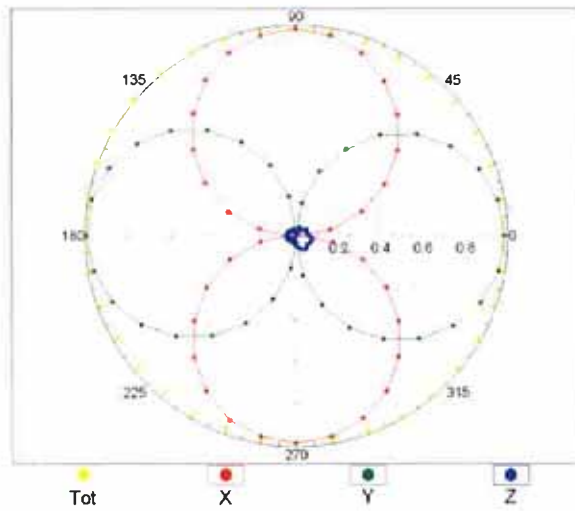


f=2500 MHz,R22,0°

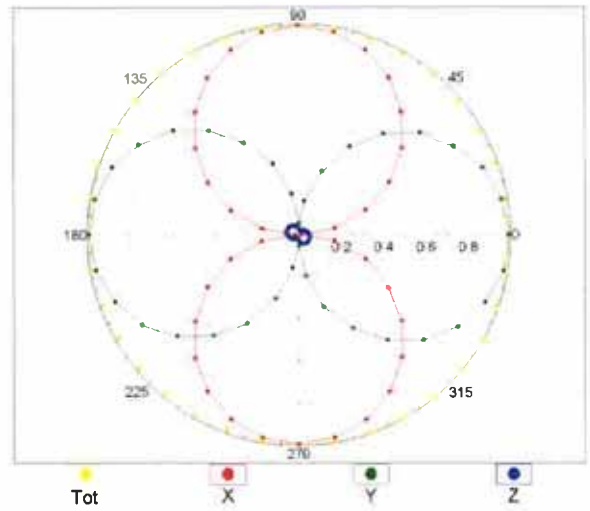


Receiving Pattern (ϕ), $\vartheta = 90^\circ$


f=600 MHz,TEM,90°

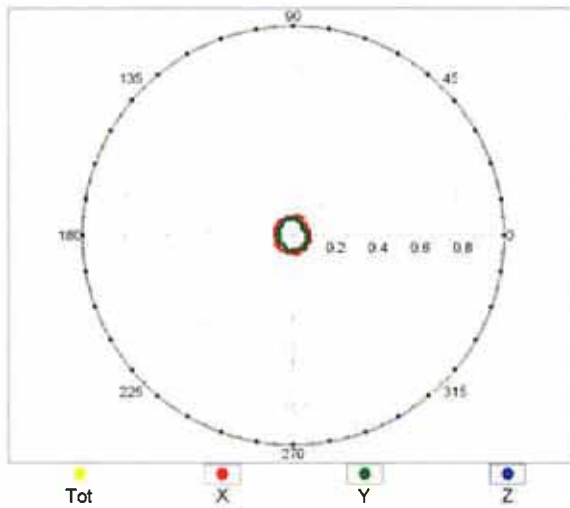

f=2500 MHz,R22,90°

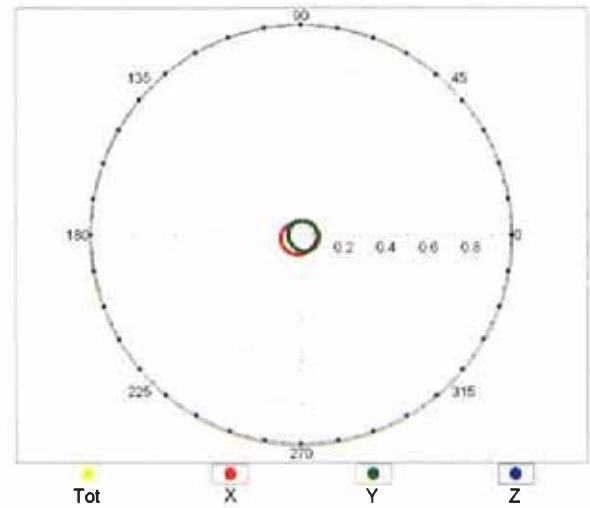


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

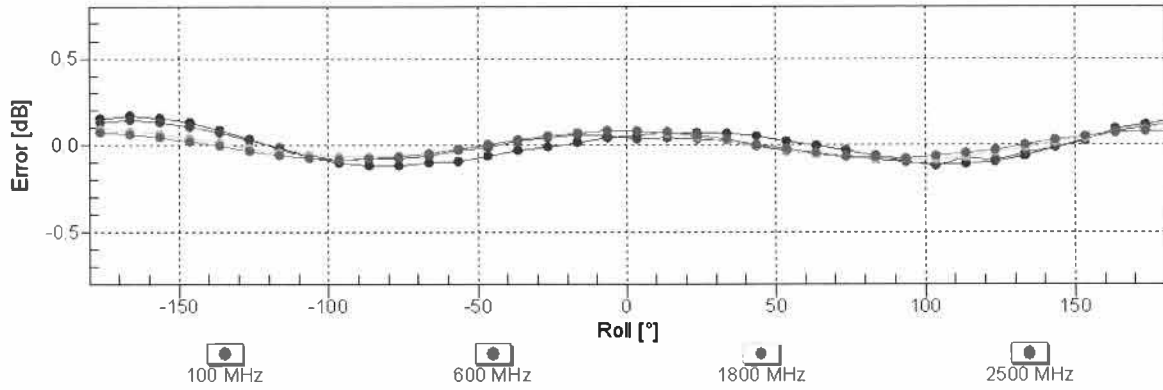



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

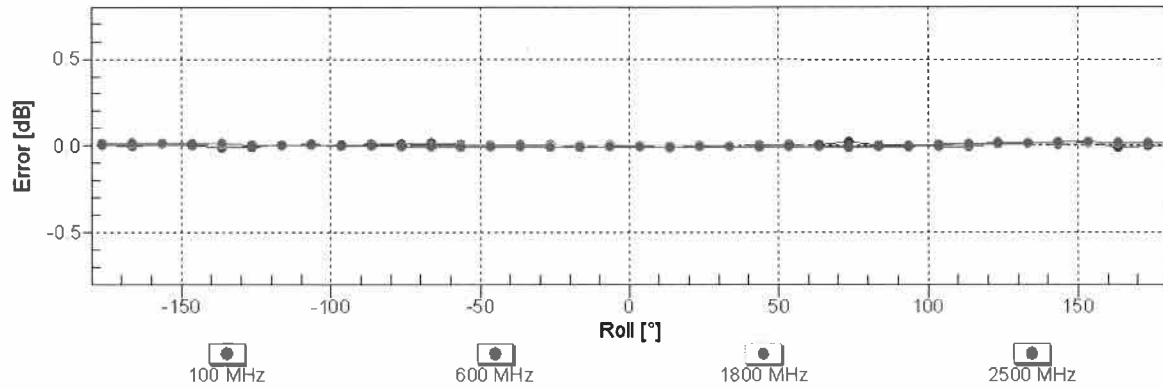

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Dynamic Range f(E-field) (TEM cell , f = 900 MHz)

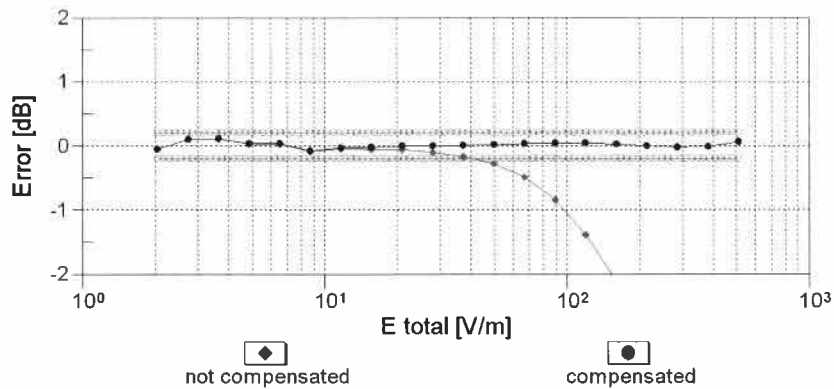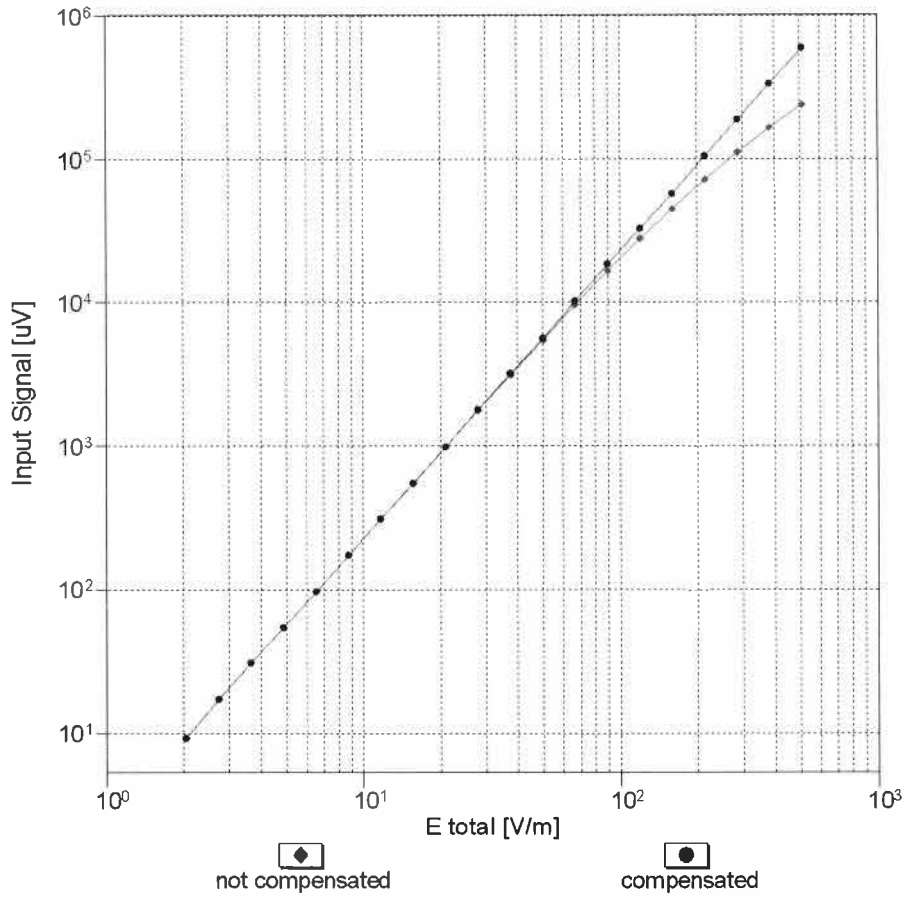

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Deviation from Isotropy in Air

Error (ϕ, θ), $f = 900$ MHz

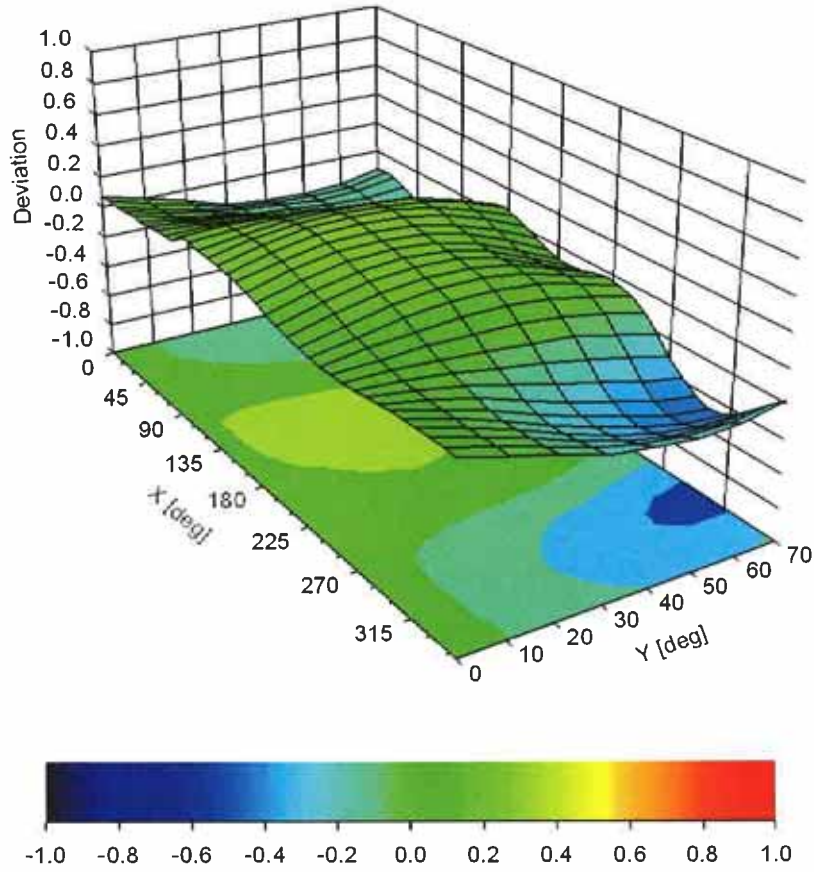

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2445

Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	43.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B. V. ADT (Auden)**

Certificate No: **H3-6274_Feb12**

CALIBRATION CERTIFICATE

Object **H3DV6 - SN:6274**

Calibration procedure(s) **QA CAL-03.v6, QA CAL-25.v4
Calibration procedure for H-field probes optimized for close near field
evaluations in air**

Calibration date: **February 17, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe H3DV6	SN: 6182	11-Oct-11 (No. H3-6182_Oct11)	Oct-12
DAE4	SN: 789	30-Jan-12 (No. DAE4-789_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- X, Y, Z(f)*: X, Y, Z frequency_response (see Frequency Response Chart).
- DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}*: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the X (no uncertainty required).

Probe H3DV6

SN:6274

Manufactured: November 30, 2007
Calibrated: February 17, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: H3DV6 - SN:6274

Basic Calibration Parameters

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / $\sqrt{\text{mV}}$)	a0	2.49E-003	2.58E-003	2.90E-003	$\pm 5.1 \%$
Norm (A/m / $\sqrt{\text{mV}}$)	a1	-1.39E-004	-1.92E-004	-1.14E-004	$\pm 5.1 \%$
Norm (A/m / $\sqrt{\text{mV}}$)	a2	3.08E-005	7.89E-006	1.16E-005	$\pm 5.1 \%$
DCP (mV) ^B		94.0	95.4	94.9	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	105.5	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	105.1	
			Z	0.00	0.00	1.00	103.2	
10011	UMTS-FDD (WCDMA)	3.40	X	3.45	64.7	17.8	115.2	$\pm 0.7 \%$
			Y	3.42	64.8	17.9	114.9	
			Z	3.43	64.6	17.7	112.6	
10021	GSM-FDD (TDMA, GMSK)	9.40	X	9.04	74.3	23.8	145.7	$\pm 2.2 \%$
			Y	8.40	72.0	22.5	101.9	
			Z	9.68	73.8	23.9	110.8	
10039	CDMA2000 (1xRTT, RC1)	4.57	X	5.46	66.8	19.0	125.3	$\pm 1.2 \%$
			Y	5.45	66.8	19.0	125.1	
			Z	5.45	66.7	18.9	123.6	
10056	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	11.01	X	11.61	75.9	26.4	117.7	$\pm 2.7 \%$
			Y	11.85	76.3	26.5	119.5	
			Z	13.11	77.7	27.4	131.8	
10081	CDMA2000 (1xRTT, RC3)	3.96	X	4.18	65.2	18.1	118.1	$\pm 0.9 \%$
			Y	4.22	65.6	18.4	117.3	
			Z	4.28	65.8	18.4	116.2	
10082	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	4.77	X	3.48	75.9	18.3	149.5	$\pm 1.4 \%$
			Y	6.06	83.6	21.0	149.8	
			Z	25.84	99.6	25.6	115.7	
10100	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	5.66	X	7.21	69.0	20.5	134.4	$\pm 1.7 \%$
			Y	7.21	69.1	20.6	132.7	
			Z	7.22	69.1	20.6	131.6	
10101	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	6.41	X	7.72	67.1	19.7	101.3	$\pm 1.9 \%$
			Y	8.76	70.2	21.4	148.5	
			Z	8.78	70.1	21.4	148.1	
10108	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	5.79	X	7.51	69.5	20.8	136.3	$\pm 1.7 \%$
			Y	7.52	69.7	20.9	134.5	
			Z	7.56	69.7	20.9	134.6	

10109	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	6.42	X	7.80	67.2	19.8	101.5	±1.9 %
			Y	8.89	70.5	21.6	149.0	
			Z	8.92	70.4	21.5	149.2	
10110	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	5.75	X	7.34	69.2	20.7	135.4	±1.7 %
			Y	7.31	69.3	20.7	133.4	
			Z	7.36	69.3	20.7	133.4	
10111	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	6.44	X	7.73	67.0	19.8	101.4	±1.9 %
			Y	8.78	70.2	21.5	148.5	
			Z	8.78	70.1	21.4	147.9	
10148	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	5.83	X	7.65	69.7	21.0	137.7	±1.7 %
			Y	7.55	69.6	20.9	135.5	
			Z	7.56	69.4	20.8	135.2	
10149	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	6.42	X	7.87	67.5	20.0	101.9	±1.9 %
			Y	8.91	70.5	21.6	149.5	
			Z	8.99	70.6	21.6	148.9	
10154	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	5.76	X	7.37	69.2	20.7	136.1	±1.7 %
			Y	7.33	69.3	20.7	133.8	
			Z	7.34	69.2	20.7	132.8	
10155	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	6.43	X	7.75	67.1	19.8	101.6	±1.9 %
			Y	8.75	70.1	21.4	148.1	
			Z	8.77	70.1	21.4	147.6	
10156	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	5.79	X	7.45	69.4	20.8	136.4	±1.7 %
			Y	7.39	69.3	20.8	134.3	
			Z	7.36	69.1	20.7	133.8	
10157	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	6.49	X	7.83	67.2	19.9	102.1	±1.9 %
			Y	8.83	70.2	21.5	149.0	
			Z	8.89	70.3	21.5	147.7	
10160	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	5.81	X	7.67	69.4	20.7	140.2	±1.7 %
			Y	7.60	69.3	20.7	138.1	
			Z	7.62	69.3	20.7	136.8	
10161	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	6.42	X	7.82	67.0	19.7	103.2	±1.9 %
			Y	7.78	67.0	19.7	101.6	
			Z	8.78	69.8	21.2	149.3	
10163	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	5.68	X	7.26	68.9	20.5	136.6	±1.7 %
			Y	7.18	68.8	20.4	134.9	
			Z	7.21	68.7	20.4	133.2	
10164	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	6.44	X	7.82	67.1	19.8	102.8	±1.9 %
			Y	7.83	67.2	19.8	101.2	
			Z	8.82	70.0	21.3	148.4	

10166	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	5.45	X	6.89	68.6	20.2	134.2	±1.4 %
			Y	6.77	68.3	20.1	132.1	
			Z	6.84	68.5	20.2	130.7	
10167	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	6.21	X	8.20	69.1	20.7	145.7	±1.9 %
			Y	8.15	69.0	20.8	143.9	
			Z	8.17	69.0	20.7	141.4	
10042	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	7.78	X	8.28	80.4	23.0	114.2	±1.2 %
			Y	7.91	79.0	22.2	114.7	
			Z	7.08	73.9	19.6	122.5	


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Frequency Response of H-Field


(TEM-Cell: ifi110 EXX, Waveguide: R22)

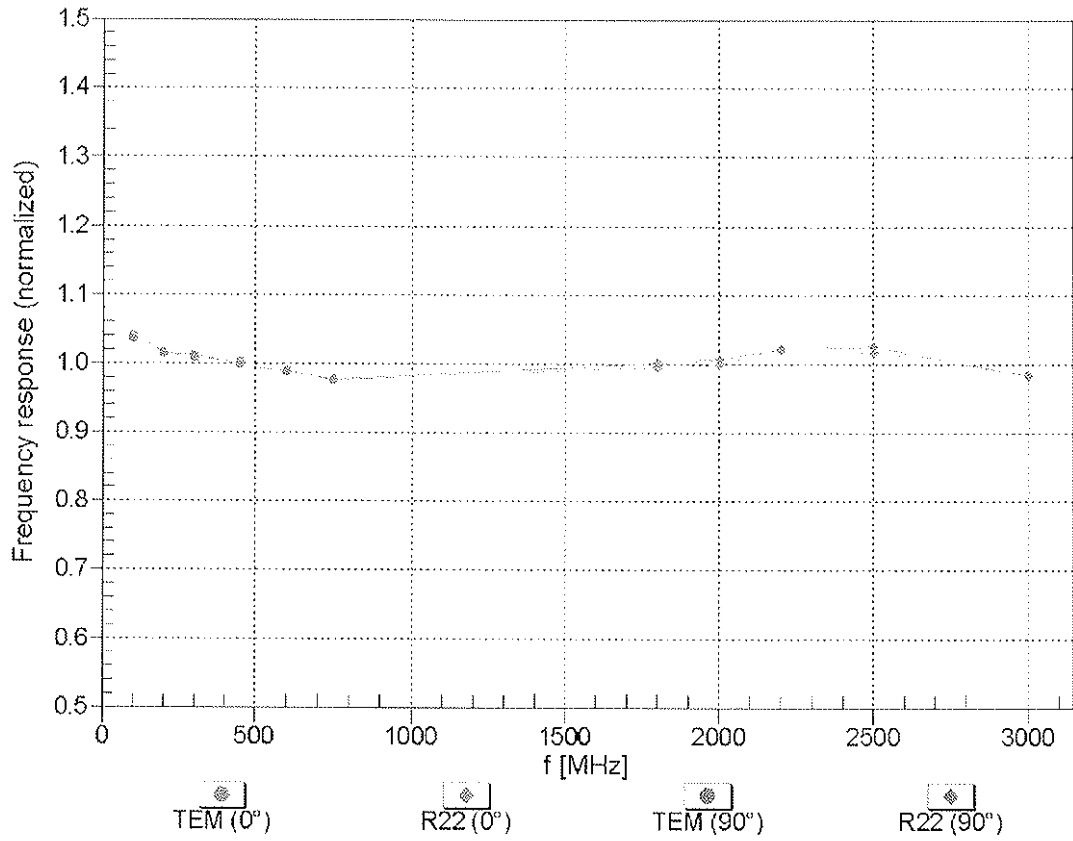


Uncertainty of Frequency Response of H-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM,0°

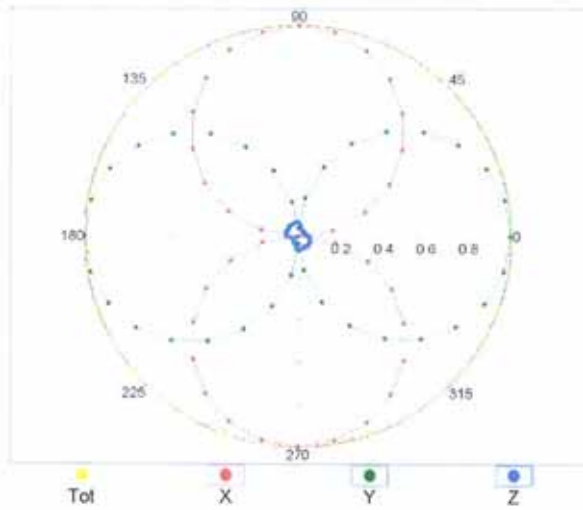


f=2500 MHz,R22,0°

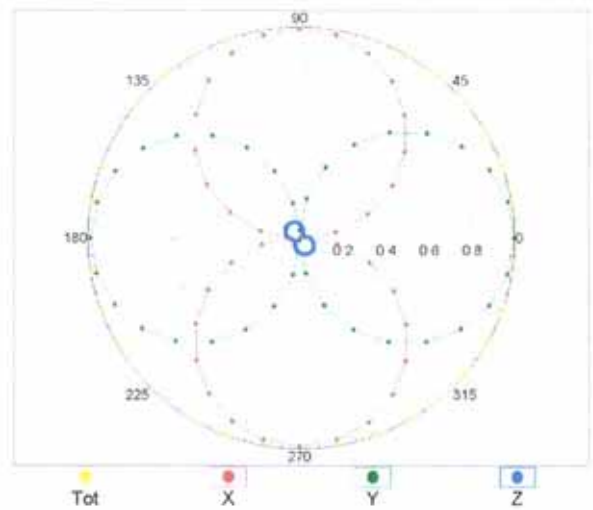


Receiving Pattern (ϕ), $\vartheta = 90^\circ$


f=600 MHz,TEM,90°

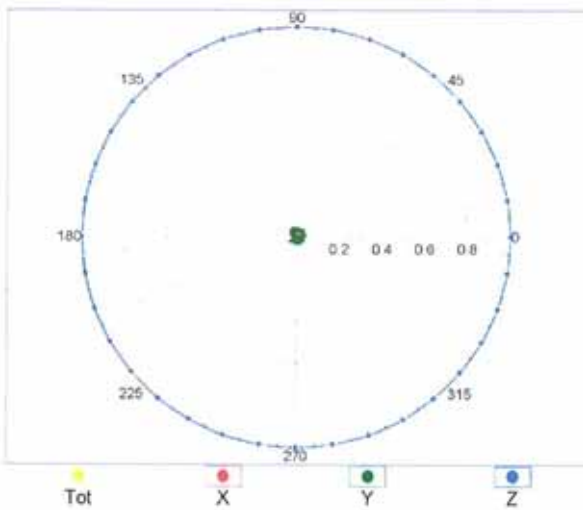

f=2500 MHz,R22,90°

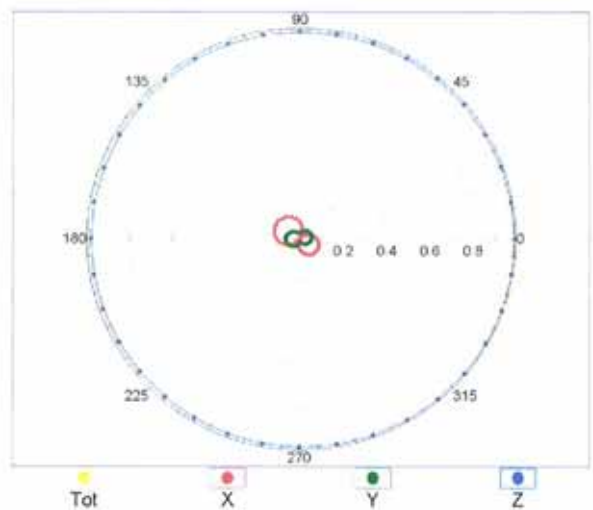


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

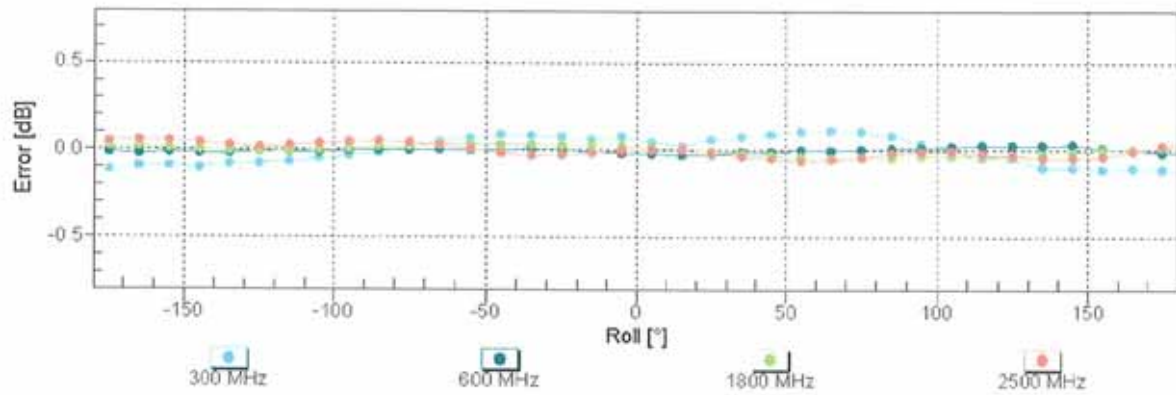



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

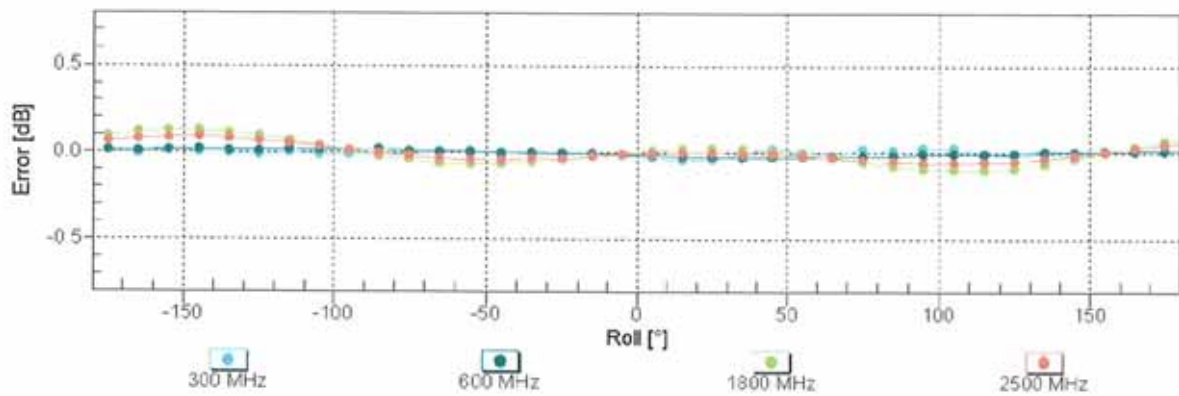

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)



Dynamic Range f(H-field) (TEM cell, f = 900 MHz)

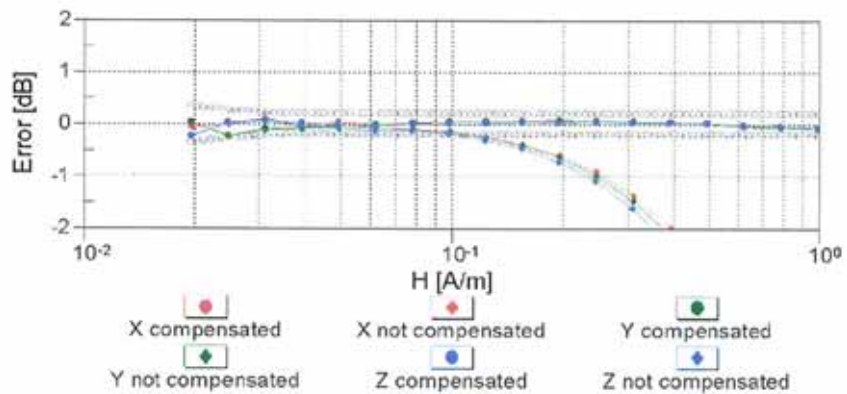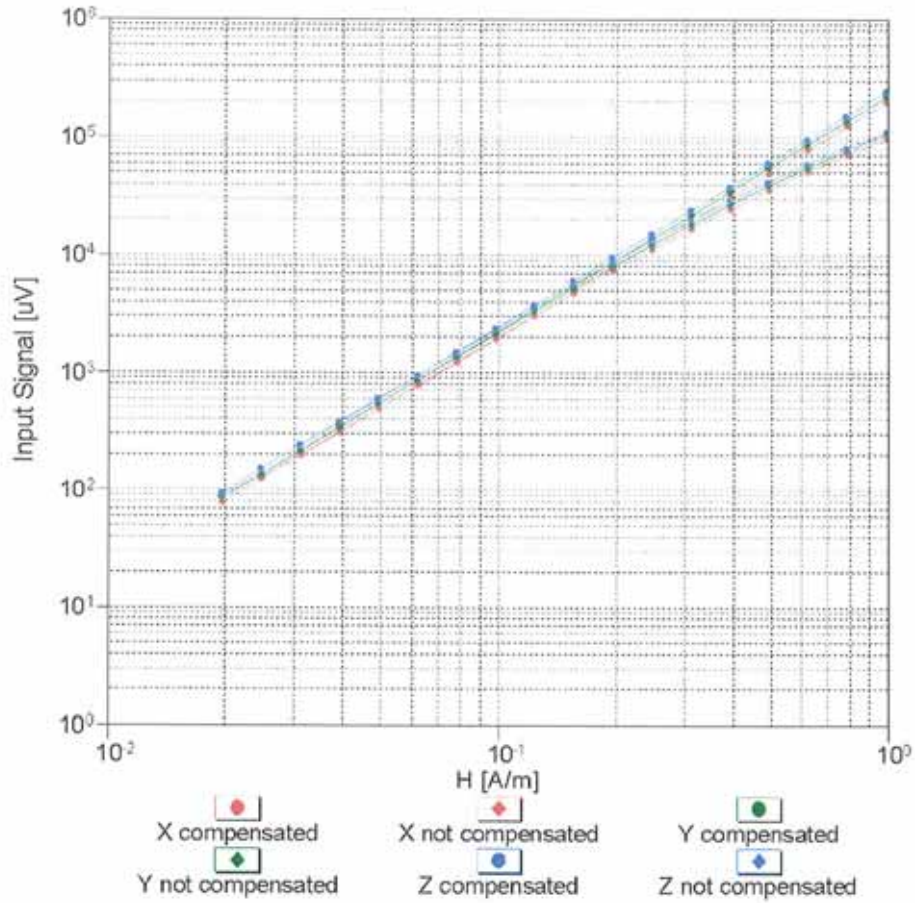

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Deviation from Isotropy in Air

Error (ϕ, θ), $f = 900$ MHz

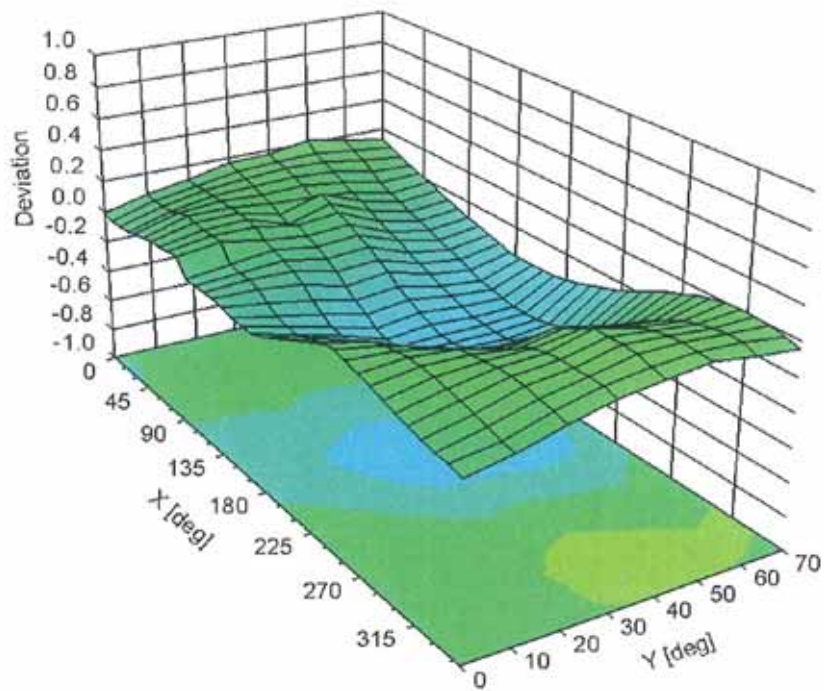

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: H3DV6 - SN:6274

Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	-125
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm



A D T

FCC HAC (RF Emission) Test Report

Appendix D. Photographs of EUT and Setup