

LE Tilt_CH661_slider off

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.511 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.6 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.285 mW/g
Maximum value of SAR (measured) = 0.506 mW/g

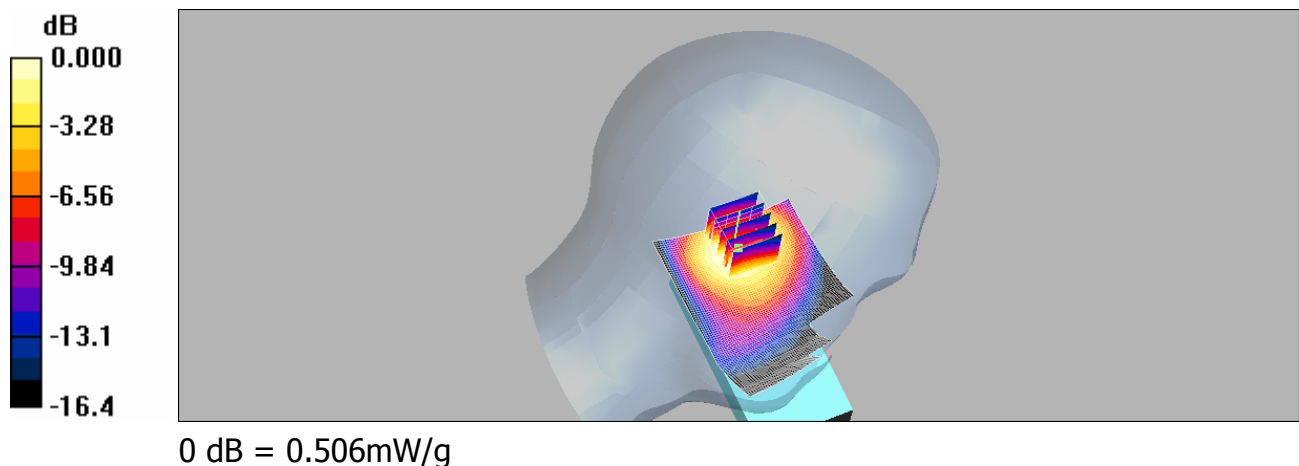

LE Tilt_CH810_slider off

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.418 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.7 V/m; Power Drift = -0.021 dB
Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.234 mW/g
Maximum value of SAR (measured) = 0.421 mW/g

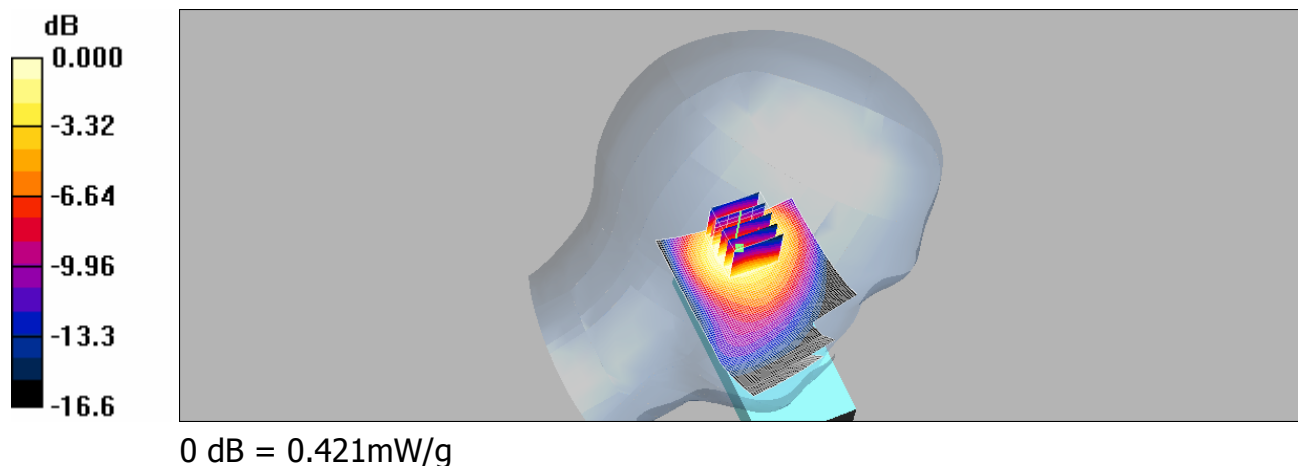

RE Cheek_CH512_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.493 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.0 V/m; Power Drift = -0.057 dB
Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.241 mW/g
Maximum value of SAR (measured) = 0.487 mW/g

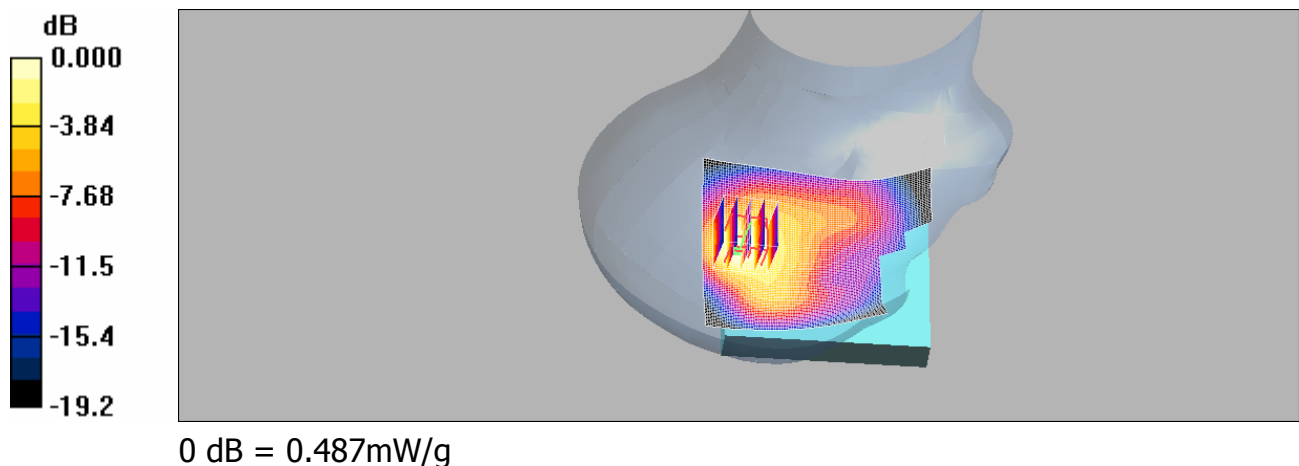

RE Cheek_CH661_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.517 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.1 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.249 mW/g
Maximum value of SAR (measured) = 0.524 mW/g

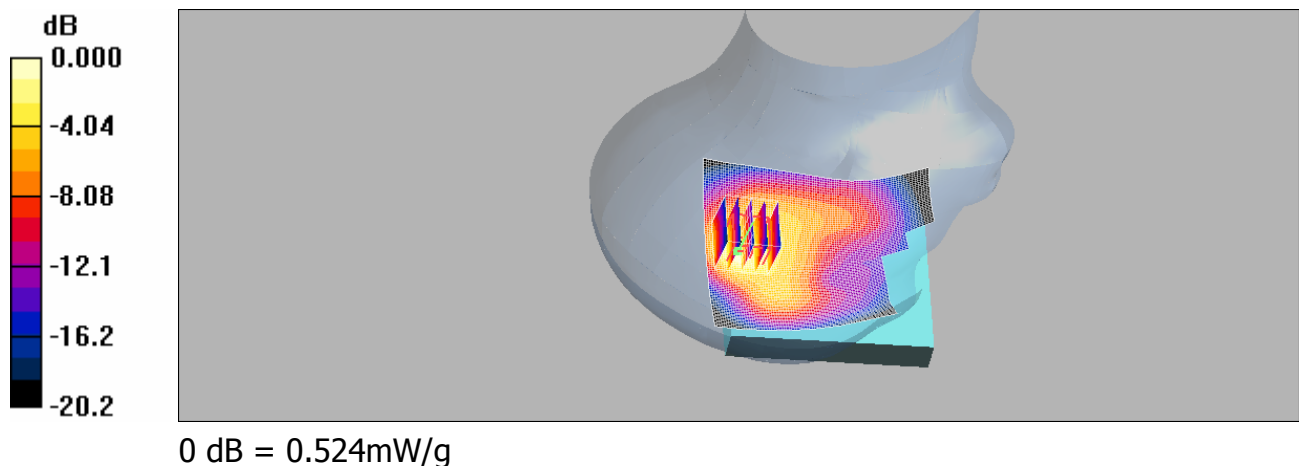

RE Cheek_CH810_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.429 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.6 V/m; Power Drift = -0.044 dB
Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.204 mW/g
Maximum value of SAR (measured) = 0.434 mW/g

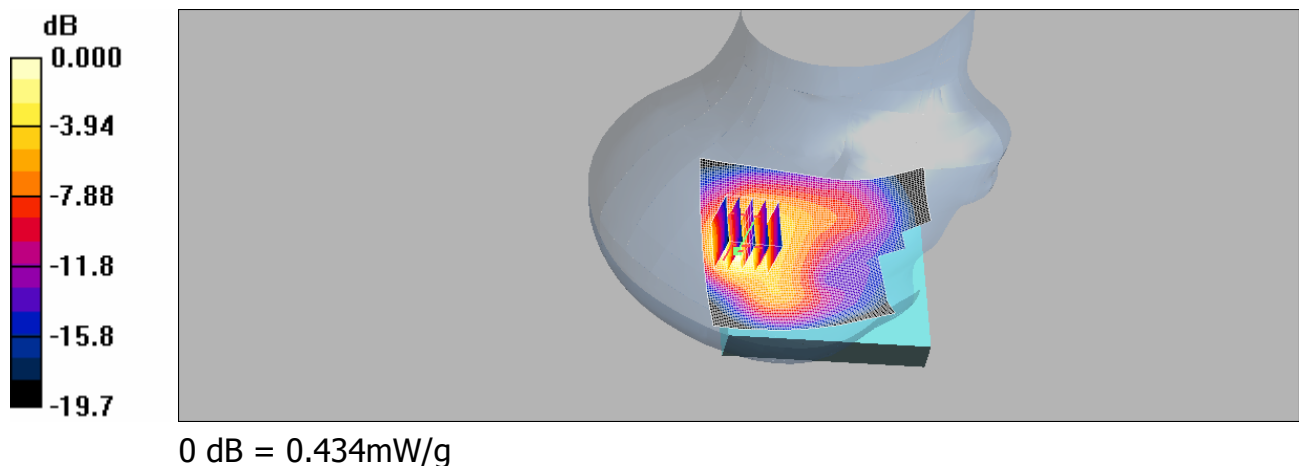

LE Cheek_CH512_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.357 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.3 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.189 mW/g
Maximum value of SAR (measured) = 0.345 mW/g

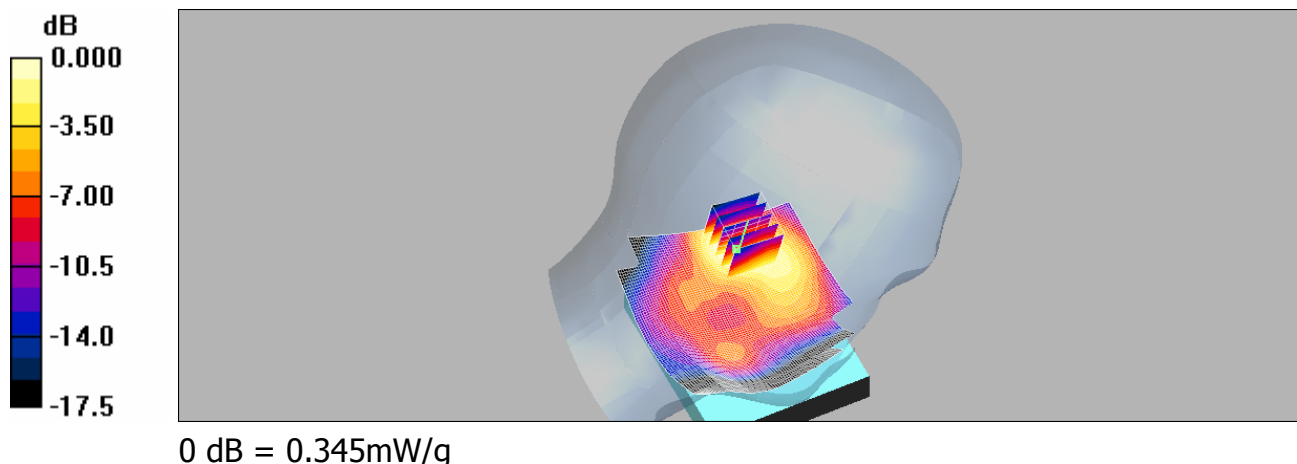

LE Cheek_CH661_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.389 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 14.7 V/m; Power Drift = 0.021 dB
Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.205 mW/g
Maximum value of SAR (measured) = 0.369 mW/g

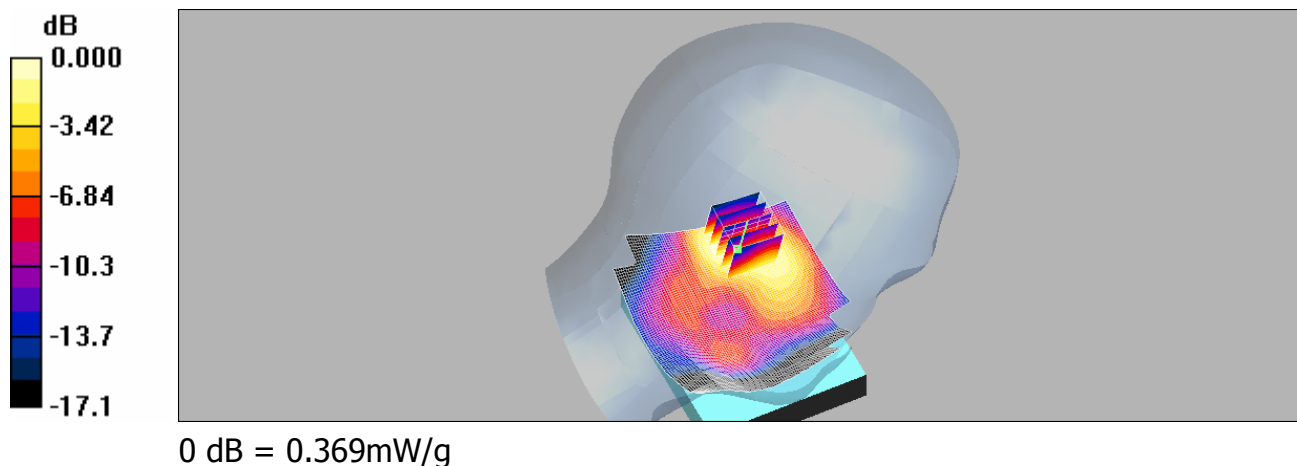

LE Cheek_CH810_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.324 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.4 V/m; Power Drift = 0.009 dB
Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.172 mW/g
Maximum value of SAR (measured) = 0.310 mW/g

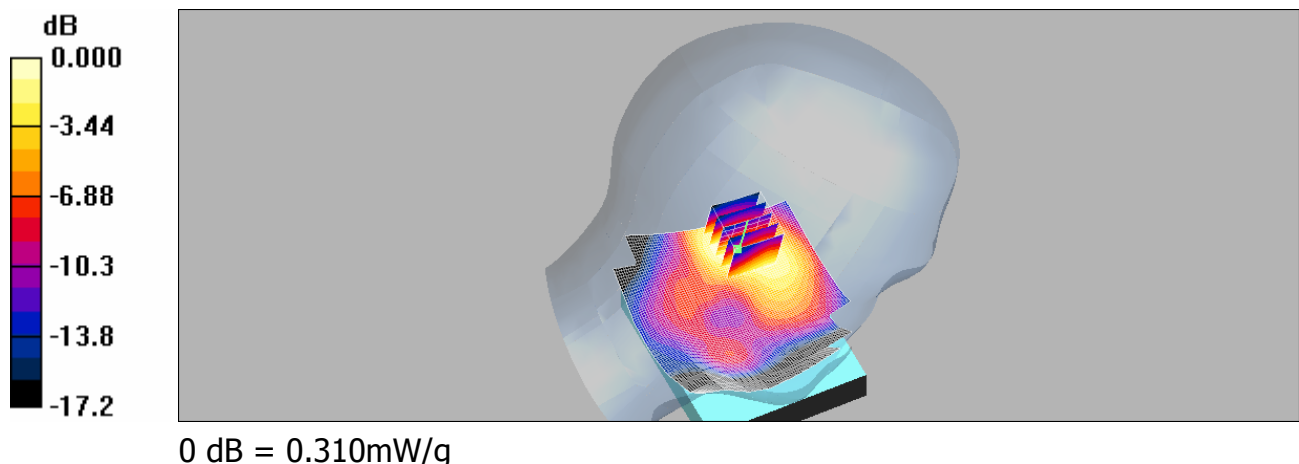

RE Tilt_CH512_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.600 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.9 V/m; Power Drift = -0.136 dB
Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.282 mW/g
Maximum value of SAR (measured) = 0.564 mW/g

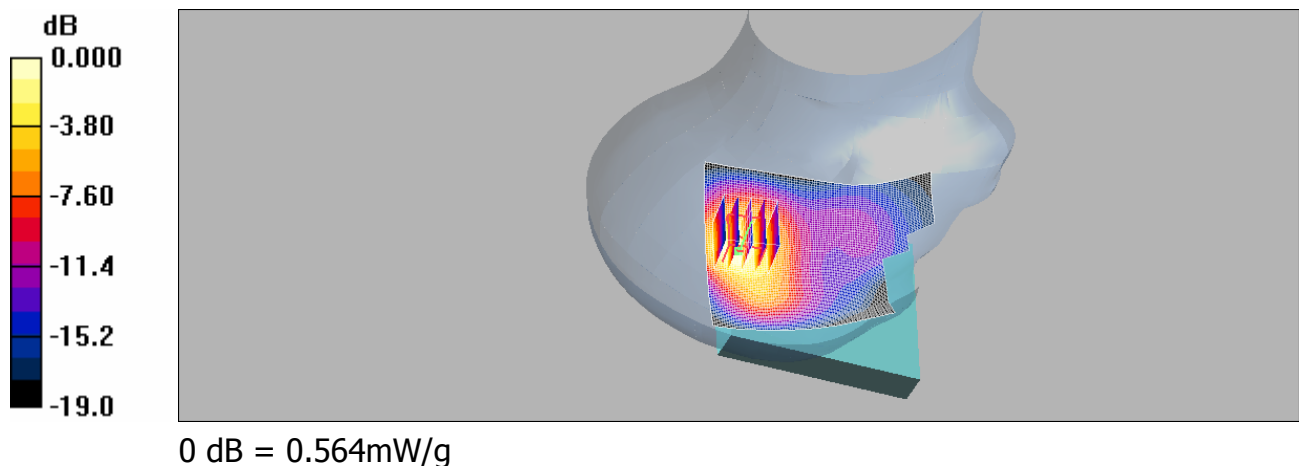

RE Tilt_CH661_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.540 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 0.855 W/kg

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.261 mW/g
Maximum value of SAR (measured) = 0.532 mW/g

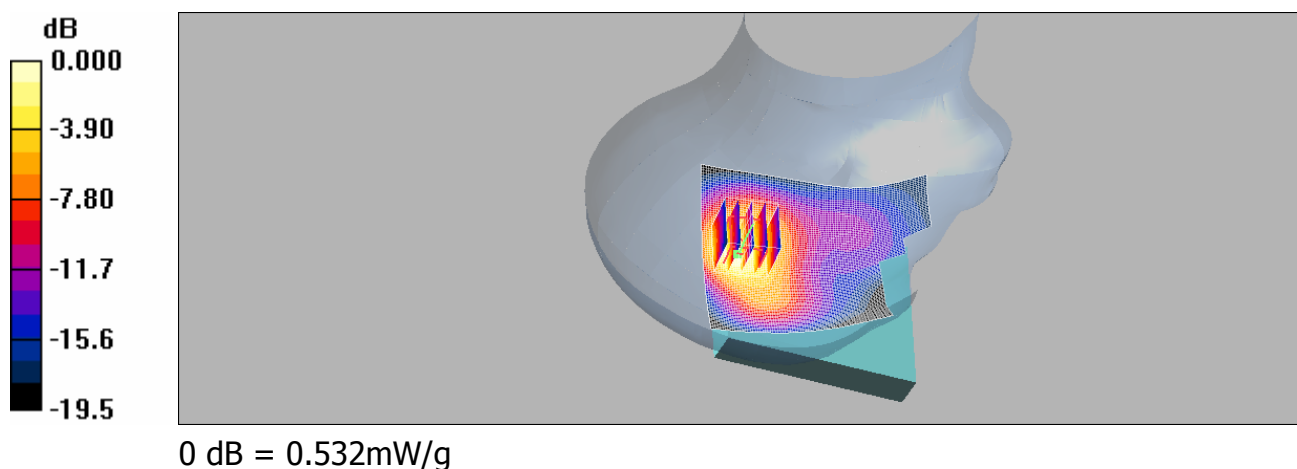

RE Tilt_CH810_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.447 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.7 V/m; Power Drift = -0.017 dB
Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.214 mW/g
Maximum value of SAR (measured) = 0.437 mW/g

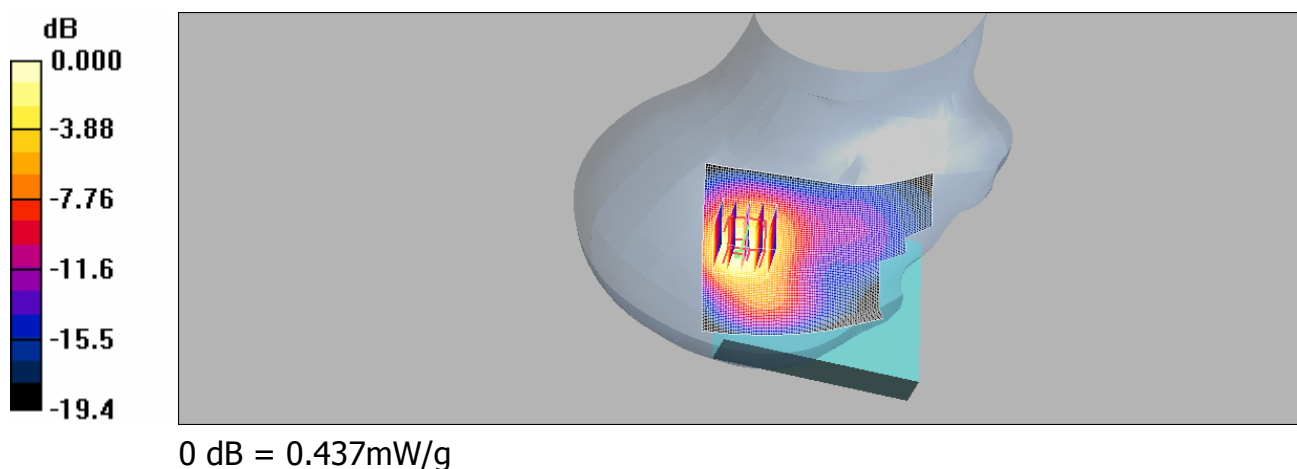

LE Tilt_CH512_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.424 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.7 V/m; Power Drift = 0.078 dB
Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.218 mW/g
Maximum value of SAR (measured) = 0.411 mW/g

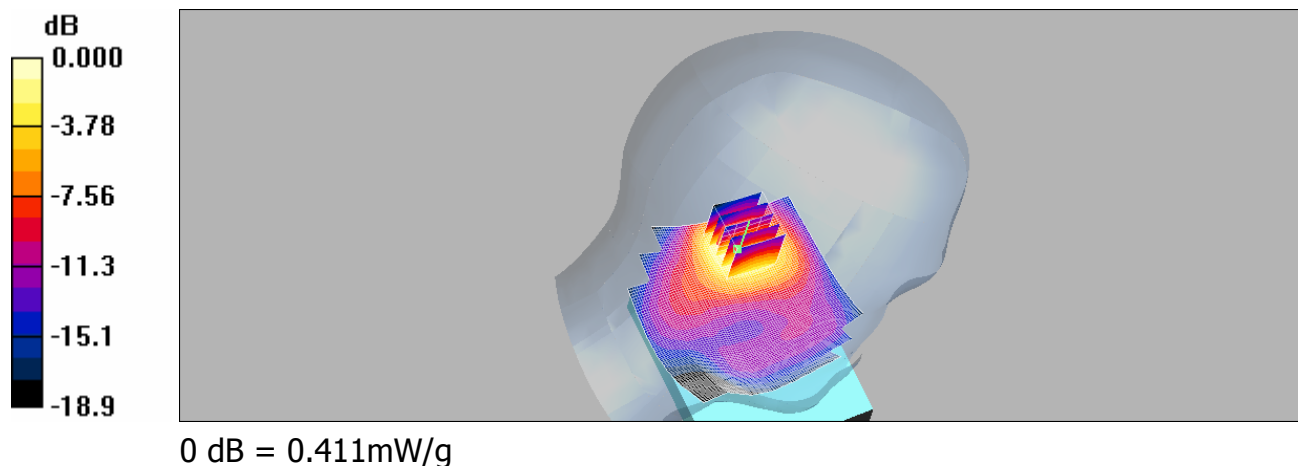

LE Tilt_CH661_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.453 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.028 dB
Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.443 mW/g

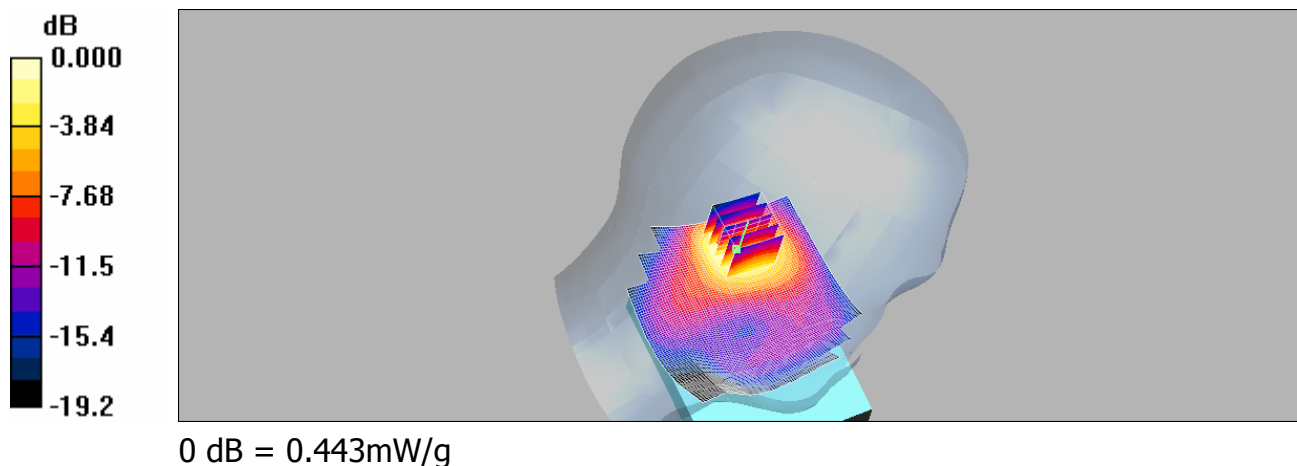

LE Tilt_CH810_slider on

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.378 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.9 V/m; Power Drift = -0.076 dB
Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.192 mW/g
Maximum value of SAR (measured) = 0.369 mW/g

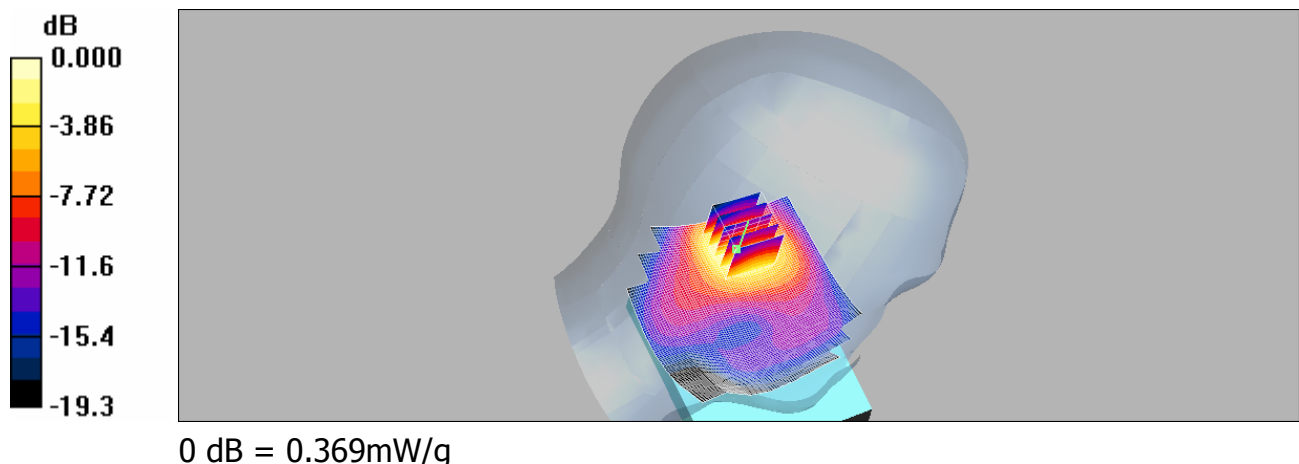

RE Cheek_CH512_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.470 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.1 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.220 mW/g
Maximum value of SAR (measured) = 0.442 mW/g

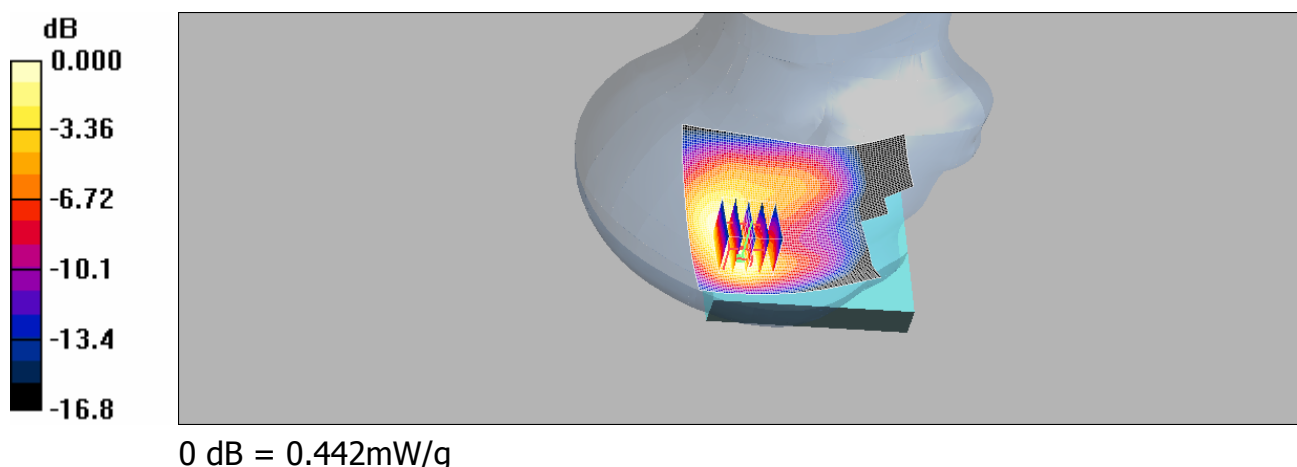

RE Cheek_CH661_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.370 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 11.8 V/m; Power Drift = -0.060 dB
Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.173 mW/g
Maximum value of SAR (measured) = 0.347 mW/g

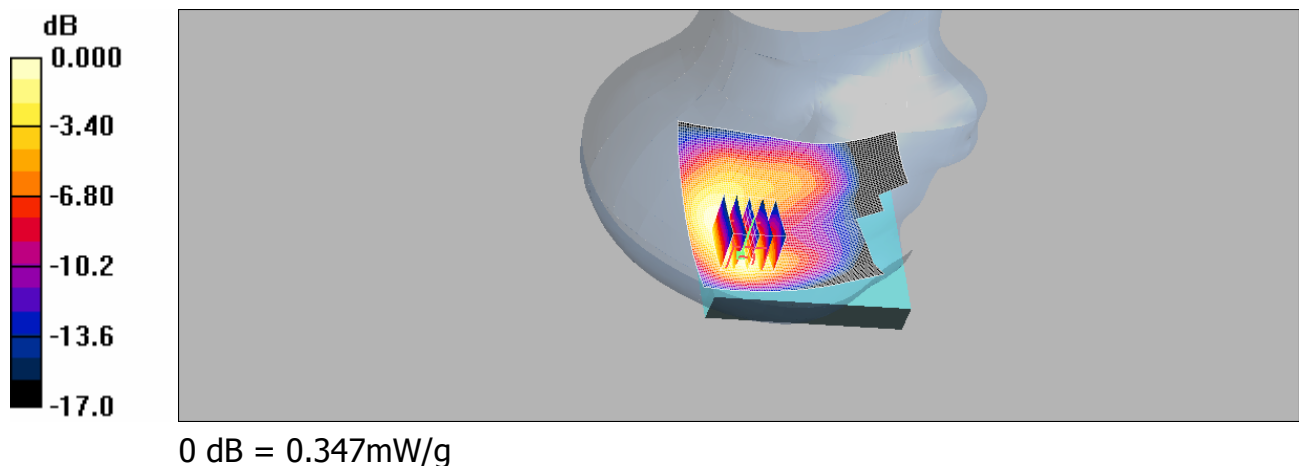

RE Cheek_CH810_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.278 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.7 V/m; Power Drift = 0.006 dB
Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.131 mW/g
Maximum value of SAR (measured) = 0.263 mW/g

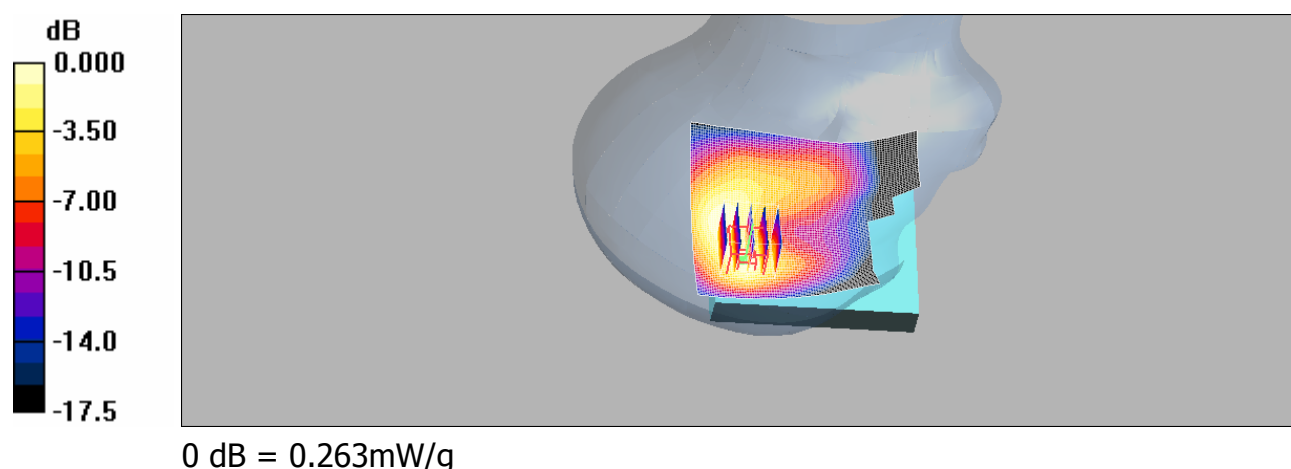

LE Cheek_CH512_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.270 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.5 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.150 mW/g
Maximum value of SAR (measured) = 0.272 mW/g

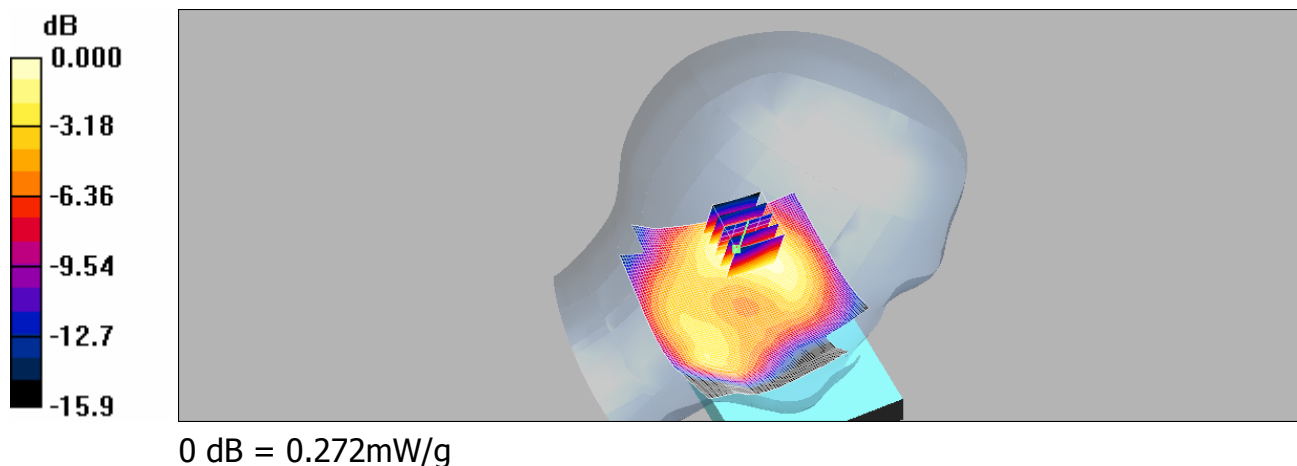

LE Cheek_CH661_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.240 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 12.7 V/m; Power Drift = -0.023 dB
Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.134 mW/g
Maximum value of SAR (measured) = 0.242 mW/g

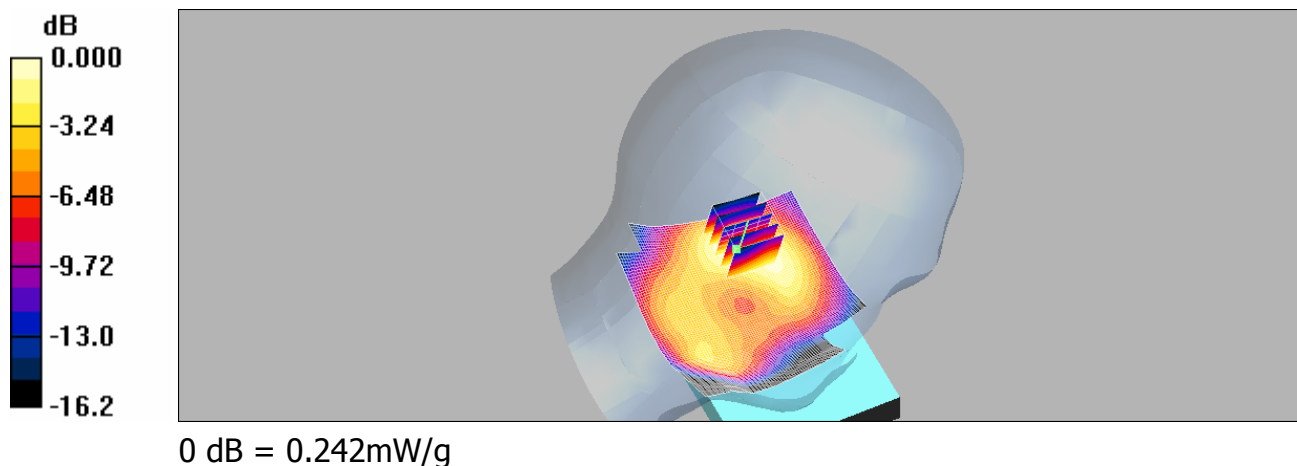

LE Cheek_CH810_hold up

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.193 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.4 V/m; Power Drift = -0.053 dB
Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.107 mW/g
Maximum value of SAR (measured) = 0.193 mW/g

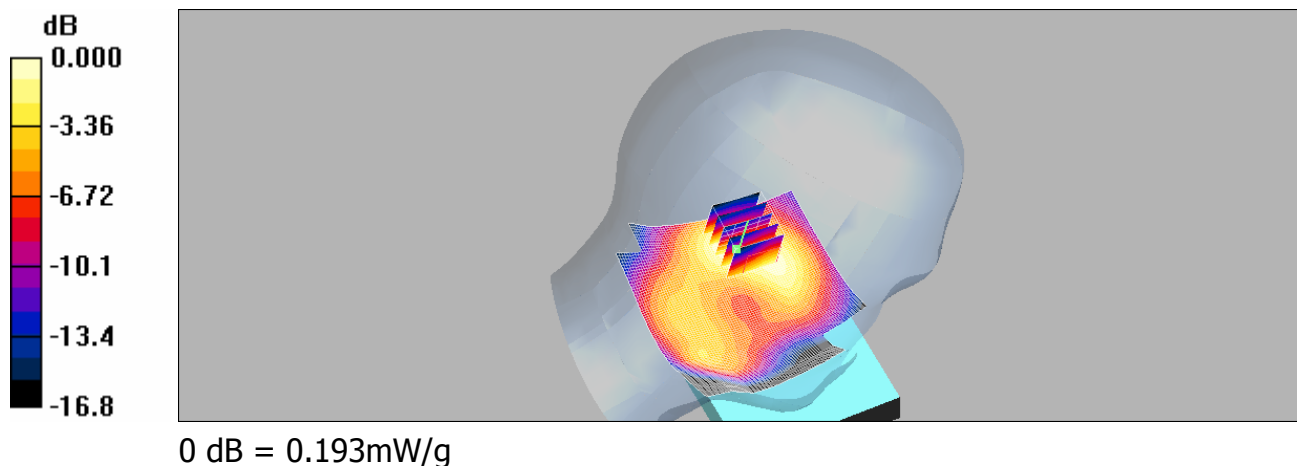

BODY_CH512

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.28, 9.28, 9.28); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.477 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.7 V/m; Power Drift = -0.062 dB
Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.274 mW/g
Maximum value of SAR (measured) = 0.463 mW/g

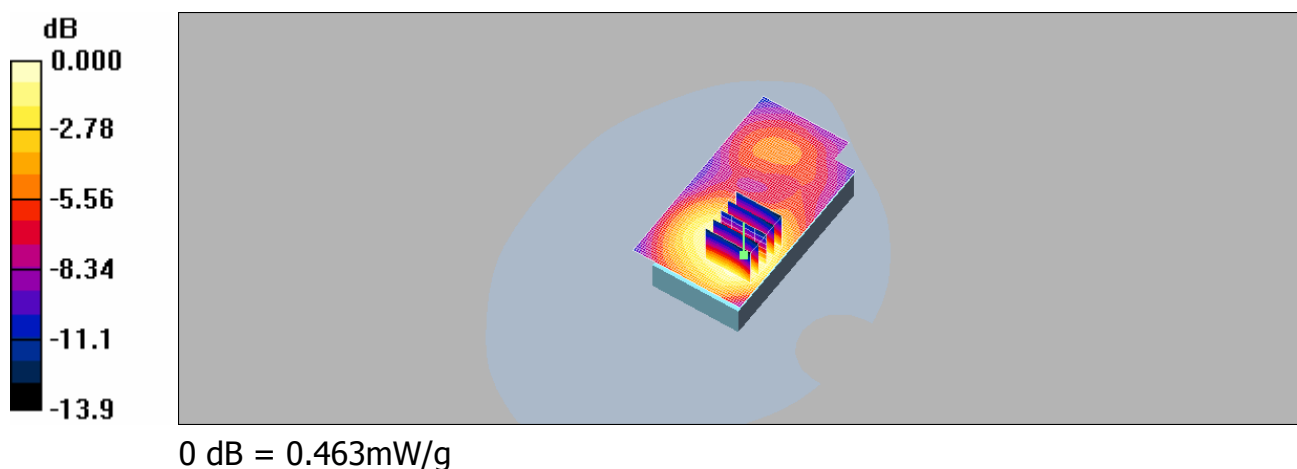

BODY_CH661

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: M1800 & 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.3$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.28, 9.28, 9.28); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.421 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 12.5 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.242 mW/g
Maximum value of SAR (measured) = 0.402 mW/g

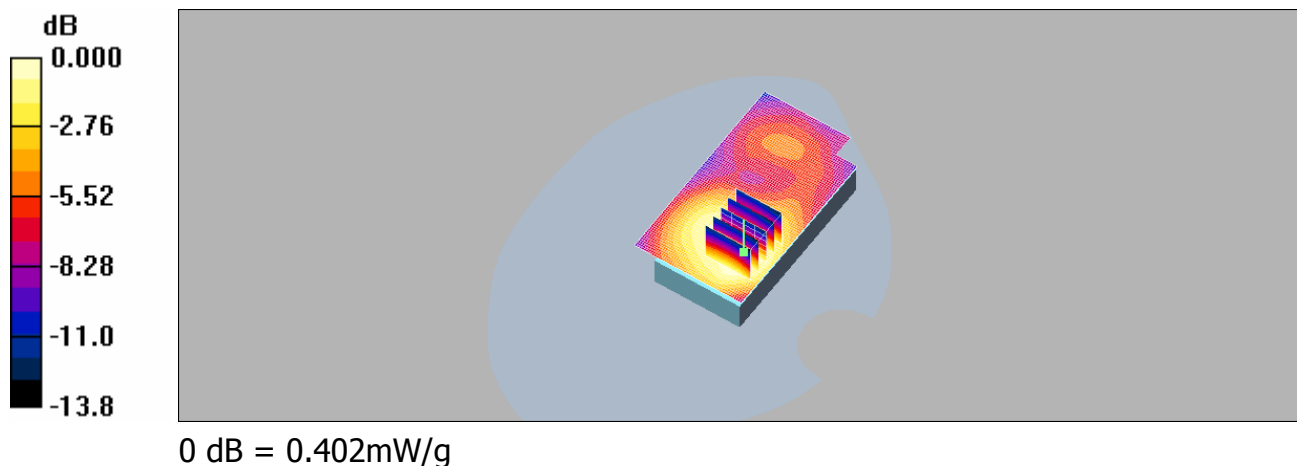

BODY_CH810

DUT: RHOD 210;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.3$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.28, 9.28, 9.28); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

BODY/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.357 mW/g

BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm
Reference Value = 11.6 V/m; Power Drift = 0.003 dB
Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.192 mW/g
Maximum value of SAR (measured) = 0.322 mW/g

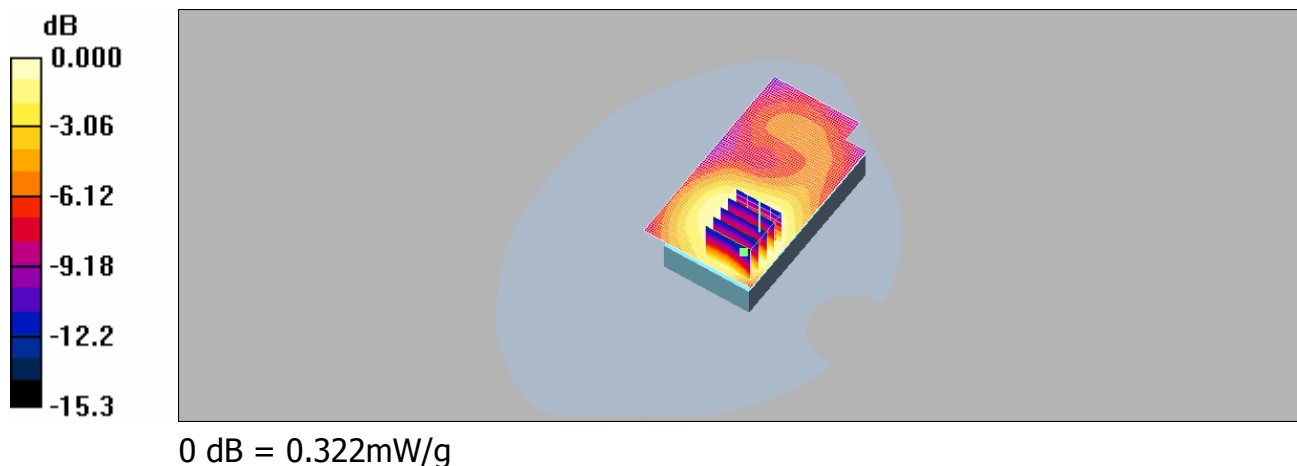

RE Cheek_CH1312_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.928 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.3 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.552 mW/g
Maximum value of SAR (measured) = 0.951 mW/g

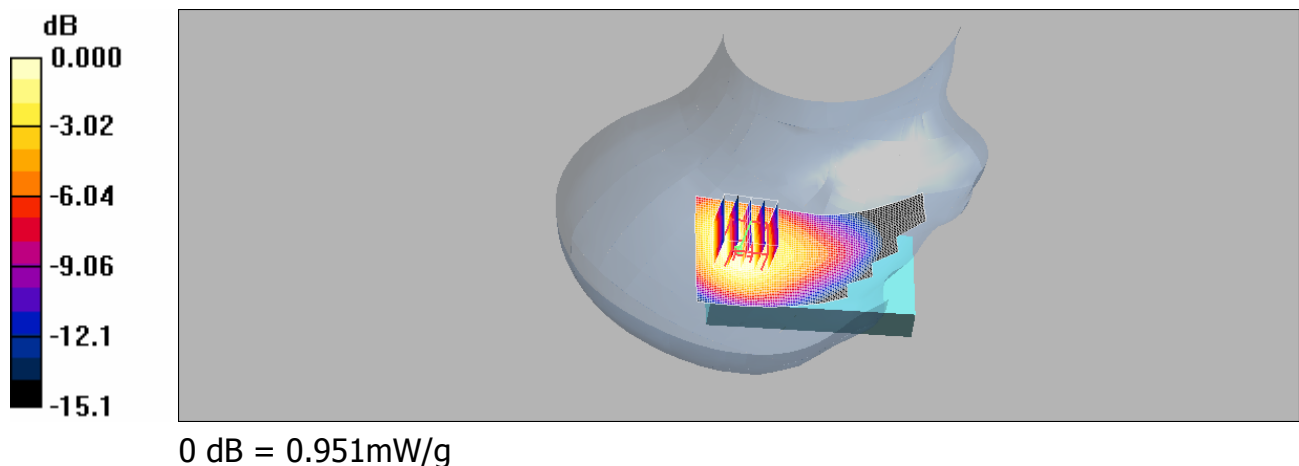

RE Cheek_CH1412_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.931 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.7 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.553 mW/g
Maximum value of SAR (measured) = 0.945 mW/g

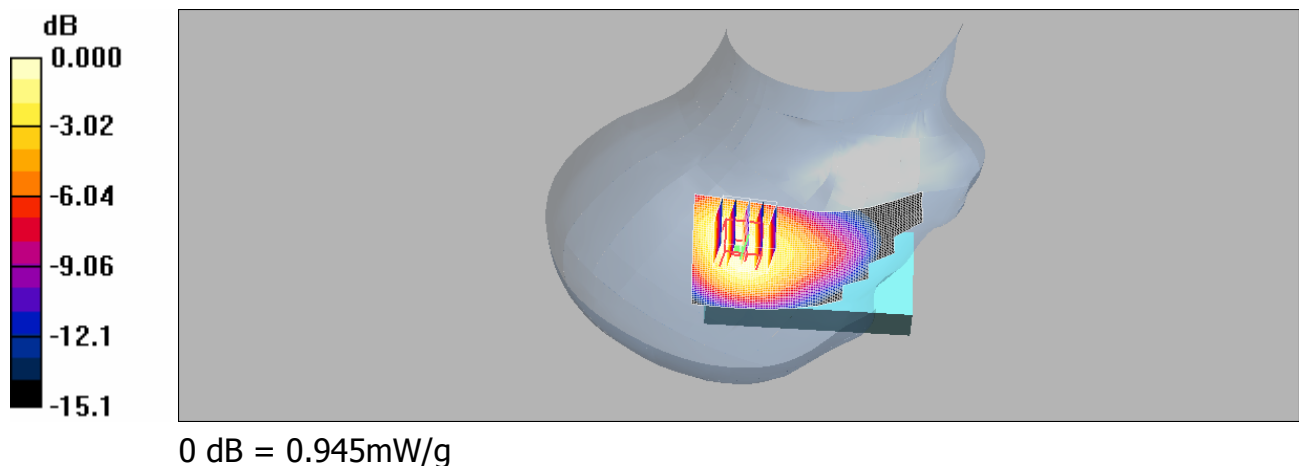

RE Cheek_CH1513_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used: $f = 1753$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.977 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.0 V/m; Power Drift = 0.051 dB
Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.926 mW/g; SAR(10 g) = 0.575 mW/g
Maximum value of SAR (measured) = 0.991 mW/g

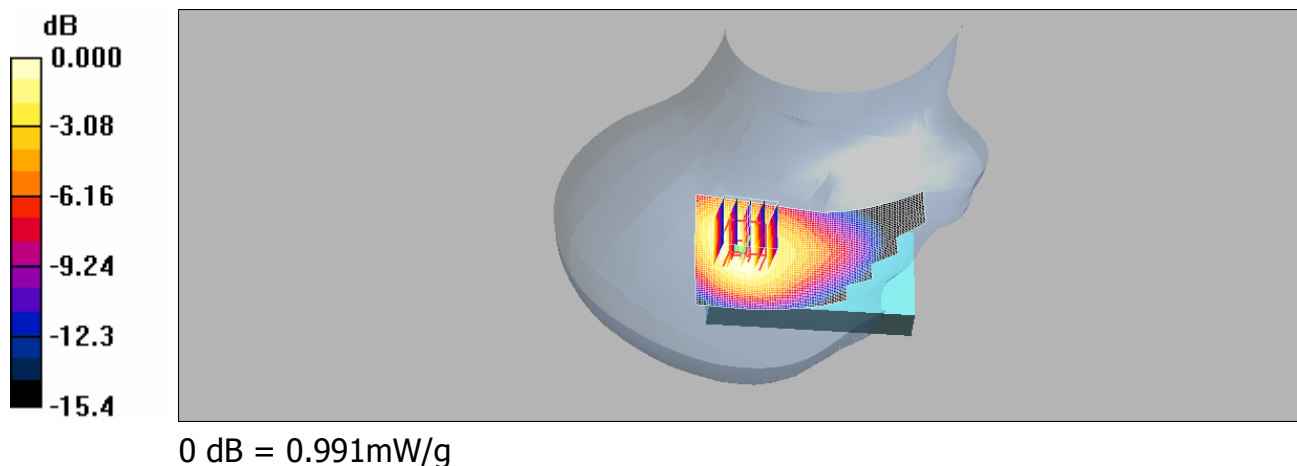

LE Cheek_CH1312_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.31 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.7 V/m; Power Drift = 0.043 dB
Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.669 mW/g
Maximum value of SAR (measured) = 1.27 mW/g

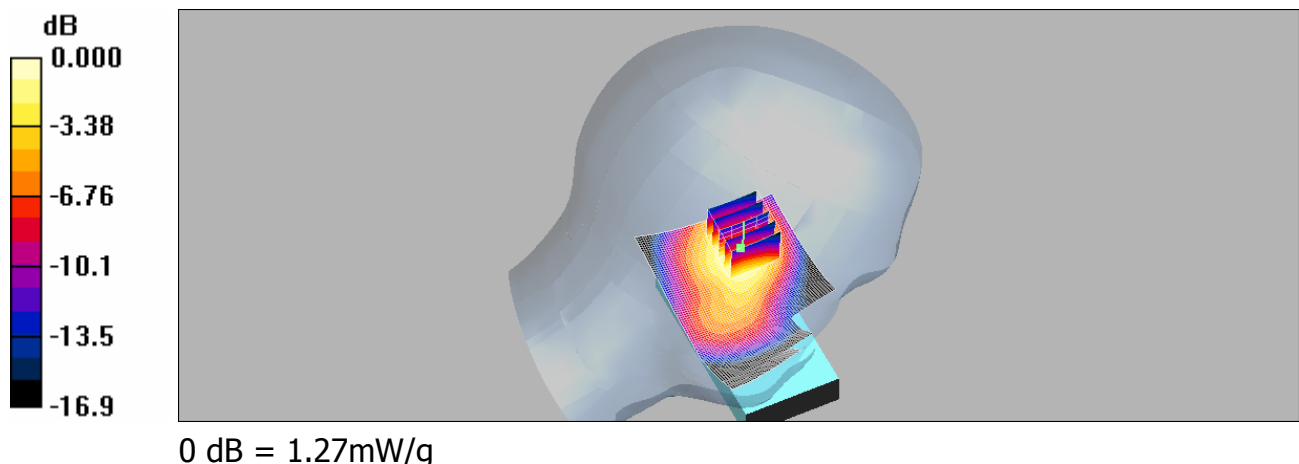

LE Cheek_CH1412_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section



DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.27 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.7 V/m; Power Drift = 0.007 dB
Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.660 mW/g
Maximum value of SAR (measured) = 1.26 mW/g

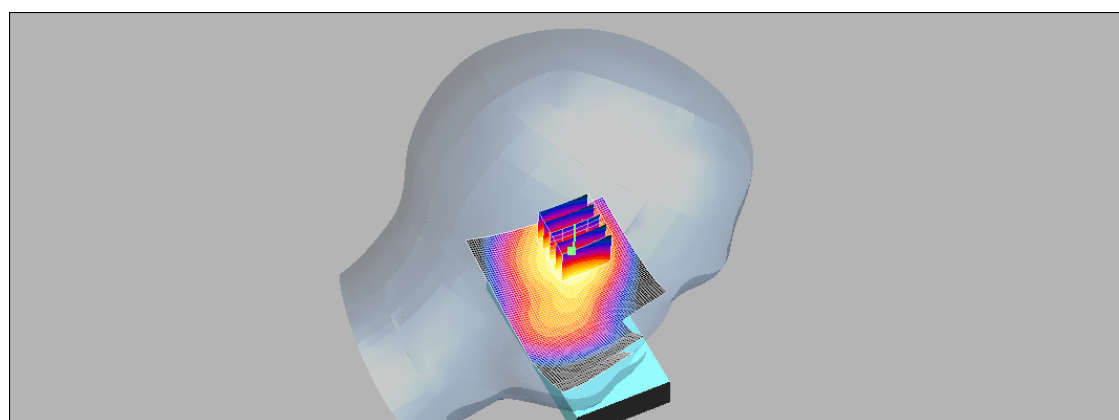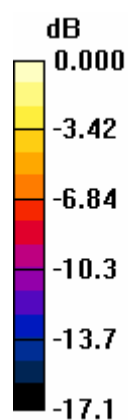

0 dB = 1.26mW/g

LE Cheek_CH1513_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used: $f = 1753$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:


- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.31 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.8 V/m; Power Drift = -0.029 dB
Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.686 mW/g
Maximum value of SAR (measured) = 1.31 mW/g

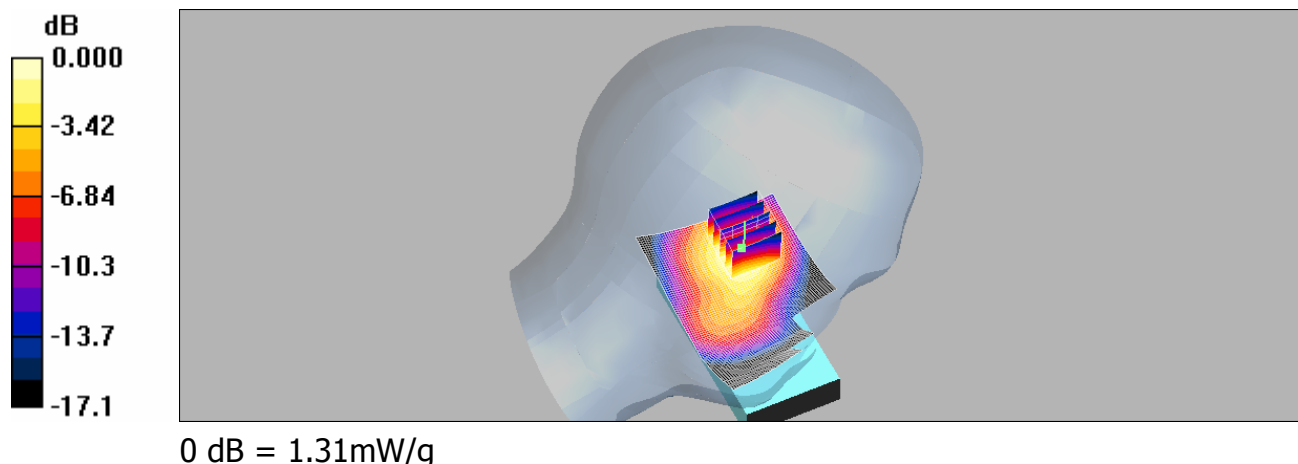

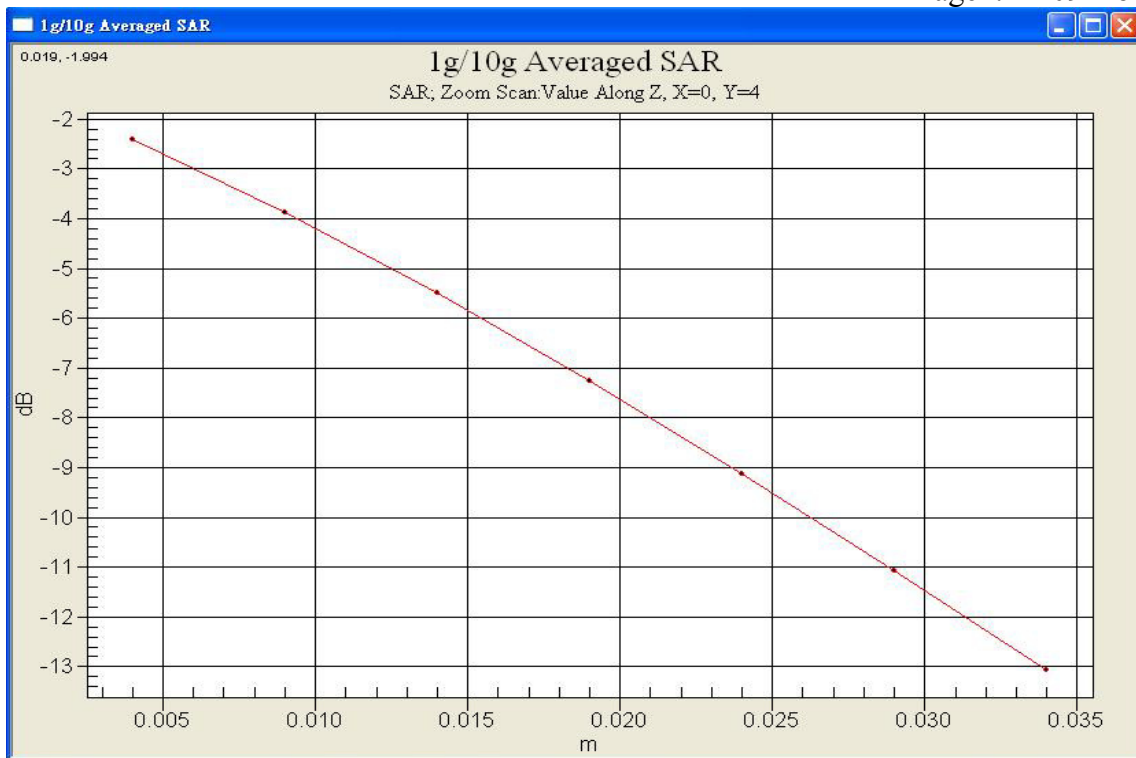

RE Tilt_CH1312_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.5 V/m; Power Drift = 0.038 dB
Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.570 mW/g
Maximum value of SAR (measured) = 1.01 mW/g

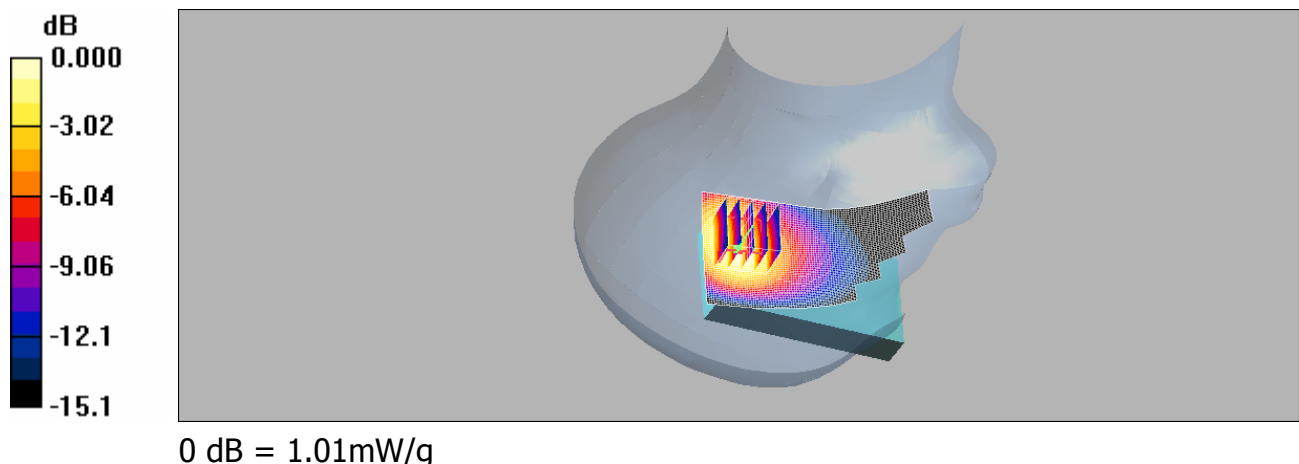

RE Tilt_CH1412_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.992 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.4 V/m; Power Drift = 0.002 dB
Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.557 mW/g
Maximum value of SAR (measured) = 0.998 mW/g

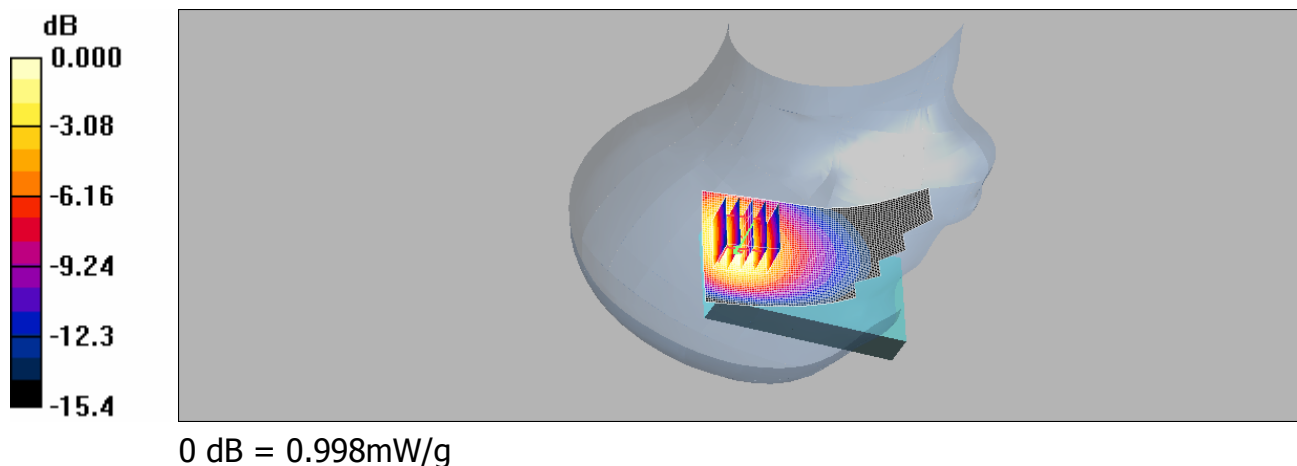

RE Tilt_CH1513_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used: $f = 1753$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.03 mW/g

RE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.6 V/m; Power Drift = 0.027 dB
Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.941 mW/g; SAR(10 g) = 0.568 mW/g
Maximum value of SAR (measured) = 1.02 mW/g

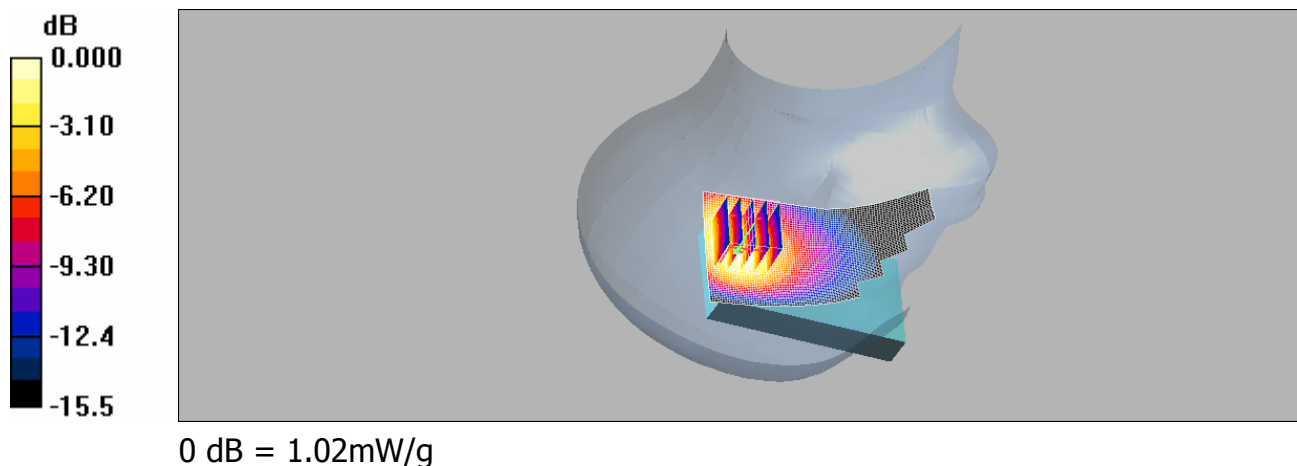

LE Tilt_CH1312_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.05 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.6 V/m; Power Drift = 0.048 dB
Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.592 mW/g
Maximum value of SAR (measured) = 0.989 mW/g

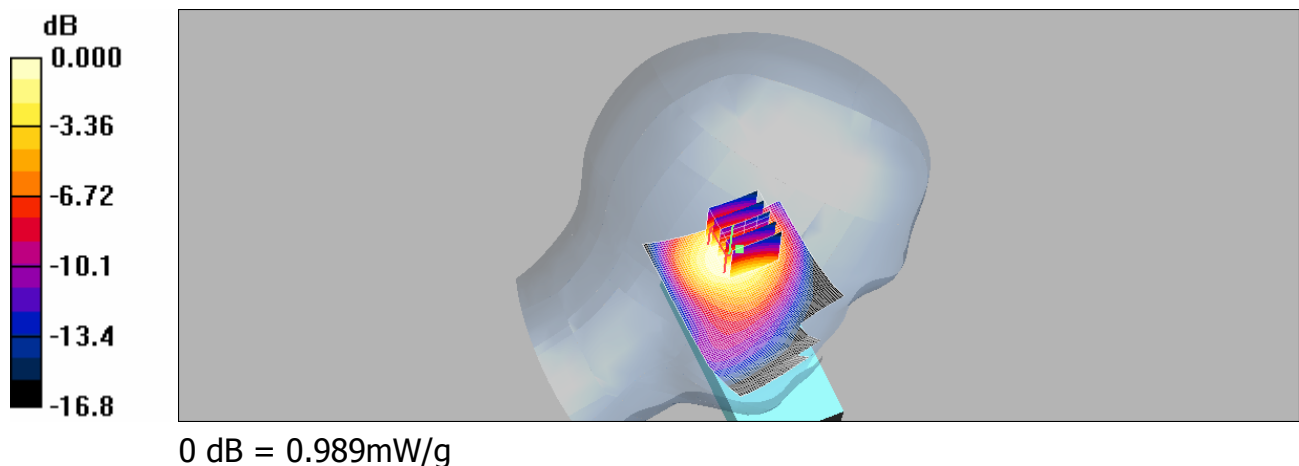

LE Tilt_CH1412_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.04 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.5 V/m; Power Drift = -0.005 dB
Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.573 mW/g
Maximum value of SAR (measured) = 0.972 mW/g

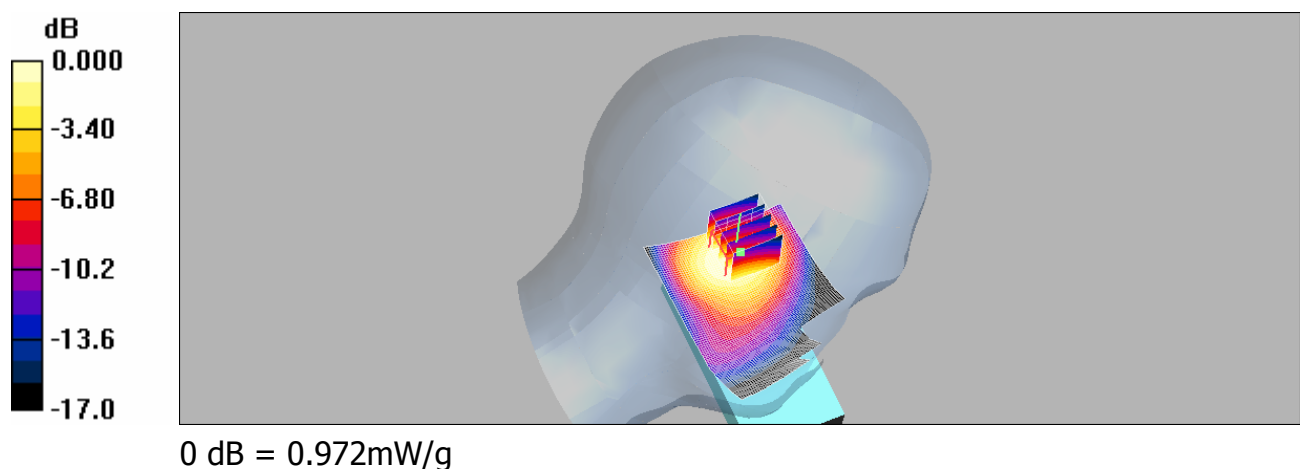

LE Tilt_CH1513_slider off

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used: $f = 1753$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Tilt/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.07 mW/g

LE_Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.5 V/m; Power Drift = -0.030 dB
Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.580 mW/g
Maximum value of SAR (measured) = 0.987 mW/g

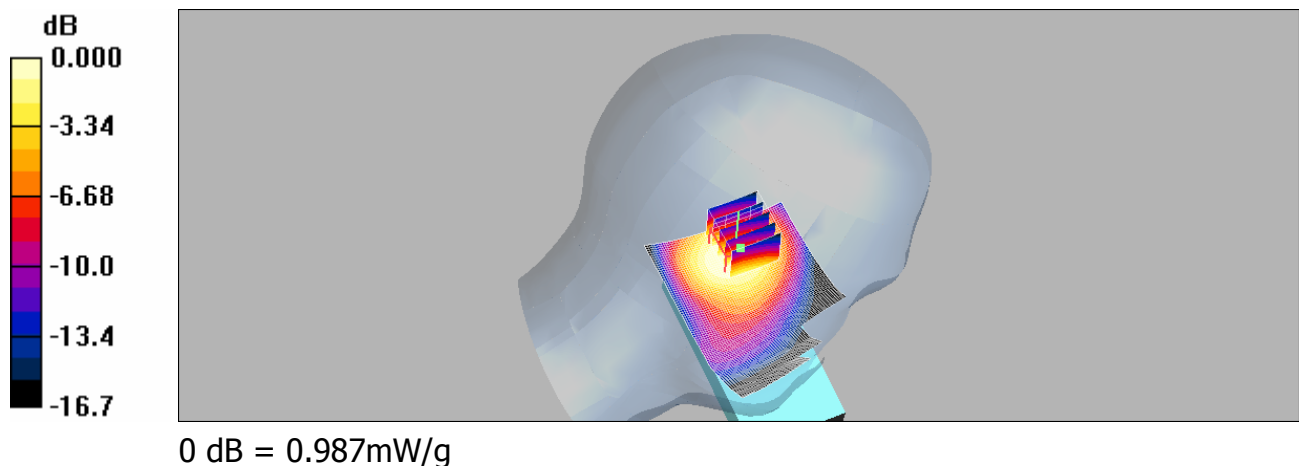

RE Cheek_CH1312_slider on

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.772 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.2 V/m; Power Drift = 0.137 dB
Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.709 mW/g; SAR(10 g) = 0.391 mW/g
Maximum value of SAR (measured) = 0.742 mW/g

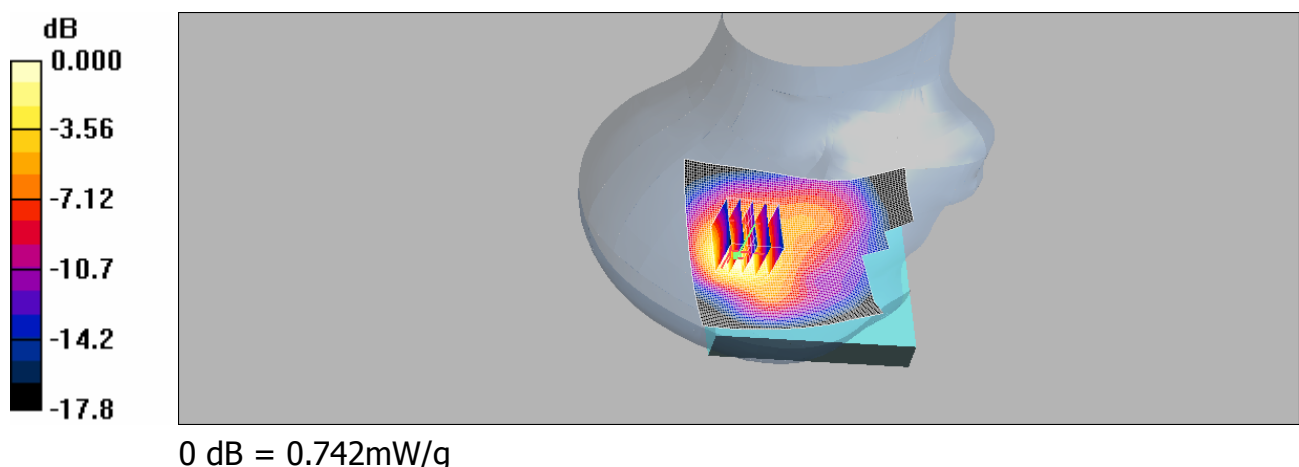

RE Cheek_CH1412_slider on

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.784 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.2 V/m; Power Drift = -0.057 dB
Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.397 mW/g
Maximum value of SAR (measured) = 0.742 mW/g

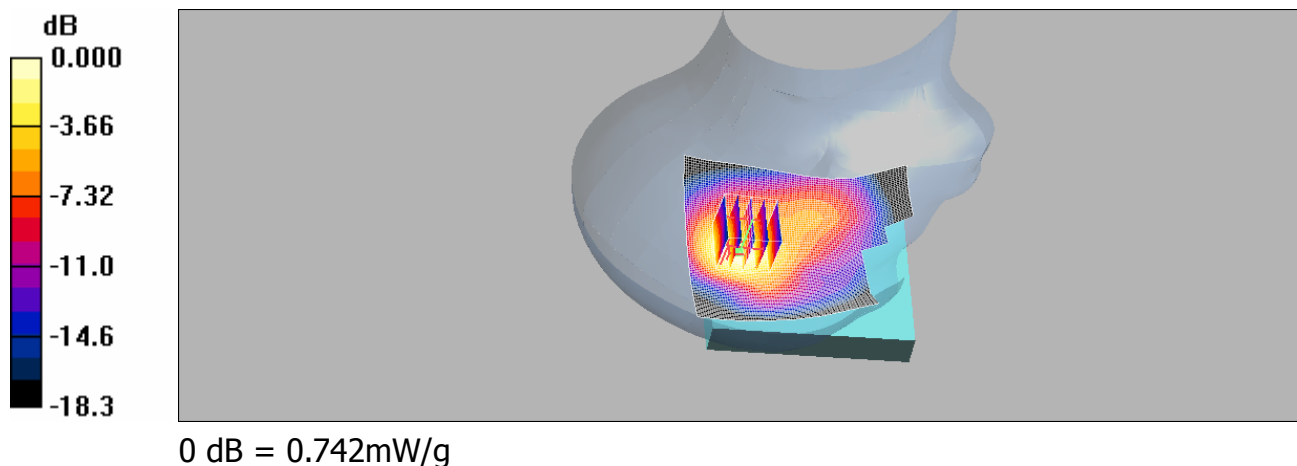

RE Cheek_CH1513_slider on

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used: $f = 1753$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

RE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.772 mW/g

RE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.7 V/m; Power Drift = 0.008 dB
Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.396 mW/g
Maximum value of SAR (measured) = 0.725 mW/g

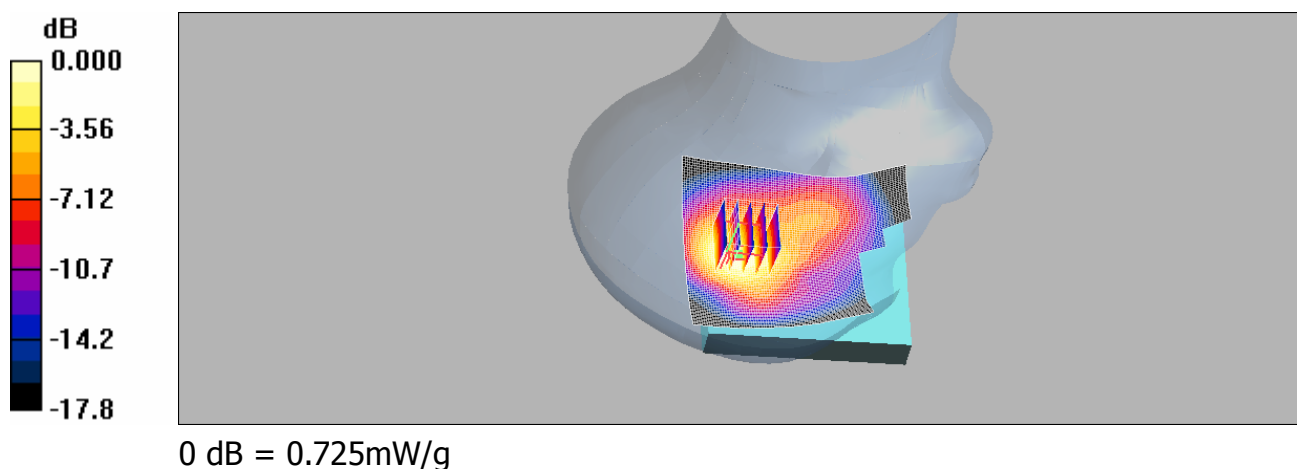

LE Cheek_CH1312_slider on

DUT: RHOD 210;

Communication System: WCDMA BAND4; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: Head 1800 MHz Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3526; ConvF(9.46, 9.46, 9.46); Calibrated: 2008/8/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2009/1/20
- Phantom: SAM2; Type: SAM 4.0; Serial: TP:1270
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

LE_Cheek/Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.549 mW/g

LE_Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.7 V/m; Power Drift = -0.172 dB
Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.284 mW/g
Maximum value of SAR (measured) = 0.506 mW/g

