

CETECOM Inc.



CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com

Issued test report consists of 53 Pages

Page 1 (53)

**FCC LISTED, REG. NO.: 101450
&
RECOGNIZED BY INDUSTRY CANADA
IC – 3925**

**Test report no.: 234FCC24/2001
FCC Part 24 / RSS 133
(PW20)**

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

TEST REPORT PREPARED BY:

EMC & Radio Engineer: Harpreet Sidhu

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com

1.3 Details of applicant

Name : High Tech Computer Corp.
Street : 9F, 6-3, Bau-chian Rd., Hsin Tien
City : Taipei
Country : Taiwan, R.O.C
Contact : Andy Hsu
Telephone : +886 2 8912 4138 ext-8390
Tele-fax : +886 2 8912 4136
e-mail : andy_hsu@htc.com.tw

1.4 Application details

Date of receipt of application : 2002-01-01
Date of receipt test item : 2002-01-14
Date of test : 2002-01-14

1.5 Test item

Manufacturer : Applicant
Model No : PW20
Description : [Pocket PC with mobile phone](#)
Serial No. : N/A

Additional information

Frequency : 1850.2MHz – 1909.8MHz.
Type of modulation : GMSK
Number of channels : 299
Antenna : External antenna
Power supply : 3.7VDC
Output power : 27.76dBm (0.597W)
Extreme vol. Limits : 3.6VDC – 4.1VDC
Extreme temp. Tolerance : -30°C – 60°C

1.6 Test standards

FCC Part 24 / RSS133 r1

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Technical responsibility for area of testing :

2002-02-11

EMC & Radio

Lothar Schmidt



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

**Test report no.: 234FCC24/2002
(PW20)**

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

| PARAMETER TO BE MEASURED | PARAGRAPH | PAGE |
|-------------------------------------|-------------------------------|-------------|
| POWER OUTPUT | SUBCLAUSE § 24.232 | 7 |
| FREQUENCY STABILITY | SUBCLAUSE § 24.235 | 12 |
| OCCUPIED BANDWIDTH | SUBCLAUSE § 2.989 | 14 |
| EMISSION LIMITS | SUBCLAUSE § 24.238 | 21 |
| RECEIVER RADIATED EMISSIONS | SUBCLAUSE § 15.209 | 37 |
| CONDUCTED SPURIOUS EMISSIONS | SUBCLAUSE § 24.238 | 42 |
| AC LINE CODUCTED EMISSIONS | SUBCLAUSE § 15.107/207 | 49 |
| TEST EQUIPMENT LISTING | | 51 |
| BLOCK DIAGRAMS | | 52 |

POWER OUTPUT

SUBCLAUSE § 24.232

Summary:

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMD-55) to ensure max. power transmission and proper modulation.

This paragraph contains both average, peak output powers and EIRP measurements for the EUT.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The EUT was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer FSEM 30 (peak and average)

This measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range)

Limits:

| Power Step | Nominal Peak Output Power (dBm) | Tolerance (dB) |
|------------|---------------------------------|----------------|
| 0 | +30 | ± 2 |

Power Measurements:

Conducted:

| Frequency (MHz) | Power Step | Peak Output Power (dBm) | Average Output Power (dBm) |
|-------------------------|------------|-------------------------|----------------------------|
| 1850.2 | 0 | 29.25 | 25.79 |
| 1880.0 | 0 | 29.37 | 26.0 |
| 1909.8 | 0 | 29.35 | 26.2 |
| Measurement uncertainty | | ±0.5 dB | |

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

EIRP Measurements

Description: This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1dBi$.

Limits:

| Power Step | Burst Average EIRP (dBm) |
|------------|--------------------------|
| 0 | <33 |

Power Measurements:

Plots are shown on next pages.

Radiated:


| Frequency (MHz) | Power Step | BURST AVERAGE (dBm) | | MODULATION AVERAGE (dBm) | |
|-------------------------|------------|---------------------|-------|--------------------------|-------|
| | | EIRP | ERP | EIRP | ERP |
| 1850.2 | 0 | 27.76 | 25.66 | 18.54 | 16.44 |
| 1880.0 | 0 | 26.43 | 24.33 | 17.21 | 15.11 |
| 1909.8 | 0 | 27.76 | 25.66 | 18.54 | 16.44 |
| Measurement uncertainty | | ±0.5 dB | | | |

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

EIRP CHANNEL 512:

SWEEP TABLE: "EIRP 1900 CH512"


| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1.8452 GHz | 1.8552 GHz | Max Peak | Coupled | 3 MHz |

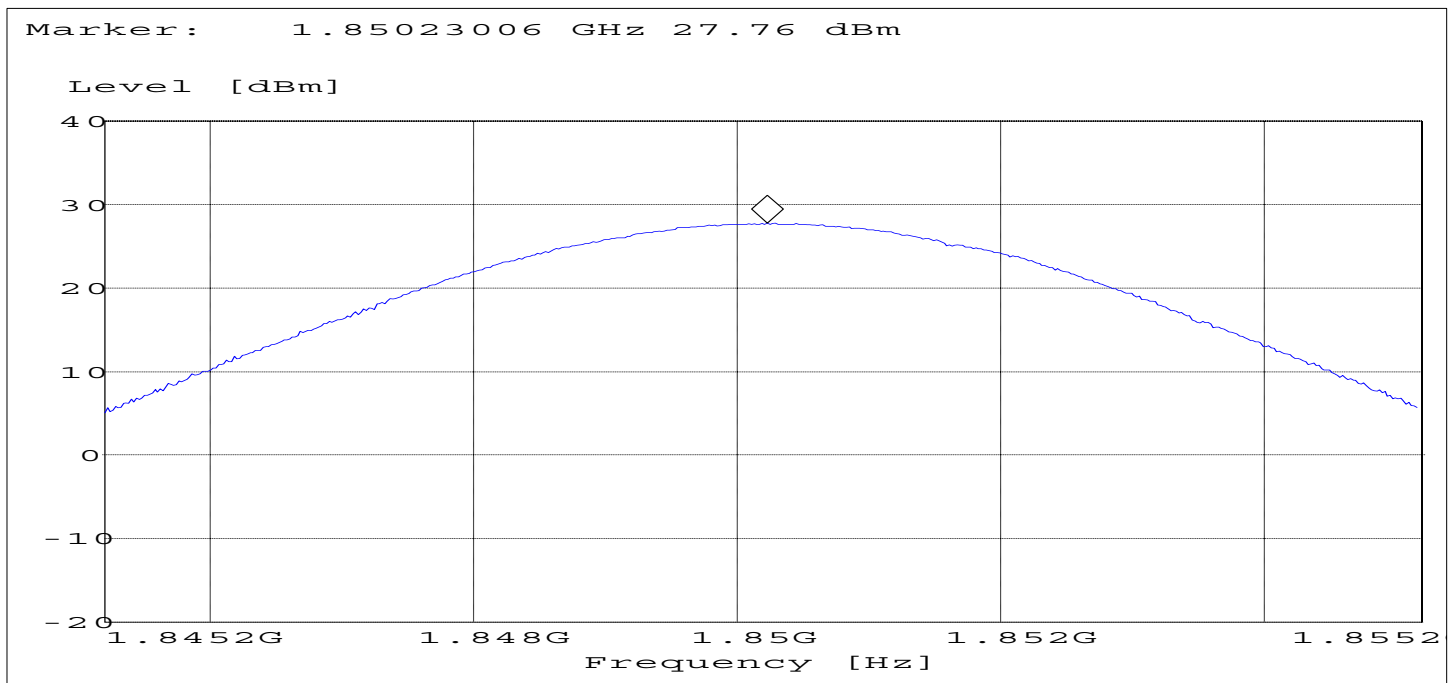

EIRP CHANNEL 661:

SWEEP TABLE: "EIRP 1900 CH661"


| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1.875 GHz | 1.885 GHz | Max Peak | Coupled | 3 MHz |

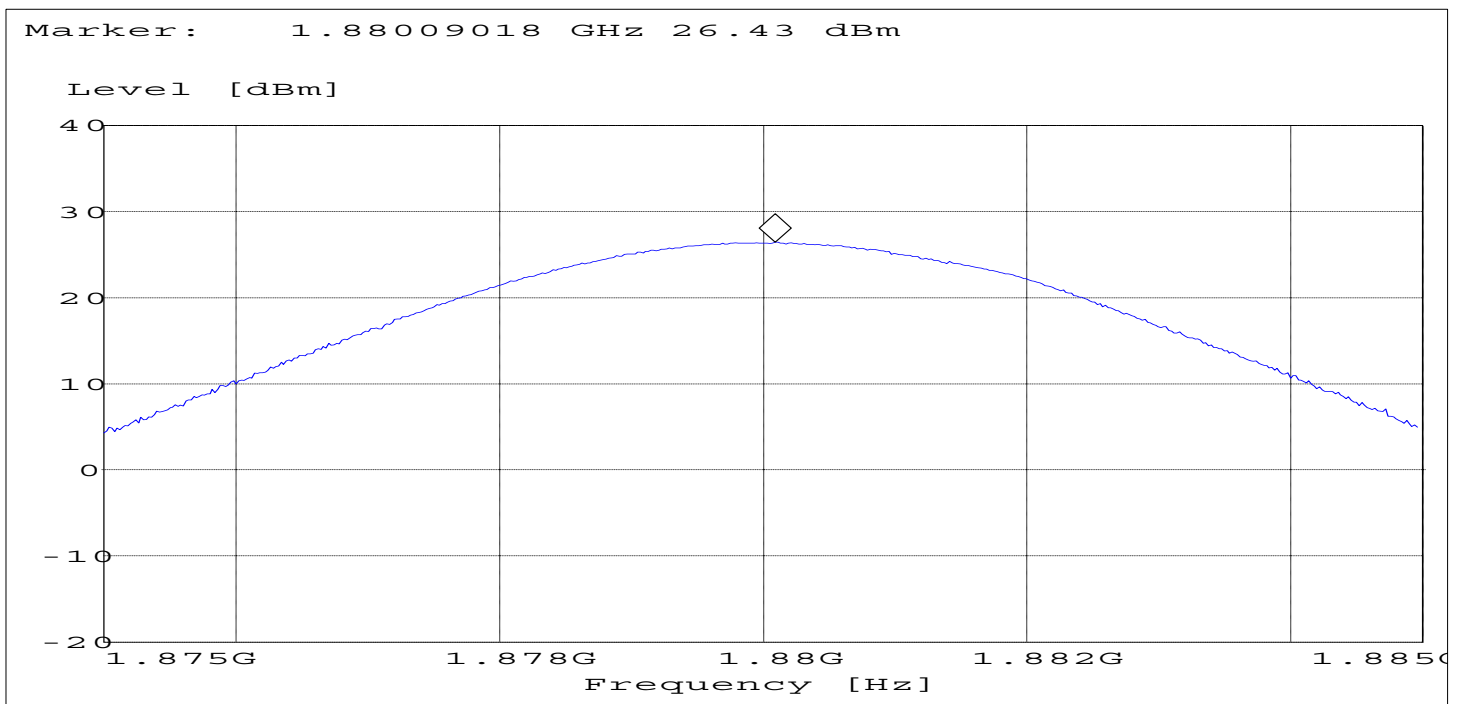

EIRP CHANNEL 810:

SWEEP TABLE: "EIRP 1900 CH810"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1.9048 GHz | 1.9148 GHz | Max Peak | Coupled | 3 MHz |

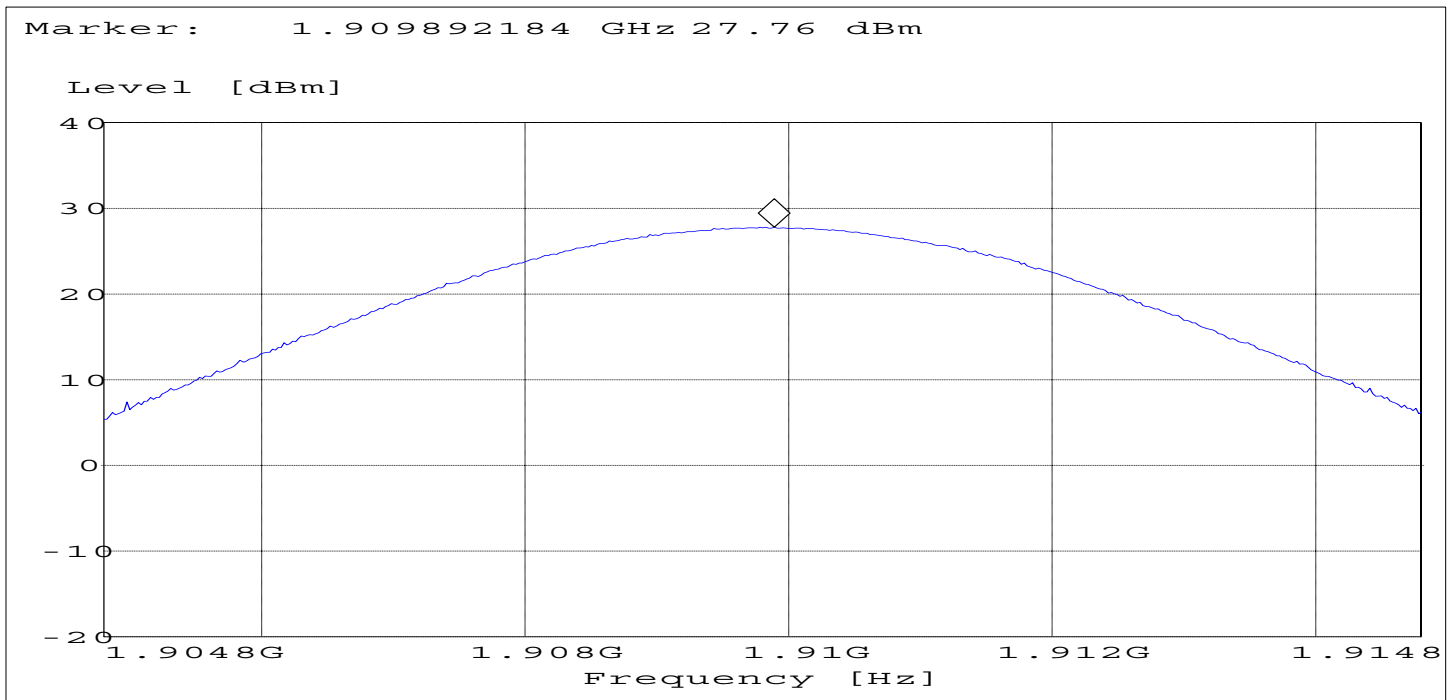

FREQUENCY STABILITY**SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of a R&S CMD 55 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via 3.7 Volts, connected to the CMD 55 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.6 Volts to maximum 4.1 Volts, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at 3.7 Volts for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via 3.7 Volts, connected to the CMD 55 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6 VDC and 4.1 VDC, with a nominal voltage of 3.7 VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7 % and +10.8 %. For the purposes of measuring frequency stability these voltage limits are to be used.

AFC FREQ ERROR vs. VOLTAGE

| Voltage (V) | Frequency Error (Hz) | Frequency Error (ppm) |
|------------------------|---------------------------------|----------------------------------|
| 3.6 | -25 | -0.0133 |
| 3.7 | -20 | -0.0106 |
| 3.8 | -22 | -0.0117 |
| 3.9 | -19 | -0.0101 |
| 4.0 | -23 | -0.0122 |
| 4.1 | -29 | -0.0154 |

AFC FREQ ERROR vs. TEMPERATURE

| TEMPERATURE (°C) | Frequency Error (Hz) | Frequency Error (ppm) |
|-----------------------------|---------------------------------|----------------------------------|
| -30 | -20 | -0.0106 |
| -20 | -24 | -0.0127 |
| -10 | -26 | -0.0138 |
| 0 | -24 | -0.0128 |
| +10 | -21 | -0.0112 |
| +20 | -26 | -0.0138 |
| +30 | -30 | -0.0160 |
| +40 | -31 | -0.0165 |
| +50 | -45 | -0.0240 |


OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

| Frequency | 99% Occupied Bandwidth | -26 dBc Bandwidth |
|-------------------|-------------------------------|--------------------------|
| 1850.2 MHz | 282.56 | 324.64 |
| 1880.0 MHz | 282.56 | 322.65 |
| 1909.2 MHz | 292.58 | 312.63 |


Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For 324.64 kHz, this equates to a resolution bandwidth of at least 3.5 kHz. For this testing, a resolution bandwidth 5.0 kHz was used.

Channel 512
99% Occupied Bandwidth

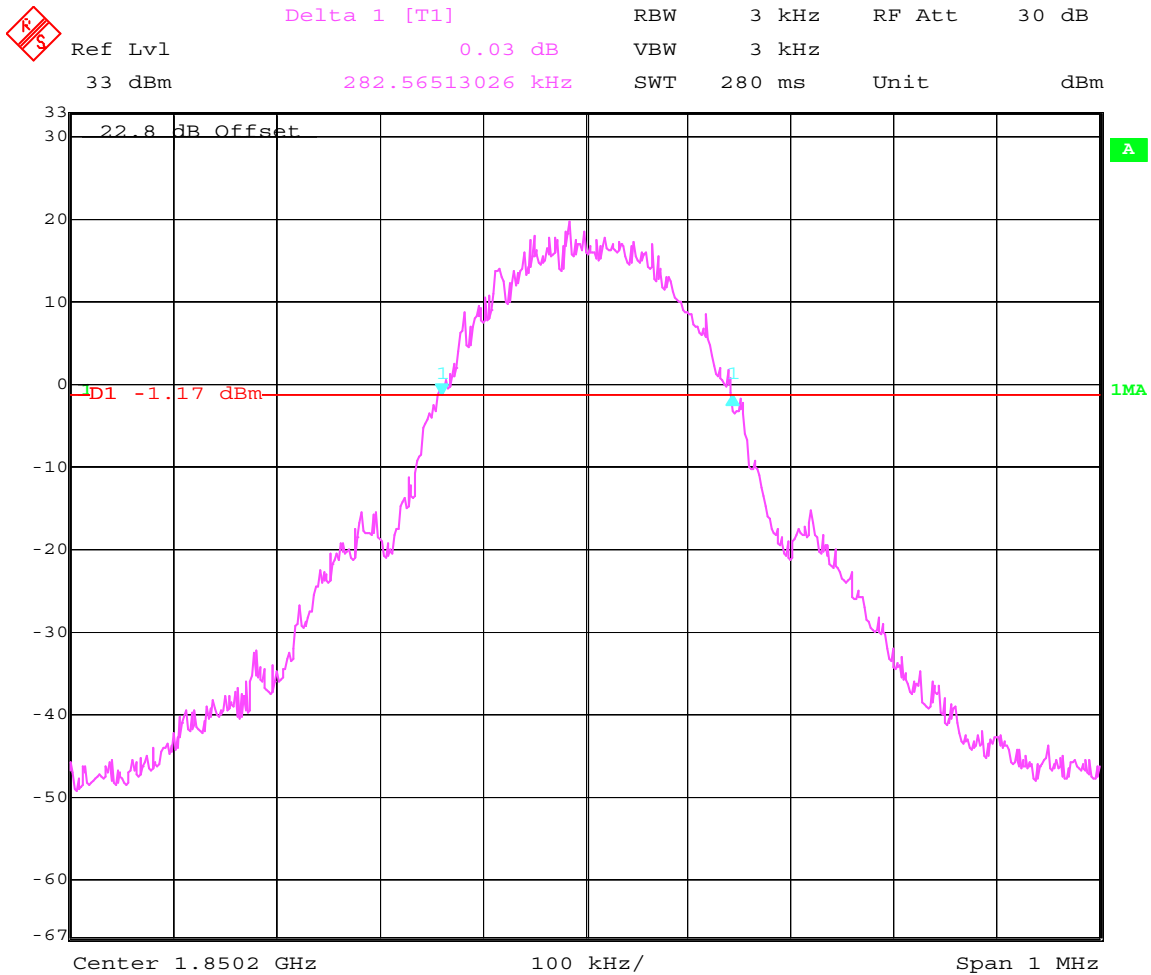


Date: 14.JAN.2002 15:29:34

Channel 512
-26 dBc Bandwidth

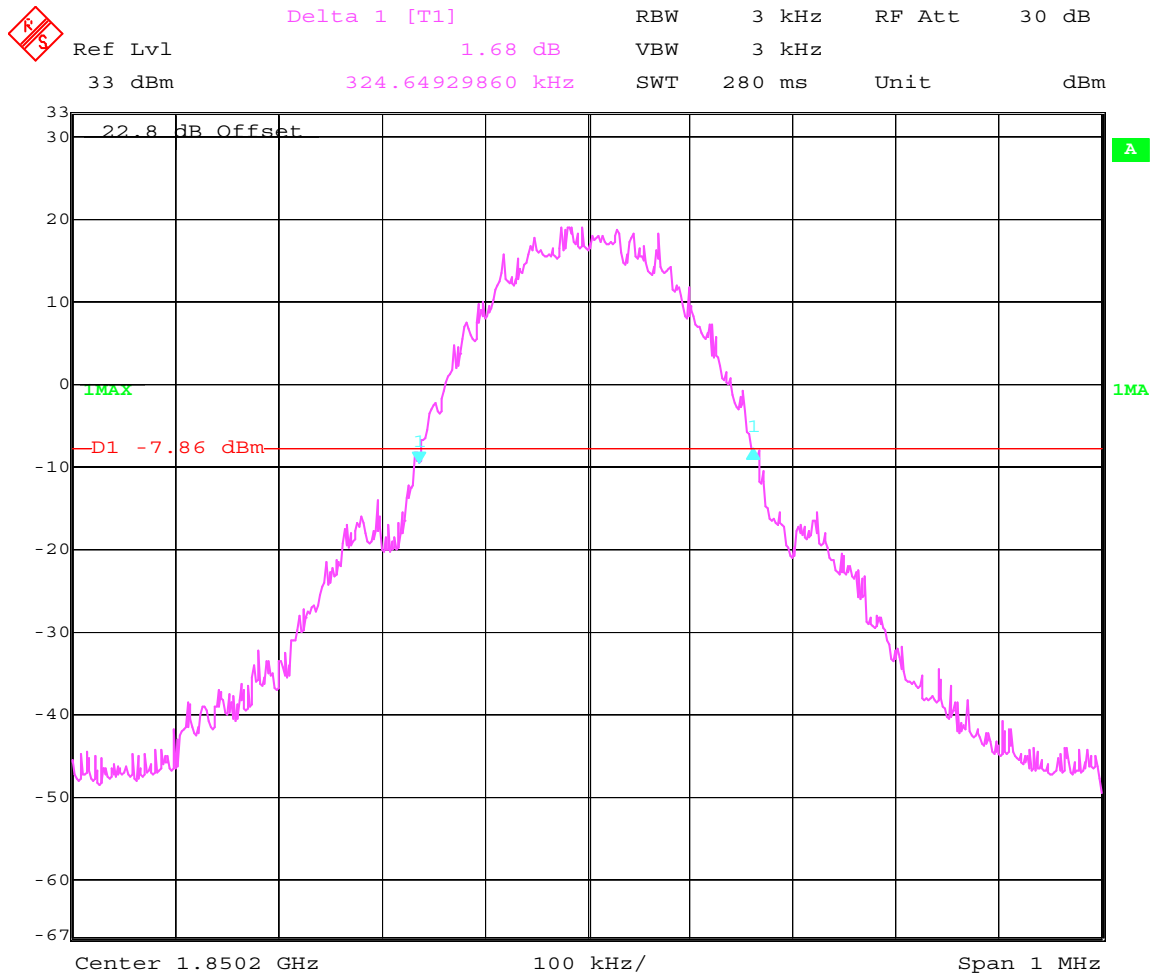


Date: 14.JAN.2002 15:27:52

Channel 661
99% Occupied Bandwidth

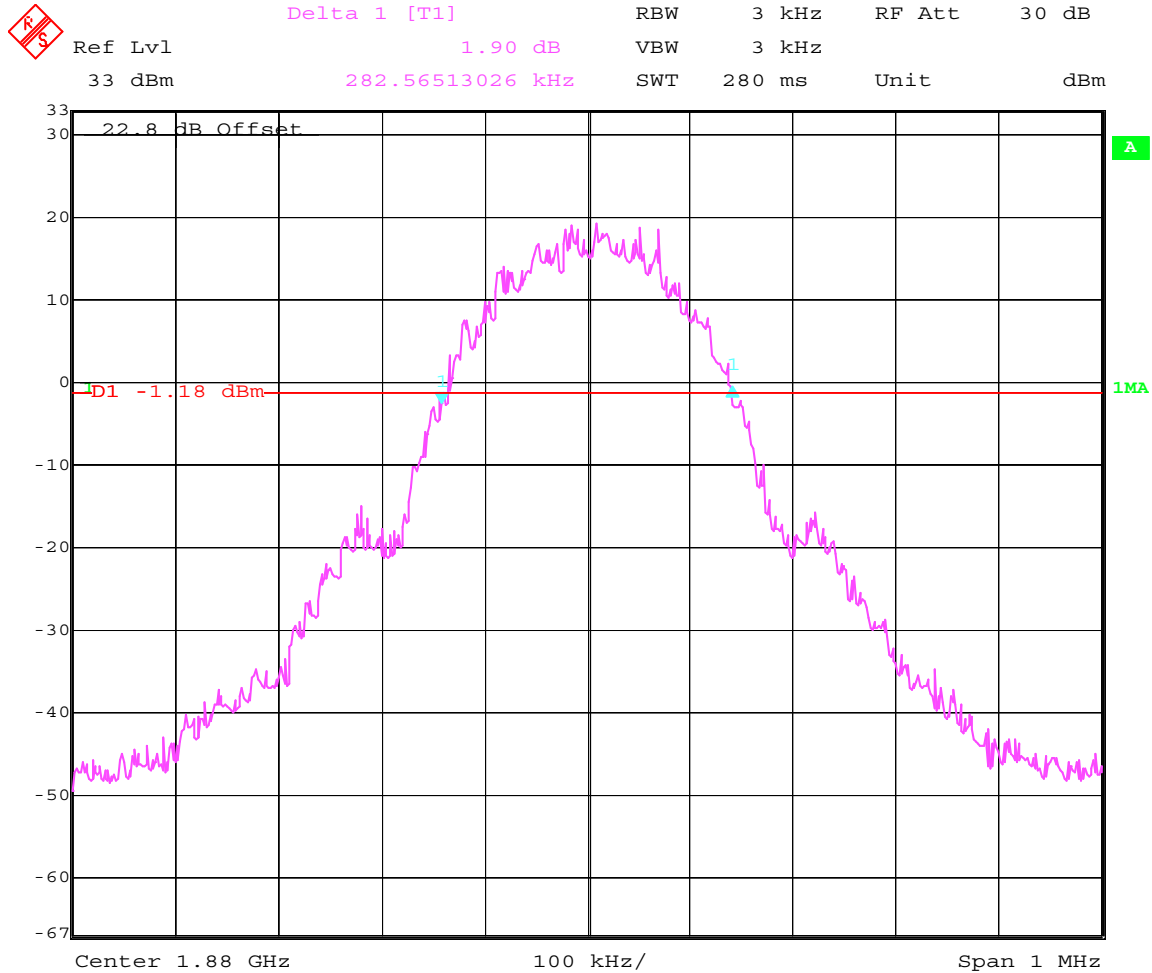


Date: 14.JAN.2002 15:33:03

Channel 661
-26 dBc Bandwidth

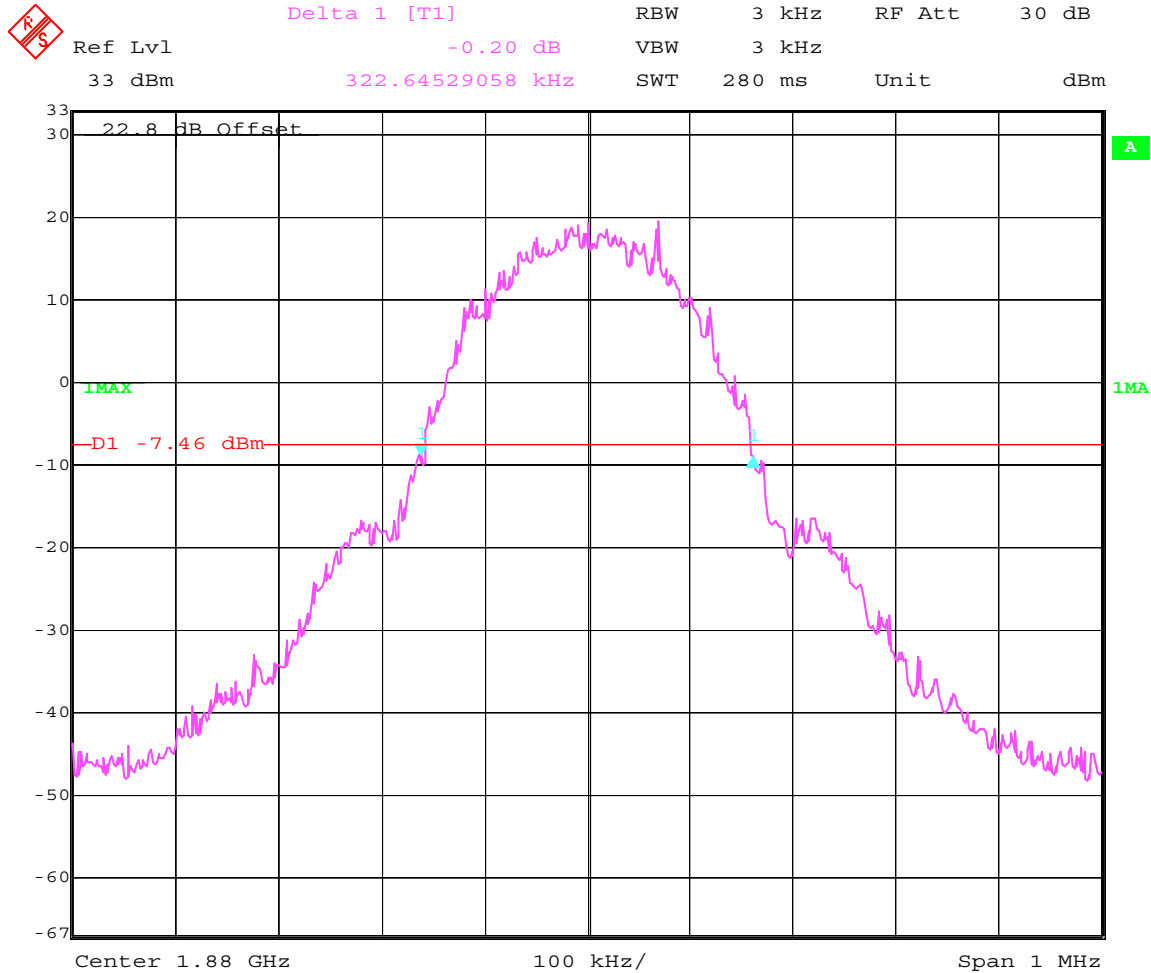


Date: 14.JAN.2002 15:31:43

Channel 810
99% Occupied Bandwidth

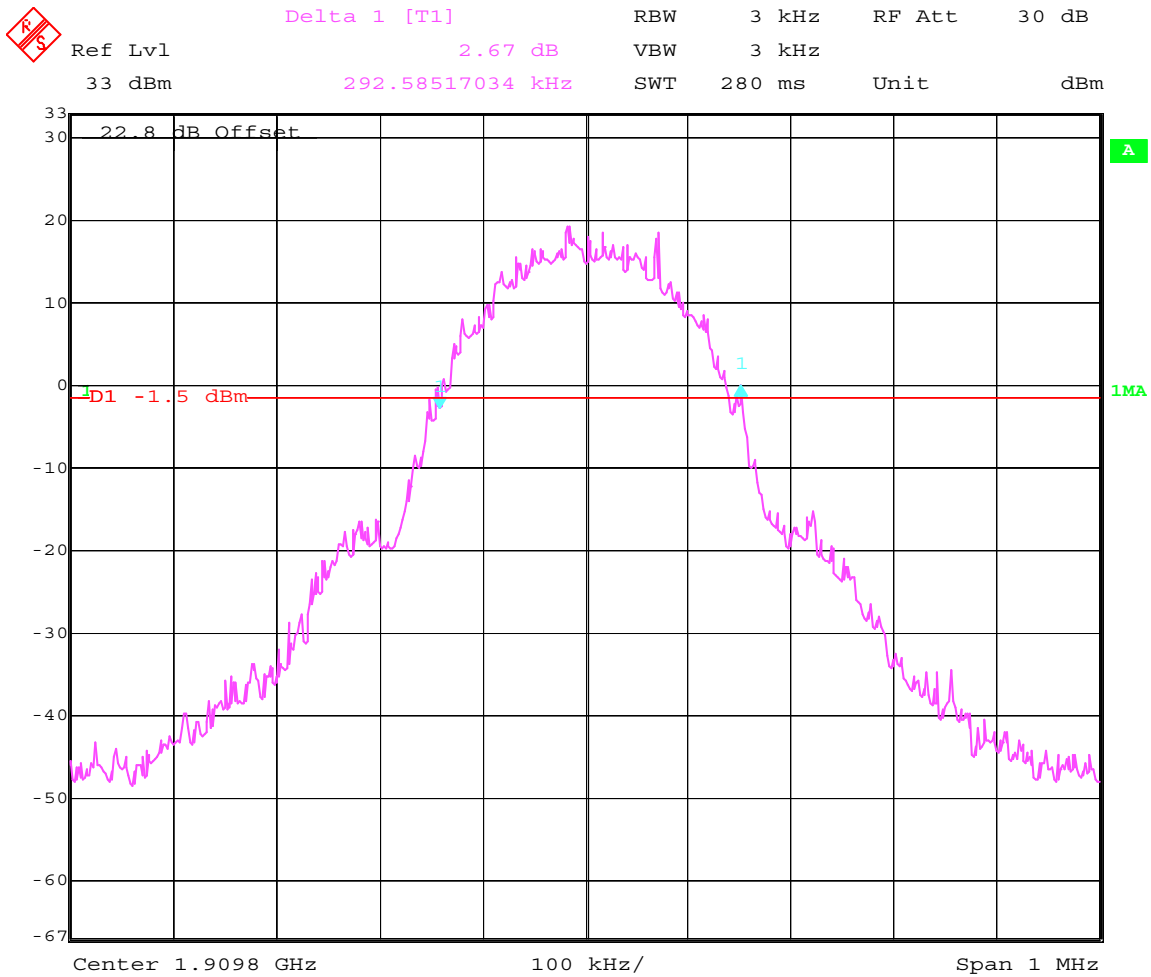

Date: 14.JAN.2002 15:36:39

Channel 810
-26 dBc Bandwidth

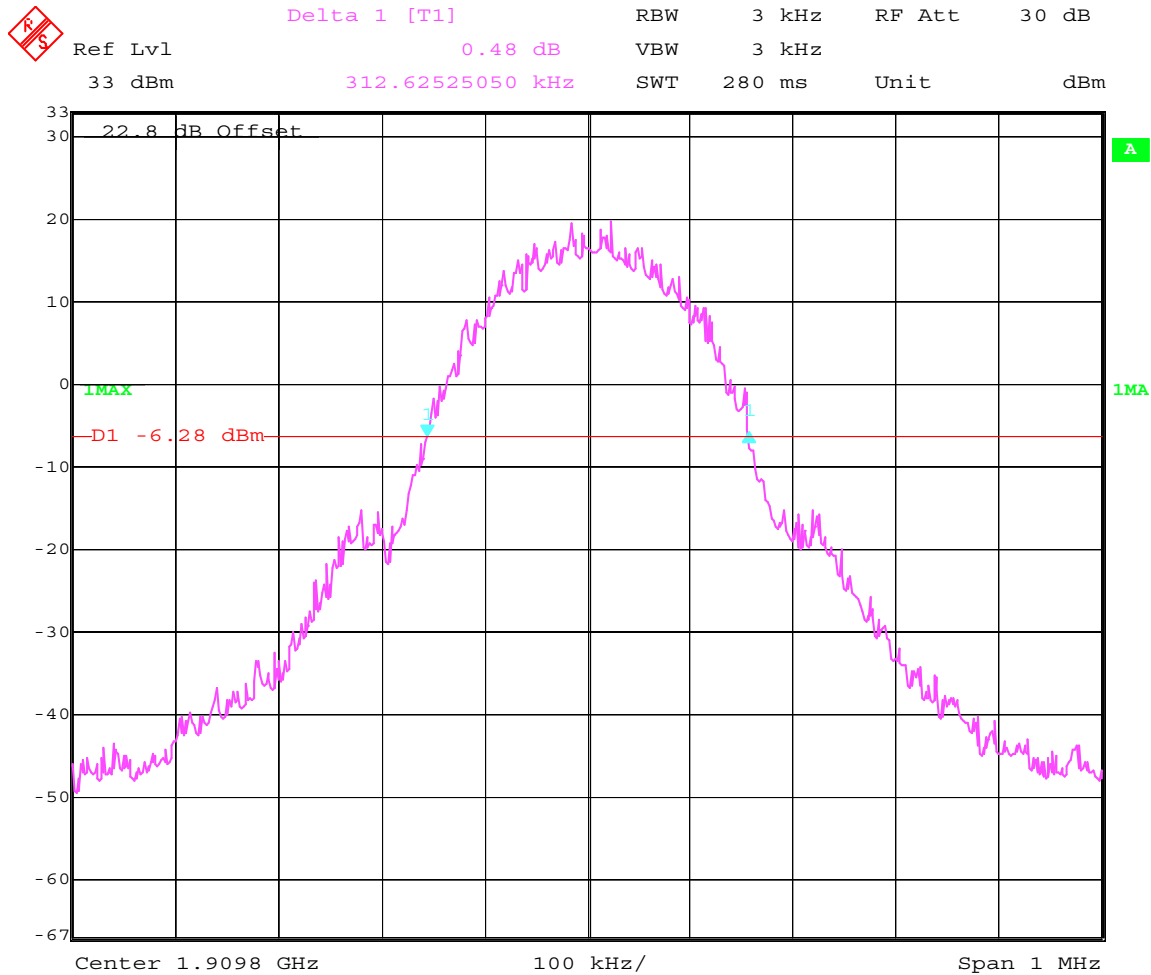

Date: 14.JAN.2002 15:35:18

EMISSIONS LIMITS

§24.238

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC.. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

$$P_g = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$$

- where :
- P = power in watts
 - g = arithmetic gain of transmitting antenna over isotropic radiator.
 - E = maximum field strength in volts/meter
 - d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

$$P(\text{dBm}) = E(\text{dBuV/m}) - 97.2\text{dB}$$

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

NOTE: The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 GHz and 19.1 GHz very short cable connections to the antenna was used to minimize the noise level.

RESULTS OF RADIATED TESTS FOR FCC-24:

| Harmonics | Tx ch-512 Freq. (MHz) | Level (dBm) | Tx ch-661 Freq. (MHz) | Level (dBm) | Tx ch-810 Freq. (MHz) | Level (dBm) |
|------------------|----------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|
| 2 | 3700.4 | -34.90 | 3760 | -33 | 3819.6 | -28.31 |
| 3 | 5550.6 | -32.00 | 5640 | -31.5 | 5729.4 | -35 |
| 4 | 7400.8 | -30.10 | 7520 | -29.10 | 7639.2 | -25.21 |
| 5 | 9251 | -35 | 9400 | -35.1 | 9549 | -35.90 |
| 6 | 11101.2 | -35.12 | 11280 | -34.8 | 11458.8 | -35.12 |
| 7 | 12951.4 | -32.09 | 13160 | -32.0 | 13368.6 | -32.5 |
| 8 | 14801.6 | -30.10 | 15040 | -30.0 | 15278.4 | -29.8 |
| 9 | 16651.8 | -24.2 | 16920 | -24.0 | 17188.2 | -24.48 |
| 10 | 18502 | -25.0 | 18800 | -25.0 | 19098 | -25.9 |


RADIATED SPURIOUS EMISSIONS

Channel 512 : 30MHz - 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 30MHz | 1GHz | Max Peak | Coupled | 1 MHz |

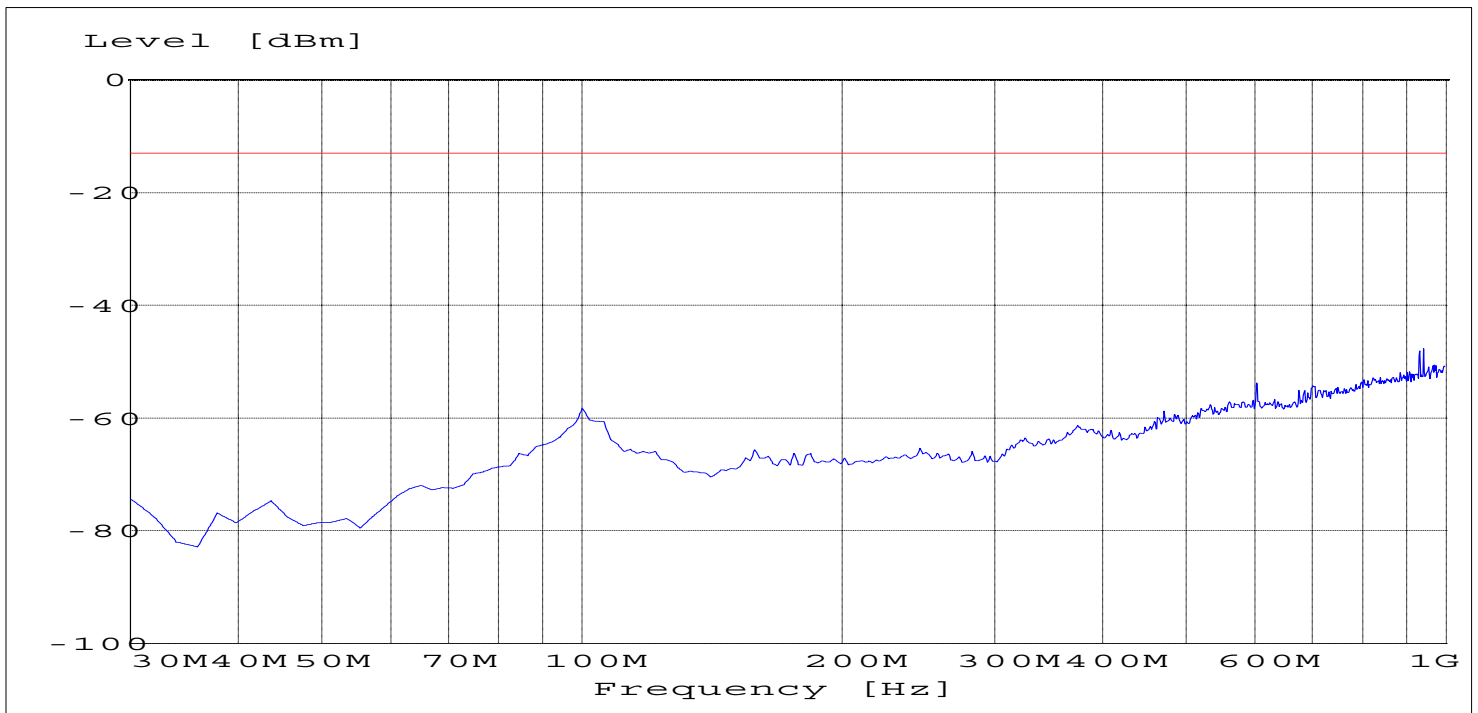

RADIATED SPURIOUS EMISSIONS


Channel 512 : 1GHz – 8GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-8G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1GHz | 8GHz | Max Peak | Coupled | 1 MHz |

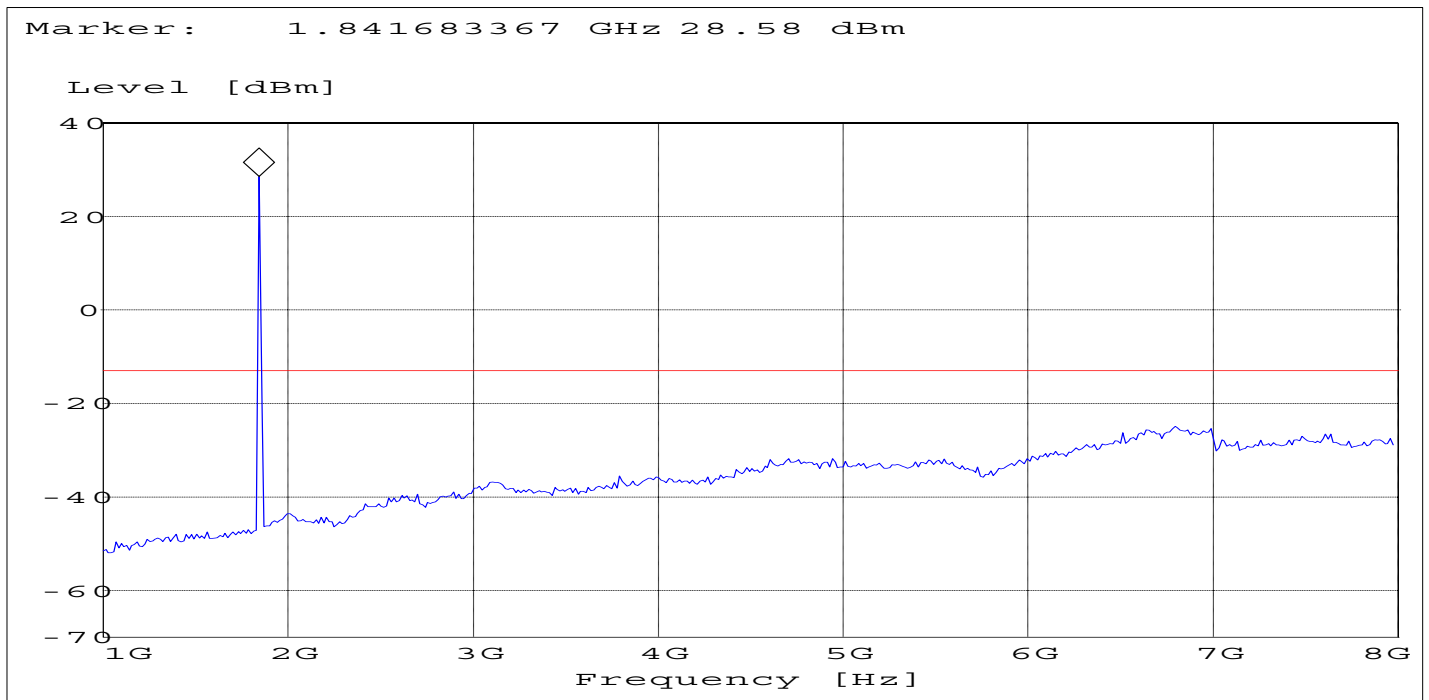


RADIATED SPURIOUS EMISSIONS

Channel 661: 30MHz –1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 30MHz | 1GHz | Max Peak | Coupled | 1 MHz |

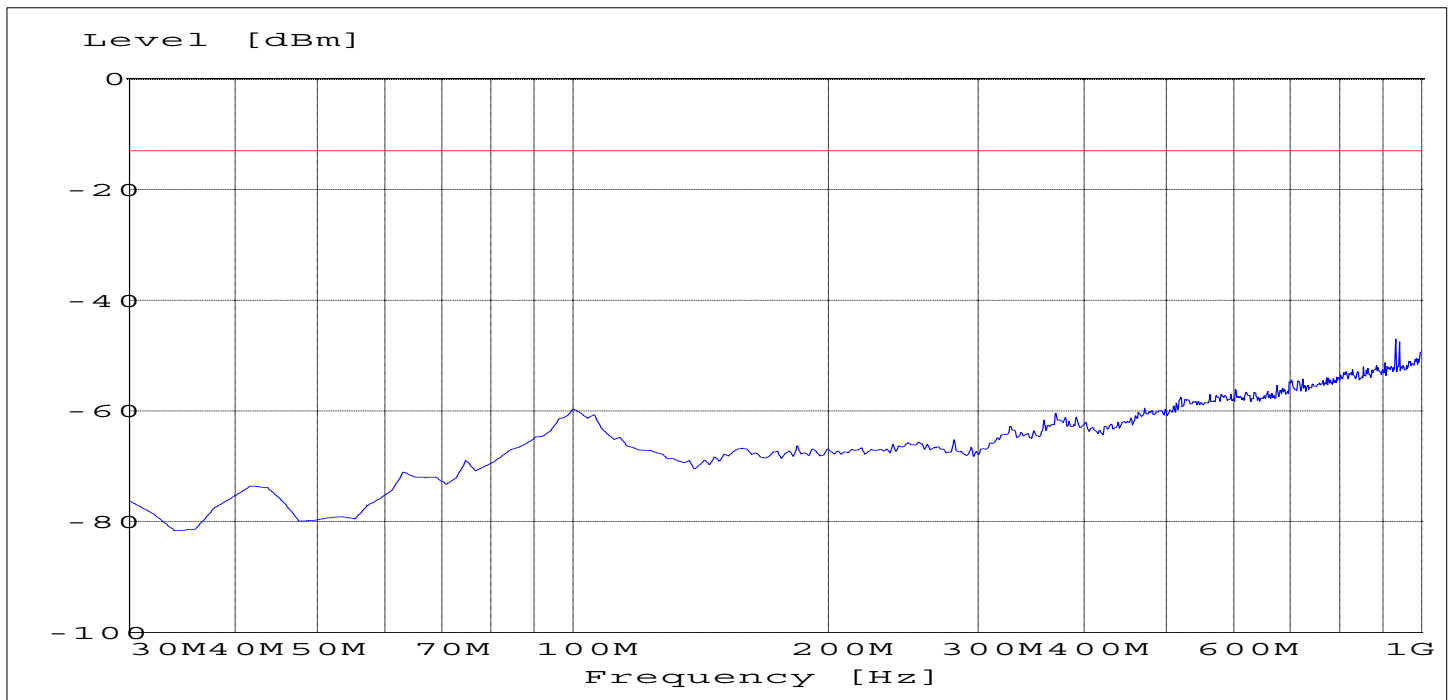

RADIATED SPURIOUS EMISSIONS


Channel 661: 1GHz – 8GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-8G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1GHz | 8GHz | Max Peak | Coupled | 1 MHz |

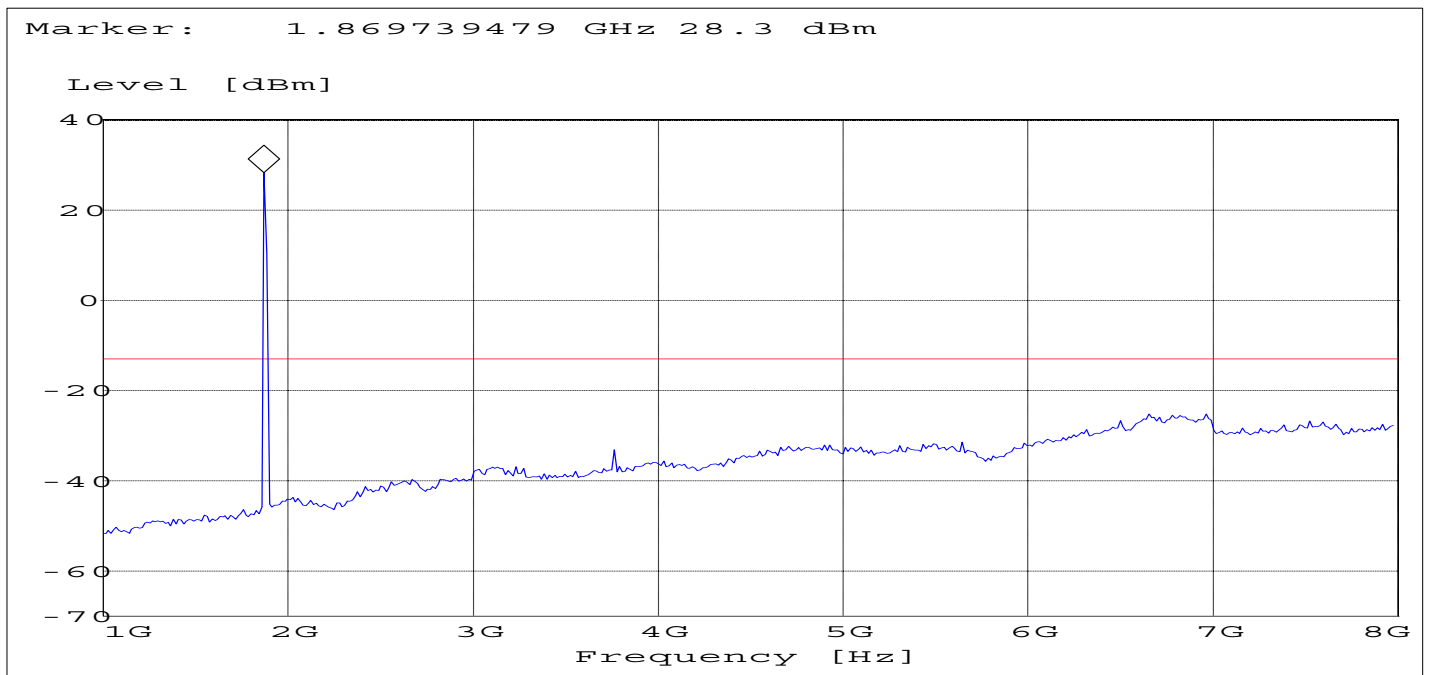


RADIATED SPURIOUS EMISSIONS

Channel 810: 30MHz –1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

| <i>Start</i> | <i>Stop</i> | <i>Detector</i> | <i>Meas.</i> | <i>RBW/VBW</i> |
|------------------|------------------|-----------------|--------------|----------------|
| <i>Frequency</i> | <i>Frequency</i> | | <i>Time</i> | |
| 30MHz | 1GHz | Max Peak | Coupled | 1 MHz |

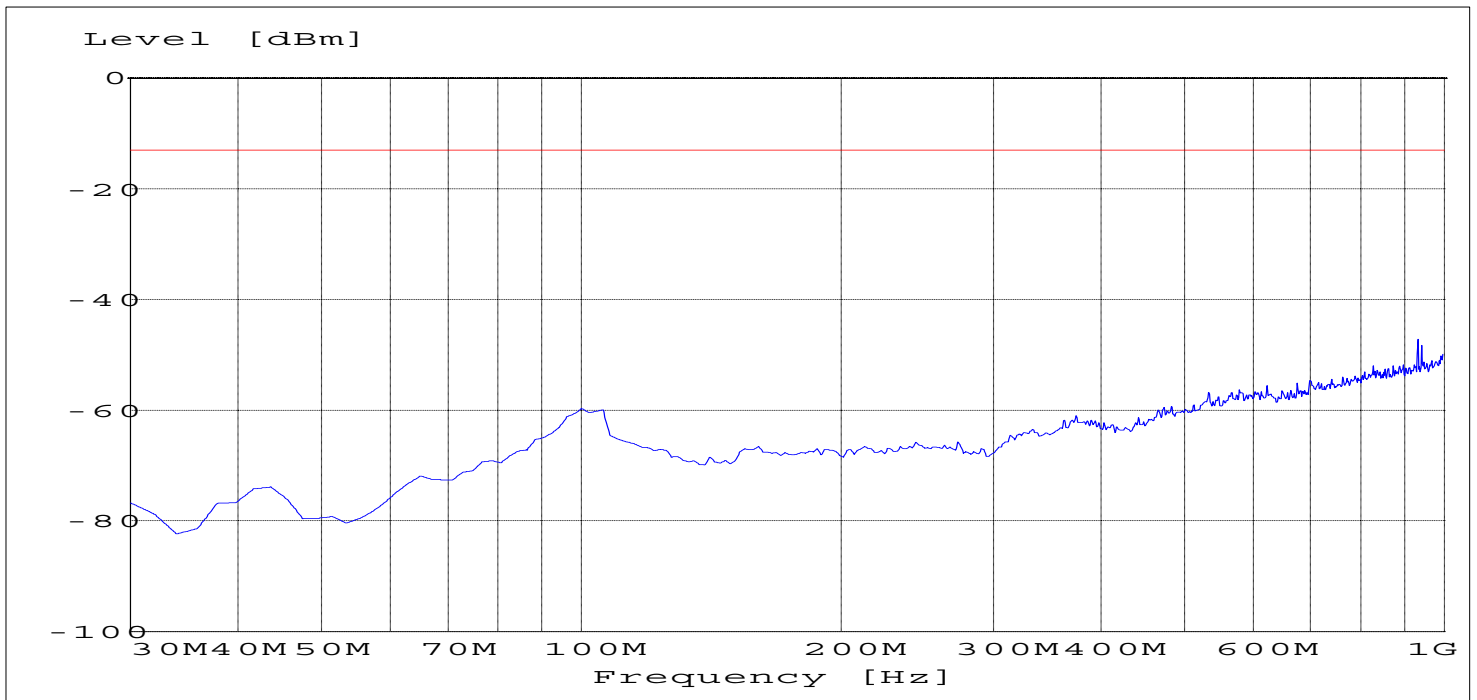

RADIATED SPURIOUS EMISSIONS


Channel 810: 1GHz – 8GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-8G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1GHz | 8GHz | Max Peak | Coupled | 1 MHz |

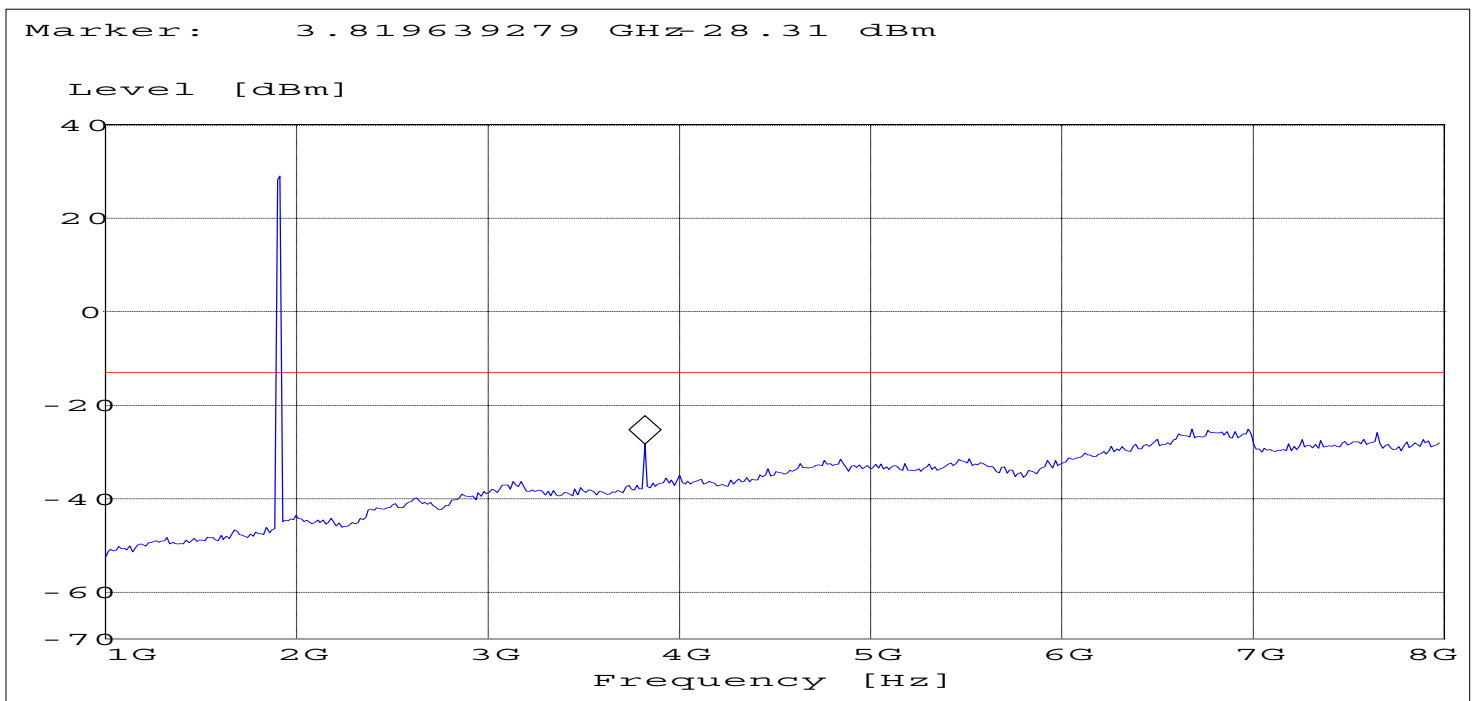

RADIATED SPURIOUS EMISSIONS


8GHz – 18GHz

Spurious emission limit –13dBm

(NOTE: This plot is valid for all three channels)

SWEEP TABLE: "FCC 24 spuri 8-18G"

| <i>Start</i> | <i>Stop</i> | <i>Detector</i> | <i>Meas. Time</i> | <i>RBW/VBW</i> |
|--------------|-------------|-----------------|-------------------|----------------|
| 8GHz | 18GHz | Max Peak | Coupled | 1 MHz |

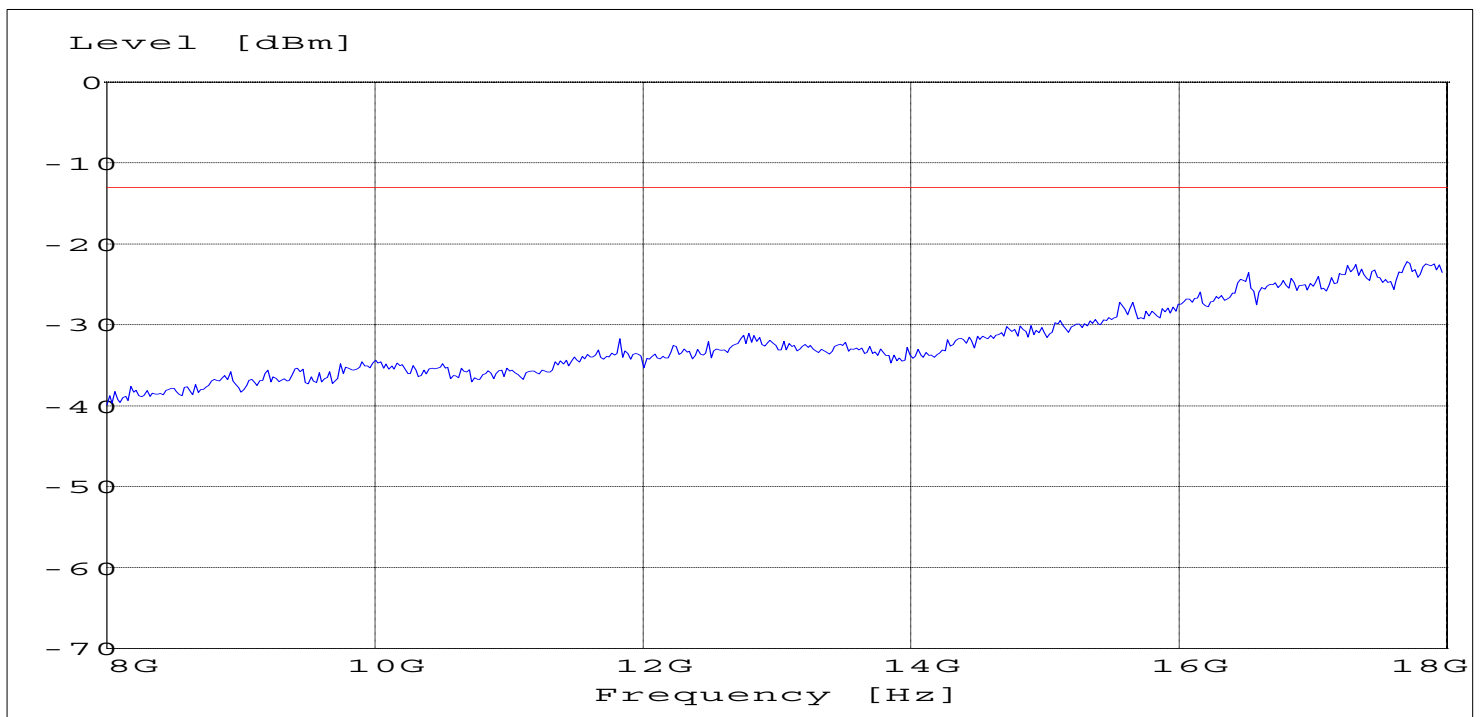

RADIATED SPURIOUS EMISSIONS


18GHz – 19.1GHz

Spurious emission limit –13dBm

(NOTE: This plot is valid for all three channels)

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

| <i>Start</i> | <i>Stop</i> | <i>Detector</i> | <i>Meas.</i> | <i>RBW/VBW</i> |
|------------------|------------------|-----------------|--------------|----------------|
| <i>Frequency</i> | <i>Frequency</i> | | <i>Time</i> | |
| 18GHz | 19.1GHz | Max Peak | Coupled | 1 MHz |

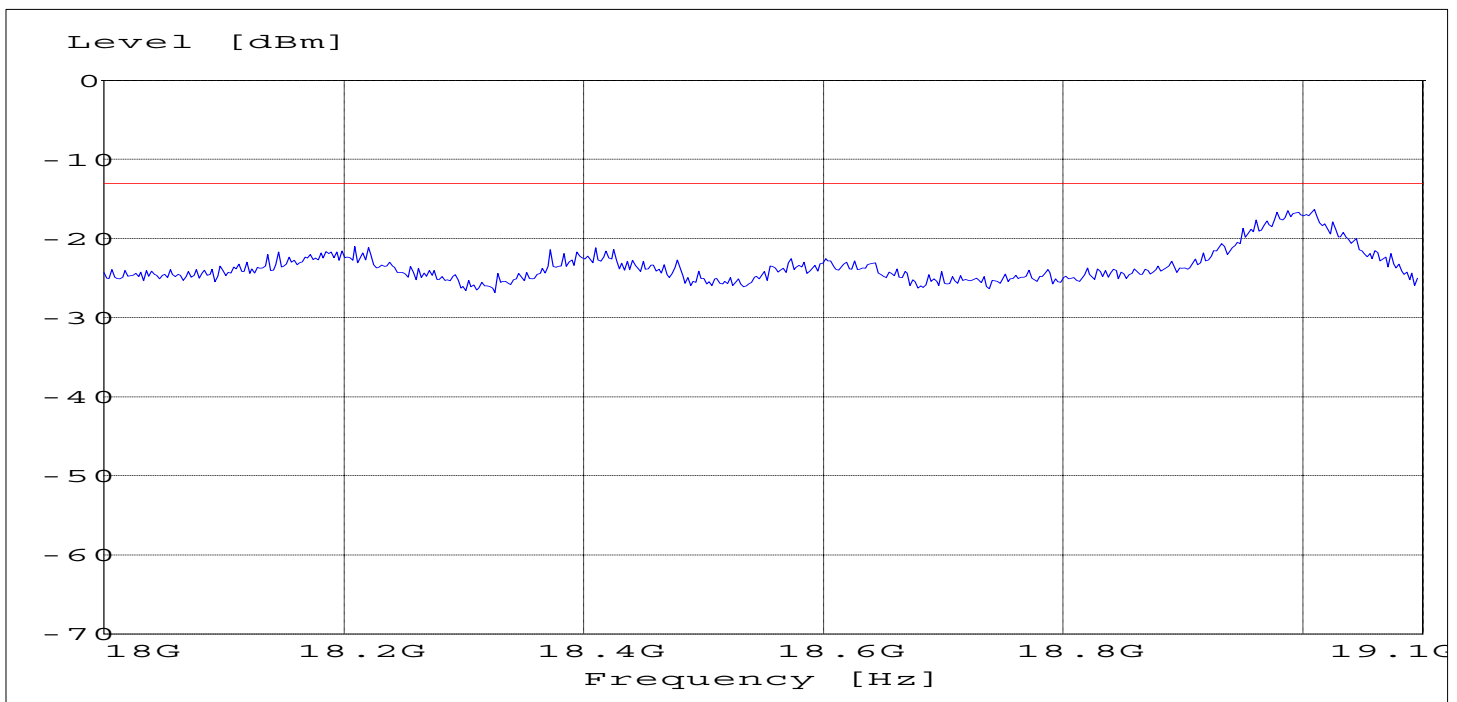


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

| Start | Stop | Detector | Meas. Time | RBW/VBW |
|-------|------|----------|------------|---------|
| 30MHz | 1GHz | Max Peak | Coupled | 1 MHz |

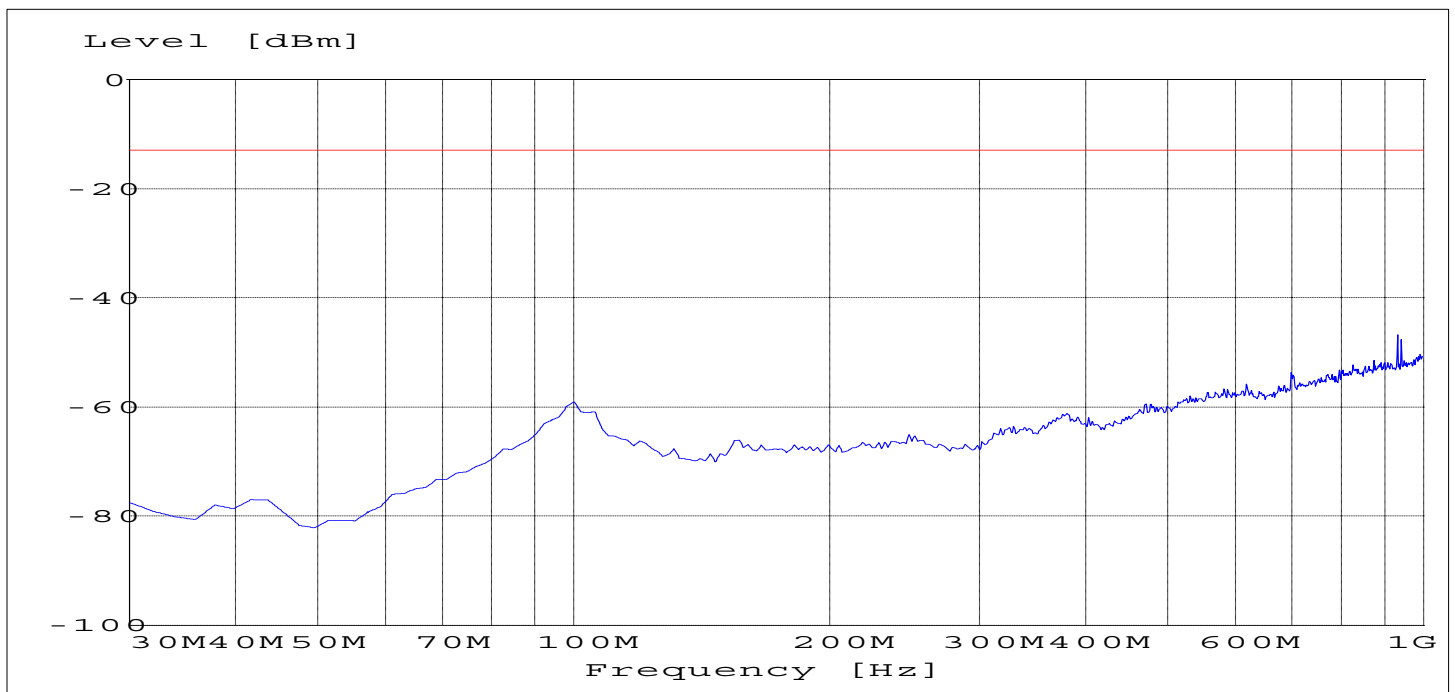


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 1GHz – 8GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1GHz | 8GHz | Max Peak | Coupled | 1 MHz |

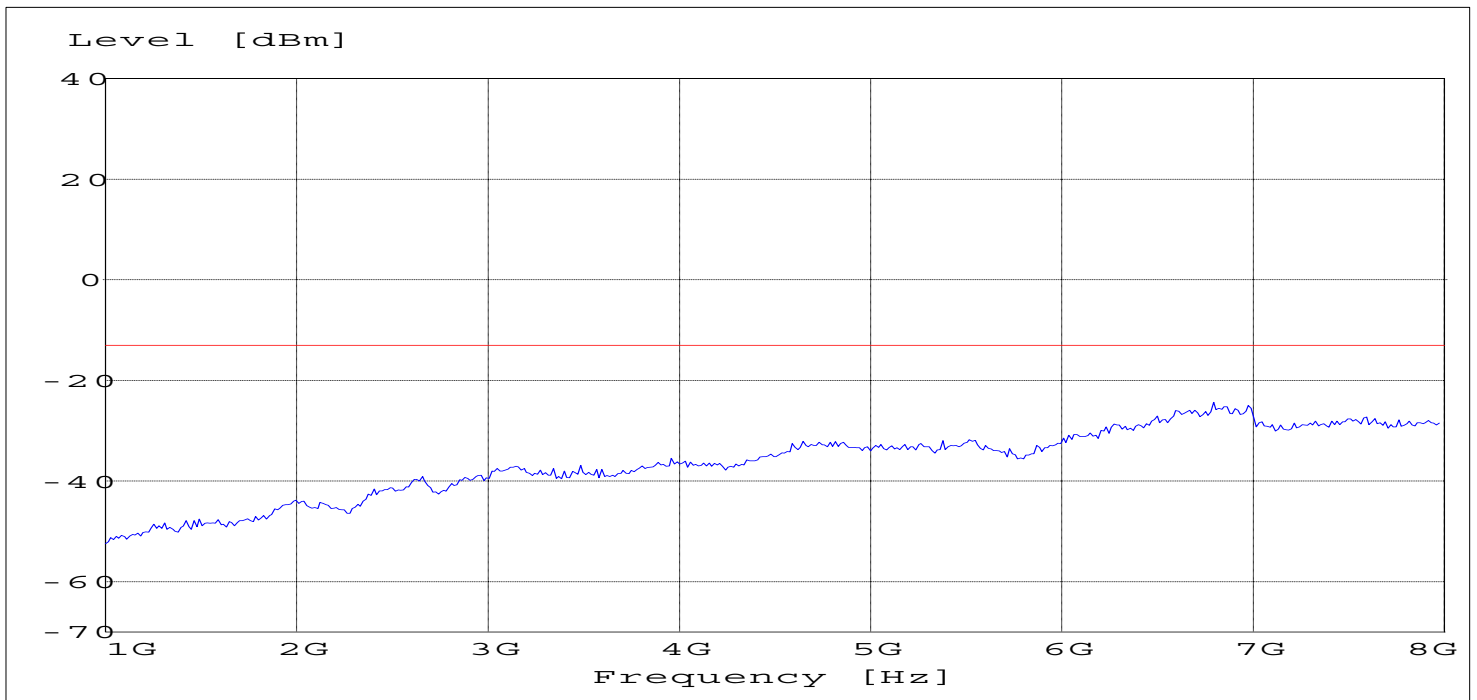


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 8GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 8-18G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 8GHz | 18GHz | Max Peak | Coupled | 1 MHz |

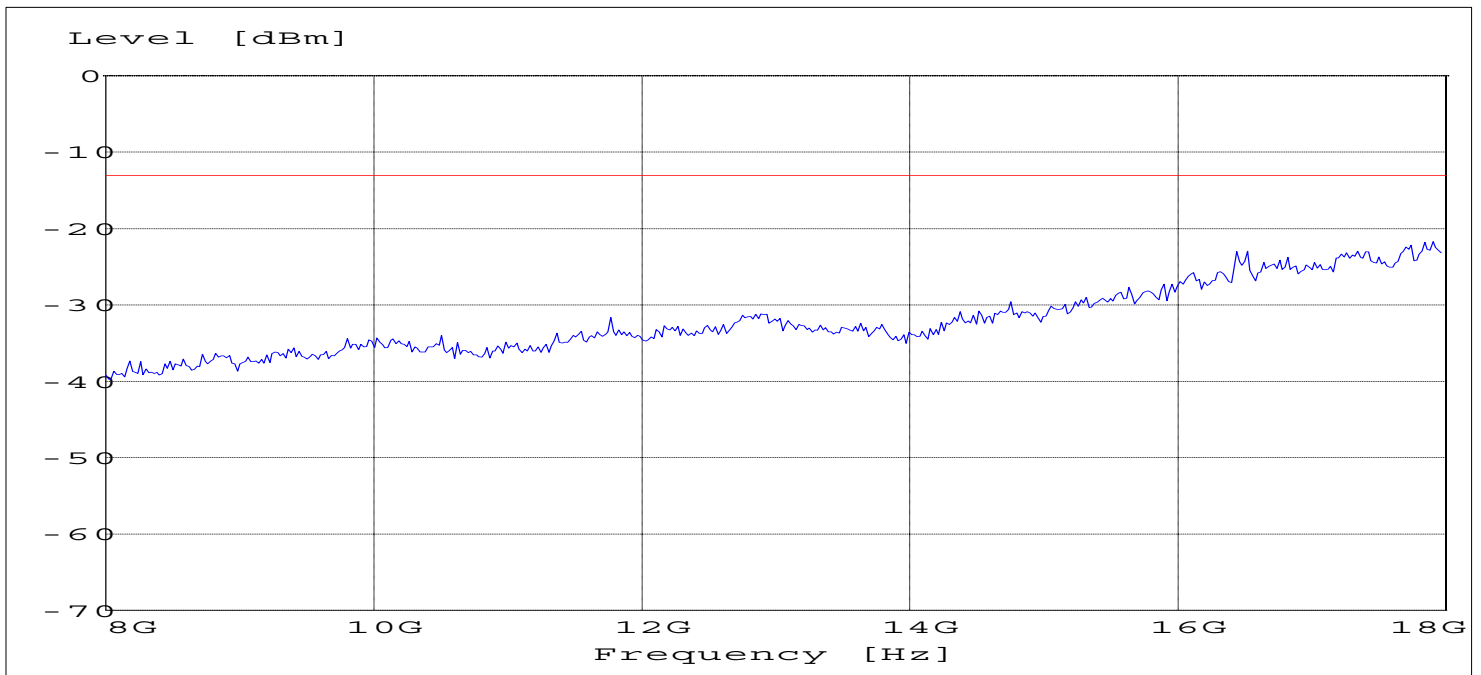


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 18GHz – 19.1GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"


| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 18GHz | 19.1GHz | Max Peak | Coupled | 1 MHz |

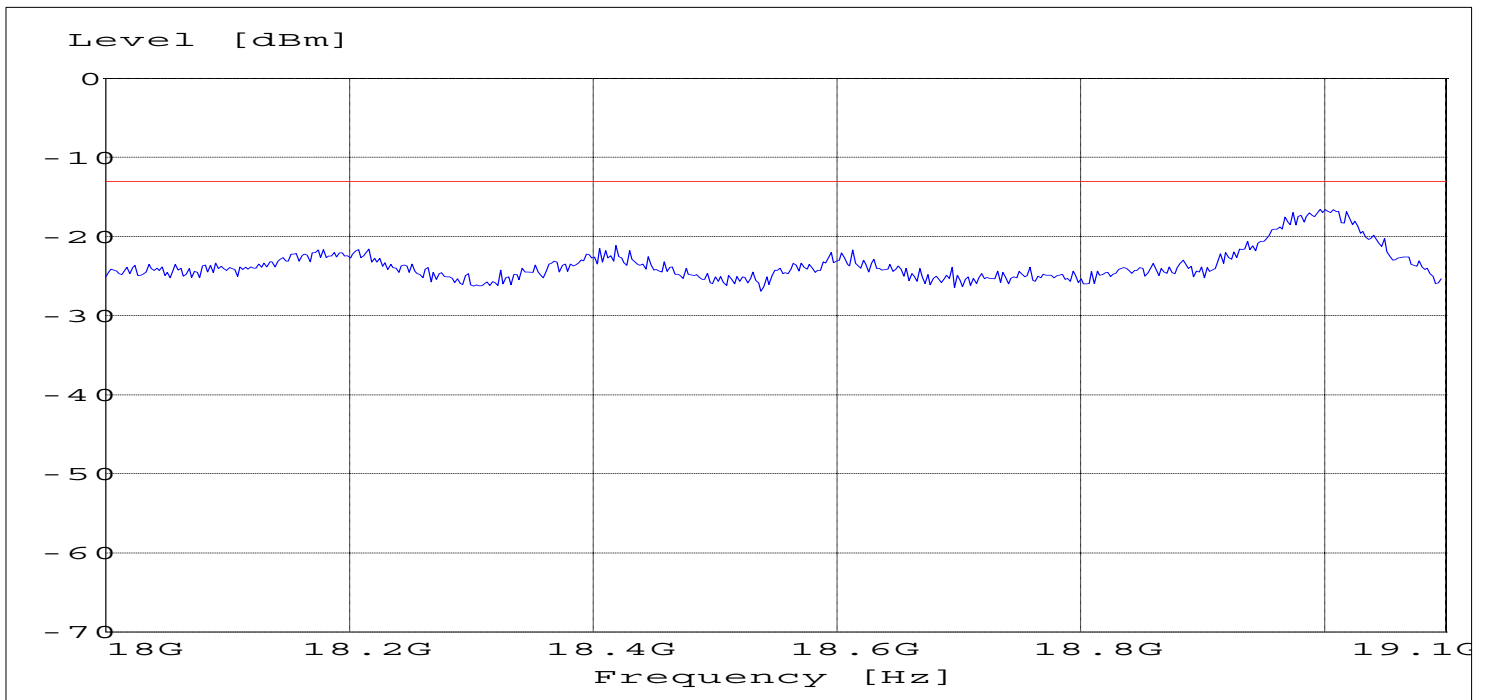

Lower Band Edge:
(Conducted)

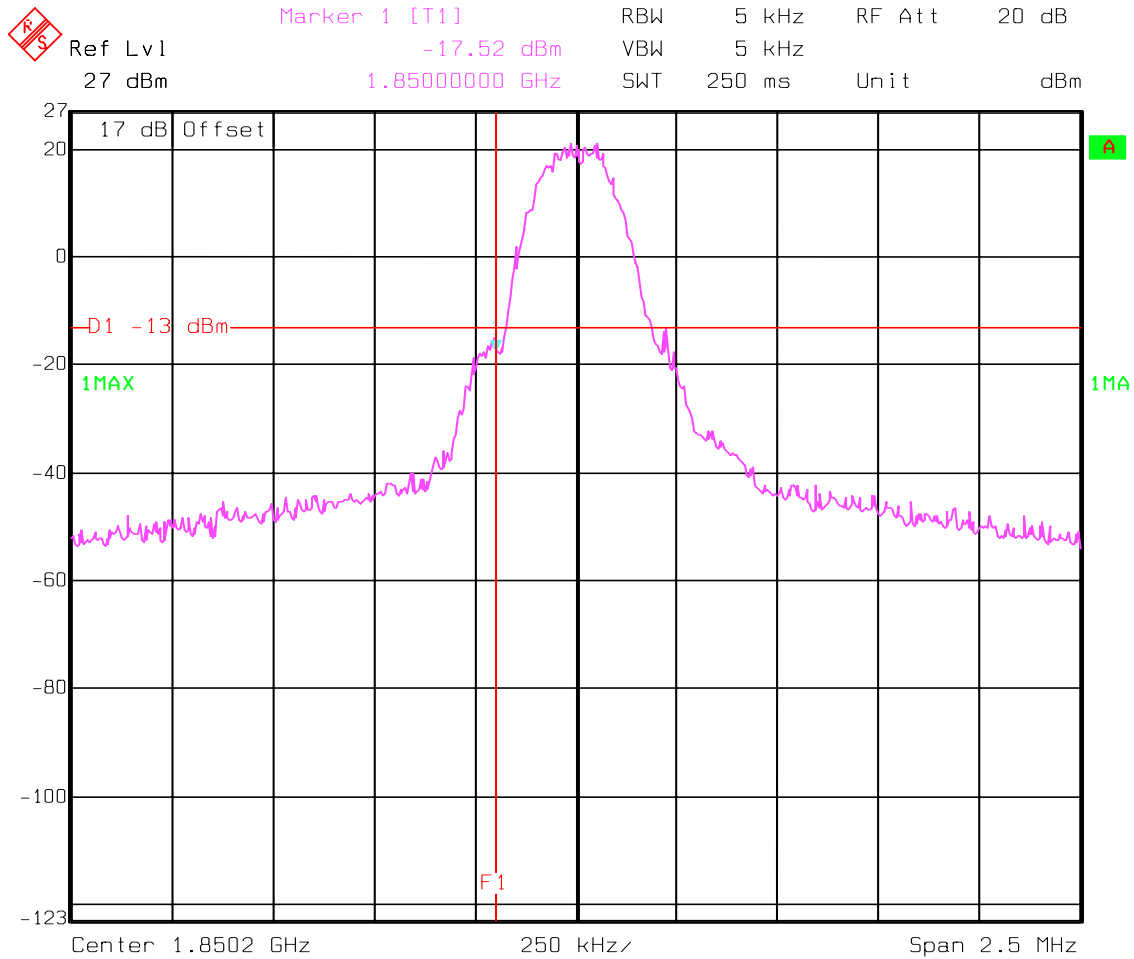

Higher Band Edge:
(Conducted)

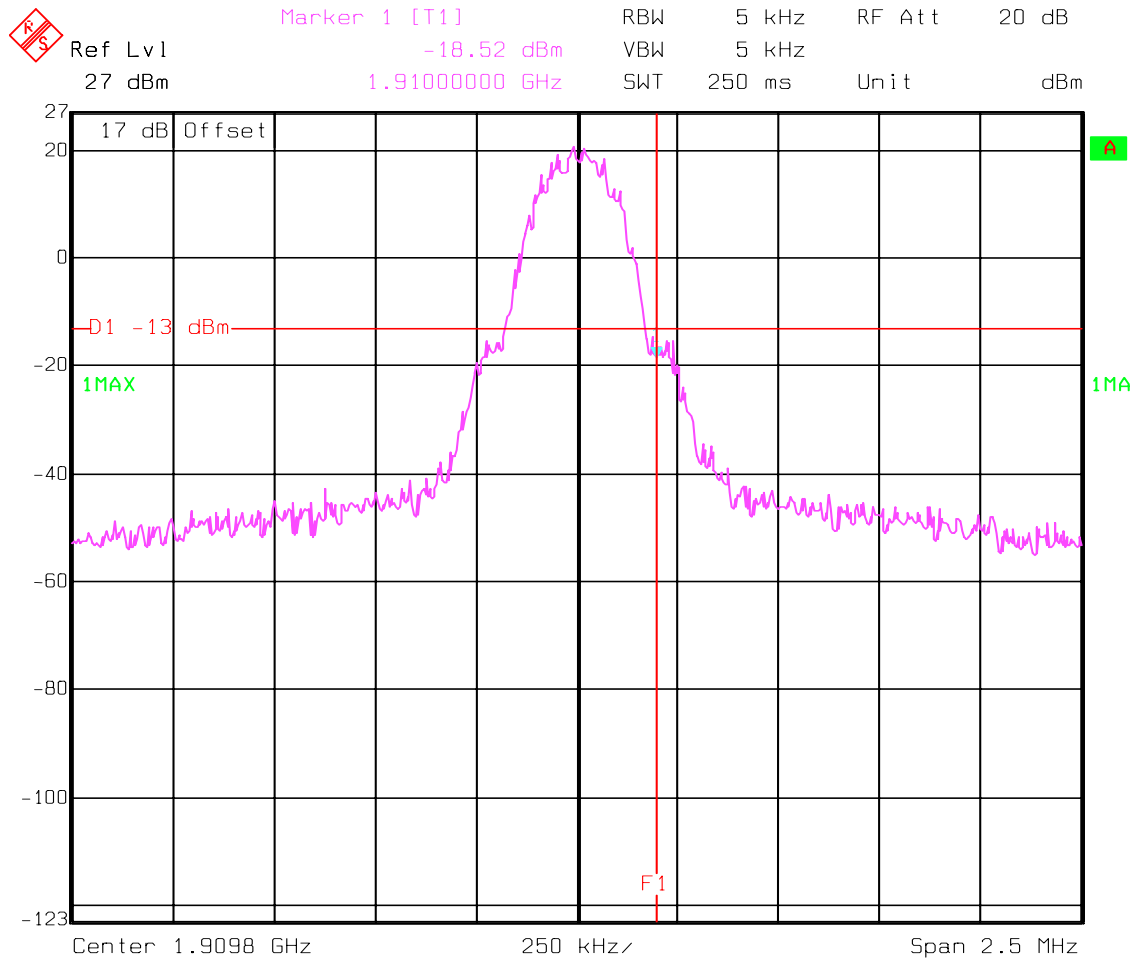

RECEIVER RADIATED EMISSIONS**SUBCLAUSE § 15.209**

NOTE: The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18GHz and 19.1GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § 15.209**


| Frequency (MHz) | Field strength (μV/m) | Measurement distance (m) |
|------------------------|---|---------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| above 960 | 500 | 3 |

RECEIVER RADIATED EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

SWEEP TABLE: "FCC 24 Spur 30M-1G"


| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 30MHz | 1GHz | Max Peak | Coupled | 100KHz |

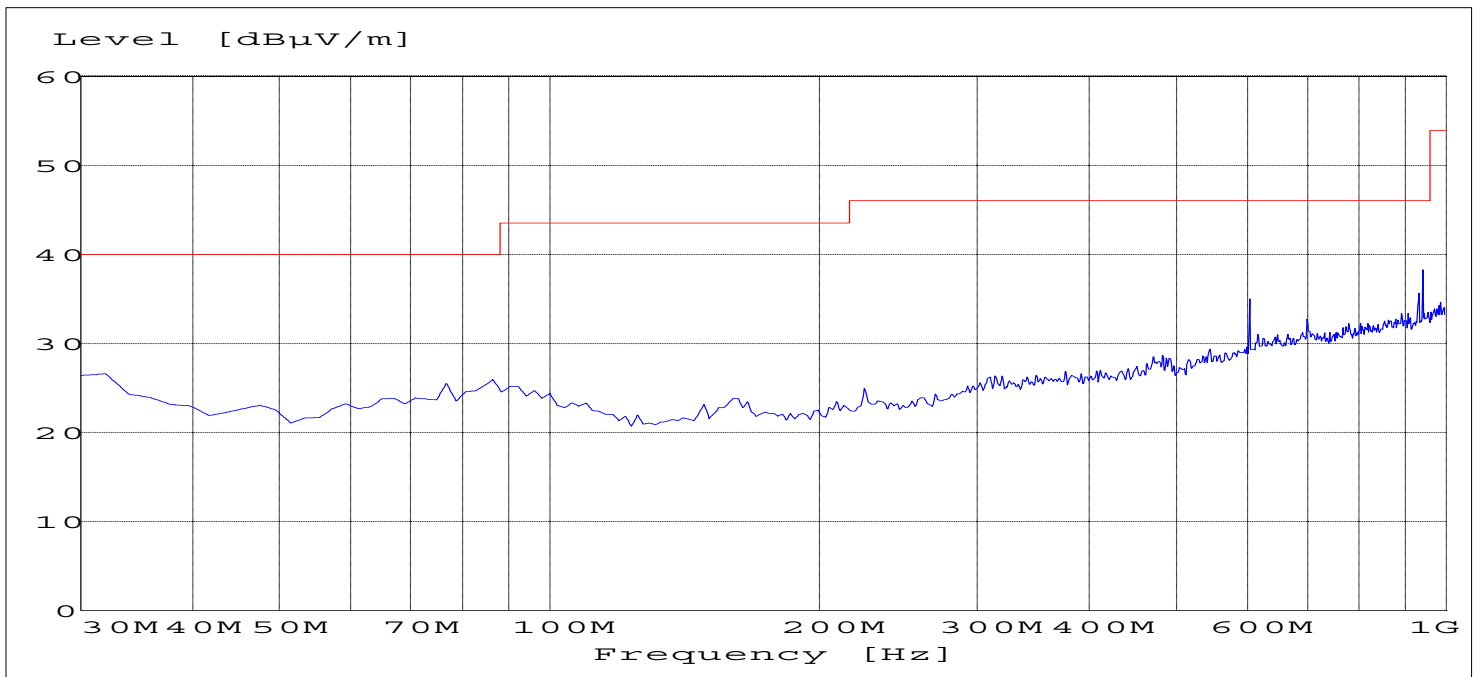

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 1GHz – 8GHz

SWEEP TABLE: "FCC Spuri 1-8G"


| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 1GHz | 8GHz | Max Peak | Coupled | 1 MHz |

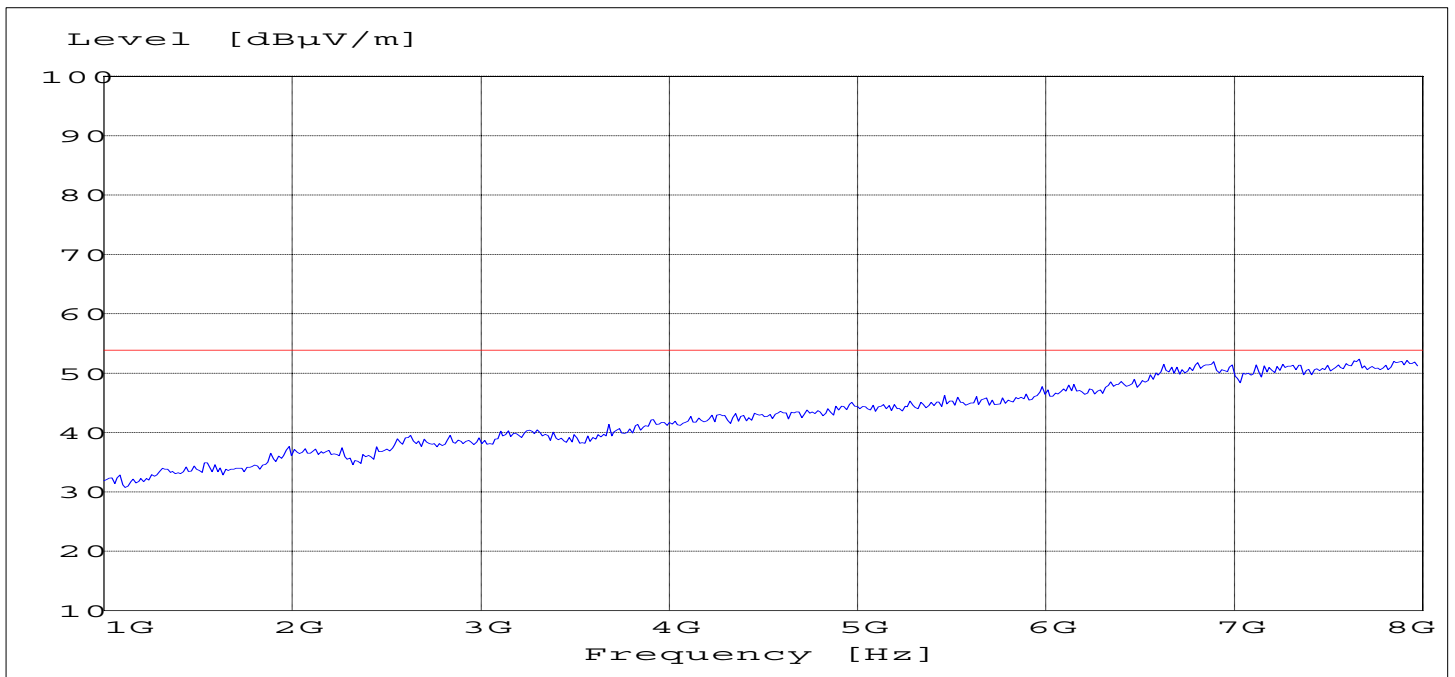

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 8GHz – 18GHz

SWEEP TABLE: "FCC 24 spuri 8-18G"


| <i>Start</i> | <i>Stop</i> | <i>Detector</i> | <i>Meas. Time</i> | <i>RBW/VBW</i> |
|--------------|-------------|-----------------|-------------------|----------------|
| 8GHz | 18GHz | Max Peak | Coupled | 1 MHz |

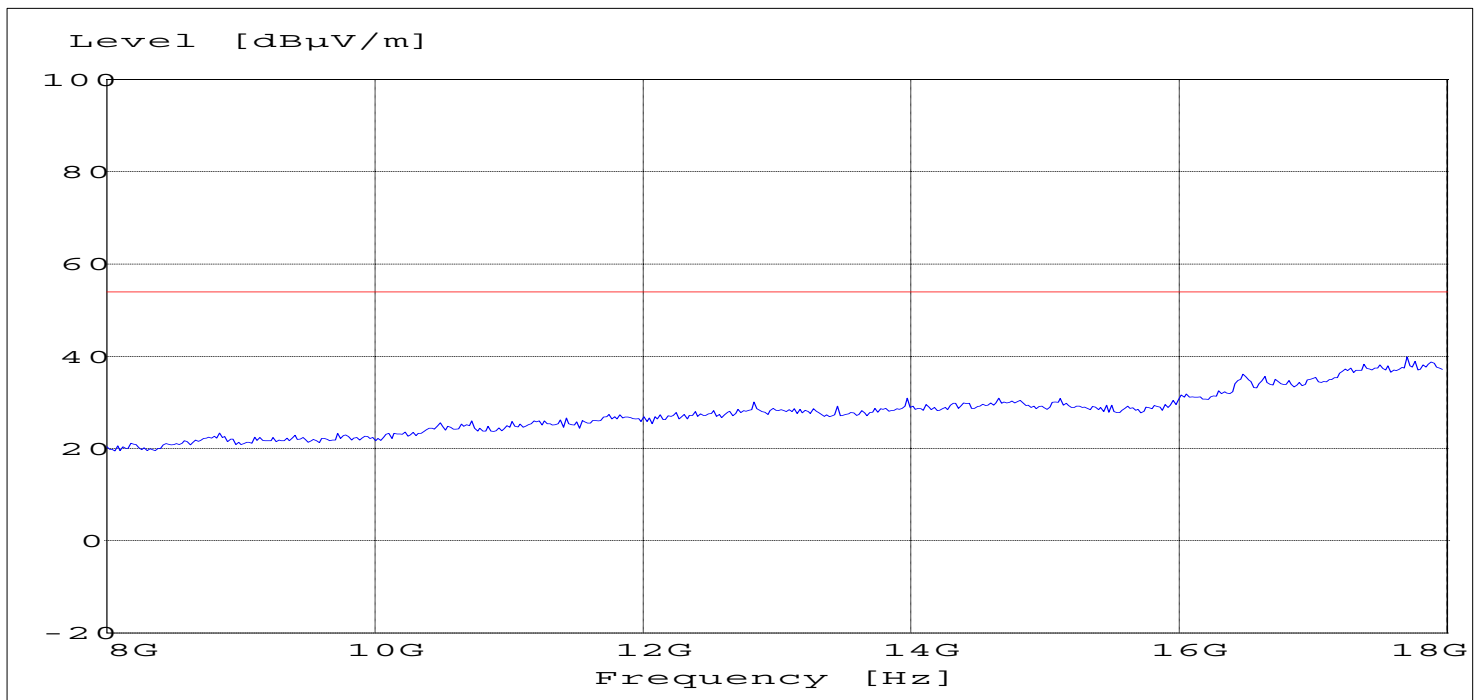

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 18GHz – 19.1GHz

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

| Start Frequency | Stop Frequency | Detector | Meas. Time | RBW/VBW |
|-----------------|----------------|----------|------------|---------|
| 18GHz | 19.1GHz | Max Peak | Coupled | 1 MHz |

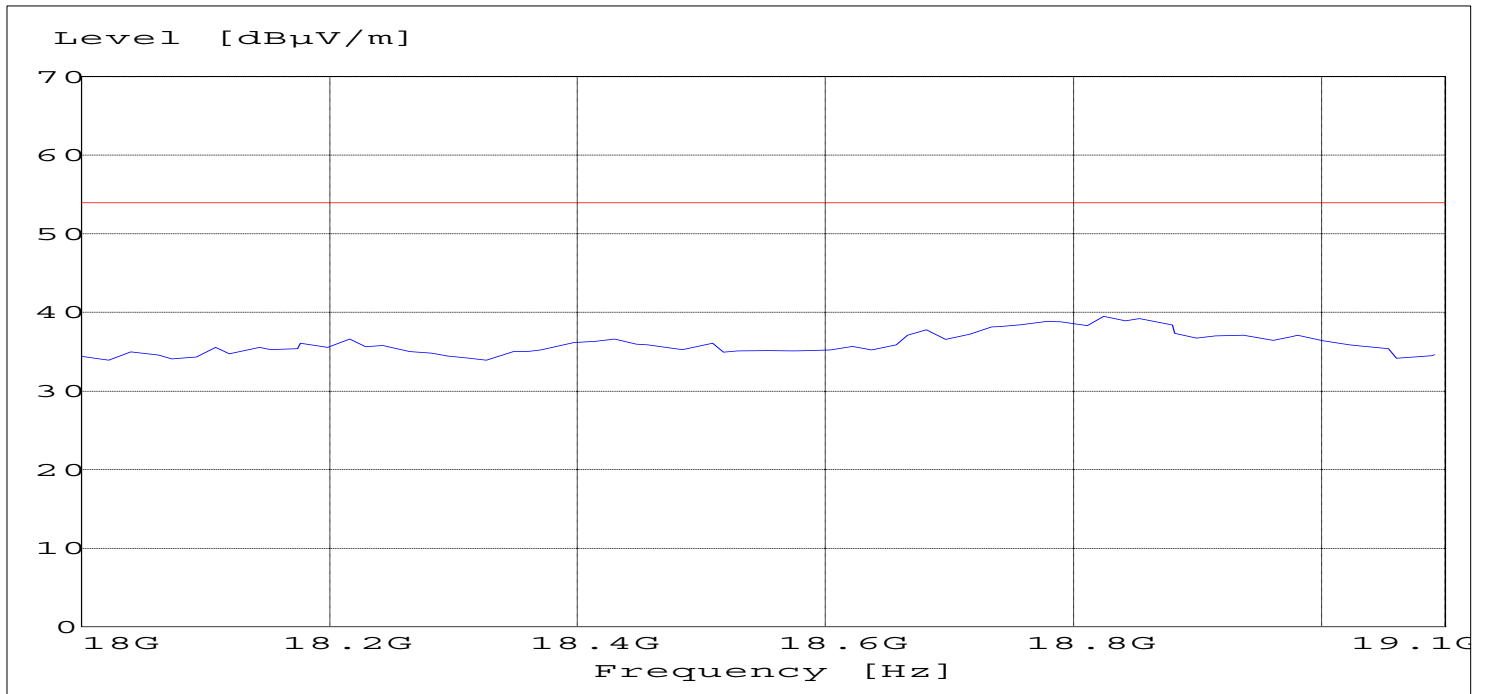

CONDUCTED SPURIOUS EMISSIONS

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

- 512 1850.2 MHz
- 661 1880.0 MHz
- 810 1909.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


| Harmonics | Tx ch-512 Freq. (MHz) | Level (dBm) | Tx ch-661 Freq. (MHz) | Level (dBm) | Tx ch-810 Freq. (MHz) | Level (dBm) |
|------------------|----------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|
| 2 | 3700.4 | -28.5 | 3760 | -28.1 | 3819.6 | -29.2 |
| 3 | 5550.6 | -26 | 5640 | -26.0 | 5729.4 | -27.0 |
| 4 | 7400.8 | -27.6 | 7520 | -27.8 | 7639.2 | -27.8 |
| 5 | 9251 | -28.0 | 9400 | -28.0 | 9549 | -28.1 |
| 6 | 11101.2 | -26.6 | 11280 | -25.9 | 11458.8 | -26.0 |
| 7 | 12951.4 | -27.1 | 13160 | -27.0 | 13368.6 | -26.9 |
| 8 | 14801.6 | -26.5 | 15040 | -26.4 | 15278.4 | -25.5 |
| 9 | 16651.8 | -24.5 | 16920 | -24.3 | 17188.2 | -24.0 |
| 10 | 18502 | -21.01 | 18800 | -21.90 | 19098 | -27.5 |

CONDUCTED SPURIOUS EMISSIONS

Channel 661:1GHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

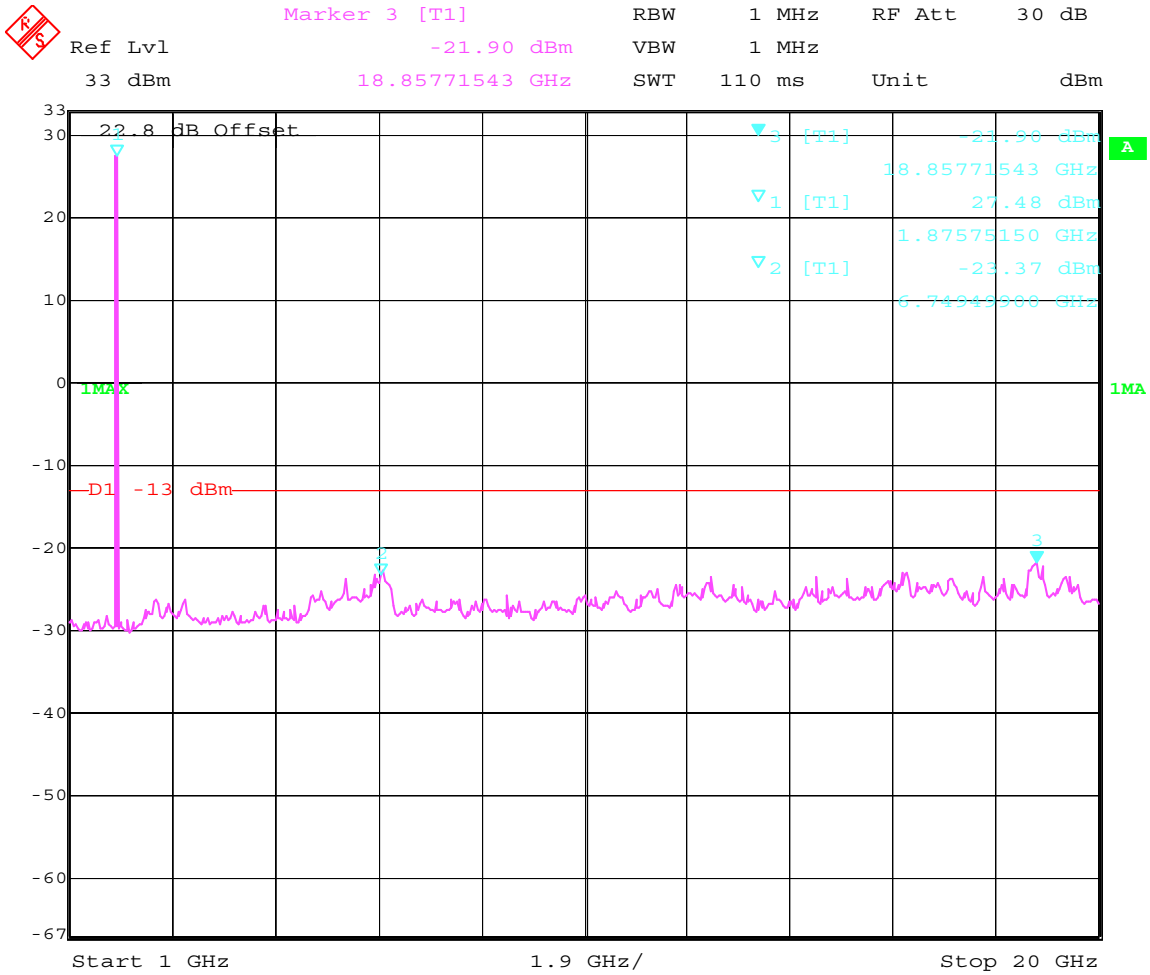


Date: 14.JAN.2002 15:13:27

CONDUCTED SPURIOUS EMISSIONS

Channel 810:1GHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

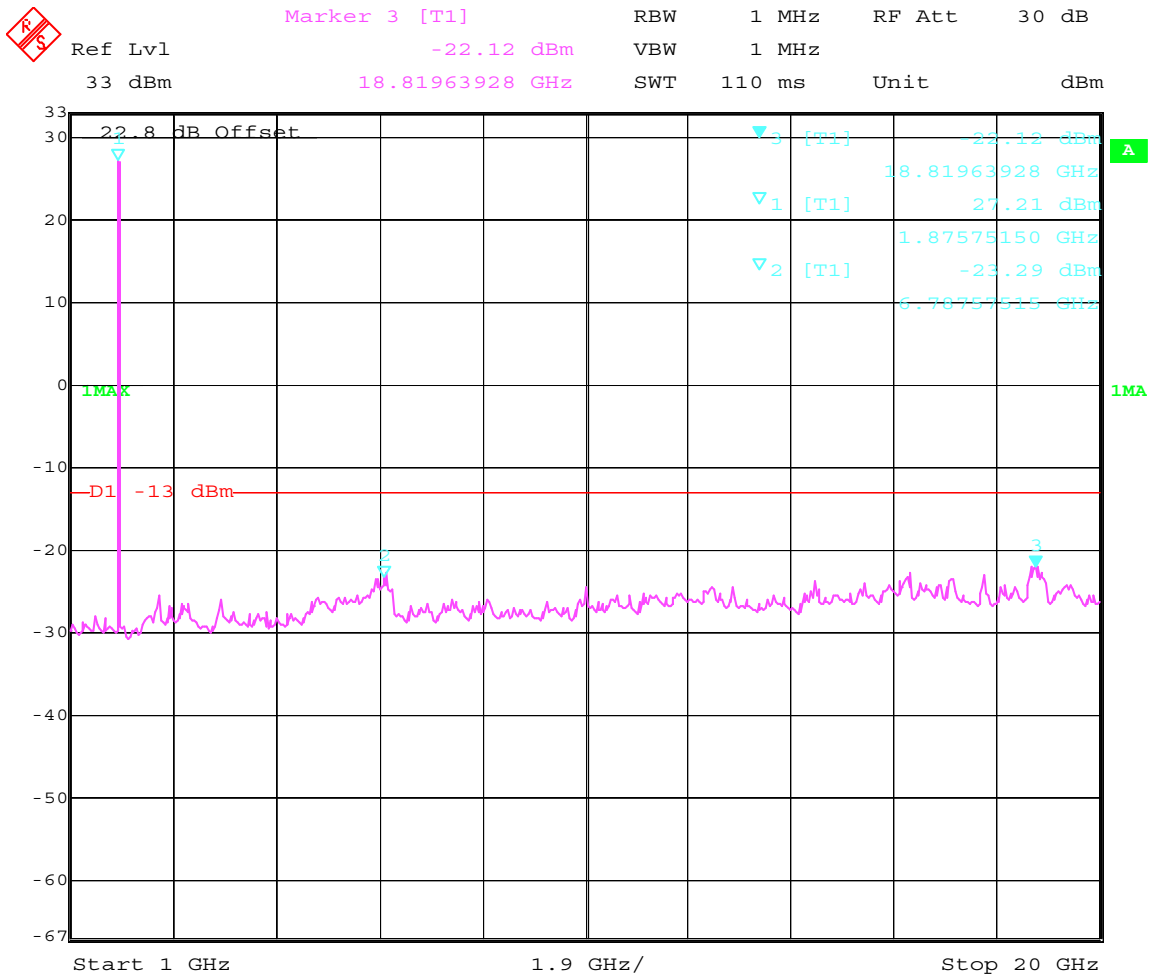


Date: 14.JAN.2002 15:17:35

CONDUCTED SPURIOUS EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz


Spurious emission limit -13dBm

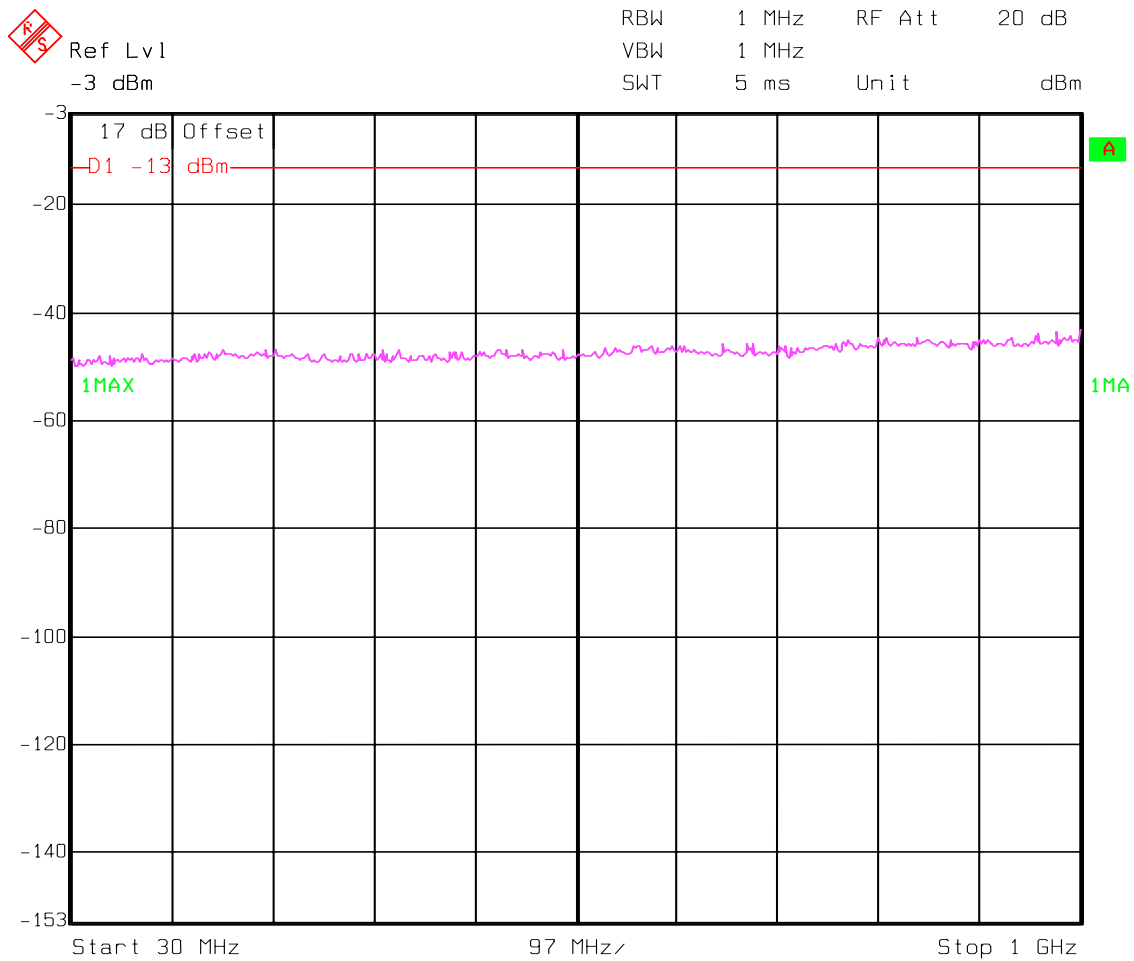

CONDUCTED SPURIOUS EMISSIONS

EUT in Idle Mode: 1GHz – 20GHz

Spurious emission limit –13dBm

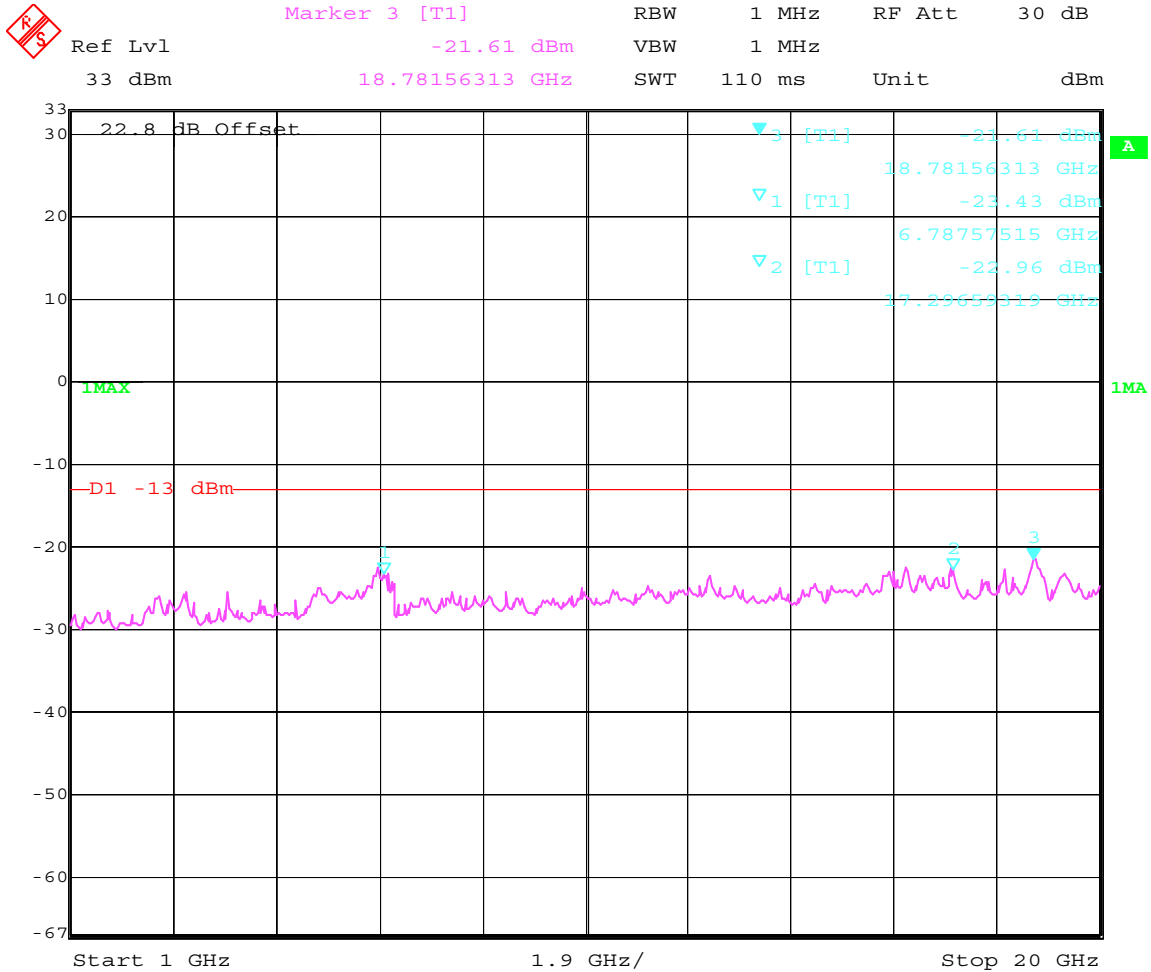


Date: 14.JAN.2002 15:21:24

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN

Phase: Line

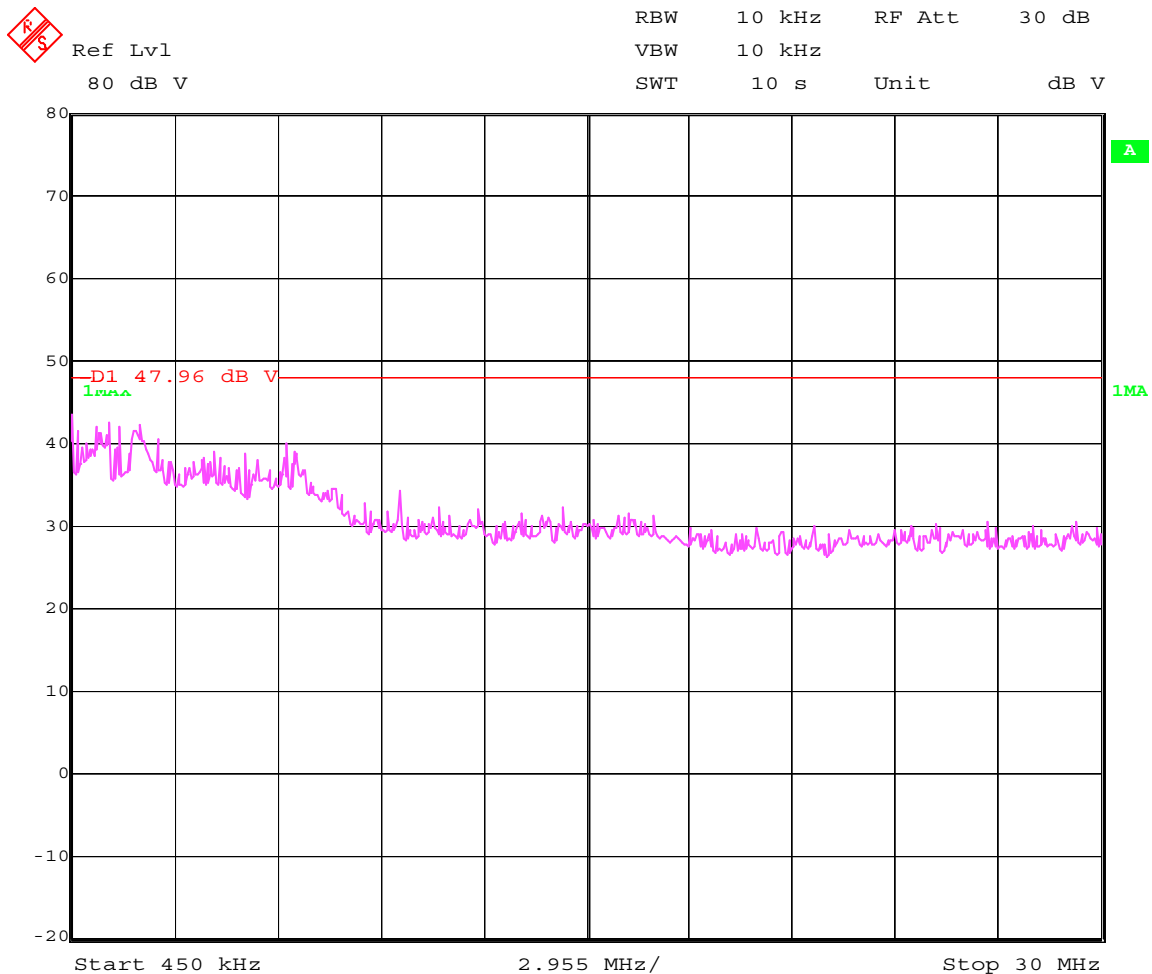

Date: 14.JAN.2002 16:27:28


Technical specification: 15.107 / 15.207 (Revised as of October 1, 1991)

Limit

| | |
|----------------|-------------------------------|
| 0.45 to 30 MHz | 250 μ V / 47.96dB μ V |
|----------------|-------------------------------|

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

Phase: Neutral

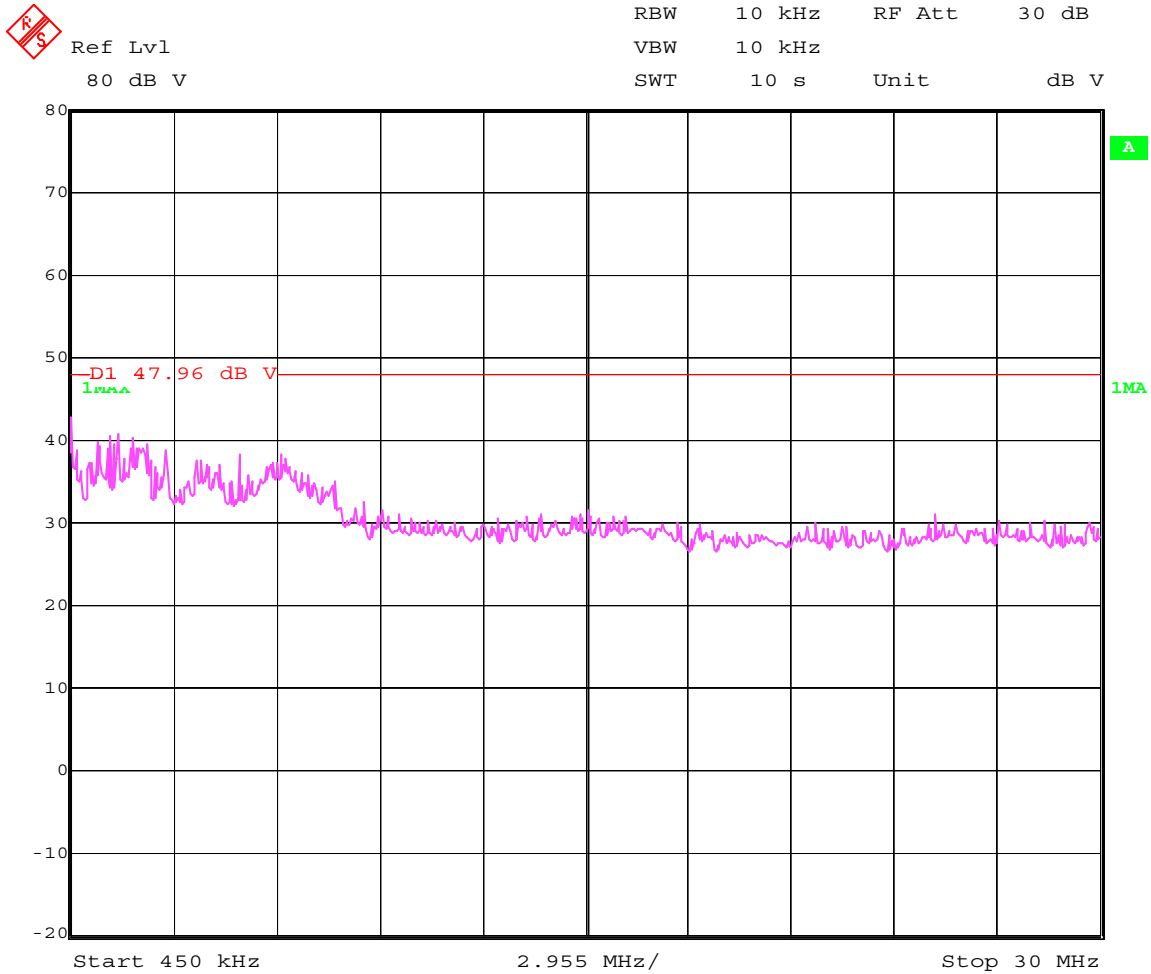

Date: 14.JAN.2002 16:28:17

Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991)


Limit

| | |
|----------------|--------------------------------|
| 0.45 to 30 MHz | 250 μ V / 47.96 dB μ V |
|----------------|--------------------------------|

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

BLOCK DIAGRAM – Conducted Measurements

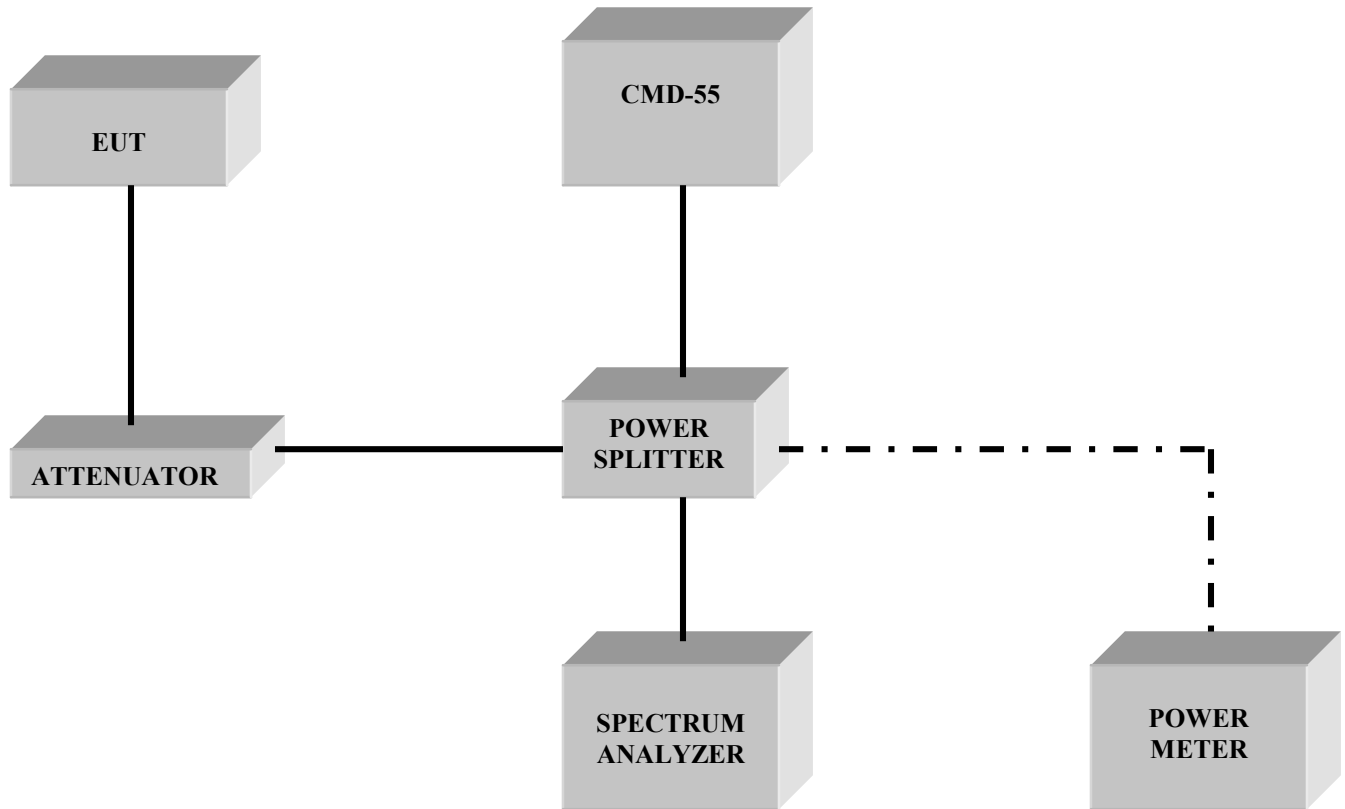

BLOCK DIAGRAM – Radiated Measurements

ANECHOIC CHAMBER

