

***Specific Absorption Rate (SAR) Test Report***

for  
**High Tech Computer Co.**  
on the  
**Pocket PC with Wireless Mobile Phone**  
**Model Number: HTC Wallaby PW20**  
**FCC ID: NM8SN**

Test Report: 30179772  
Date of Report: April 24, 2002  
Revised: June 20, 2002  
Revised: August 9, 2002



Job #: 3017977  
Date of Test: January 19, 2002

Total No of Pages Contained in this Report: 46



Warnock Hersey



Tested by: 	Suresh Kondapali
Reviewed by: 	David Chernomordik, Ph.D., EMC Technical Manager

Review Date: 8/9/02



All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc.



**Intertek Testing Services NA, Inc.**

1365 Adams Court, Menlo Park, CA 94025  
Telephone 650-463-2900 Fax 650-463-2910 Home Page [www.etlsemko.com](http://www.etlsemko.com)



**TABLE OF CONTENTS**

**STATEMENT OF COMPLIANCE..... 3**

**1.0 JOB DESCRIPTION..... 4**

1.1 Client Information .....4

1.2 Equipment under test (EUT).....4

1.3 Test Plan Reference .....5

1.4 System Test Configuration .....6

1.4.1 System Block Diagram & Support equipment.....6

1.4.2 Test Positions for Head.....7

1.4.3 Positioning Procedure.....8

1.4.4 Test Condition.....10

1.5 Modifications required for compliance.....10

1.6 Additions, deviations and exclusions from standards .....10

**2.0 SAR EVALUATION..... 11**

2.1 SAR Limits .....11

2.2 Configuration Photographs .....12

2.3 System Verification .....20

2.4 Evaluation Procedures.....20

2.5 Test Results.....21

**3.0 TEST EQUIPMENT..... 23**

3.1 Equipment List .....23

3.2 Brain Tissue Simulating Liquid .....25

3.3 E-Field Probe Calibration.....25

3.4 Measurement Uncertainty .....26

3.5 Measurement Tractability.....26

**4.0 WARNING LABEL INFORMATION - USA ..... 27**

**5.0 REFERENCES..... 28**

**5.0 DOCUMENT HISTORY..... 29**

**APPENDIX A - SAR Evaluation Data..... 30**

**APPENDIX B - E-Field Probe Calibration Data..... 38**

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

**STATEMENT OF COMPLIANCE**

The High Tech Computer Co. sample device, model # HTC Wallaby PW20, FCC ID: NM8SN was evaluated in accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01). Testing was performed at the Intertek Testing Services facility in Menlo Park, California.

For the evaluation, the dosimetric assessment system DASY3 was used. The phantom employed was the "Generic Twin Phantom". The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be ?23.5%.

The device was tested at their maximum output power declared by the High Tech Computer Co.

In summary, the maximum spatial peak SAR value for the Sample device averaged over 1g for left-hand and right-hand usage was found to be:

<b>Phantom</b>	<b>SAR<sub>1g</sub>, mW/g</b>
Left-hand Cheek Position	1.13 mW/g.

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for head configurations.

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

**1.0 JOB DESCRIPTION**

1.1 Client Information

The HTC Wallaby PW20 has been tested at the request of:

**Company:** High Tech Computer Co.  
 9F, 6-3, Ban-Chian RD., Hsin-Tien  
 Taipei, Taiwan  
 China

**Name of contact:** Mr. Andy Hsu  
**Telephone:** 886-2-89724138 Ext 8390  
**Fax:** 886-2-89124136

1.2 Equipment under test (EUT)

**Product Descriptions:**

<b>Equipment</b>	Dual Band Cell Phone		
Trade Name	Wallaby	P/N.	HTC Wallaby PW20
FCC ID	FCC ID: NM8SN	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band (uplink)	1850 – 1910 MHz	System	GSM

<b>EUT Antenna Description</b>			
Type	Monopole	Configuration	Fixed
Dimensions	12.5 mm	Gain	-2 dBi
Location	Right Side		

**Use of Product :** The PW20 is a wireless phone with data link for GPRS mode and support E-GSM mode for 900/1800.

**Manufacturer:** High Tech Computer Co.

**Production is planned:**  Yes,  No

**EUT receive date:** August 21, 2001

**EUT received sample:** Good working condition prototype. As declared by High Tech Computer Co. the device tested is identical to the production units.

**Test start date:** January 19, 2002

**Test end date:** January 19, 2002

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

1.3 Test Plan Reference

FCC Rule: Part 2.1093, FCC OET Bulletin 65, Supplement C (Edition 01-01)


High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

#### 1.4 System Test Configuration

##### 1.4.1 System Block Diagram & Support equipment

The diagram shown below details test configuration of the equipment under test.



No Support Equipment was used. The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the device is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The device was then placed in the SAR Measurement System with a fully charged battery.

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

### 1.4.2 Test Positions for Head

The HTC WALLABY PW20 was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in C95.1 (1992) and Supplement C of OET 65 (2001). The HTC WALLABY PW20 was placed against the head phantom in 2 test positions as detailed in Figures 1 and 2 below.

#### Test Configuration for SAR




Figure 1 – Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated.




Figure 2 – Phone position 2, “tilted” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated.

### 1.4.3 Positioning Procedure

The EUT was positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” is located at the same level as the center of the earpiece region. The “vertical centerline” is bisecting the front surface of the handset at its top and bottom edges (see Figure 3a and 3b).

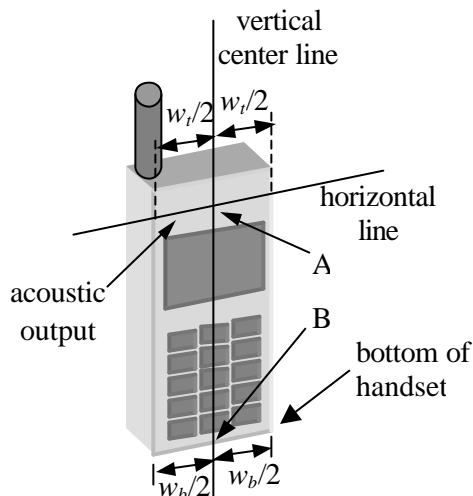

**Figure 3.a– Handset vertical and horizontal reference lines – fixed case**

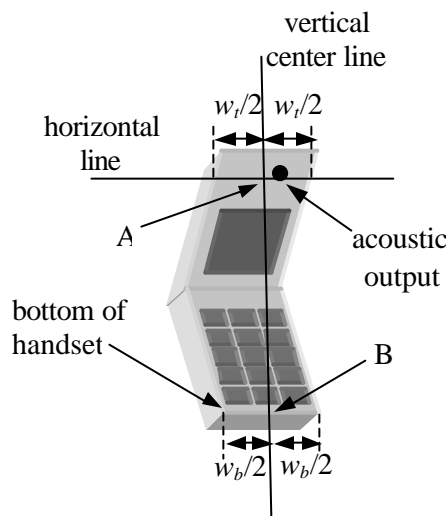

**Figure 3.b– Handset vertical and horizontal reference lines – “clam-shell”**

A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

The EUT is initially positioned with the earpiece region pressed against the ear spacer of a head phantom in “initial ear position”. The “test device reference point” was aligned to the “ear reference point” on the head phantom and the “vertical centerline” was aligned to the “phantom reference plane”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

1. “Cheek/Touch Position” – the device is brought toward the mouth of the head phantom by pivoting against the “ear reference point”. This test position is established:
  - i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
  - or*
  - ii) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.



High Tech Computer Co., Model No: HTC Wallaby PW20

Date of Test: January 19, 2002

**FCC ID: NM8SN**

2. “Ear/Tilt Position” – With the handset aligned in the “Cheek/Touch Position”:
  - i) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device is returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.  
*otherwise*
  - ii) The handset is moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the “test device reference point” by 15°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process is repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

## 1.4.4 Test Condition

During tests, the worst case data (max. RF coupling) was determined with following conditions:

<b>EUT Antenna</b>	<b>Fixed length</b>	<b>Orientation</b>	<b>Fixed length</b>
<b>Usage</b>	Right hand and Left hand	<b>Distance between antenna and the phantom surface:</b>	<u>Left Side:</u> 3.2 mm, tilt position 6.3 mm, check position
			<u>Right Side:</u> 11.5 mm, tilt position 14.8 mm, check position
<b>Simulating human Body/hand</b>	No	<b>EUT Battery</b>	Fully charged
<b>Conducted Peak Output Power</b>	<b>Frequency MHz</b>		<b>Output Power dBm</b>
	1850		29.2
	1880		29.2
	1910		29.2

The spatial peak SAR values were accessed for lowest, middle and highest operating channels defined by the manufacturer.

Antenna port power measurement was performed, with the HP 435A power meter, before and after the SAR tests to ensure that the HTC Wallaby PW20 operated at the highest power level.

## 1.5 Modifications required for compliance

No modifications were implemented by Intertek Testing Services.

## 1.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standard.

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

**2.0 SAR EVALUATION**

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

<b>EXPOSURE (General Population/Uncontrolled Exposure environment)</b>	<b>SAR (W/kg)</b>
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00


High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

2.2 Configuration Photographs

**SAR Measurement Test Setup**

**Left Cheek Position**

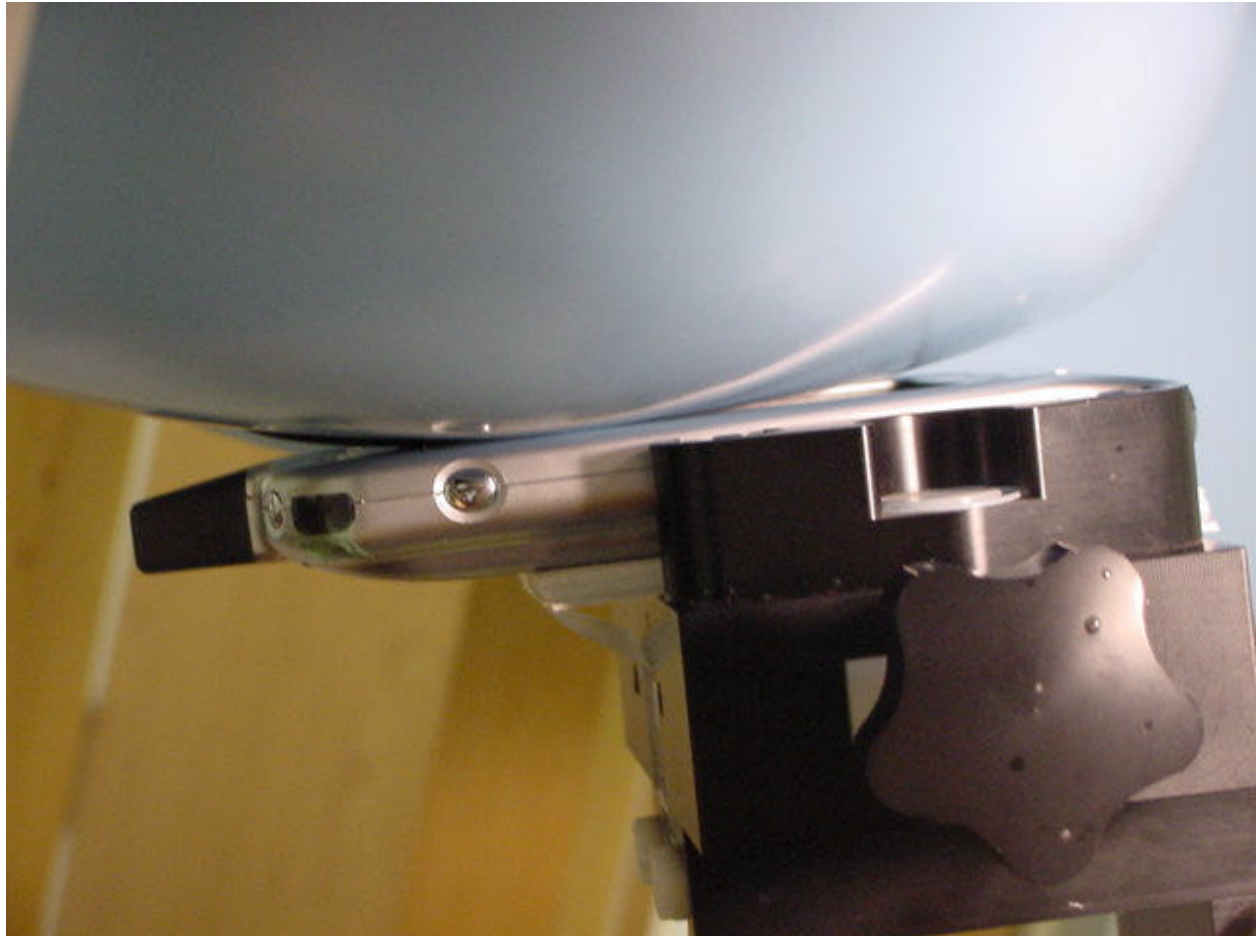


High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

2.2 Configuration Photographs (Continued)

**SAR Measurement Test Setup**

**Left Tilt Position**

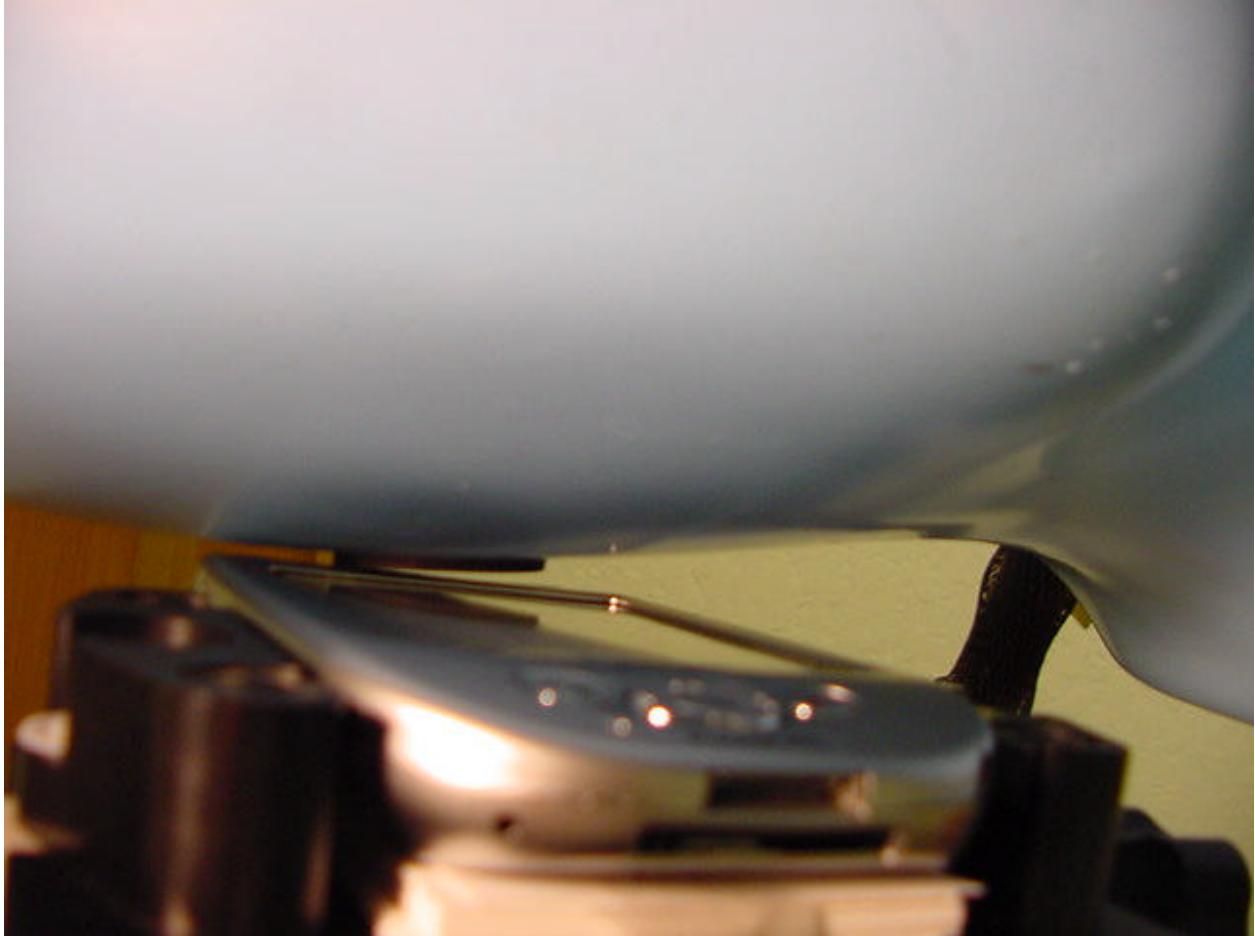


High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

2.2 Configuration Photographs (Continued)

**SAR Measurement Test Setup**

**Left Tilt Position**

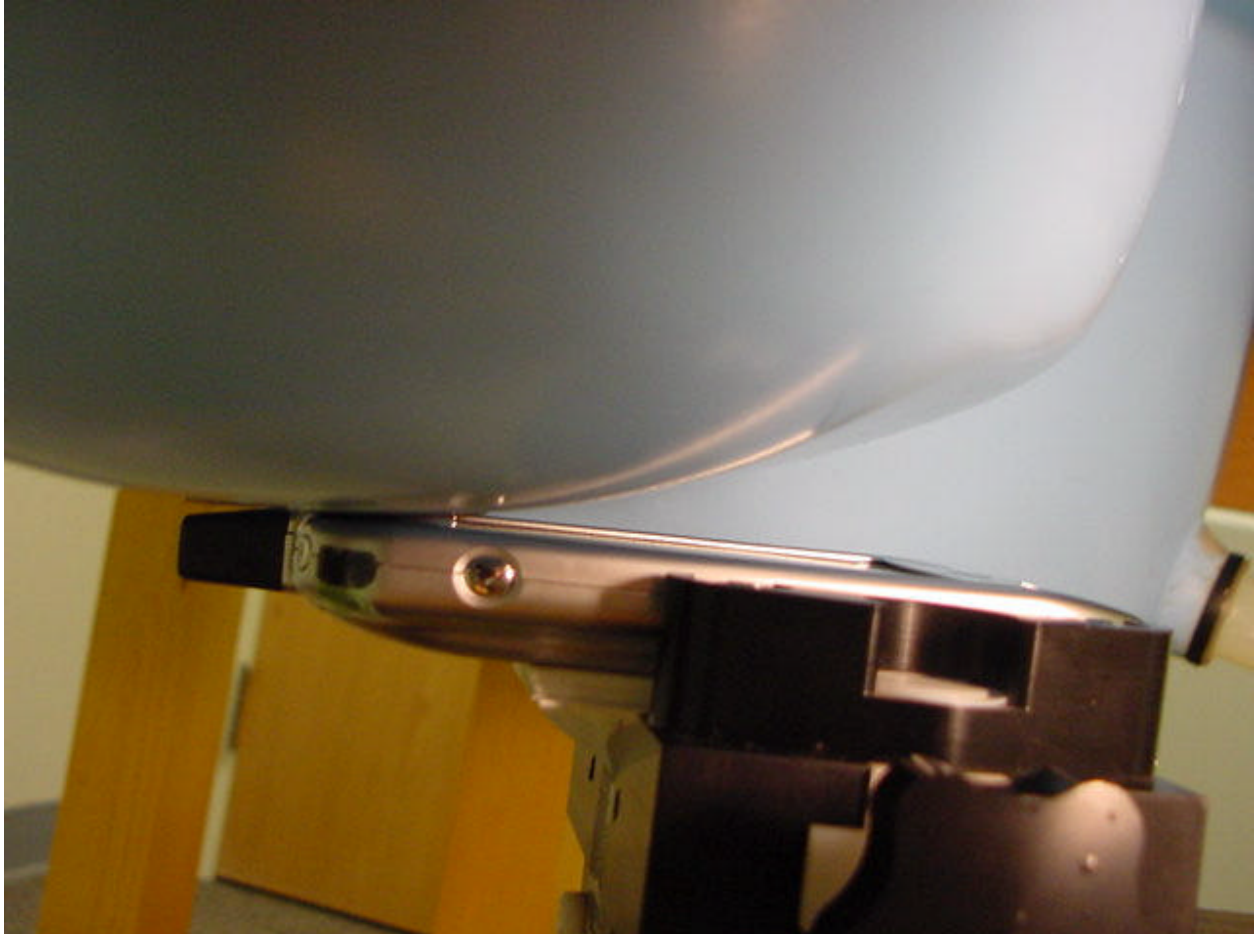

High Tech Computer Co., Model No: HTC Wallaby PW20  
**FCC ID: NM8SN**

Date of Test: January 19, 2002

2.2 Configuration Photographs (Continued)

**SAR Measurement Test Setup**

**Right Tilt Position**

