

TEST REPORT

Equipment Under Test	: Smart Phone
Model No.	: STAR100
FCC ID	: NM8STAR
Applicant	: High Tech Computer Corp.
Address of Applicant	: 23 Hsin Hua Rd, Taoyuan 330, Taiwan
Date of Receipt	: 2006.02.27
Date of Test(s)	: 2006.07.13-2006.07.19
Date of Issue	: 2006.07.19

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1 , C95.3, IEEE 1528**


In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

Tested by : LEO HSU  Date : 2006.07.19

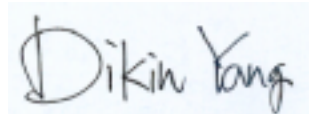Approved by : DIKIN YANG  Date : 2006.07.19

Contents

1. General Information	
1.1 Testing Laboratory.....	5
1.2 Details of Applicant.....	5
1.3 Description of EUT.....	5
1.4 Test Environment.....	6
1.5 Operation description.....	6
1.6 The SAR Measurement System.....	7
1.7 System Components.....	8
1.8 SAR System Verification.....	9
1.9 Tissue Simulant Fluid for the Frequency Band	11
1.10 Test Standards and Limits.....	11
2. Summary of Results	14
3. Instruments List	19
4. Measurement values	20
4.1 With thin Battery (Model: 160)	
GSM 850MHz	
4.1.1 Right-head, cheek, lowest channel.....	20
4.1.2 Right-head, cheek, middle channel.....	21
4.1.3 Right-head, cheek, highest channel.....	22
4.1.4 Left-head, cheek, lowest channel.....	23
4.1.5 Left-head, cheek, middle channel.....	24
4.1.6 Left-head, cheek, highest channel.....	25
4.1.7 Right-head, tilt 15°, lowest channel.....	26
4.1.8 Right-head, tilt 15°, middle channel.....	27
4.1.9 Right-head, tilt 15°, highest channel.....	28
4.1.10 Left-head, tilt 15°, lowest channel.....	29
4.1.11 Left-head, tilt 15°, middle channel.....	30
4.1.12 Left-head, tilt 15°, highest channel.....	31
EUT back to phantom	
4.1.13 Body (testing in GPRS Mode), lowest channel.....	32
4.1.14 Body (testing in GPRS Mode), middle channel.....	33
4.1.15 Body (testing in GPRS Mode), highest channel.....	34
4.1.16 Body (testing in EDGE Mode), lowest channel.....	35
4.1.17 Body (testing in EDGE Mode), middle channel.....	36
4.1.18 Body (testing in EDGE Mode), highest channel.....	37
EUT front to phantom	
4.1.19 Body (testing in GPRS Mode), lowest channel.....	38
4.1.20 Body (testing in GPRS Mode), middle channel.....	39
4.1.21 Body (testing in GPRS Mode), highest channel.....	40
4.1.22 Body (testing in EDGE Mode), lowest channel.....	41
4.1.23 Body (testing in EDGE Mode), middle channel.....	42

4.1.24 Body (testing in EDGE Mode), highest channel.....	43
--	----

PCS 1900MHz

4.1.19 Right-head, cheek, lowest channel.....	44
4.1.20 Right-head, cheek, middle channel.....	45
4.1.21 Right-head, cheek, highest channel.....	46
4.1.22 Left-head, cheek, lowest channel.....	47
4.1.23 Left-head, cheek, middle channel.....	48
4.1.24 Left-head, cheek, highest channel.....	49
4.1.25 Right-head, tilt 15°, lowest channel.....	50
4.1.26 Right-head, tilt 15°, middle channel.....	51
4.1.27 Right-head, tilt 15°, highest channel.....	52
4.1.28 Left-head, tilt 15°, lowest channel.....	53
4.1.29 Left-head, tilt 15°, middle channel.....	54
4.1.30 Left-head, tilt 15°, highest channel.....	55

EUT back to phantom

4.1.13 Body (testing in GPRS Mode), lowest channel.....	56
4.1.14 Body (testing in GPRS Mode), middle channel.....	57
4.1.15 Body (testing in GPRS Mode), highest channel.....	58
4.1.16 Body (testing in EDGE Mode), lowest channel.....	59
4.1.17 Body (testing in EDGE Mode), middle channel.....	60
4.1.18 Body (testing in EDGE Mode), highest channel.....	61

EUT front to phantom

4.1.19 Body (testing in GPRS Mode), lowest channel.....	62
4.1.20 Body (testing in GPRS Mode), middle channel.....	63
4.1.21 Body (testing in GPRS Mode), highest channel.....	64
4.1.22 Body (testing in EDGE Mode), lowest channel.....	65
4.1.23 Body (testing in EDGE Mode), middle channel.....	66
4.1.24 Body (testing in EDGE Mode), highest channel.....	67

4.2 With thick Battery (Model: 161)**GSM 850MHz**

4.2.1 Right-head, cheek, lowest channel.....	68
4.2.2 Right-head, cheek, middle channel.....	69
4.2.3 Right-head, cheek, highest channel.....	70
4.2.4 Left-head, cheek, lowest channel.....	71
4.2.5 Left-head, cheek, middle channel.....	72
4.2.6 Left-head, cheek, highest channel.....	73
4.2.7 Right-head, tilt 15°, lowest channel.....	74
4.2.8 Right-head, tilt 15°, middle channel.....	75
4.2.9 Right-head, tilt 15°, highest channel.....	76
4.2.10 Left-head, tilt 15°, lowest channel.....	77
4.2.11 Left-head, tilt 15°, middle channel.....	78
4.2.12 Left-head, tilt 15°, highest channel.....	79

EUT back to phantom

4.2.13 Body (testing in GPRS Mode), lowest channel.....	80
4.2.14 Body (testing in GPRS Mode), middle channel.....	81
4.2.15 Body (testing in GPRS Mode), highest channel.....	82
4.2.16 Body (testing in EDGE Mode), lowest channel.....	83
4.2.17 Body (testing in EDGE Mode), middle channel.....	84
4.2.18 Body (testing in EDGE Mode), highest channel.....	85

EUT front to phantom

4.2.13 Body (testing in GPRS Mode), lowest channel.....	86
4.2.14 Body (testing in GPRS Mode), middle channel.....	87
4.2.15 Body (testing in GPRS Mode), highest channel.....	88
4.2.16 Body (testing in EDGE Mode), lowest channel.....	89
4.2.17 Body (testing in EDGE Mode), middle channel.....	90
4.2.18 Body (testing in EDGE Mode), highest channel.....	91

PCS 1900MHz

4.2.19 Right-head, cheek, lowest channel.....	92
4.2.20 Right-head, cheek, middle channel.....	93
4.2.21 Right-head, cheek, highest channel.....	94
4.2.22 Left-head, cheek, lowest channel.....	95
4.2.23 Left-head, cheek, middle channel.....	96
4.2.24 Left-head, cheek, highest channel.....	97
4.2.25 Right-head, tilt 15°, lowest channel.....	98
4.2.26 Right-head, tilt 15°, middle channel.....	99
4.2.27 Right-head, tilt 15°, highest channel.....	100
4.2.28 Left-head, tilt 15°, lowest channel.....	101
4.2.29 Left-head, tilt 15°, middle channel.....	102
4.2.30 Left-head, tilt 15°, highest channel.....	103

EUT back to phantom

4.2.13 Body (testing in GPRS Mode), lowest channel.....	104
4.2.14 Body (testing in GPRS Mode), middle channel.....	105
4.2.15 Body (testing in GPRS Mode), highest channel.....	106
4.2.16 Body (testing in EDGE Mode), lowest channel.....	107
4.2.17 Body (testing in EDGE Mode), middle channel.....	108
4.2.18 Body (testing in EDGE Mode), highest channel.....	109

EUT front to phantom

4.2.13 Body (testing in GPRS Mode), lowest channel.....	110
4.2.14 Body (testing in GPRS Mode), middle channel.....	111
4.2.15 Body (testing in GPRS Mode), highest channel.....	112
4.2.16 Body (testing in EDGE Mode), lowest channel.....	113
4.2.17 Body (testing in EDGE Mode), middle channel.....	114
4.2.18 Body (testing in EDGE Mode), highest channel.....	115

System Verification

4.3.1 GSM 900MHz Head.....	116
4.3.2 GSM 900MHz Muscle.....	118
4.3.3 PCS 1900MHz Head.....	120
4.3.4 PCS 1900MHz Muscle.....	122

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd.
 1F, No. 134, Wukung Road, Wuku industrial zone
 Taipei county, Taiwan, R.O.C.
 Telephone : +886-2-2299-3279
 Fax : +886-2-2298-0488
 Internet : <http://www.sgs.com.tw>

1.2 Details of Applicant

Name : High Tech Computer Corp.
 Address : 23 Hsin Hua Rd, Taoyuan 330, Taiwan
 Country : Taiwan
 Telephone : 03-3753552
 Fax : 03-3753243
 Contact Person : Wawii Lin
 E-mail : Wawii_Lin@HTC.com.tw

1.3 Description of EUT(s)

EUT Name	Smart Phone	
IMEI	358167000038229	
FCC ID	NM8STAR	
Mode of Operation	Qual Band GSM/GPRS/EDGE Smart Phone	
Duty Cycle	GSM	GPRS/EDGE
	1/8	1/4
Modulation Mode	GSM/GPRS	EDGE
	GMSK	8PSK
Maximum RF Conducted Power	GSM 850	PCS 1900
	32.93 dbm	29.85 dbm
TX Frequency range	GSM 850	PCS 1900
	824.2-848.8 MHz	1850.2-1909.8MHz
Channel Number	GSM 850	PCS 1900

(ARFCN)	128-251	512-810
Battery Type	3.7V 750mAh Lithium-Ion Thin battery (Model:160)	
	3.7V 1100mAh Lithium-Ion thick battery (Model:161)	
Antenna Type	Internal	
Antenna Gain (Peak)	GSM850	PCS 1900
	-1.23 dbi	1.85 dbi
Exposure environment	Uncontrolled exposure	
HW Version	XD	
SW Version	413.1.05	
Max. SAR Measured (1 g)	0.825 W/kg (In Body worn with belt clip and EUT back to phantom, testing in GPRS mode GSM850 128 Channel, with thin battery mode:160)	

1.4 Test Environment

Ambient Temperature: 22.1° C

Tissue Simulating Liquid: 21.6° C

Relative Humidity: 62 %

1.5 Operation description

1. Since the EUT supports Bluetooth function, the Bluetooth transmitter has to keep always on and uses Bluetooth headset to speak in each channel to measure SAR values in the worst case condition for Head position in GSM mode with handset.
2. Testing SAR with dominant transmitter ON and co-located Bluetooth transmitter OFF by using the belt-clip and holster, and a headset connected to the EUT for Body position in both GPRS & EDGE modes.
3. The EUT is controlled by using a Universal Radio Communication Tester (R&S CMU 200), and the communication between the EUT and the tester is established by air link. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

During the SAR testing, the DASY4 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1759-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

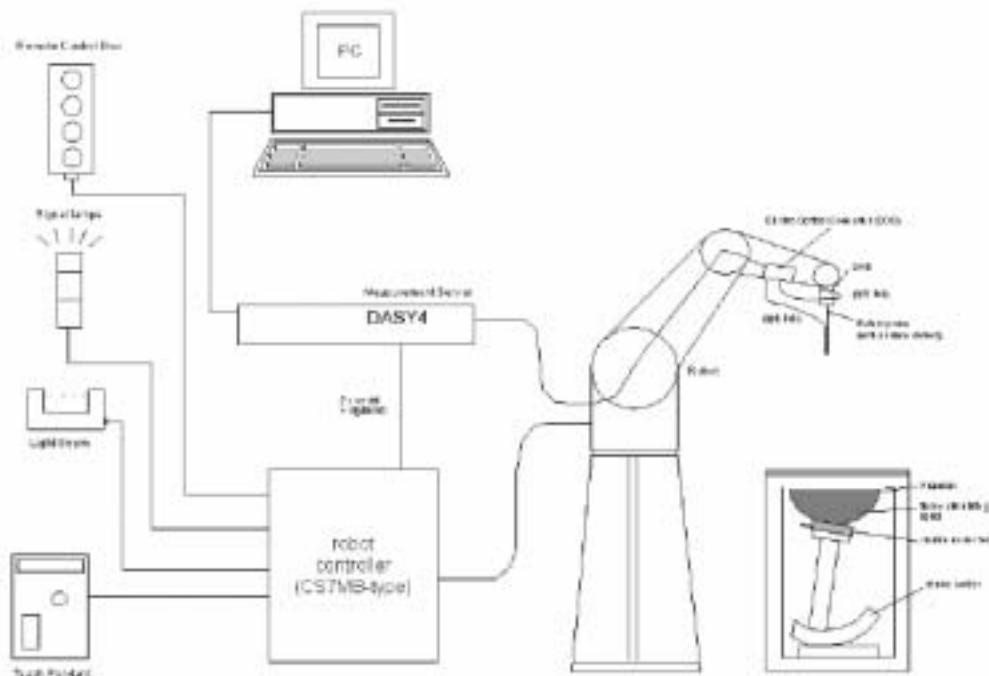


Fig. a The microwave circuit arrangement used for SAR system verification

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable

batteries. The signal is optically transmitted to the EOC.

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
 - A computer operating Windows 2000 or Windows XP.
 - DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
 - The SAM twin phantom enabling testing left-hand and right-hand usage.
 - The device holder for handheld mobile phones.
 - Tissue simulating liquid mixed according to the given recipes.
 - Validation dipole kits allowing to validate the proper functioning of the system.

1.7 System Components

ET3DV6 E-Field Probe

Construction: Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material
(resistant to organic solvents, e.g. glycol)


Calibration: In air from 10 MHz to 2.5 GHz
In brain simulating tissue at
frequencies of 850&1900 MHz
(accuracy $\pm 8\%$)

Frequency: 10 MHz to >6 GHz; Linearity: ± 0.2 dB
(30 MHz to 3 GHz)

Directivity: ± 0.2 dB in brain tissue (rotation around probe axis)
 ± 0.4 dB in brain tissue (rotation normal to probe axis)

Dynamic Range: 5 μ W/g to >100 mW/g; Linearity: ± 0.2 dB

Surface. Detect: ± 0.2 mm repeatability in air and clear liquids over
diffuse reflecting surfaces

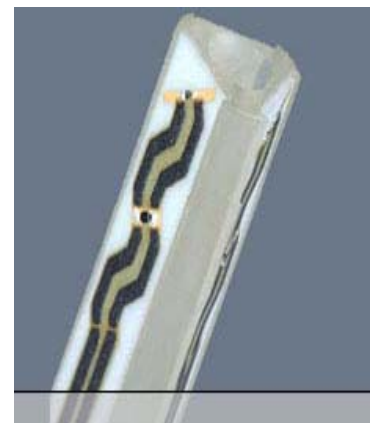

ET3DV6 E-Field Probe

Dimensions: Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm
Tip diameter: 6.8 mm;
Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone

SAM PHANTOM V4.0C

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209.

It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at

the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



Shell Thick: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 251 mm; Length: 1000 mm; Width: 500 mm

DEVICE HOLDER

Construction

In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 850&1900 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22.1°C, the relative humidity was in the range 62% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.


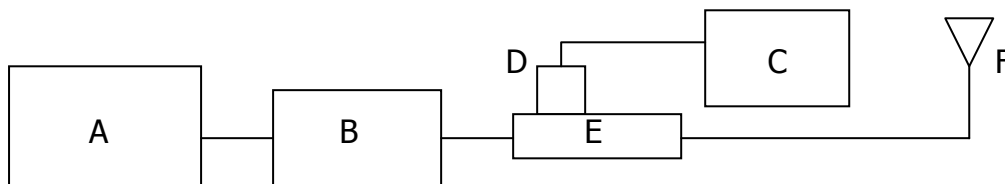


Fig.b The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. Agilent Model 778D and 777D
Dual directional coupling
- F. Reference dipole antenna

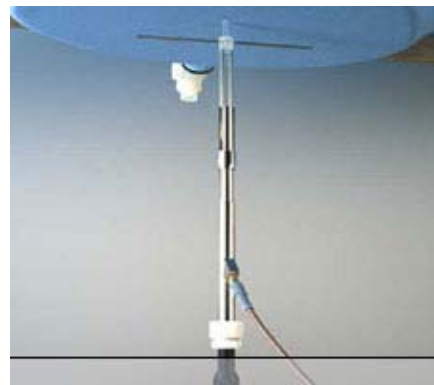

Photograph of the dipole Antenna

Validation Kit	Frequency	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured date
DT3DV6 S/N :1759	900 MHz (Head)	2.7 m W/g	1.74 m W/g	2.8 m W/g	1.81 m W/g	2006/07/13
		2.7 m W/g	1.74 m W/g	2.78m W/g	1.8 m W/g	2006/07/15
	900 MHz (Body)	2.78 m W/g	1.81 m W/g	2.51 m W/g	1.63 m W/g	2006/07/17
		2.78 m W/g	1.81 m W/g	2.52 m W/g	1.61 m W/g	2006/07/18
	1900 MHz (Head)	9.64 m W/g	5.07 m W/g	9.73 m W/g	5.09 m W/g	2006/07/14
		9.64 m W/g	5.07 m W/g	9.63 m W/g	5.04 m W/g	2006/07/16
1900 MHz (Body)	9.92 m W/g	5.28 m W/g	10.1 m W/g	5.25 m W/g	2006/07/18	

Table 1. Results system validation

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8714ET Network Analyzer (30 KHz-3000 MHz) by using a procedure detailed in Section V.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurement. The depth of the tissue simulant in the ear reference point of the phantom was 15cm±5mm during all tests. (Fig .2)

F (Mhz)	Tissue type	Limits/ Measured	Dielectric Parameters		
			ρ	σ (S/m)	Simulated Tissue Temp(° C)
850	Head	Measured, 2006.07.13	41.9	0.85	21.6
		Measured, 2006.07.15	42.2	0.87	21.7
		Recommended Limits	39.4-43.6	0.86-1.02	20-24
	Body	Measured, 2006.07.17	53	0.979	21.6
		Measured, 2006.07.18	53.2	0.994	21.6
		Recommended Limits	52.3-58	0.92-1.1	20-24
1900	Head	Measured, 2006.07.14	39.2	1.38	21.6
		Measured, 2006.07.16	39.5	1.43	21.6
		Recommended Limits	38-42	1.305-1.595	20-24
	Body	Measured, 2006.07.14	53.2	1.55	22.0
		Recommended Limits	50.6-56	1.44-1.6	20-24

Table 2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the brain tissue simulating liquid for 900 & 1900 MHz is:

Ingredient	900Mhz(Head)	900Mhz(Body)	1900Mhz(Head)	1900Mhz(Body)
DGMBE	X	X	444.52 g	300.67
Water	532.98 g	632.68	552.42 g	716.56
Sale	18.3 g	11.72	3.06 g	4.0
Preventol D-7	2.4 g	1.2	X	X
Cellulose	3.2 g	X	X	X
Sugar	766.0 g	600 g	X	X
Total amount	1 L (1.0kg)	1 L (1.0kg)	1 L (1.0kg)	1 L (1.0kg)

Table 3. Recipes for tissue simulating liquid

1.10 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their

exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

2.Summary of Results

GSM 850 MHZ-With Thin Battery (Model:160)

Right Head (Cheek Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.422/0.302	22	21.6
	190	836.6	32.86dbm	0.431/0.309	22	21.6
	251	848.8	32.93dbm	0.479/0.355	22	21.6
Left Head (Cheek Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.417/0.298	22	21.6
	190	836.6	32.86dbm	0.390/0.279	22	21.6
	251	848.8	32.93dbm	0.435/0.314	22	21.6
Right Head (15° Tilt Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.274/0.212	22	21.6
	190	836.6	32.86dbm	0.257/0.197	22	21.6
	251	848.8	32.93dbm	0.284/0.217	22	21.6
Left Head (15° Tilt Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.287/0.212	22	21.6
	190	836.6	32.86dbm	0.249/0.192	22	21.6
	251	848.8	32.93dbm	0.274/0.210	22	21.6
Body Worn-EUT back to phantom (Testing in GPRS MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.825/0.586	22	21.6
	190	836.6	32.86dbm	0.803/0.569	22	21.6
	251	848.8	32.93dbm	0.758/0.534	22	21.6
Body Worn-EUT back to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	26.91dbm	0.501/0.355	22	21.6
	190	836.6	26.95dbm	0.540/0.380	22	21.6
	251	848.8	26.97dbm	0.535/0.377	22	21.6
Body Worn-EUT front to phantom (Testing in GPRS MODE)						

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.388/0.272	22	21.6
	190	836.6	32.86dbm	0.366/0.259	22	21.6
	251	848.8	32.93dbm	0.317/0.220	22	21.6
Body Worn-EUT front to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	26.91dbm	0.206/0.143	22	21.6
	190	836.6	26.95dbm	0.231/0.160	22	21.6
	251	848.8	26.97dbm	0.230/0.159	22	21.6

GSM 1900 MHZ-With Thin Battery (Model:160)

Right Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.396/0.241	22.1	21.6
	661	1880	29.66dbm	0.345/0.208	22.1	21.6
	810	1909.8	29.85dbm	0.442/0.267	22.1	21.6

Left Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.18/0.12	22	21.6
	661	1880	29.66dbm	0.183/0.119	22	21.6
	810	1909.8	29.85dbm	0.237/0.149	22	21.6

Right Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.090/0.059	22	21.6
	661	1880	29.66dbm	0.076/0.049	22	21.6
	810	1909.8	29.85dbm	0.095/0.061	22	21.6

Left Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.112/0.070	22	21.6
	661	1880	29.66dbm	0.093/0.058	22	21.6
	810	1909.8	29.85dbm	0.096/0.060	22	21.6

Body Worn-EUT back to phantom (Testing in GPRS MODE)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.205/0.121	22	21.6

	661	1880	29.66dbm	0.182/0.108	22	21.6
	810	1909.8	29.85dbm	0.131/0.077	22	21.6
Body Worn-EUT back to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	25.2dbm	0.079/0.046	22	21.6
	661	1880	25.47dbm	0.074/0.044	22	21.6
	810	1909.8	25.5dbm	0.055/0.032	22	21.6
Body Worn-EUT front to phantom (Testing in GPRS MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.086/0.053	22	21.6
	661	1880	29.66dbm	0.083/0.052	22	21.6
	810	1909.8	29.85dbm	0.066/0.04	22	21.6
Body Worn-EUT front to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	128	824.2	25.2dbm	0.034/0.021	22	21.6
	190	836.6	25.47dbm	0.038/0.023	22	21.6
	251	848.8	25.5dbm	0.038/0.023	22	21.6

GSM 850 MHZ-With Thick Battery (Model:161)

Right Head (Cheek Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.532/0.380	22.1	21.6
	190	836.6	32.86dbm	0.506/0.363	22.1	21.6
	251	848.8	32.93dbm	0.586/0.412	22.1	21.6
Left Head (Cheek Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.475/0.352	22.1	21.6
	190	836.6	32.86dbm	0.438/0.323	22.1	21.6
	251	848.8	32.93dbm	0.501/0.368	22.1	21.6
Right Head (15° Tilt Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.291/0.220	22.1	21.6
	190	836.6	32.86dbm	0.260/0.196	22.1	21.6
	251	848.8	32.93dbm	0.283/0.213	22.1	21.6
Left Head (15° Tilt Position)						

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.261/0.201	22.1	21.6
	190	836.6	32.86dbm	0.228/0.174	22.1	21.6
	251	848.8	32.93dbm	0.249/0.189	22.1	21.6

Body Worn-EUT back to phantom (Testing in GPRS Mode)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.795/0.568	22.1	21.6
	190	836.6	32.86dbm	0.782/0.555	22.1	21.6
	251	848.8	32.93dbm	0.732/0.520	22.1	21.6

Body Worn-EUT back to phantom (Testing in EDGE Mode)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	26.91dbm	0.567/0.402	22.1	21.6
	190	836.6	26.95dbm	0.569/0.403	22.1	21.6
	251	848.8	26.97dbm	0.571/0.403	22.1	21.6

Body Worn-EUT front to phantom (Testing in GPRS Mode)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.72dbm	0.296/0.209	22.1	21.6
	190	836.6	32.86dbm	0.305/0.212	22.1	21.6
	251	848.8	32.93dbm	0.286/0.198	22.1	21.6

Body Worn-EUT front to phantom (Testing in EDGE Mode)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	26.91dbm	0.176/0.121	22.1	21.6
	190	836.6	26.95dbm	0.191/0.131	22.1	21.6
	251	848.8	26.97dbm	0.259/0.18	22.1	21.6

GSM 1900 MHZ-With Thick Battery (Model:161)

Right Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.247/0.156	22.1	21.6
	661	1880	29.66dbm	0.221/0.137	22.1	21.6
	810	1909.8	29.85dbm	0.283/0.175	22.1	21.6

Left Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.170/0.114	22	21.6

	661	1880	29.66dbm	0.140/0.092	22	21.6
	810	1909.8	29.85dbm	0.173/0.112	22	21.6
Right Head (15° Tilt Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.090/0.059	22	21.6
	661	1880	29.66dbm	0.071/0.046	22	21.6
	810	1909.8	29.85dbm	0.086/0.056	22	21.6
Left Head (15° Tilt Position)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.119/0.075	22	21.6
	661	1880	29.66dbm	0.098/0.061	22	21.6
	810	1909.8	29.85dbm	0.121/0.074	22	21.6
Body Worn-EUT back to phantom (Testing in GPRS MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.158/0.098	22	21.6
	661	1880	29.66dbm	0.136/0.084	22	21.6
	810	1909.8	29.85dbm	0.098/0.060	22	21.6
Body Worn-EUT back to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	25.2dbm	0.061/0.037	22	21.6
	661	1880	25.47dbm	0.055/0.034	22	21.6
	810	1909.8	25.5dbm	0.042/0.025	22	21.6
Body Worn-EUT front to phantom (Testing in GPRS MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.52dbm	0.093/0.058	22	21.6
	661	1880	29.66dbm	0.097/0.060	22	21.6
	810	1909.8	29.85dbm	0.084/0.052	22	21.6
Body Worn-EUT front to phantom (Testing in EDGE MODE)						
Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	128	824.2	25.2dbm	0.039/0.024	22	21.6
	190	836.6	25.47dbm	0.043/0.026	22	21.6
	251	848.8	25.5dbm	0.035/0.021	22	21.6

3. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1759	Aug.30.2005
Schmid & Partner Engineering AG	900/1800 MHz System Validation Dipole	D900V2 D1900V2	178 5d027	Feb.07.2006 Feb.22.2006
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE3	547	Feb.14.2006
Schmid & Partner Engineering AG	Software	DASY 4 V4.6 Build 23	N/A	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration isn't necessary
Agilent	Network Analyzer	8714ET	US41442815	Oct.31.2005
Agilent	Dielectric Probe Kit	85070D	US01440168	Calibration isn't necessary
Agilent	Dual-directional coupler	777D 778D	50114 50313	Aug.12.2005 Aug12.2005
Agilent	RF Signal Generator	8648D	3847M00432	May.04.2006
Agilent	Power Sensor	8481H	MY41091361	May.27.2006
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	102189	Oct.24.2005

4. Measurements

RightCheek128 -With thin Battery (Model: 160)

Date/Time: 2006/7/15 16:41:37

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.864$ mho/m;

$\epsilon = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.452 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.37 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

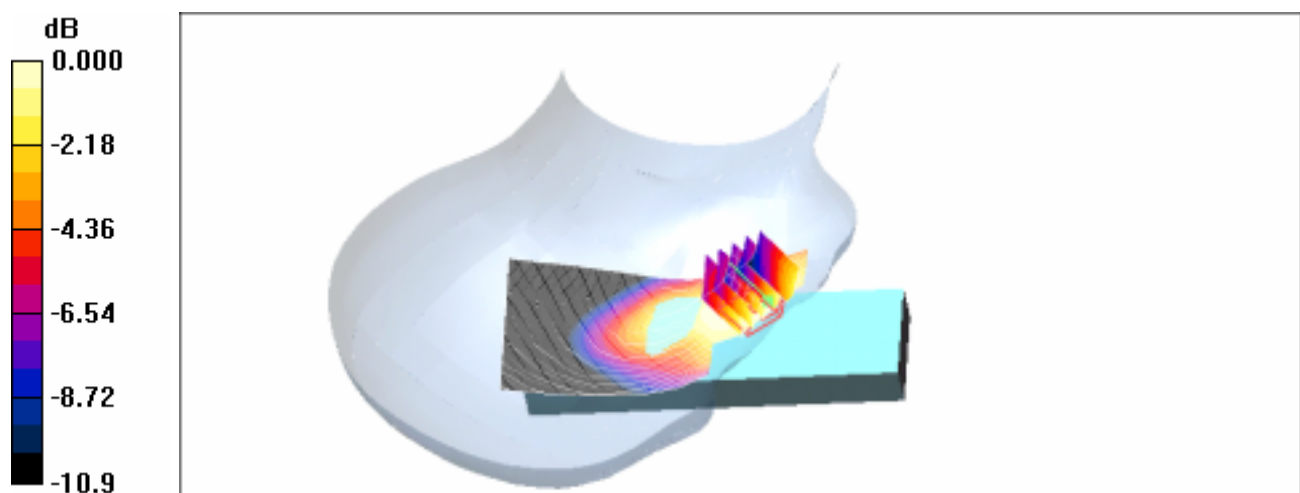

RightCheek190-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\mu = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.455 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.50 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

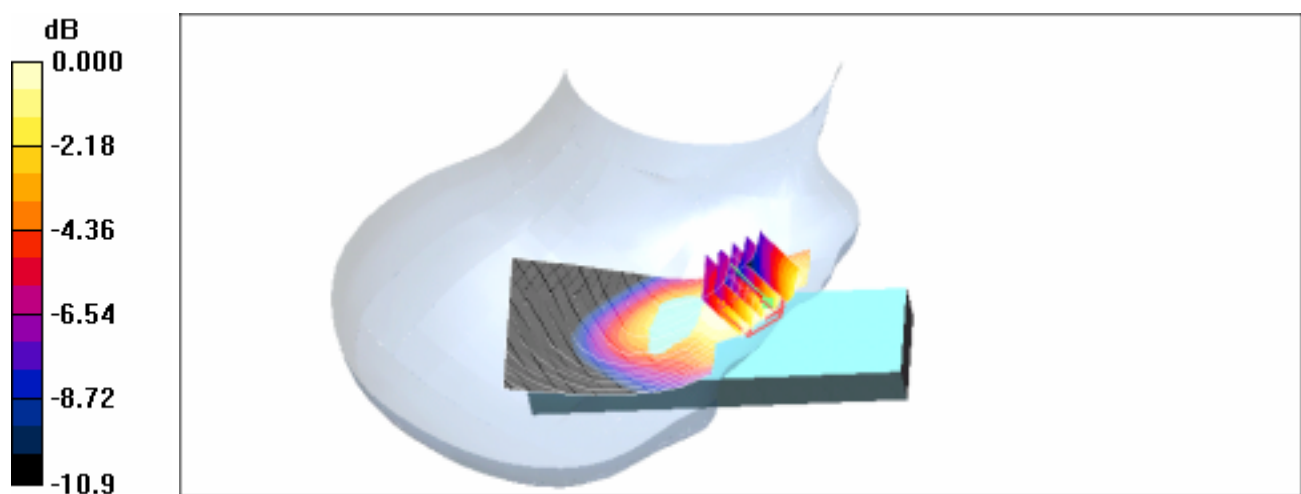

0 dB = 0.462mW/g

RightCheek251-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\mu = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.686 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.07 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.458 mW/g

Maximum value of SAR (measured) = 0.652 mW/g

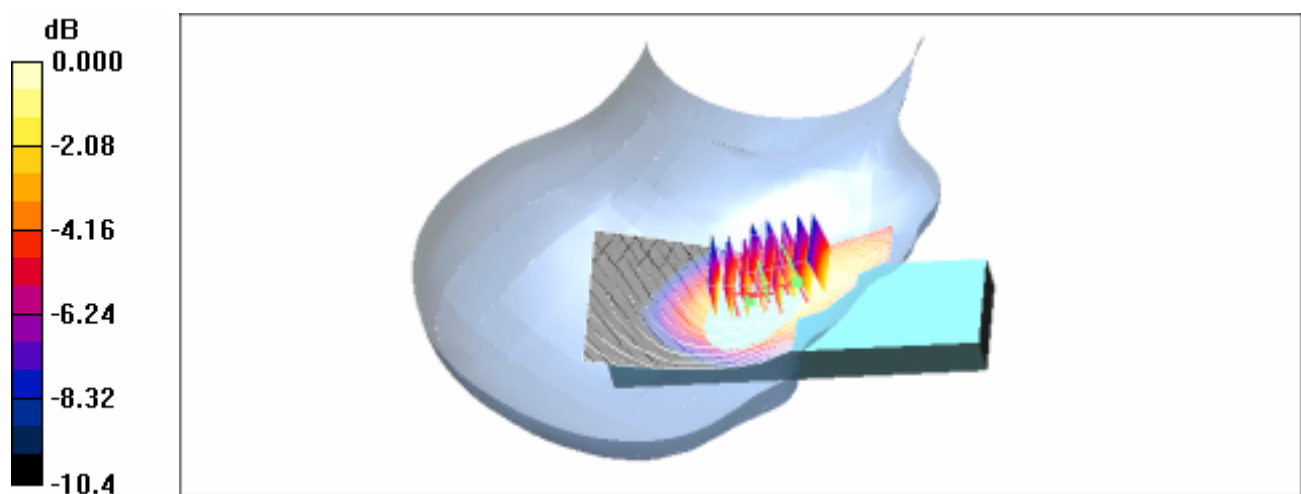

0 dB = 0.652mW/g

LeftCheek128-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.451 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.85 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.441 mW/g

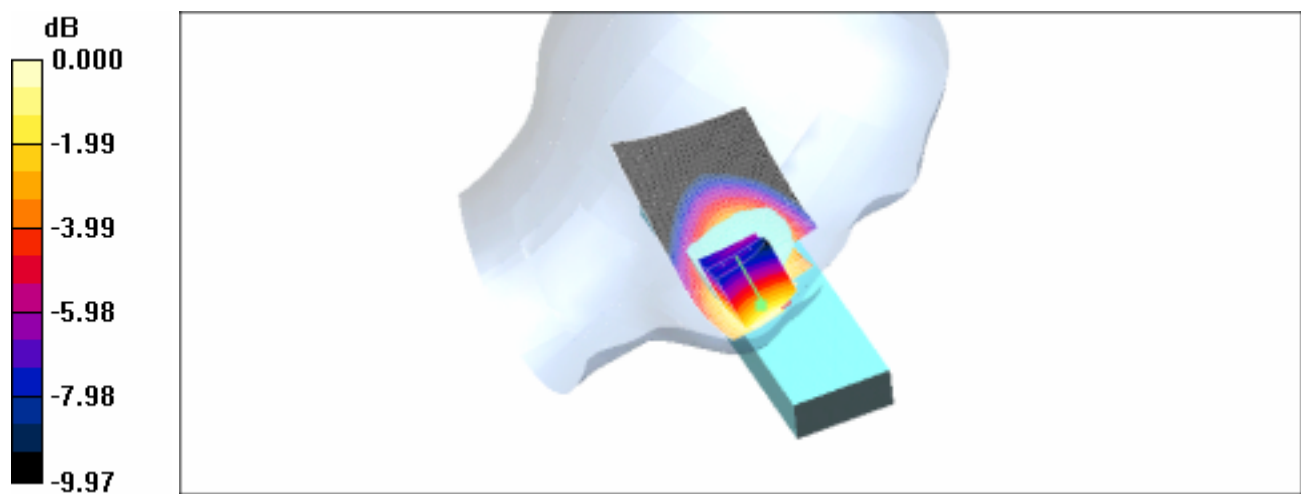

0 dB = 0.441mW/g

LeftCheek190-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.76 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

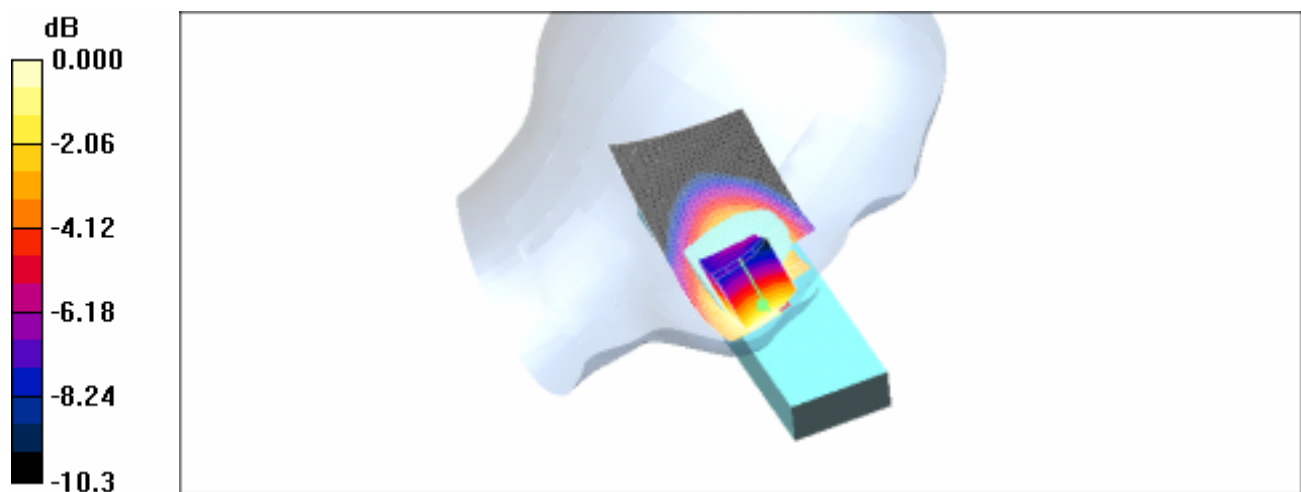

0 dB = 0.406mW/g

LeftCheek251-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.469 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.21 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.314 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

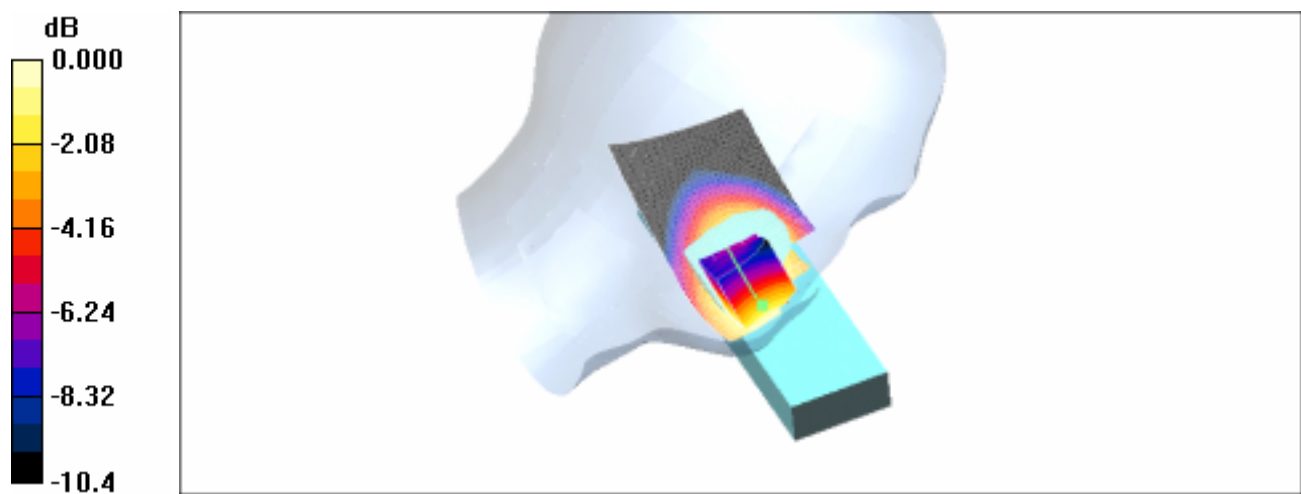

0 dB = 0.455mW/g

RightTilt128-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\epsilon = 0.864$ mho/m; $\mu = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.290 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

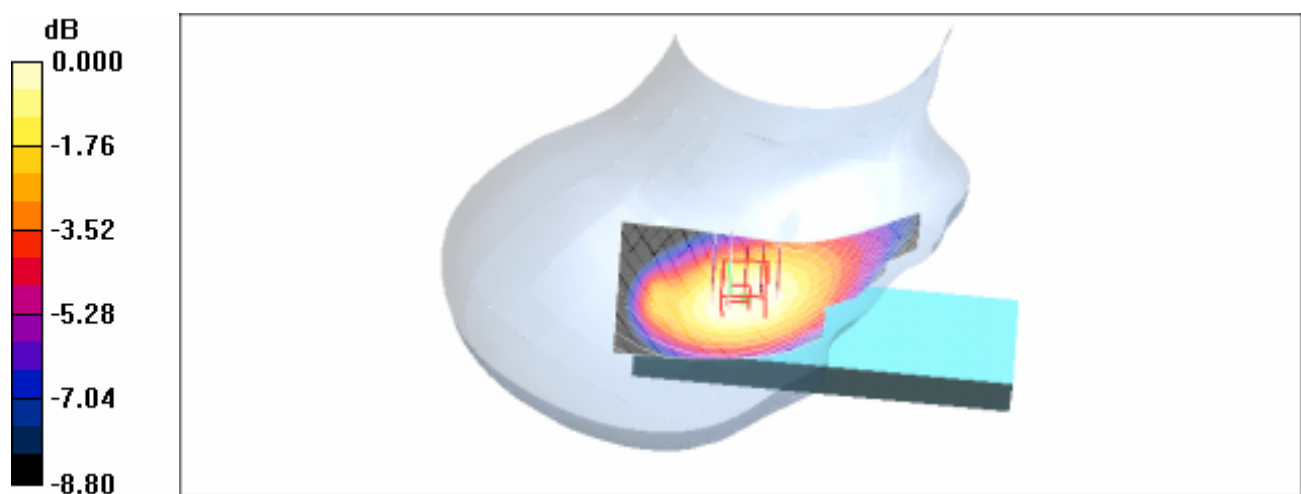

RightTilt190-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\epsilon = 0.863 \text{ mho/m}$; $\mu = 42.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.270 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

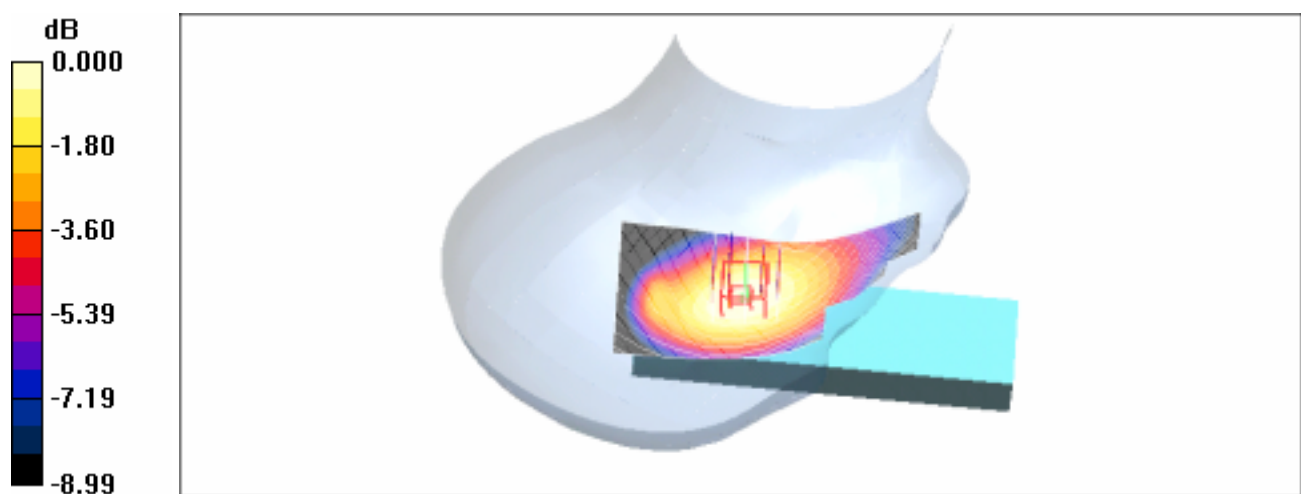

RightTilt251-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.891 \text{ mho/m}$; $\rho = 41.9$; $\mu = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.298 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

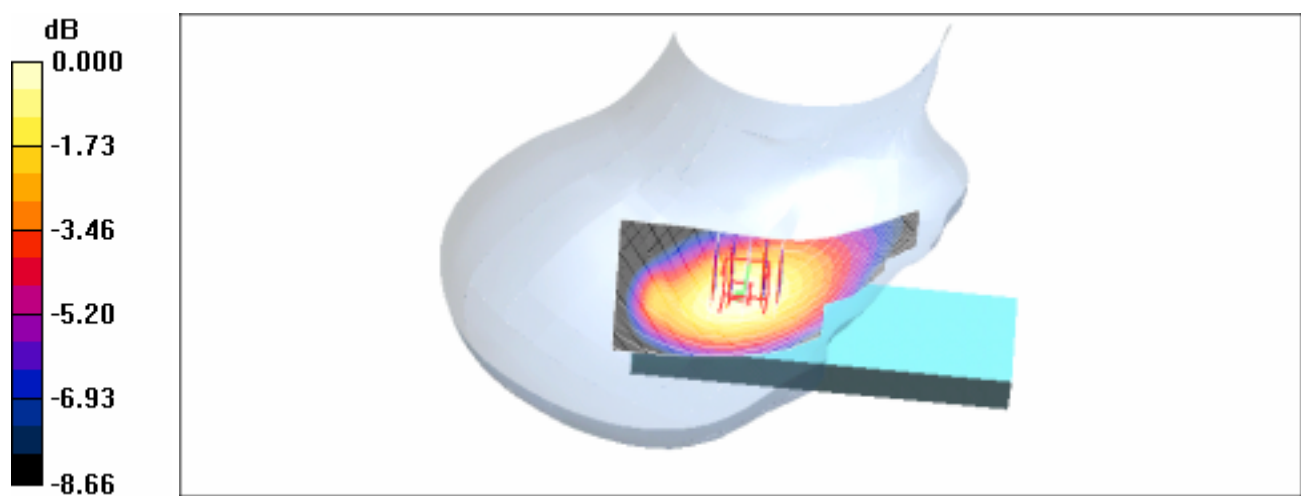

0 dB = 0.299mW/g

LeftTilt128-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.302 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

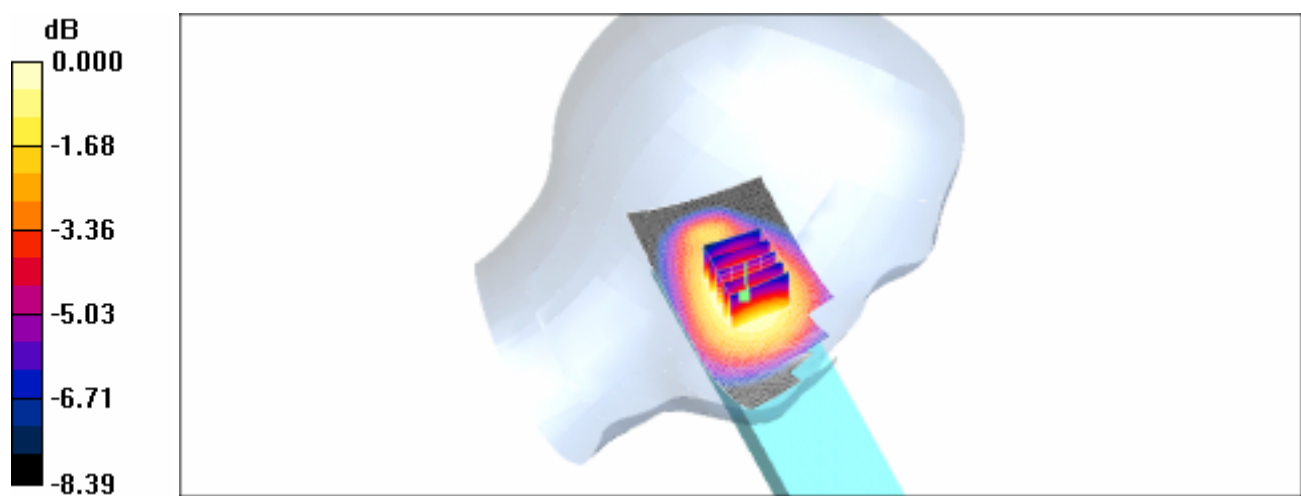

LeftTilt190-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.262 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

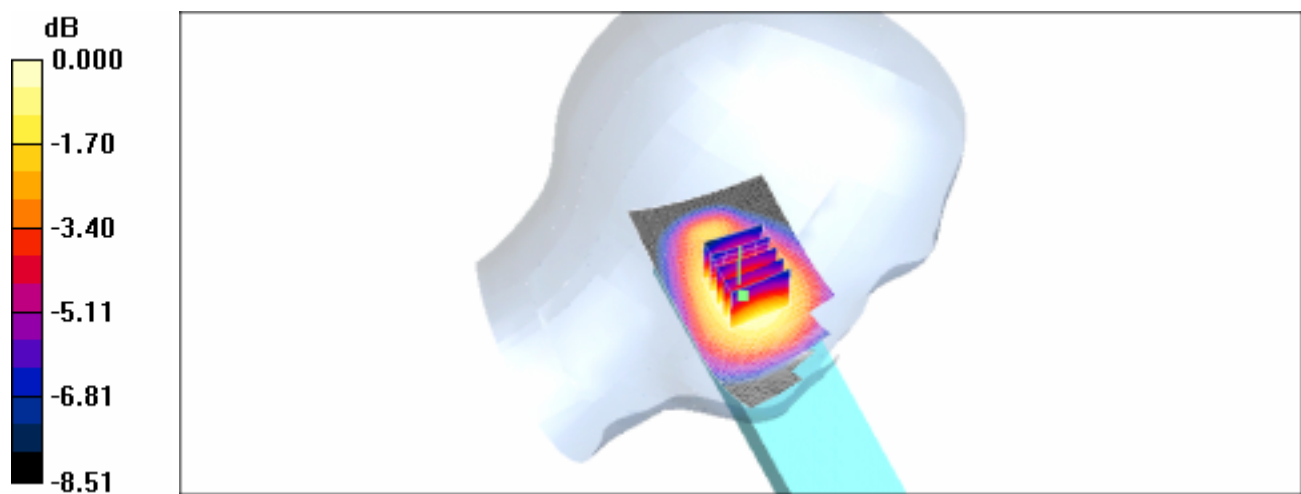

0 dB = 0.260mW/g

LeftTilt251-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\rho = 41.9$; $\mu = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

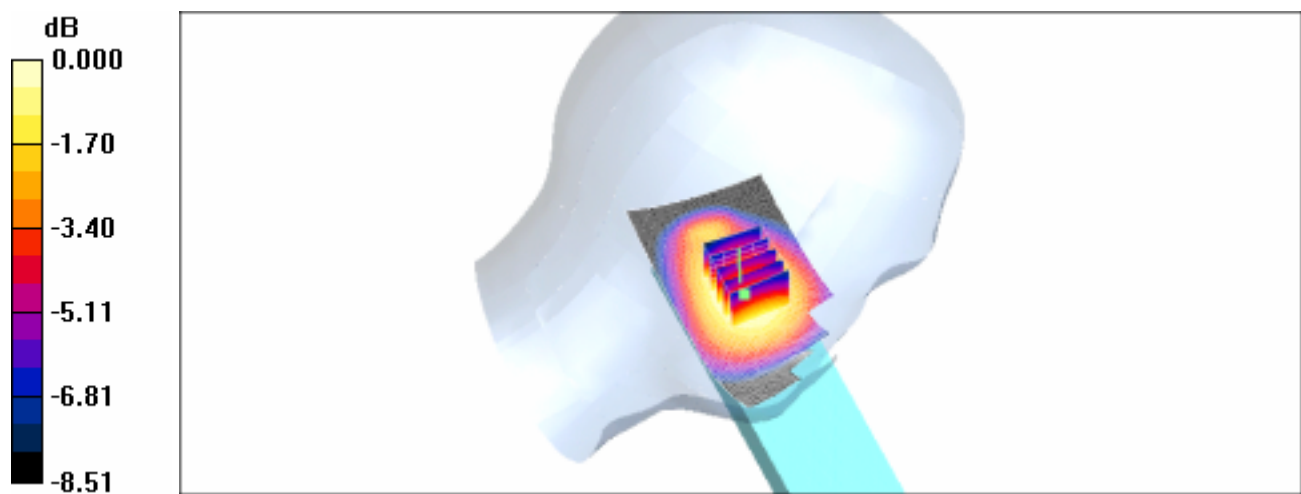

BodyCH128_Testing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.890 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.74 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.586 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

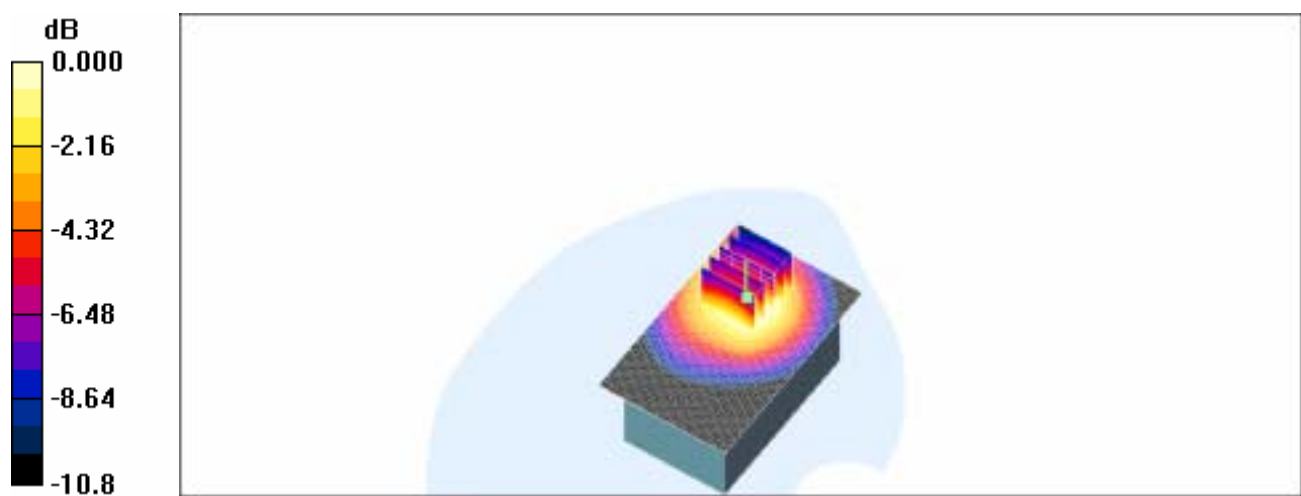

0 dB = 0.874mW/g

BodyCH190_Testing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.871 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.77 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.803 mW/g; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 0.844 mW/g

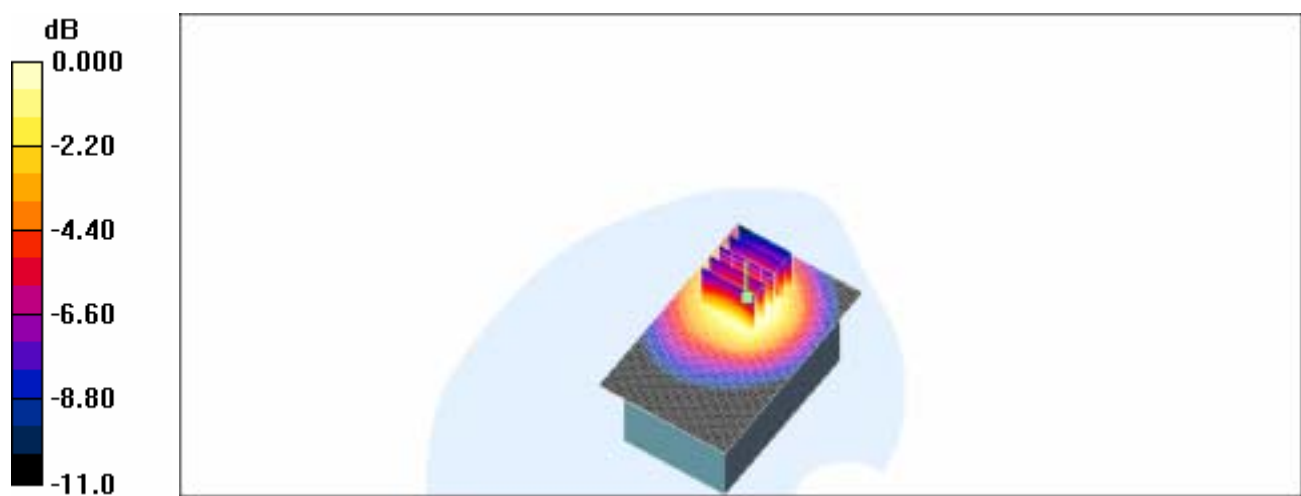

BodyCH251_Testing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.821 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.69 V/m; Power Drift = -0.238 dB

Peak SAR (extrapolated) = 0.980 W/kg

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.806 mW/g

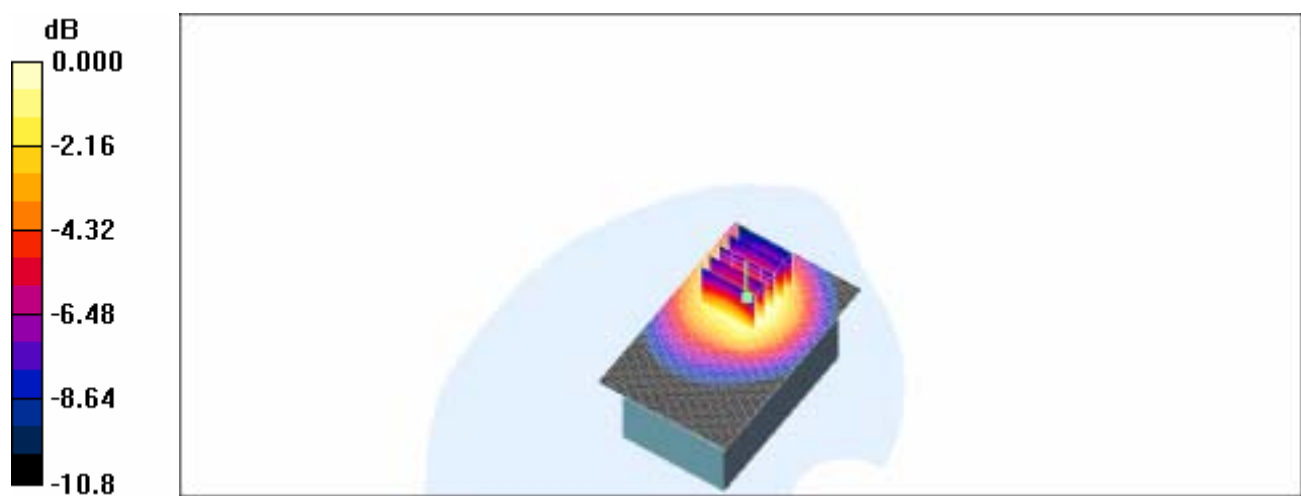

0 dB = 0.806mW/g

BodyCH128_Testing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.541 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.09 V/m; Power Drift = -0.277 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.535 mW/g

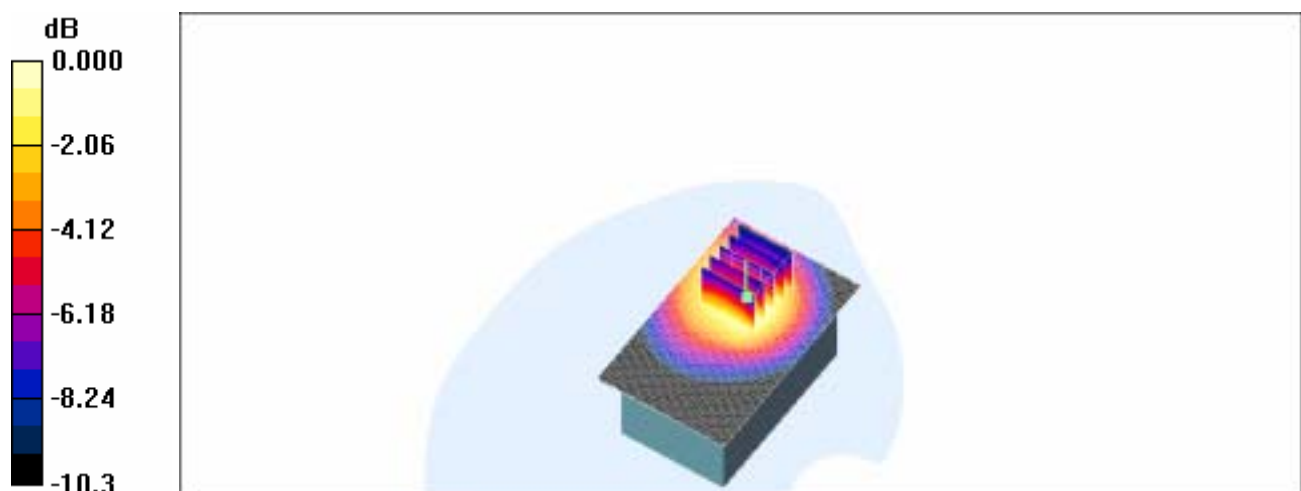

0 dB = 0.535mW/g

BodyCH190_ Testing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.582 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.20 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

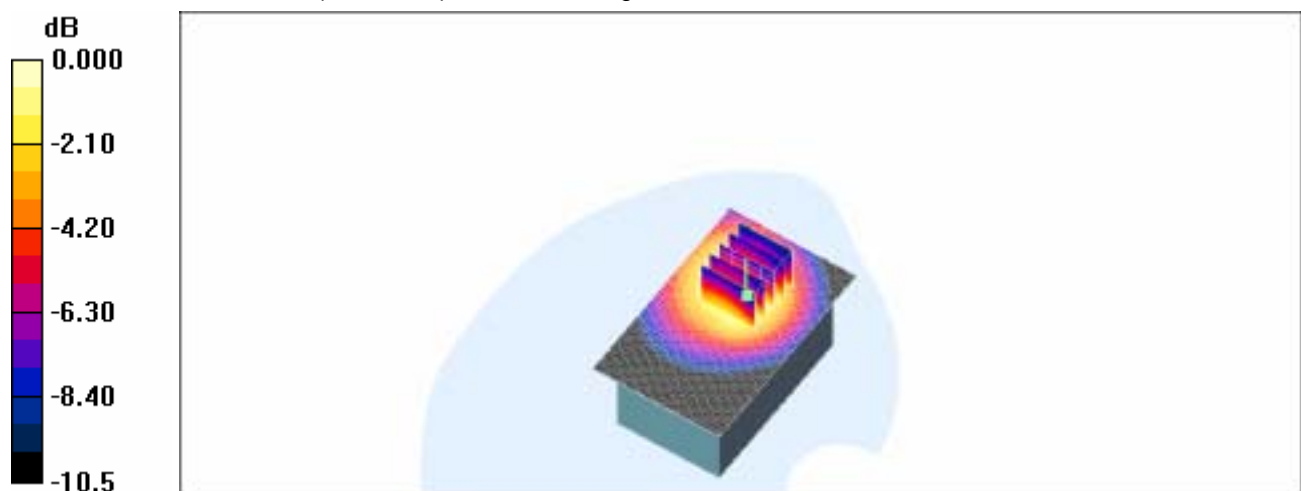

0 dB = 0.577mW/g

BodyCH251_ Tetsing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.572 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.21 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.535 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

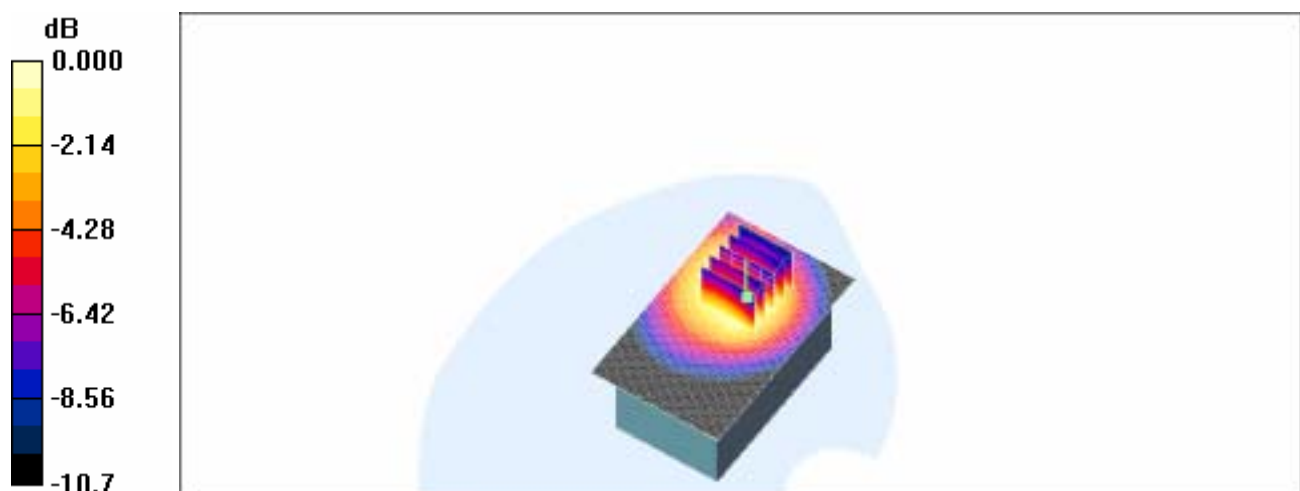

0 dB = 0.563mW/g

BodyCH128_Testing in GPRS mode, EUT front to phantom-With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.400 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.272 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

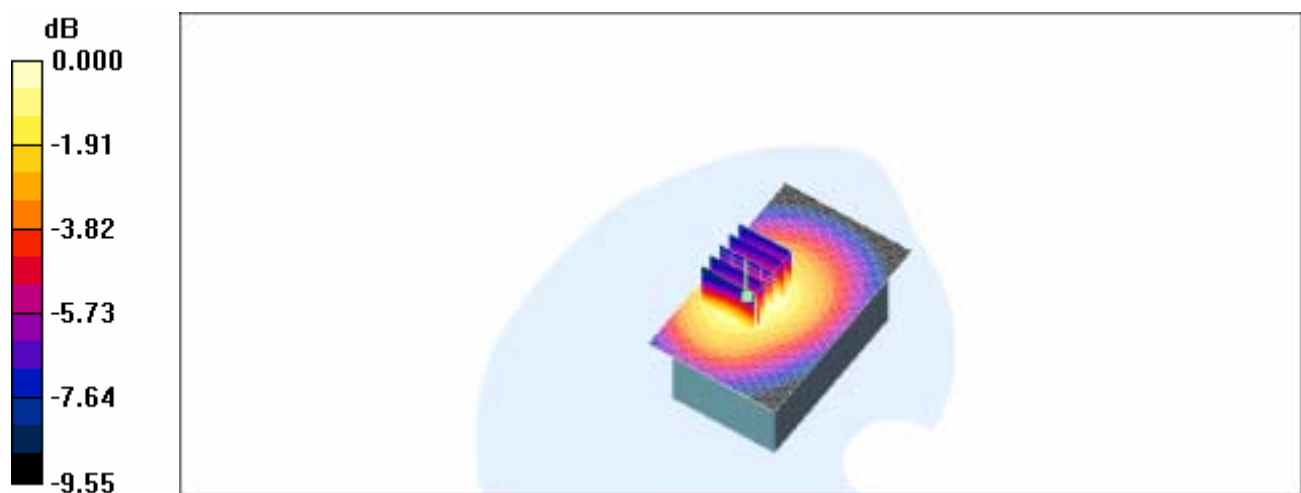

0 dB = 0.418mW/g

BodyCH190_Testing in GPRS mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$;
 $\rho = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.385 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

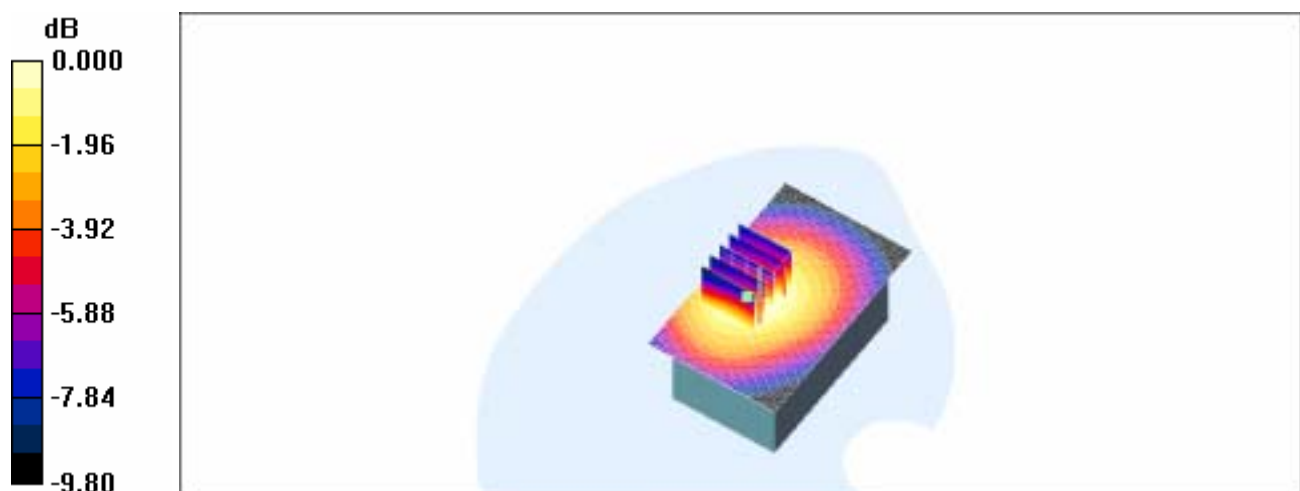

0 dB = 0.388mW/g

BodyCH251_Testing in GPRS mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.332 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.344 mW/g

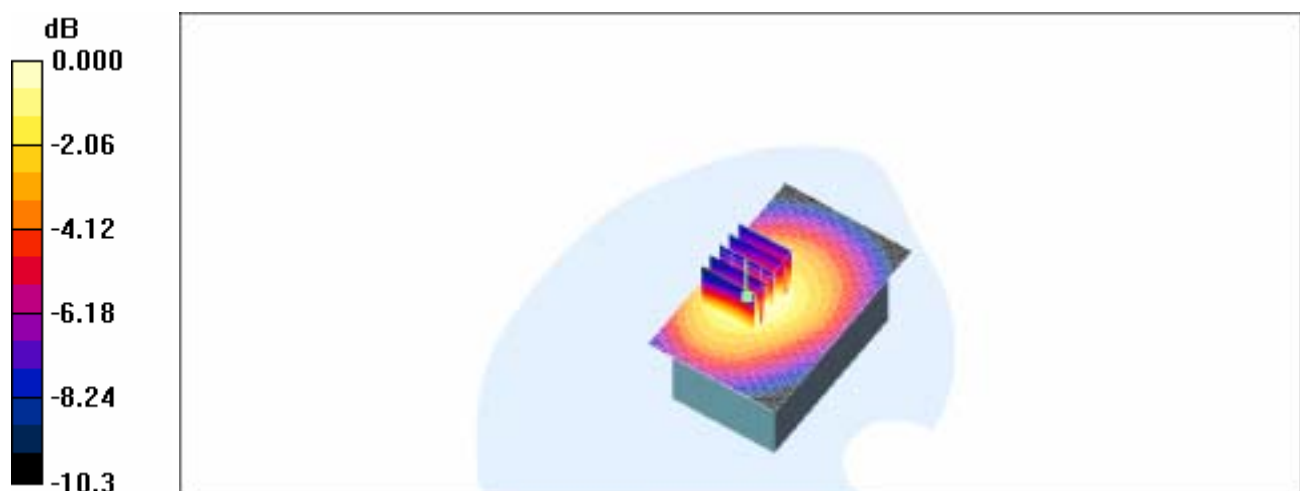

0 dB = 0.344mW/g

BodyCH128_Testing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$;
 $r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.220 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.83 V/m; Power Drift = -0.212 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

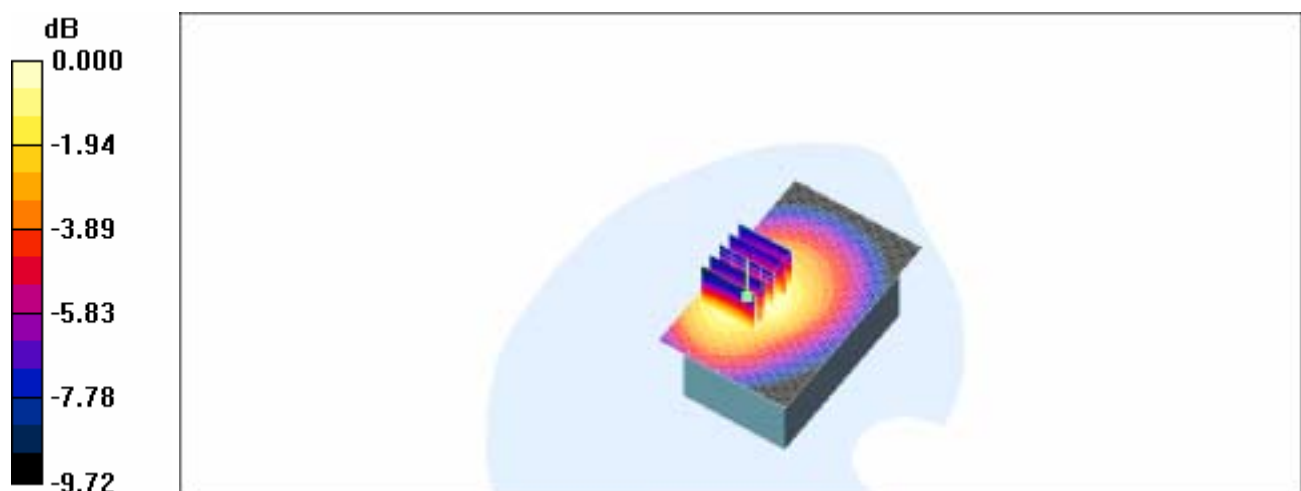

0 dB = 0.223mW/g

BodyCH190_ Testing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\rho = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

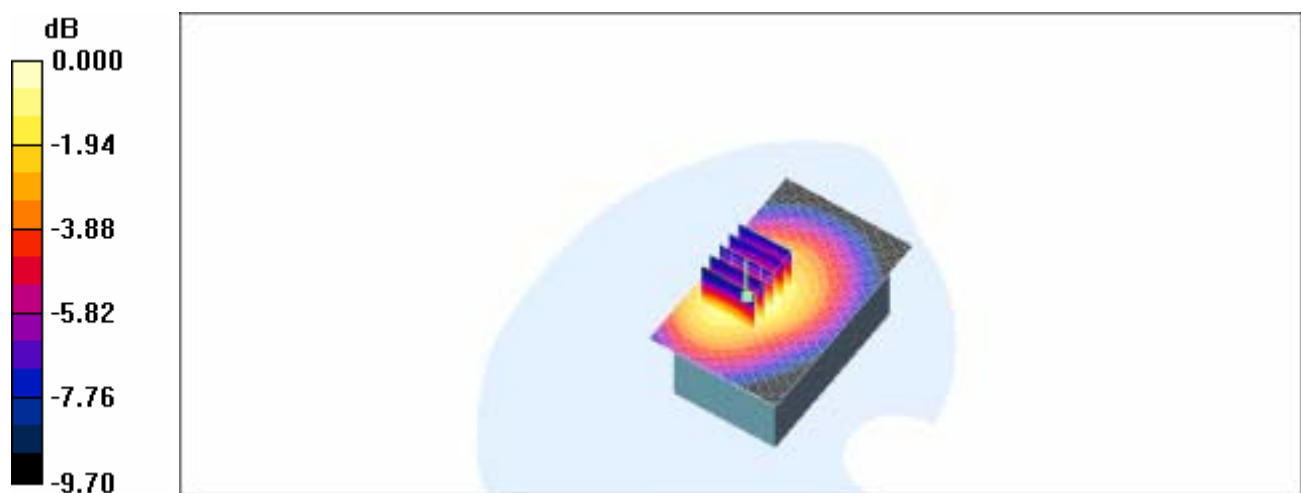

0 dB = 0.251mW/g

BodyCH251_ Tetsing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.81 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

0 dB = 0.249mW/g

RightCheek512-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.429 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.09 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

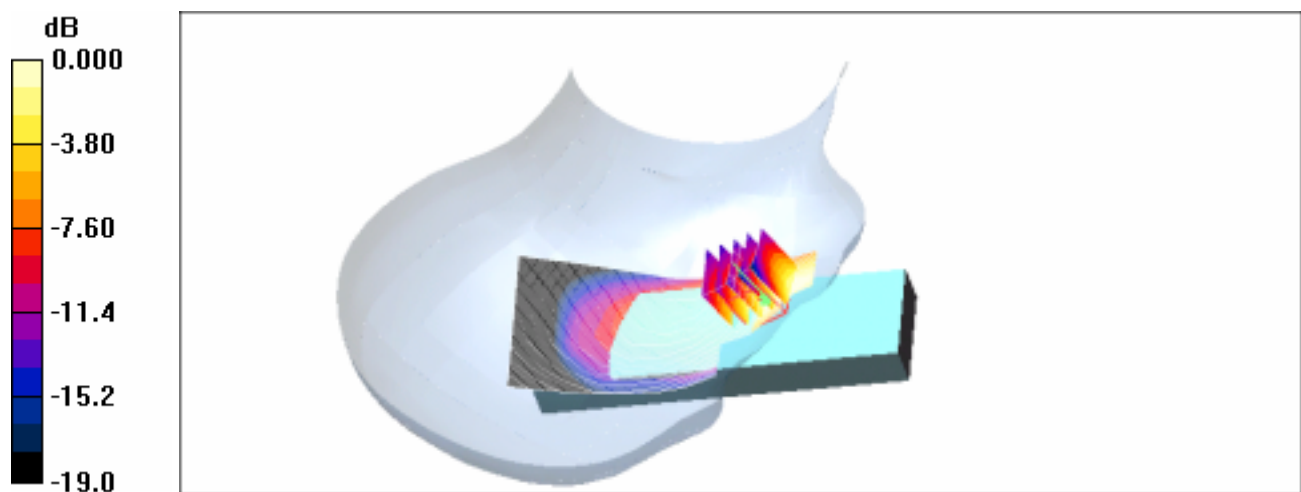

RightCheek661-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.372 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.90 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

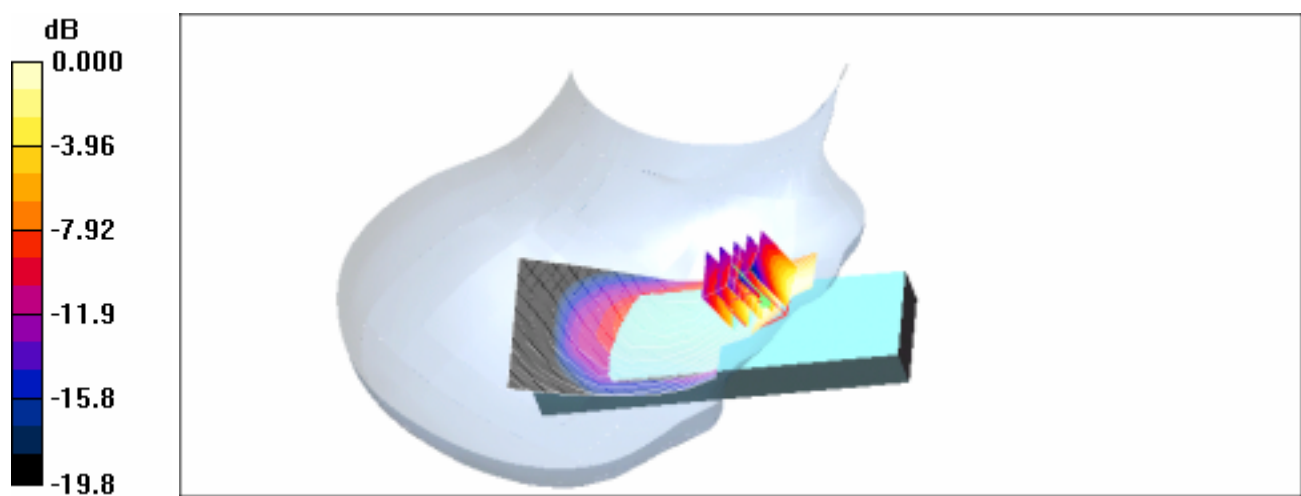

RightCheek810-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.480 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.13 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.480 mW/g

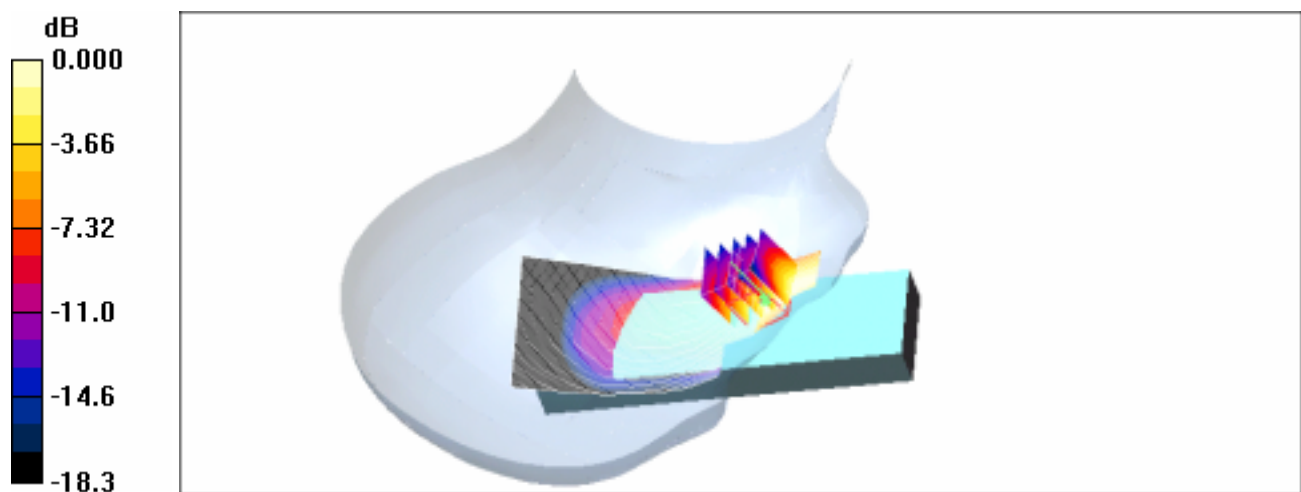

0 dB = 0.480mW/g

LeftCheek512-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\epsilon = 1.39 \text{ mho/m}$; $\mu = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.196 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.28 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

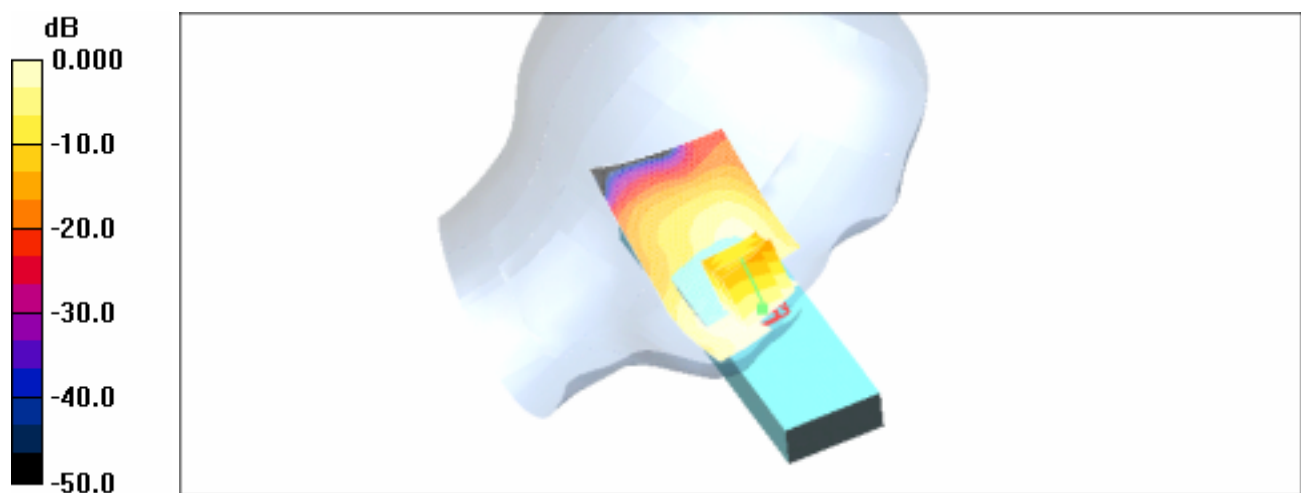

LeftCheek661-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.201 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.38 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

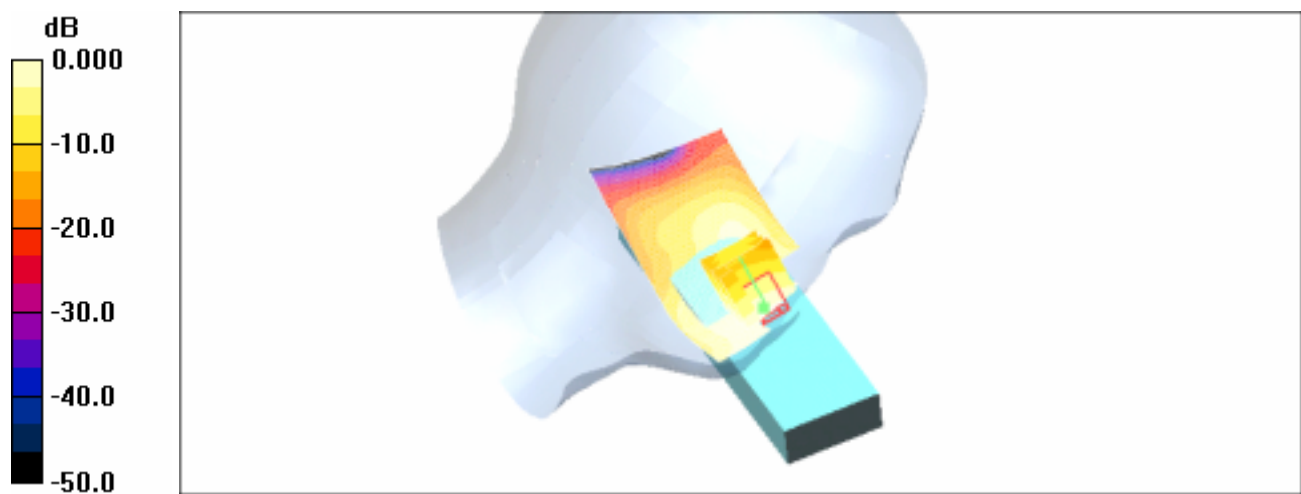

0 dB = 0.196mW/g

LeftCheek810-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.260 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.62 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

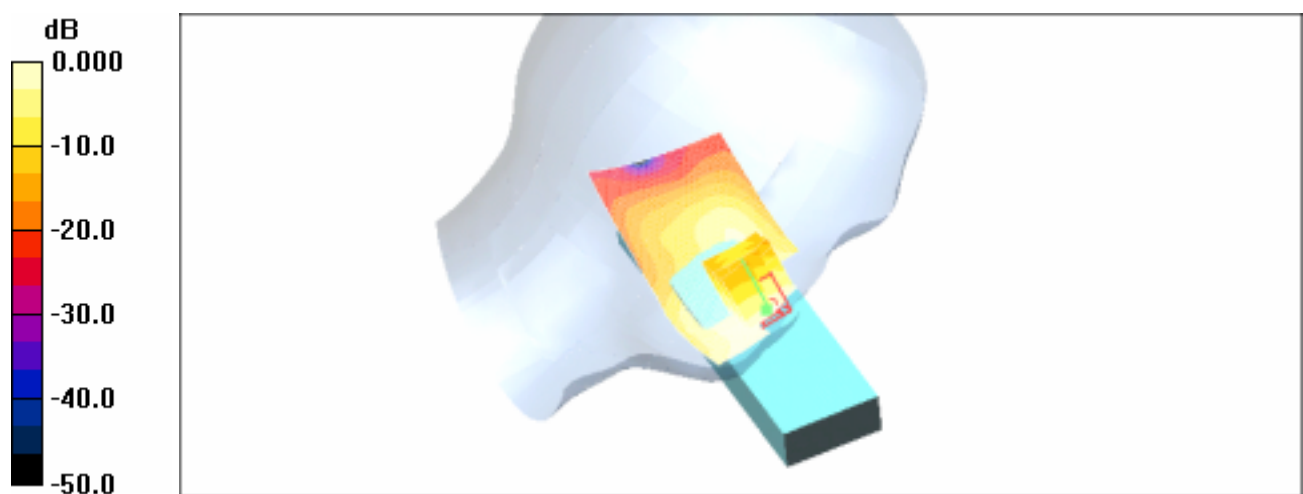

0 dB = 0.256mW/g

RightTilt512-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\epsilon = 1.39 \text{ mho/m}$; $\mu = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.100 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.32 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

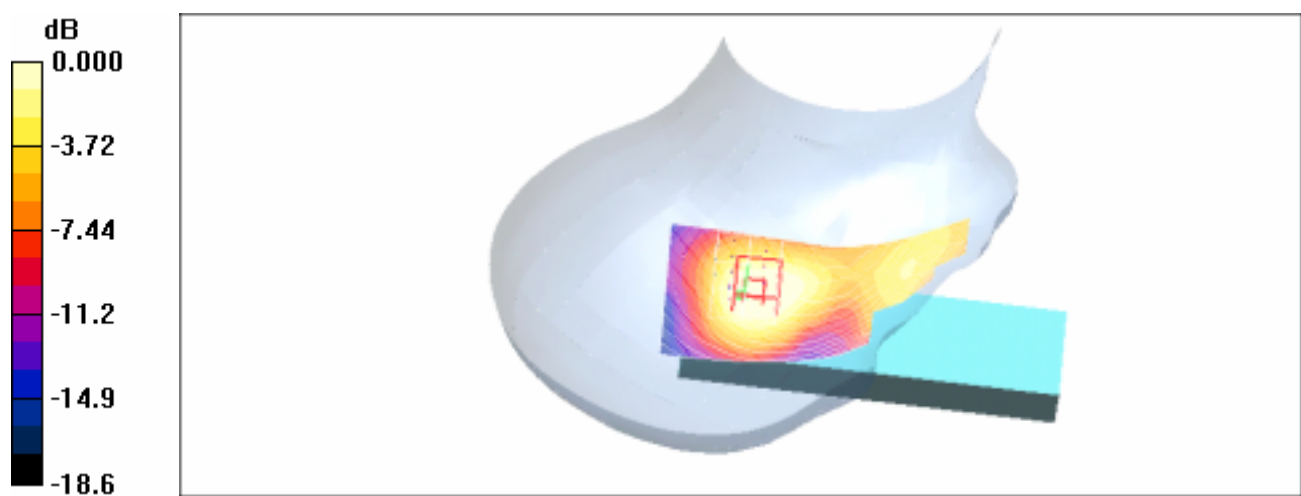

0 dB = 0.096mW/g

RightTilt661-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.085 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.06 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

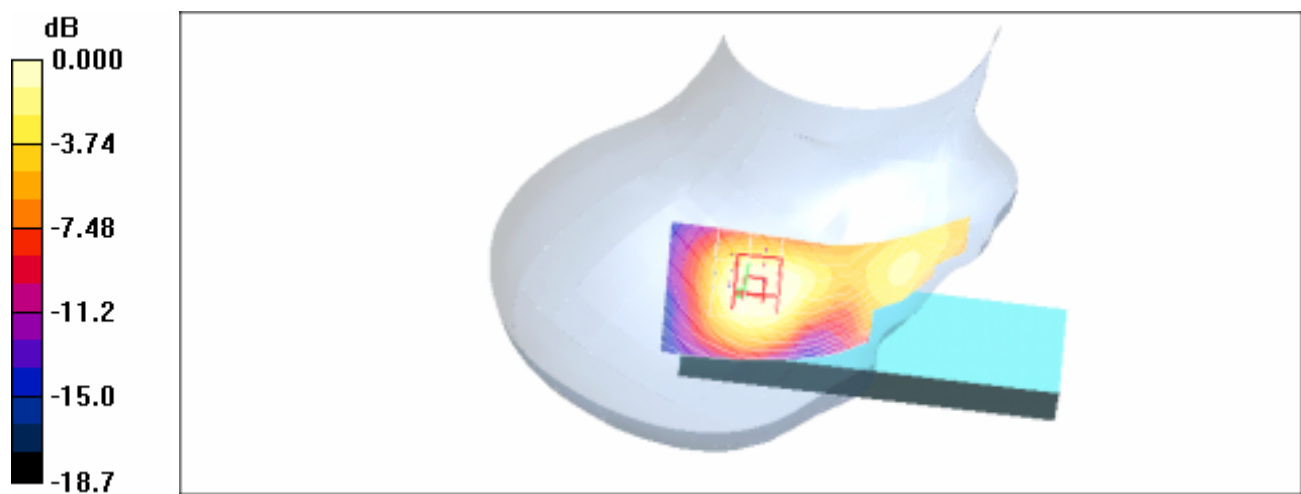

RightTilt810-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\epsilon = 1.45$ mho/m; $\mu = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.106 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.76 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

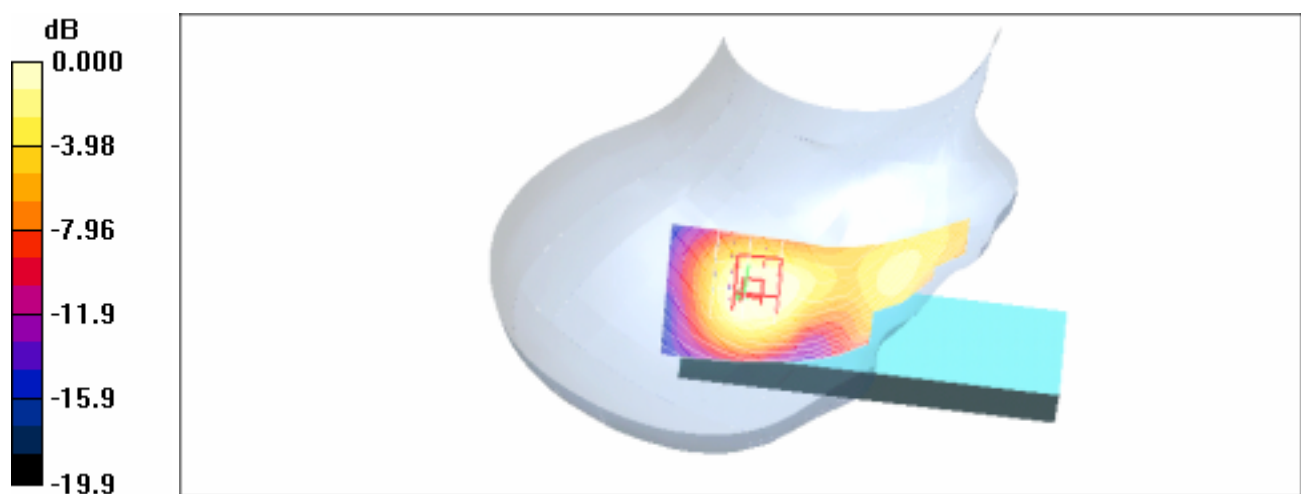

0 dB = 0.102mW/g

LeftTilt512-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.43 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

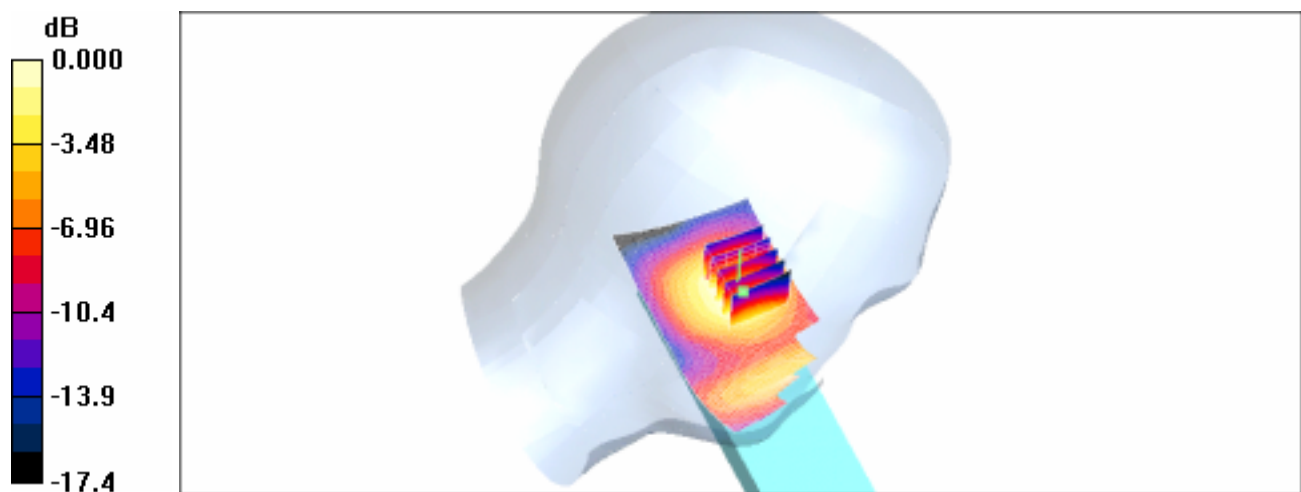

LeftTilt661-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.100 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.15 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

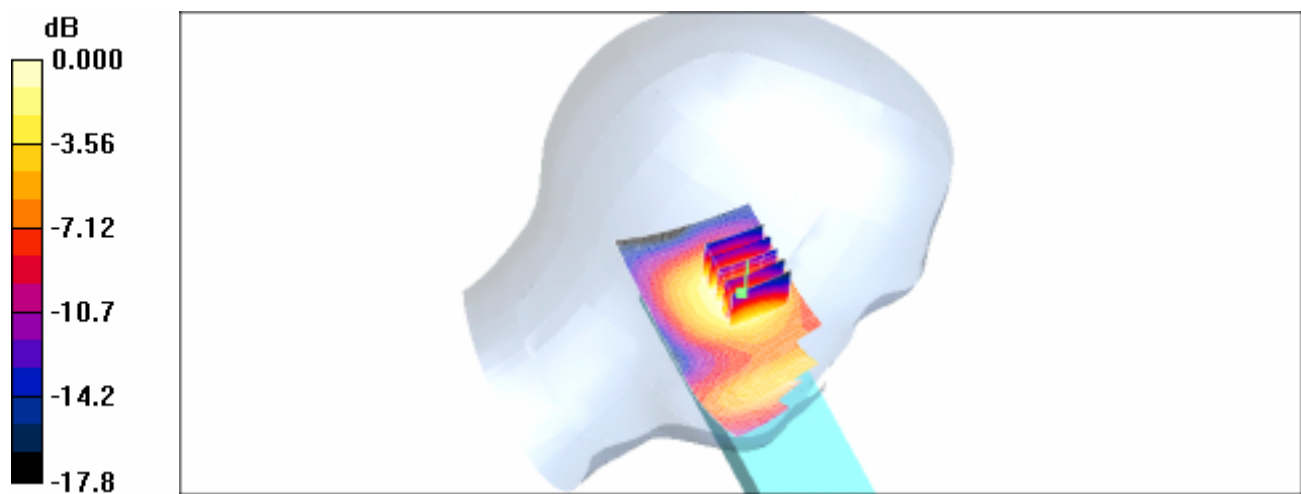

LeftTilt810-With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.104 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

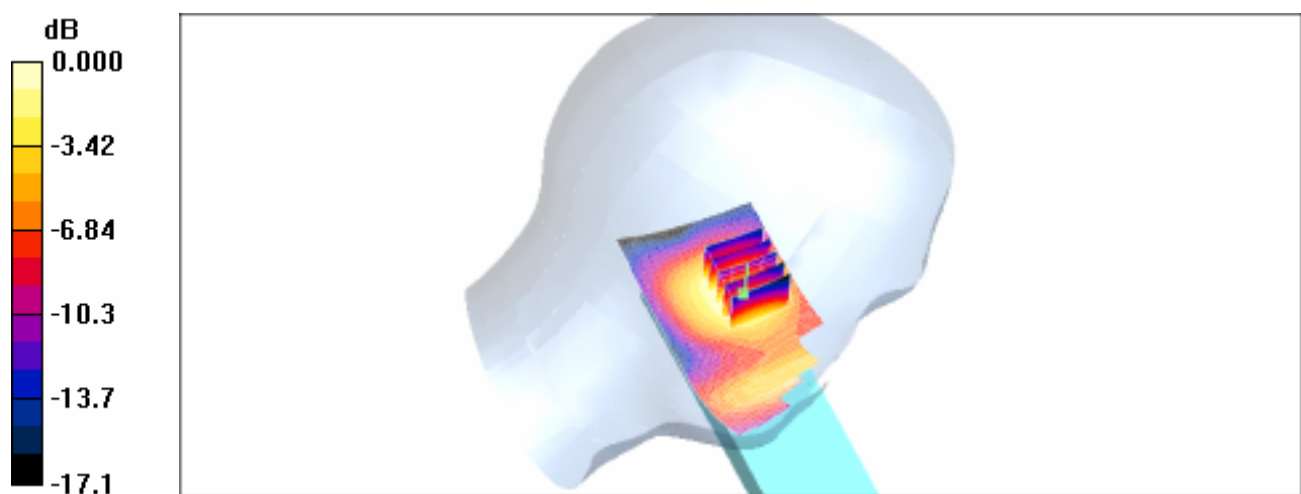

BodyCH512_Tetsing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\epsilon = 1.52$ mho/m; $\mu = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.229 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.77 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

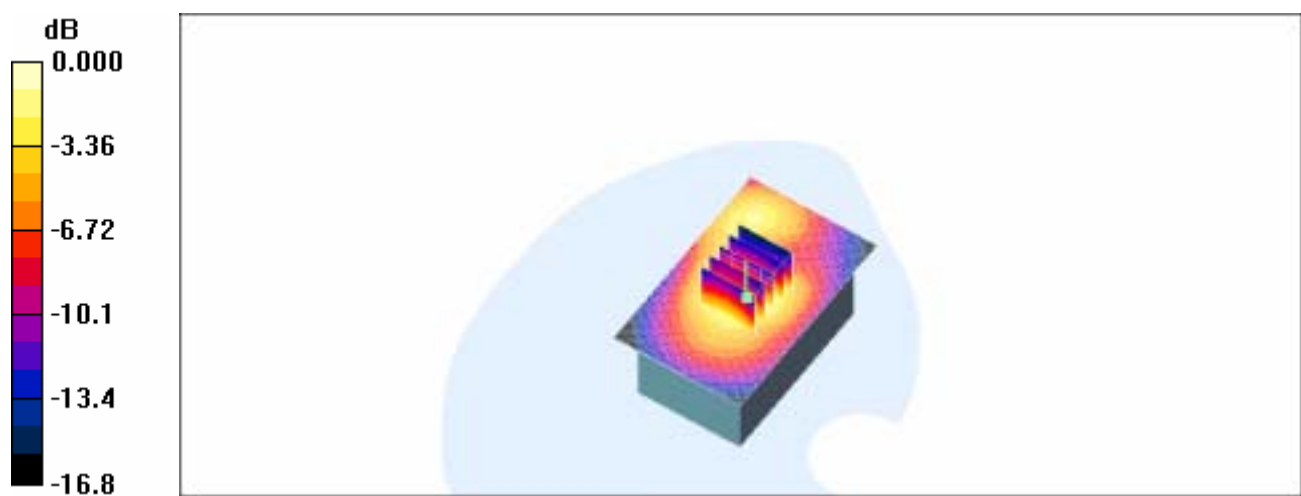

0 dB = 0.224mW/g

BodyCH661_Tetsing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.211 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.81 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

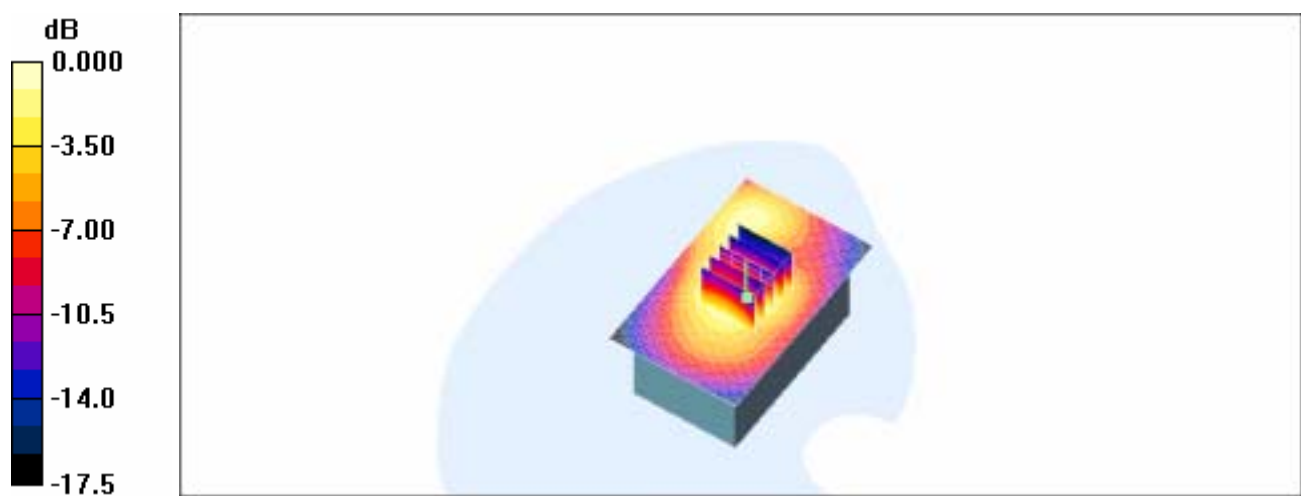

0 dB = 0.198mW/g

BodyCH810_Tetsing in GPRS mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.149 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.17 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.141 mW/g

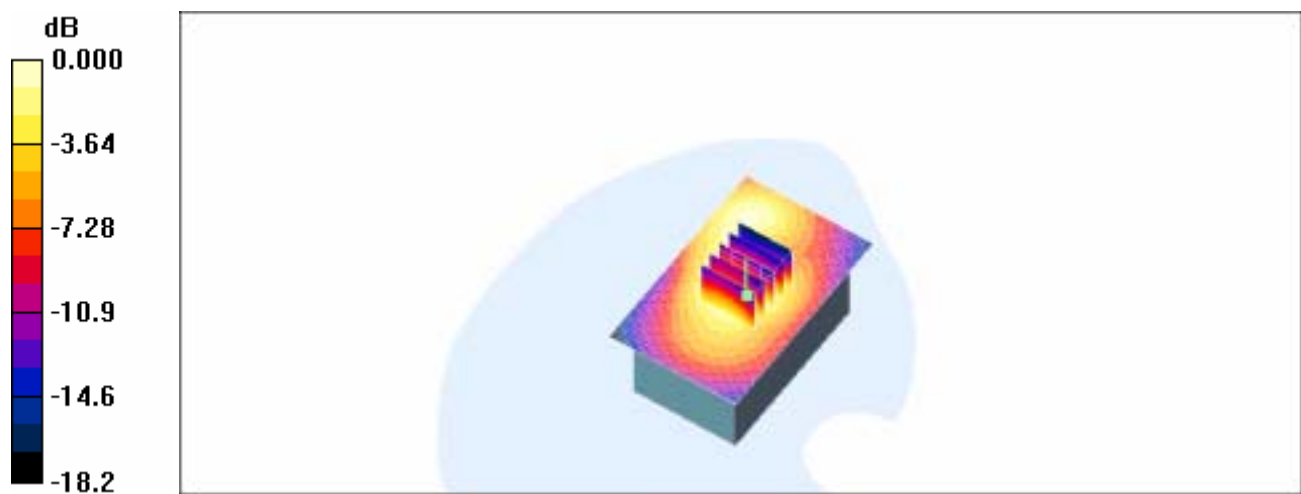

0 dB = 0.141mW/g

BodyCH512_Tetsing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\epsilon = 1.52$ mho/m; $\mu = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.089 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.88 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.085 mW/g

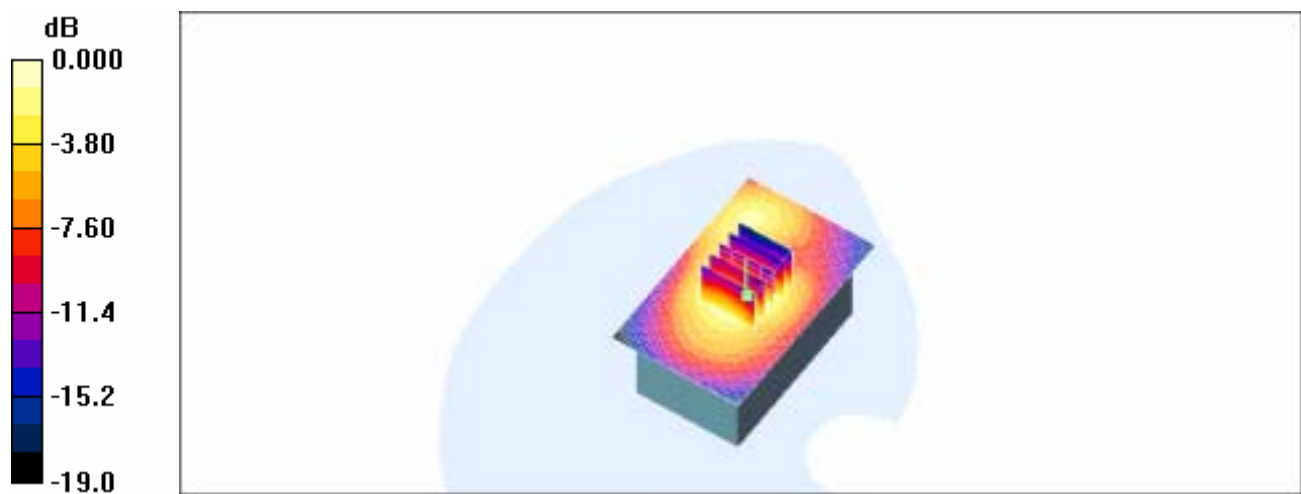

0 dB = 0.085mW/g

BodyCH661_Tetsing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.080 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.99 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

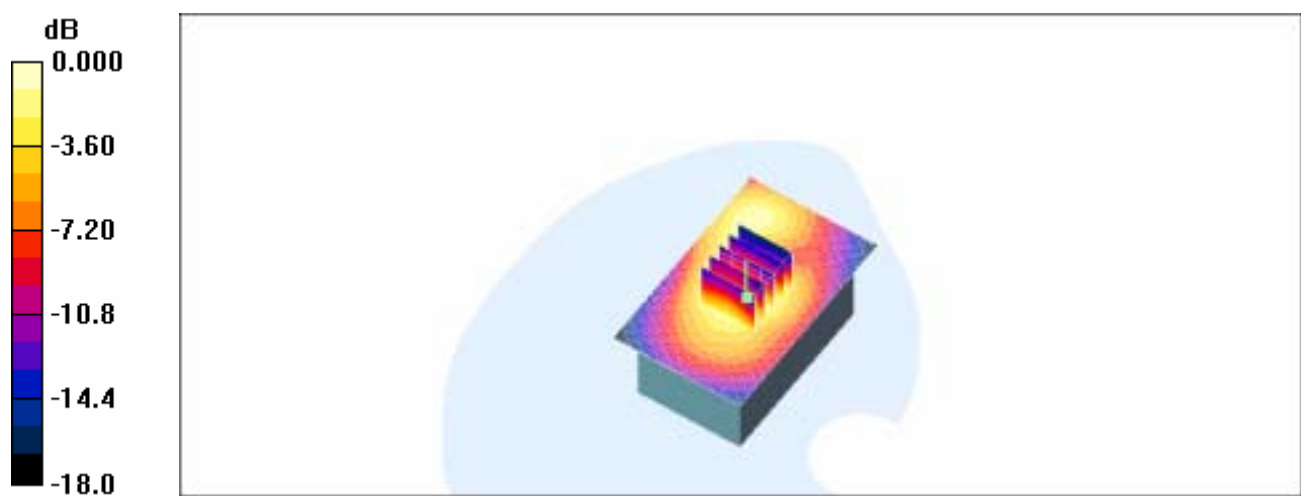

0 dB = 0.081mW/g

BodyCH810_Tetsing in EDGE mode, EUT back to phantom -With thin Battery (Model: 160)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.063 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.66 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

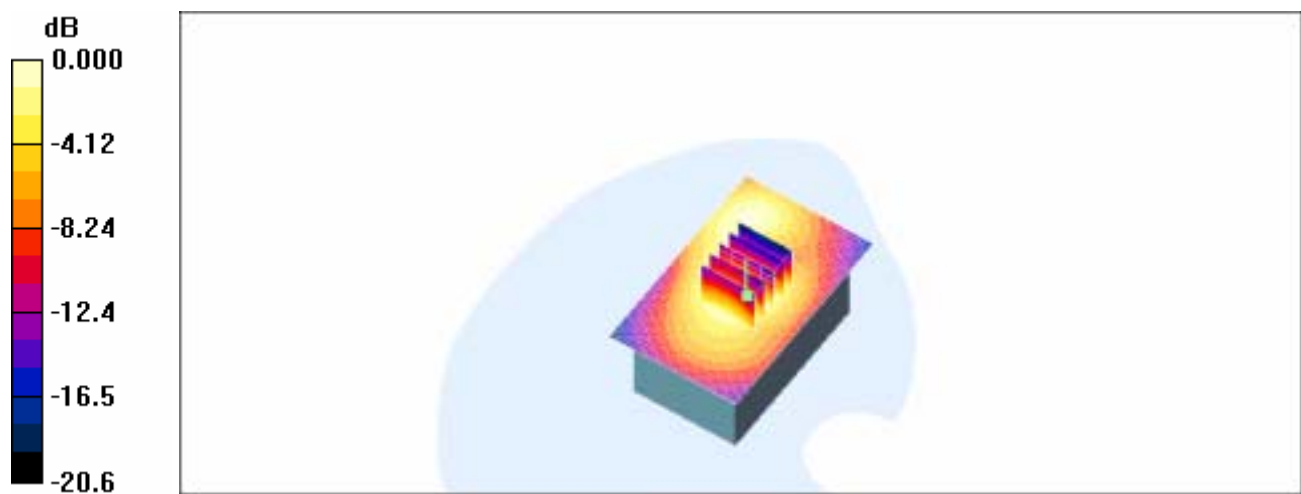

0 dB = 0.060mW/g

BodyCH512_Tetsing in GPRS mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\epsilon = 1.52 \text{ mho/m}$; $\mu = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.100 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.53 V/m; Power Drift = -0.293 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

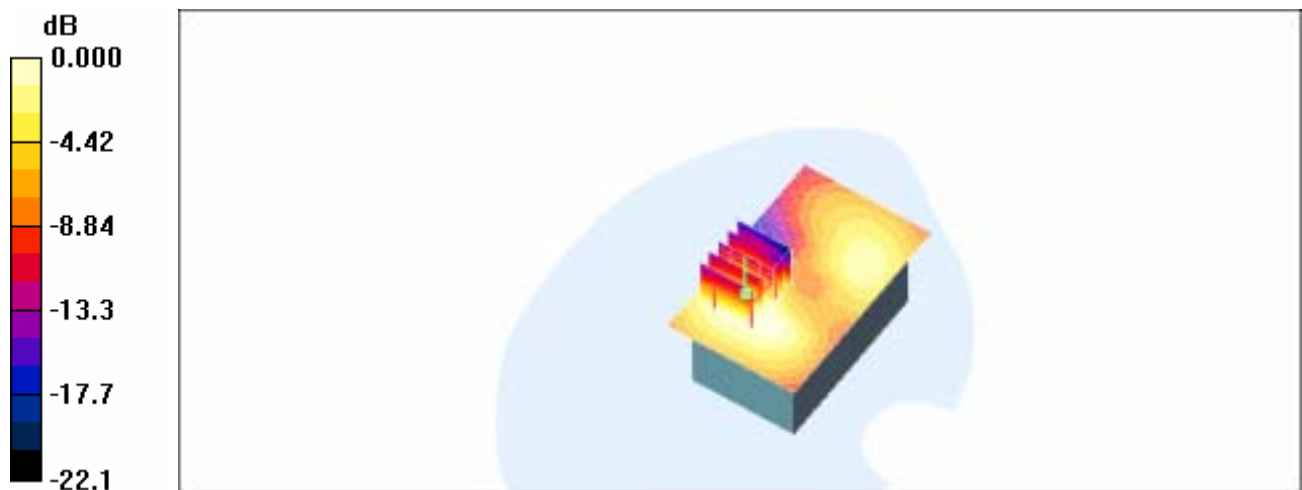

0 dB = 0.091mW/g

BodyCH661_Tetsing in GPRS mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\rho = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.097 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.24 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

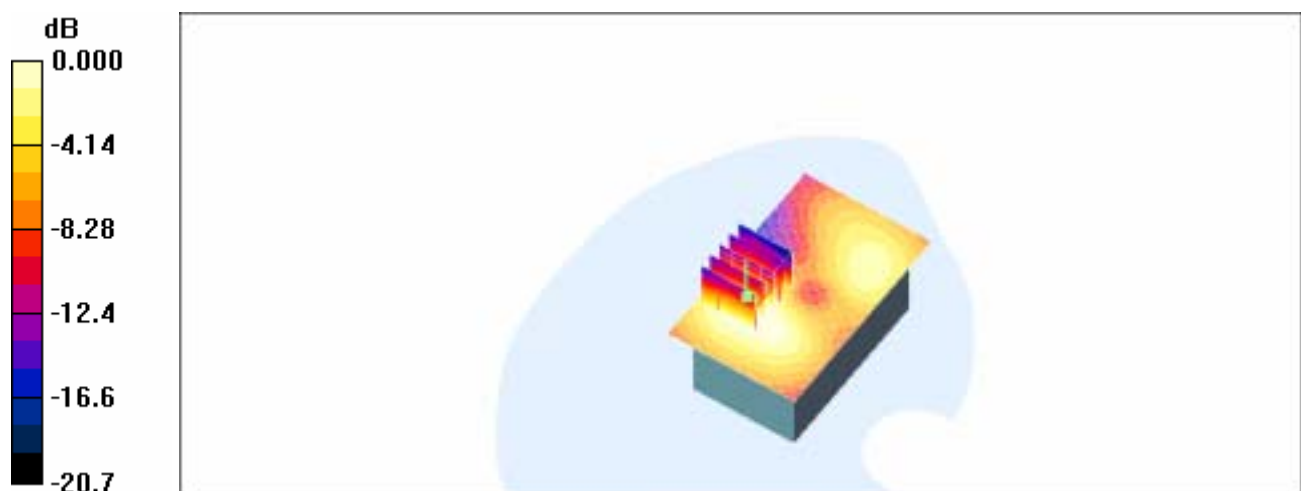

0 dB = 0.090mW/g

BodyCH810_Tetsing in GPRS mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.074 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.72 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

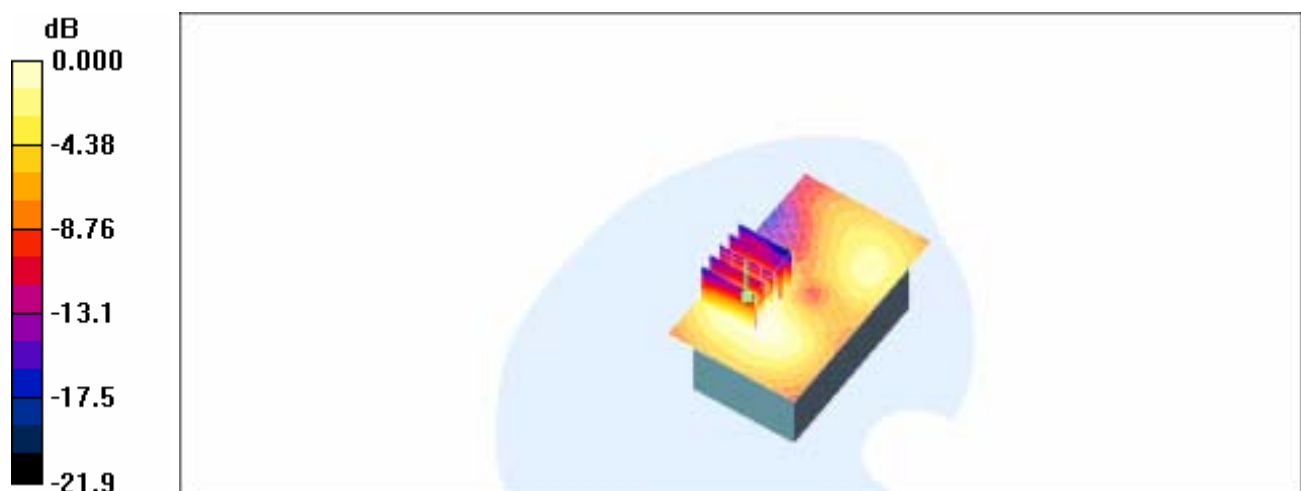

0 dB = 0.072mW/g

BodyCH512_Tetsing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\rho = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.037 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.93 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.036 mW/g



0 dB = 0.036mW/g

BodyCH661_Tetsing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.041 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.25 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.041 mW/g

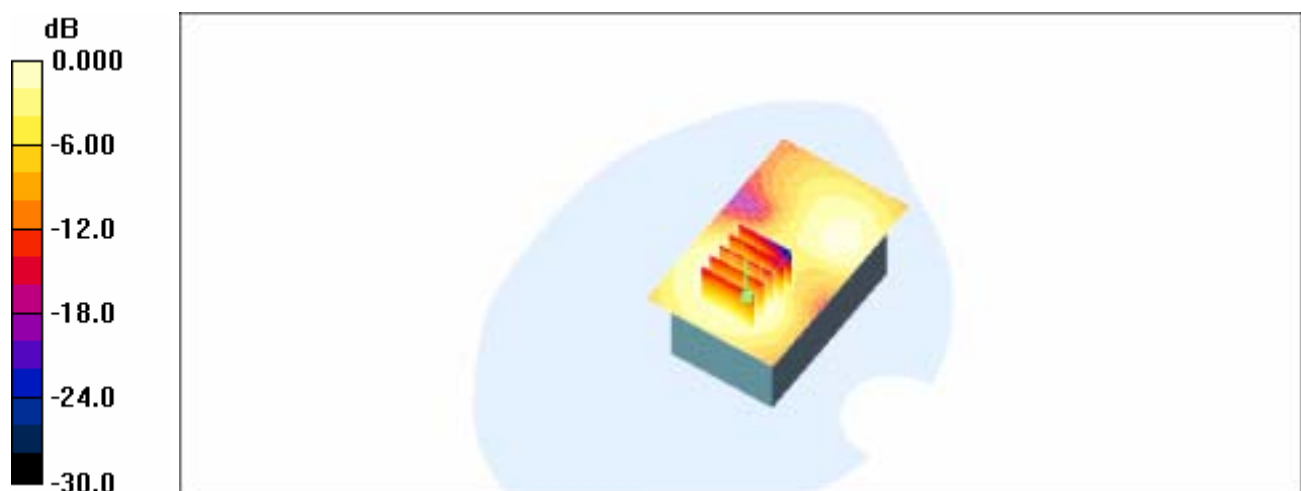

0 dB = 0.041mW/g

BodyCH810_Tetsing in EDGE mode, EUT front to phantom -With thin Battery (Model: 160)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\rho = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.041 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.20 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

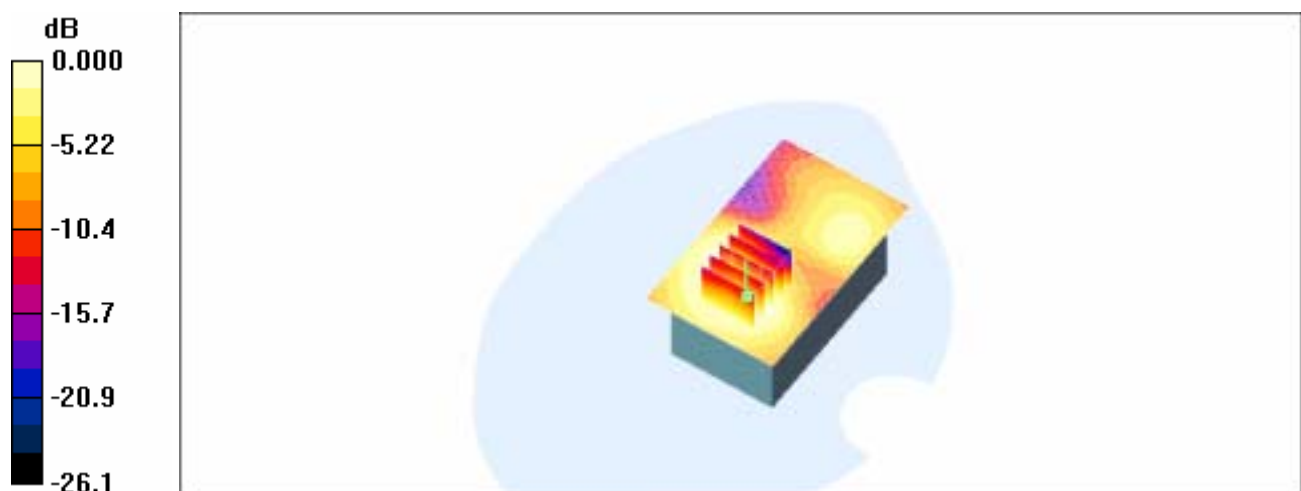

0 dB = 0.040mW/g

RightCheek128-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.586 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.589 mW/g

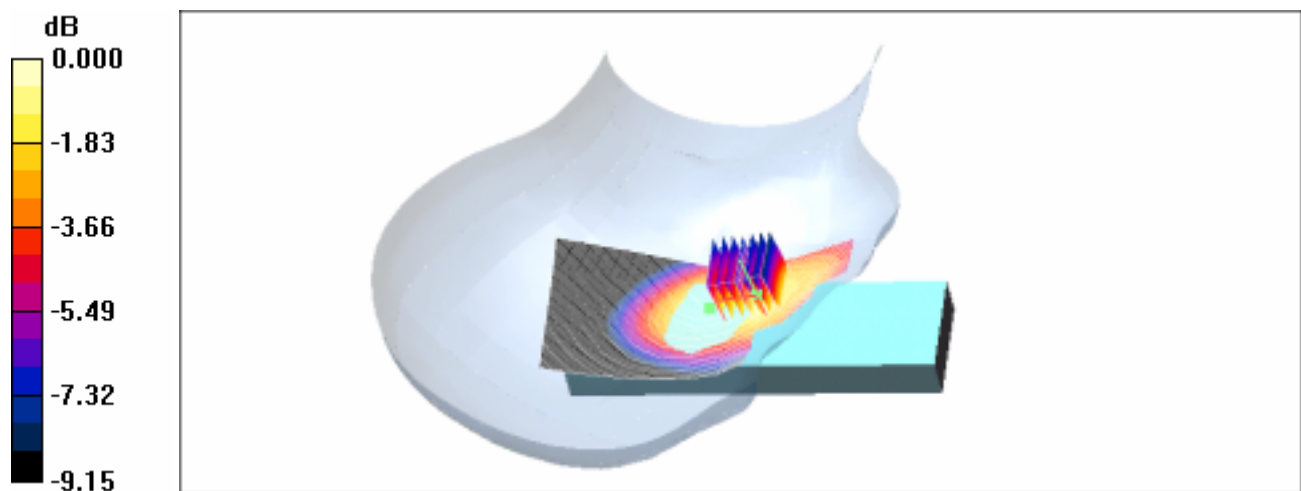

0 dB = 0.589mW/g

RightCheek190-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.557 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.74 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.551 mW/g

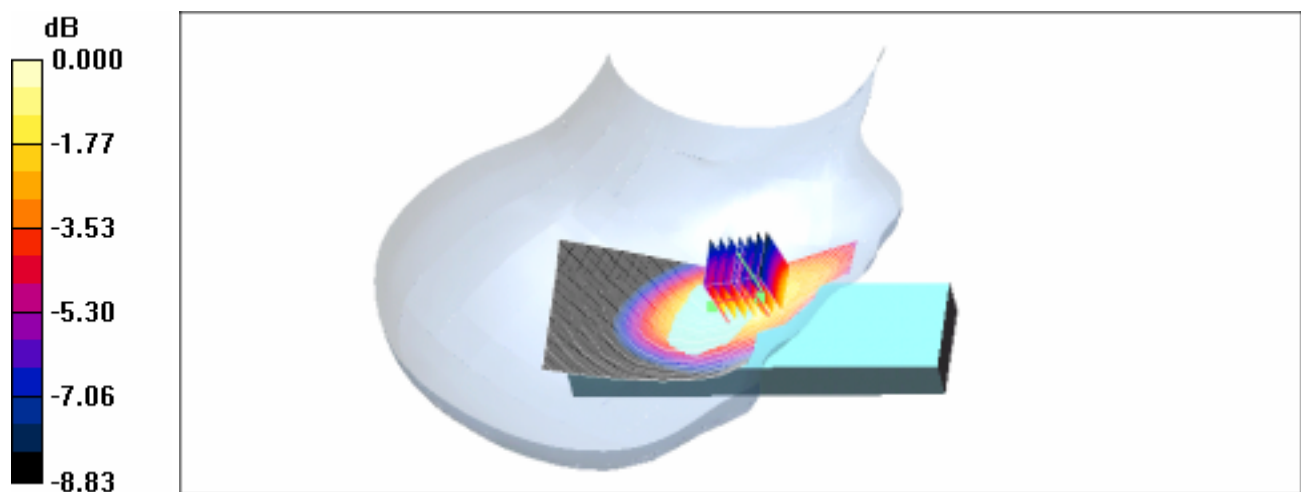

RightCheek251-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.644 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.00 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.412 mW/g

Maximum value of SAR (measured) = 0.650 mW/g

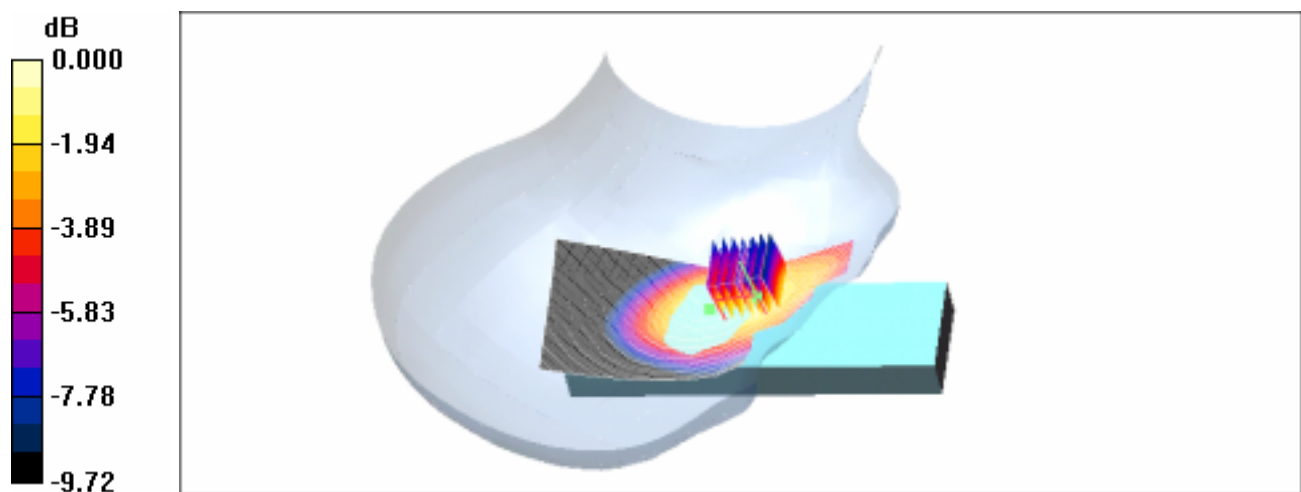

0 dB = 0.650mW/g

LeftCheek128-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.494 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.503 mW/g

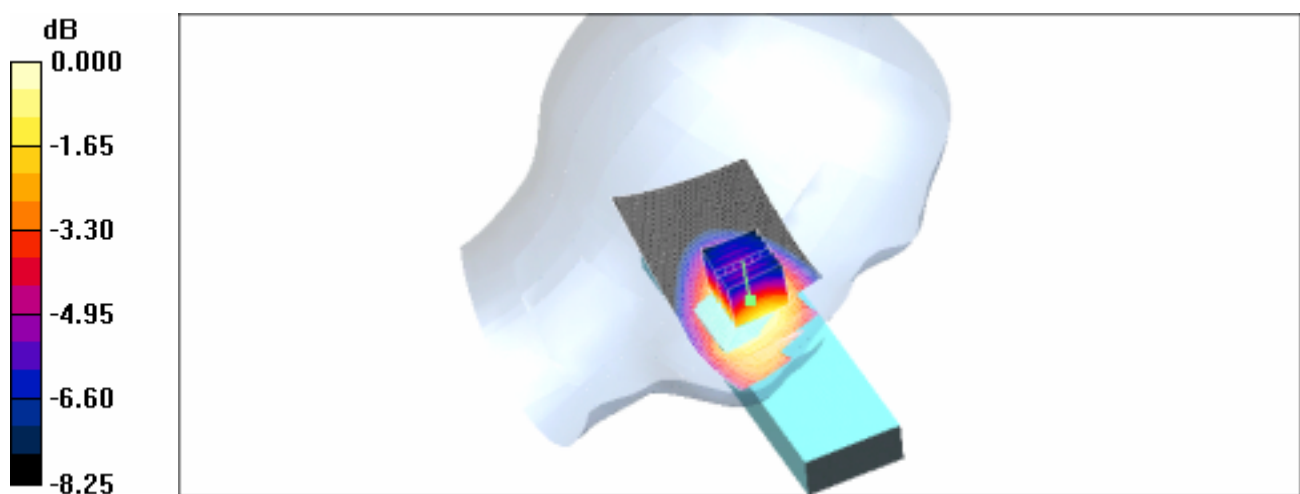

LeftCheek190-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.450 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.80 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

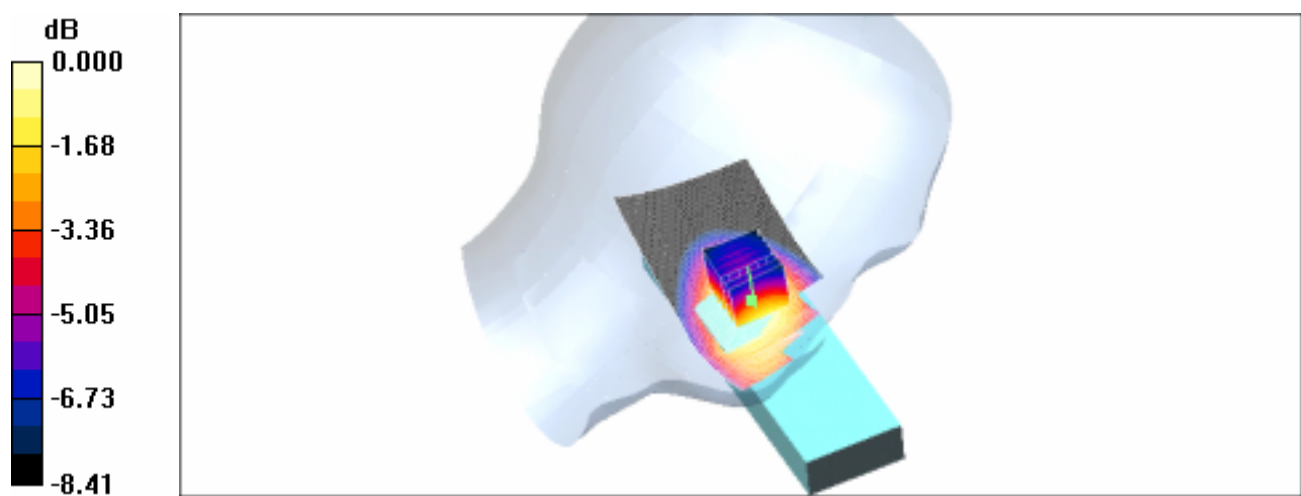

LeftCheek251-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\rho = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.517 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.08 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

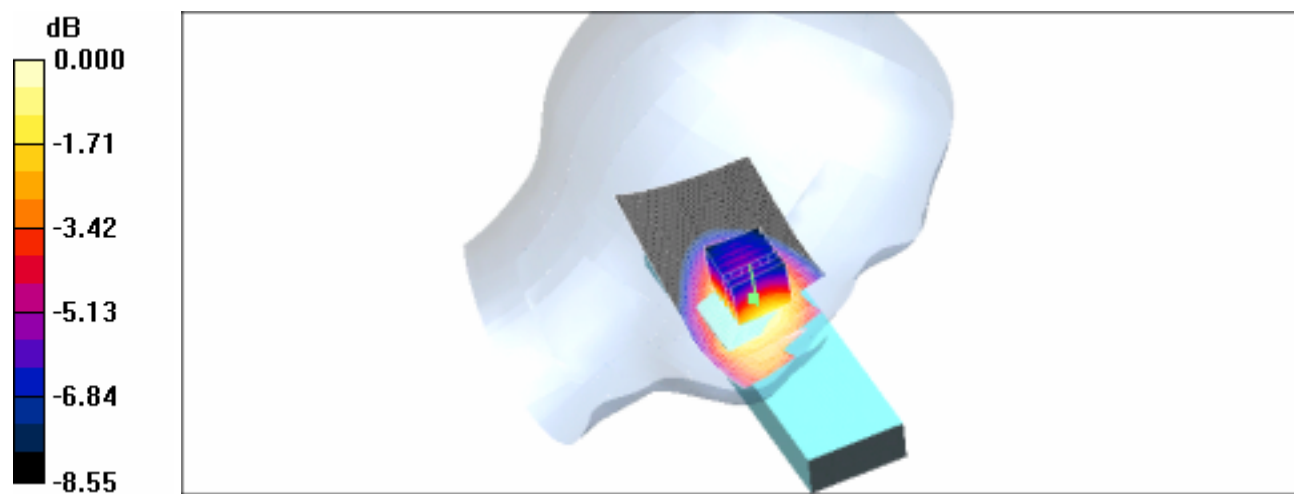

RightTilt128-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\epsilon = 0.864$ mho/m; $\mu = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

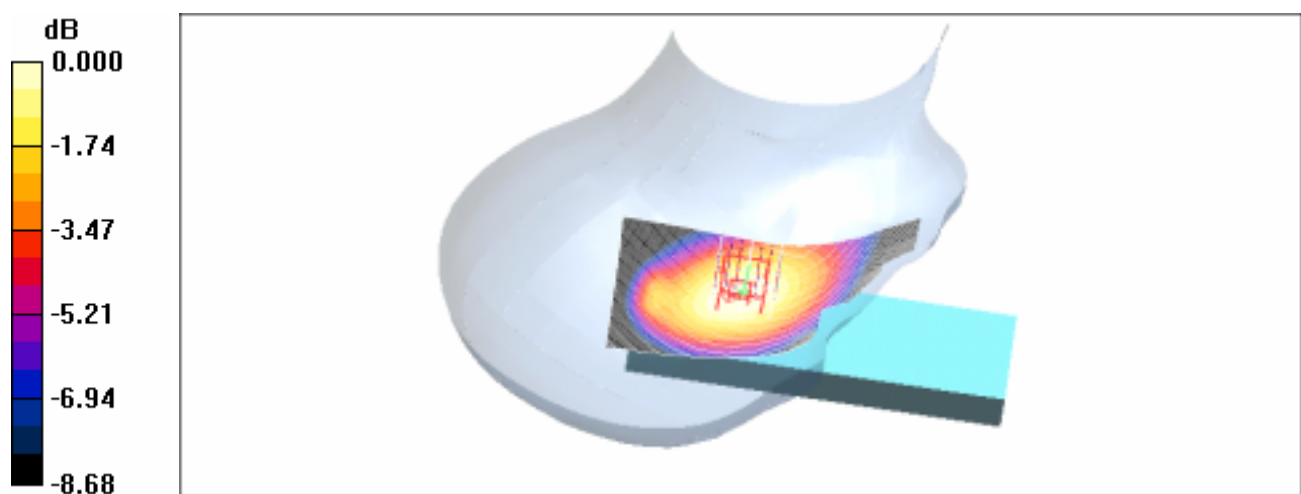

0 dB = 0.308mW/g

RightTilt190-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\epsilon = 0.863$ mho/m; $\mu = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.276 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

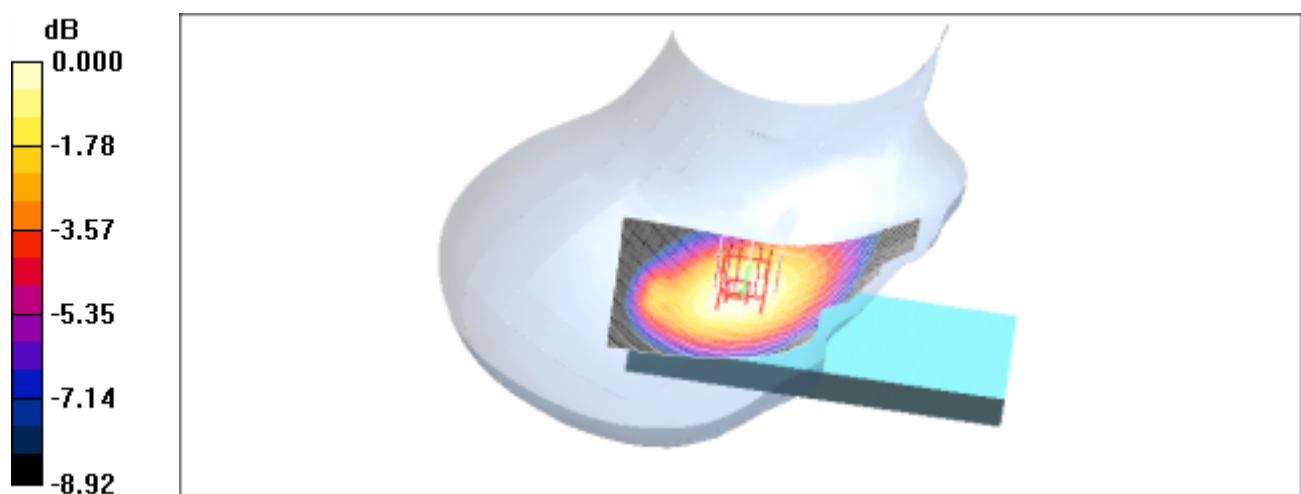

0 dB = 0.276mW/g

RightTilt251-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\epsilon = 0.891$ mho/m; $\mu = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.301 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.302 mW/g

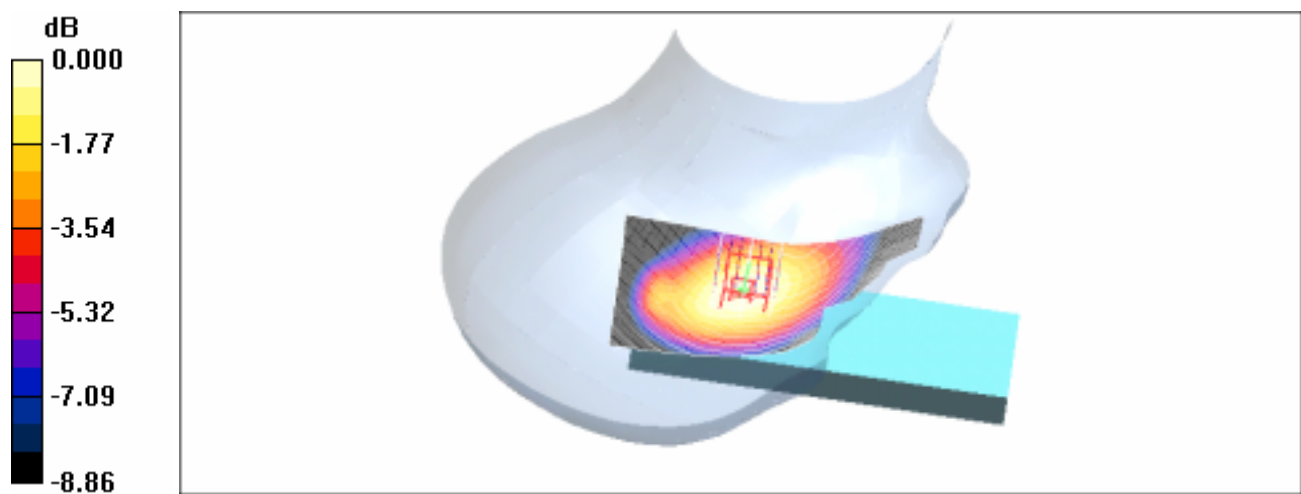

0 dB = 0.302mW/g

LeftTilt128-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.278 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

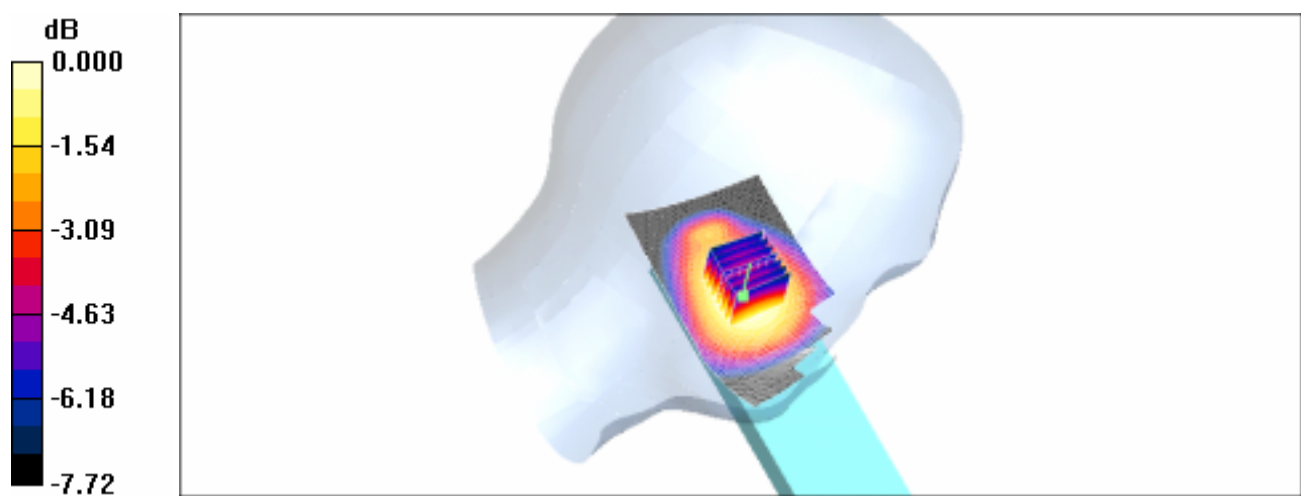

LeftTilt190-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.240 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.242 mW/g

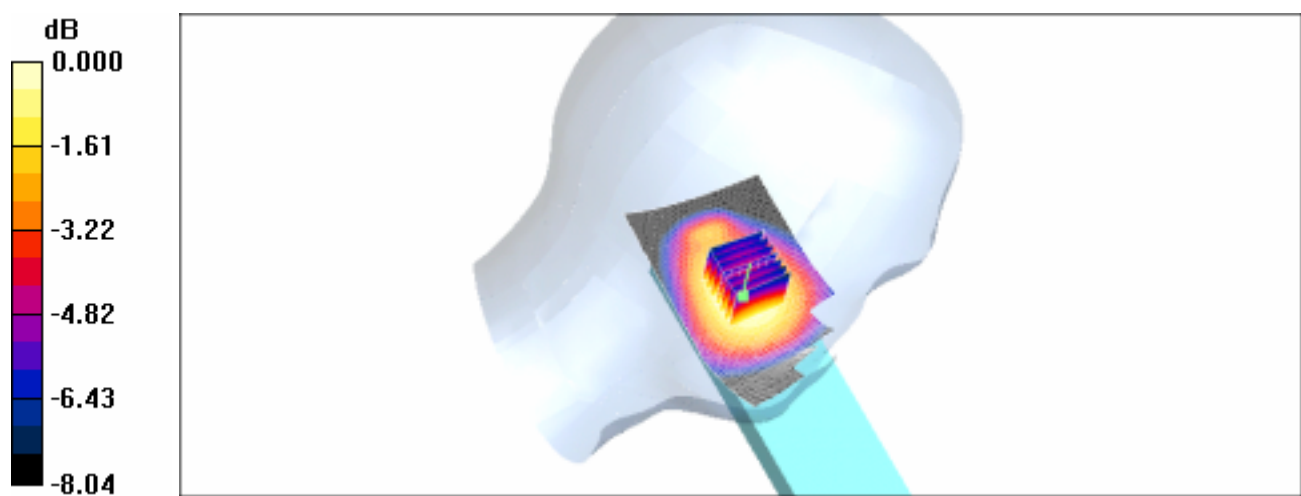

LeftTilt251-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.891$ mho/m; $\rho = 41.9$; $\mu = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.263 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

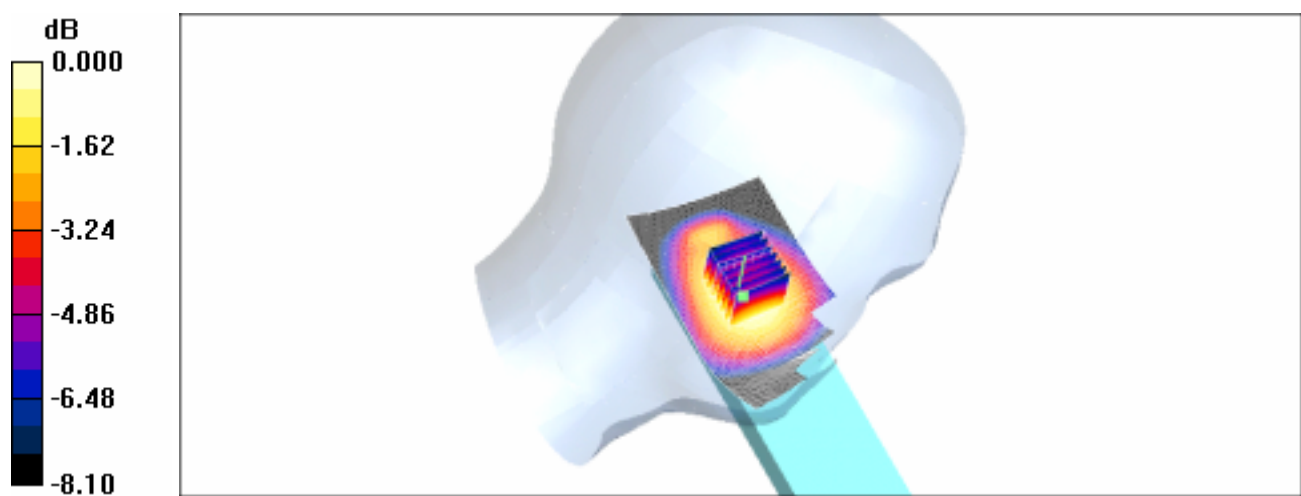

0 dB = 0.262mW/g

BodyCH128_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.848 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.67 V/m; Power Drift = -0.299 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.795 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 0.842 mW/g

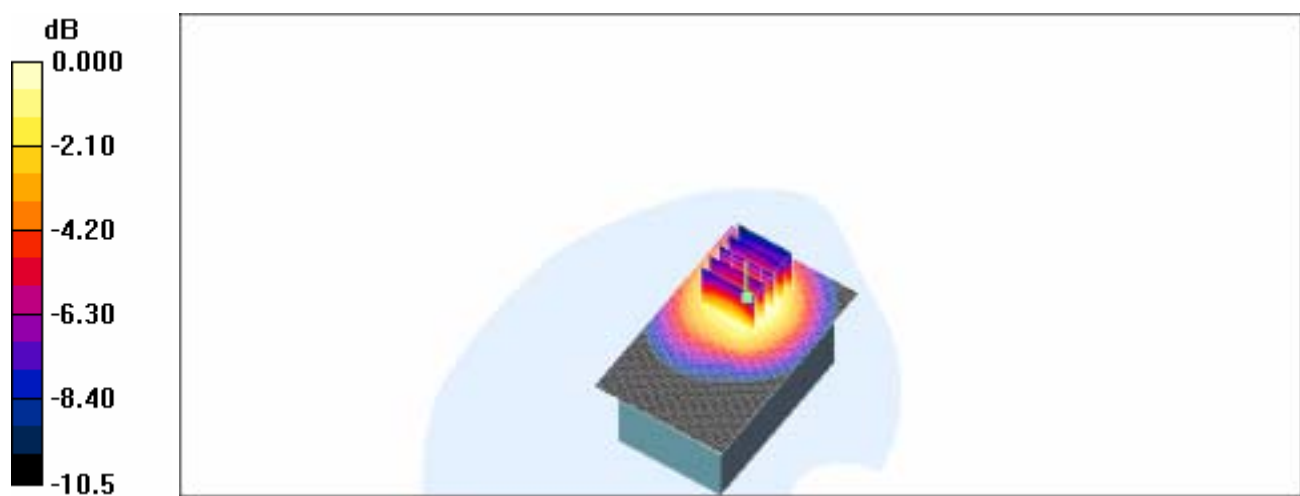

0 dB = 0.842mW/g

BodyCH190_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.852 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.72 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.555 mW/g

Maximum value of SAR (measured) = 0.829 mW/g

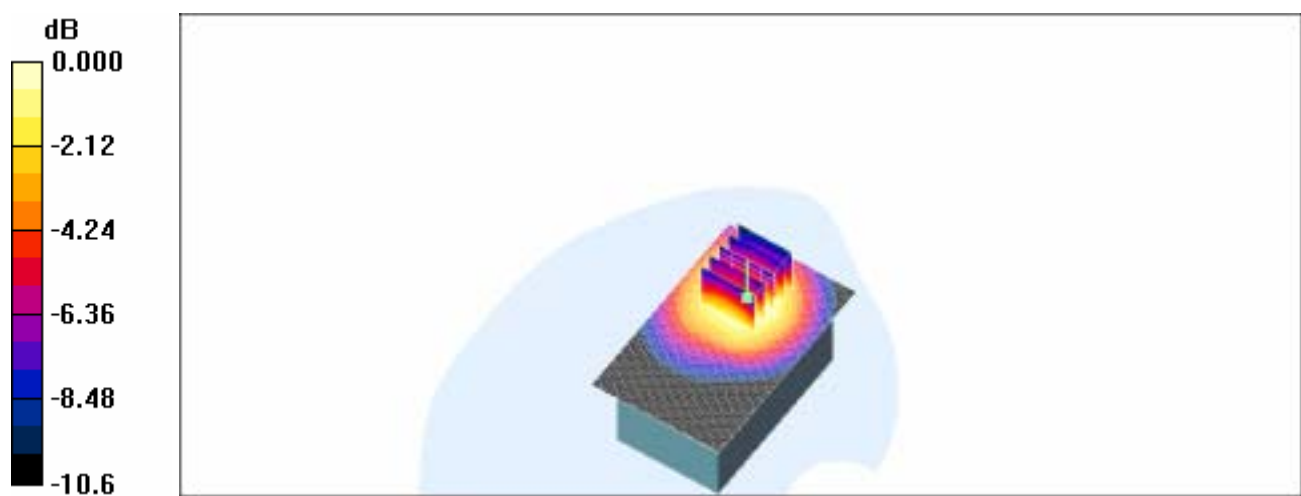

0 dB = 0.829mW/g

BodyCH251_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g


BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.64 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.520 mW/g

Maximum value of SAR (measured) = 0.771 mW/g

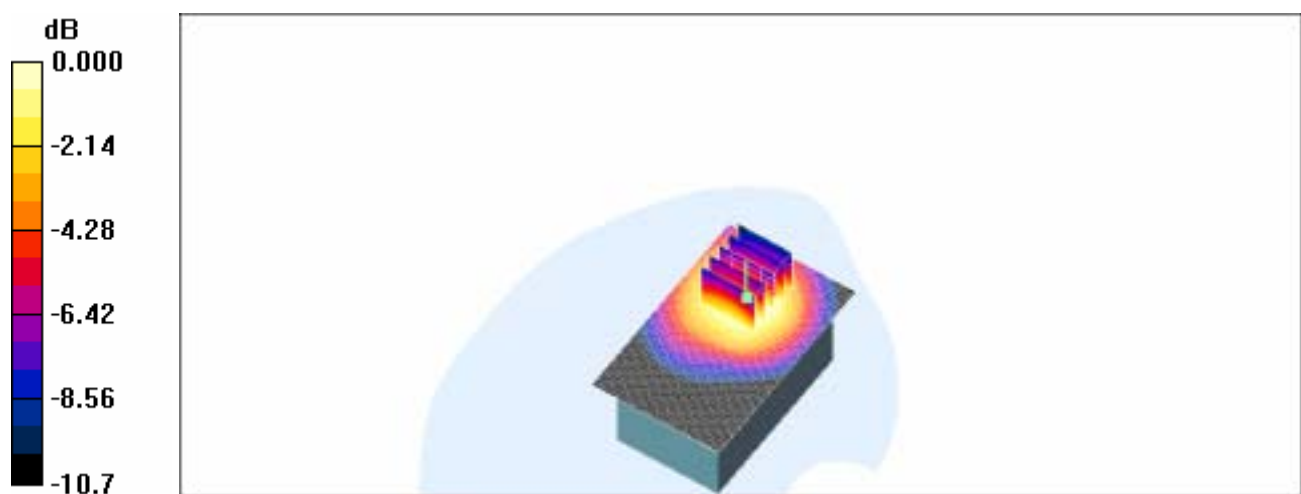

0 dB = 0.771mW/g

BodyCH128_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;

$r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.609 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.28 V/m; Power Drift = -0.231 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.606 mW/g

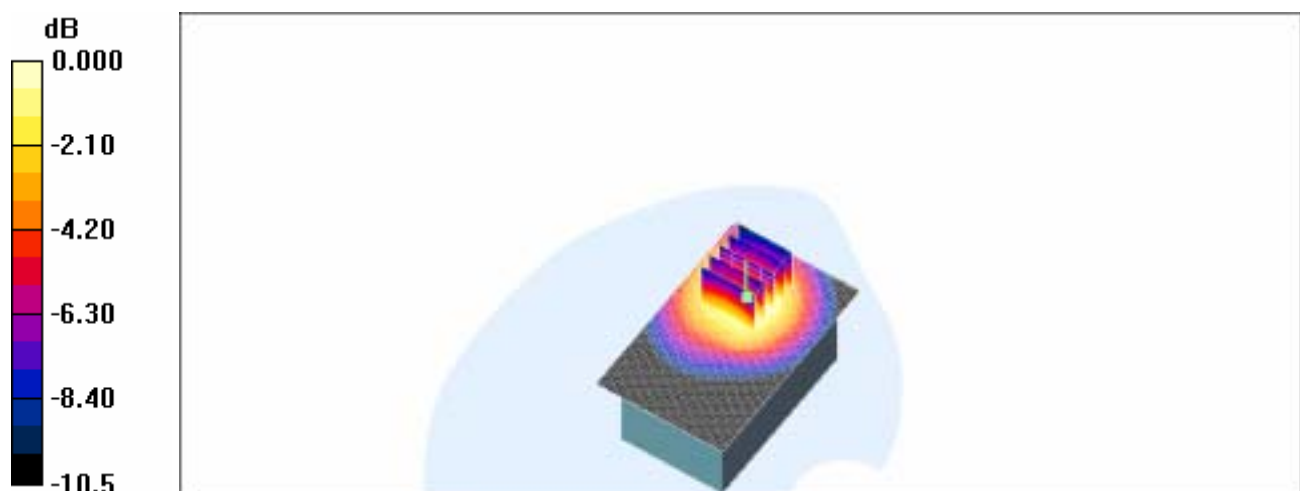

0 dB = 0.606mW/g

BodyCH190_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.609 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.27 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.606 mW/g

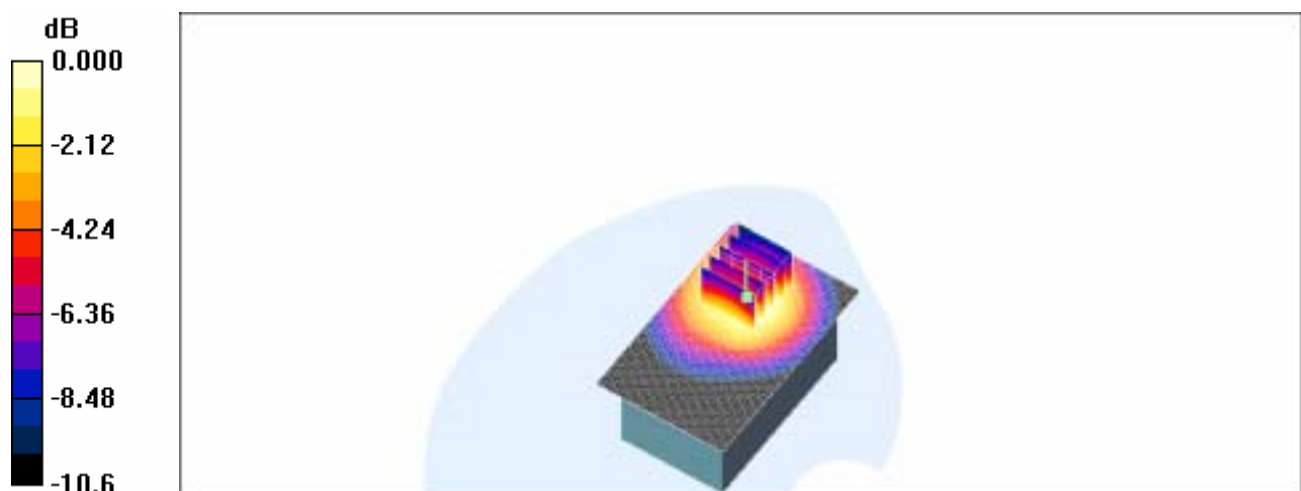

0 dB = 0.606mW/g

BodyCH251_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 850; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.586 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.31 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.614 mW/g

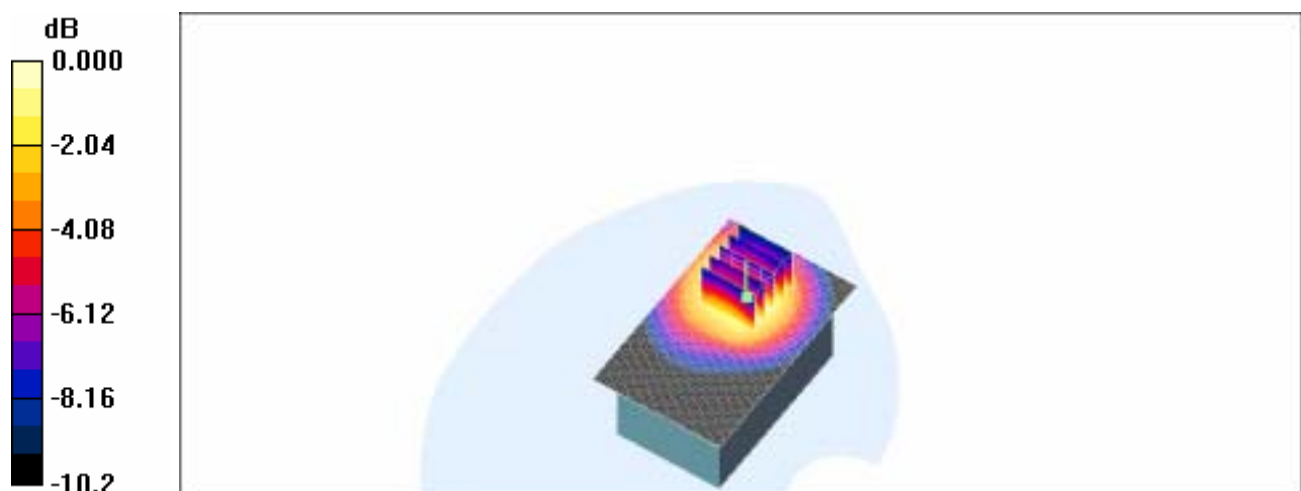

0 dB = 0.614mW/g

BodyCH128_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.317 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.303 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

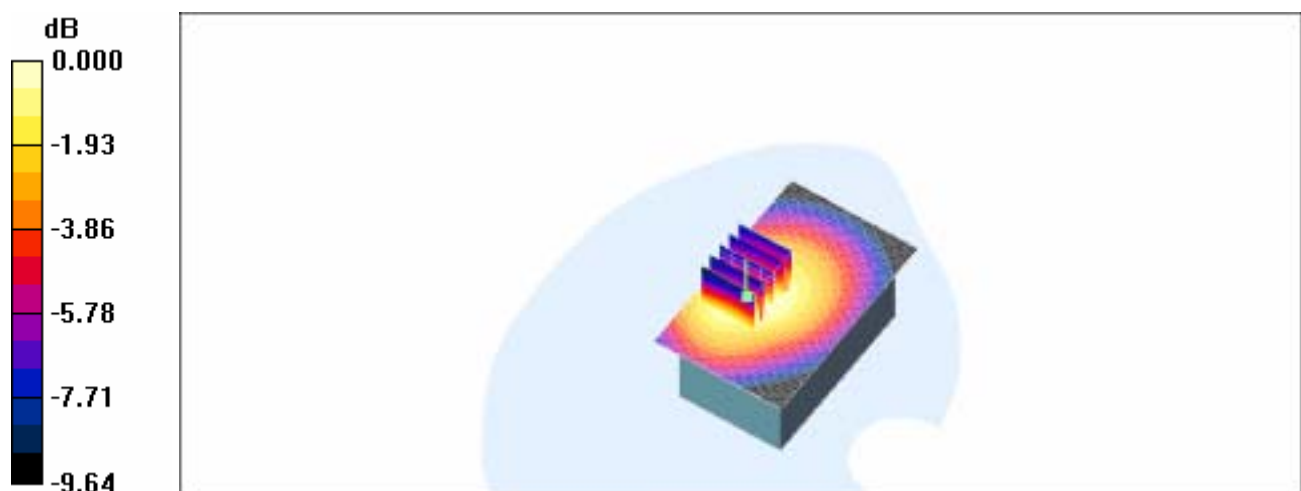

0 dB = 0.314mW/g

BodyCH190_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.322 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

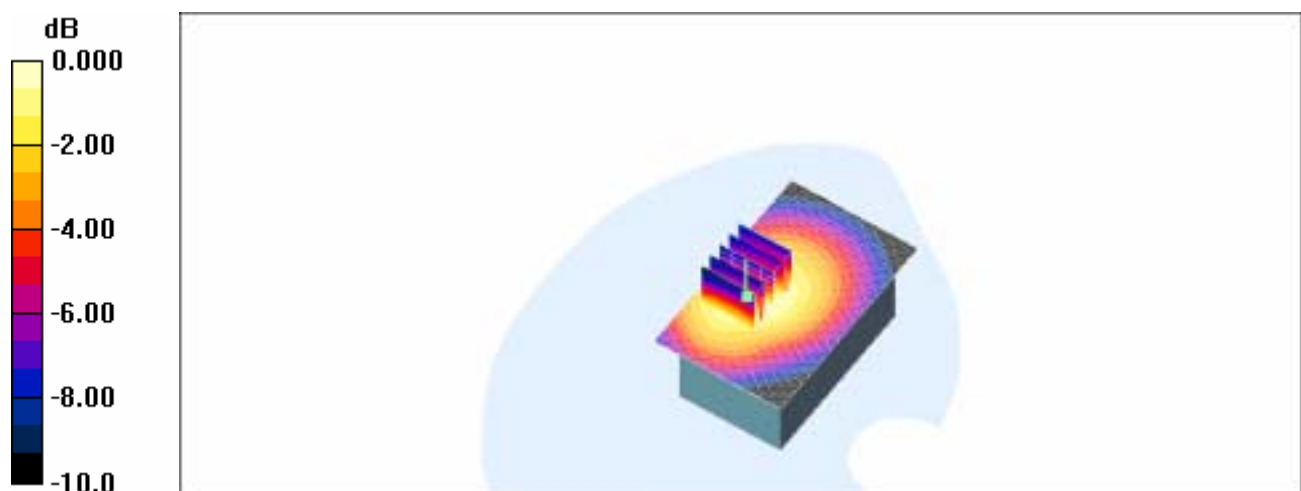

0 dB = 0.330mW/g

BodyCH251_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.299 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

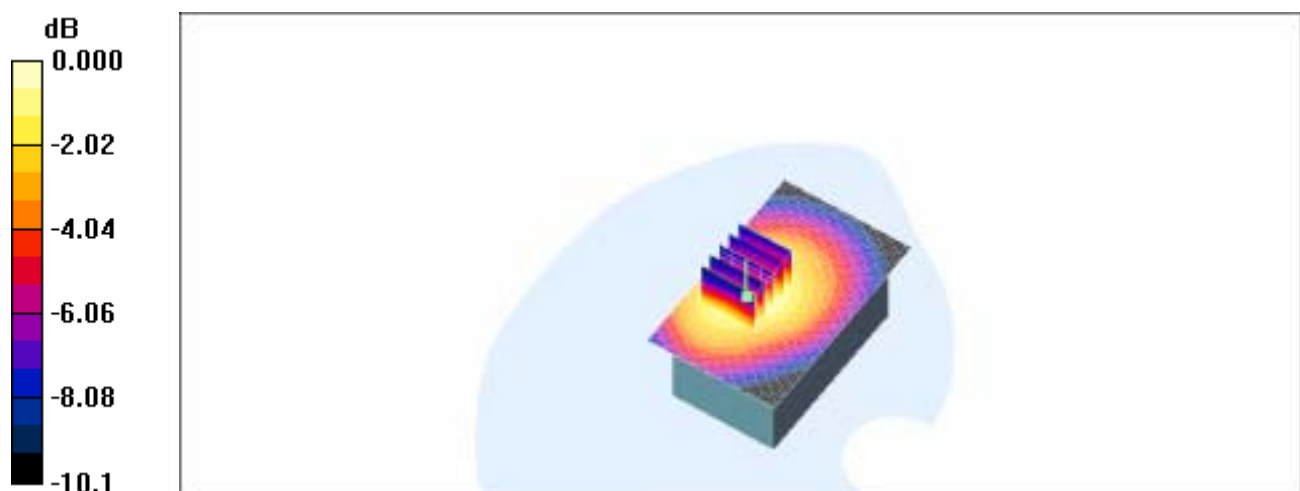

0 dB = 0.313mW/g

BodyCH128_Testing in EDGE mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;
 $r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.181 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.191 mW/g

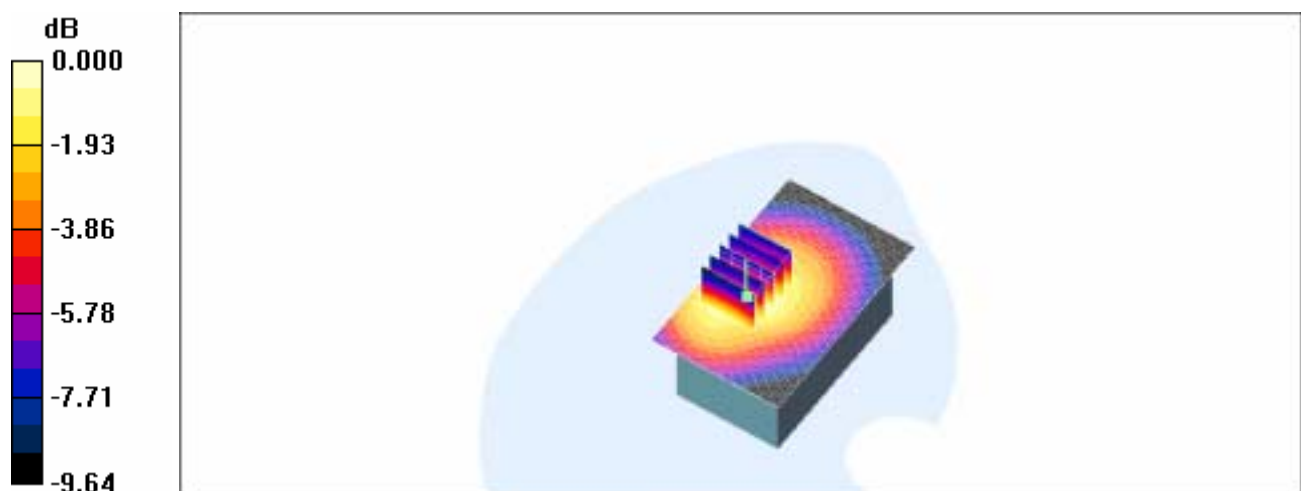

0 dB = 0.191mW/g

BodyCH190_Testing in EDGE mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.925$ mho/m;
 $\rho = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.50 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.210 mW/g

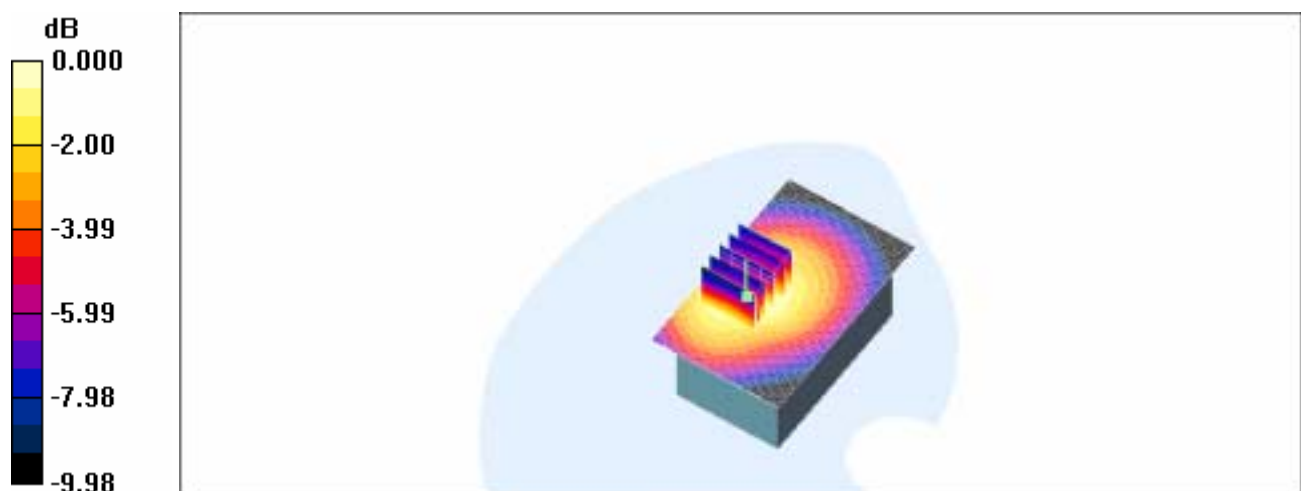

0 dB = 0.210mW/g

BodyCH251_Testing in EDGE mode, EUT front to phantom-With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.944$ mho/m;
 $\rho = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.271 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

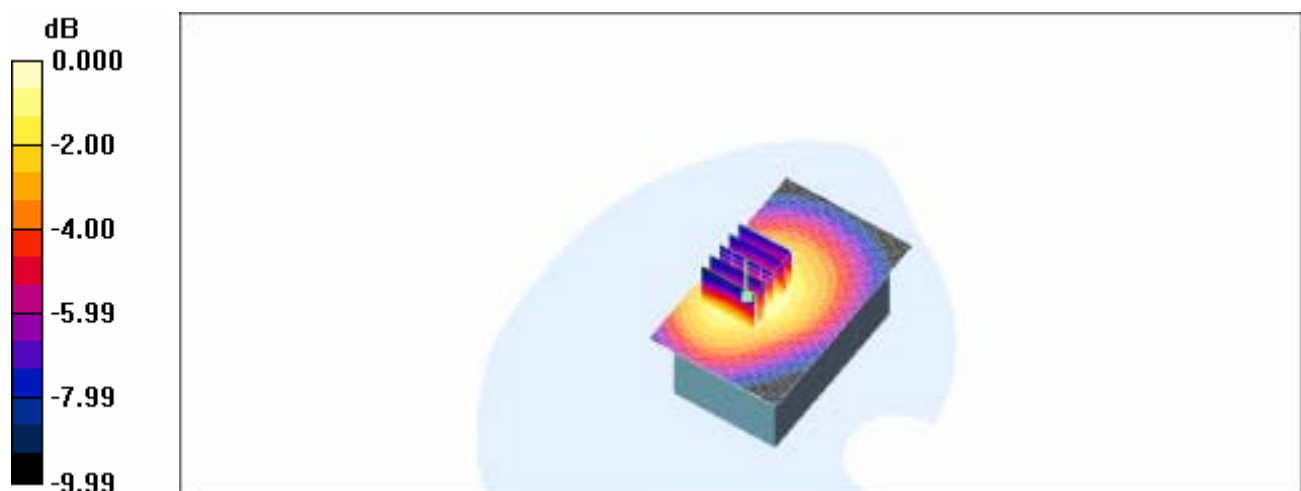

0 dB = 0.283mW/g

RightCheek512-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.293 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.07 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.281 mW/g

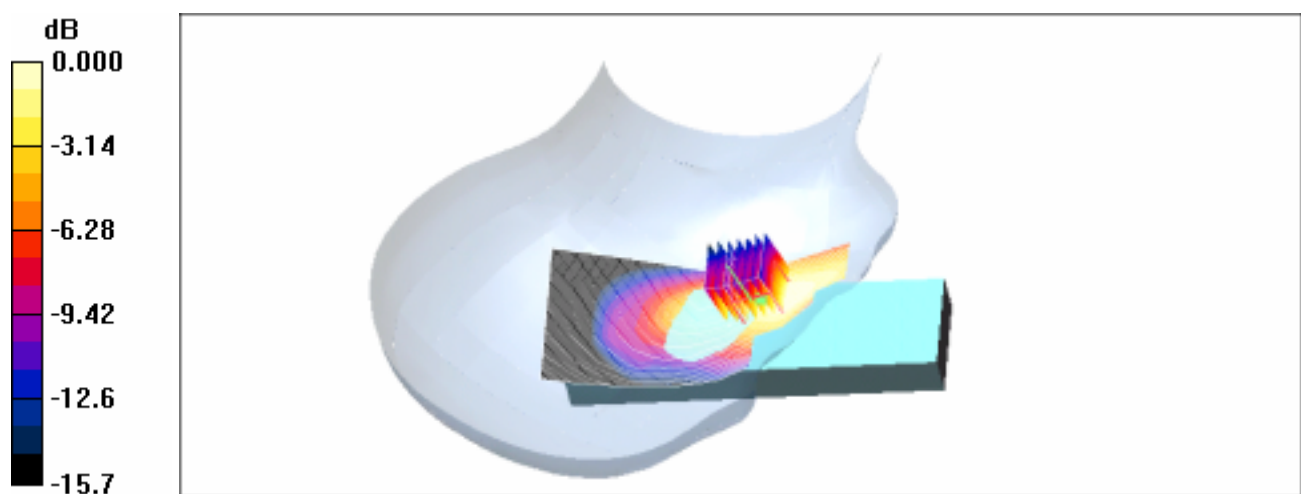

RightCheek661-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.253 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.89 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

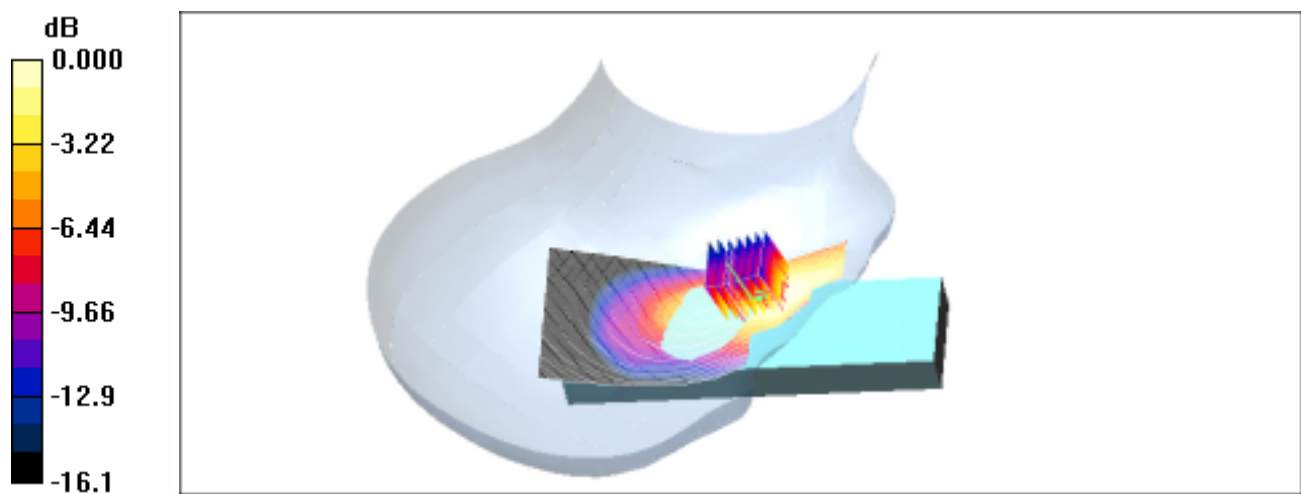

RightCheek810-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.330 mW/g


RightCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.16 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

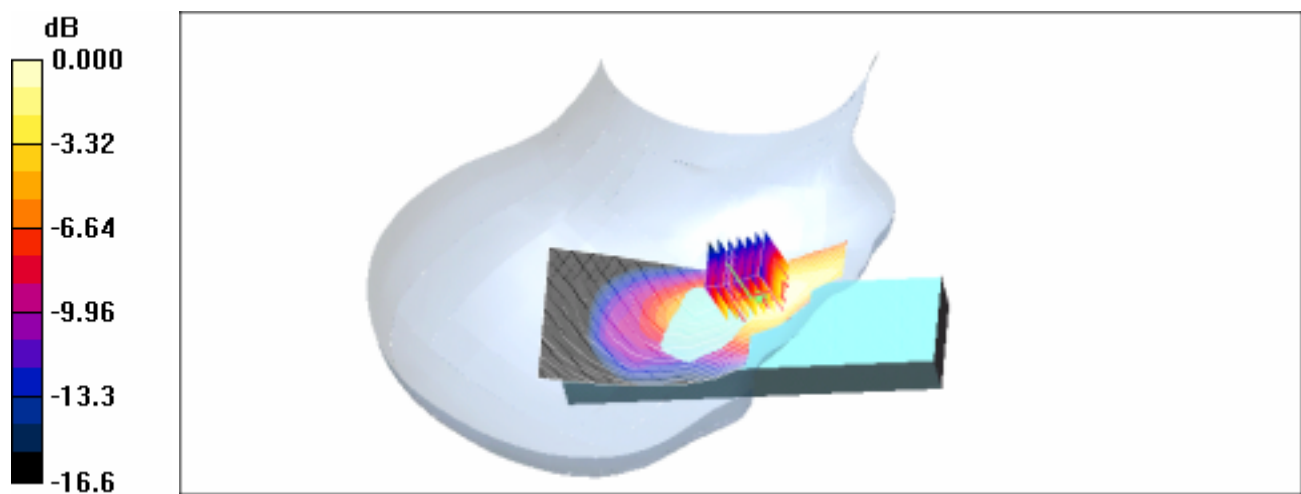

0 dB = 0.325mW/g

LeftCheek512-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1851$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.187 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.19 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

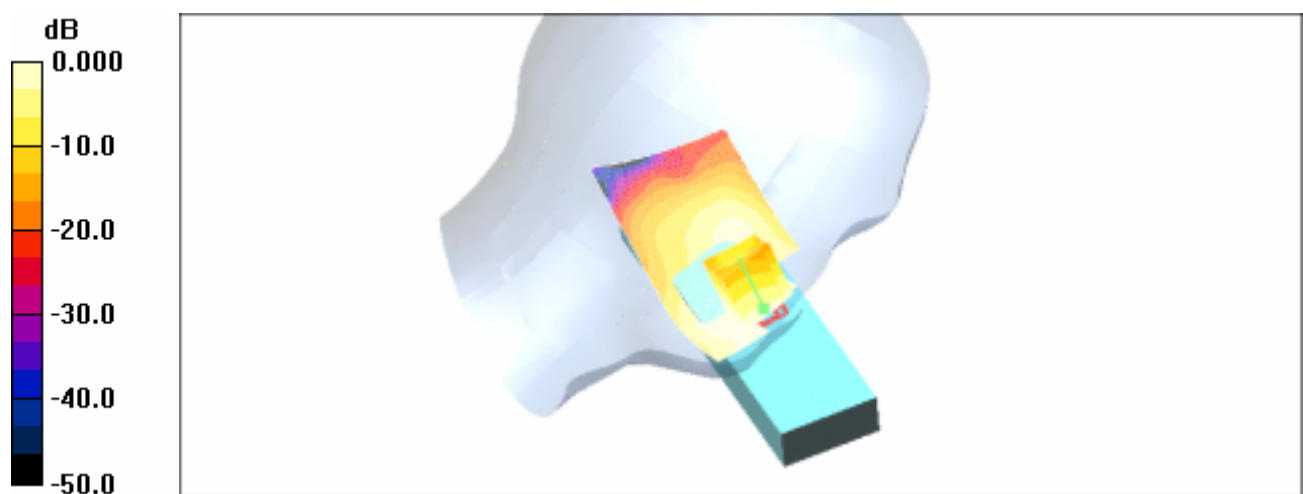

LeftCheek661-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.153 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.23 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

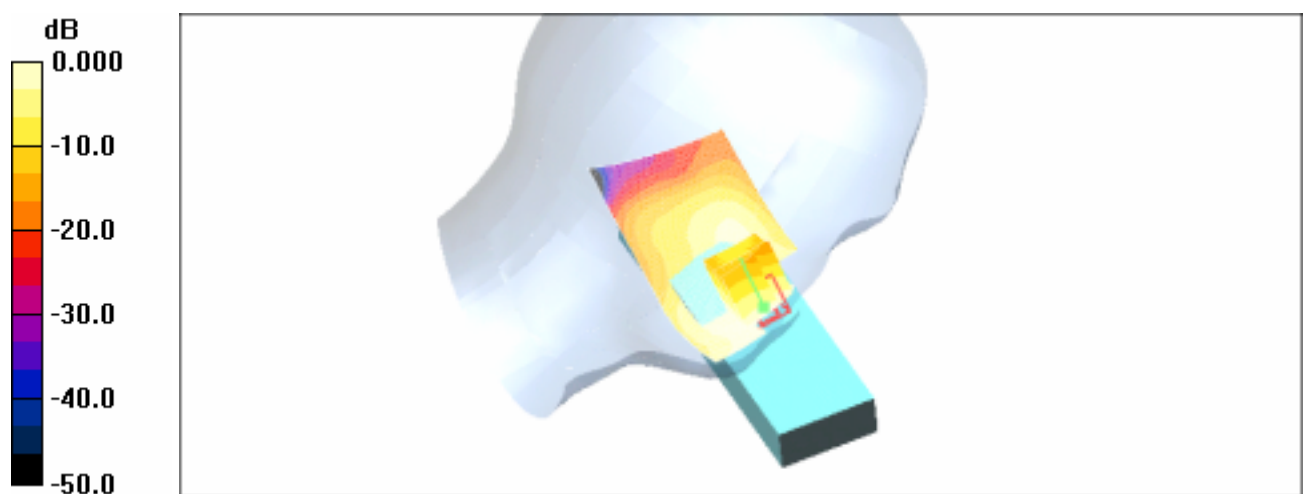

LeftCheek810-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910 \text{ MHz}$; $\epsilon = 1.45 \text{ mho/m}$; $\mu = 39.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftCheek/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.192 mW/g


LeftCheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.56 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

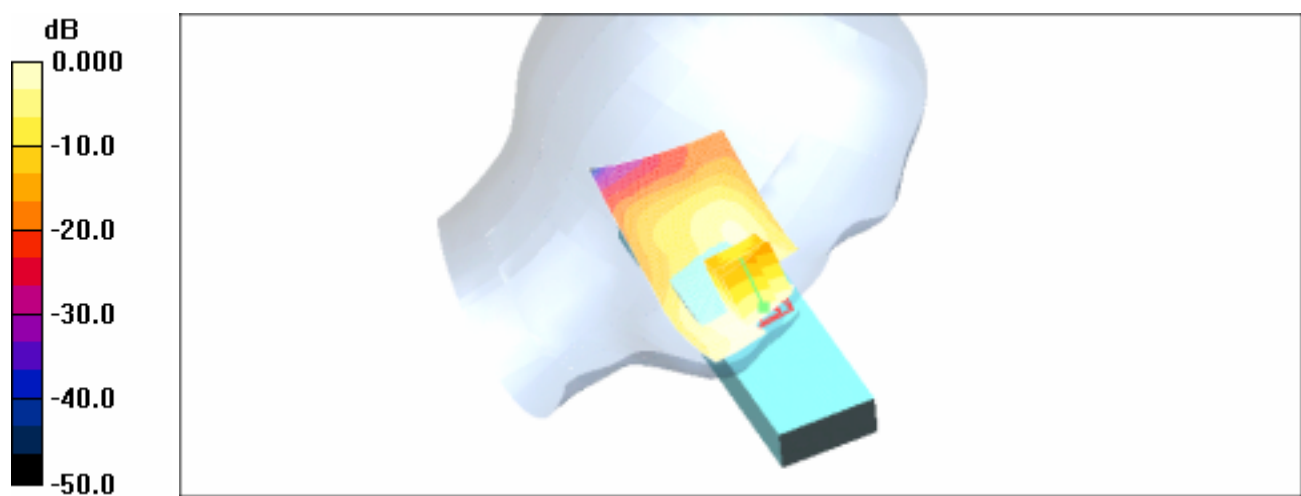

0 dB = 0.187mW/g

RightTilt512-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\rho = 39.6$; $\mu = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.099 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.99 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

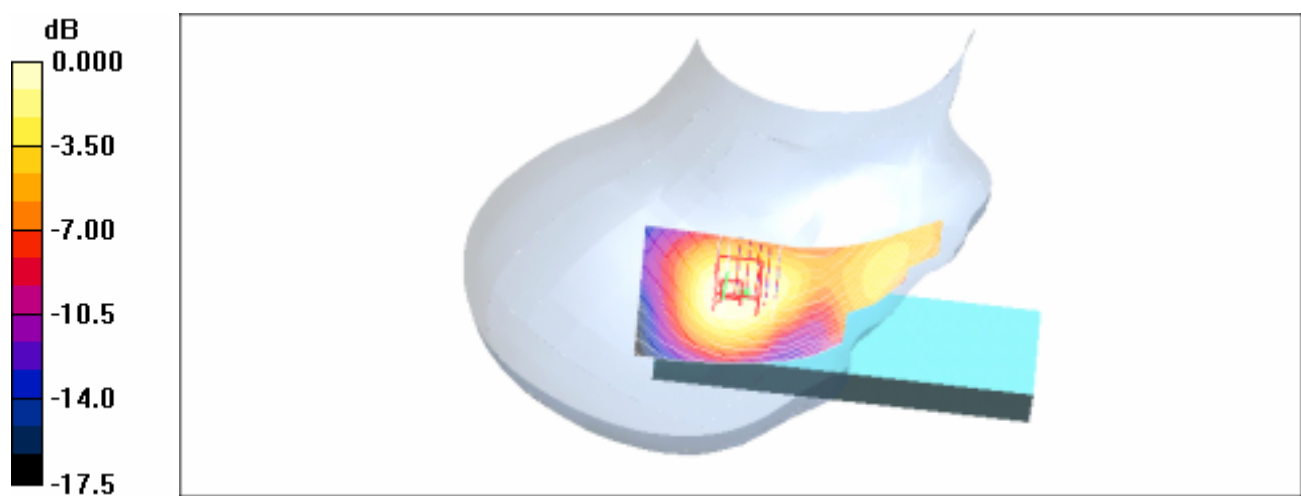

0 dB = 0.096mW/g

RightTilt661-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.078 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.63 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

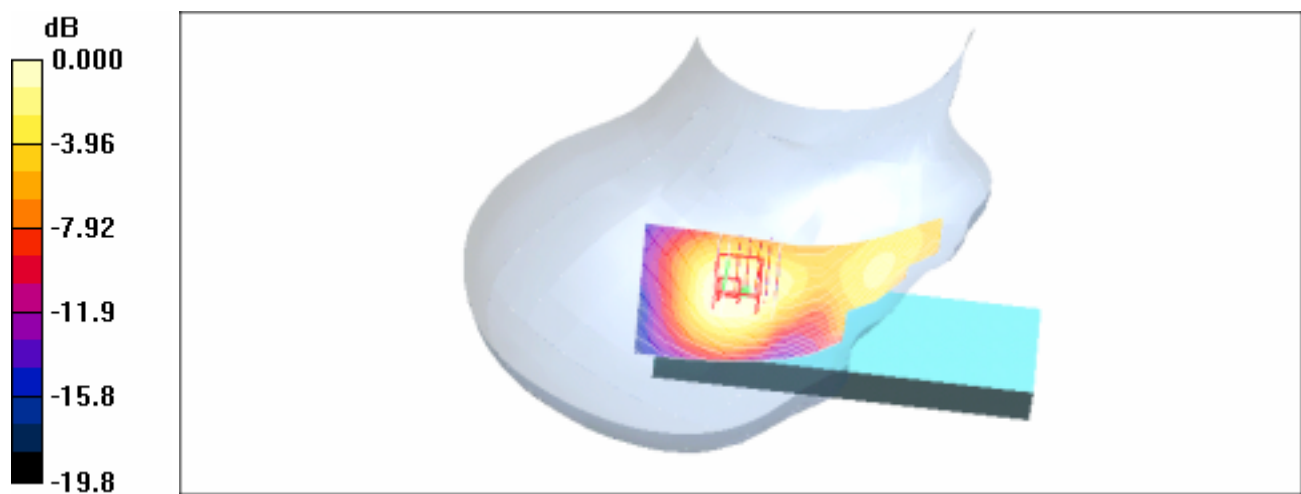

0 dB = 0.077mW/g

RightTilt810-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\epsilon = 1.45$ mho/m; $\mu = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RightTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.095 mW/g


RightTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.18 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.093 mW/g

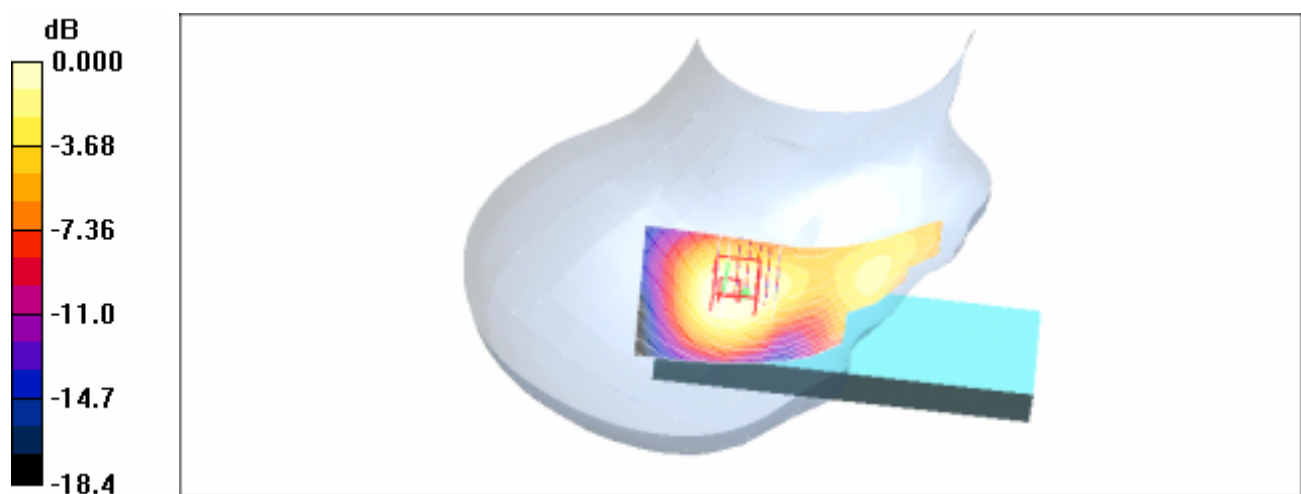

0 dB = 0.093mW/g

LeftTilt512-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.134 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.65 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

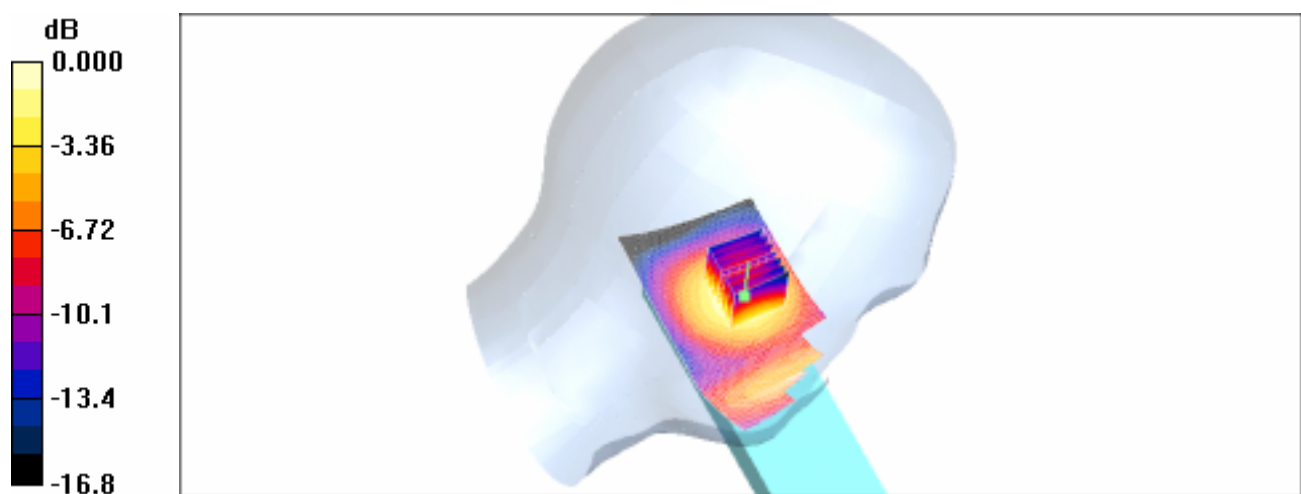

0 dB = 0.129mW/g

LeftTilt661-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1880$ MHz; $\epsilon = 1.42$ mho/m; $\mu = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.109 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.48 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

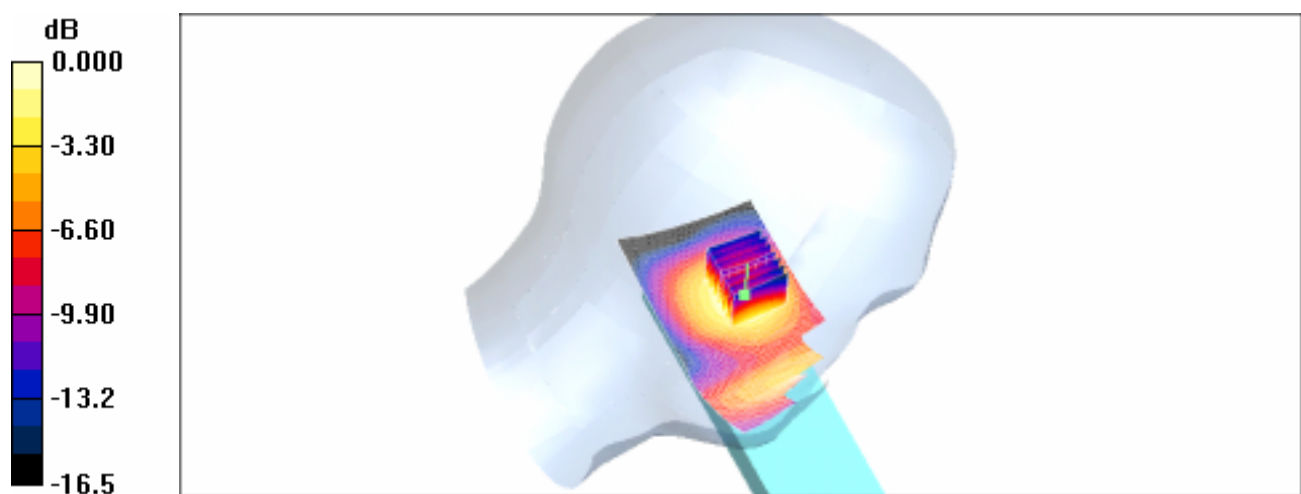

0 dB = 0.106mW/g

LeftTilt810-With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\epsilon = 1.45$ mho/m; $\mu = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LeftTilt/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.133 mW/g


LeftTilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.19 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

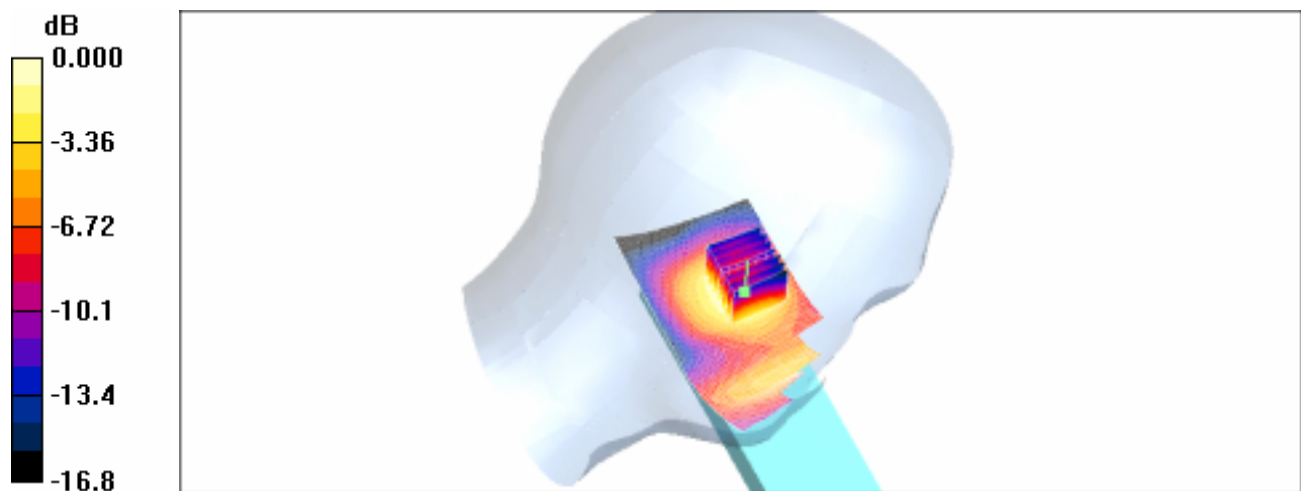

0 dB = 0.132mW/g

BodyCH512_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\rho = 53.4$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.164 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.80 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.173 mW/g

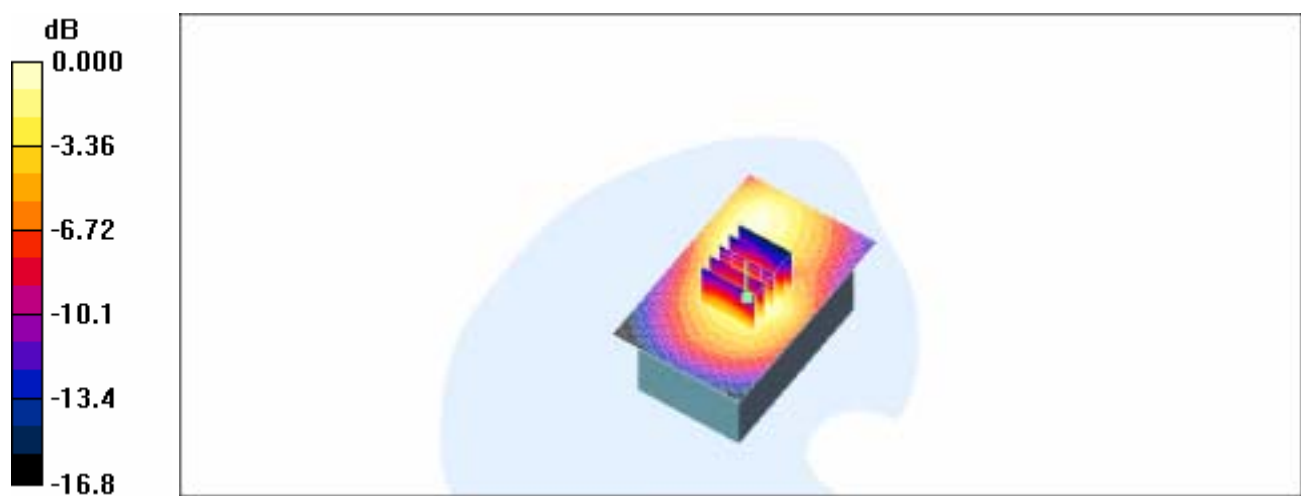

BodyCH661_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.149 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.86 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.147 mW/g

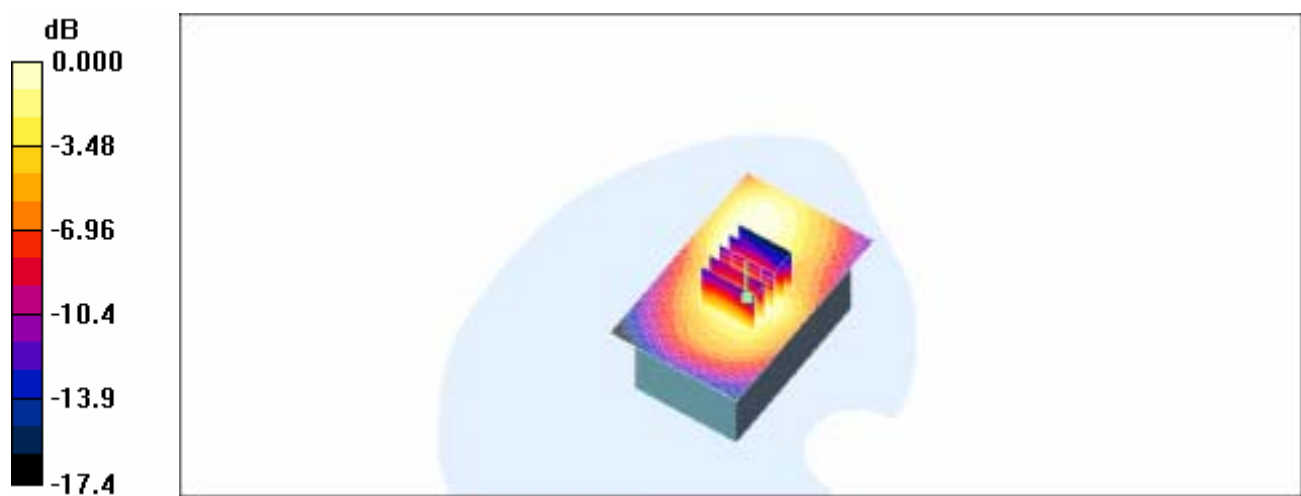

0 dB = 0.147mW/g

BodyCH810_Testing in GPRS mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

GPRS/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.112 mW/g


GPRS/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.35 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

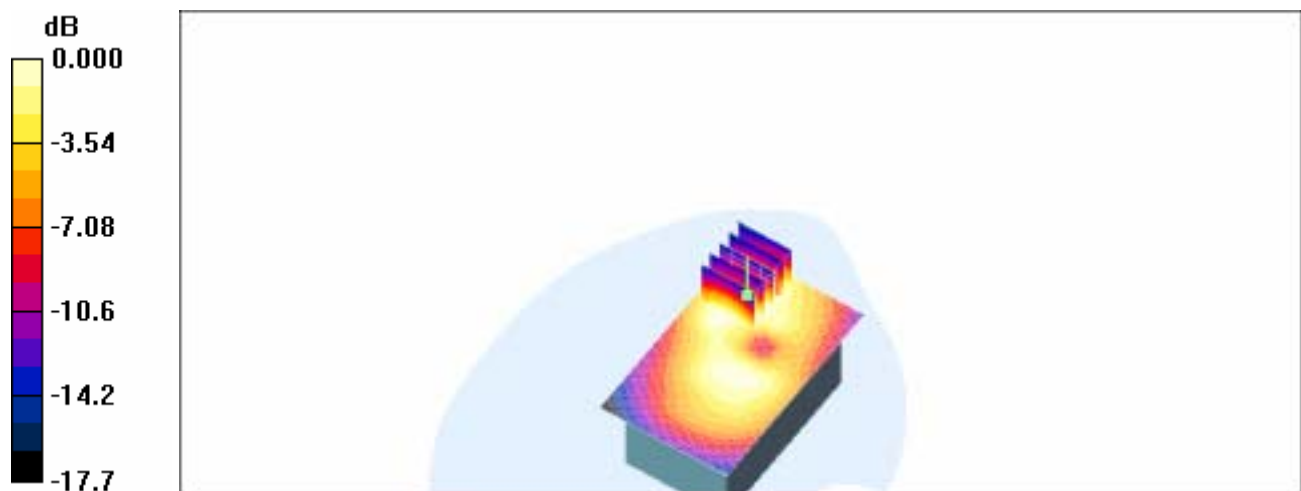

0 dB = 0.107mW/g

BodyCH512_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.065 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.28 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.083 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

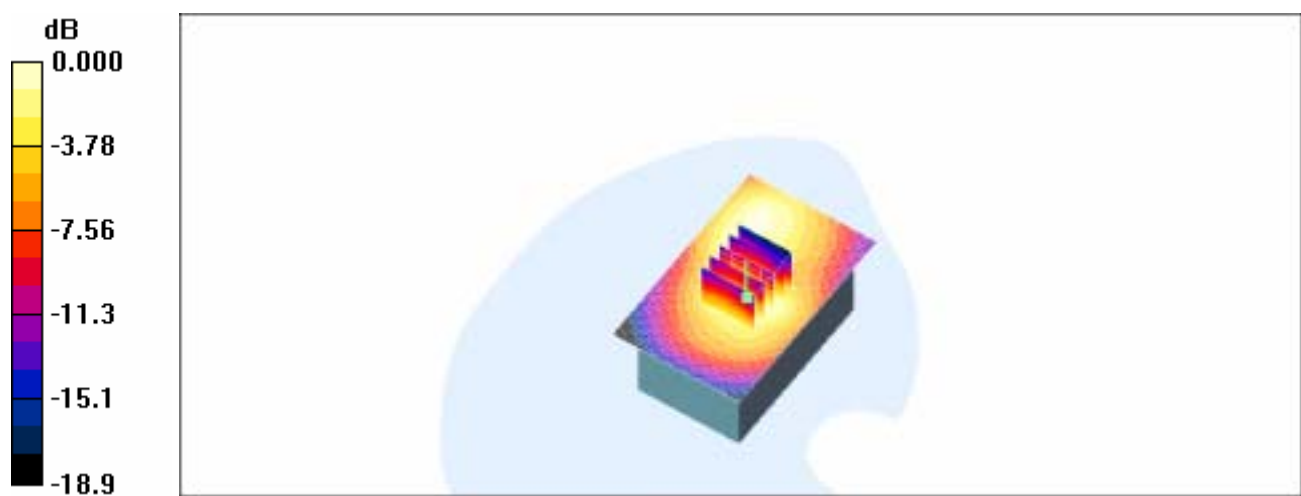

0 dB = 0.067mW/g

BodyCH661_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.059 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.059 mW/g

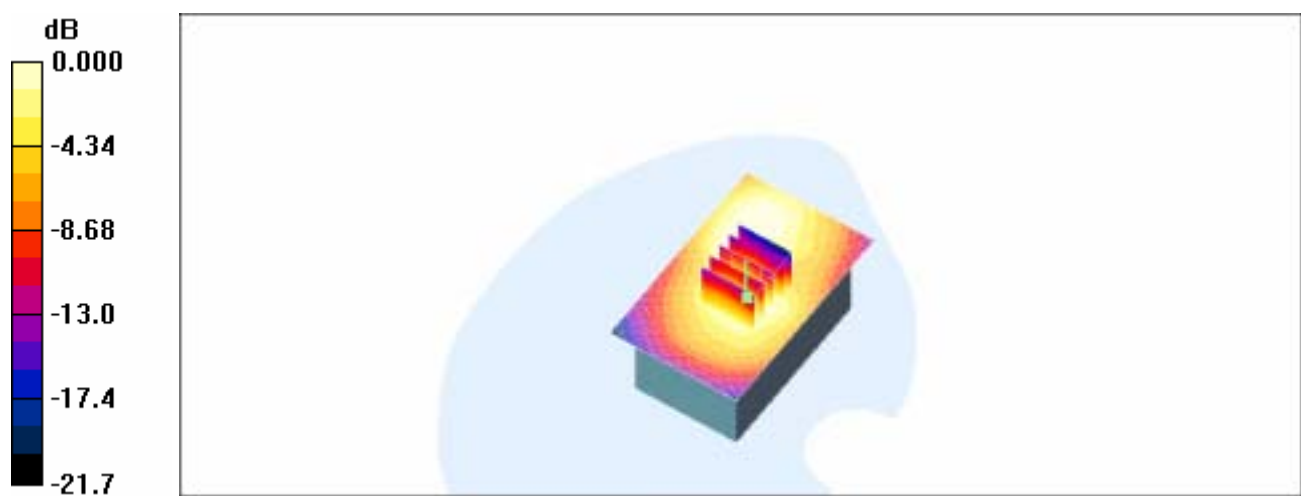

BodyCH810_Testing in EDGE mode, EUT back to phantom -With thick battery (Model: 161)

DUT: STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

EDGE/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.047 mW/g


EDGE/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.11 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.069 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

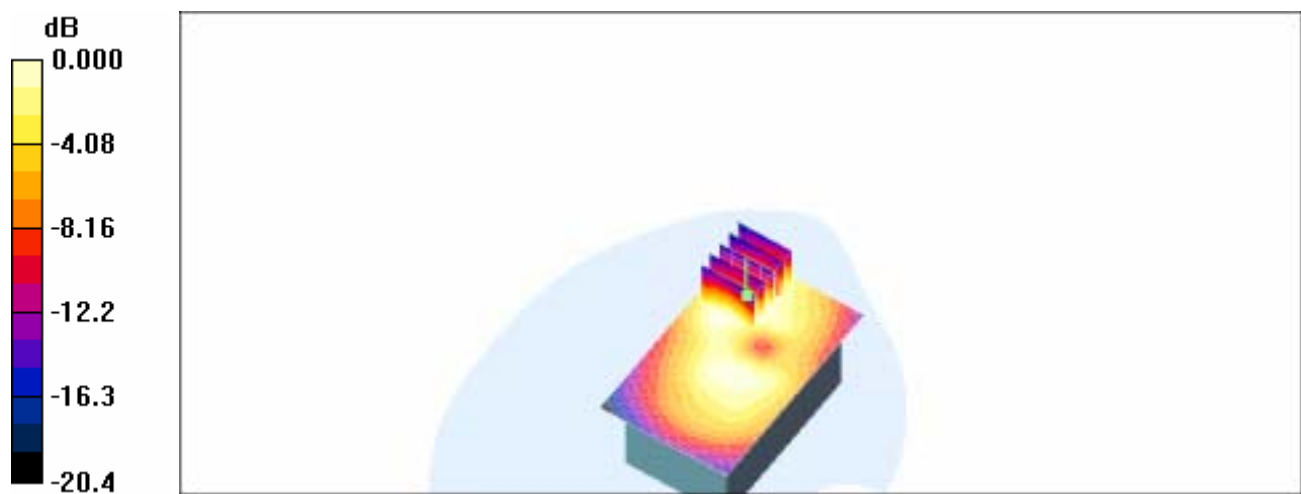

0 dB = 0.045mW/g

BodyCH512_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\rho = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.101 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.81 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

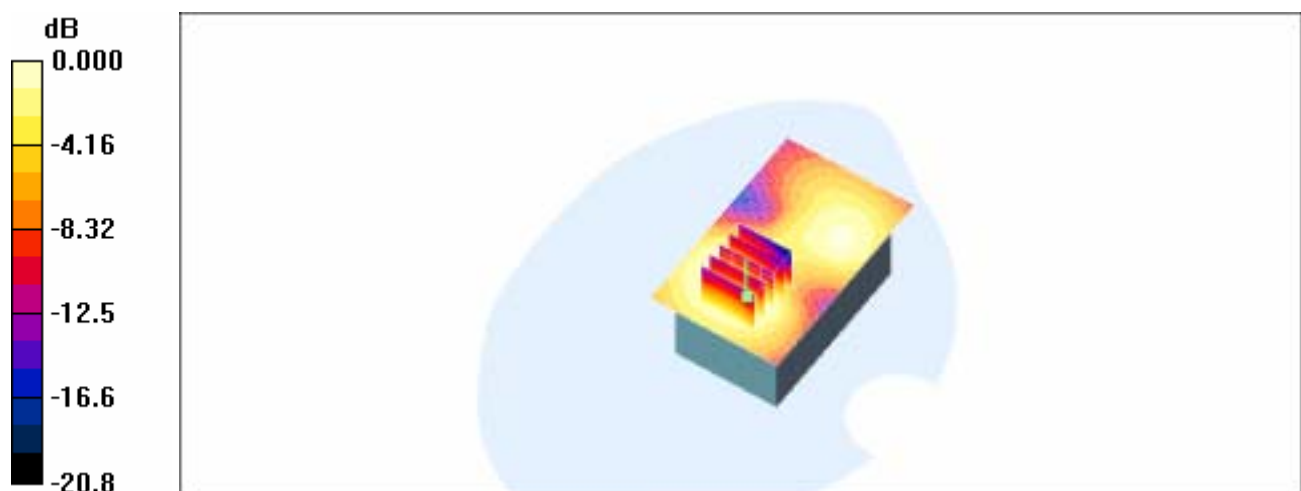

0 dB = 0.099mW/g

BodyCH661_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\rho = 53.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.107 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.09 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

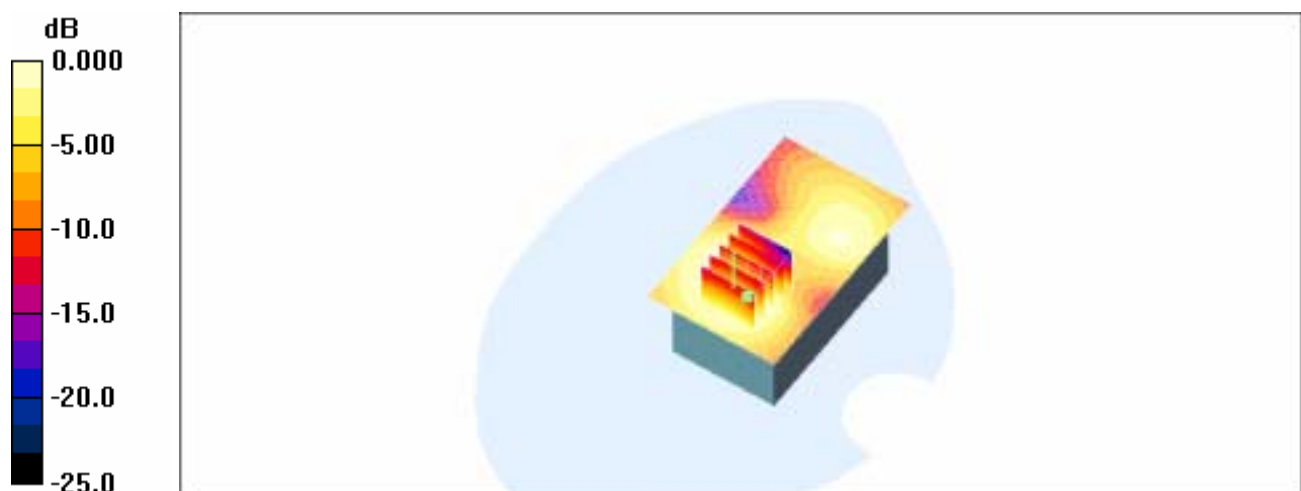

0 dB = 0.104mW/g

BodyCH810_Testing in GPRS mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.095 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.71 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

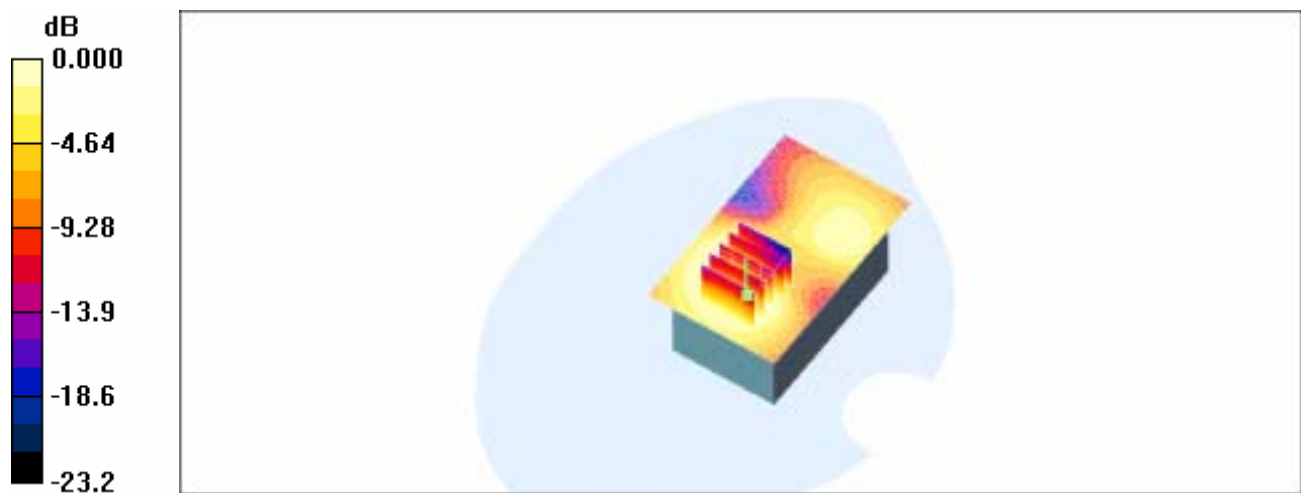

0 dB = 0.091mW/g

BodyCH512_Testing in EDGE mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\rho = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.042 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.21 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.060 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

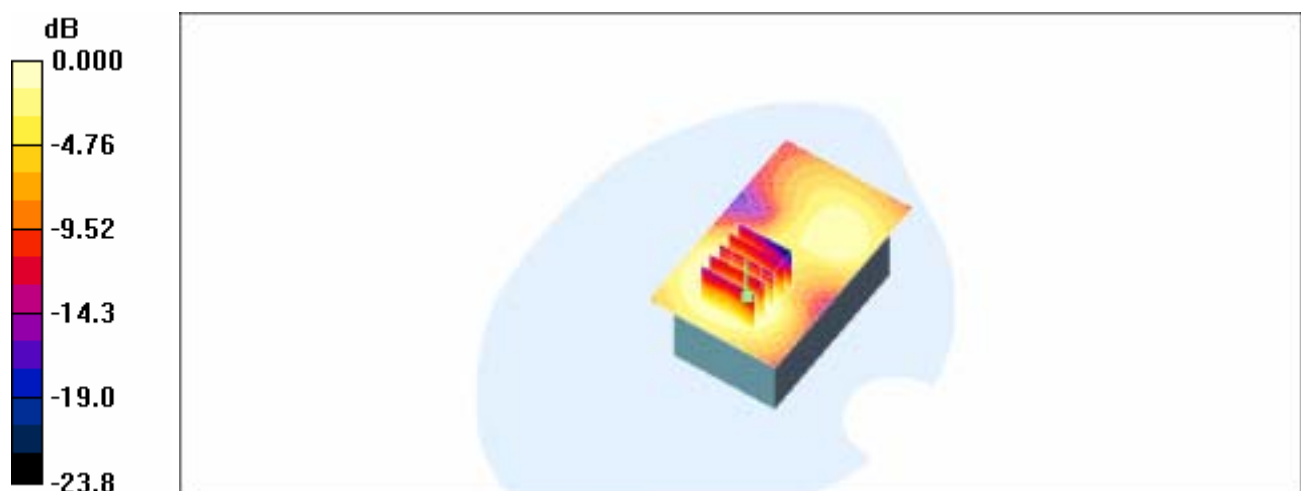

0 dB = 0.042mW/g

BodyCH661_Testing in EDGE mode, EUT front to phantom -With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\rho = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.046 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.37 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.066 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.046 mW/g



0 dB = 0.046mW/g

BodyCH810_Testing in EDGE mode, EUT front to phantom-With thick battery (Model: 161)

DUT: HTC-STAR100; Type: GSM 1900; Serial: 358167000038229

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\rho = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.038 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.25 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.055 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

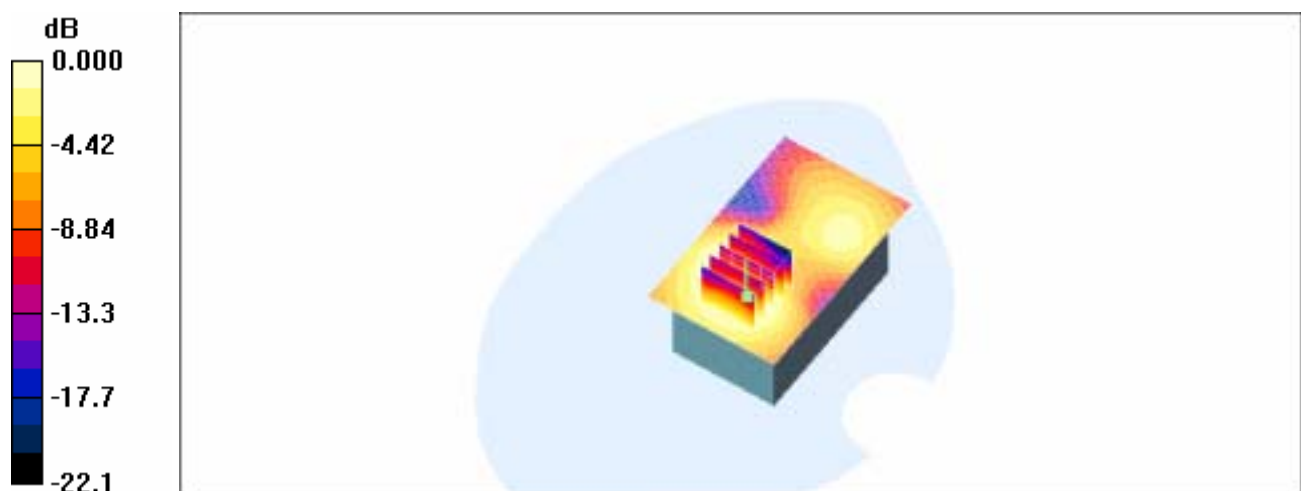

0 dB = 0.038mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 900$ MHz; $\sigma = 0.853$ mho/m; $\rho = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.01 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.6 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 4.18 W/kg

SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.81 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

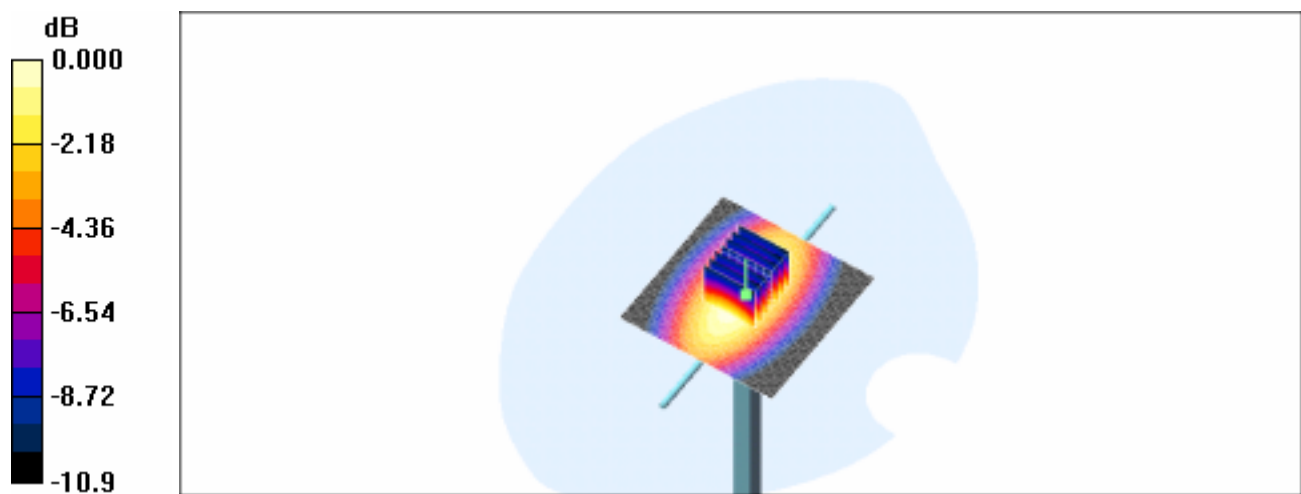

0 dB = 3.01mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 900$ MHz; $\sigma = 0.873$ mho/m; $\rho = 42.2$; $\mu = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.02 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.6 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 4.17 W/kg

SAR(1 g) = 2.78 mW/g; SAR(10 g) = 1.8 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

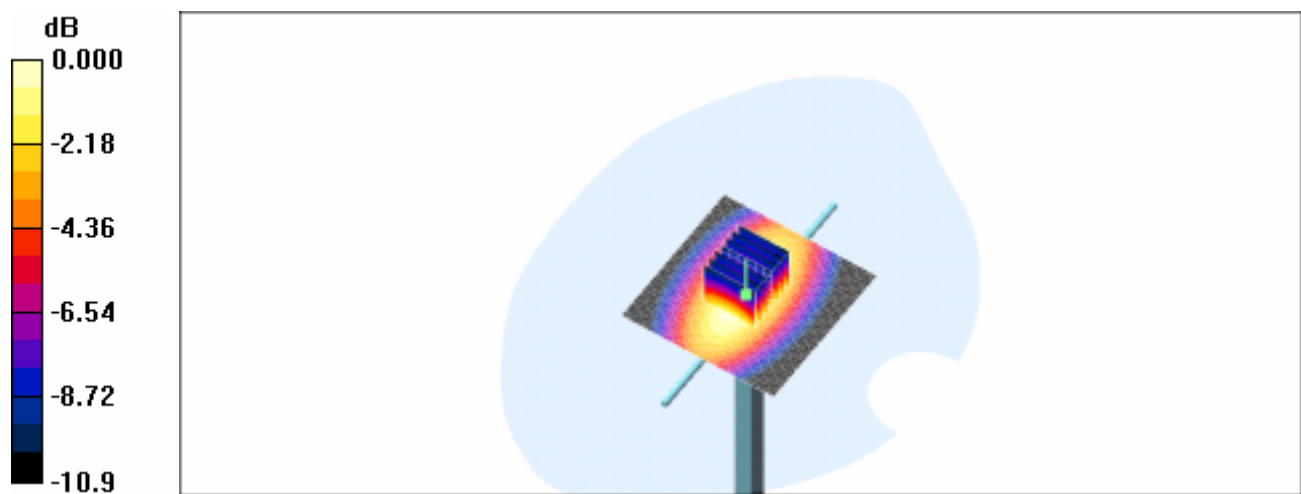

0 dB = 3.01mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mw/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.76 mW/g


Pin=250mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.0 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.74 mW/g

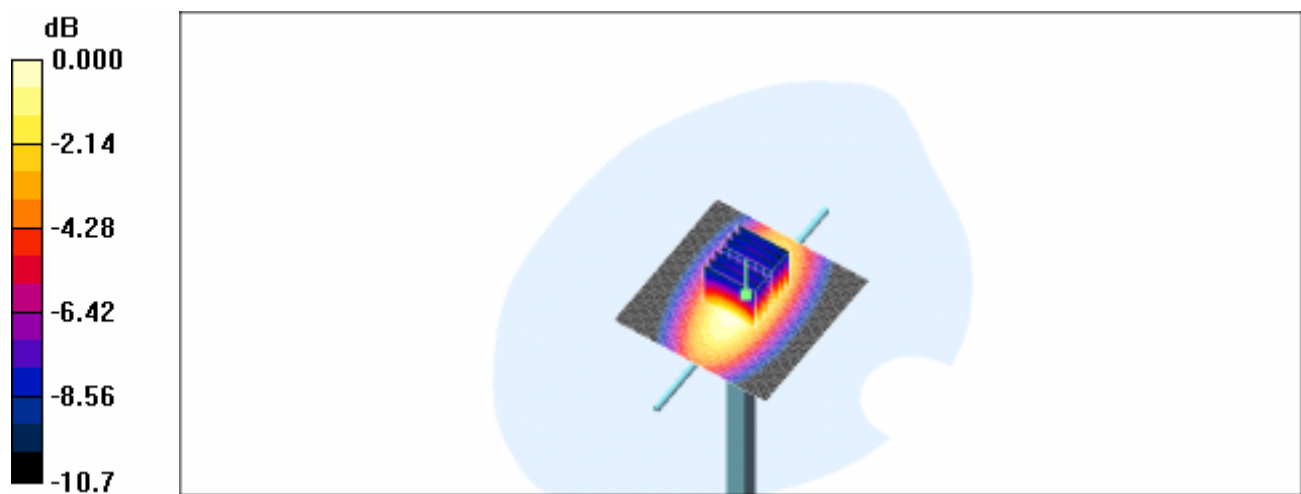

0 dB = 2.74mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 900 \text{ MHz}$; $\sigma = 0.994 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/2/14
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mw/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.71 mW/g


Pin=250mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.7 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.71 mW/g

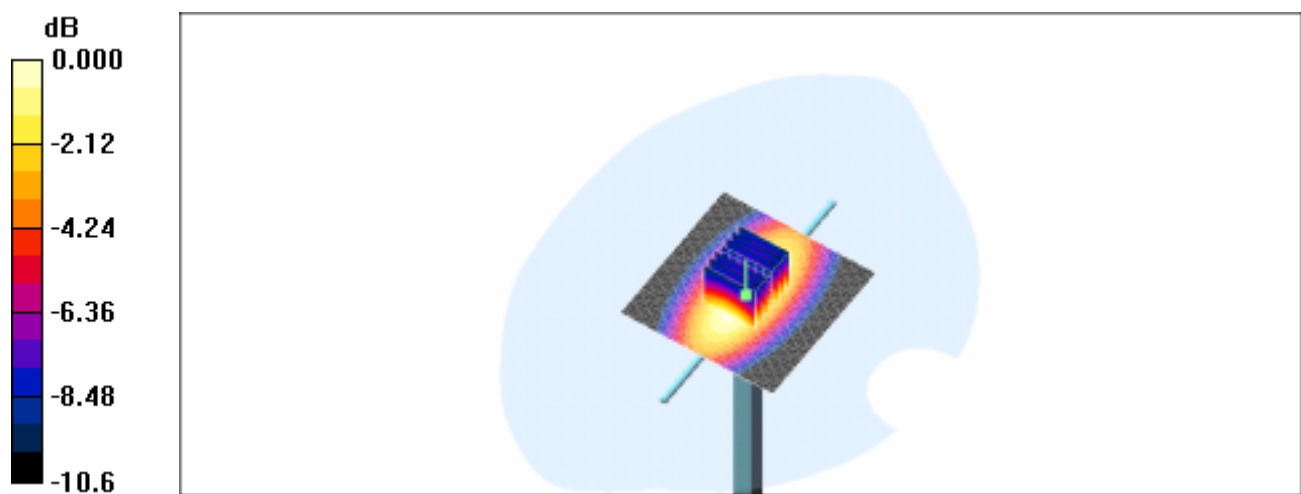

0 dB = 2.71mW/g

SAR System Performance Verification

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mw/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g


Pin=250mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.2 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

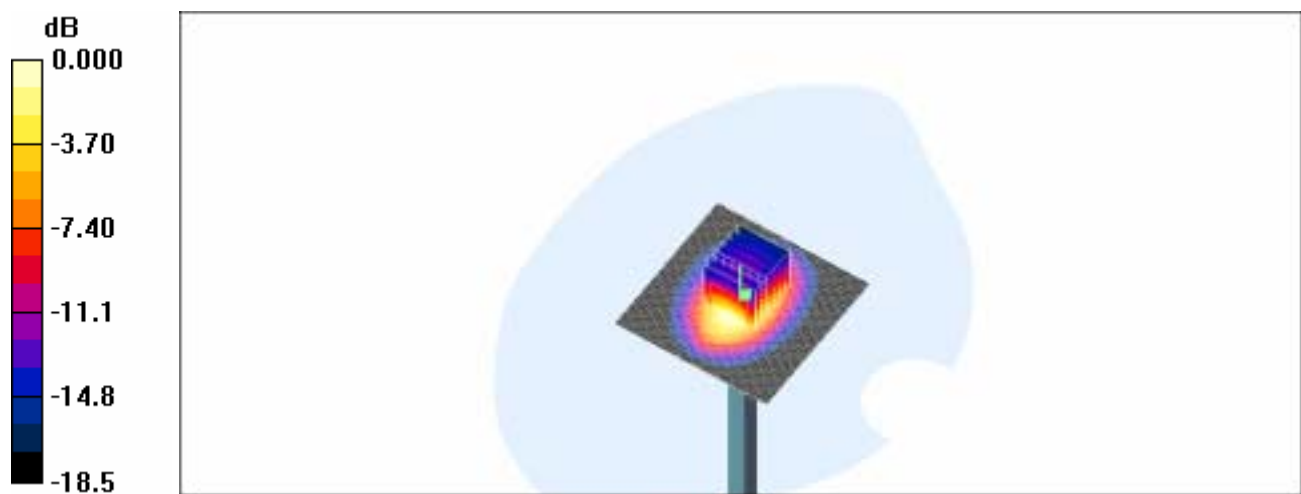

0 dB = 11.0mW/g

SAR System Performance Verification

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mw/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.6 mW/g


Pin=250mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.63 mW/g; SAR(10 g) = 5.04 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

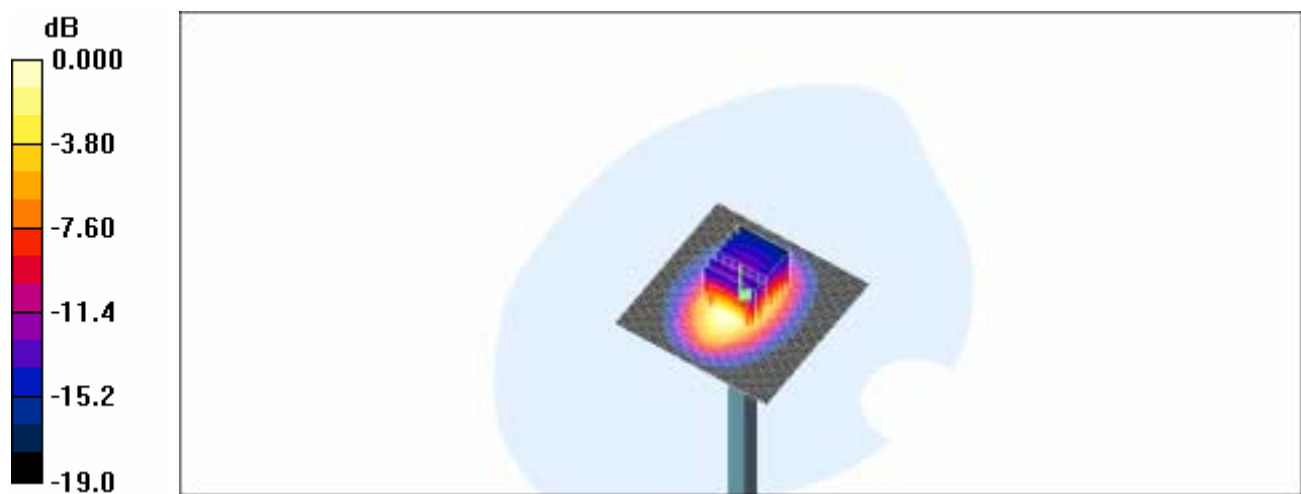

0 dB = 10.9mW/g

SAR System Performance Verification

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1800 & 1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.1 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.8 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

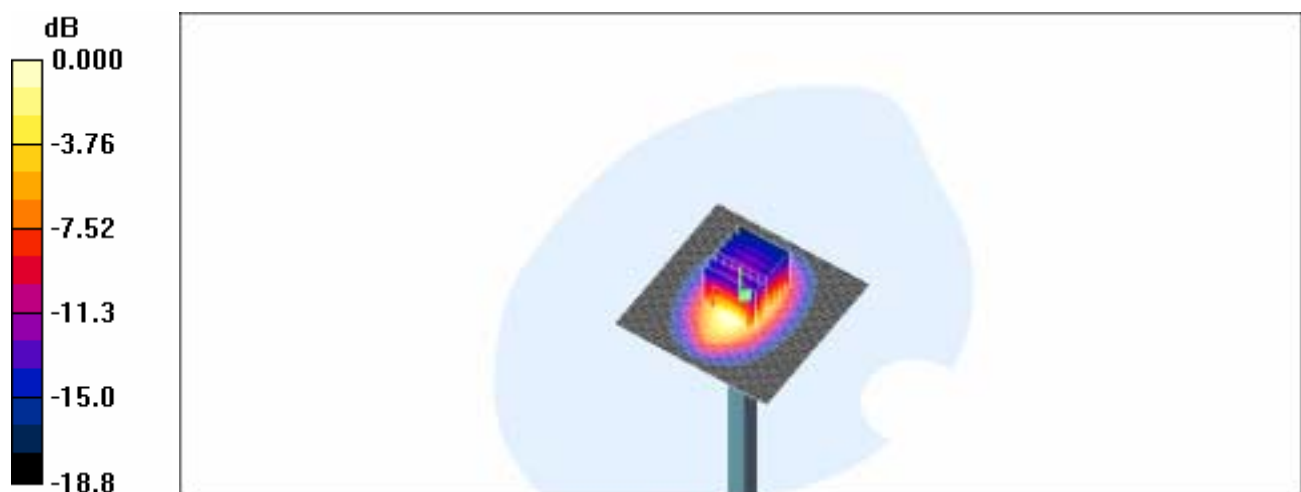

0 dB = 11.5mW/g