

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Low CH128/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 mW/g


Left Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

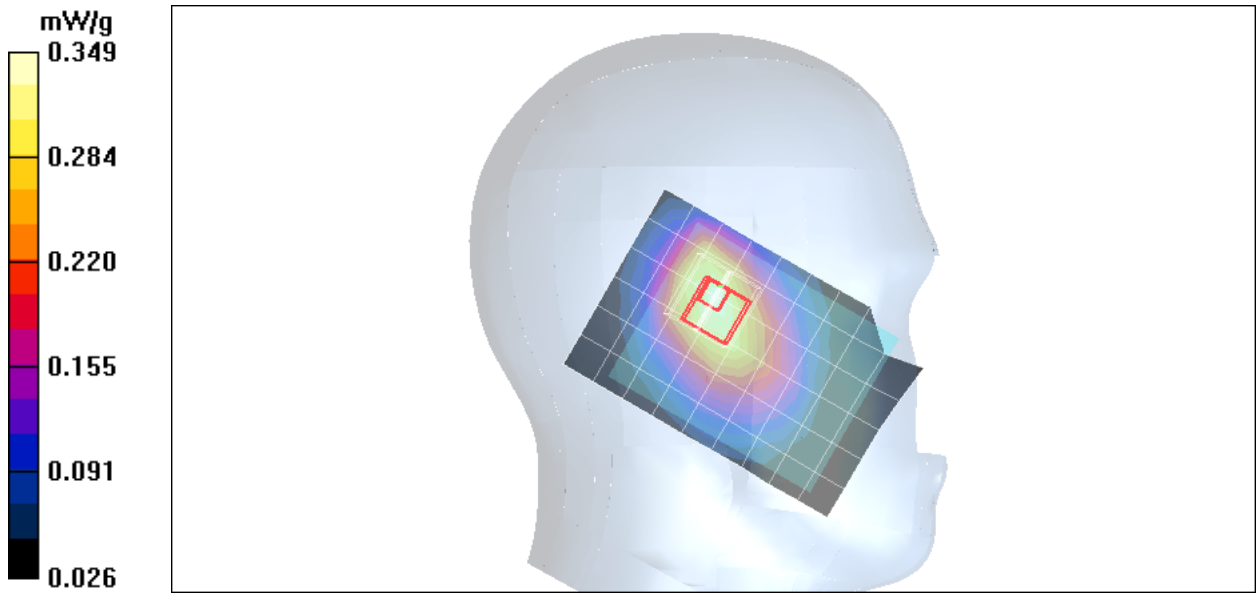

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Middle CH190/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.352 mW/g

Left Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.4 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

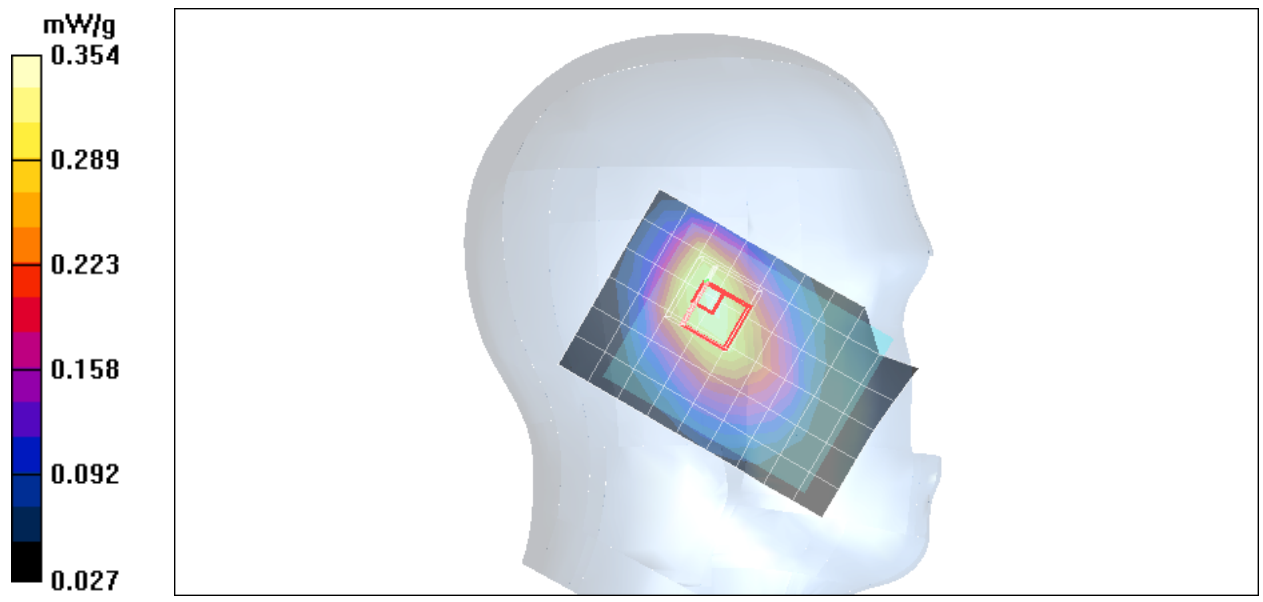

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek High CH251/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 mW/g


Left Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

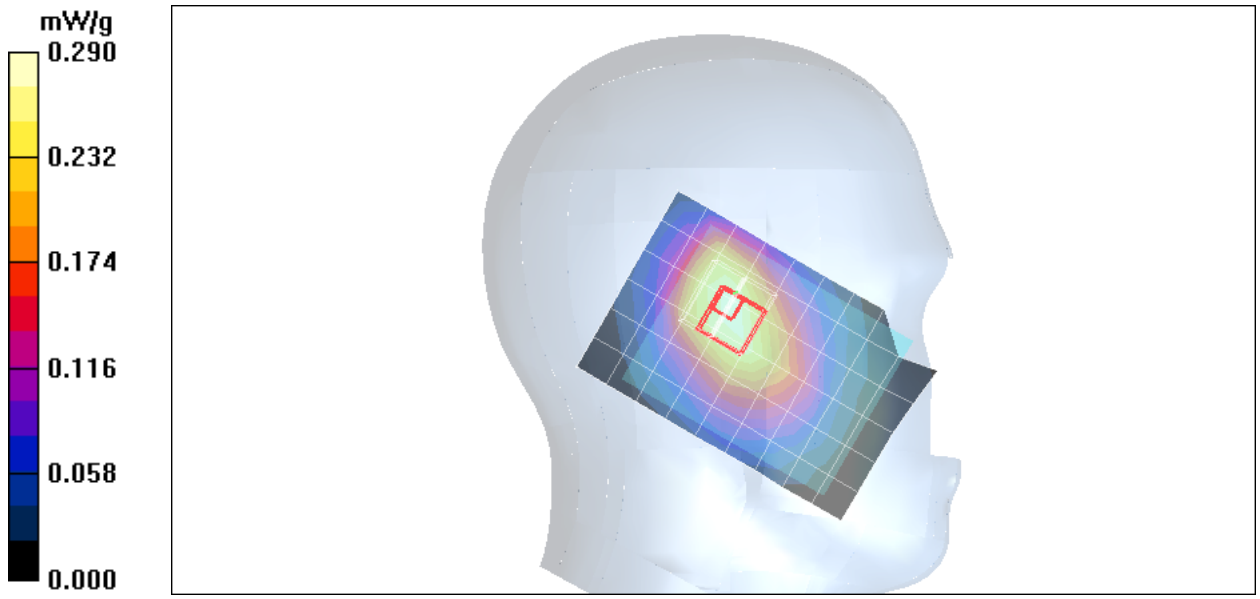

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Low CH128/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 mW/g


Left Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.339 mW/g

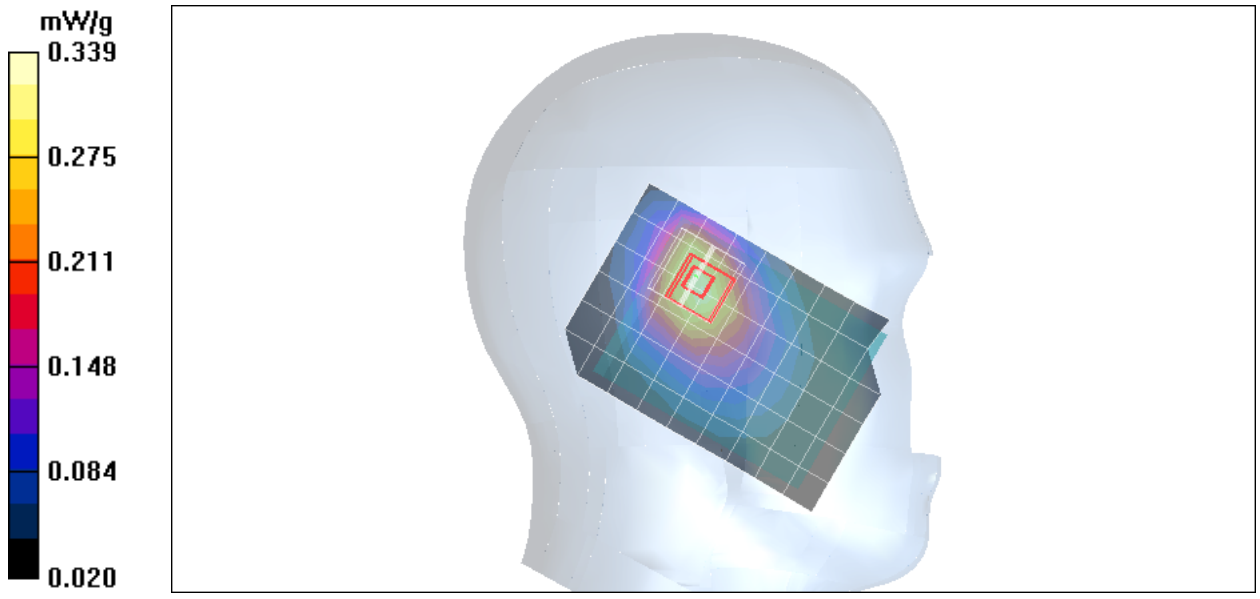

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Middle CH190/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.340 mW/g

Left Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.0 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

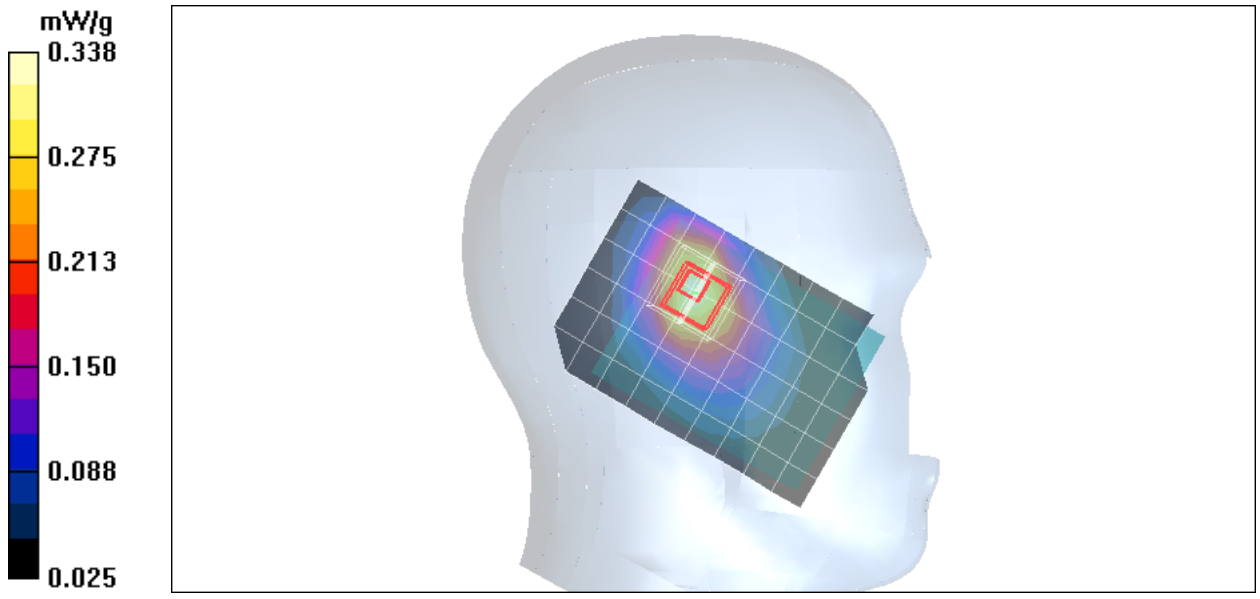

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted High CH251/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.307 mW/g


Left Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

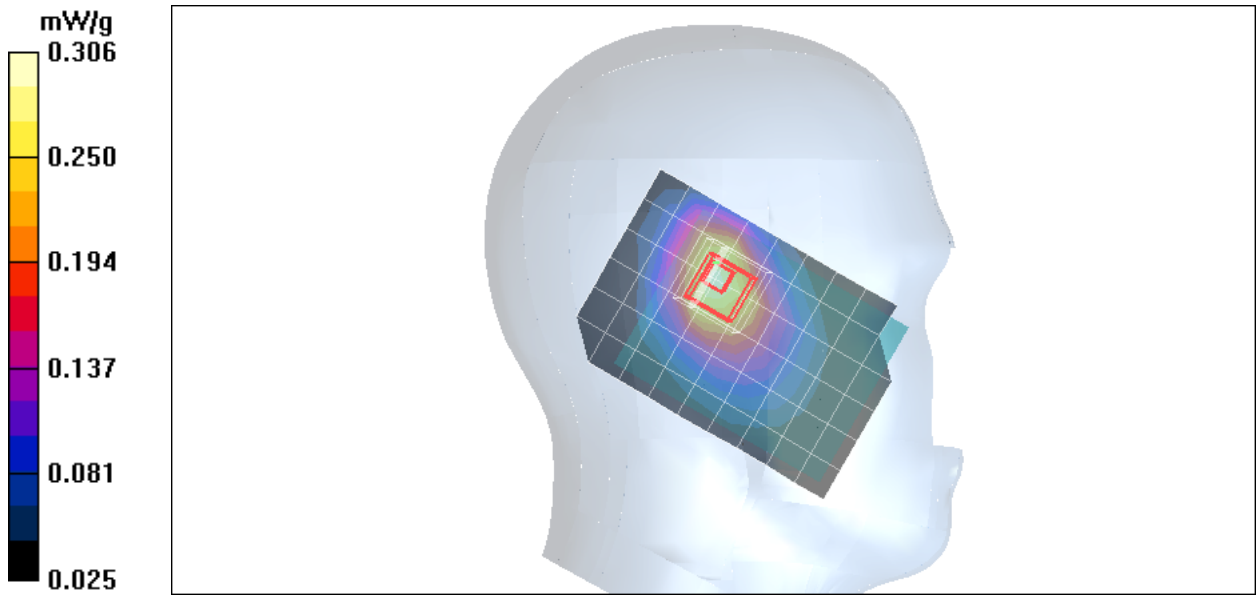

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Low CH128/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 mW/g



Right Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

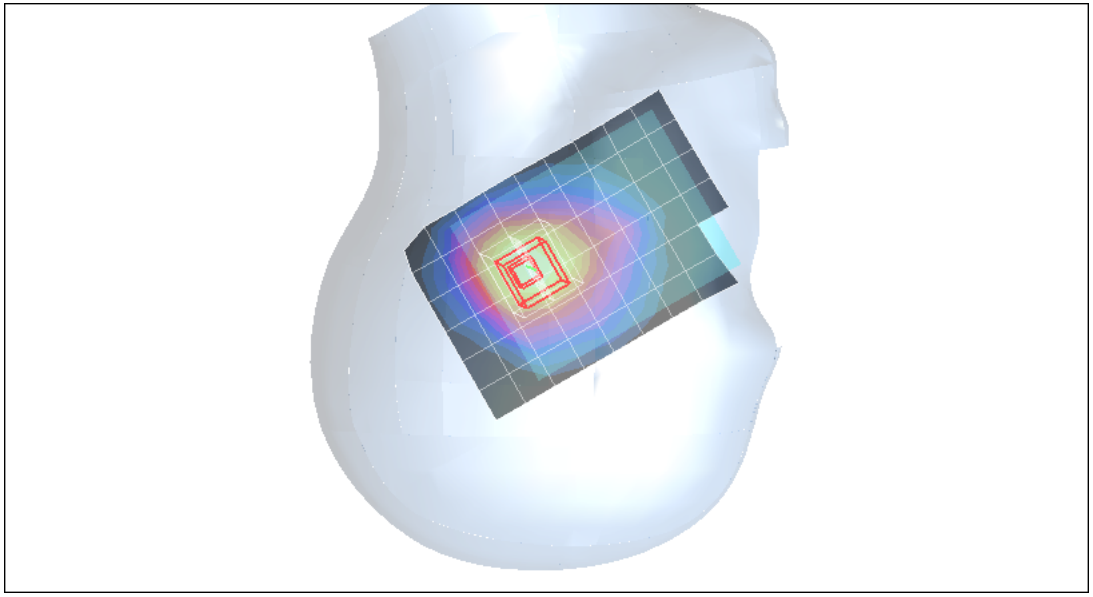

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Middle CH190/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.254 mW/g

Right Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.9 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

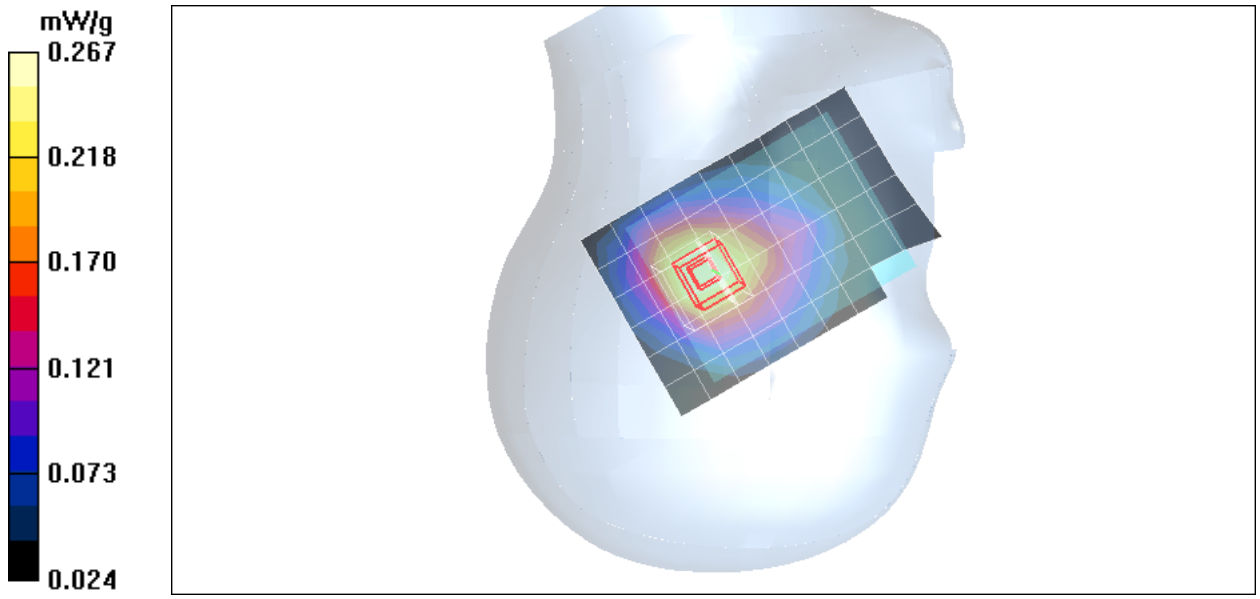

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek High CH251/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 mW/g

Right Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.8 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

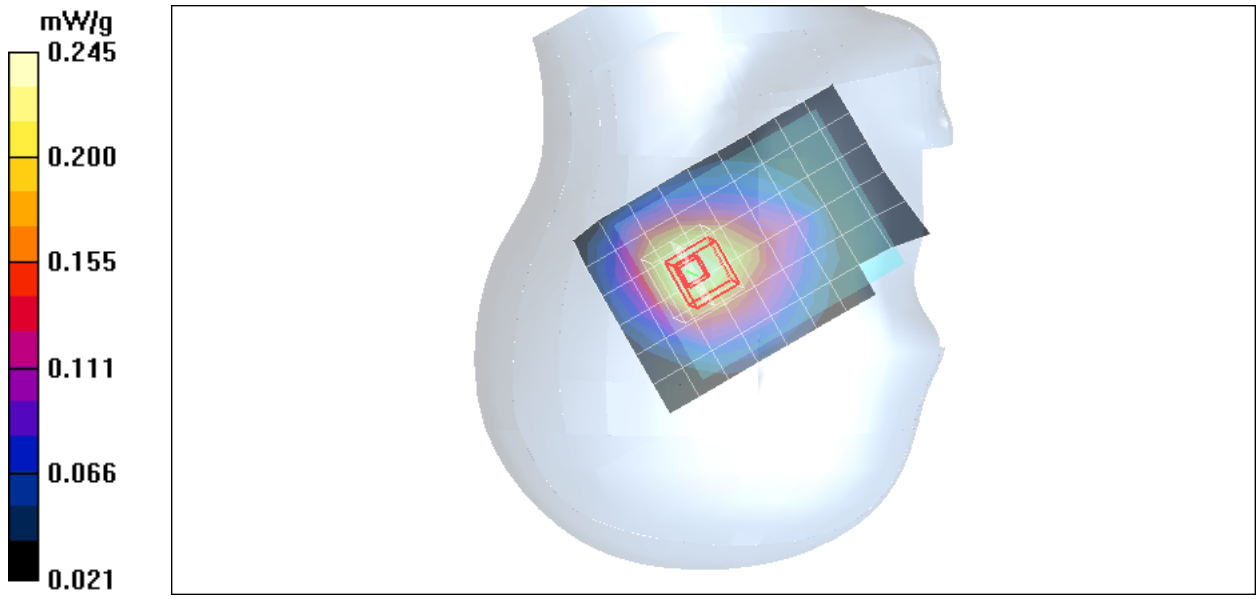

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Low CH128/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 mW/g



Right Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

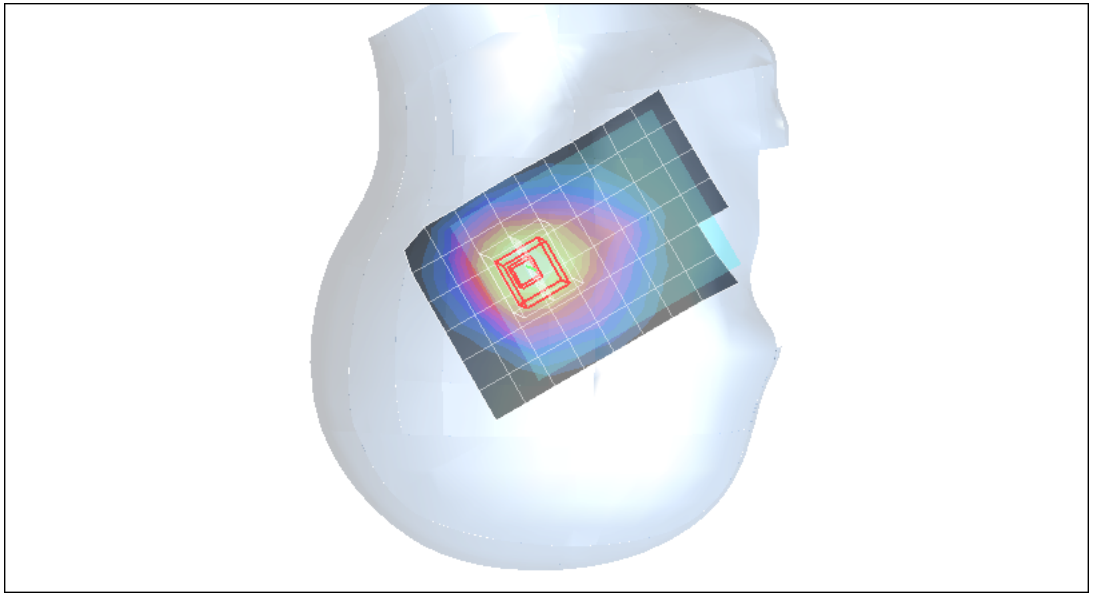

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Middle CH190/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.254 mW/g

Right Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.9 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

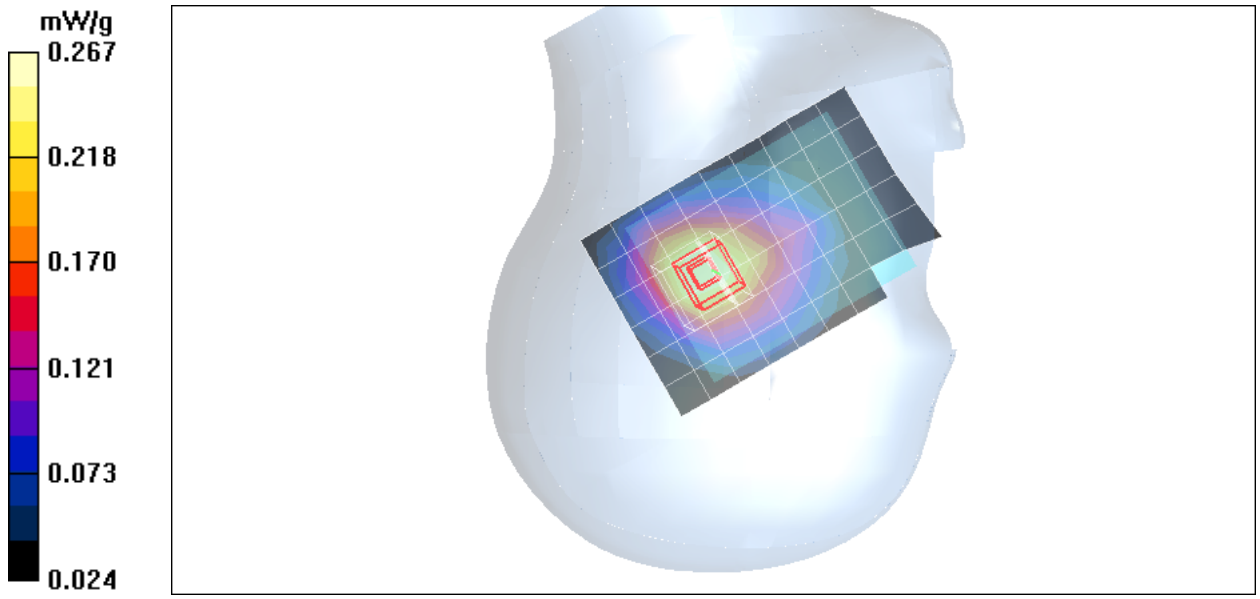

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek High CH251/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 mW/g

Right Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.8 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

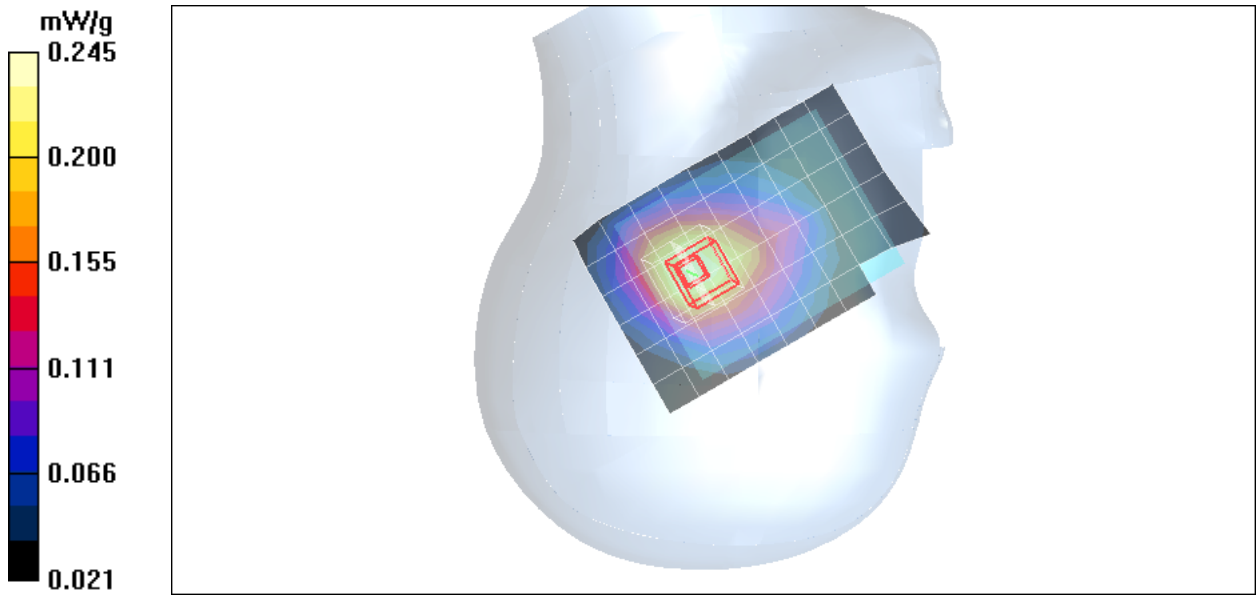

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Low CH128/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.261 mW/g


Right Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

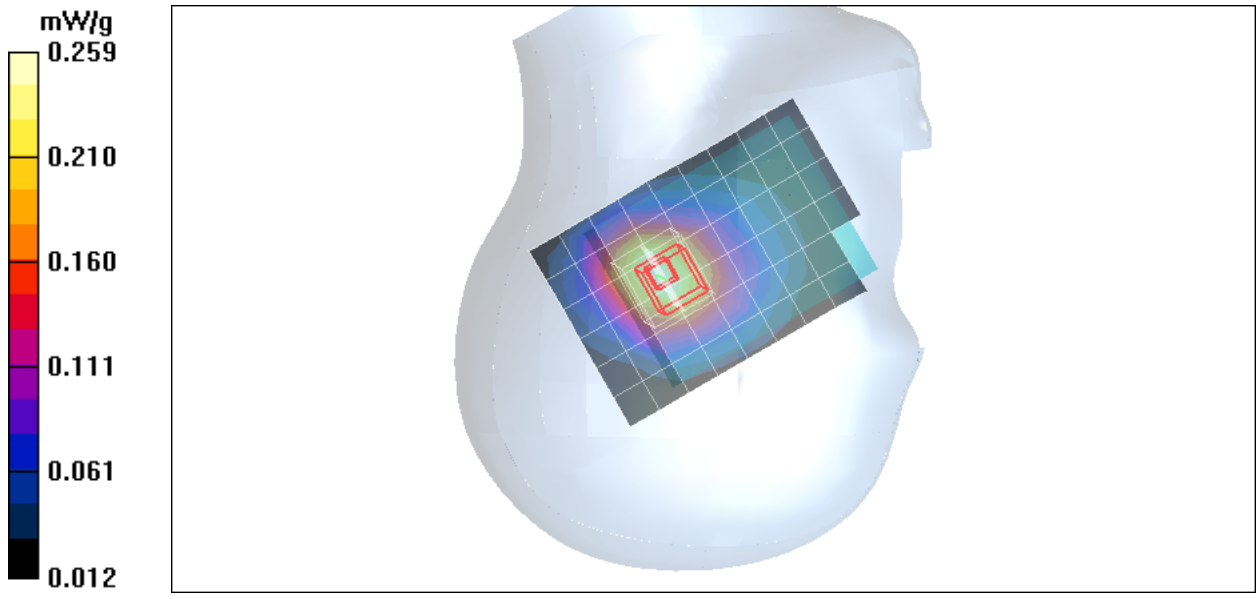

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Middle CH190/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.261 mW/g

Right Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.2 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

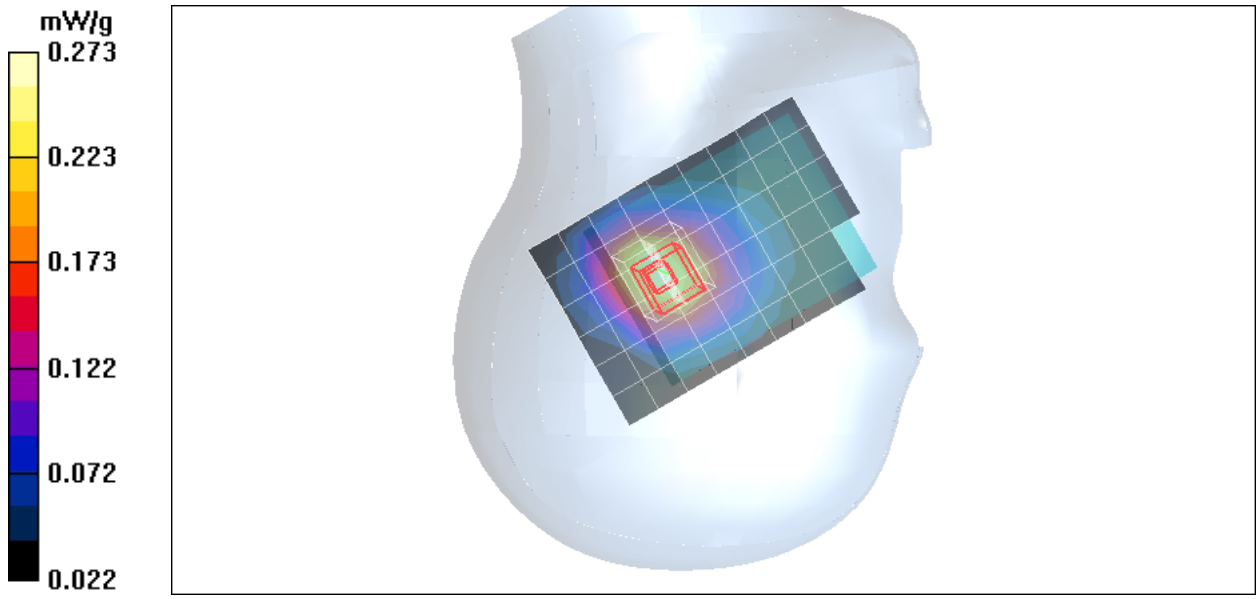

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted High CH251/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.244 mW/g

Right Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.4 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.248 mW/g

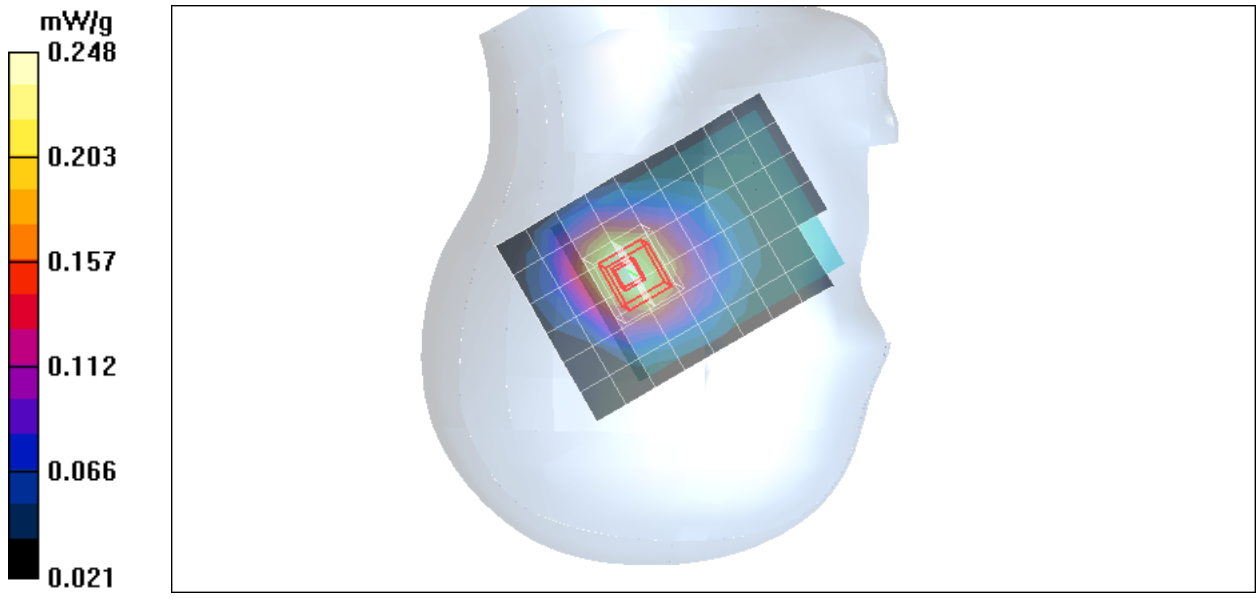

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Low CH512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.371 mW/g

Left Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.372 mW/g


Left Cheek Low CH512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.237 mW/g

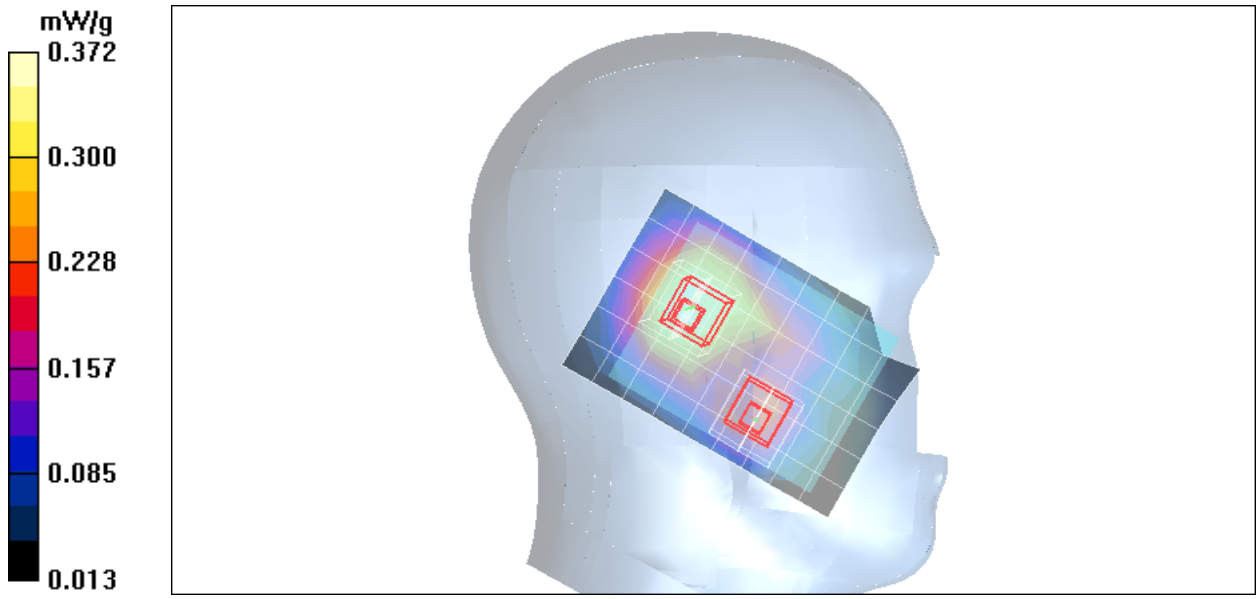

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Middle CH661/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.359 mW/g

Left Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.2 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.420 mW/g

Left Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.2 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

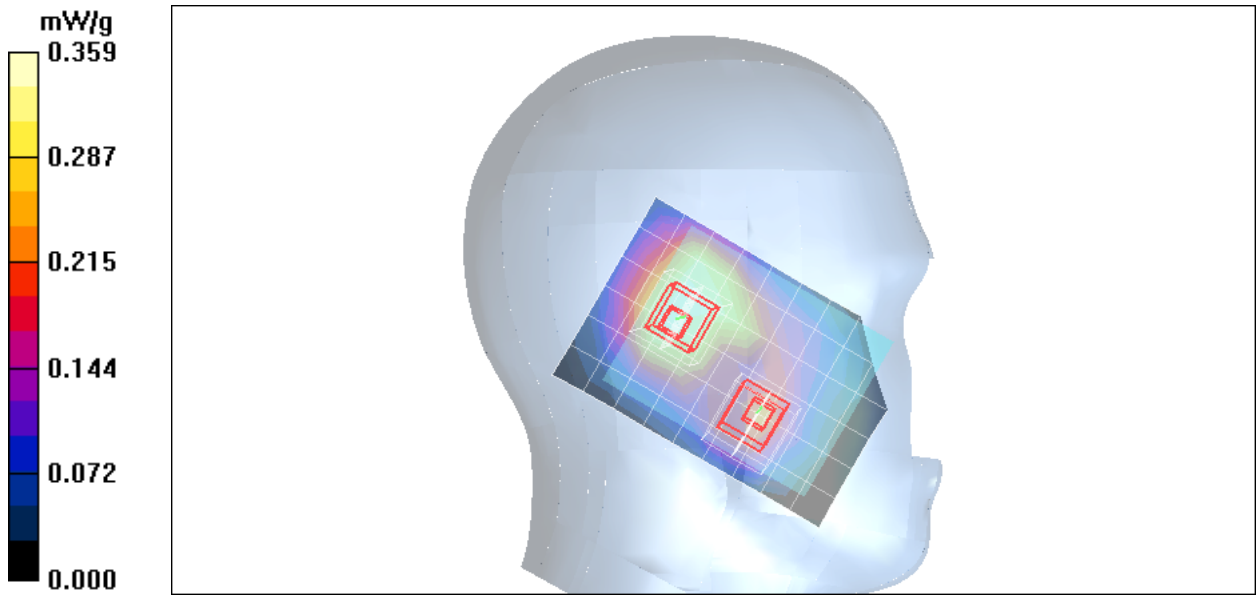

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek High CH810/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 mW/g


Left Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

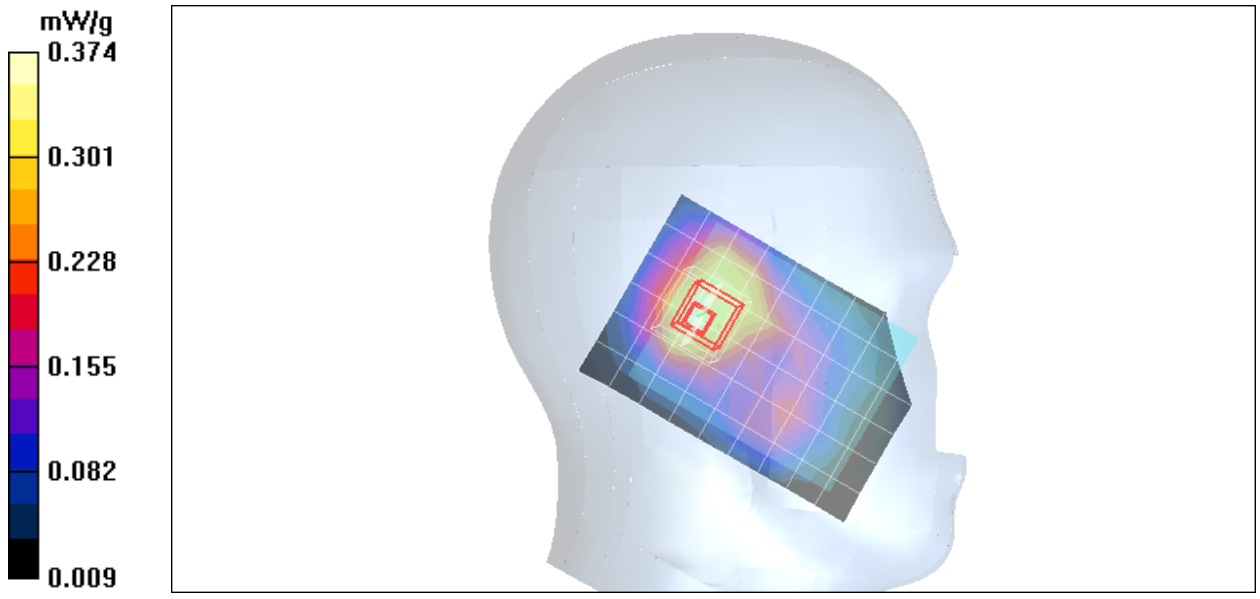

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Low CH512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.518 mW/g


Left Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.541 mW/g

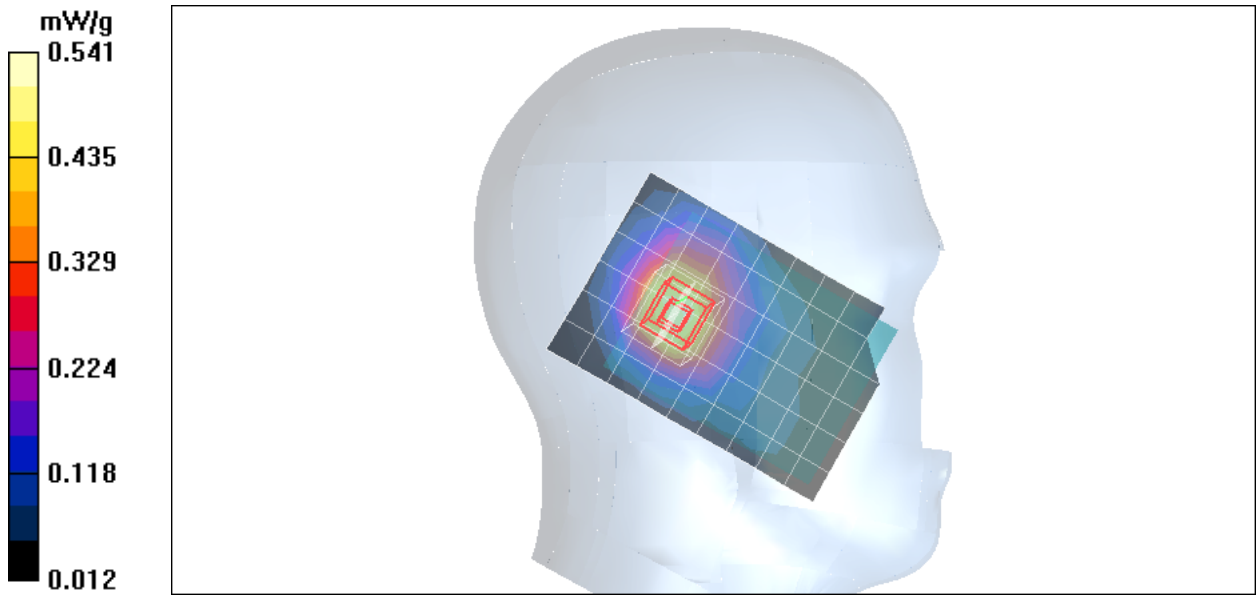

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Middle CH661/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.500 mW/g

Left Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.4 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

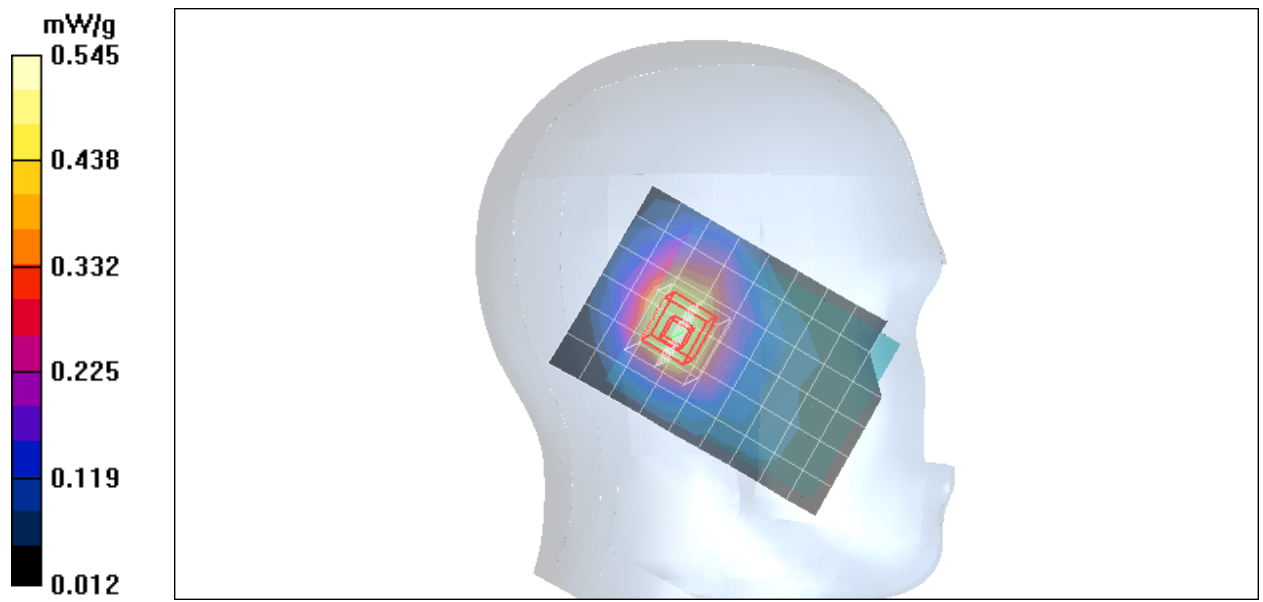

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted High CH810/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.443 mW/g


Left Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.490 mW/g

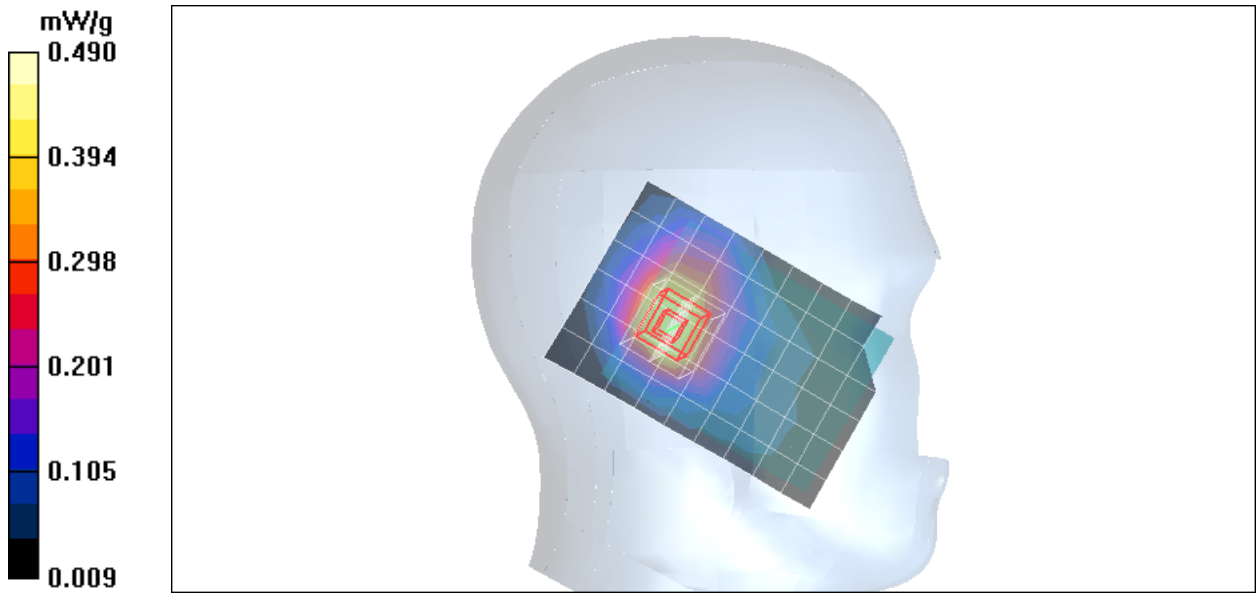

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Low CH512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.424 mW/g


Right Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

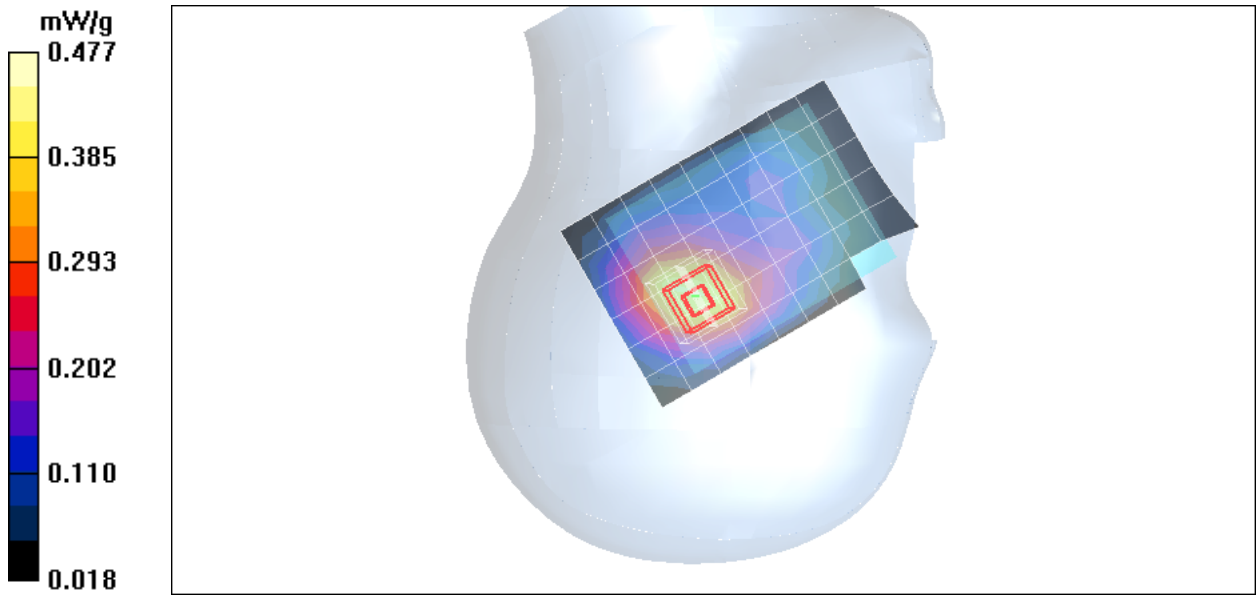

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Middle CH661/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.436 mW/g

Right Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement



grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.7 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.473 mW/g

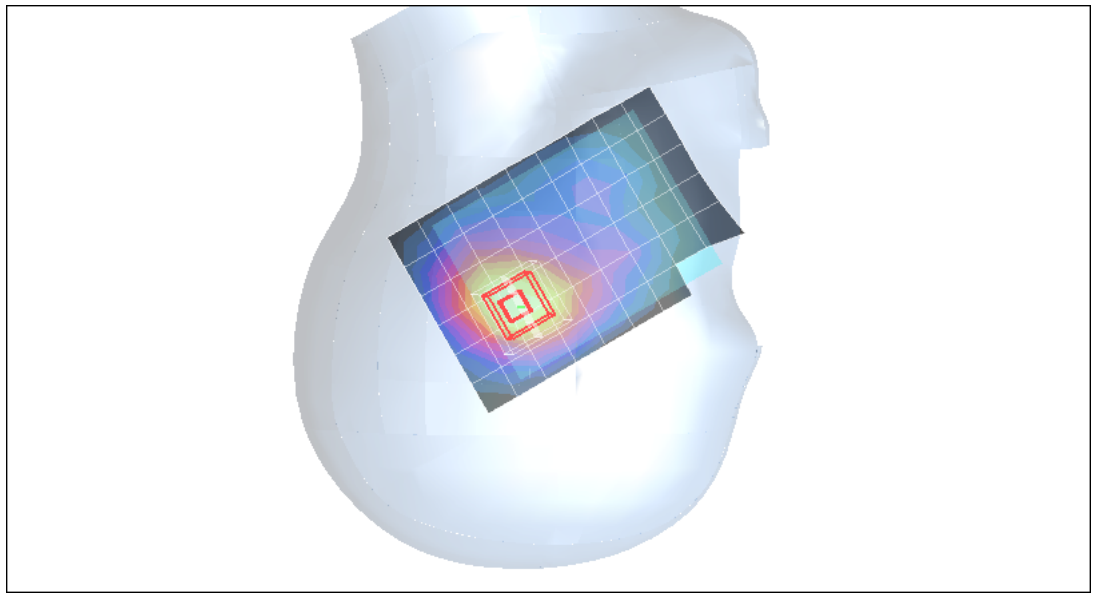

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek High CH810/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.387 mW/g

Right Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement



grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.3 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

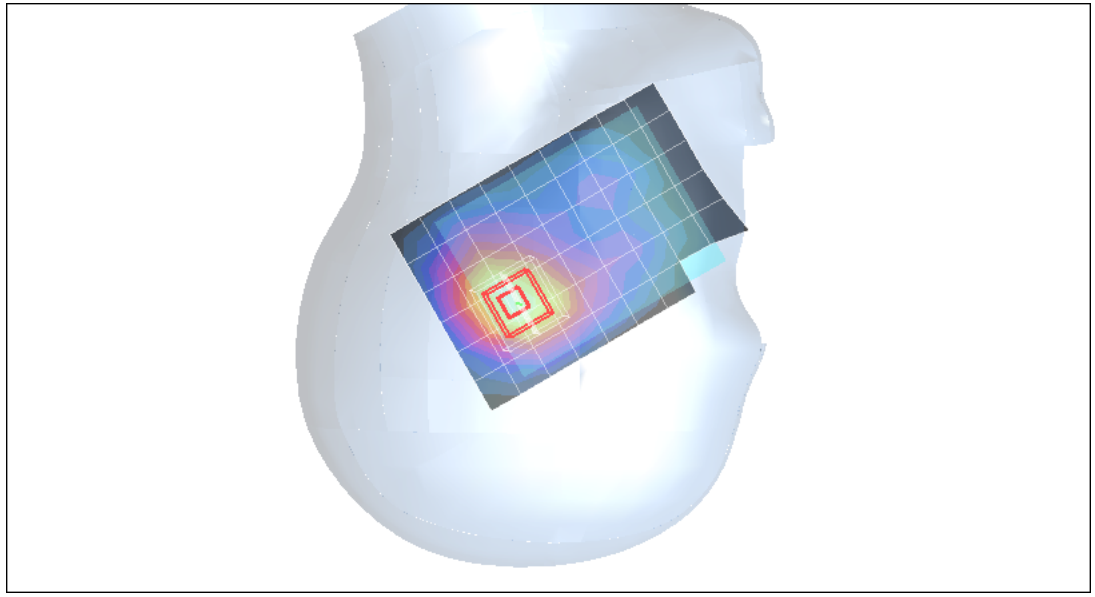

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Low CH512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.619 mW/g

Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = -0.139 dB



Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.645 mW/g

Right Tilted Low CH512/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.421 mW/g

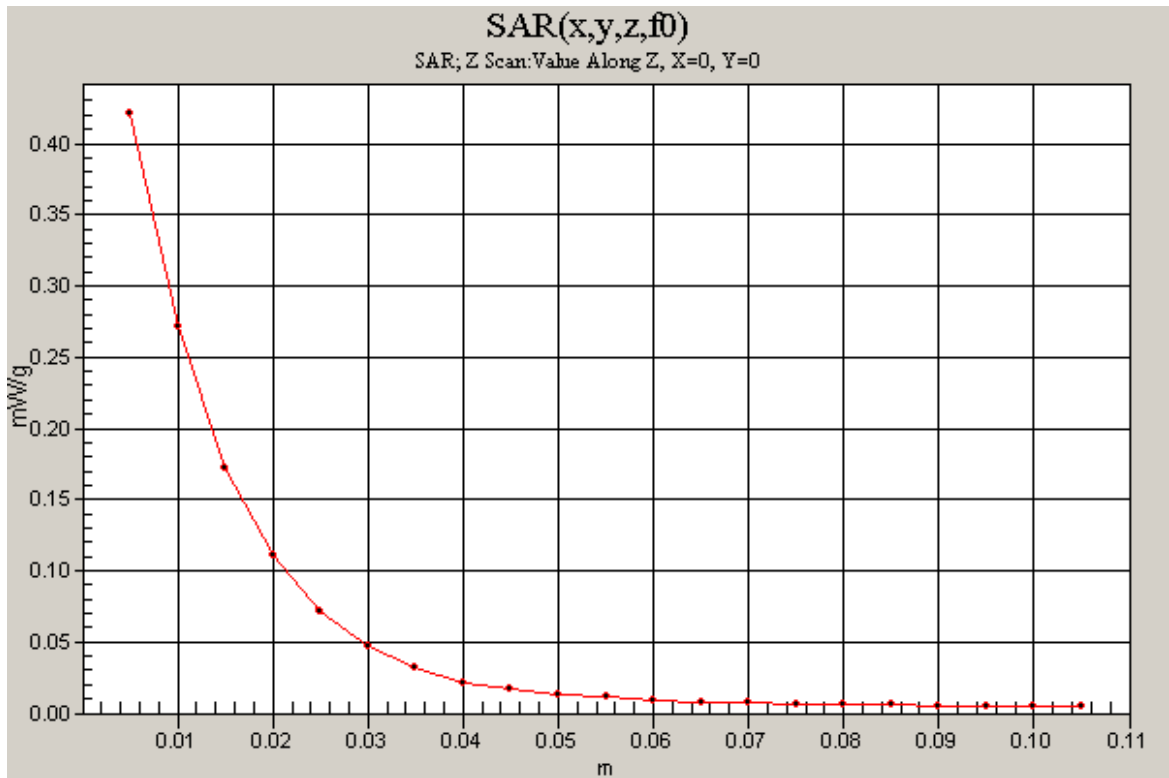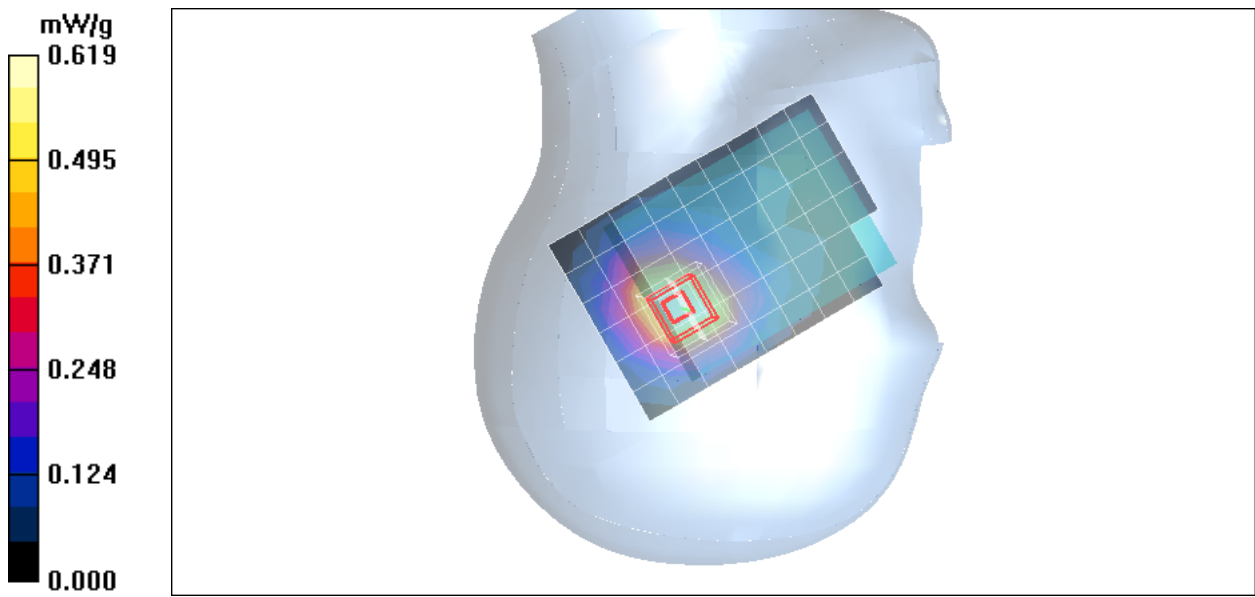

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Middle CH661/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.607 mW/g

Right Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.9 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

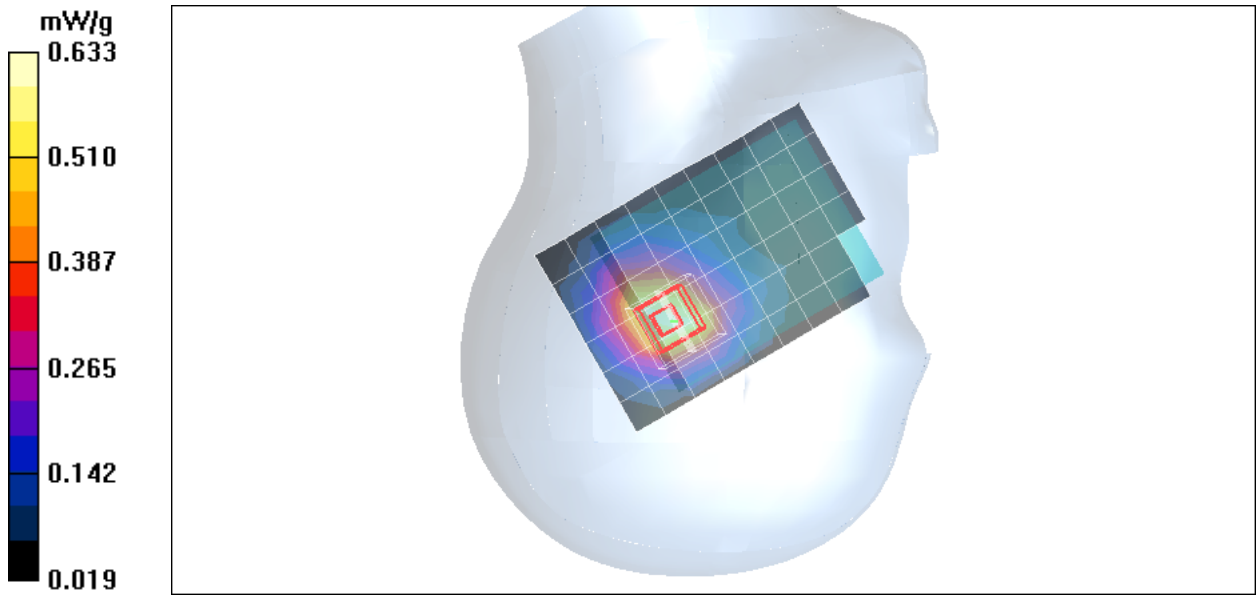

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted High CH810/Area Scan (7x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.526 mW/g

Right Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement



grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.2 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.573 mW/g

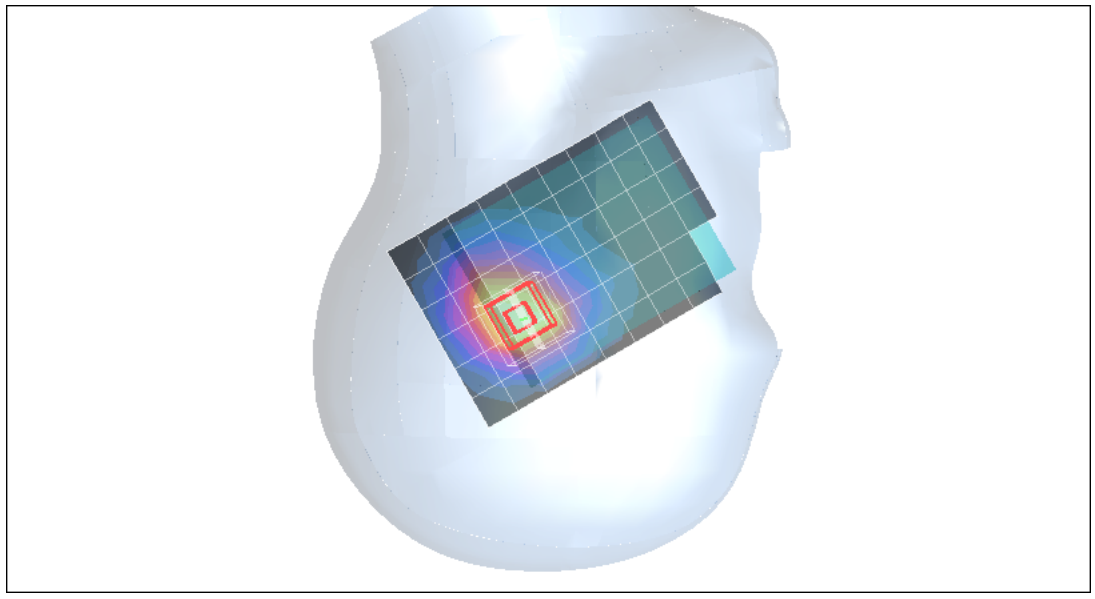

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

co-Location 802.11b+BT+Right Tilted Low CH512/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.430 mW/g

co-Location 802.11b+BT+Right Tilted Low CH512/Zoom Scan



(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.443 mW/g

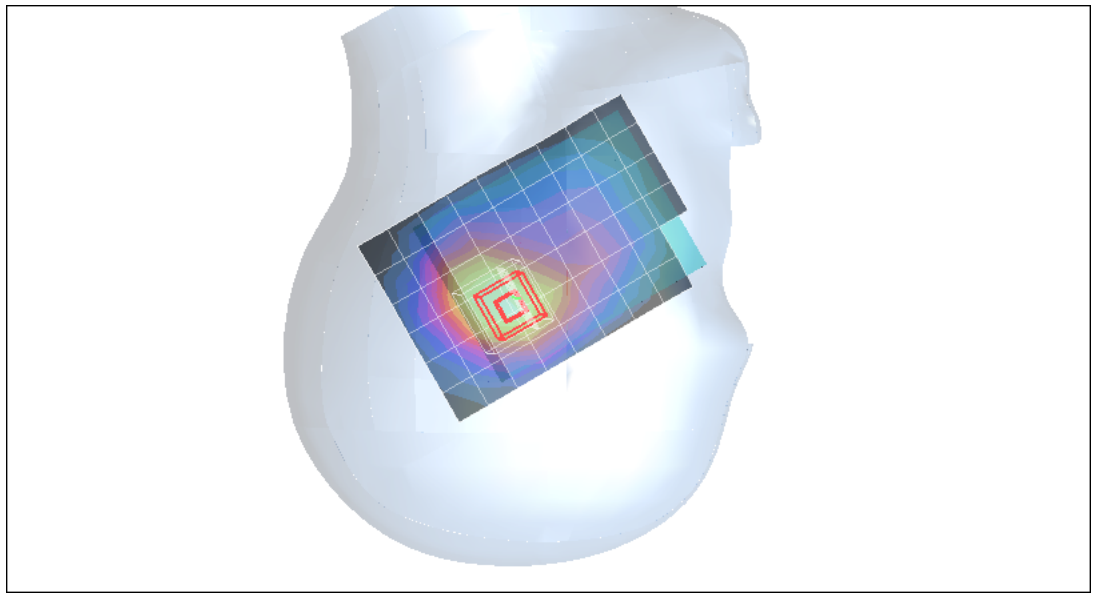

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right Head Slide VOX0101

DUT: VOX0101; Type: Smart Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

co-Location 802.11g+BT+Right Tilted Low CH512 2/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 mW/g

co-Location 802.11g+BT+Right Tilted Low CH512 2/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

