

EXHIBIT L – Spurious Emissions @ Antenna Terminals

FCC ID# NMEAVTS1030

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS

--	--	--	--

COMMENTS

--	--	--	--

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 0MHz-1GHz

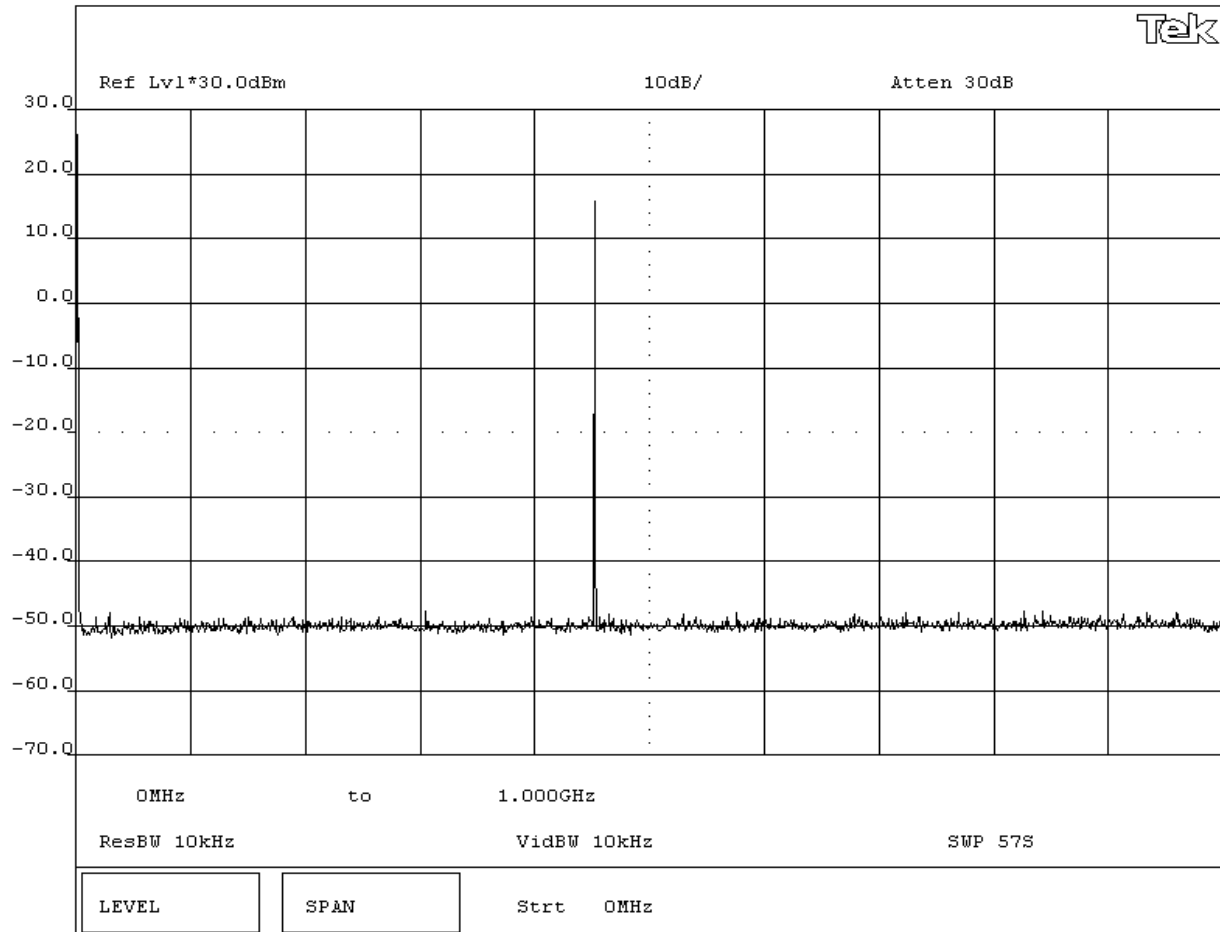

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 1GHz-3GHz

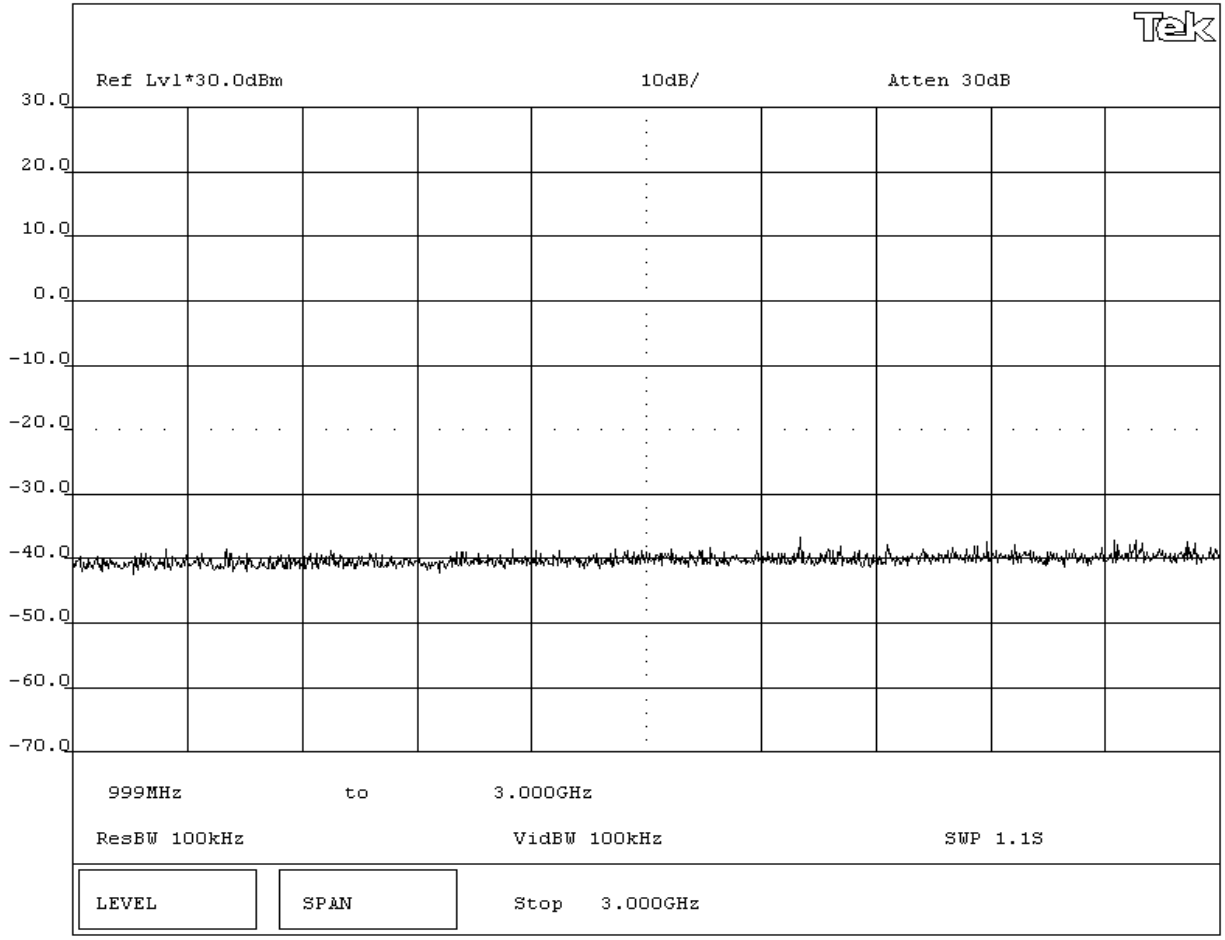

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 3GHz-5GHz

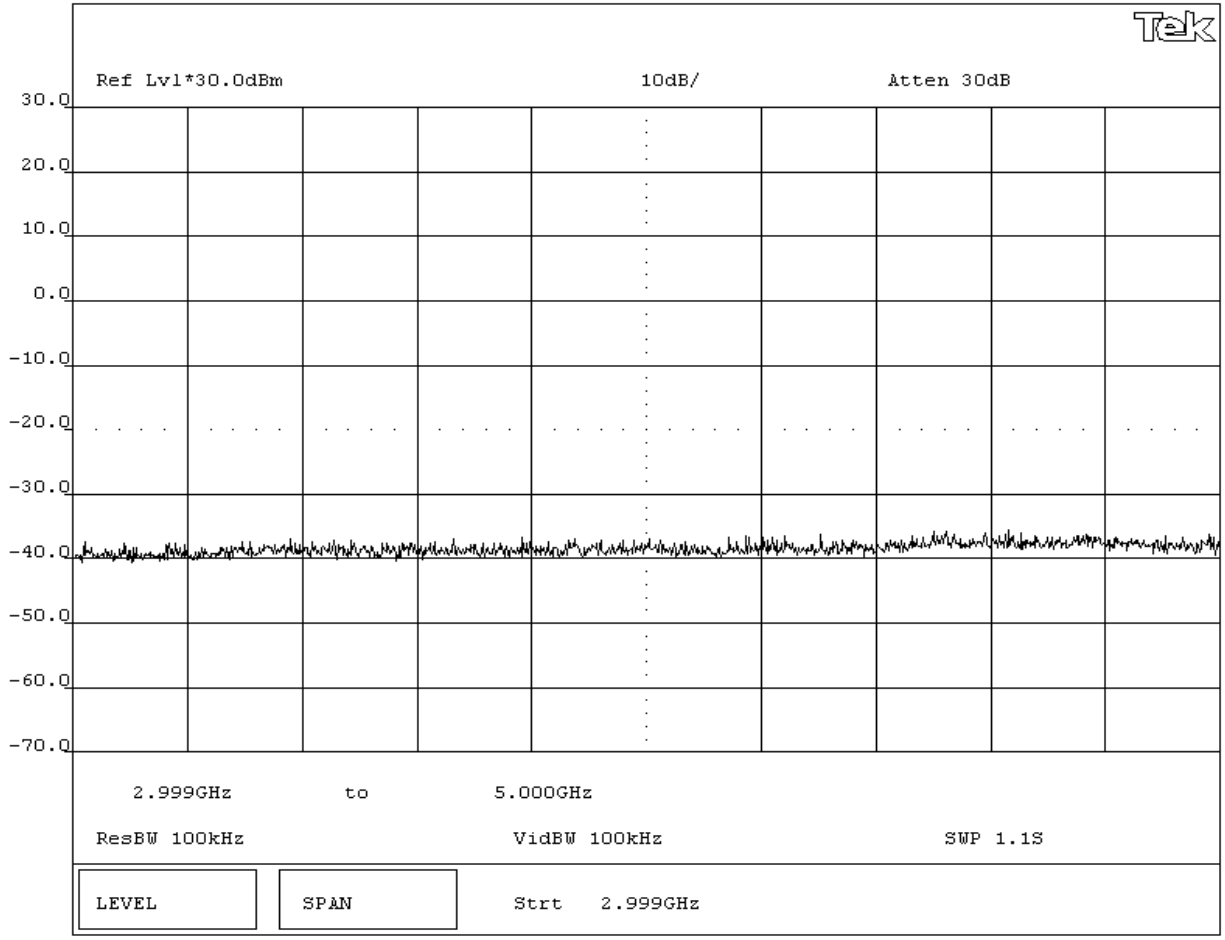

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
----------------------------	--	--	--

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD			
--------------------------------------	--	--	--

None

REQUIREMENTS			
---------------------	--	--	--

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS			
----------------	--	--	--


Pass

SIGNATURE			
------------------	--	--	--

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST			
----------------------------	--	--	--

Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz

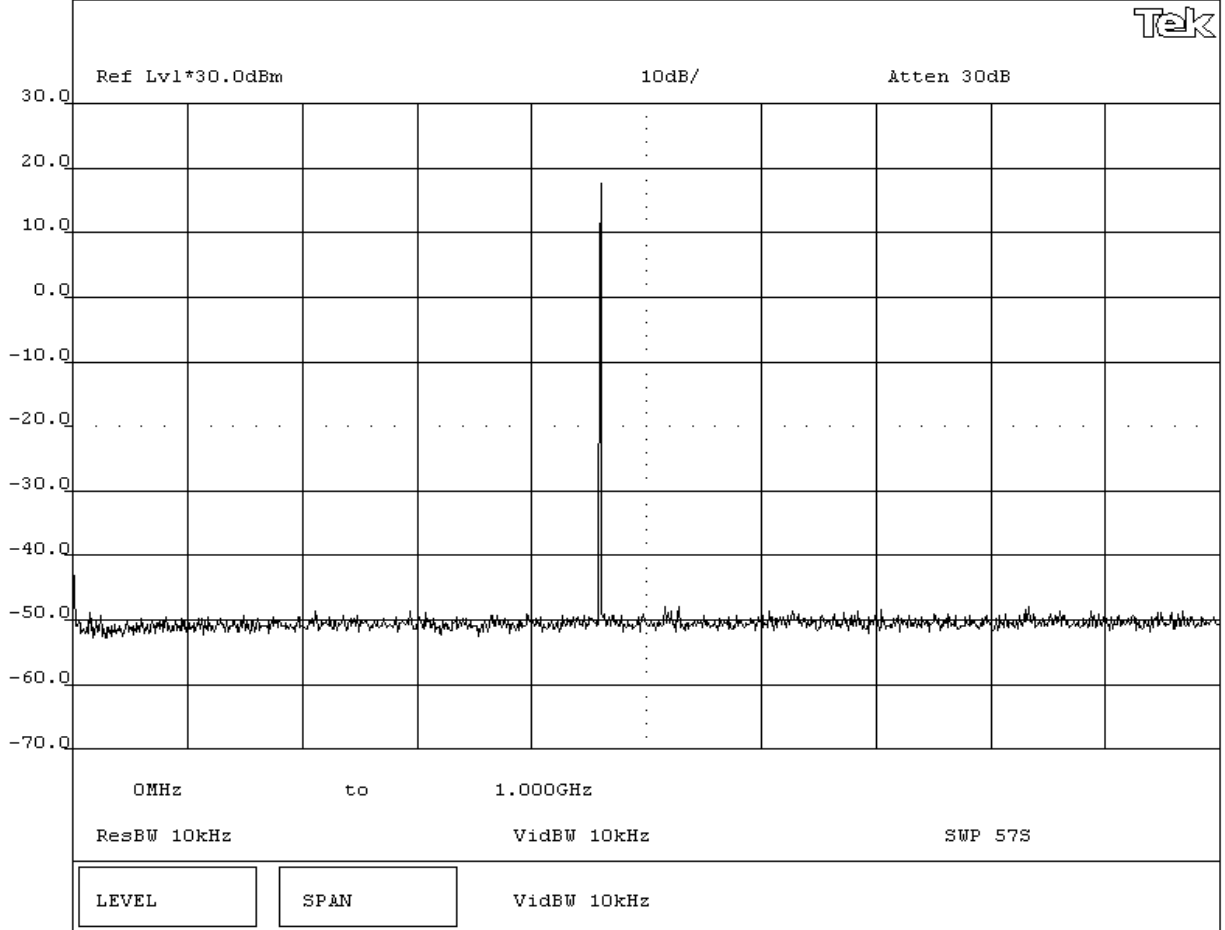

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS

COMMENTS

--

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Mid Channel 1GHz-3GHz

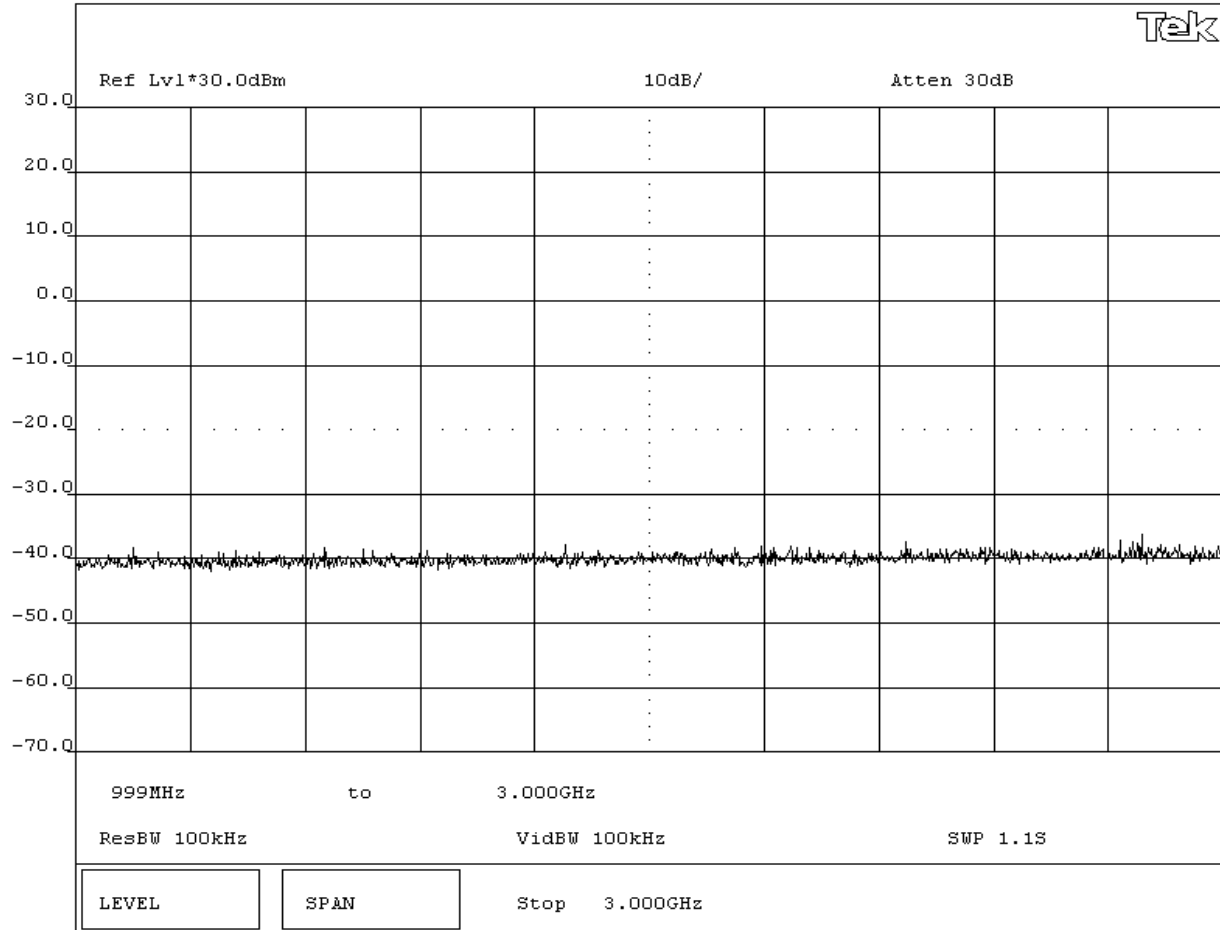

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
----------------------------	--	--	--

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD			
--------------------------------------	--	--	--

None

REQUIREMENTS			
---------------------	--	--	--

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental


RESULTS			
----------------	--	--	--

Pass

SIGNATURE			
------------------	--	--	--

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Mid Channel 3GHz-5GHz			

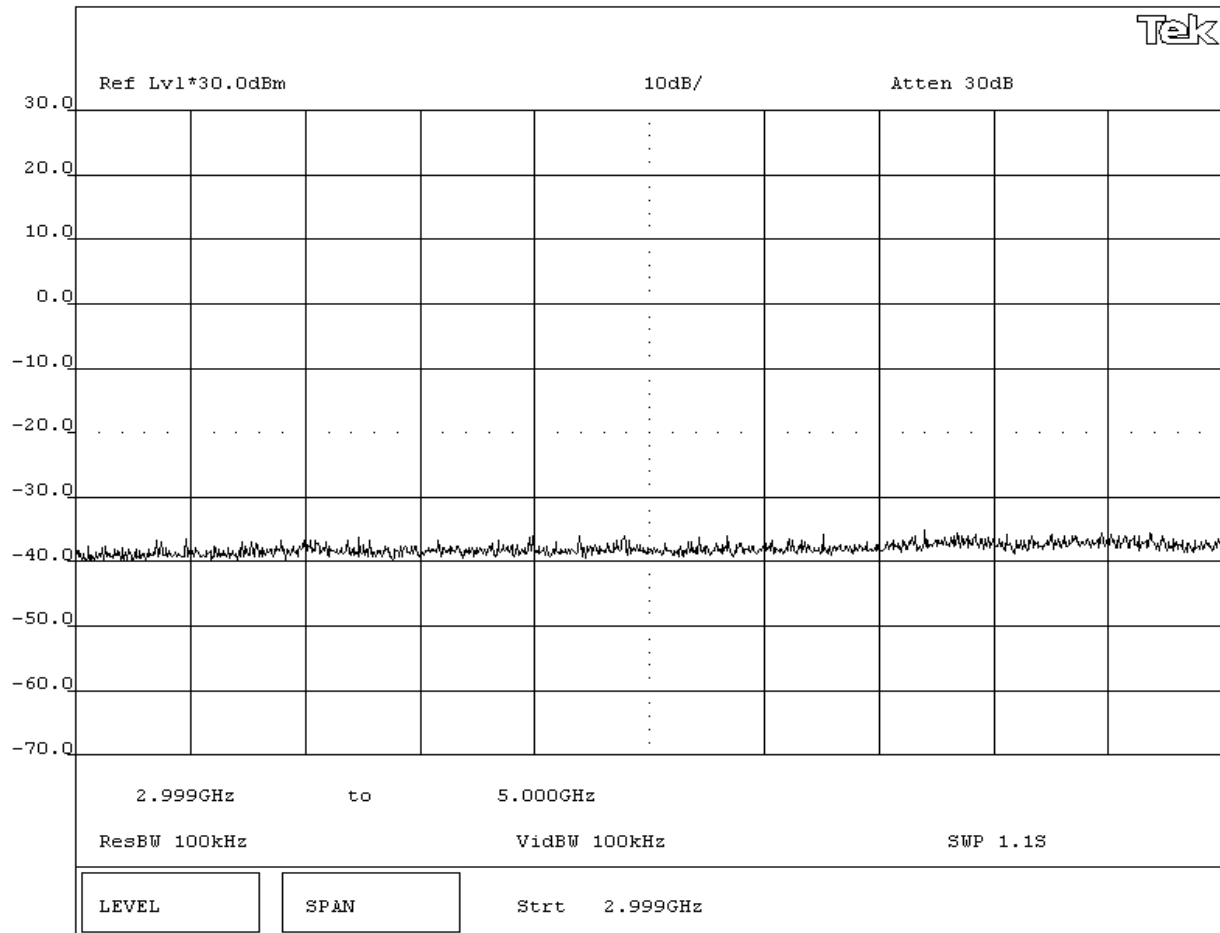

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS

COMMENTS

--

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Mid Channel 0MHz-1GHz

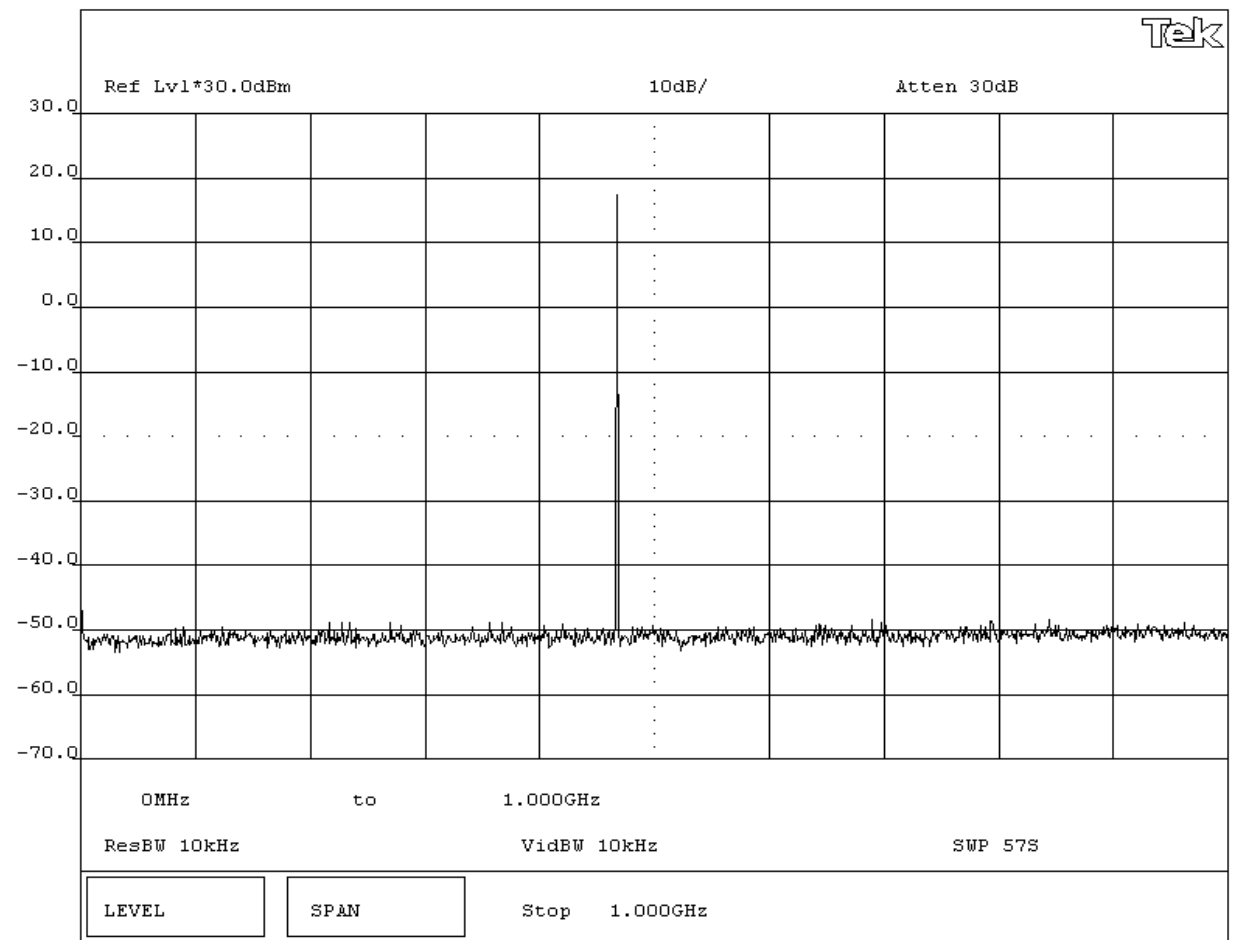

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental


RESULTS

Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST
Antenna Conducted Spurious Emissions - Mid Channel 1GHz-3GHz

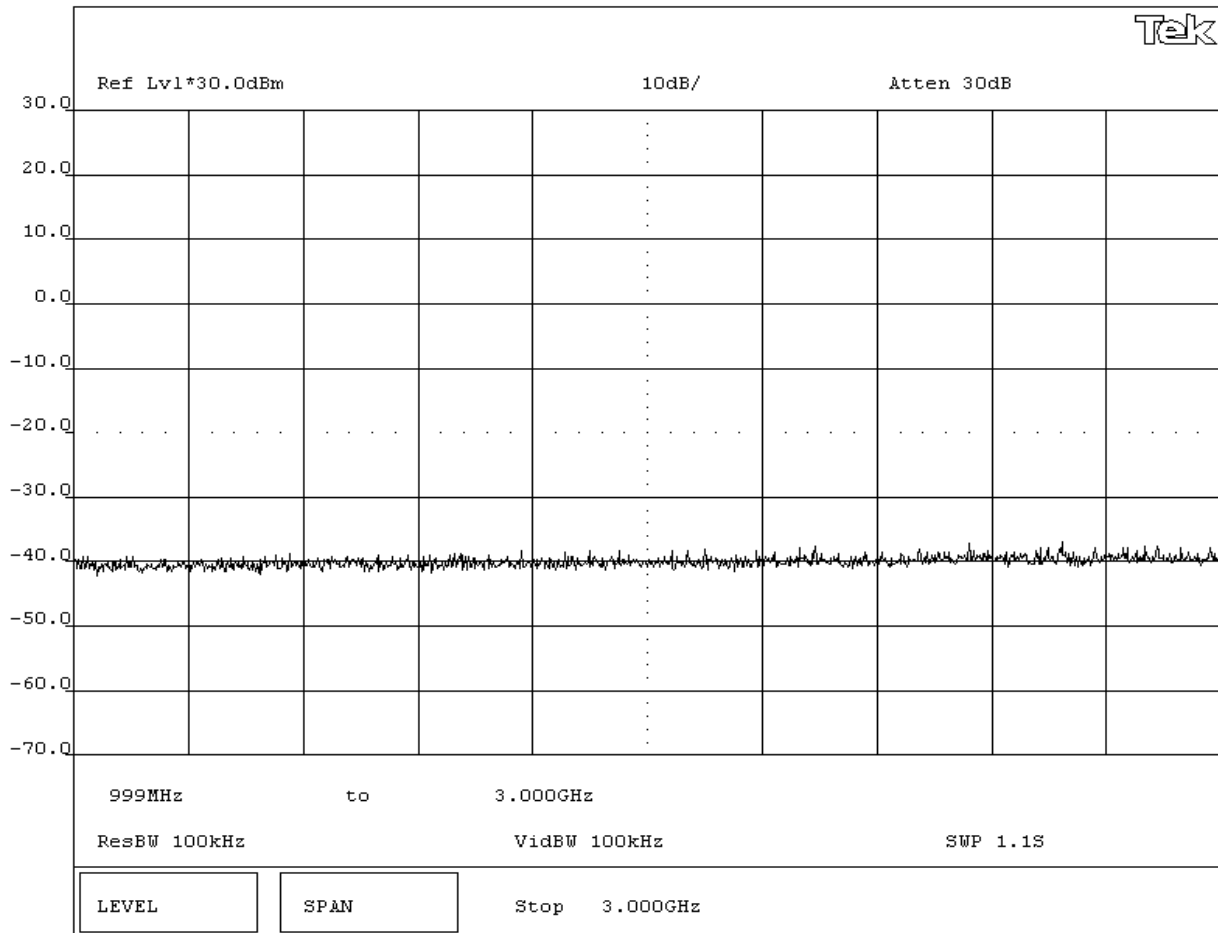

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS			
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current
Method:	TIA/EIA-603	Year:	1993

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS

Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST
Antenna Conducted Spurious Emissions - Mid Channel 3GHz-5GHz

