

# EXHIBIT O – Transient Frequency Behaviour Data

FCC ID# NMEAVTS1030

# EMISSIONS DATA SHEET

EUT: Alarm View	Work Order: DATC0007
Serial Number: 102037	Date: 06/18/01
Customer: Data Critical Corporation	Temperature: 75 degrees F
Attendees: N/A	Tested by: Greg Kiemel
Customer Ref. No.: N/A	Power: N/A
	Humidity: 38% RH
	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 90.214	Year: Most Current	Method: TIA/EIA-603 2.2.19	Year: 1993

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated at 2400 Baud


DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

RESULTS
Pass

SIGNATURE
 Tested By: _____

DESCRIPTION OF TEST
Carrier ON Time

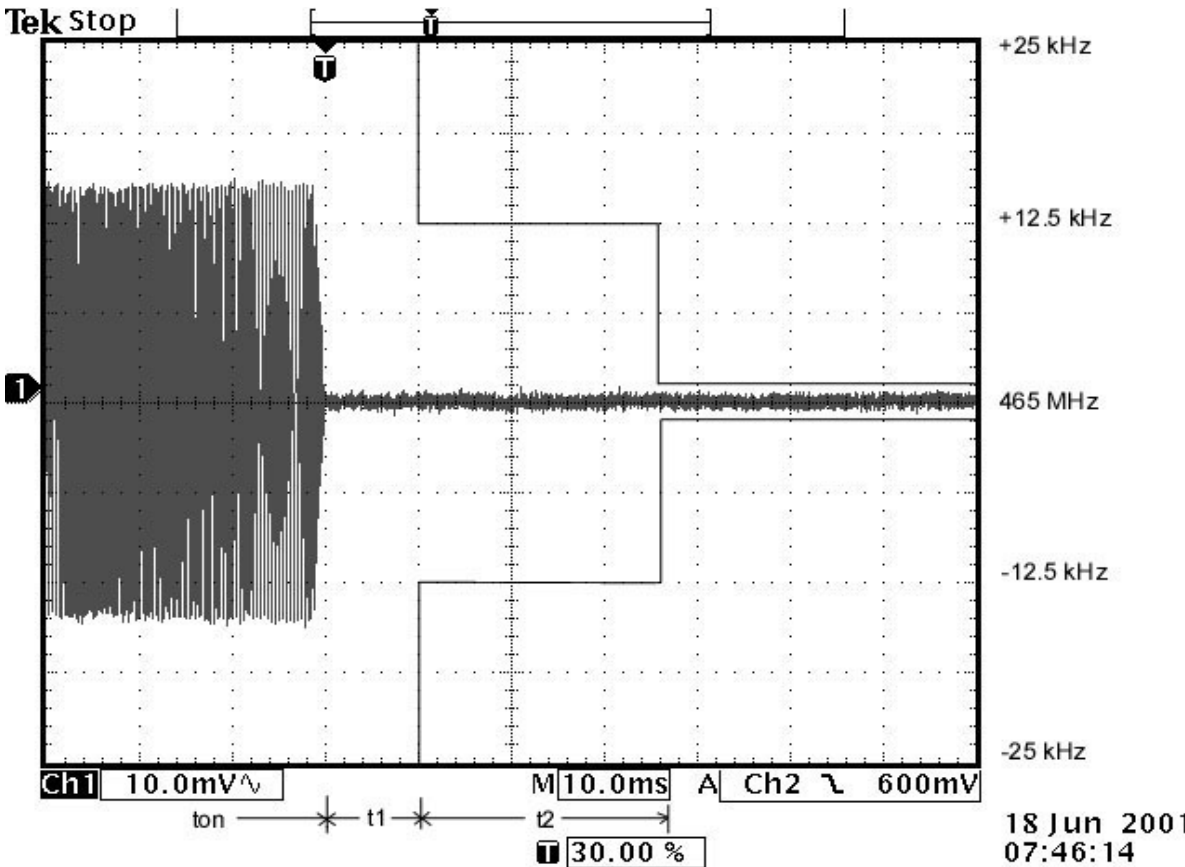

NORTHWEST  
**EMC**

# EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: Alarm View	Work Order: DATC0007
Serial Number: 102037	Date: 06/18/01
Customer: Data Critical Corporation	Temperature: 75 degrees F
Attendees: N/A	Humidity: 38% RH
Tested by: Greg Kiemel	Job Site: EV06
Customer Ref. No.: N/A	Power: N/A

TEST SPECIFICATIONS			
Specification: 47 CFR 90.214	Year: Most Current	Method: TIA/EIA-603 2.2.19	Year: 1993

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated at 2400 Baud

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

## RESULTS


Pass

## SIGNATURE

Tested By: *G.K.*

## DESCRIPTION OF TEST

**Carrier OFF Time**

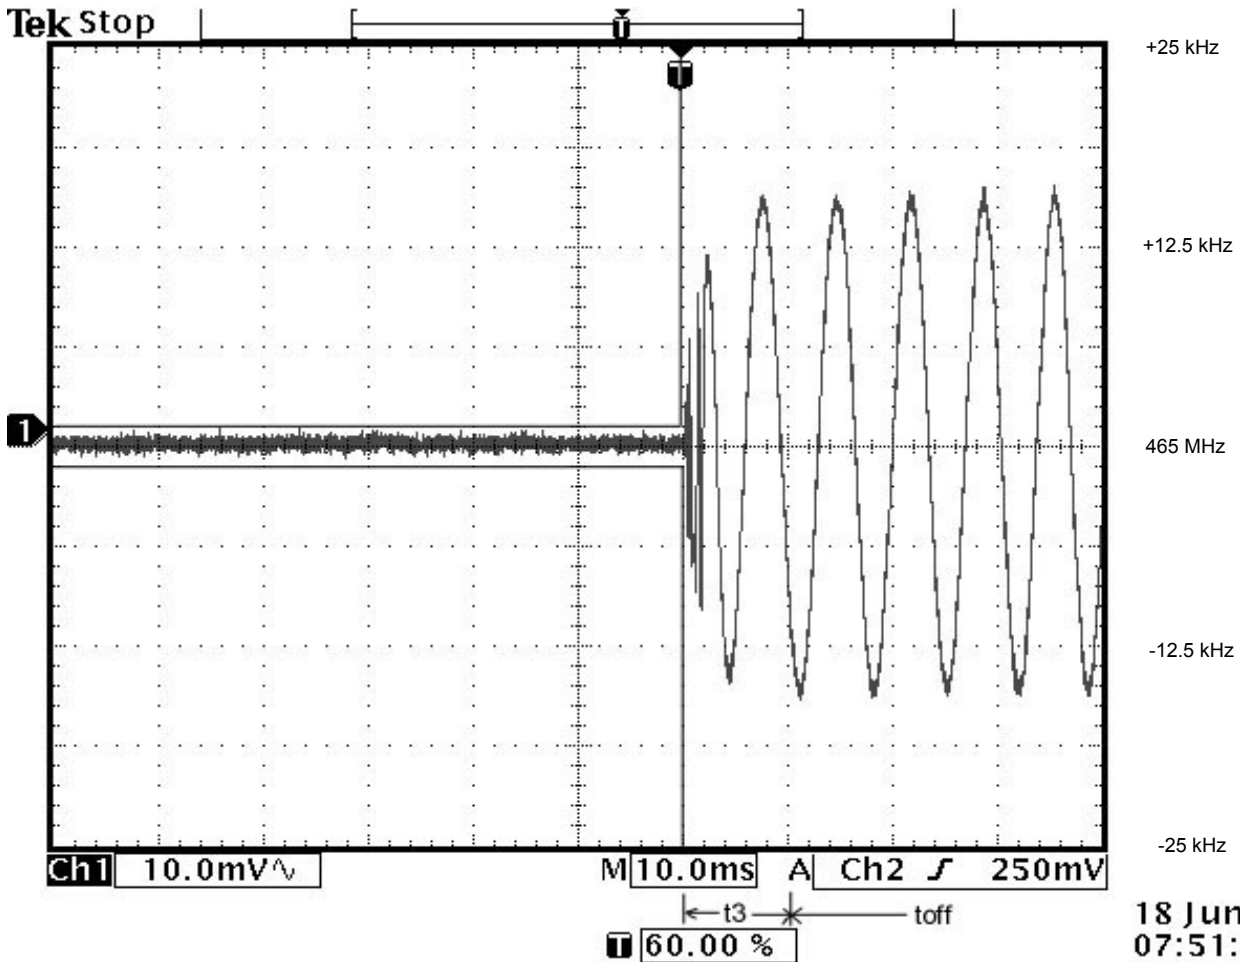

18 Jun 2001  
07:51:04

NORTHWEST  
**EMC**

# EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	06/18/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Greg Kiemel
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

<b>TEST SPECIFICATIONS</b>			
Specification:	47 CFR 90.214	Year:	Most Current
Method:	TIA/EIA-603 2.2.19	Year:	1993

**SAMPLE CALCULATIONS**

**COMMENTS**

**EUT OPERATING MODES**

Modulated at 2400 Baud

**DEVIATIONS FROM TEST STANDARD**

None

**REQUIREMENTS**

Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

**RESULTS**

Pass

**SIGNATURE**

Tested By: *Greg Kiemel*

**DESCRIPTION OF TEST**

**Carrier OFF Time**

