


# INTERTEK TESTING SERVICES

Report No.: HK11040585-1  
Sample No.: 2/2

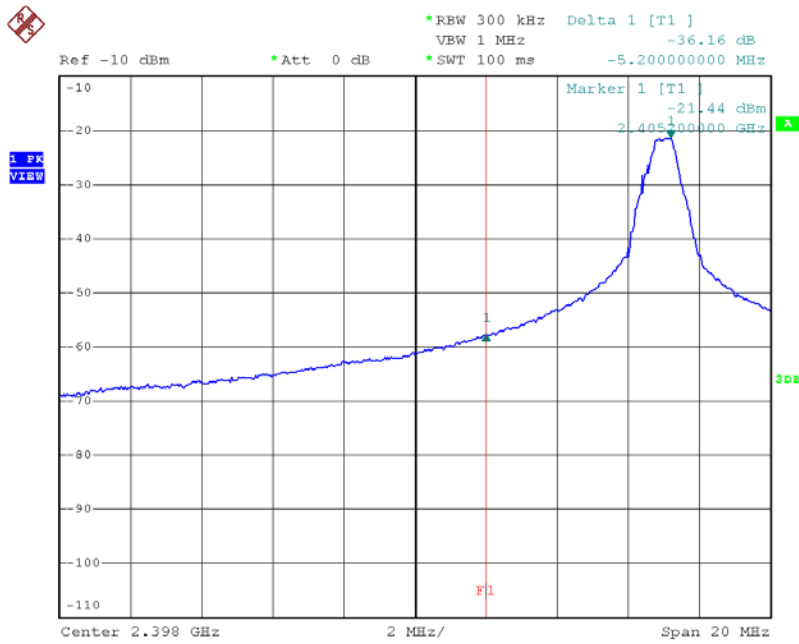


OATS = 100.4dBuV/m

Field Strength (Peak)  
 =100.4 - 36.16 dBuV/m  
 =64.24 dBuV/m  
 (Limit: 74 dBuV/m)

Field Strength (Average)  
 =64.24 - AF dBuV/m  
 =64.24 - 29.0 dBuV/m  
 =35.24 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 29.APR.2011 00:23:27

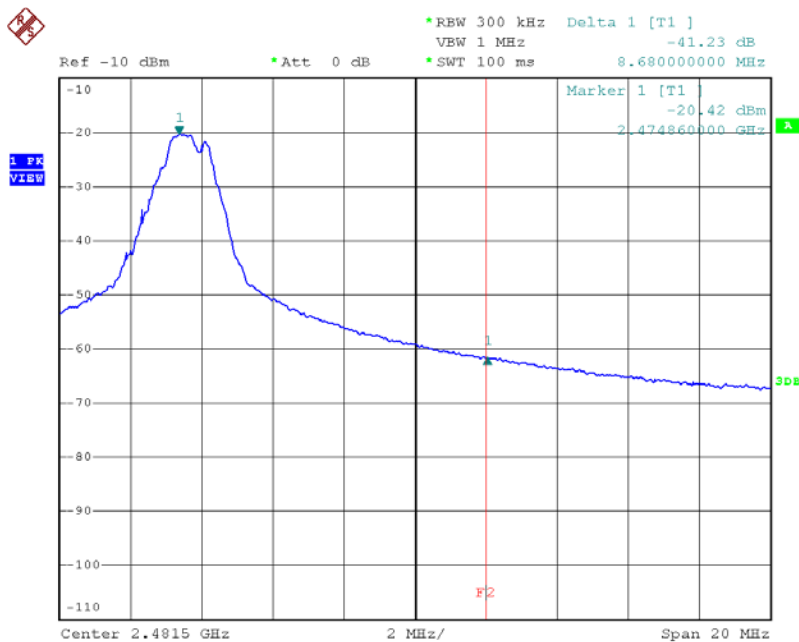

OATS = 100.1dBuV/m

Field Strength (Peak)  
 =100.1 - 41.23 dBuV/m  
 =58.87 dBuV/m  
 (Limit: 74 dBuV/m)

Field Strength (Average)  
 =58.87 - AF dBuV/m  
 =58.87 - 29.0 dBuV/m  
 =29.87 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 29.APR.2011 00:29:42

**Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)**