

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM131100643001

Email: ee.shenzhen@sgs.com Page: 1 of 45

# FCC REPORT

**Application No:** SZEM1311006430RF

Applicant:IDT Technology LimitedManufacturer:IDT Technology LimitedFactory:IDT Technology Limited

Product Name: BLE Dongle

Model No.(EUT): AD932

FCC ID: NMTAD932

**Standards:** 47 CFR Part 15, Subpart C (2012)

**Date of Receipt:** 2013-12-03

**Date of Test:** 2013-12-09 to 2013-12-26

**Date of Issue:** 2014-01-10

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM131100643001

Page: 2 of 45

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM131100643001

Page: 3 of 45

# 3 Contents

			Page
1	CO	OVER PAGE	1
2	TE	ST SUMMARY	2
3	СО	ONTENTS	3
4		NERAL INFORMATION	
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT	6
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	
5	TE	ST RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	16
	5.4	6DB OCCUPY BANDWIDTH	
	5.5	Power Spectral Density	22
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.7	Spurious RF Conducted Emissions	
	5.8	RADIATED SPURIOUS EMISSION	
	5.8		
	5.8		
	5.9	BAND EDGE (RADIATED EMISSION)	36-45



Report No.: SZEM131100643001

Page: 4 of 45

# 4 General Information

# 4.1 Client Information

Applicant:	IDT Technology Limited
Address of Applicant:	Block C, 9/F., Kaiser Estate, Phase 1, 41 Man YueStreet, Hunghom, Kowloon, Hong Kong.
Manufacturer:	IDT Technology Limited
Address of Manufacturer:	Block C, 9/F., Kaiser Estate, Phase 1, 41 Man YueStreet, Hunghom, Kowloon, Hong Kong.
Factory:	IDT Technology Limited
Address of Factory:	Chentian Industrial Estate Xixiang, BaoAn, Shenzhen, P.R.C.

# 4.2 General Description of EUT

Product Name:	BLE Dongle
Model No.:	AD932
Trade Mark:	Oregon Scientific
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0 (with BLE mode)
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Fixed production
Test Software of EUT:	BTool (manufacturer declare)
Antenna Type	Integral
Antenna Gain	-1dBi
Power Supply:	DC 5V by PC
Test Voltage:	120V 60Hz



Report No.: SZEM131100643001

Page: 5 of 45

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: SZEM131100643001

Page: 6 of 45

# 4.3 Test Environment

Operating Environment:		
Temperature:	23.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1015mbar	

# 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
PC	DELL	DCSM
LCD-displaying	DELL	SP2208WFPt
KEYBOARD	DELL	SK-8115
MOUSE	Lenovo	MO28UOL
PC	IBM	8172
LCD-displaying	Lenovo	L1711pC
KEYBOARD	IBM	SK-8115
MOUSE	Lenovo	MO28UOA
Coder	HengTong ELECTRON	HT4000
Printer	Canon	BJC-1000SP

## 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

# SGS

# SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM131100643001

Page: 7 of 45

# 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

## FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

# 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

# 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM131100643001

Page: 8 of 45

# 4.10 Equipment List

	Conducted Emission	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24



Report No.: SZEM131100643001

Page: 9 of 45

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04



Report No.: SZEM131100643001

Page: 10 of 45

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM131100643001

Page: 11 of 45

# 5 Test results and Measurement Data

# 5.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

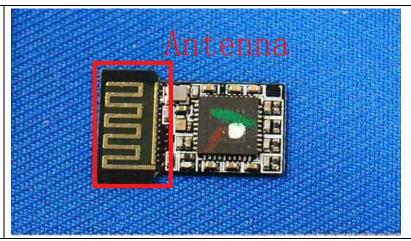

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1dBi.





Report No.: SZEM131100643001

Page: 12 of 45


# 5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		•
Test Procedure:	The mains terminal disturble room.	bance voltage test was	s conducted in a shie	elded
	<ol> <li>The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded.</li> <li>The tabletop EUT was place ground reference plane. A placed on the horizontal ground reference will of the EUT shall be 0.4 m vertical ground reference preference plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated extends</li> </ol>	<ol> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω lin impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT placed on the horizontal ground reference plane,</li> <li>The test was performed with a vertical ground reference plane. The resulting of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>In order to find the maximum emission, the relative positions of</li> </ol>		



Report No.: SZEM131100643001

Page: 13 of 45

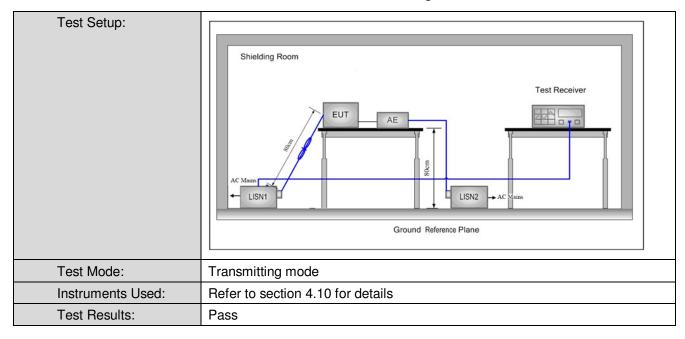



Report No.: SZEM131100643001


Page: 14 of 45

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

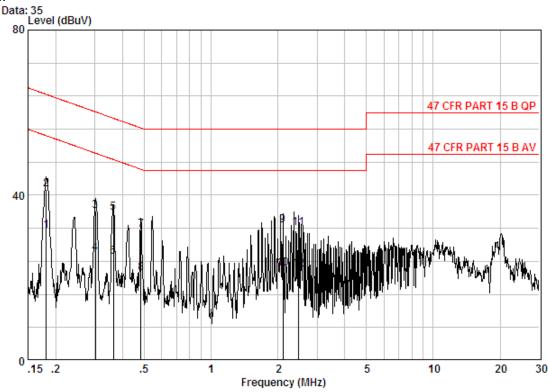

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 6430RF Test Mode : TX


		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18152	0.02	9.70	21.61	31.33	54.42	-23.08	Average
2	0.18152	0.02	9.70	31.74	41.46	64.42	-22.95	QP
3	0.30188	0.01	9.70	26.42	36.13	60.19	-24.06	QP
4	0.30188	0.01	9.70	16.26	25.97	50.19	-24.22	Average
5	0.36338	0.01	9.77	25.99	35.77	58.65	-22.88	QP
6	0.36338	0.01	9.77	15.24	25.02	48.65	-23.63	Average
7	0.48375	0.01	9.80	21.73	31.54	56.27	-24.73	QP
8	0.48375	0.01	9.80	11.24	21.05	46.27	-25.22	Average
9	2.110	0.02	9.81	22.77	32.60	56.00	-23.40	QP
10	2.110	0.02	9.81	12.32	22.15	46.00	-23.85	Average
11	2.474	0.02	9.82	22.26	32.10	56.00	-23.90	QP
12	2.474	0.02	9.82	12.24	22.08	46.00	-23.92	Average



Report No.: SZEM131100643001

Page: 15 of 45

## Neutral line:

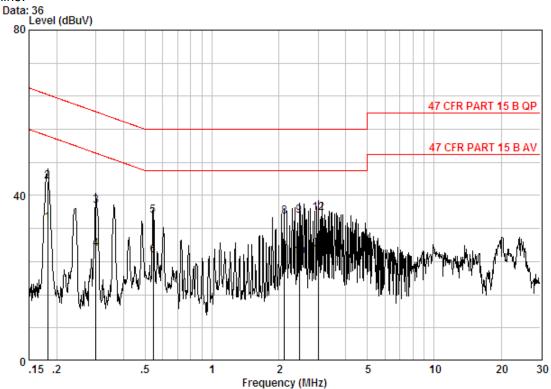

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 6430RF Test Mode : TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18249	0.02	9.70	23.61	33.33	54.37	-21.04	Average
2	0.18249	0.02	9.70	33.74	43.46	64.37	-20.91	QP
3	0.30028	0.01	9.70	27.83	37.54	60.24	-22.69	QP
4	0.30028	0.01	9.70	17.25	26.96	50.24	-23.28	Average
5	0.54355	0.01	9.80	25.19	35.00	56.00	-21.00	QP
6	0.54355	0.01	9.80	15.61	25.42	46.00	-20.58	Average
7	2.121	0.02	9.81	15.64	25.47	46.00	-20.53	Average
8	2.121	0.02	9.81	25.01	34.84	56.00	-21.16	QP
9	2.474	0.02	9.82	25.36	35.20	56.00	-20.80	QP
10	2.474	0.02	9.82	15.29	25.13	46.00	-20.87	Average
11	3.025	0.02	9.85	15.65	25.51	46.00	-20.49	Average
12	3.025	0.02	9.85	25.90	35.76	56.00	-20.24	QP

## Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM131100643001

Page: 16 of 45

# 5.3 Conducted Peak Output Power

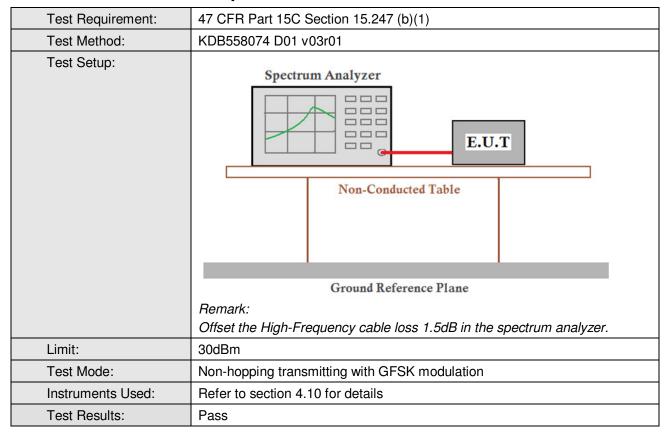

#### **Measurement Data**

GFSK mode								
Test channel Peak Output Power (dBm) Limit (dBm) Re								
Lowest	1.74	30.00	Pass					
Middle	1.27	30.00	Pass					
Highest	0.23	30.00	Pass					




Report No.: SZEM131100643001


Page: 17 of 45

## Test plot as follows:

Test mode: GFSK Test channel:2402MHz Lowest

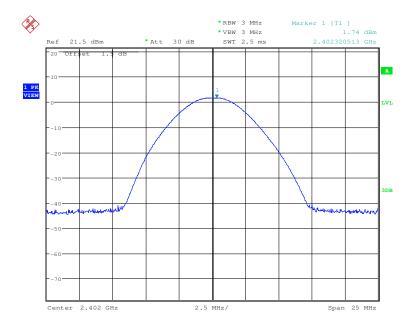

Test mode: GFSK Test channel:2440MHz Middle

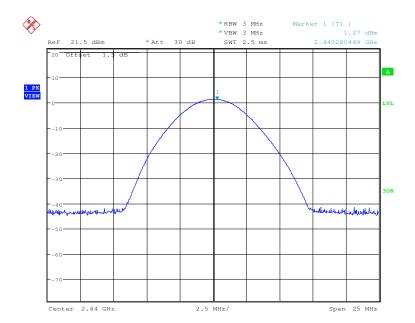




Report No.: SZEM131100643001

Page: 18 of 45

Test mode: GFSK Test channel:2480MHz Highest

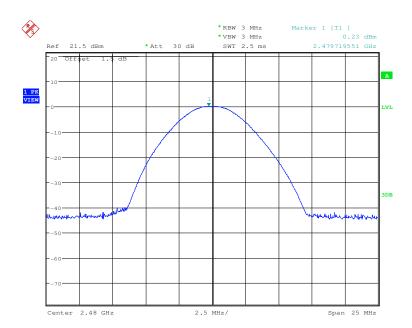




Report No.: SZEM131100643001

Page: 19 of 45

# 5.4 6dB Occupy Bandwidth

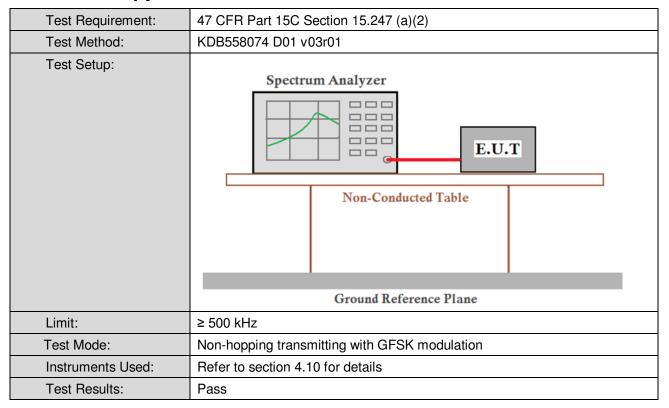

#### **Measurement Data**

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.711538461550	≥500	Pass
Middle	0.706730769235	≥500	Pass
Highest	0.730769230741	≥500	Pass




Report No.: SZEM131100643001


Page: 20 of 45

# Test plot as follows:

Test mode: GFSK Test channel:2402MHz Lowest

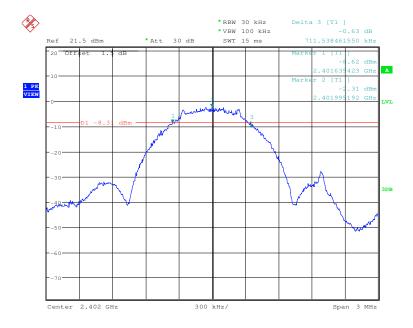

Test mode: GFSK Test channel:2440MHz Middle

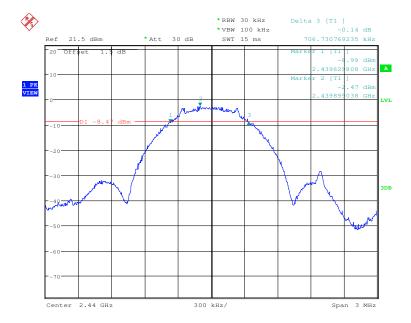




Report No.: SZEM131100643001

Page: 21 of 45

Test mode: GFSK Test channel:2480MHz Highest

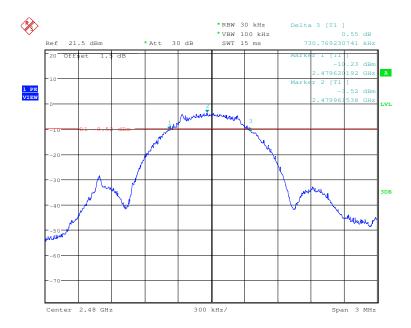






Report No.: SZEM131100643001

Page: 22 of 45

# 5.5 Power Spectral Density

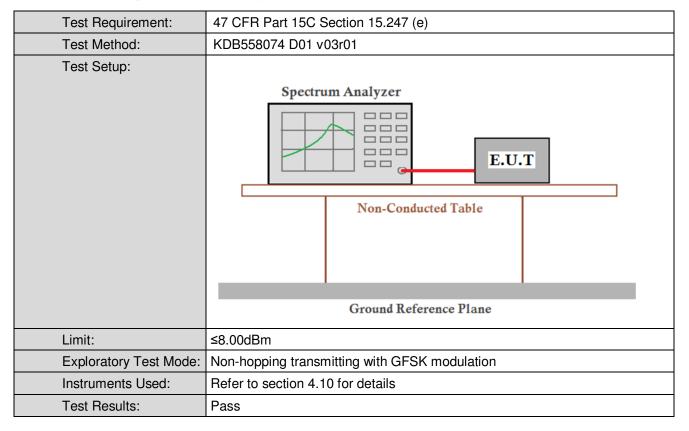

#### **Measurement Data**

GFSK mode								
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	1.44	≤8.00	Pass					
Middle	0.96	≤8.00	Pass					
Highest	0.02	≤8.00	Pass					




Report No.: SZEM131100643001


Page: 23 of 45

## Test plot as follows:

Test mode: GFSK Test channel:2402MHz Lowest

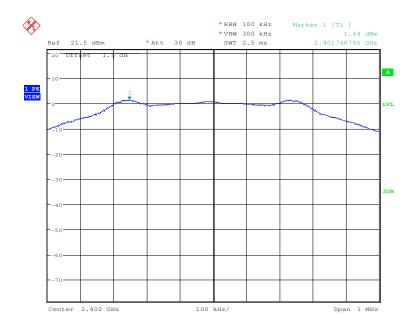



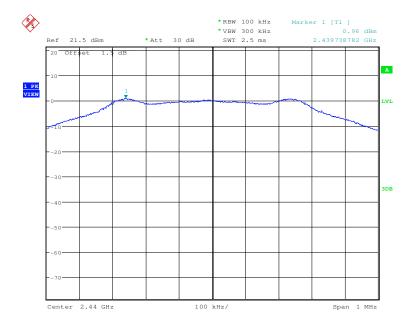




Report No.: SZEM131100643001

Page: 24 of 45

Test mode: GFSK Test channel:2480MHz Highest

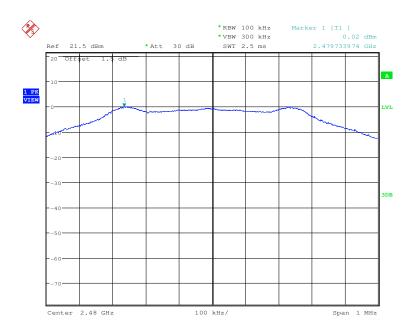




Report No.: SZEM131100643001

Page: 25 of 45

# 5.6 Band-edge for RF Conducted Emissions

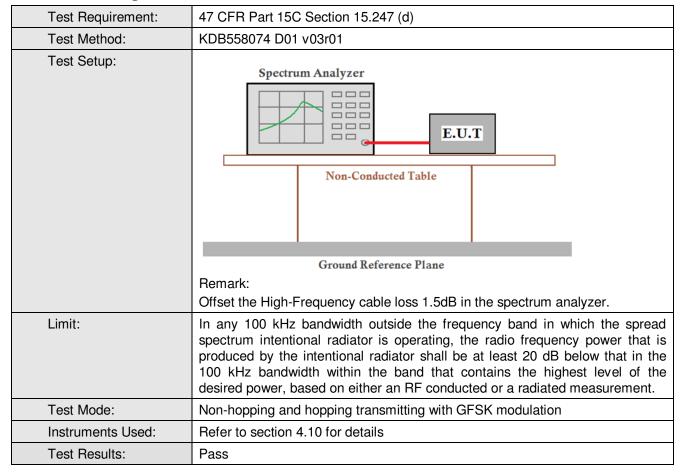




Report No.: SZEM131100643001


Page: 26 of 45

## Test plot as follows:

Test mode: GFSK Test channel:2402MHz Lowest

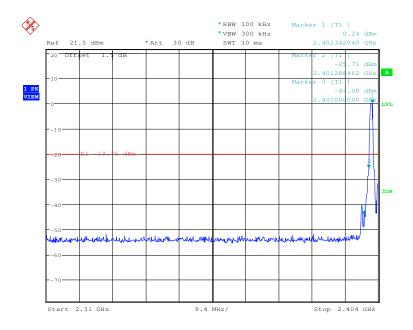

Test mode: GFSK Test channel:2480MHz Highest

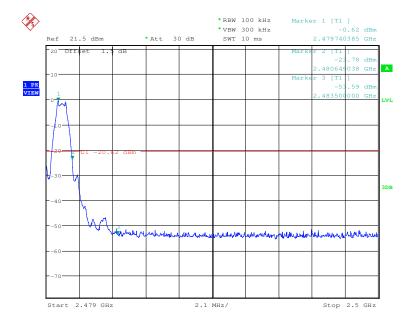



Report No.: SZEM131100643001

Page: 27 of 45

# 5.7 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r01					
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Non-hopping transmitting with GFSK modulation					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					




Report No.: SZEM131100643001

Page: 28 of 45

Test mode: GFSK Test channel:2402MHz Lowest

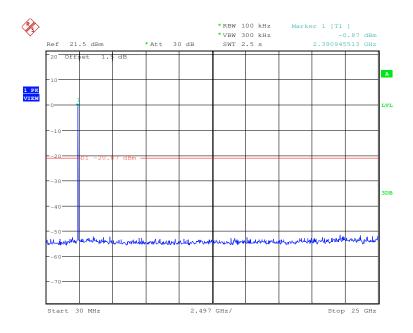

Test mode:	GFSK	Test channel:2440MHz	Middle
Tool Ilload.	ai oit	1 Oot ondimion. E 1 Town 12	Wildaio

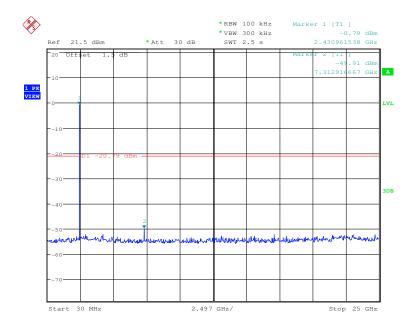




Report No.: SZEM131100643001

Page: 29 of 45

Test mode: GFSK Test channel:2480MHz Highest

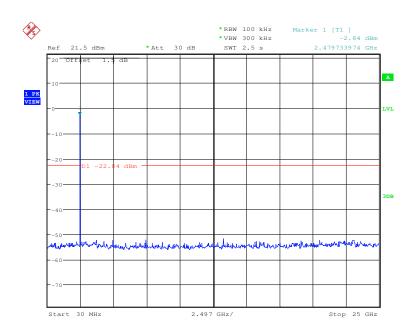





Report No.: SZEM131100643001

Page: 30 of 45

# 5.8 Radiated Spurious Emission

5.8.1 Spurious Emiss	sions								
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009	ANSI C63.10 2009							
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	<u>z</u>	30kHz	Peak	Ī	
	0.009MHz-0.090MH	z	Average	10kHz	Z	30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	<u>z</u>	30kHz	Peak		
	0.110MHz-0.490MH	z	Average	10kHz	<u>z</u>	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	<u>.</u>	3MHz	Peak		
	Above Tariz		Peak	1MHz	1MHz		Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (r		
	0.009MHz-0.490MHz	`	400/F(kHz)	(dDd v/iii)			300	,	
	0.490MHz-1.705MHz		4000/F(kHz)	_		_	30		
	1.705MHz-30MHz	_	30	_			30		
	30MHz-88MHz		100	40.0	Q	uasi-peak	3		
	88MHz-216MHz		150	43.5		uasi-peak	3		
	216MHz-960MHz		200	46.0		uasi-peak	3		
	960MHz-1GHz			54.0		uasi-peak	3		
	Above 1GHz 500		54.0		Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								
Test Setup:									







Report No.: SZEM131100643001

Page: 31 of 45

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- h. Repeat above procedures until all frequencies measured was complete.


Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM131100643001

Page: 32 of 45

Radiated Emission below 1GHz					
30MHz~1GHz (QP)					
Test mode:	Transmitting	Vertical			

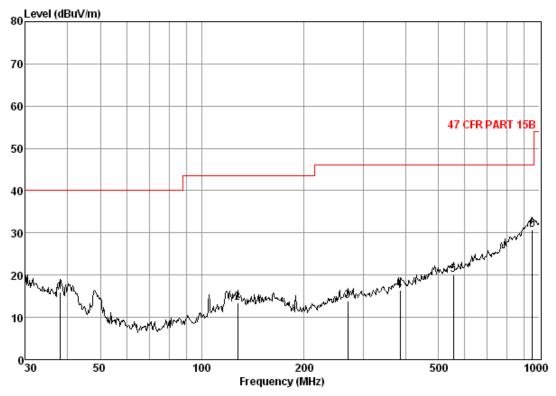

Condition: 47 CFR PART 15B 3m 3142C VERTICAL


Job No. : 6430RF Test mode: TX mode

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	38.08 127.66 270.37 386.63 554.83 952.09	1.77 2.16 2.66	8.90 11.71 14.48	27. 33 27. 02 26. 48 27. 05 27. 61 26. 54	31.17 29.73 29.65 30.54	13. 92 16. 47	43.50 46.00 46.00 46.00	-32.08 -29.53



Report No.: SZEM131100643001

Page: 33 of 45

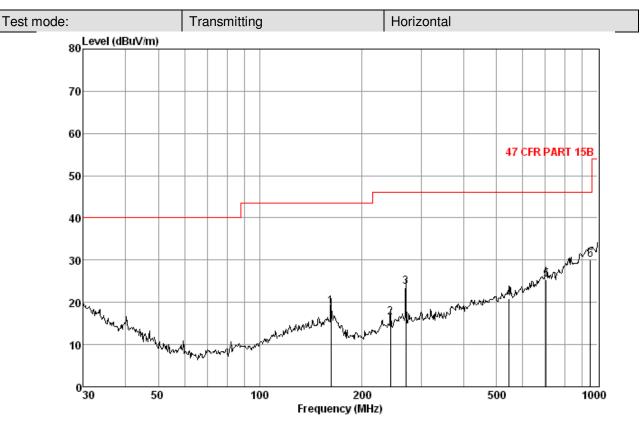

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 6430RF Test mode: TX mode

Freq			Preamp Factor			Limit Line	Over Limit
MHz	d₿	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 162.04 2 243.38 3 270.37 4 547.10 5 704.23 6 952.09	1.34 1.64 1.77 2.65 2.92	8. 90 14. 78 16. 95	26. 85 26. 55 26. 48 27. 62 27. 41 26. 54	39. 44 31. 18 33. 01	16.39 23.63 20.99 25.47	46.00 46.00 46.00 46.00	-22.37 -25.01



Report No.: SZEM131100643001

Page: 34 of 45

## 5.8.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1)	Test	channel:	Lowest	Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2995.538	3.31	33.38	40.30	48.11	44.50	74	-29.50	Vertical
3903.444	4.08	33.70	40.97	47.53	44.34	74	-29.66	Vertical
4804.000	4.69	34.70	41.63	47.80	45.56	74	-28.44	Vertical
7206.000	5.77	35.88	39.87	48.04	49.82	74	-24.18	Vertical
9608.000	5.99	37.30	37.80	46.21	51.70	74	-22.30	Vertical
12148.020	6.51	39.06	38.34	45.65	52.88	74	-21.12	Vertical
3057.166	3.36	33.38	40.34	47.50	43.90	74	-30.10	Horizontal
3815.033	4.01	33.59	40.90	47.02	43.72	74	-30.28	Horizontal
4804.000	4.69	34.70	41.63	50.47	48.23	74	-25.77	Horizontal
7206.000	5.77	35.88	39.87	48.10	49.88	74	-24.12	Horizontal
9608.000	5.99	37.30	37.80	45.53	51.02	74	-22.98	Horizontal
12334.980	6.55	39.24	38.42	44.34	51.71	74	-22.29	Horizontal

Worse case	mode:	GFSK(DH1	) Test	channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3010.828	3.32	33.40	40.31	46.66	43.07	74	-30.93	Vertical
3983.750	4.14	33.80	41.02	47.38	44.30	74	-29.70	Vertical
4880.000	4.72	34.59	41.68	47.51	45.14	74	-28.86	Vertical
7320.000	5.92	35.93	39.77	48.40	50.48	74	-23.52	Vertical
9760.000	5.98	37.46	37.66	45.46	51.24	74	-22.76	Vertical
12303.620	6.55	39.21	38.40	45.29	52.65	74	-21.35	Vertical
3018.502	3.33	33.39	40.31	48.11	44.52	74	-29.48	Horizontal
3844.279	4.04	33.61	40.93	48.07	44.79	74	-29.21	Horizontal
4880.000	4.72	34.59	41.68	51.43	49.06	74	-24.94	Horizontal
7320.000	5.92	35.93	39.77	49.18	51.26	74	-22.74	Horizontal
9760.000	5.98	37.46	37.66	45.46	51.24	74	-22.76	Horizontal
12210.020	6.52	39.11	38.36	45.70	52.97	74	-21.03	Horizontal



Report No.: SZEM131100643001

Page: 35 of 45

Worse case	mode:	GFSK(DH1	) Te	st channel:	Highest	Re	mark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2980.327	3.31	33.35	40.28	46.69	43.07	74	-30.93	Vertical
3883.622	4.07	33.68	40.95	48.01	44.81	74	-29.19	Vertical
4960.000	4.76	34.46	41.74	48.65	46.13	74	-27.87	Vertical
7440.000	6.04	35.98	39.67	48.22	50.57	74	-23.43	Vertical
9920.000	5.98	37.63	37.53	45.78	51.86	74	-22.14	Vertical
12210.020	6.52	39.11	38.36	44.44	51.71	74	-22.29	Vertical
3064.958	3.36	33.38	40.35	47.21	43.60	74	-30.40	Horizontal
3973.622	4.14	33.78	41.02	47.92	44.82	74	-29.18	Horizontal
4960.000	4.76	34.46	41.74	52.20	49.68	74	-24.32	Horizontal
7440.000	6.04	35.98	39.67	47.94	50.29	74	-23.71	Horizontal
9920.000	5.98	37.63	37.53	45.62	51.70	74	-22.30	Horizontal
12117.140	6.50	39.02	38.32	44.54	51.74	74	-22.26	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM131100643001

Page: 36 of 45

# 5.9 Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15	7 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance: 3m	easurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHZ	74.0	Peak Value							
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:	a.	The EUT was placed on the top of a rotating table 0.8 meters above
		the ground at a 3 meter semi-anechoic camber. The table was
		rotated 360 degrees to determine the position of the highest
		Proprieta de la companya del companya de la companya del companya de la companya

- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM131100643001

Page: 37 of 45

	<ul><li>g. Test the EUT in the lowest channel , the Highest channel</li><li>h. Repeat above procedures until all frequencies measured was complete.</li></ul>
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM131100643001

Page: 38 of 45

## Test plot as follows:

Band edge (Radiat	ed Emission)					
Test mode:	GFSK	Test channel: 2402MHz	Lowest	Remark:	Peak	Vertical

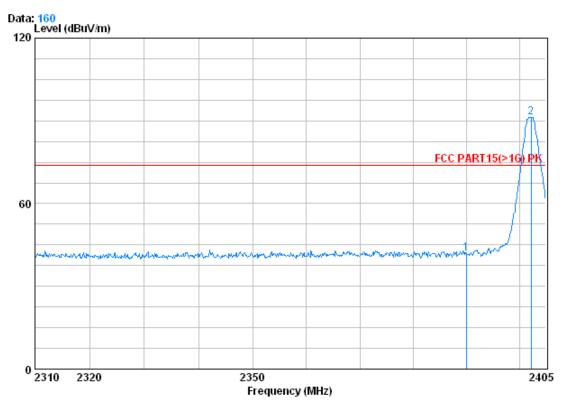

Condition : FCC PART15(>1G) PK 3m VERTICAL


Job No. : 6430RF Mode : 2402 Bandedge


			Cable	lntenna	Preamp	Kead		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	x	2390.000 2402.245			39.85 39.86				



Report No.: SZEM131100643001

Page: 39 of 45



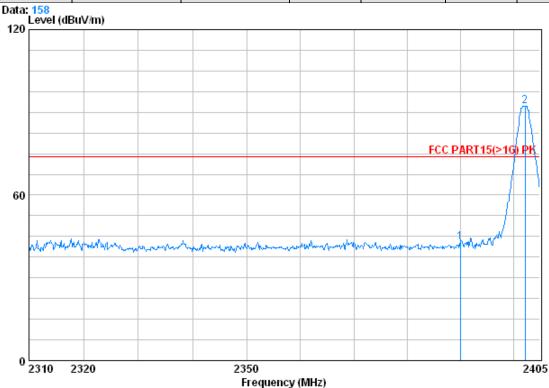

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 6430RF

Mode : 2402 Bandedge


		Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	2390.000 2402.245							



Report No.: SZEM131100643001

Page: 40 of 45



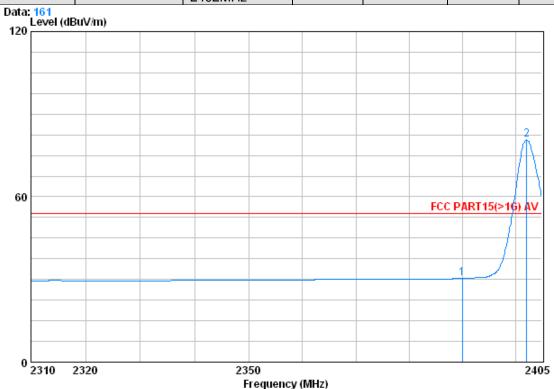

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 6430RF

Mode : 2402 Bandedge


			Cable	intenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1	2390.000	2.98	32.51	39.85	34.72	30.37	54.00	-23.63
2	2 0	2402.150	2.98	32.51	39.86	85.05	80.68	54.00	26.68



Report No.: SZEM131100643001

Page: 41 of 45

Test mode: GFSK	Test channel: 2402MHz	Lowest	Remark:	Average	Horizontal
-----------------	--------------------------	--------	---------	---------	------------

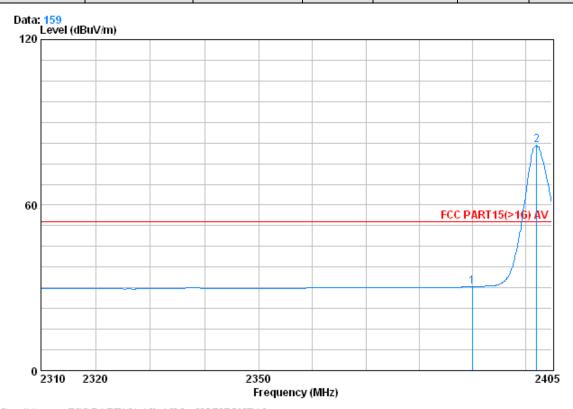

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 6430RF

Mode : 2402 Bandedge

	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 B	2390.000			39.85				






Report No.: SZEM131100643001

Page: 42 of 45



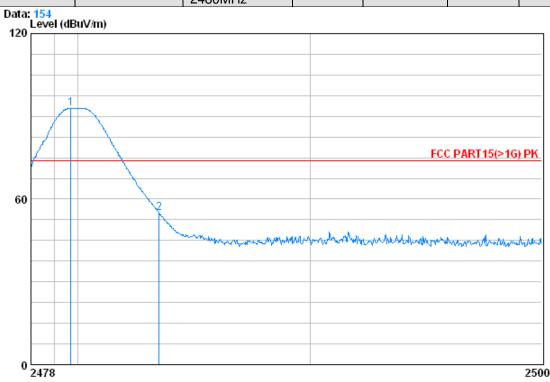

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 6430RF

Mode: 2480 Bandedge


		CableAntenna		Preamp Read		Limit		Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
			,			,	,		
1 X	2479.716	3 03	32 67	39.92	97 17	92 95	74 00	18 95	
1 21	2115.110								
2	2483.500	3.03	32.67	39.92	59.22	55.00	74.00	-19.00	



Report No.: SZEM131100643001

Page: 43 of 45

Test mode: GFSK Test channel: Highest Remark: Peak Horizontal

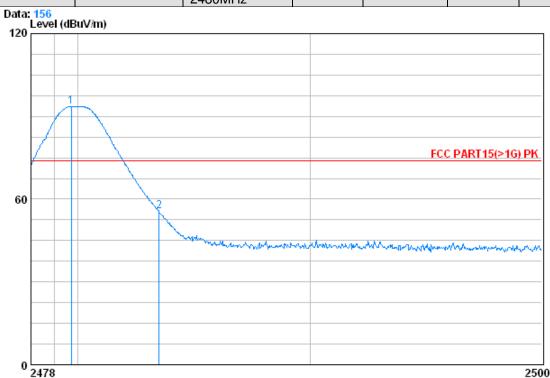

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 6430RF


Mode: 2480 Bandedge


		CableAntenna		Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2479.738	3.03	32.67	39.92	97.72	93.50	74.00	19.50
2	2483.500	3.03	32.67	39.92	59.93	55.72	74.00	-18.28



Report No.: SZEM131100643001

Page: 44 of 45



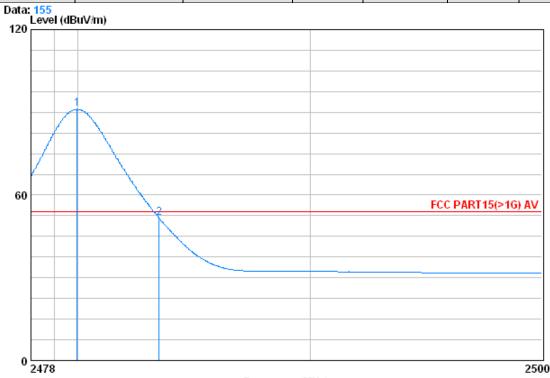

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 6430RF


Mode : 2480 Bandedge


	Ca	CableAntenna		reamp	Read		Limit	Over
	Freq I	oss Fa	actor F	actor	Level	Level	Line	Limit
	MHz	dB —	dB/m	dB -	dBuV	dBuV/m	dBuV/m	dB
						,	•	
1 0 2	479.980 3	. 03 3	32 67	39.92	as 30	Q1 N8	54 00	37 08
1 6	1/3.500		04.01	33.32	55.50	51.00	34.00	37.00
2 2	483.500 3	.03 3	32.67	39.92	56.00	51.78	54.00	-2.22



Report No.: SZEM131100643001

Page: 45 of 45



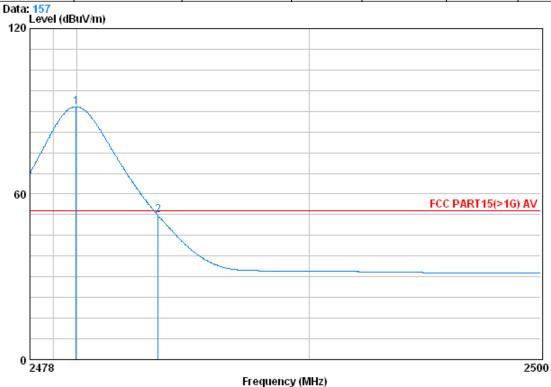

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 6430RF

Mode : 2480 Bandedge

		Freq	CableAntenna Loss Factor		Preamp Read Factor Level			Limit Line		
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2	0	2479.980 2483.500			39.92 39.92					

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor