


# INTERTEK TESTING SERVICES

Report No.: HK11040580-1  
Sample No.: 2/2

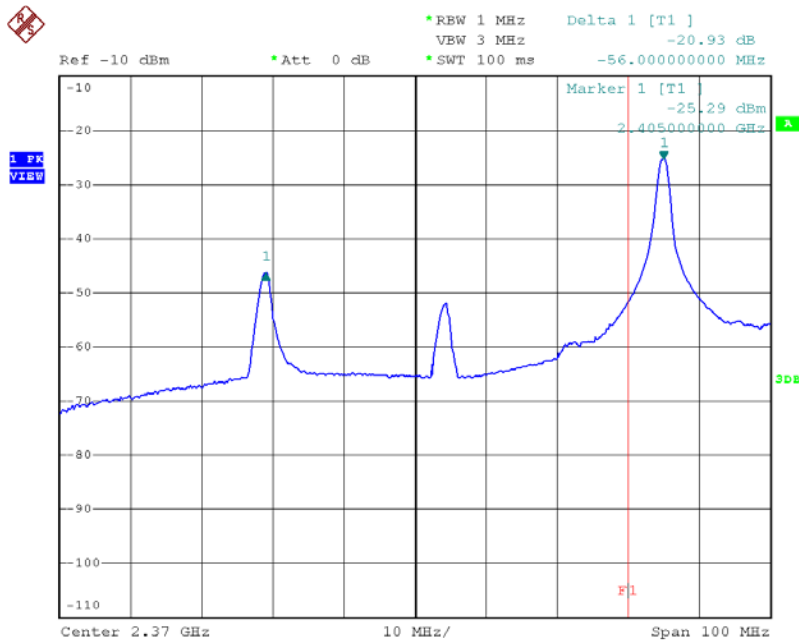


OATS = 90.4dBuV/m

Field Strength (Peak)  
=90.4 - 20.93 dBuV/m  
=69.47 dBuV/m  
(Limit: 74 dBuV/m)

Field Strength (Average)  
=69.47 - AF dBuV/m  
=69.47 - 54.0 dBuV/m  
=15.47 dBuV/m  
(Limit: 54 dBuV/m)

Date: 29.APR.2011 03:42:24

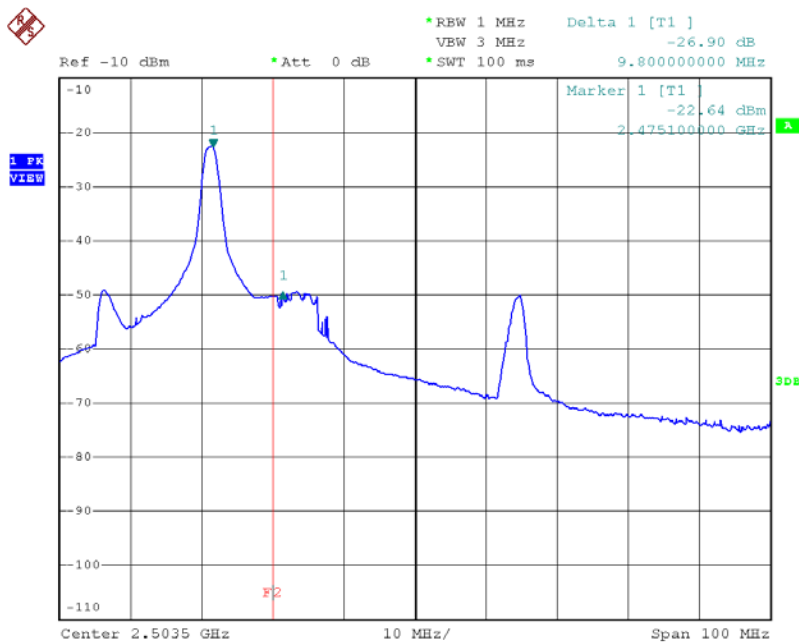

OATS = 89.6dBuV/m

Field Strength (Peak)  
=89.6 - 26.9 dBuV/m  
=62.7 dBuV/m  
(Limit: 74 dBuV/m)

Field Strength (Average)  
=62.7 - AF dBuV/m  
=62.7 - 54.0 dBuV/m  
=8.7 dBuV/m  
(Limit: 54 dBuV/m)

Date: 29.APR.2011 01:08:18

**Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)**